

# TEST REPORT

**Reference No.**..... : WTD23D12264000W002  
**FCC ID**..... : 2BAHE-SCSS0013  
**Applicant** ..... : Spa World Corporation  
**Address** ..... : 5701 NW 35th Ave, 33142, Miami, Florida, United States  
**Manufacturer** ..... : Spa World Corporation  
**Address** ..... : 5701 NW 35th Ave, 33142, Miami, Florida, United States  
**Product** ..... : sauna controller with bluetooth connection  
**Model(s)**..... : CP-1.50, CP-1.51, CP-1.52, CP-1.53, CP-1.54, CP-1.55, CP-1.56, CP-1.57, CP-1.58, CP-1.59  
**Standards** ..... : FCC 47CFR Part 15 Subpart C Section 15.247  
**Date of Receipt sample** .... : 2023-12-14  
**Date of Test** ..... : 2023-12-14 to 2024-01-08  
**Date of Issue** ..... : 2024-01-10  
**Test Result** ..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group Co., Ltd.**

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

*Ford Wang*

Ford Wang / Project Engineer

Approved by:

*Deval Qin*  


Deval Qin / Designated Reviewer

## 2 Contents

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 CONTENTS</b> .....	<b>2</b>
<b>3 REVISION HISTORY</b> .....	<b>4</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T.....	5
4.2 DETAILS OF E.U.T .....	5
4.3 CHANNEL LIST .....	6
4.4 TEST FACILITY .....	7
4.5 SUBCONTRACTED .....	7
4.6 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
4.7 TEST MODE .....	7
<b>5 EQUIPMENT USED DURING TEST</b> .....	<b>8</b>
5.1 EQUIPMENTS LIST .....	8
5.2 MEASUREMENT UNCERTAINTY .....	9
<b>6 TEST SUMMARY</b> .....	<b>10</b>
<b>7 RADIATED EMISSIONS</b> .....	<b>11</b>
7.1 EUT OPERATION .....	11
7.2 TEST SETUP .....	12
7.3 SPECTRUM ANALYZER SETUP.....	13
7.4 TEST PROCEDURE .....	14
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
7.6 SUMMARY OF TEST RESULTS .....	15
<b>8 BAND EDGE MEASUREMENT</b> .....	<b>51</b>
8.1 TEST PROCEDURE .....	51
8.2 TEST SETUP .....	51
8.3 TEST RESULT .....	52
<b>9 BANDWIDTH MEASUREMENT</b> .....	<b>55</b>
9.1 TEST PROCEDURE .....	55
9.2 TEST SETUP .....	55
9.3 TEST RESULT .....	55
<b>10 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>62</b>
10.1 TEST PROCEDURE .....	62
10.2 TEST SETUP .....	62
10.3 TEST RESULT .....	62
<b>11 HOPPING CHANNEL SEPARATION</b> .....	<b>66</b>
11.1 TEST PROCEDURE .....	66
11.2 TEST SETUP .....	66
11.3 TEST RESULT .....	67
<b>12 NUMBER OF HOPPING FREQUENCY</b> .....	<b>71</b>
12.1 TEST PROCEDURE .....	71
12.2 TEST SETUP .....	71
12.3 TEST RESULT .....	72
<b>13 DWELL TIME</b> .....	<b>73</b>

13.1	TEST PROCEDURE .....	73
13.2	TEST SETUP .....	74
13.3	TEST RESULT .....	74
<b>14</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>78</b>
<b>15</b>	<b>RF EXPOSURE.....</b>	<b>78</b>
<b>16</b>	<b>PHOTOGRAPHS –TEST SETUP AND EUT PHOTOS.....</b>	<b>78</b>

### 3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD23D12264000W002	2023-12-14	2023-12-14 to 2024-01-08	2024-01-10	Original	-	Valid

## 4 General Information

### 4.1 General Description of E.U.T

Product:	sauna controller with bluetooth connection
Model(s):	CP-1.50, CP-1.51, CP-1.52, CP-1.53, CP-1.54, CP-1.55, CP-1.56, CP-1.57, CP-1.58, CP-1.59
Model difference:	Only the model names and brand names are different. Model CP-1.50 was tested in the report.
BT Version:	5.0
Hardware Version:	0.1.0
Software Version:	V1.0

### 4.2 Details of E.U.T

Operation Frequency:	2402-2480MHz, 79 Channels in total
Modulation Technology:	GFSK, $\pi/4$ DQPSK, 8DPSK
Max. RF output power:	1.40dBm
Antenna installation:	PCB Printed Antenna
Antenna Gain:	1.7dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTEK lab has not verified the authenticity of its information.

Ratings:	DC 5V
----------	-------

### 4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

#### Frequency hopping systems (FHS):

This transmitter device is frequency hopping device, and complies with FCC Part15.247 Requirements.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. The average time of occupancy on any channel is less than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels (79 channels) employed.

All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an Bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for FCC Part15.247.

Waltek Testing Group Co., Ltd.

<http://www.waltek.com.cn>

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 19, 56, 40, 18, 50, 09, 02, 23, 32, 41, 33, 31, 65, 73, 53, 69, 06, 22, 67, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 17, 60, 63, 54, 03, 00, 59, 64, 75, 35, 66, 43, 15, 45, 39, 77, 55, 71, 47, 61, 27, 30, 48, 72, 01, 14, 07, 25, 34, 12, 28, 44, 51, 16, 49, 74, 11, 05, 13, 37, 62 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

#### 4.4 Test Facility

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

#### 4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes       No

If Yes, list the related test items and lab information:

Test Lab:      N/A

Lab address: N/A

Test items:    N/A

#### 4.6 Abnormalities from Standard Conditions

None.

#### 4.7 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

Note: The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst-case data were reported.

## 5 Equipment Used during Test

### 5.1 Equipments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Calibration Due Date
<b>3m Semi-anechoic Chamber for Radiation Emissions 1#</b>						
1	Spectrum Analyzer	R&S	FSP30	100091	2023-04-24	2024-04-23
2	Amplifier	Agilent	8447D	2944A10178	2023-07-27	2024-07-26
3	Tri-log Broadband Antenna	SCHWARZBECK	VULB9163	336	2023-08-07	2024-08-06
4	Coaxial Cable	Top	TYPE16(13M)	-	2023-04-24	2024-04-23
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D	667	2023-02-02	2024-02-01
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2023-07-27	2024-07-26
7	Broadband Preamplifier	COMPLIANCE	PAP-1G18	2004	2023-08-08	2024-08-07
8	Coaxial Cable	Top	ZT26-NJ-NJ-8M/FA	-	2023-02-02	2024-02-01
9	Microwave Amplifier	SCHWARZBECK	BBV 9721	100472	2023-07-27	2024-07-26
10	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2023-04-24	2024-04-23
<b>3m Semi-anechoic Chamber for Radiation Emissions 2#</b>						
1	Test Receiver	R&S	ESCI	101296	2023-04-24	2024-04-23
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2023-11-04	2024-11-03
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2023-05-07	2024-05-06
4	Amplifier	ANRITSU	MH648A	M43381	2023-04-24	2024-04-23
5	Cable	HUBER+SUHNER	CBL2	525178	2023-04-24	2024-04-23
<b>RF Conducting</b>						
1	Spectrum Analyzer	R&S	FSP40	100501	2023-07-27	2024-07-26
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-07-27	2024-07-26

#### Test Software:

Test Item	Software name	Software version
Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)



## 5.2 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 <sup>-7</sup> Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

## 6 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	N/A
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	Pass
Band edge	15.247(d) 15.205(a)	Pass
Bandwidth	15.247(a)(1)	Pass
Maximum Peak Output Power	15.247(b)(1)	Pass
Frequency Separation	15.247(a)(1)	Pass
Number of Hopping Frequency	15.247(a)(1)(iii)	Pass
Dwell time	15.247(a)(1)(iii)	Pass
Antenna Requirement	15.203	Pass
RF Exposure	1.1307(b)(1)	Pass
Note: Pass=Compliance, NC=Not Compliance, NT=Not Tested, N/A=Not Applicable.		

## 7 Radiated Emissions

Test Requirement: FCC 47CFR Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 7.1 EUT Operation

Operating Environment:

Temperature: 21.3 °C

Humidity: 50.3 % RH

Atmospheric Pressure: 101.6kPa


EUT Operation:

The test was performed in Transmitting mode, the test data were shown in the report.


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

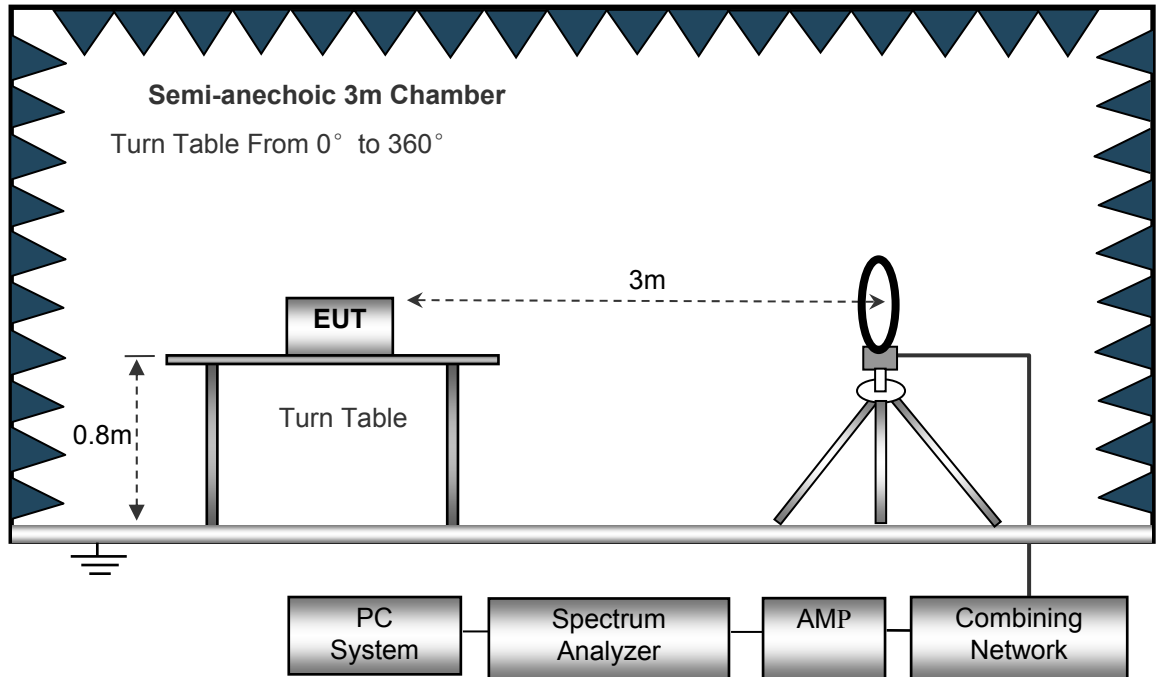

The test setup for emission measurement from 30 MHz to 1 GHz.

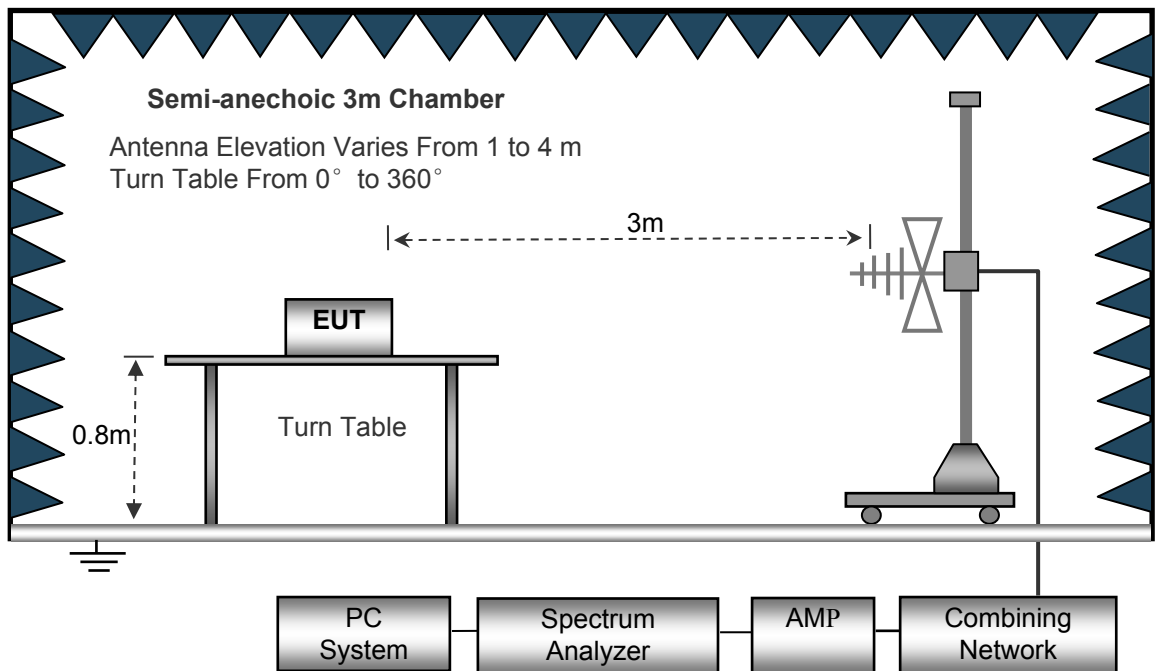

The test setup for emission measurement above 1 GHz.

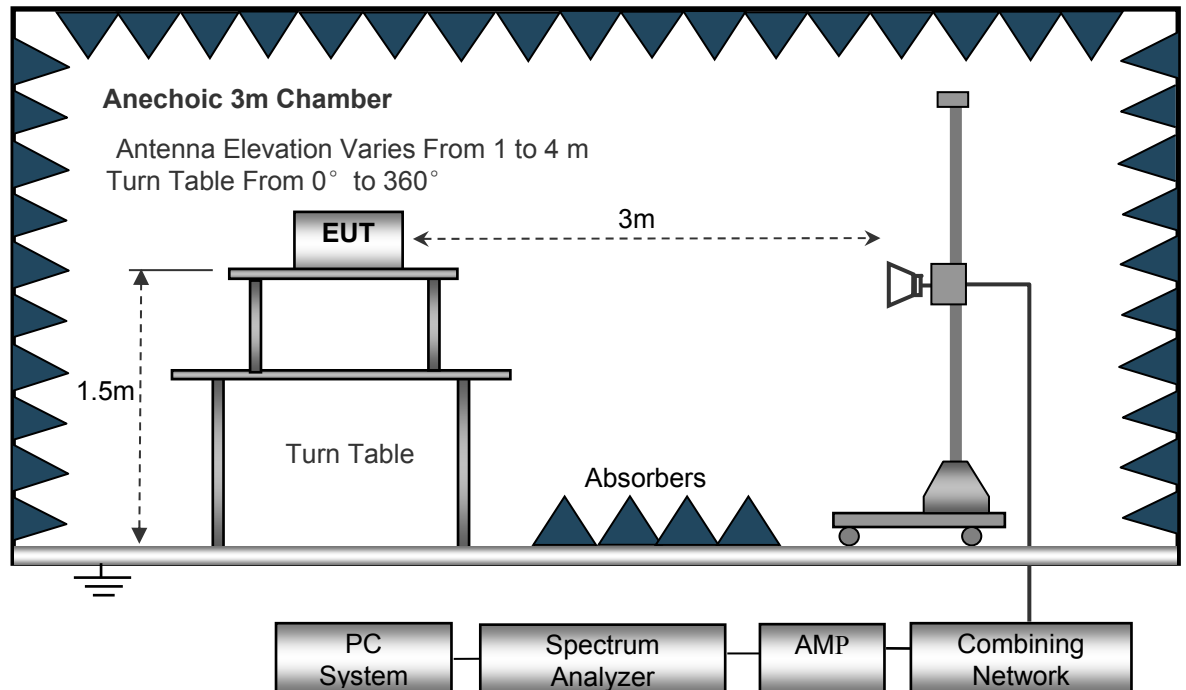

### 7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth ..... 10 kHz  
 Video Bandwidth ..... 10 kHz  
 Resolution Bandwidth ..... 10 kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth ..... 100 kHz  
 Video Bandwidth ..... 300 kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth ..... 1 MHz  
 Video Bandwidth ..... 3 MHz  
 Detector ..... Ave.  
 Resolution Bandwidth ..... 1 MHz  
 Video Bandwidth ..... 10 Hz

## 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

## 7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 7.6 Summary of Test Results

**Test Frequency: 9kHz ~ 30MHz**


The measurements were more than 20 dB below the limit and not reported.

**Test Frequency: 30MHz ~ 1GHz**

**DH5 mode**


**Frequency: 2402 MHz**

Antenna Polarization: Horizontal

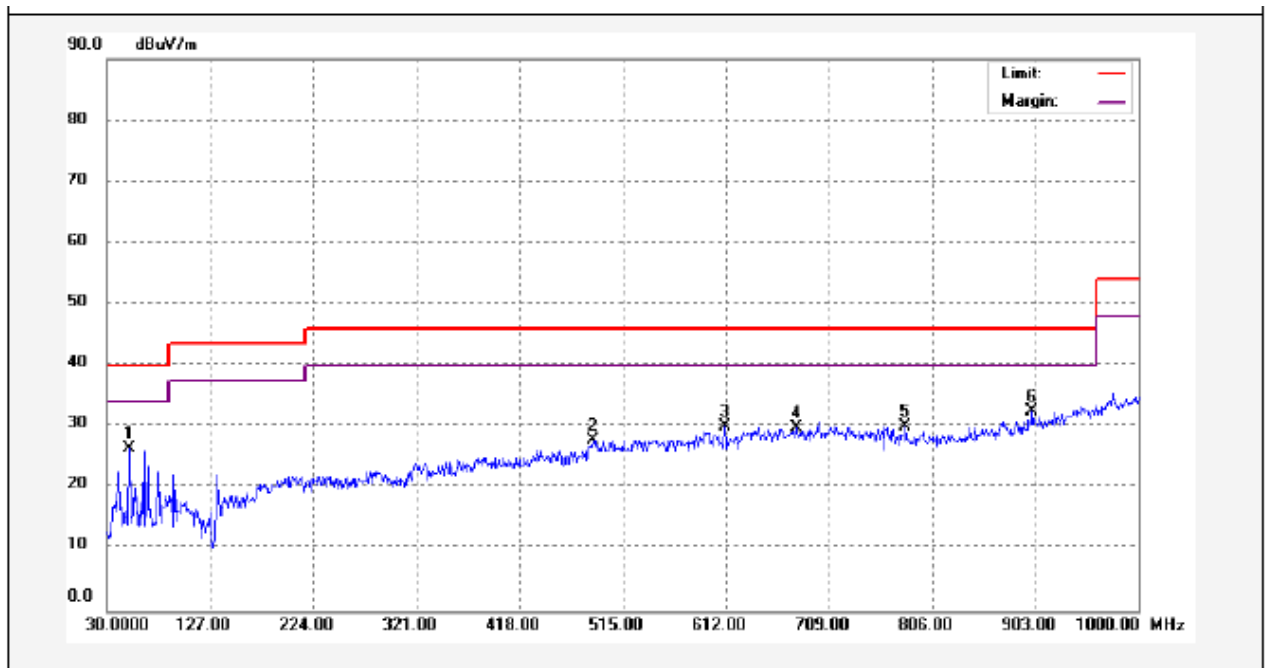

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	51.3400	40.09	-13.69	26.40	40.00	-13.60	peak	
2	486.8700	33.78	-5.98	27.80	46.00	-18.20	peak	
3	611.0298	31.93	-1.96	29.97	46.00	-16.03	peak	
4	677.9600	30.89	-1.14	29.75	46.00	-16.25	peak	
5	780.7798	30.48	-0.50	29.98	46.00	-16.02	peak	
6	900.0900	30.00	2.60	32.60	46.00	-13.40	peak	

Antenna Polarization: Vertical

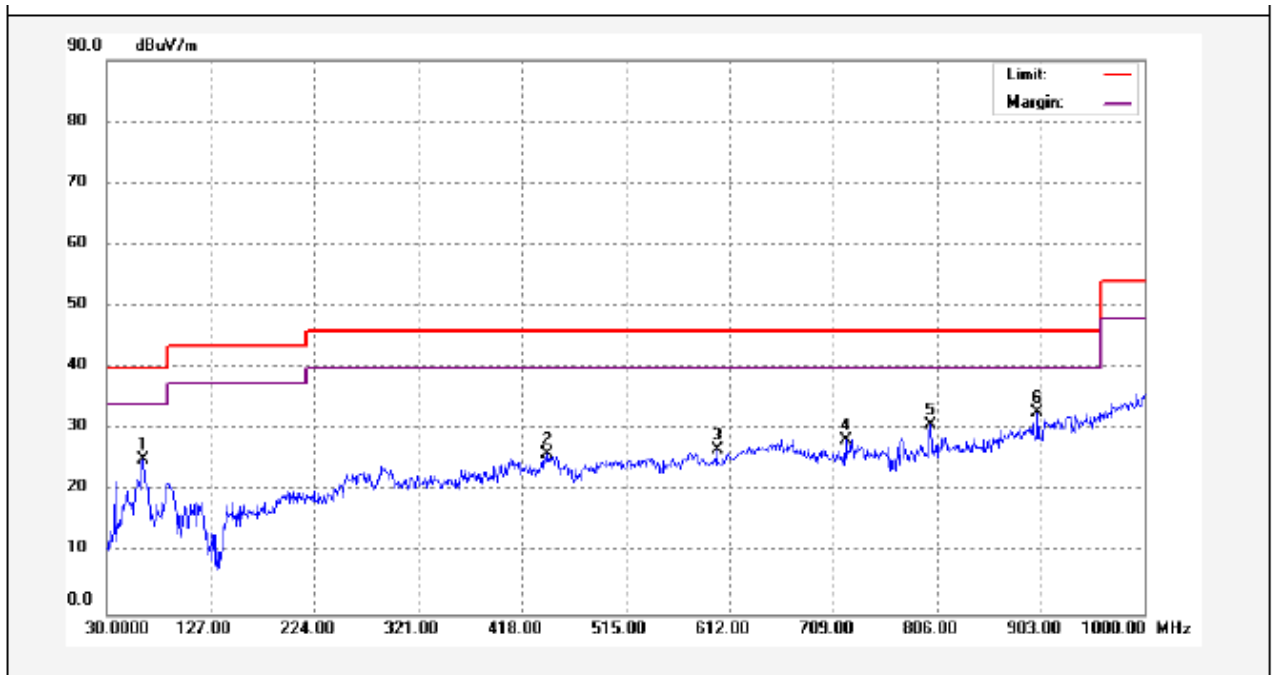


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	63.9500	39.58	-14.57	25.01	40.00	-14.99	peak	
2	442.2500	32.52	-6.59	25.93	46.00	-20.07	peak	
3	600.3600	28.68	-2.10	26.58	46.00	-19.42	peak	
4	720.6399	28.98	-0.72	28.26	46.00	-17.74	peak	
5	800.1798	31.23	-0.50	30.73	46.00	-15.27	peak	
6	900.0900	30.14	2.60	32.74	46.00	-13.26	peak	




**DH5 mode****Frequency: 2441 MHz**

Antenna Polarization: Horizontal

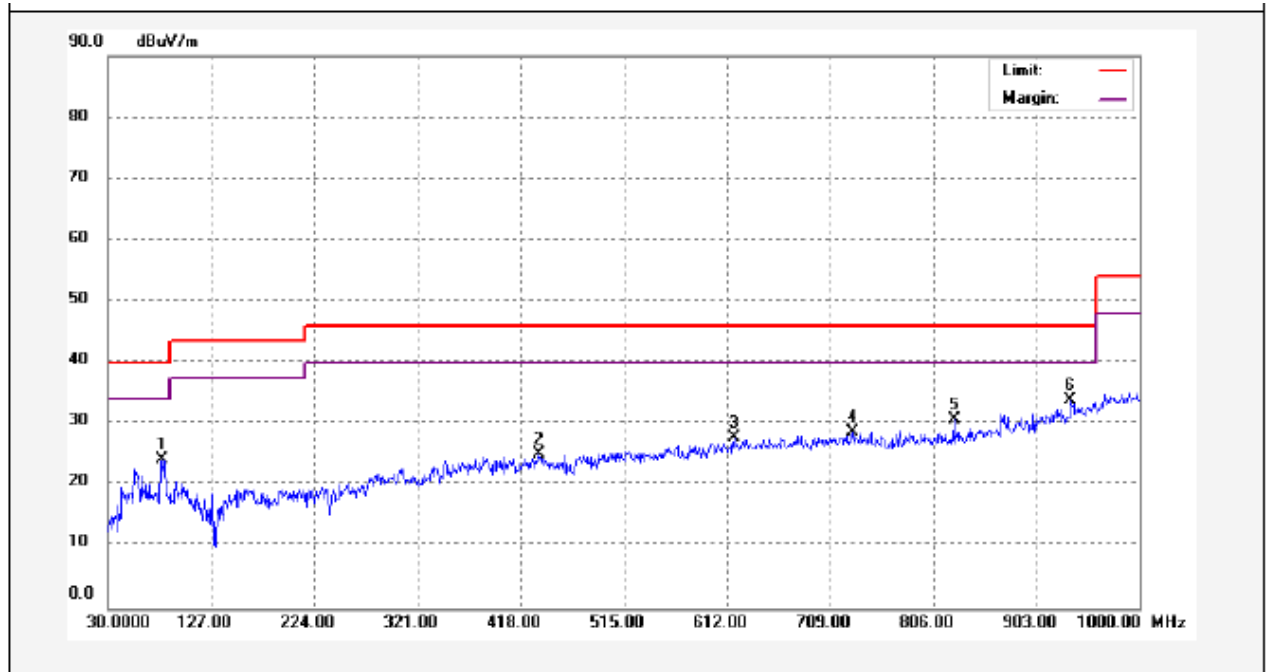

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	80.4398	41.45	-17.21	24.24	40.00	-15.76	peak	
2	435.4599	31.74	-6.68	25.06	46.00	-20.94	peak	
3	618.7898	29.59	-1.86	27.73	46.00	-18.27	peak	
4	730.3400	29.31	-0.64	28.67	46.00	-17.33	peak	
5	825.3999	30.66	0.04	30.70	46.00	-15.30	peak	
6	935.0099	29.86	3.97	33.83	46.00	-12.17	peak	


Antenna Polarization: Vertical

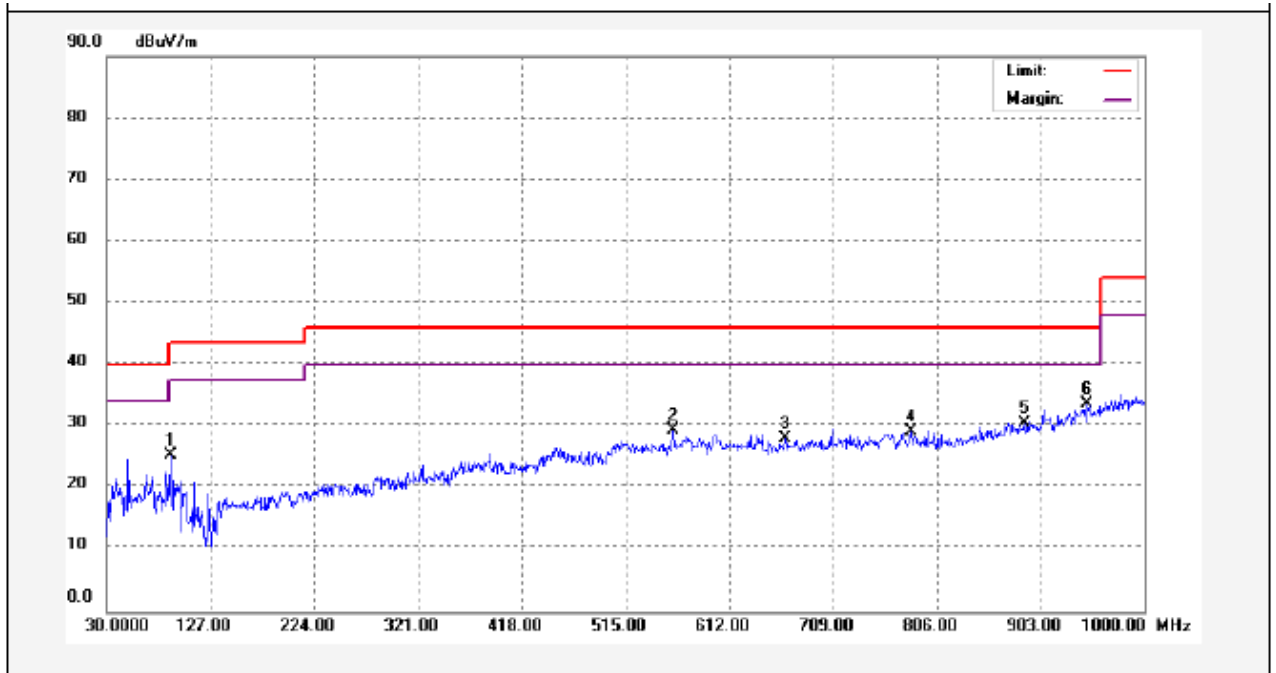

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	90.1400	40.48	-15.25	25.23	43.50	-18.27	peak	
2	559.6200	34.01	-4.72	29.29	46.00	-16.71	peak	
3	664.3799	29.28	-1.29	27.99	46.00	-18.01	peak	
4	781.7500	29.52	-0.49	29.03	46.00	-16.97	peak	
5	887.4800	28.51	2.08	30.59	46.00	-15.41	peak	
6	945.6798	29.31	4.38	33.69	46.00	-12.31	peak	


**DH5 mode****Frequency: 2480 MHz**

Antenna Polarization: Horizontal

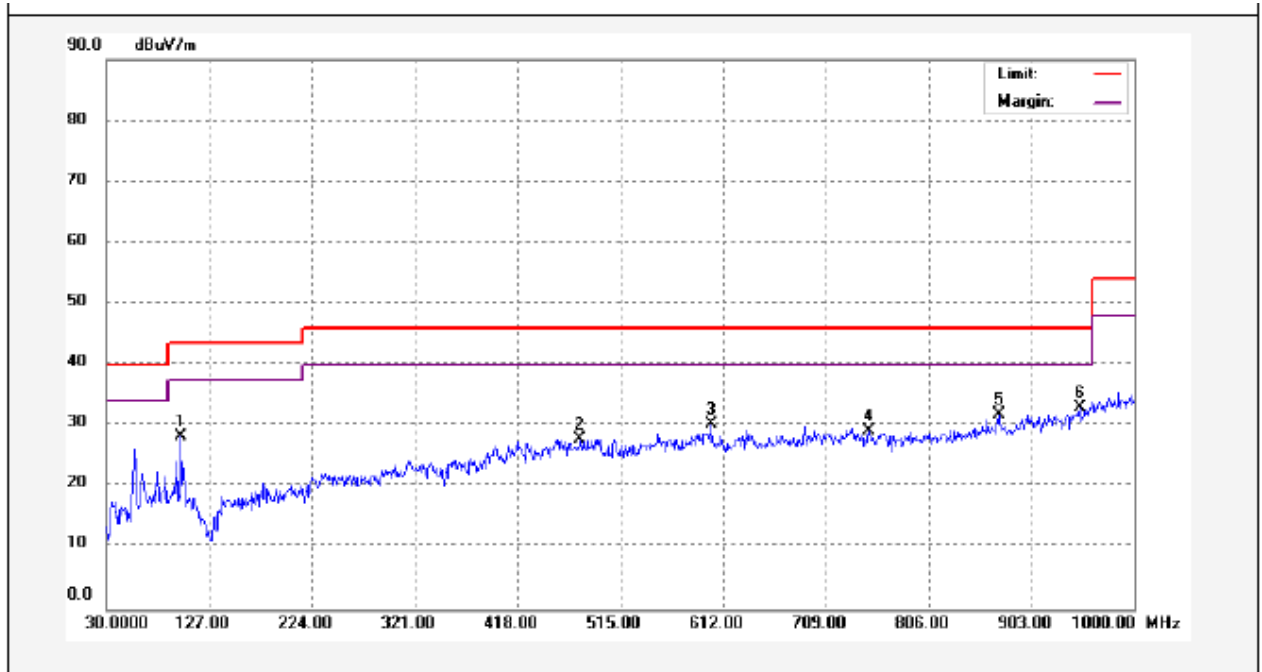

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	100.8100	41.76	-13.58	28.18	43.50	-15.32	peak	
2	477.1700	33.94	-6.12	27.82	46.00	-18.18	peak	
3	600.3600	32.27	-2.10	30.17	46.00	-15.83	peak	
4	749.7400	29.67	-0.48	29.19	46.00	-16.81	peak	
5	871.9600	30.48	1.46	31.94	46.00	-14.06	peak	
6	948.5900	28.48	4.49	32.97	46.00	-13.03	peak	


Antenna Polarization: Vertical

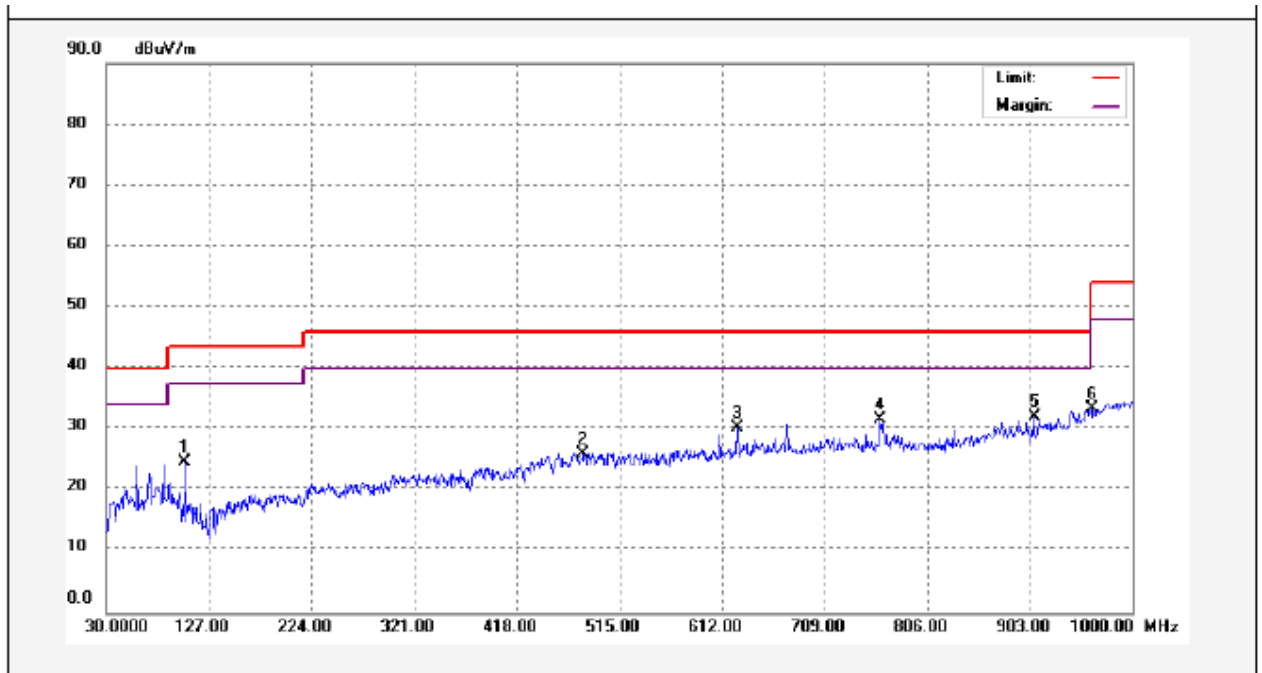

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	104.6898	38.20	-13.66	24.54	43.50	-18.96	peak	
2	481.0500	32.10	-6.07	26.03	46.00	-19.97	peak	
3	626.5498	31.94	-1.75	30.19	46.00	-15.81	peak	
4	761.3799	32.15	-0.48	31.67	46.00	-14.33	peak	
5	906.8799	29.27	2.87	32.14	46.00	-13.86	peak	
6	961.2000	28.30	5.16	33.46	54.00	-20.54	peak	


**2DH5 mode****Frequency: 2402 MHz**

Antenna Polarization: Horizontal

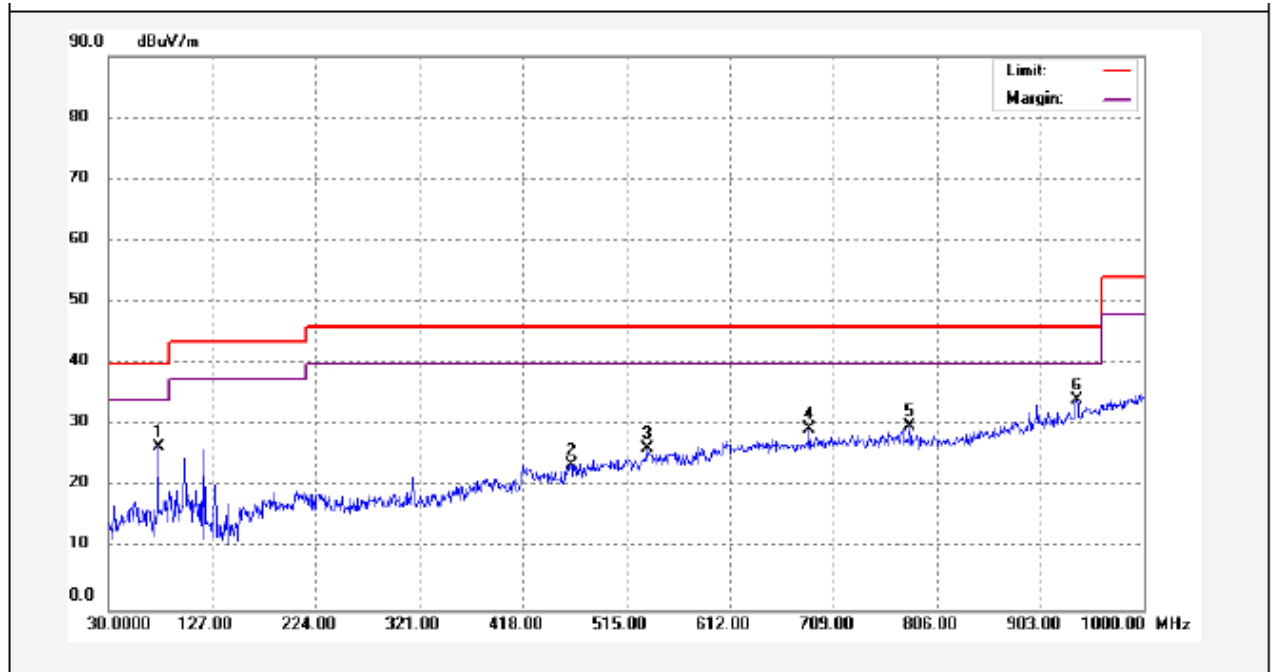

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	76.5600	43.26	-16.85	26.41	40.00	-13.59	peak	
2	463.5899	29.80	-6.31	23.49	46.00	-22.51	peak	
3	535.3700	31.78	-5.48	26.30	46.00	-19.70	peak	
4	686.6900	30.32	-1.03	29.29	46.00	-16.71	peak	
5	780.7798	30.29	-0.50	29.79	46.00	-16.21	peak	
6	936.9500	30.10	4.05	34.15	46.00	-11.85	peak	


Antenna Polarization: Vertical

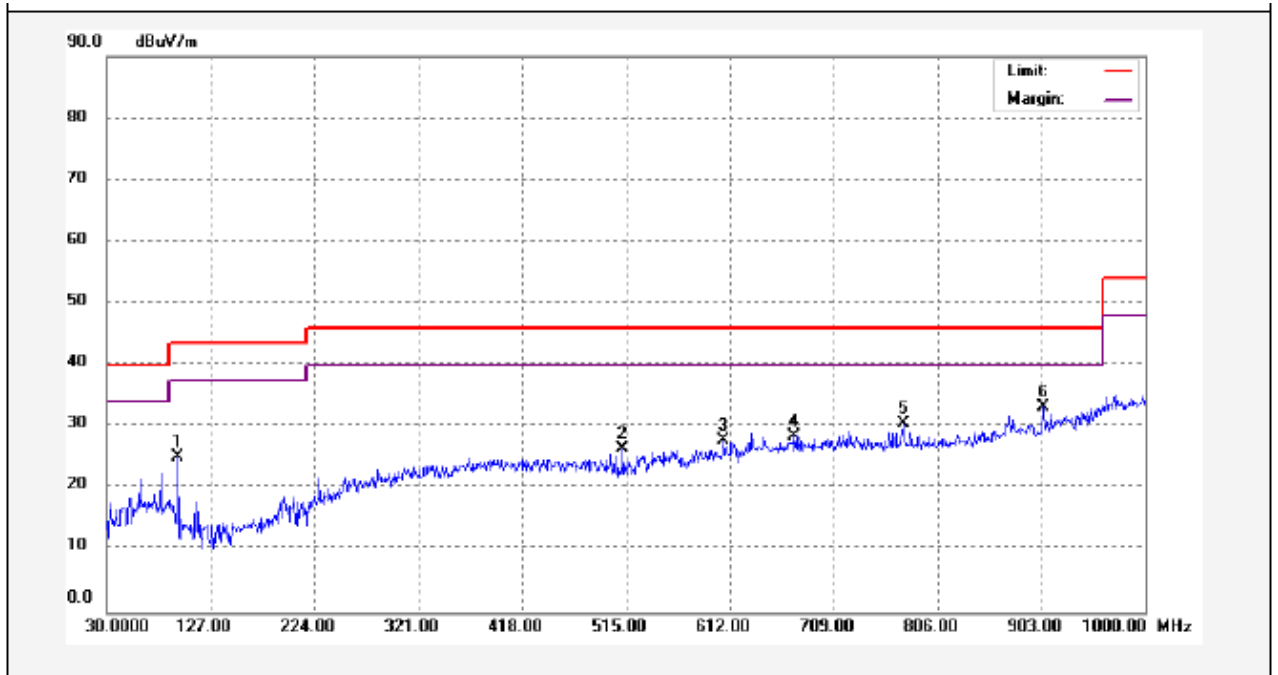


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	96.9300	39.25	-14.11	25.14	43.50	-18.36	peak	
2	512.0900	32.19	-5.69	26.50	46.00	-19.50	peak	
3	606.1798	29.74	-2.02	27.72	46.00	-18.28	peak	
4	672.1399	29.58	-1.19	28.39	46.00	-17.61	peak	
5	773.9900	30.90	-0.48	30.42	46.00	-15.58	peak	
6	904.9400	30.33	2.79	33.12	46.00	-12.88	peak	

**2DH5 mode****Frequency: 2441 MHz**

Antenna Polarization: Horizontal

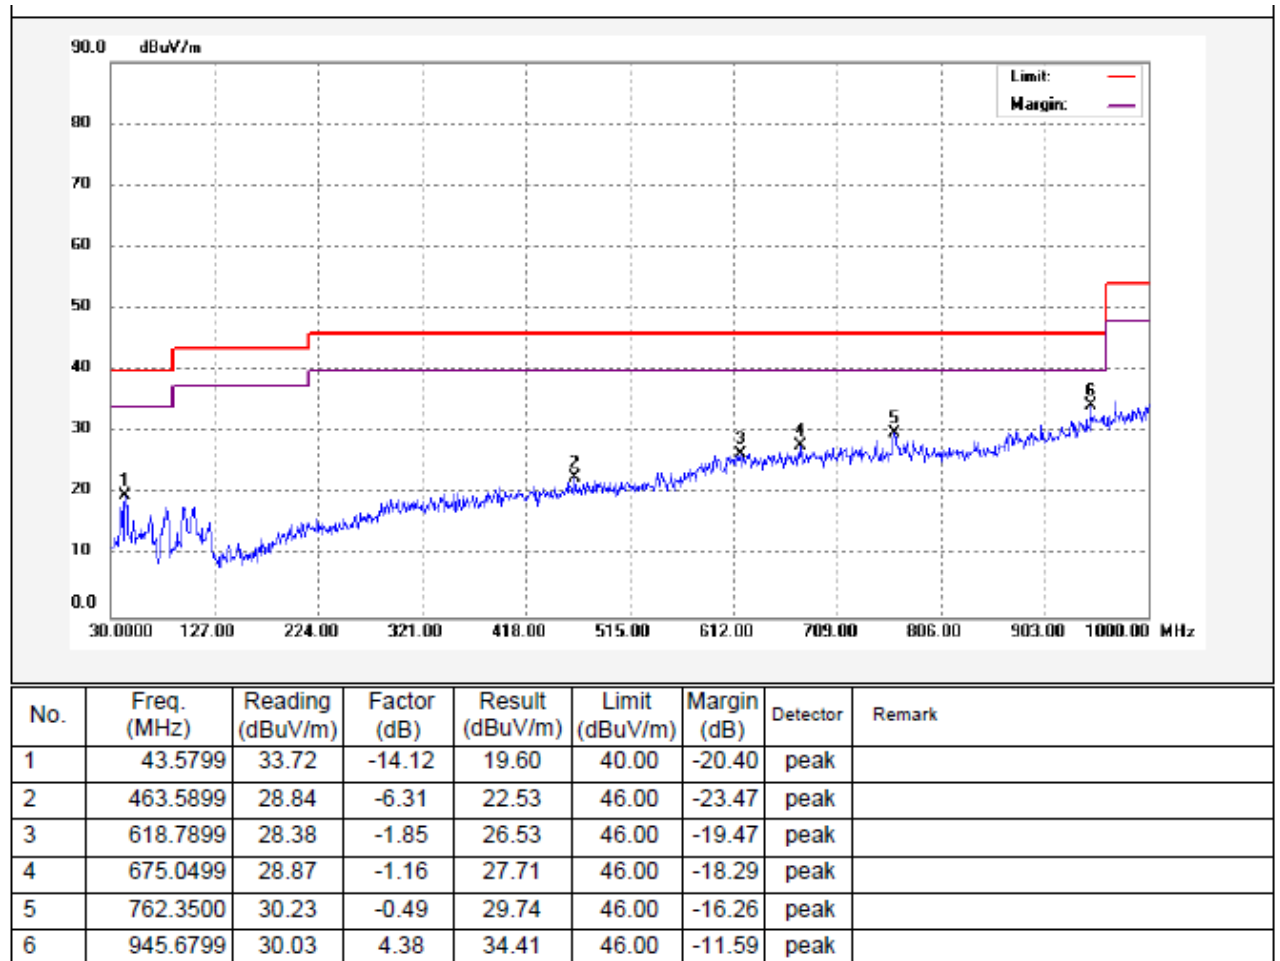

Antenna Polarization: Vertical

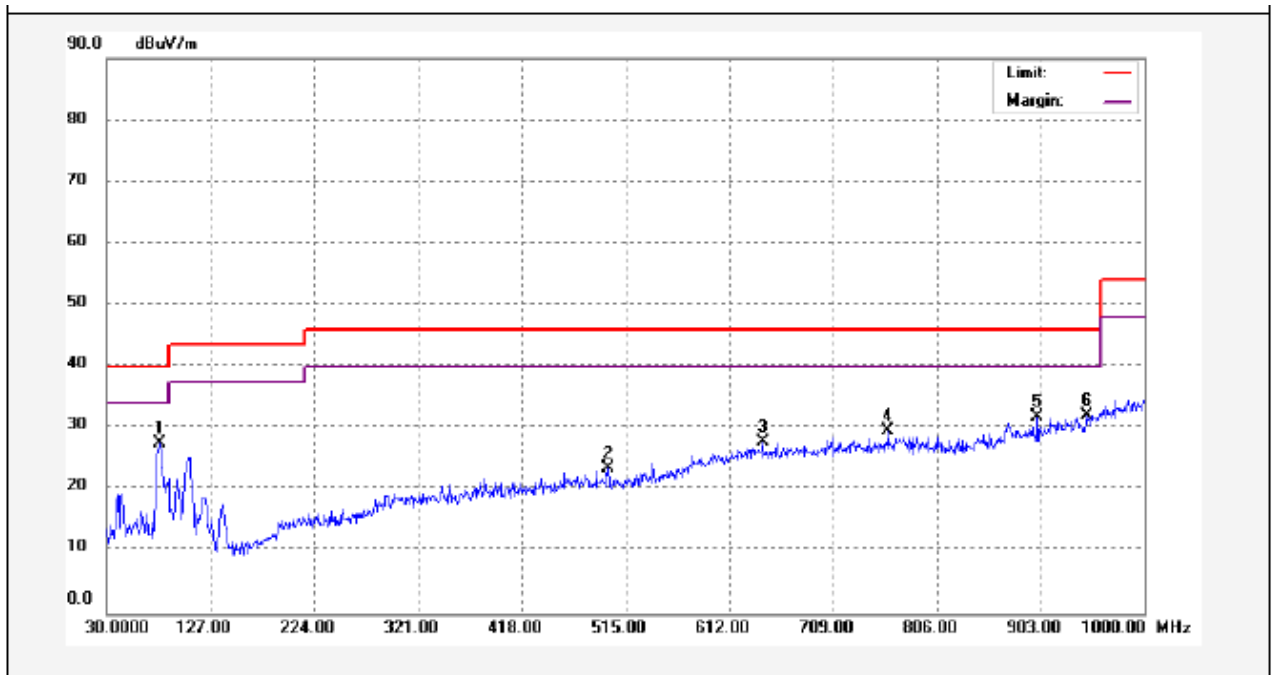


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	79.4698	44.88	-17.23	27.65	40.00	-12.35	peak	
2	498.5099	29.27	-5.82	23.45	46.00	-22.55	peak	
3	643.0398	29.42	-1.54	27.88	46.00	-18.12	peak	
4	760.4098	30.05	-0.49	29.56	46.00	-16.44	peak	
5	900.0900	29.32	2.60	31.92	46.00	-14.08	peak	
6	945.6798	27.66	4.38	32.04	46.00	-13.96	peak	




**2DH5 mode****Frequency: 2480 MHz**

Antenna Polarization: Horizontal

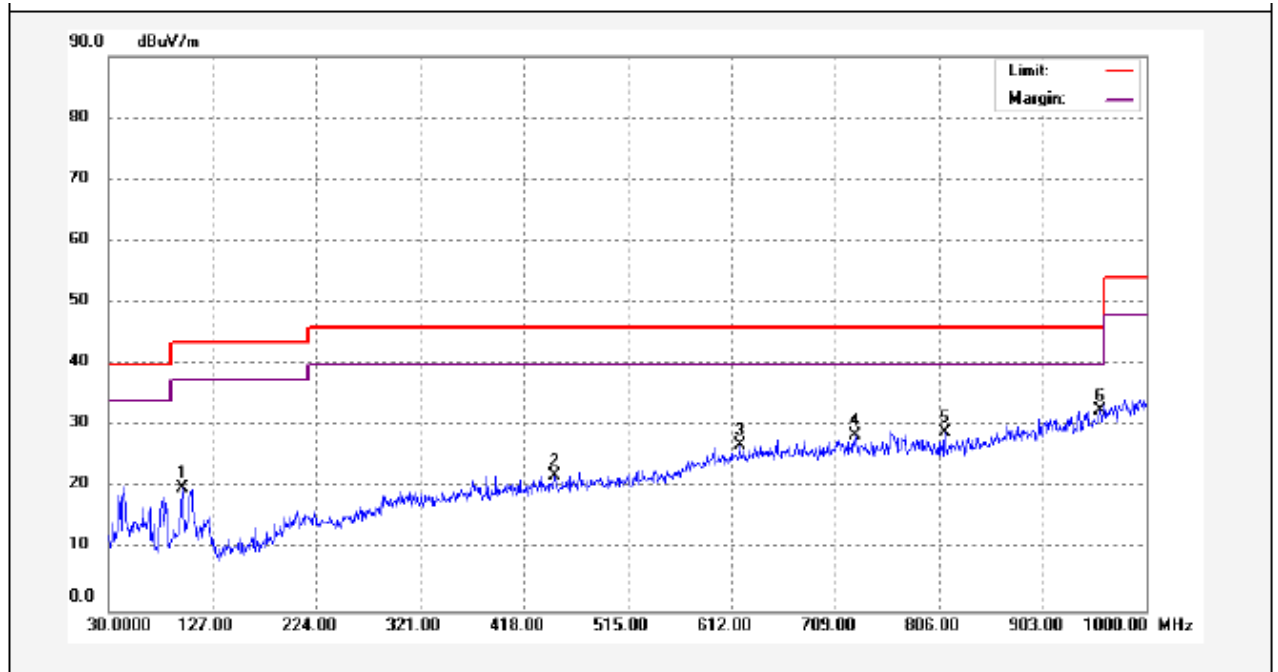

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	98.8700	33.72	-13.75	19.97	43.50	-23.53	peak	
2	447.1000	28.51	-6.53	21.98	46.00	-24.02	peak	
3	619.7599	28.78	-1.84	26.94	46.00	-19.06	peak	
4	727.4299	29.17	-0.67	28.50	46.00	-17.50	peak	
5	811.8200	29.25	-0.24	29.01	46.00	-16.99	peak	
6	956.3500	27.54	4.90	32.44	46.00	-13.56	peak	

Antenna Polarization: Vertical

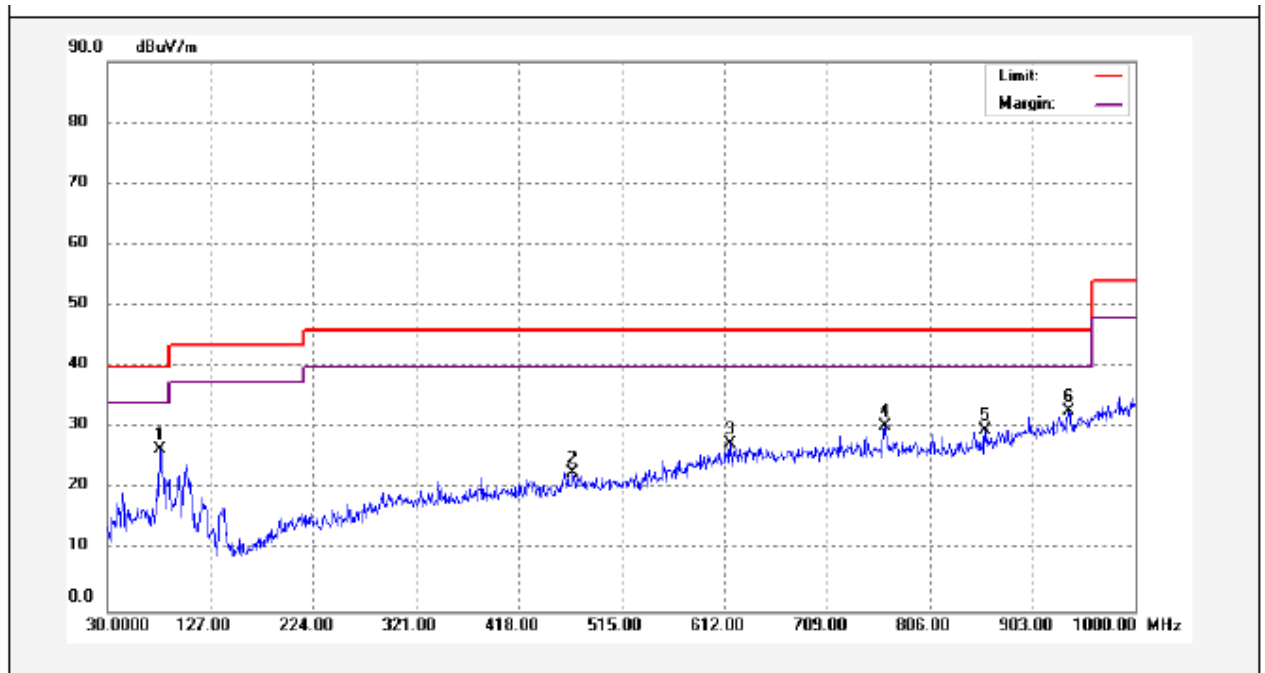


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	79.4699	43.71	-17.23	26.48	40.00	-13.52	peak	
2	469.4100	28.94	-6.23	22.71	46.00	-23.29	peak	
3	617.8200	29.30	-1.87	27.43	46.00	-18.57	peak	
4	763.3200	30.68	-0.49	30.19	46.00	-15.81	peak	
5	858.3799	28.71	0.90	29.61	46.00	-16.39	peak	
6	936.9500	28.78	4.05	32.83	46.00	-13.17	peak	

**3DH5 mode**


**Frequency: 2402 MHz**

Antenna Polarization: Horizontal

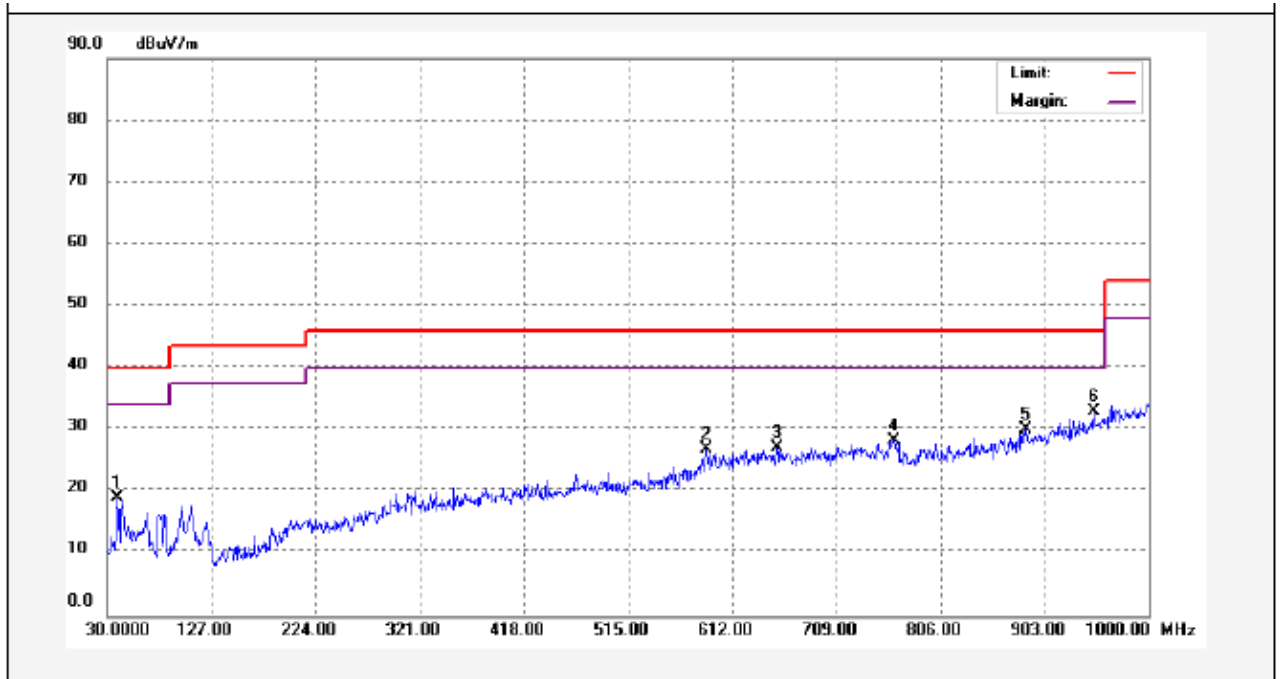

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	39.7000	33.47	-14.50	18.97	40.00	-21.03	peak	
2	587.7500	29.71	-2.89	26.82	46.00	-19.18	peak	
3	653.7100	28.63	-1.41	27.22	46.00	-18.78	peak	
4	762.3500	28.71	-0.49	28.22	46.00	-17.78	peak	
5	885.5399	28.13	2.01	30.14	46.00	-15.86	peak	
6	948.5900	28.54	4.49	33.03	46.00	-12.97	peak	


Antenna Polarization: Vertical

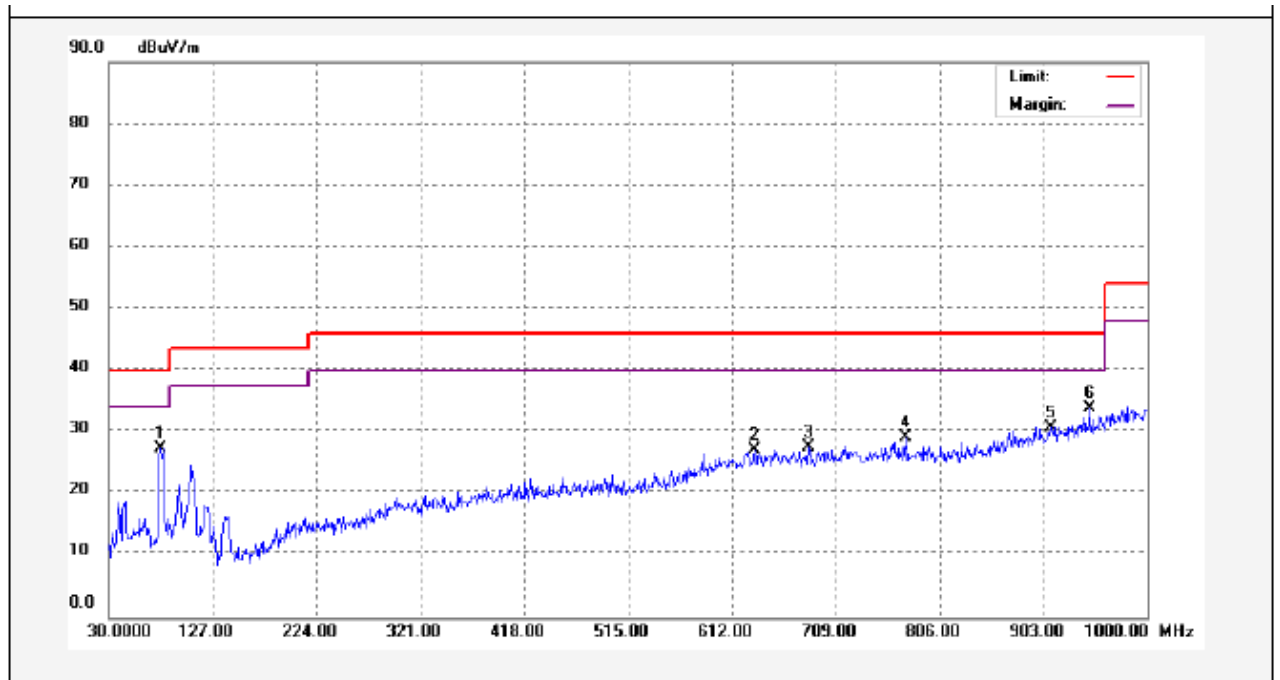


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	78.5000	44.39	-17.09	27.30	40.00	-12.70	peak	
2	633.3400	28.85	-1.67	27.18	46.00	-18.82	peak	
3	683.7799	28.69	-1.06	27.63	46.00	-18.37	peak	
4	773.9900	29.54	-0.48	29.06	46.00	-16.94	peak	
5	909.7899	27.75	2.98	30.73	46.00	-15.27	peak	
6	945.6799	29.42	4.38	33.80	46.00	-12.20	peak	

**3DH5 mode****Frequency: 2441 MHz**

Antenna Polarization: Horizontal

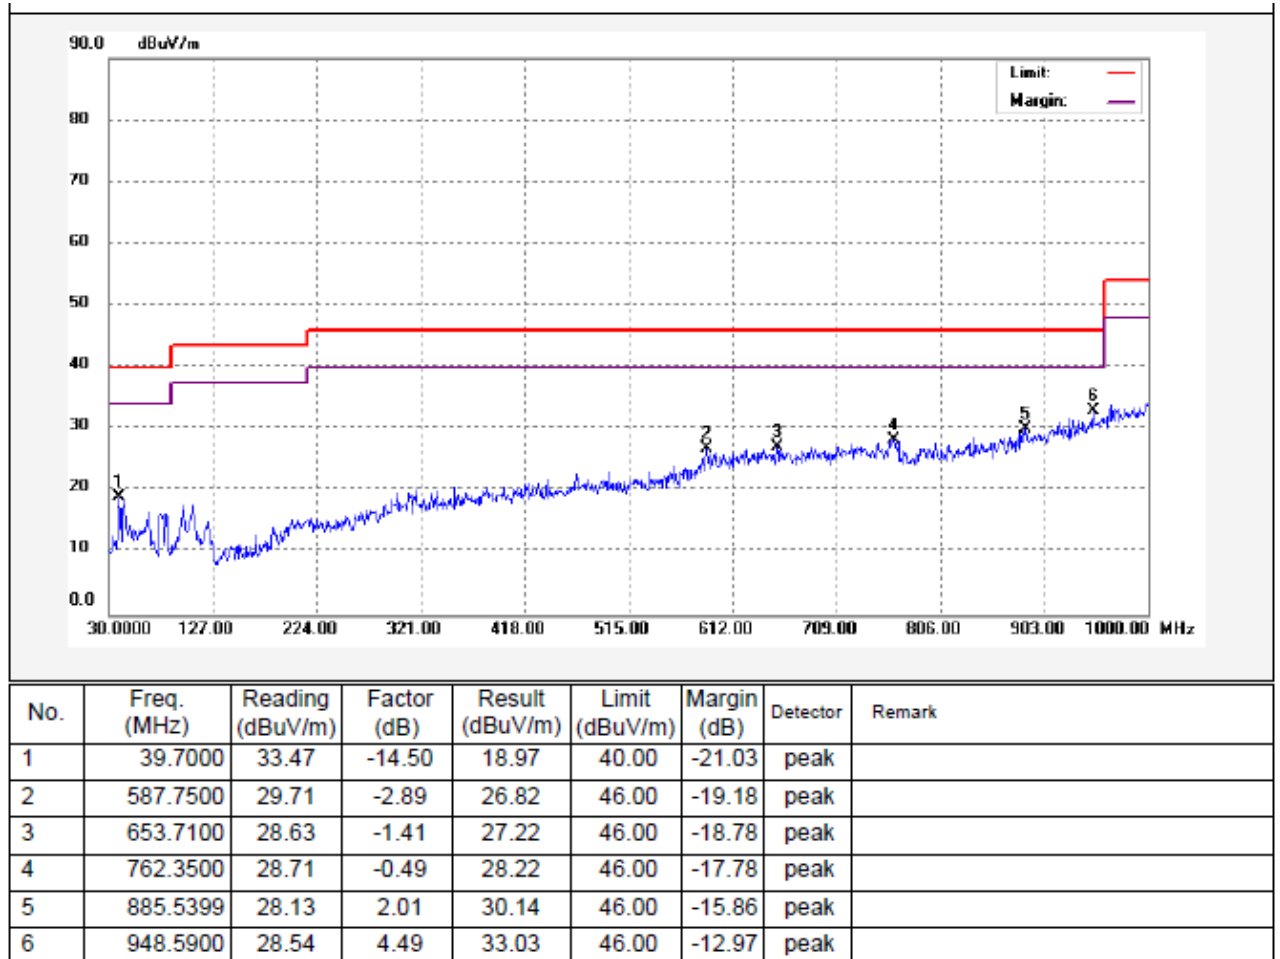


Antenna Polarization: Vertical

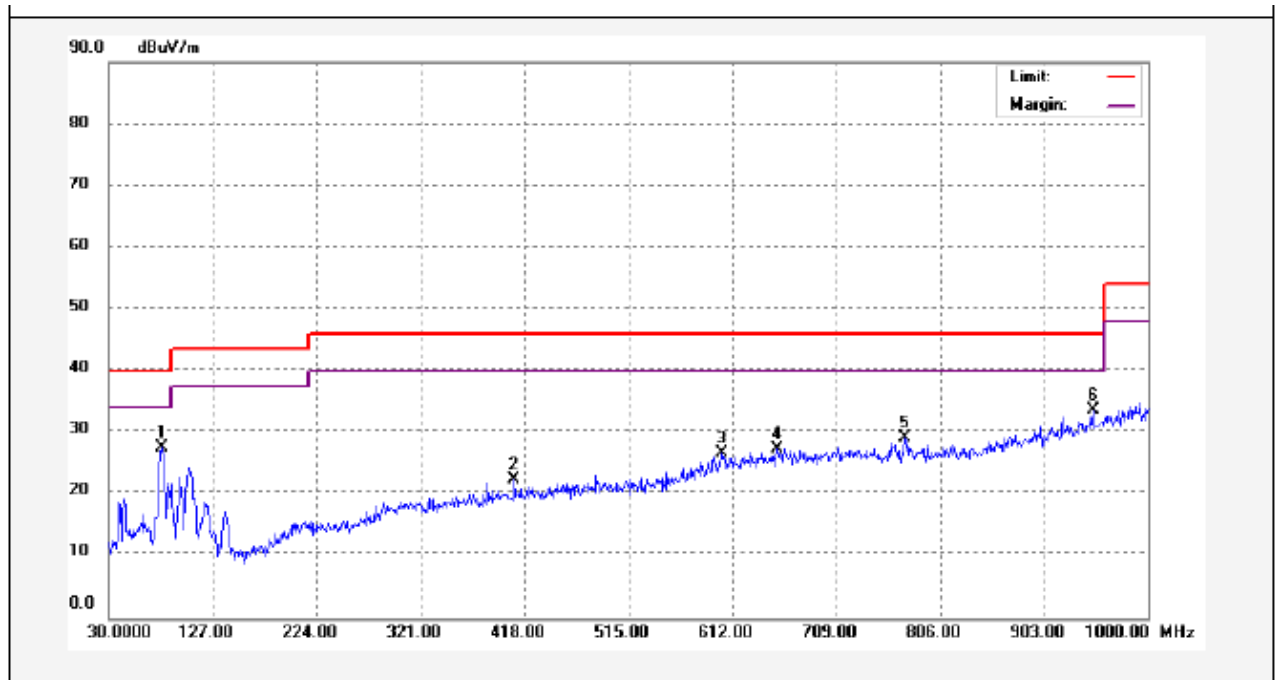

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	79.4698	44.79	-17.23	27.56	40.00	-12.44	peak	
2	408.3000	29.39	-7.00	22.39	46.00	-23.61	peak	
3	602.2998	28.70	-2.07	26.63	46.00	-19.37	peak	
4	653.7100	28.77	-1.41	27.36	46.00	-18.64	peak	
5	773.0198	29.67	-0.49	29.18	46.00	-16.82	peak	
6	948.5900	29.12	4.49	33.61	46.00	-12.39	peak	


**3DH5 mode****Frequency: 2480 MHz**

Antenna Polarization: Horizontal

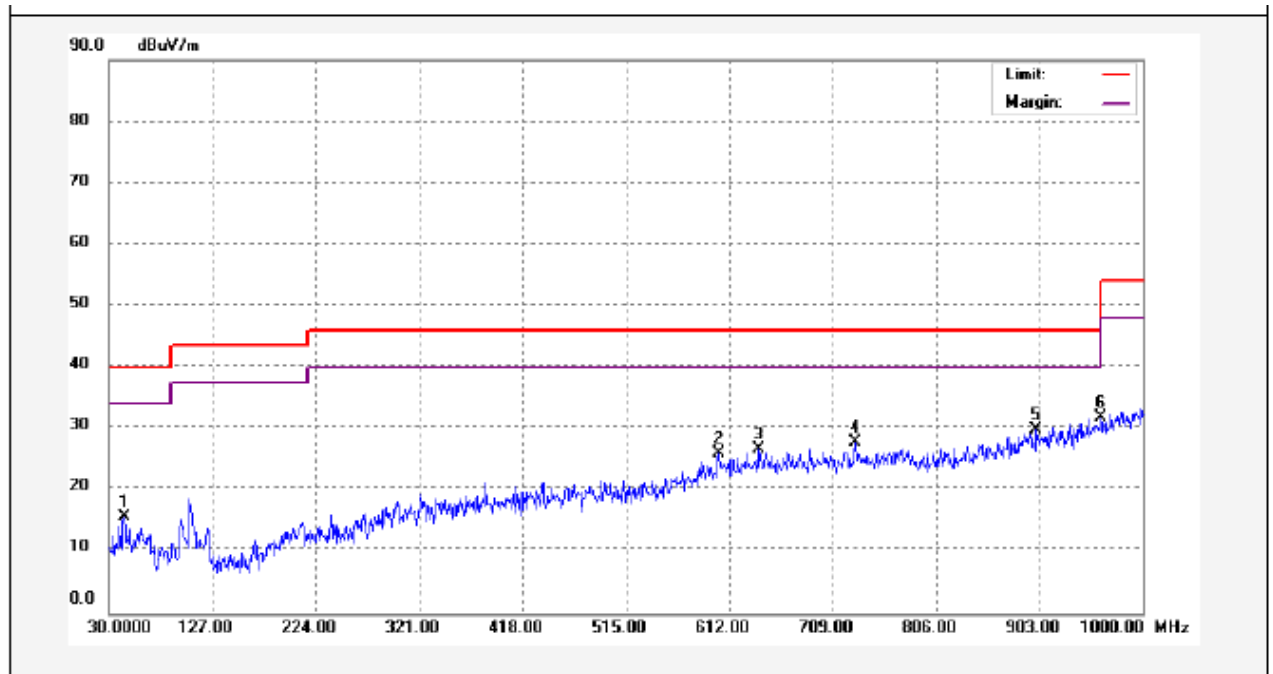

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	44.5499	29.62	-14.03	15.59	40.00	-24.41	peak	
2	602.2999	28.09	-2.07	26.02	46.00	-19.98	peak	
3	639.1599	28.32	-1.59	26.73	46.00	-19.27	peak	
4	730.3400	28.40	-0.64	27.76	46.00	-18.24	peak	
5	900.0900	27.21	2.60	29.81	46.00	-16.19	peak	
6	960.2300	26.81	5.11	31.92	54.00	-22.08	peak	

Antenna Polarization: Vertical

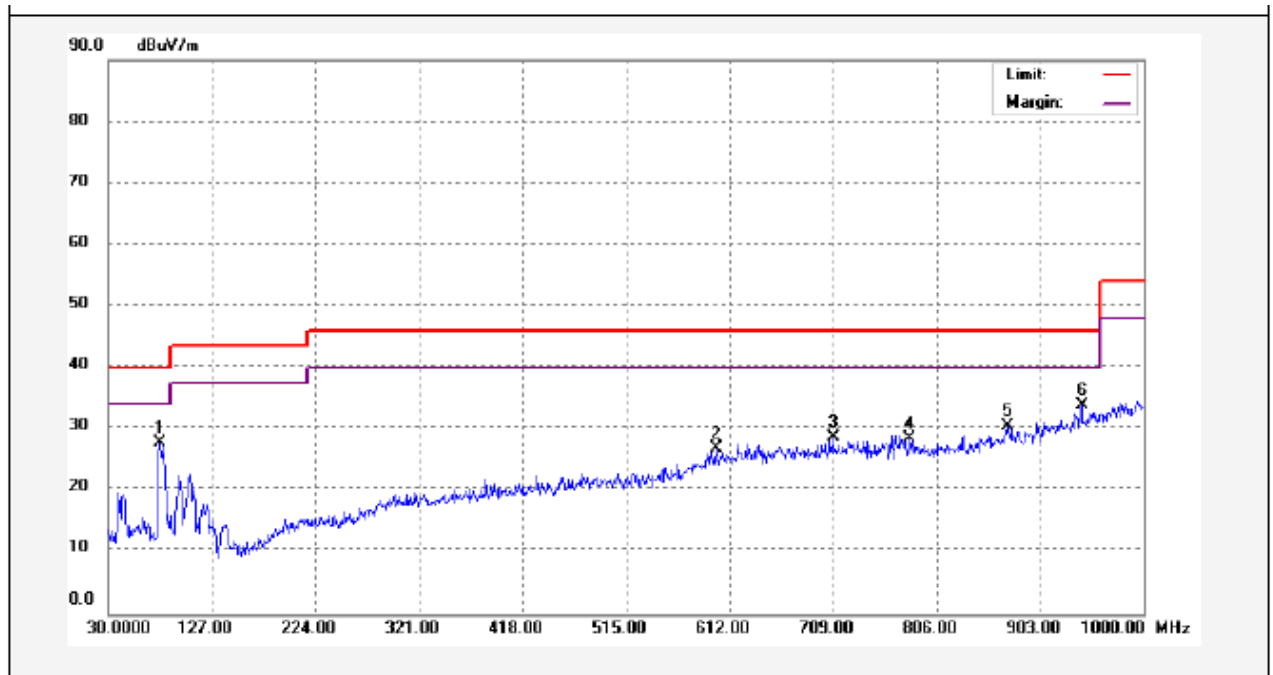

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	78.5000	44.77	-17.09	27.68	40.00	-12.32	peak	
2	599.3899	28.98	-2.14	26.84	46.00	-19.16	peak	
3	709.0000	29.47	-0.81	28.66	46.00	-17.34	peak	
4	780.7798	28.93	-0.50	28.43	46.00	-17.57	peak	
5	871.9600	29.00	1.46	30.46	46.00	-15.54	peak	
6	941.7998	29.53	4.23	33.76	46.00	-12.24	peak	




**Test Frequency: Above 1GHz**

**DH5 mode**


**Frequency: 2402 MHz**

Antenna Polarization: Horizontal

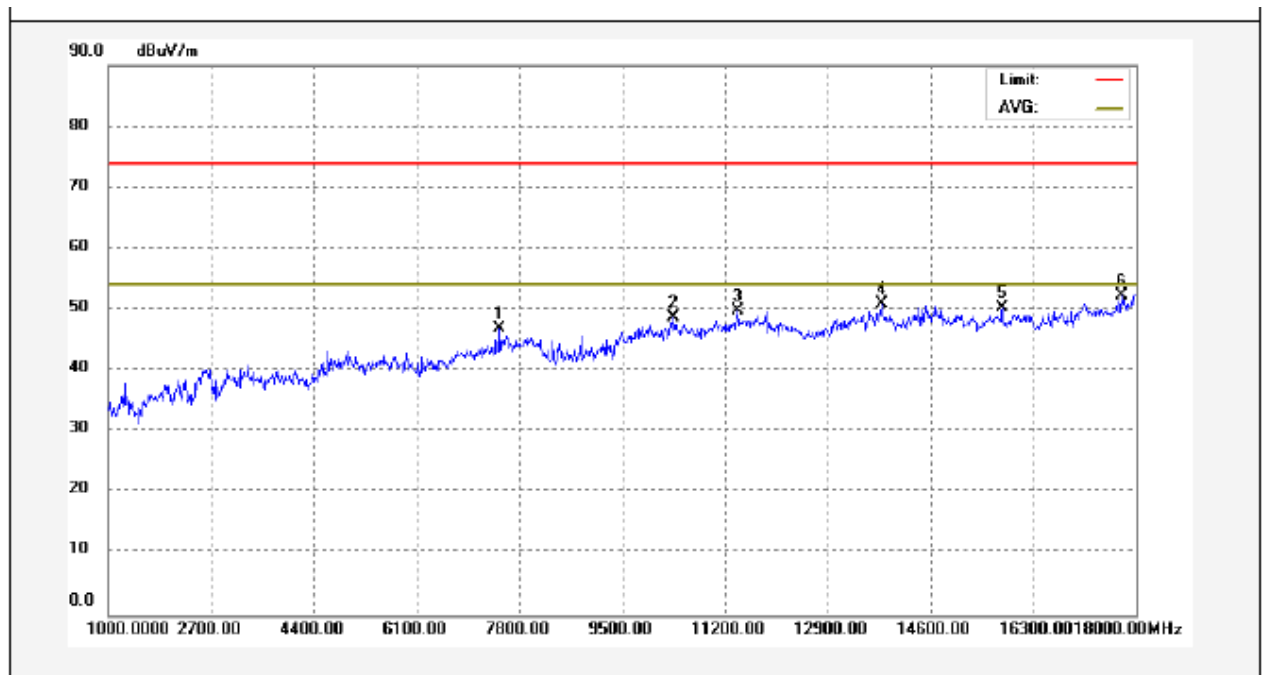

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	7477.000	44.60	2.21	46.81	74.00	-27.19	peak	
2	10350.000	43.44	5.28	48.72	74.00	-25.28	peak	
3	11421.000	43.59	6.28	49.87	74.00	-24.13	peak	
4	13784.000	42.45	8.48	50.93	74.00	-23.07	peak	
5	15790.000	41.81	8.42	50.23	74.00	-23.77	peak	
6	17762.000	35.73	16.47	52.20	74.00	-21.80	peak	

Antenna Polarization: Vertical

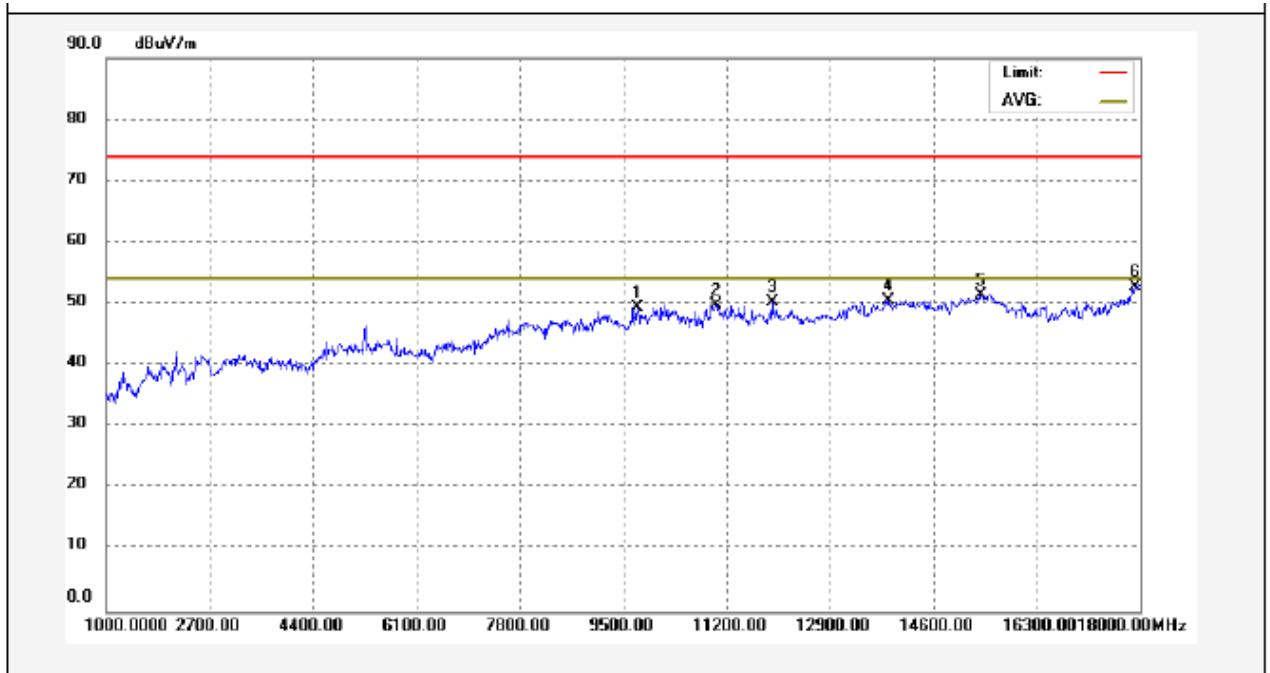


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	9738.000	45.28	4.16	49.44	74.00	-24.56	peak	
2	11030.000	43.56	6.35	49.91	74.00	-24.09	peak	
3	11948.000	44.57	5.82	50.39	74.00	-23.61	peak	
4	13852.000	41.99	8.54	50.53	74.00	-23.47	peak	
5	15382.000	43.04	8.47	51.51	74.00	-22.49	peak	
6	17915.000	35.45	17.37	52.82	74.00	-21.18	peak	

**DH5 mode**


**Frequency: 2441 MHz**

Antenna Polarization: Horizontal

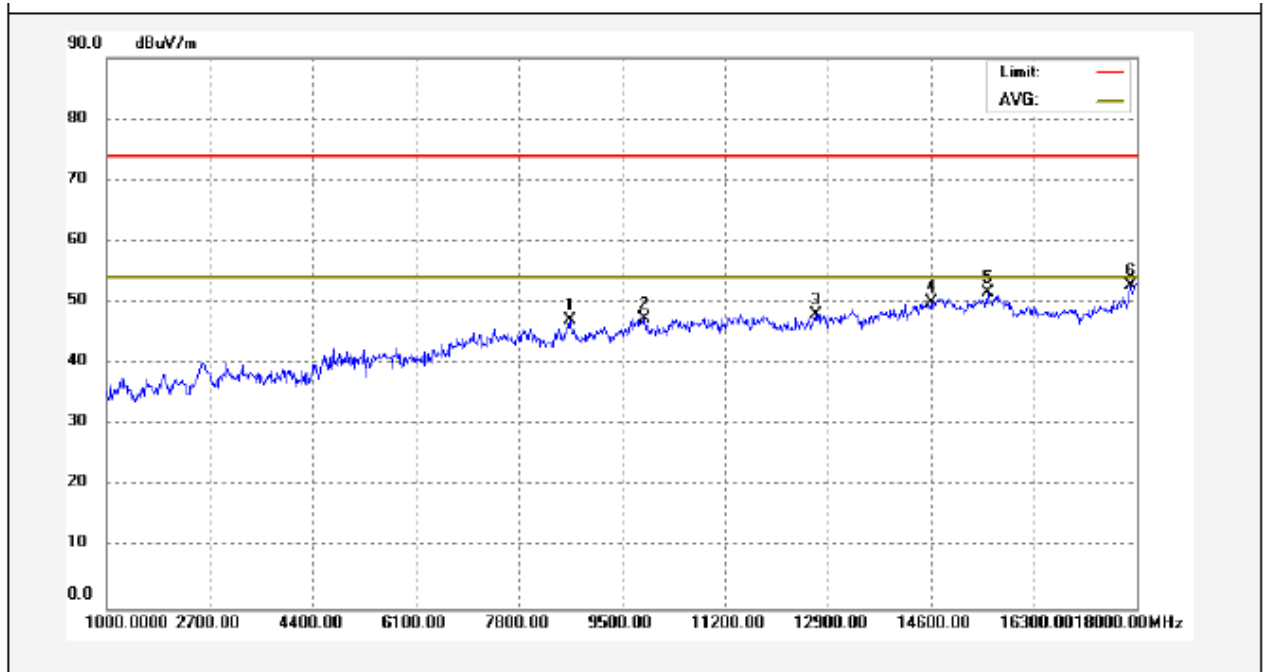

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	8650.000	44.17	2.88	47.05	74.00	-26.95	peak	
2	9874.000	43.14	4.22	47.36	74.00	-26.64	peak	
3	12696.000	41.64	6.46	48.10	74.00	-25.90	peak	
4	14617.000	41.42	8.57	49.99	74.00	-24.01	peak	
5	15535.000	43.15	8.44	51.59	74.00	-22.41	peak	
6	17898.000	35.42	17.28	52.70	74.00	-21.30	peak	


Antenna Polarization: Vertical

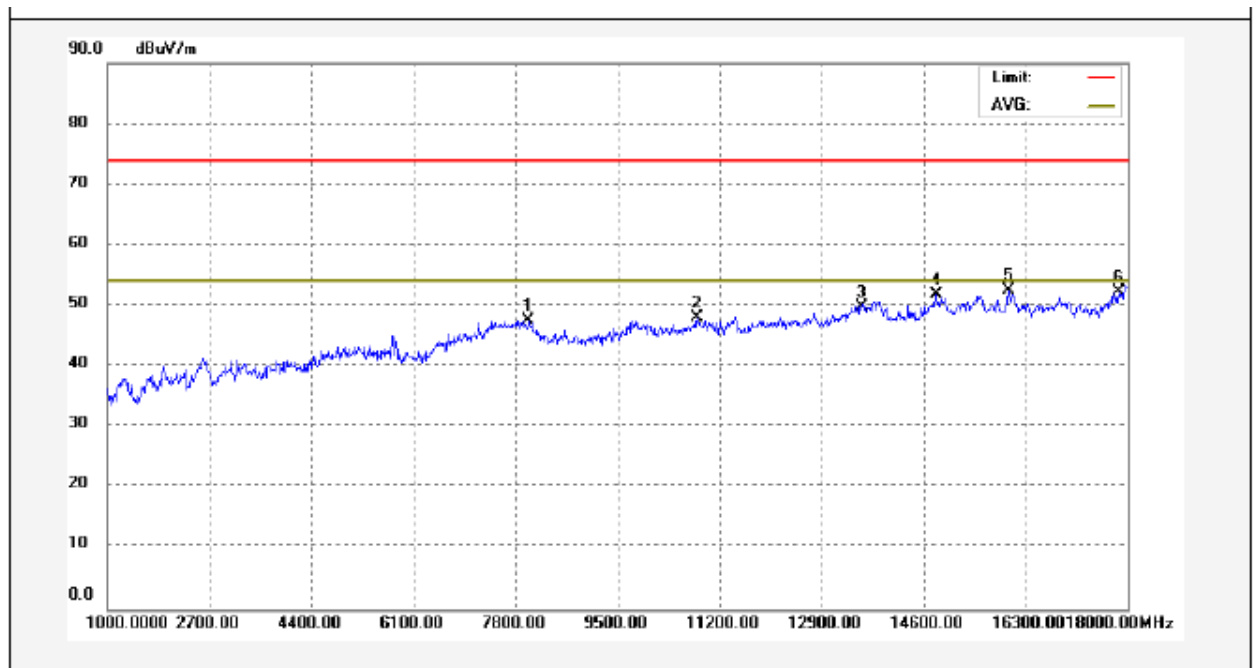

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	8021.000	44.74	2.93	47.67	74.00	-26.33	peak	
2	10826.000	41.85	6.14	47.99	74.00	-26.01	peak	
3	13563.000	41.50	8.33	49.83	74.00	-24.17	peak	
4	14804.000	43.35	8.58	51.93	74.00	-22.07	peak	
5	16011.000	44.11	8.45	52.56	74.00	-21.44	peak	
6	17847.000	35.30	16.97	52.27	74.00	-21.73	peak	


**DH5 mode****Frequency: 2480 MHz**

Antenna Polarization: Horizontal

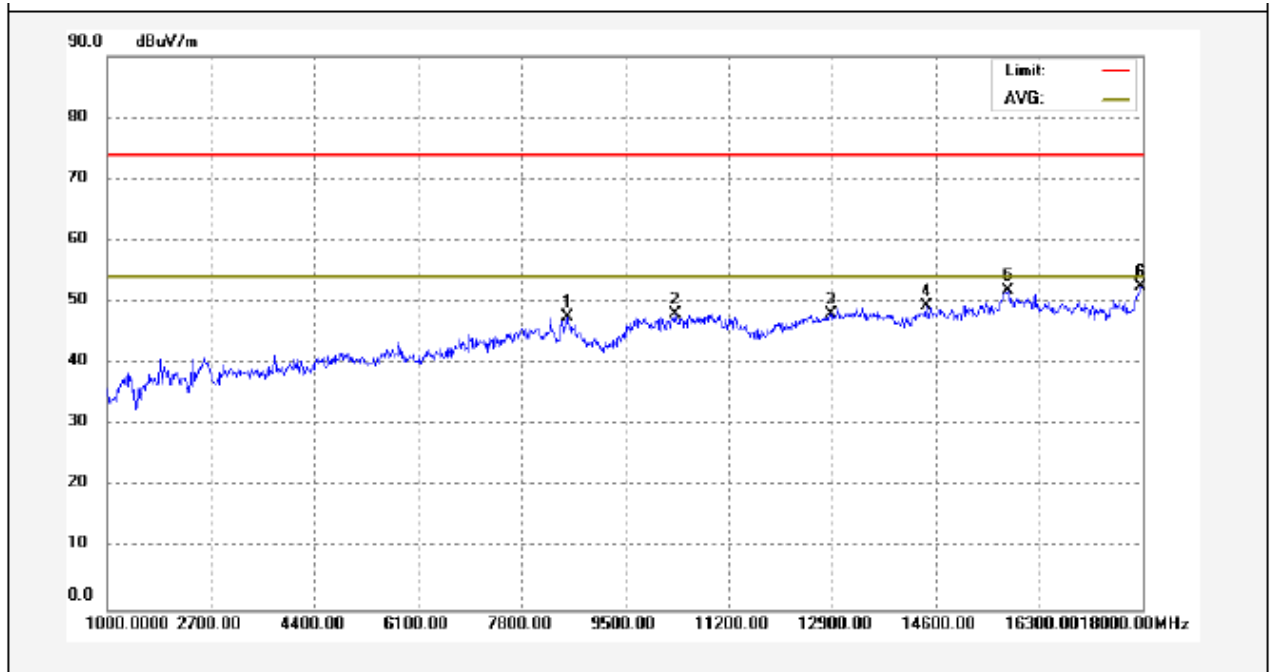

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	8548.000	44.96	2.73	47.69	74.00	-26.31	peak	
2	10316.000	42.86	5.19	48.05	74.00	-25.95	peak	
3	12883.000	41.22	6.86	48.08	74.00	-25.92	peak	
4	14447.000	40.79	8.57	49.36	74.00	-24.64	peak	
5	15790.000	43.53	8.42	51.95	74.00	-22.05	peak	
6	17966.000	34.96	17.68	52.64	74.00	-21.36	peak	

Antenna Polarization: Vertical

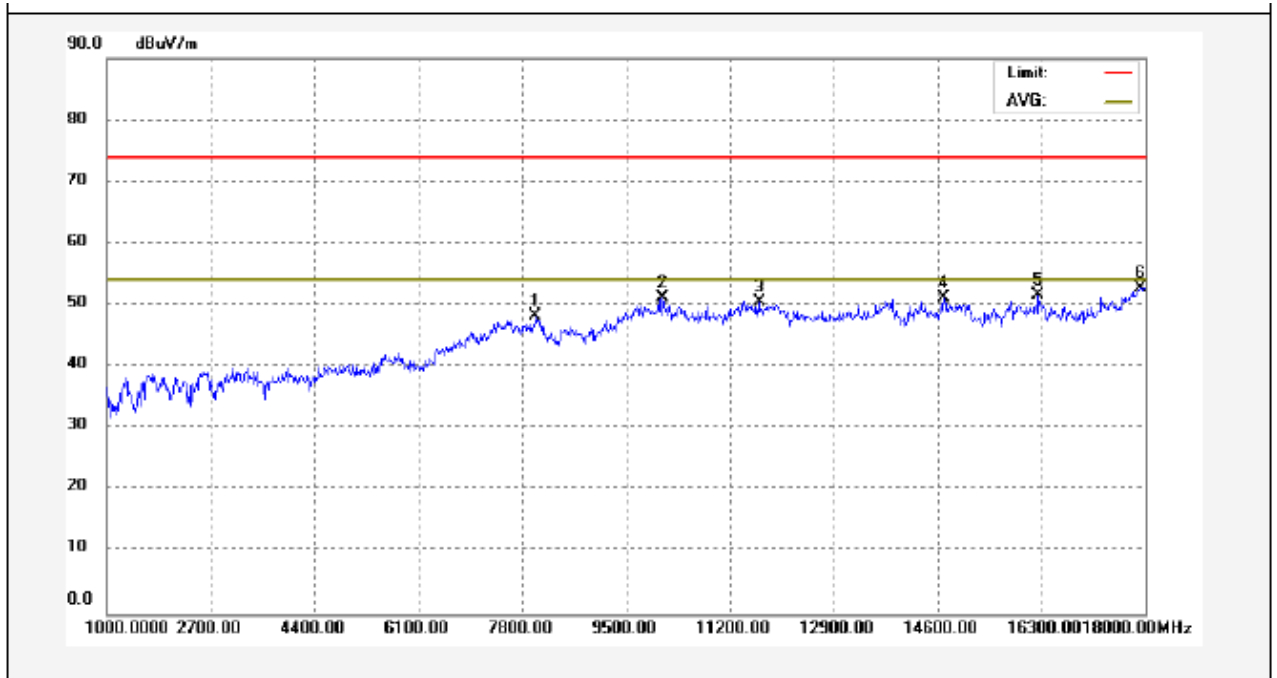


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	8021.000	45.25	2.93	48.18	74.00	-25.82	peak	
2	10095.000	46.63	4.54	51.17	74.00	-22.83	peak	
3	11676.000	44.36	6.09	50.45	74.00	-23.55	peak	
4	14702.000	42.59	8.57	51.16	74.00	-22.84	peak	
5	16249.000	42.19	9.41	51.60	74.00	-22.40	peak	
6	17915.000	35.39	17.37	52.76	74.00	-21.24	peak	

**2DH5 mode**


**Frequency: 2402 MHz**

Antenna Polarization: Horizontal

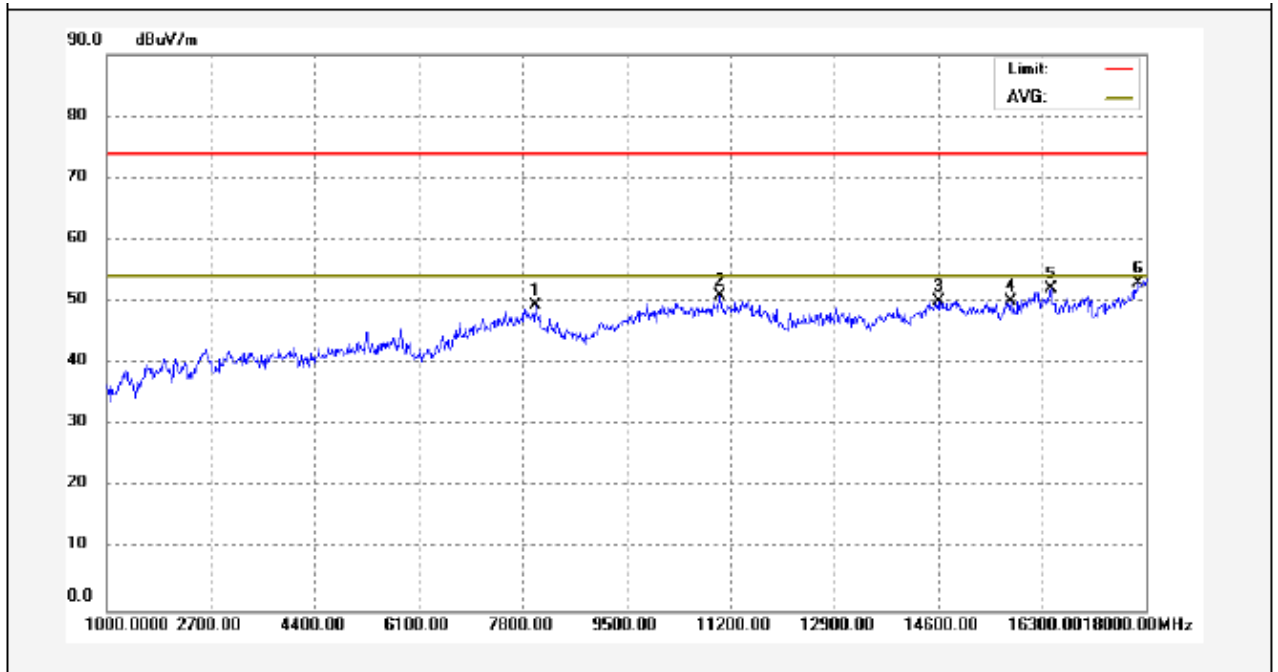

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	8004.000	46.39	2.93	49.32	74.00	-24.68	peak	
2	11030.000	44.70	6.35	51.05	74.00	-22.95	peak	
3	14600.000	41.53	8.56	50.09	74.00	-23.91	peak	
4	15790.000	41.69	8.42	50.11	74.00	-23.89	peak	
5	16436.000	41.89	10.15	52.04	74.00	-21.96	peak	
6	17881.000	35.70	17.18	52.88	74.00	-21.12	peak	

Antenna Polarization: Vertical

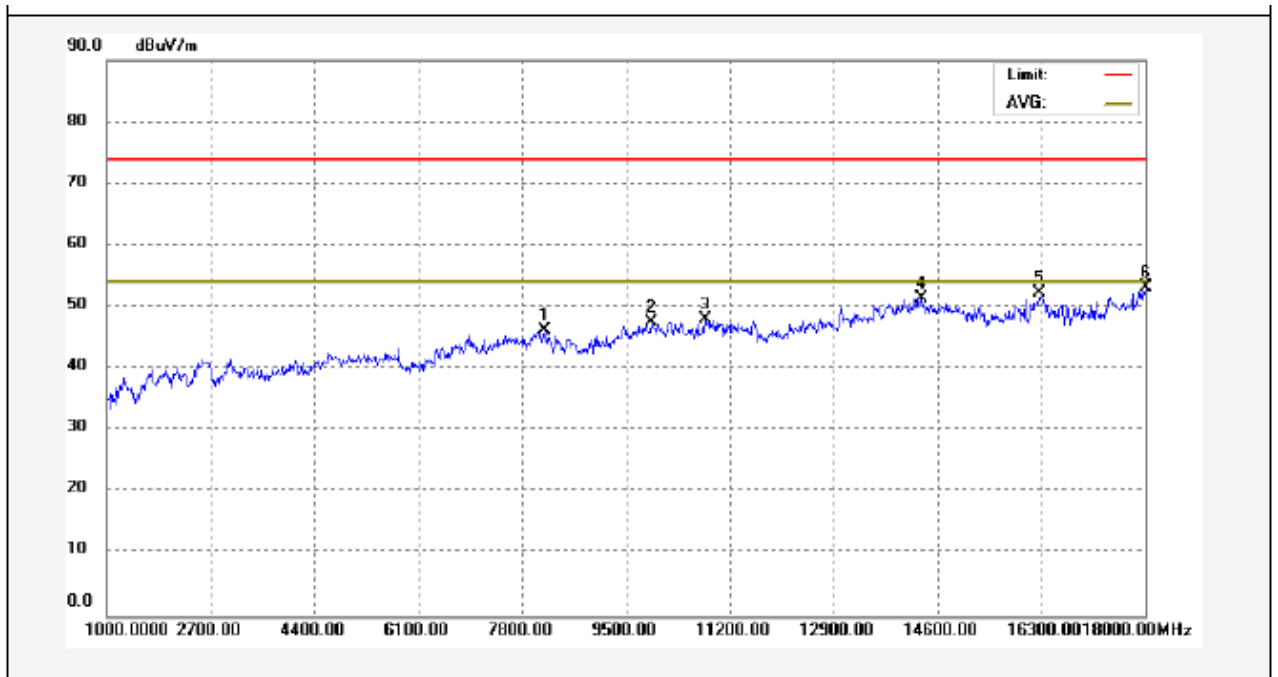


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	8174.000	43.38	2.84	46.22	74.00	-27.78	peak	
2	9908.000	43.33	4.23	47.56	74.00	-26.44	peak	
3	10792.000	41.92	6.10	48.02	74.00	-25.98	peak	
4	14345.000	42.89	8.59	51.48	74.00	-22.52	peak	
5	16266.000	42.74	9.48	52.22	74.00	-21.78	peak	
6	18000.000	35.24	17.87	53.11	74.00	-20.89	peak	



**2DH5 mode**


**Frequency: 2441 MHz**

Antenna Polarization: Horizontal

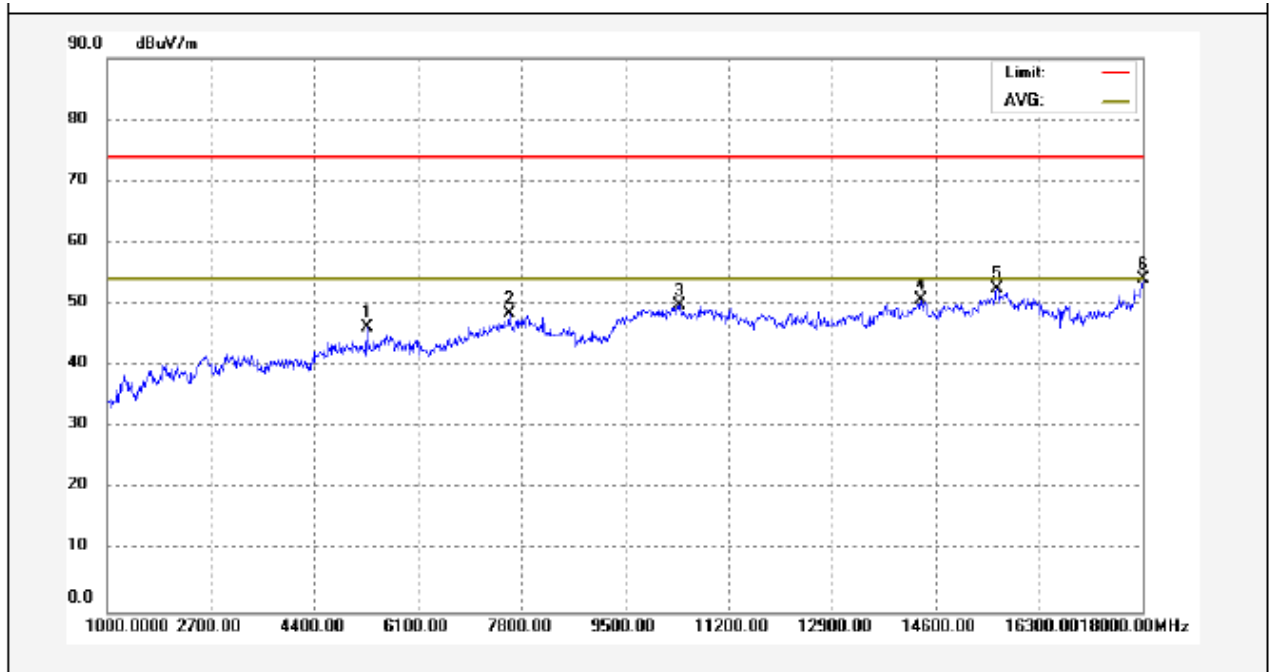

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	5267.000	49.89	-3.66	46.23	74.00	-27.77	peak	
2	7596.000	46.21	2.37	48.58	74.00	-25.42	peak	
3	10384.000	44.38	5.38	49.76	74.00	-24.24	peak	
4	14362.000	42.20	8.59	50.79	74.00	-23.21	peak	
5	15603.000	44.19	8.44	52.63	74.00	-21.37	peak	
6	18000.000	36.23	17.87	54.10	74.00	-19.90	peak	


Antenna Polarization: Vertical

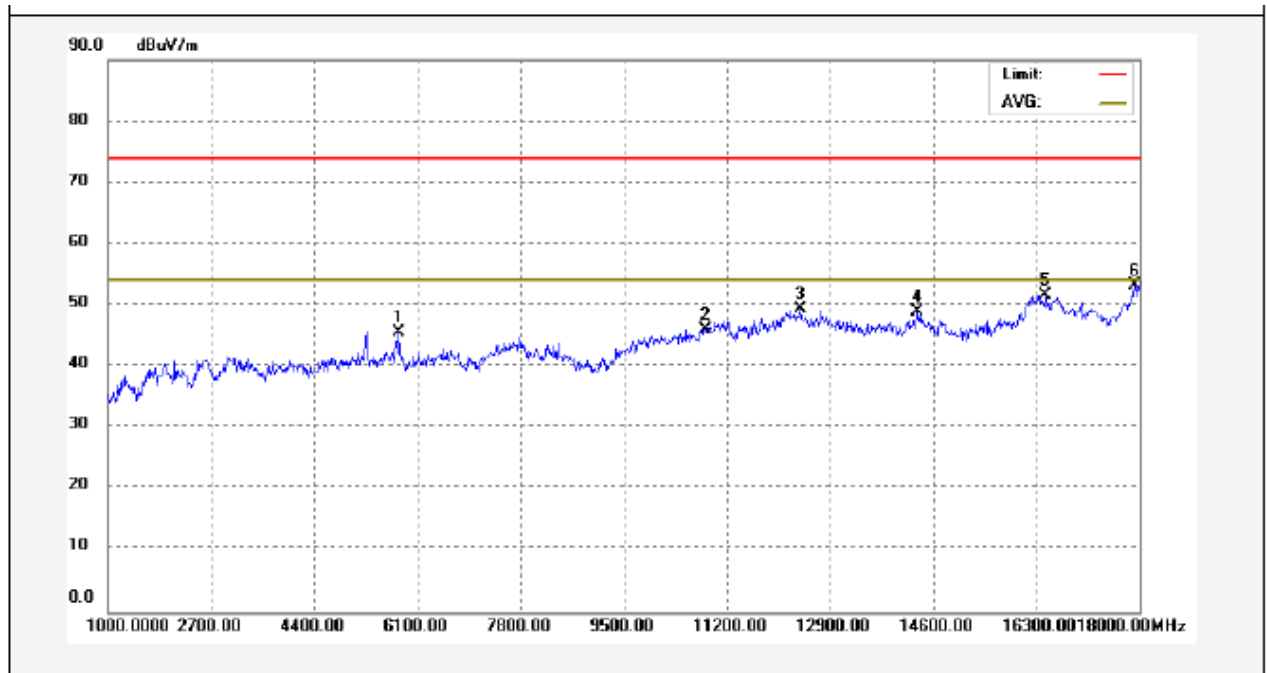

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	5794.000	48.49	-3.04	45.45	74.00	-28.55	peak	
2	10843.000	39.95	6.16	46.11	74.00	-27.89	peak	
3	12407.000	43.38	6.00	49.38	74.00	-24.62	peak	
4	14345.000	40.44	8.59	49.03	74.00	-24.97	peak	
5	16453.000	41.39	10.23	51.62	74.00	-22.38	peak	
6	17915.000	35.88	17.37	53.25	74.00	-20.75	peak	


**2DH5 mode****Frequency: 2480 MHz**

Antenna Polarization: Horizontal

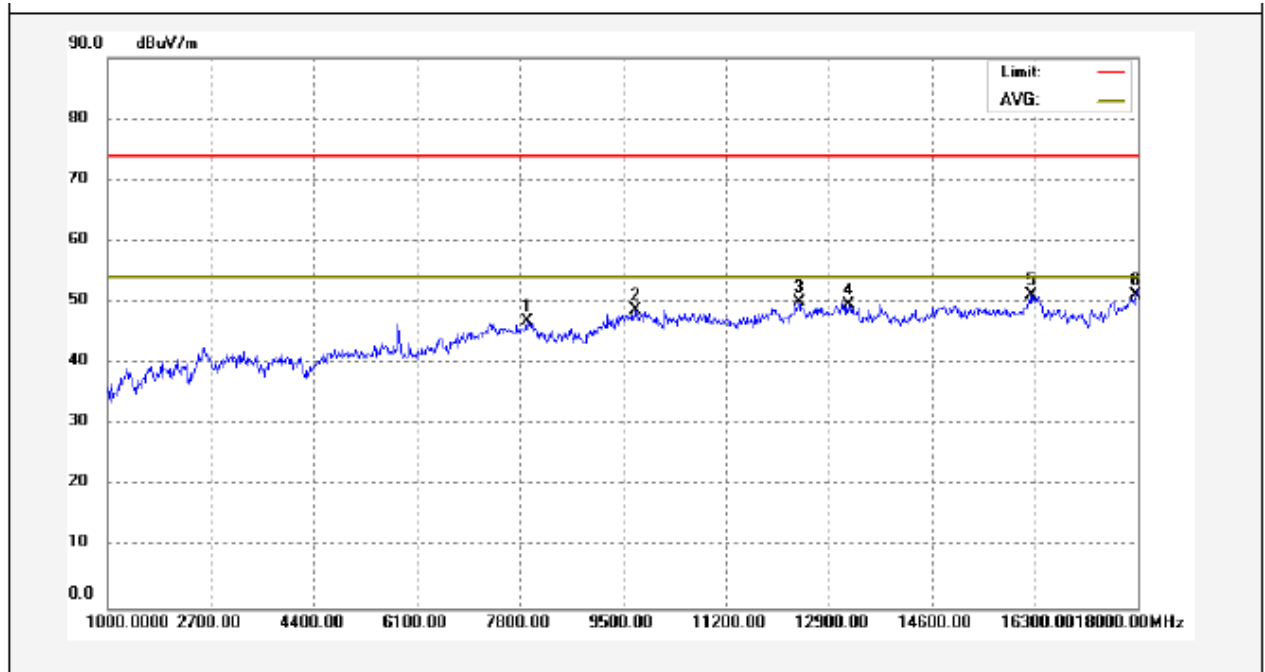

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	7919.000	43.99	2.83	46.82	74.00	-27.18	peak	
2	9704.000	44.51	4.15	48.66	74.00	-25.34	peak	
3	12407.000	44.05	6.00	50.05	74.00	-23.95	peak	
4	13223.000	42.02	7.63	49.65	74.00	-24.35	peak	
5	16232.000	41.74	9.34	51.08	74.00	-22.92	peak	
6	17966.000	33.50	17.68	51.18	74.00	-22.82	peak	

Antenna Polarization: Vertical

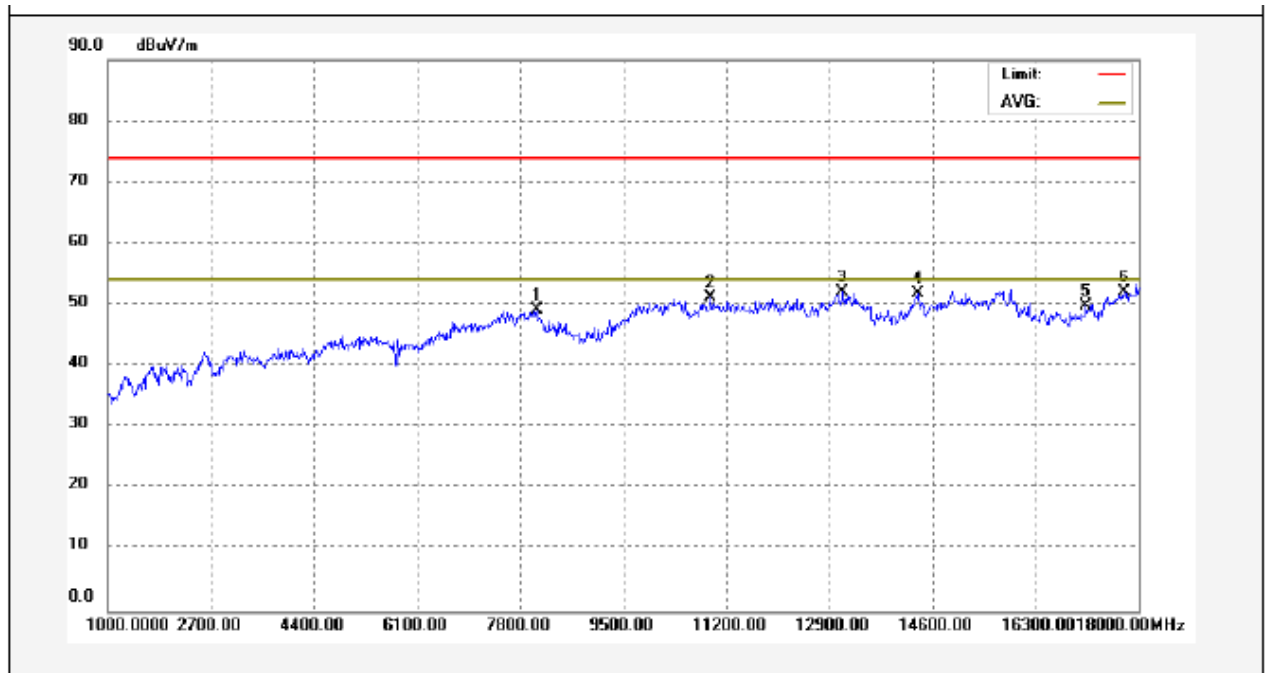


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	8072.000	46.30	2.90	49.20	74.00	-24.80	peak	
2	10928.000	45.01	6.27	51.28	74.00	-22.72	peak	
3	13121.000	44.67	7.40	52.07	74.00	-21.93	peak	
4	14362.000	43.18	8.59	51.77	74.00	-22.23	peak	
5	17133.000	36.93	12.85	49.78	74.00	-24.22	peak	
6	17762.000	35.53	16.47	52.00	74.00	-22.00	peak	

**3DH5 mode**


**Frequency: 2402 MHz**

Antenna Polarization: Horizontal

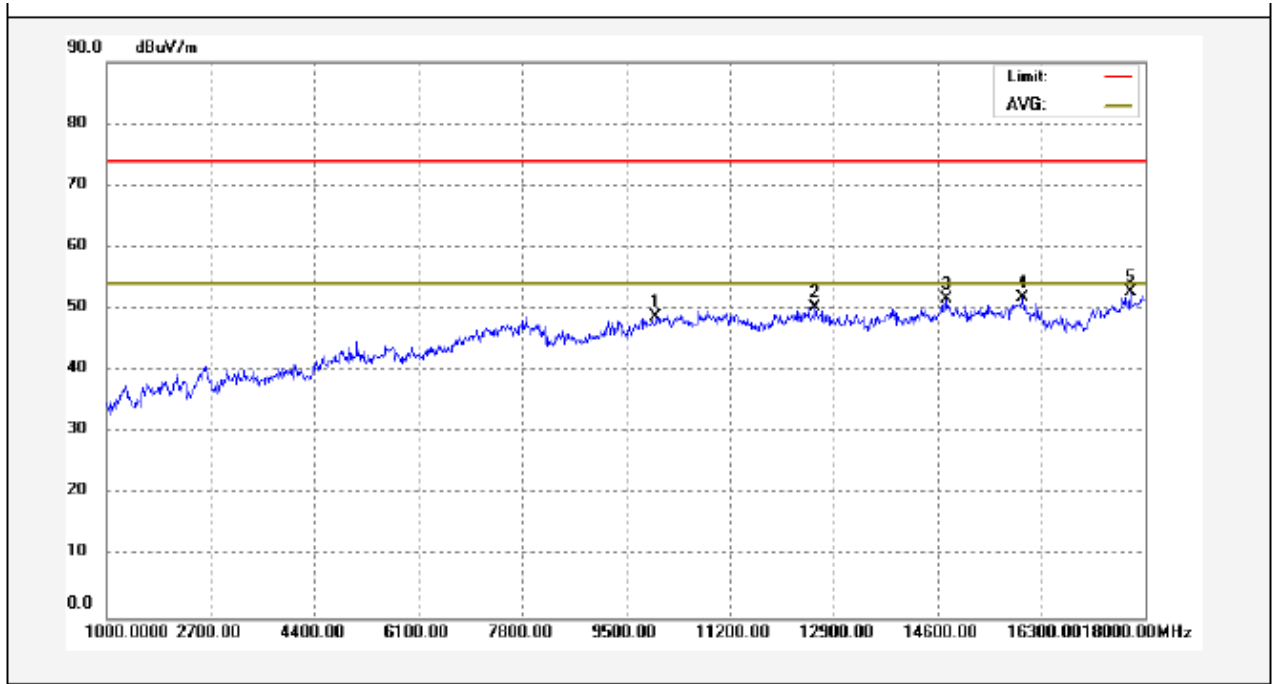

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	9993.000	44.40	4.26	48.66	74.00	-25.34	peak	
2	12594.000	44.02	6.23	50.25	74.00	-23.75	peak	
3	14753.000	43.16	8.57	51.73	74.00	-22.27	peak	
4	15994.000	43.39	8.42	51.81	74.00	-22.19	peak	
5	17762.000	36.19	16.47	52.66	74.00	-21.34	peak	


Antenna Polarization: Vertical

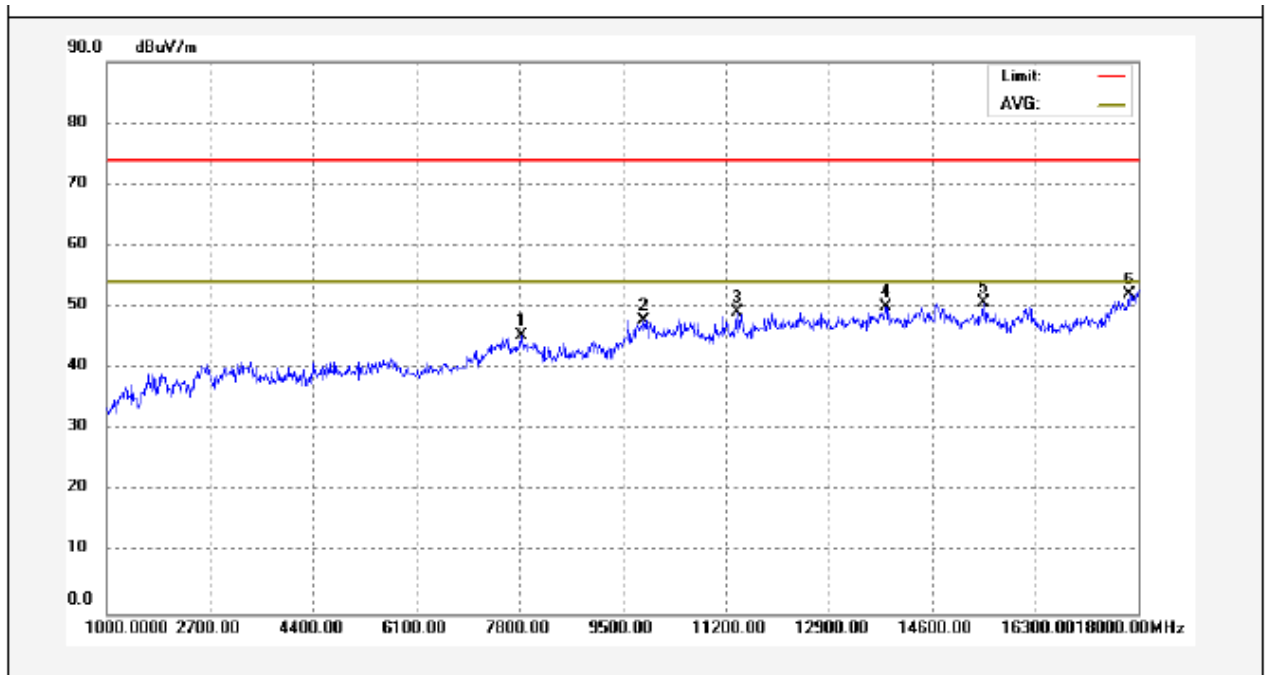

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	7834.000	42.53	2.72	45.25	74.00	-28.75	peak	
2	9840.000	43.67	4.20	47.87	74.00	-26.13	peak	
3	11387.000	42.86	6.28	49.14	74.00	-24.86	peak	
4	13835.000	41.51	8.52	50.03	74.00	-23.97	peak	
5	15450.000	42.31	8.46	50.77	74.00	-23.23	peak	
6	17847.000	35.08	16.97	52.05	74.00	-21.95	peak	


**3DH5 mode****Frequency: 2441 MHz**

Antenna Polarization: Horizontal

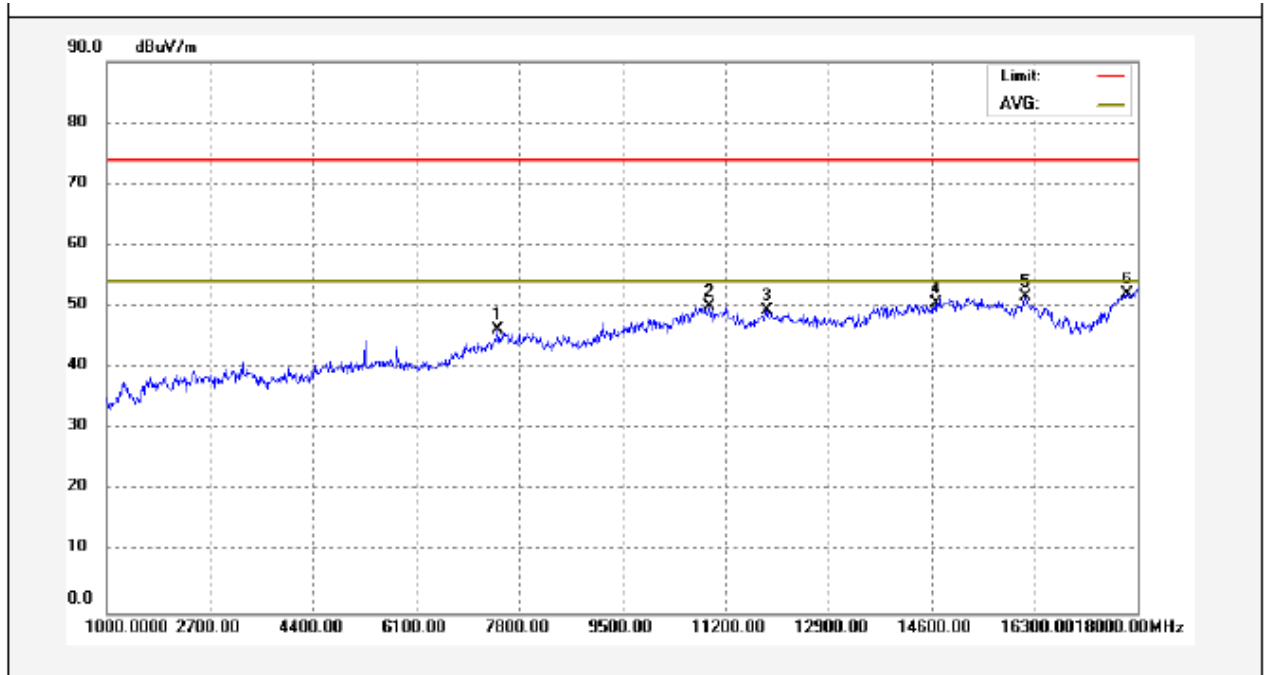

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	7443.000	44.06	2.16	46.22	74.00	-27.78	peak	
2	10928.000	43.82	6.27	50.09	74.00	-23.91	peak	
3	11880.000	43.51	5.89	49.40	74.00	-24.60	peak	
4	14685.000	41.98	8.58	50.56	74.00	-23.44	peak	
5	16147.000	42.59	8.99	51.58	74.00	-22.42	peak	
6	17830.000	35.20	16.87	52.07	74.00	-21.93	peak	

Antenna Polarization: Vertical

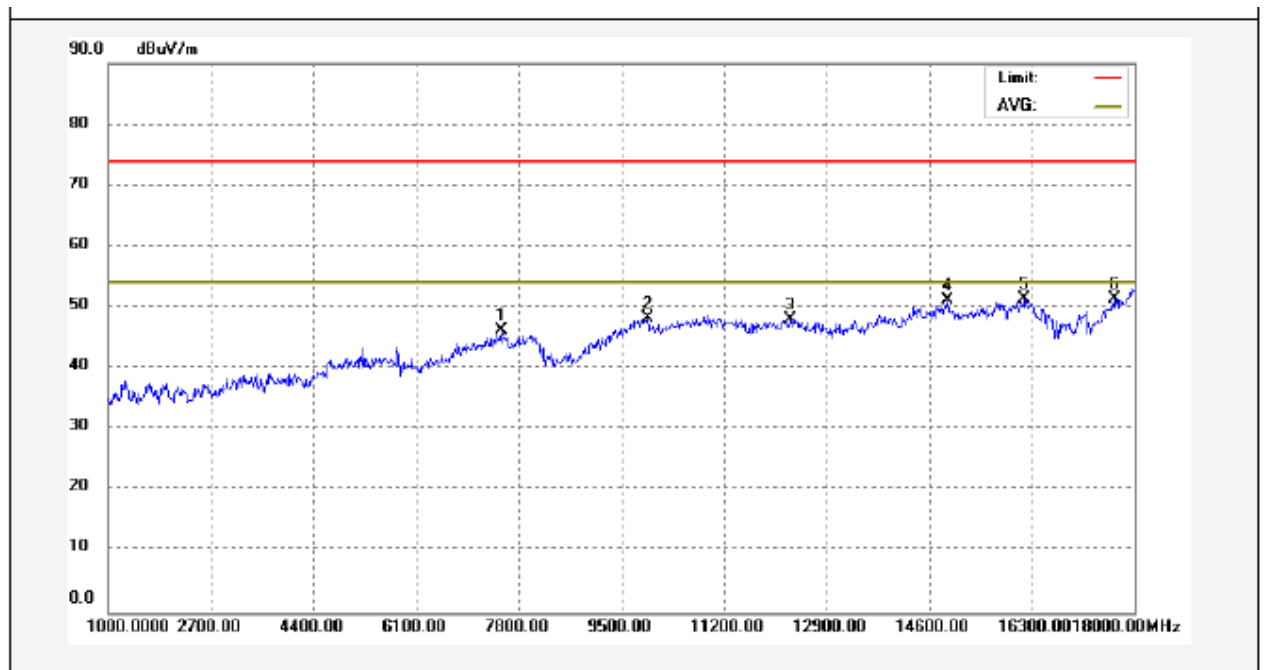


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	7511.000	43.89	2.27	46.16	74.00	-27.84	peak	
2	9942.000	43.96	4.24	48.20	74.00	-25.80	peak	
3	12305.000	42.20	5.94	48.14	74.00	-25.86	peak	
4	14906.000	42.50	8.58	51.08	74.00	-22.92	peak	
5	16181.000	42.27	9.13	51.40	74.00	-22.60	peak	
6	17660.000	35.50	15.87	51.37	74.00	-22.63	peak	



**3DH5 mode**


**Frequency: 2480 MHz**

Antenna Polarization: Horizontal

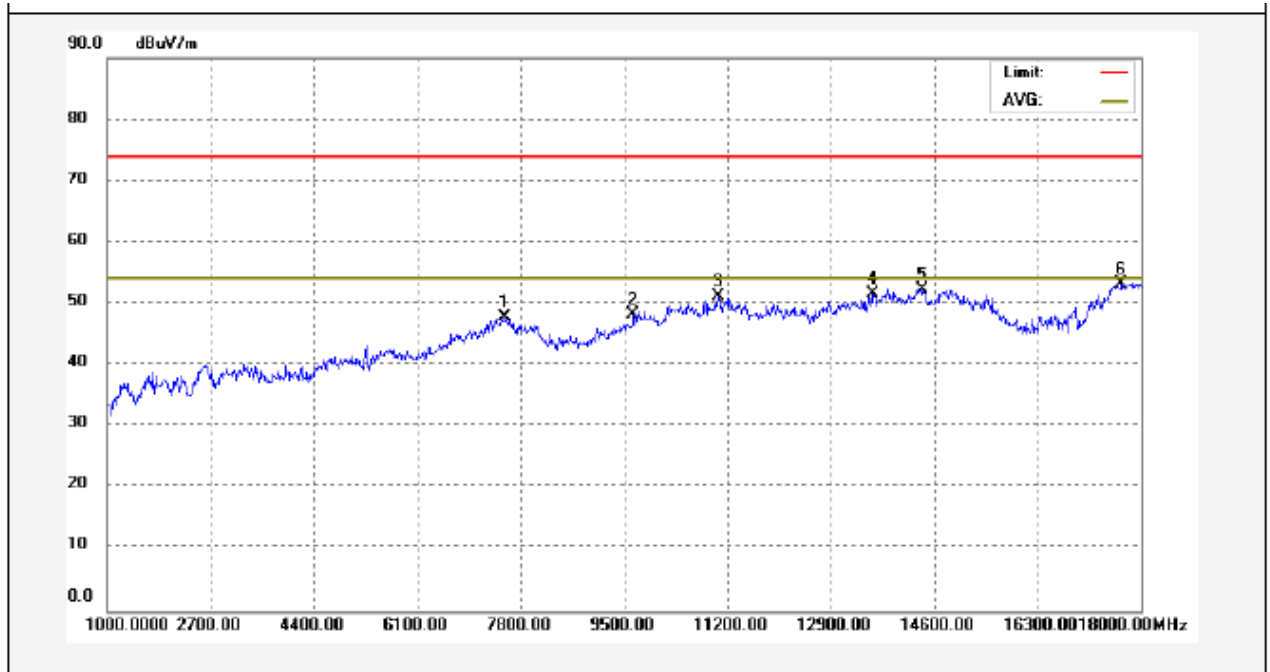

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	7528.000	45.57	2.29	47.86	74.00	-26.14	peak	
2	9653.000	44.12	4.12	48.24	74.00	-25.76	peak	
3	11047.000	44.75	6.36	51.11	74.00	-22.89	peak	
4	13597.000	43.26	8.35	51.61	74.00	-22.39	peak	
5	14413.000	43.81	8.58	52.39	74.00	-21.61	peak	
6	17677.000	37.24	15.97	53.21	74.00	-20.79	peak	

Antenna Polarization: Vertical

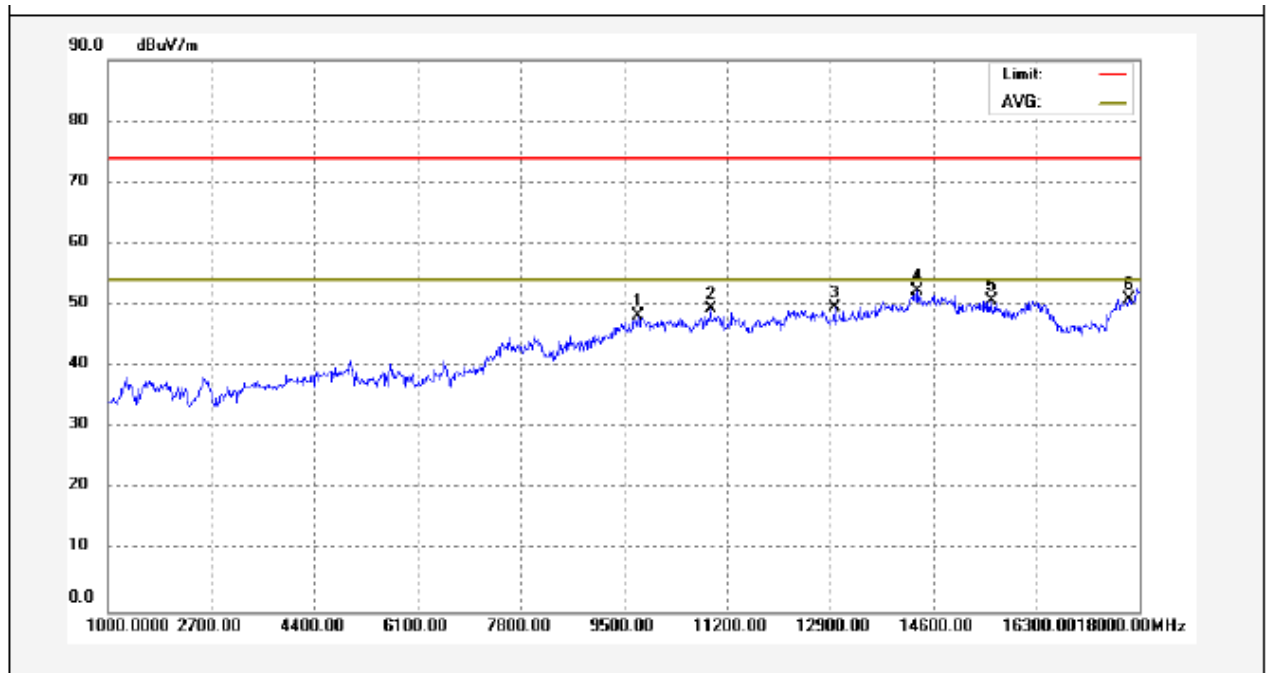

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	9738.000	44.03	4.16	48.19	74.00	-25.81	peak	
2	10928.000	43.16	6.27	49.43	74.00	-24.57	peak	
3	12968.000	42.53	7.04	49.57	74.00	-24.43	peak	
4	14345.000	43.72	8.59	52.31	74.00	-21.69	peak	
5	15552.000	42.33	8.44	50.77	74.00	-23.23	peak	
6	17830.000	34.07	16.87	50.94	74.00	-23.06	peak	

**Test Frequency: 18GHz ~ 26GHz**

The measurements were more than 20 dB below the limit and not reported.


## 8 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100 kHz, VBW = 300 kHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 8.2 Test Setup

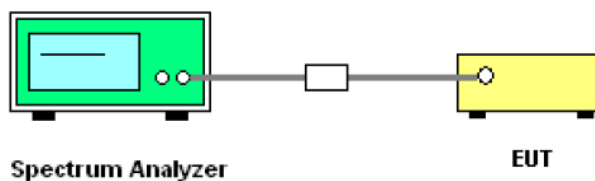


### 8.3 Test Result

#### Test plots


Modulation: GFSK

Transmitting Band edge-left side

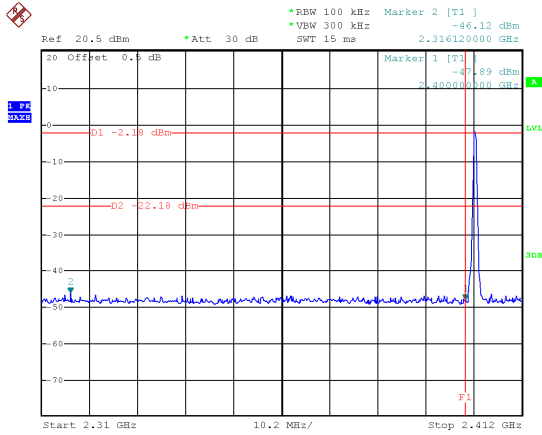


Date: 29.DEC.2023 09:35:58

Hopping Band edge-left side

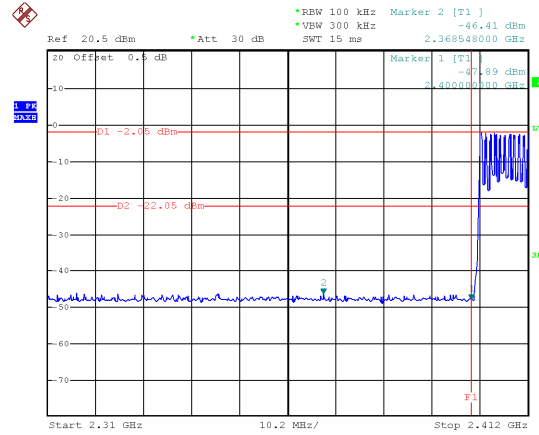


Date: 29.DEC.2023 09:38:46

Transmitting Band edge-right side

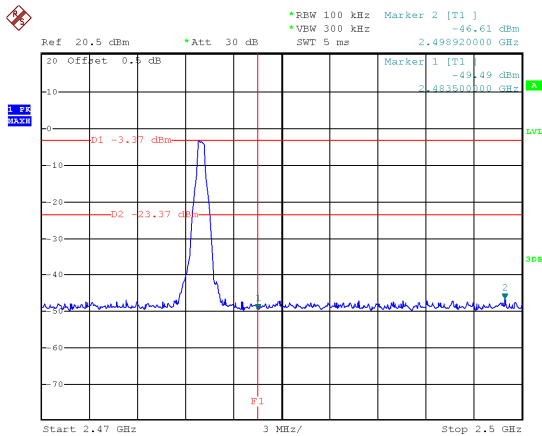

Date: 29.DEC.2023 09:41:40


Hopping Band edge-right side

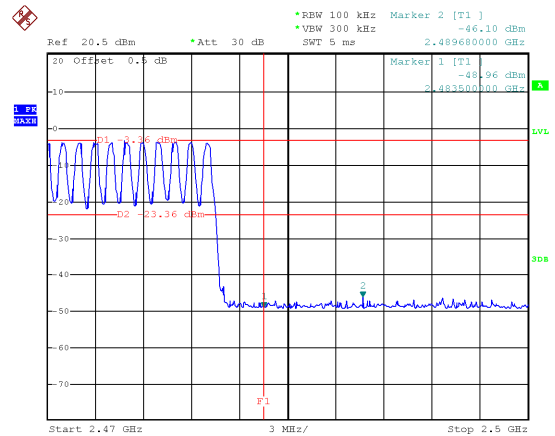

Date: 29.DEC.2023 09:40:27


Modulation:  $\pi/4$  DQPSK

Transmitting Band edge-left side

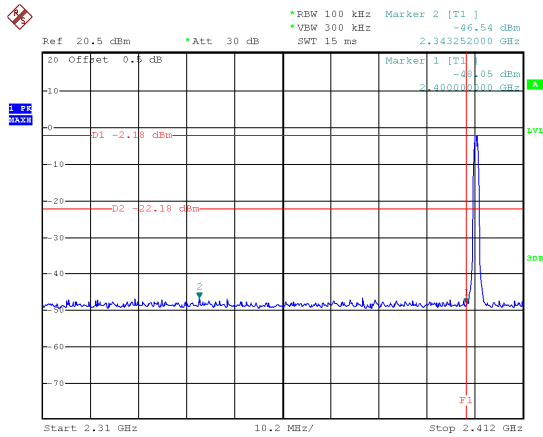


Date: 29.DEC.2023 09:42:54

Hopping Band edge-left side

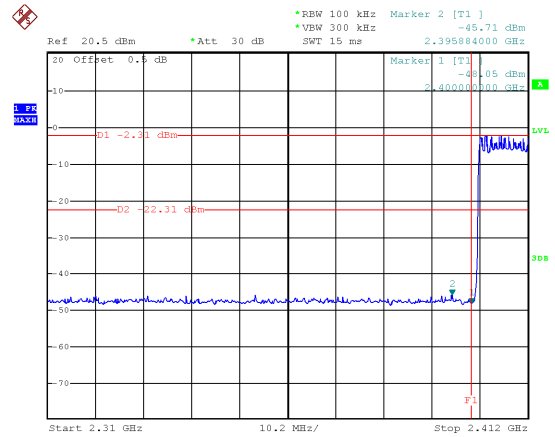


Date: 29.DEC.2023 09:50:12

Transmitting Band edge-right side

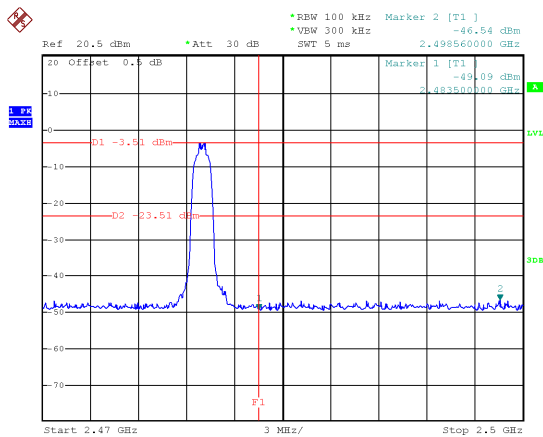

Date: 29.DEC.2023 09:54:49


Hopping Band edge-right side

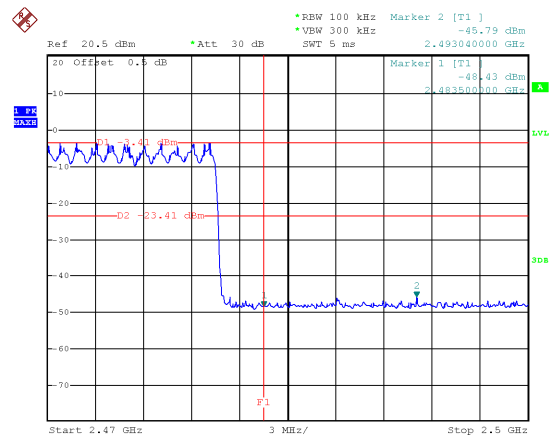

Date: 29.DEC.2023 09:53:15


Modulation: 8DPSK

Transmitting Band edge-left side

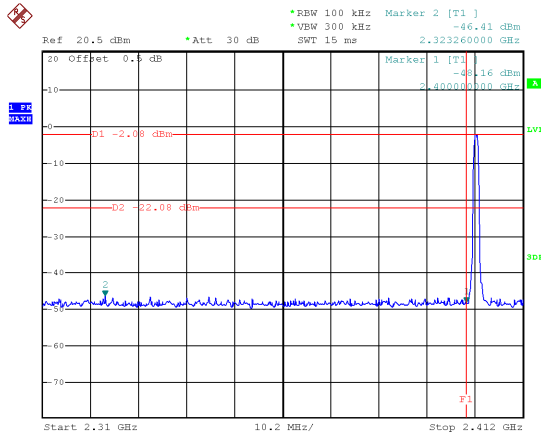


Date: 29.DEC.2023 09:56:11

Hopping Band edge-left side

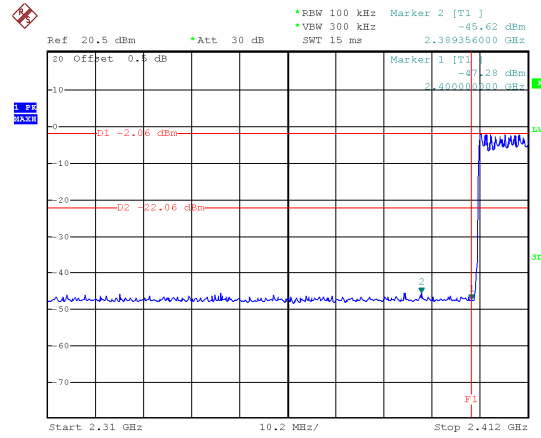


Date: 29.DEC.2023 10:08:38

Transmitting Band edge-right side

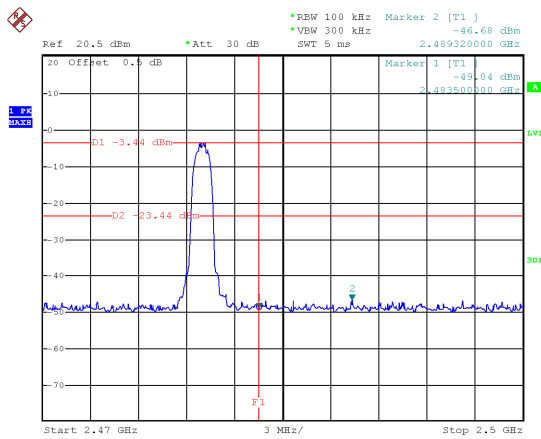

Date: 29.DEC.2023 10:14:40

Hopping Band edge-right side

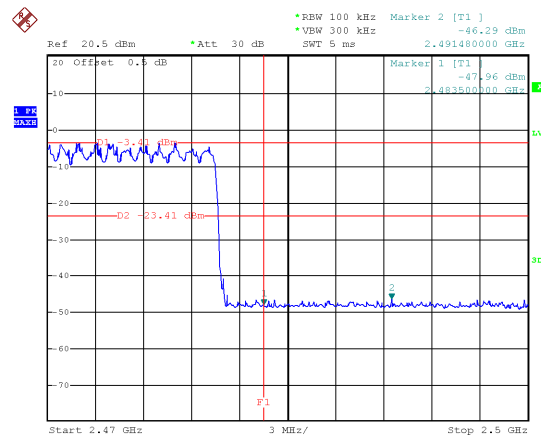

Date: 29.DEC.2023 10:13:26

## 9 Bandwidth Measurement

Test Requirement: FCC 47CFR Part 15 Section 15.247 (a) (2)

Test Method: ANSI C63.10:2013


Test Limit: The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

### 9.2 Test Setup

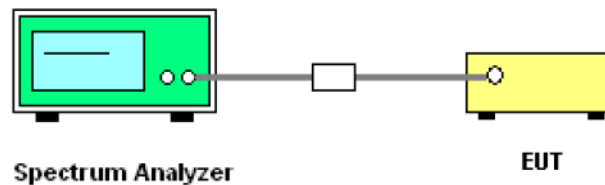

### 9.3 Test Result


Modulation	Test Channel	20 dB Bandwidth MHz	99% Bandwidth MHz
GFSK	Low	0.954	0.828
GFSK	Middle	0.960	0.828
GFSK	High	0.954	0.834
$\pi/4$ DQPSK	Low	1.302	1.176
$\pi/4$ DQPSK	Middle	1.302	1.170
$\pi/4$ DQPSK	High	1.308	1.176
8DPSK	Low	1.308	1.188
8DPSK	Middle	1.308	1.182
8DPSK	High	1.314	1.182

### Test plots

#### 20 dB Bandwidth


Modulation: GFSK

##### Low Channel

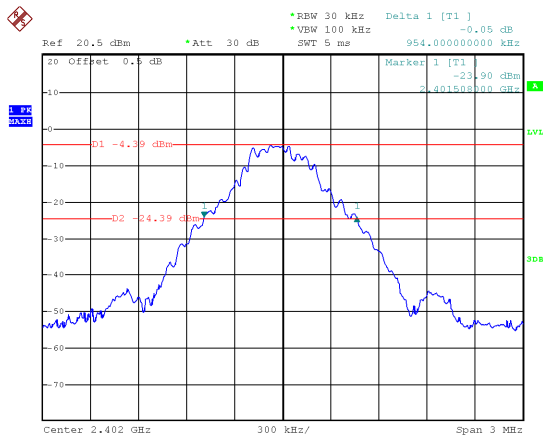


Date: 28.DEC.2023 17:11:55

##### Middle Channel

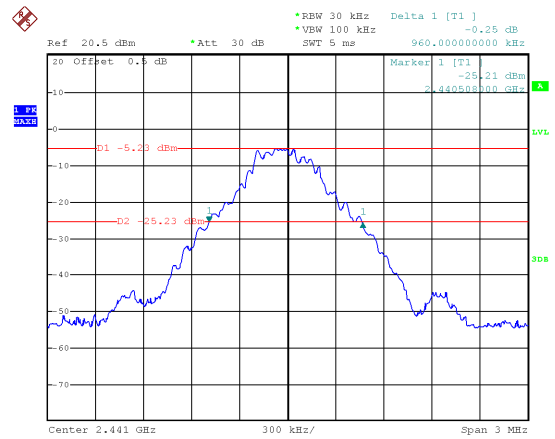

Date: 28.DEC.2023 17:11:06

##### High Channel

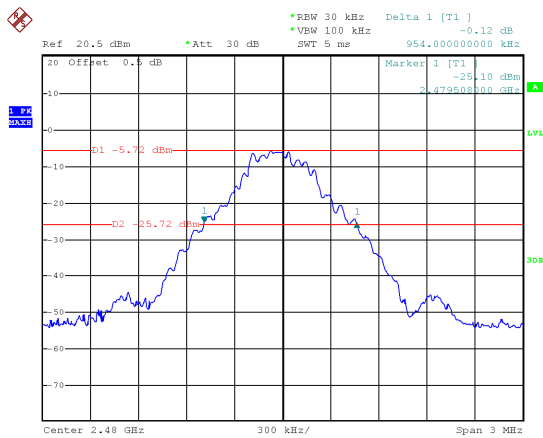


Date: 28.DEC.2023 17:10:17




Modulation:  $\pi/4$  DQPSK

Low Channel

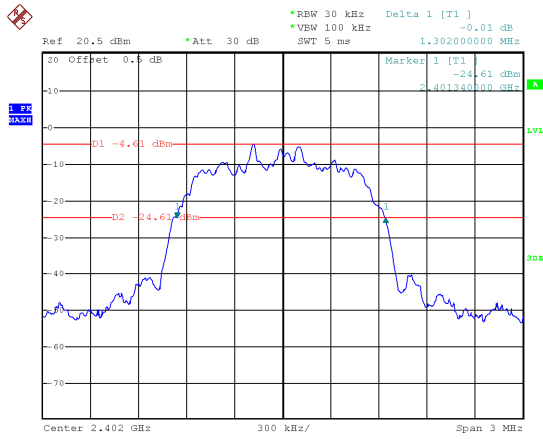


Date: 28.DEC.2023 17:06:17

Middle Channel

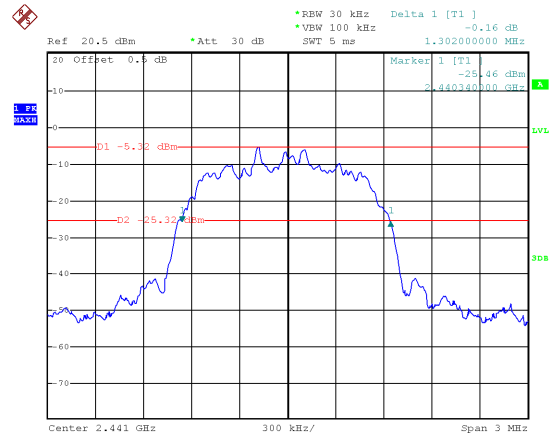

Date: 28.DEC.2023 17:07:32


High Channel

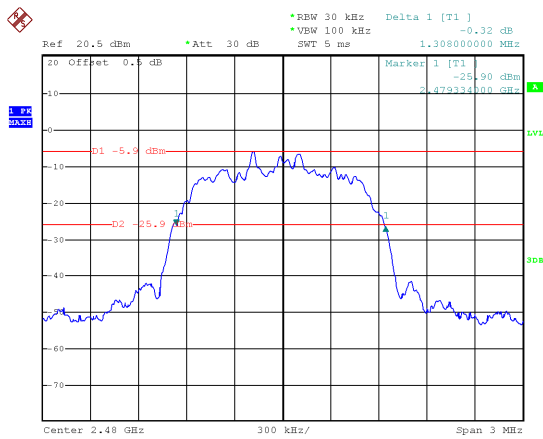

Date: 28.DEC.2023 17:08:58


Modulation: 8DPSK

Low Channel

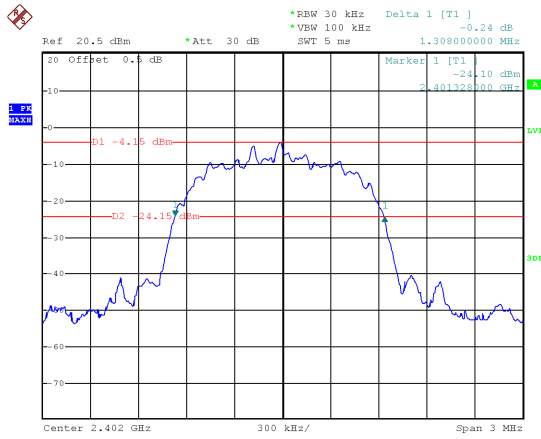


Date: 28.DEC.2023 17:04:46

Middle Channel

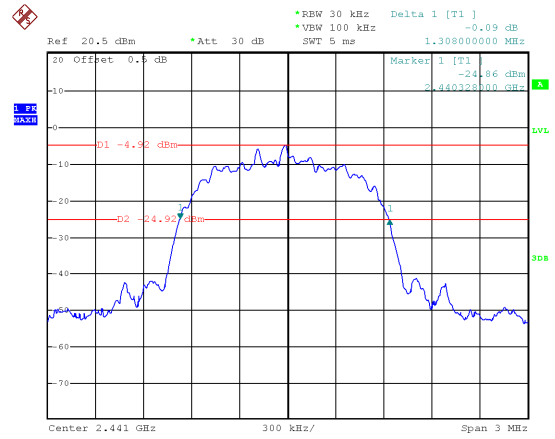

Date: 28.DEC.2023 17:03:47

High Channel

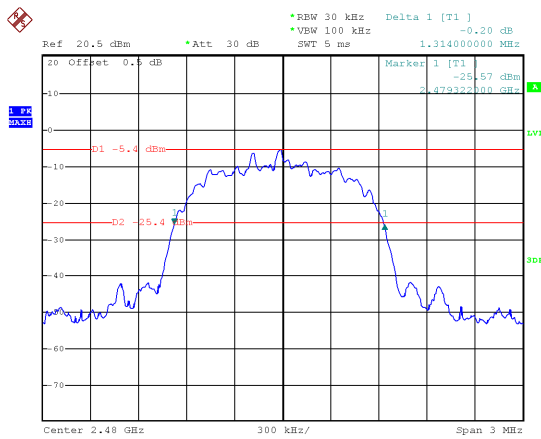


Date: 28.DEC.2023 17:02:27

99% Bandwidth


Modulation: GFSK

Low Channel

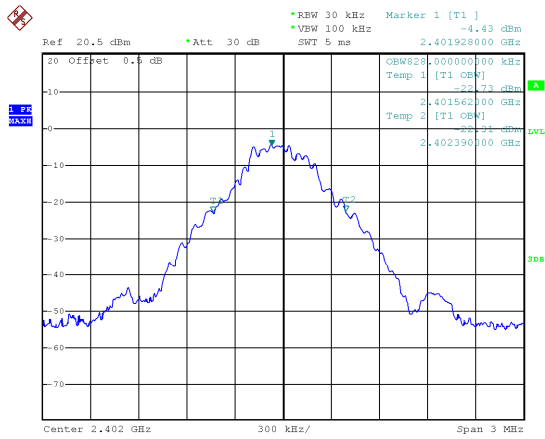


Date: 28.DEC.2023 16:51:37

Middle Channel

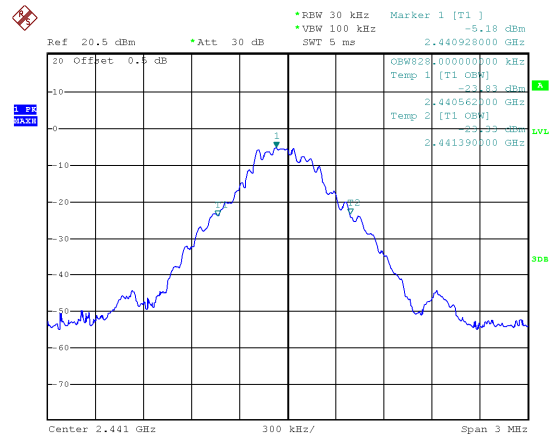

Date: 28.DEC.2023 16:52:23


High Channel

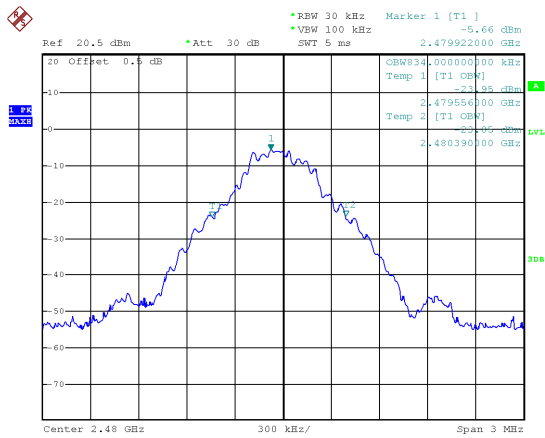

Date: 28.DEC.2023 16:52:57


Modulation:  $\pi/4$  DQPSK

Low Channel

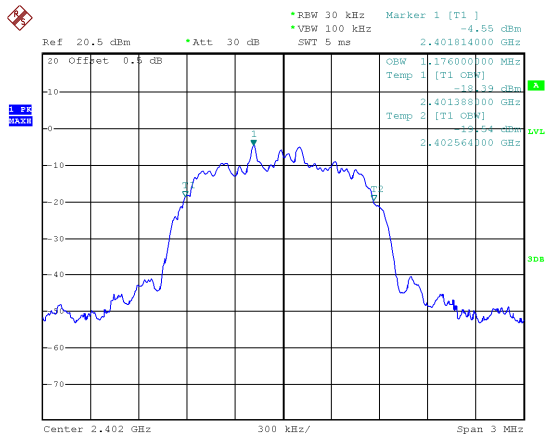


Date: 28.DEC.2023 16:54:04

Middle Channel

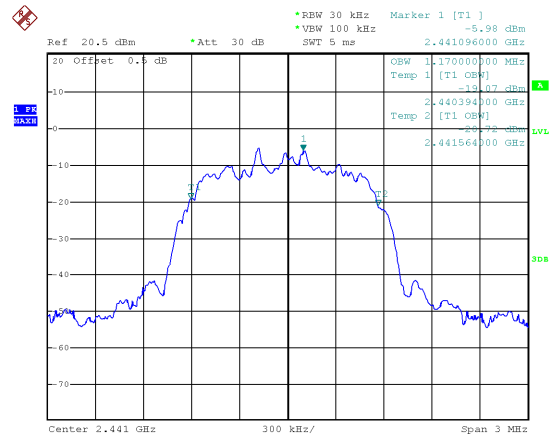

Date: 28.DEC.2023 16:54:42


High Channel

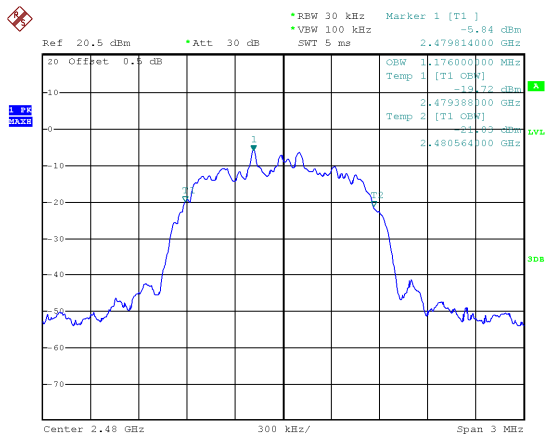

Date: 28.DEC.2023 16:55:29


Modulation: 8DPSK

Low Channel

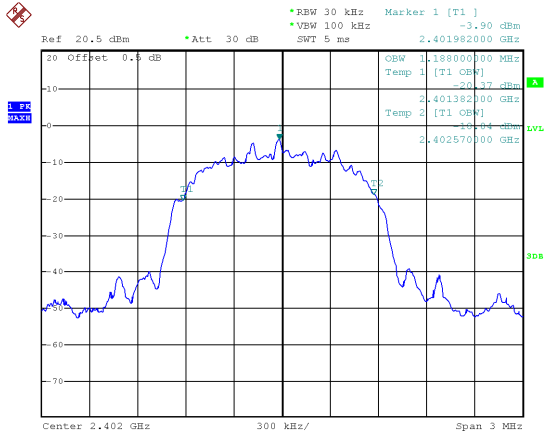


Date: 29.DEC.2023 10:52:35

Middle Channel

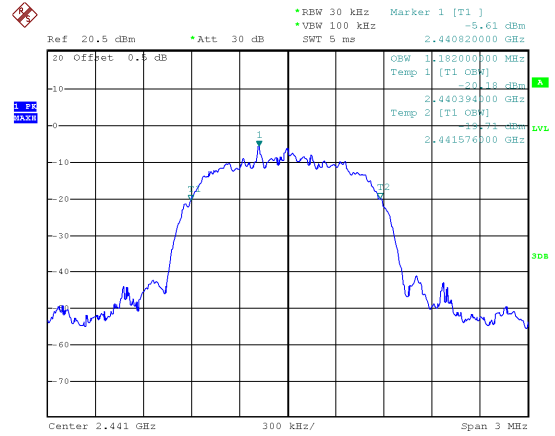

Date: 29.DEC.2023 08:31:27

High Channel

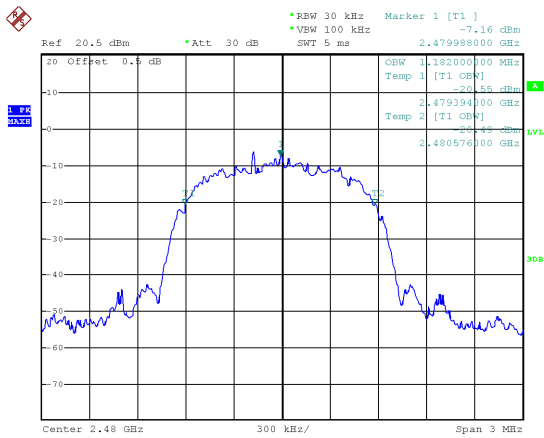

Date: 29.DEC.2023 08:32:24

## 10 Maximum Peak Output Power

Test Requirement: FCC 47CFR Part 15 Section 15.247 (b)

Test Method: ANSI C63.10:2013


Test Limit: The maximum output power limit for DTS devices is specified as 1 W and is expressed in terms of either maximum peak conducted output power or maximum conducted output power.

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 10.2 Test Setup

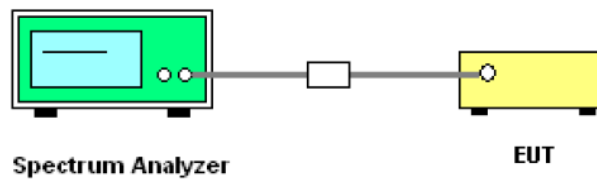


### 10.3 Test Result

Test Mode	Data Rate	Peak Power(dBm)			Limit (dBm)
		Low Channel	Middle Channel	High Channel	
GFSK	1Mbps	-1.58	-2.40	-3.00	30
$\pi/4$ DQPSK	2Mbps	0.69	-0.11	-0.75	30
8DPSK	3Mbps	<b>1.40</b>	0.56	-0.10	30

### Test plots


Modulation: GFSK

#### Low Channel

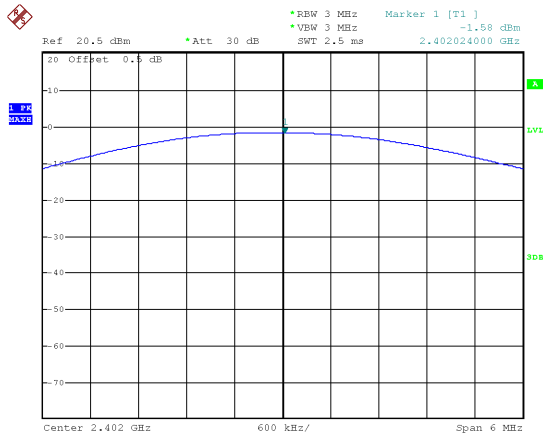


Date: 29.DEC.2023 10:48:56

#### Middle Channel

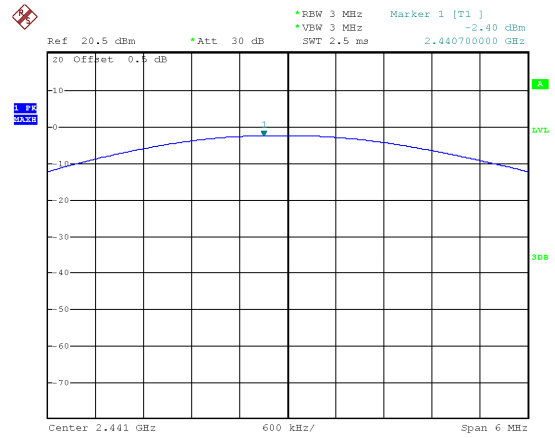

Date: 29.DEC.2023 10:49:20


#### High Channel

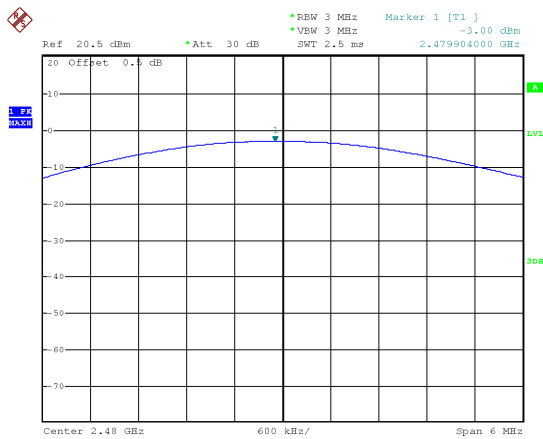

Date: 29.DEC.2023 10:48:30


Modulation:  $\pi/4$  DQPSK

Low Channel

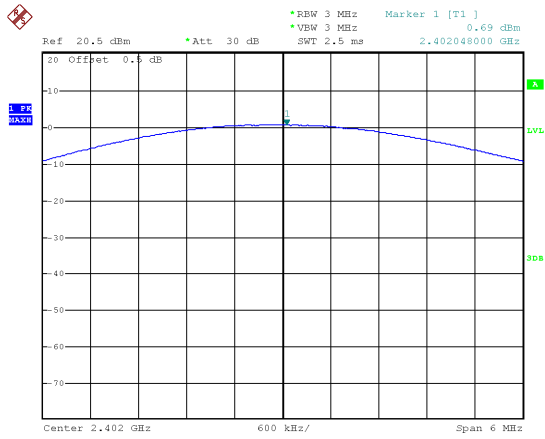


Date: 29.DEC.2023 10:50:05

Middle Channel

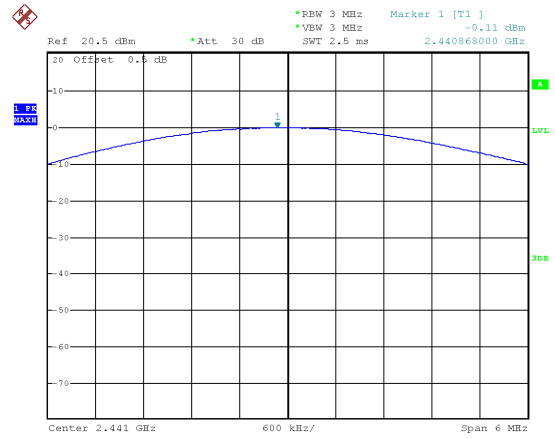

Date: 29.DEC.2023 10:49:40

High Channel

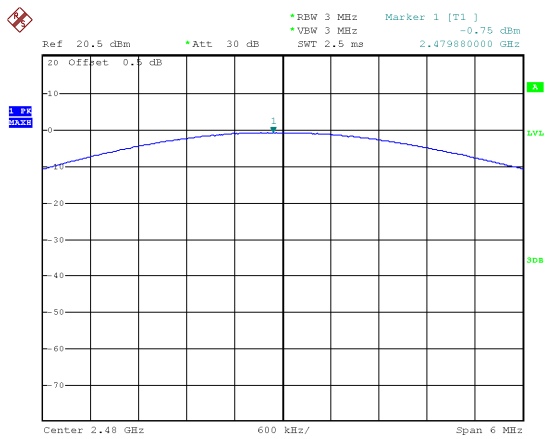


Date: 29.DEC.2023 10:50:23




Modulation: 8DPSK

Low Channel

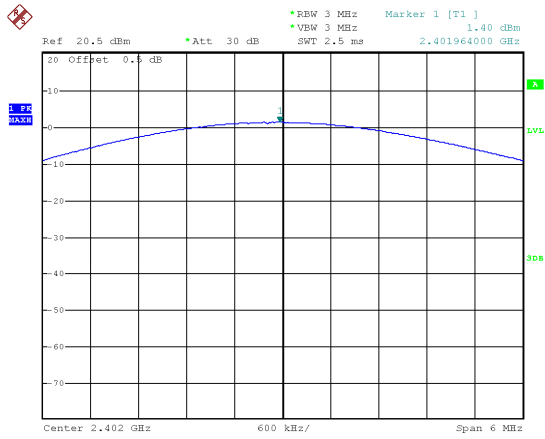


Date: 29.DEC.2023 10:51:36

Middle Channel

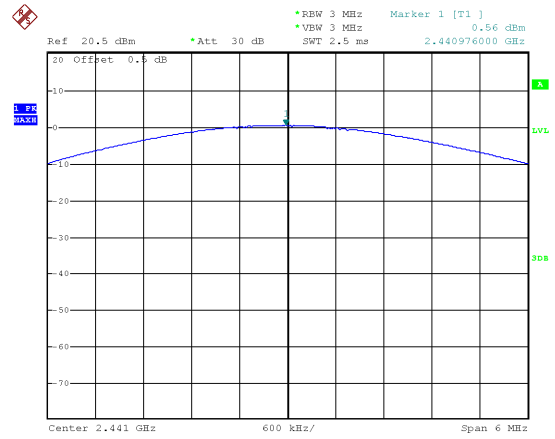

Date: 29.DEC.2023 10:51:03

High Channel

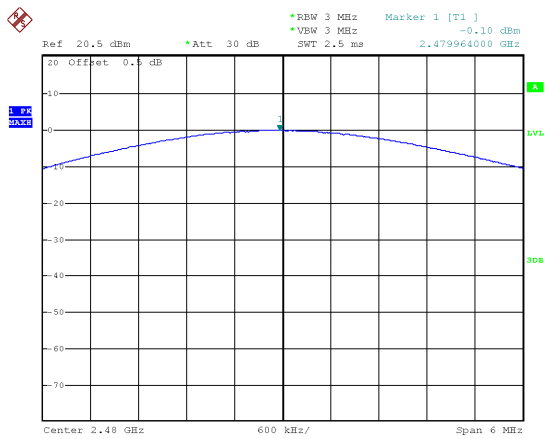

Date: 29.DEC.2023 10:50:42

## 11 Hopping Channel Separation

Test Requirement: FCC 47CFR Part 15 Section 15.247 (a) (1)

Test Method: ANSI C63.10:2013


Test Limit: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Mode: Test in hopping transmitting operating mode.

### 11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30 kHz. VBW = 100 kHz, Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.

### 11.2 Test Setup

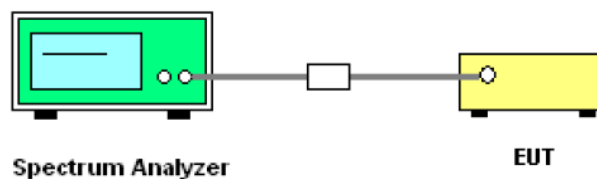

### 11.3 Test Result


Test result plot as follows:

Modulation	Test Channel	Test Result MHz	20dB Bandwidth MHz	Limits (2/3 20dB Bandwidth) MHz
GFSK	Low	1.002	0.954	0.636
GFSK	Middle	1.002	0.96	0.640
GFSK	High	1.002	0.954	0.636
$\pi/4$ DQPSK	Low	1.002	1.302	0.868
$\pi/4$ DQPSK	Middle	1.002	1.302	0.868
$\pi/4$ DQPSK	High	1.002	1.308	0.872
8DPSK	Low	1.002	1.308	0.872
8DPSK	Middle	1.002	1.308	0.872
8DPSK	High	1.002	1.314	0.876

Test plots


Modulation: GFSK

Low Channel

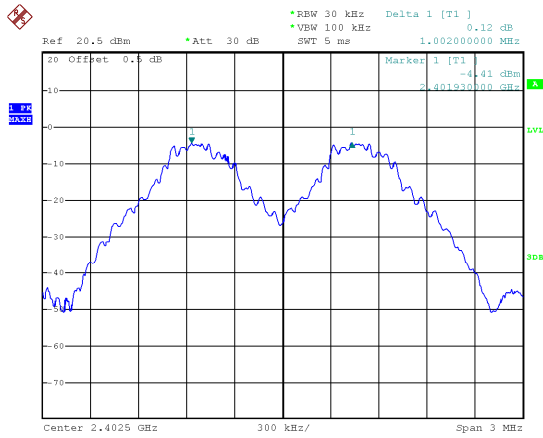


Date: 29.DEC.2023 09:12:58

Middle Channel

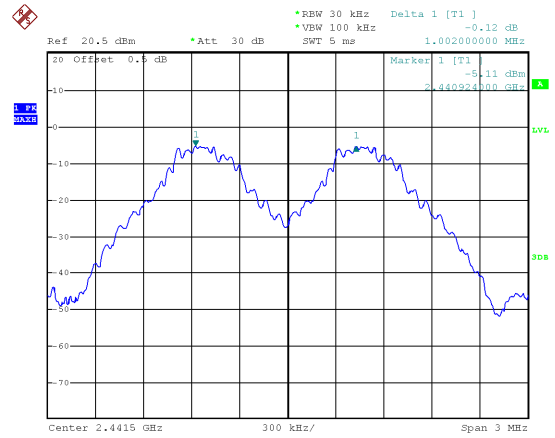

Date: 29.DEC.2023 09:15:15


High Channel

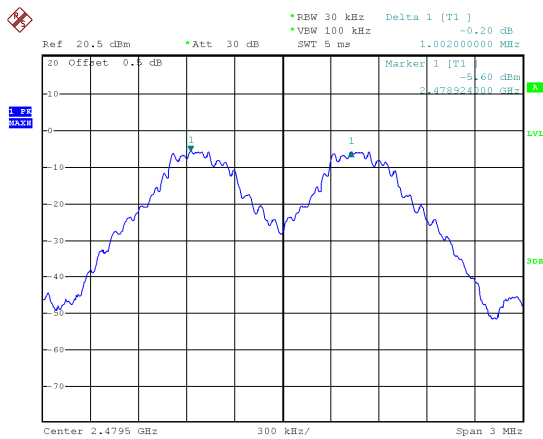

Date: 29.DEC.2023 09:16:18


Modulation:  $\pi/4$  DQPSK

Low Channel

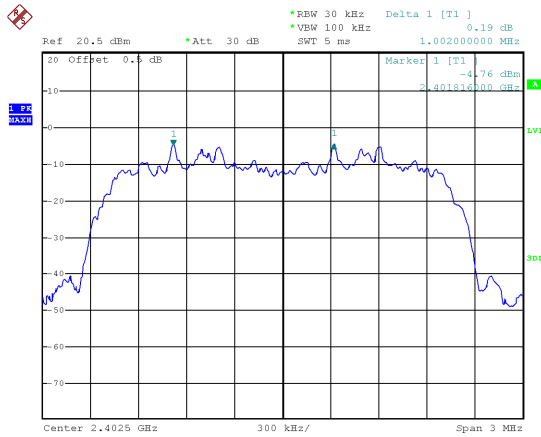


Date: 29.DEC.2023 09:17:30

Middle Channel

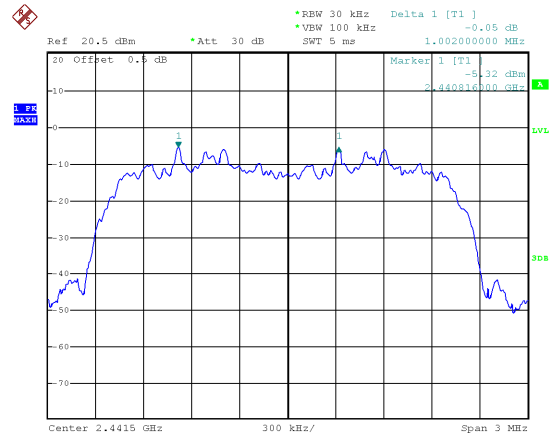

Date: 29.DEC.2023 09:18:35


High Channel

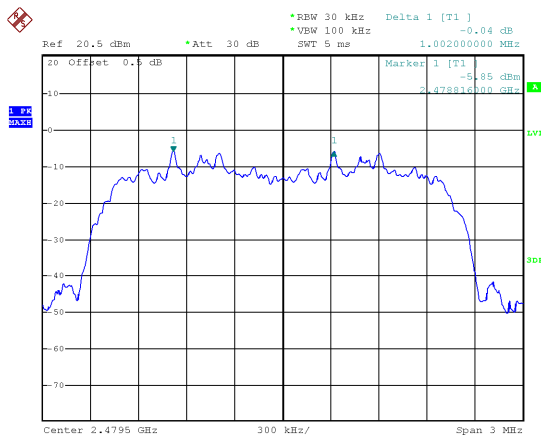

Date: 29.DEC.2023 09:19:34


Modulation: 8DPSK

Low Channel

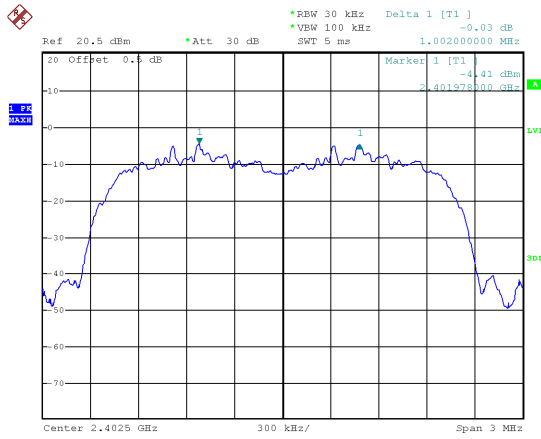


Date: 29.DEC.2023 09:20:54

Middle Channel

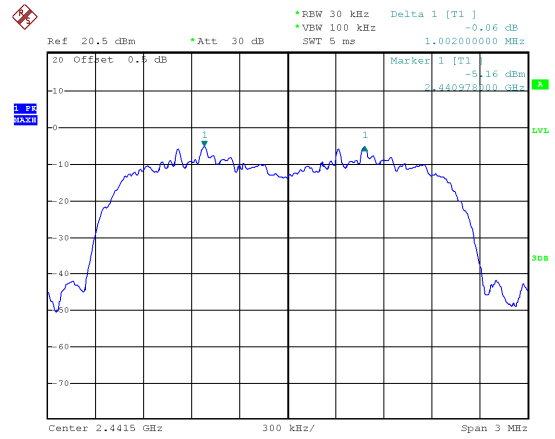

Date: 29.DEC.2023 09:22:10

High Channel

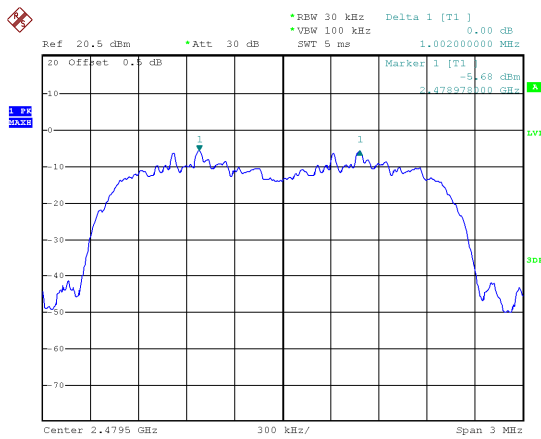

Date: 29.DEC.2023 09:23:15

## 12 Number of Hopping Frequency

Test Requirement: FCC 47CFR Part 15 Section 15.247 (a) (1) (iii)

Test Method: ANSI C63.10:2013


Test Limit: Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Mode: Test in hopping transmitting operating mode.

### 12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 12.2 Test Setup

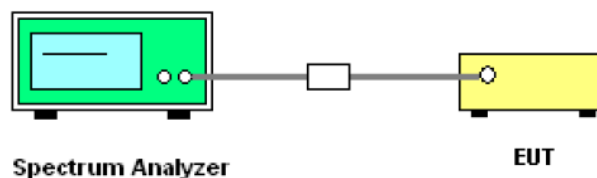


### 12.3 Test Result

Total Channels are 79 Channels.


#### Test Plot

Modulation: GFSK

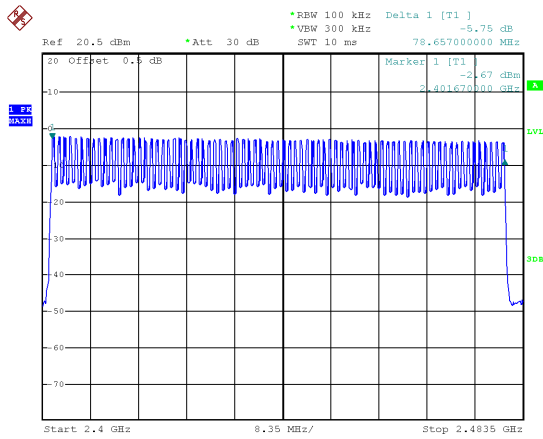


Date: 28.DEC.2023 17:16:00

Modulation:  $\pi/4$  DQPSK

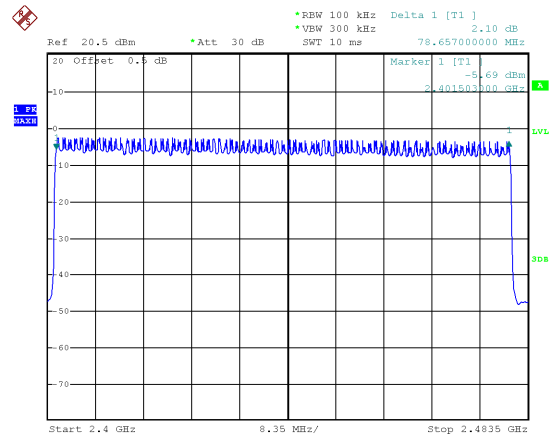

Date: 28.DEC.2023 17:26:58

Modulation: 8DPSK

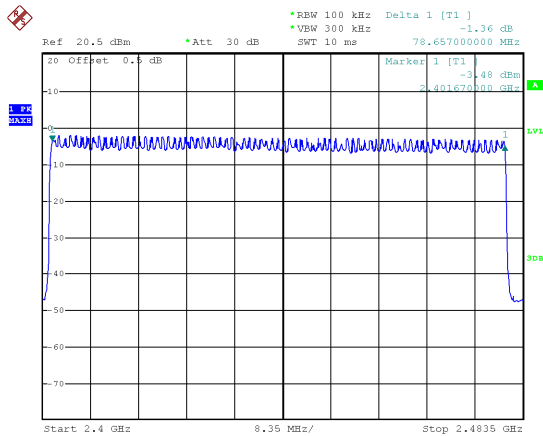

Date: 29.DEC.2023 09:10:25



## 13 Dwell Time

Test Requirement: FCC 47CFR Part 15 Section 15.247 (a) (1) (iii)

Test Method: ANSI C63.10:2013

Test Limit: Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Mode: Test in hopping transmitting operating mode.

### 13.1 Test Procedure

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0Hz. Centred on a hopping channel;
- 3.Set RBW = 1 MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

The test period:  $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum  $1600 / 79 / 6$  hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum  $1600 / 79 / 4$  hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum  $1600 / 79 / 2$  hops per second in each channel (1 time slot RX, 1 time slot TX).

So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

### 13.2 Test Setup

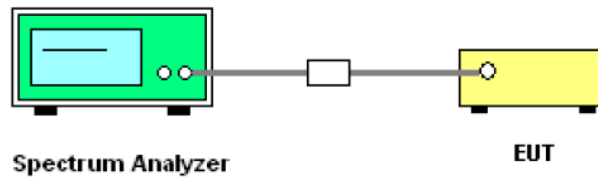

### 13.3 Test Result


Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.900	0.309	<0.4
		Middle	2.880	0.307	<0.4
		High	2.880	0.307	<0.4
$\pi/4$ DQPSK	2DH5	Low	2.880	0.307	<0.4
		Middle	2.880	0.307	<0.4
		High	2.880	0.307	<0.4
8DPSK	3DH5	Low	2.880	0.307	<0.4
		Middle	2.900	0.309	<0.4
		High	2.880	0.307	<0.4

Test Plot

Modulation: GFSK


Data Packet: DH5

Low Channel

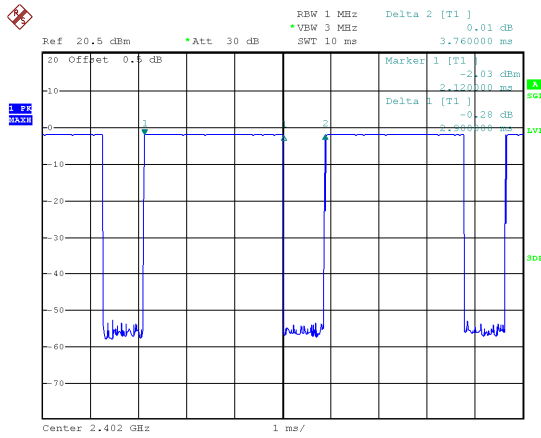


Date: 29.DEC.2023 09:27:29

Middle Channel

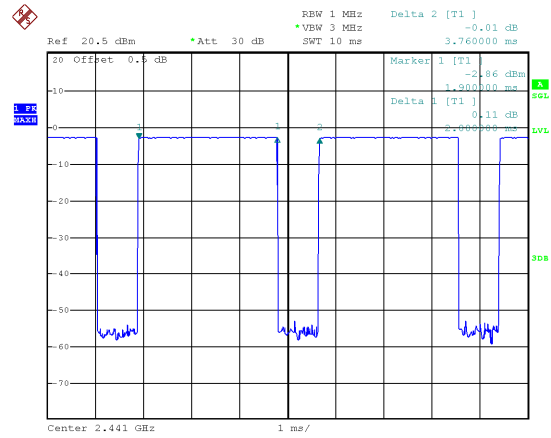

Date: 29.DEC.2023 09:28:10

High Channel

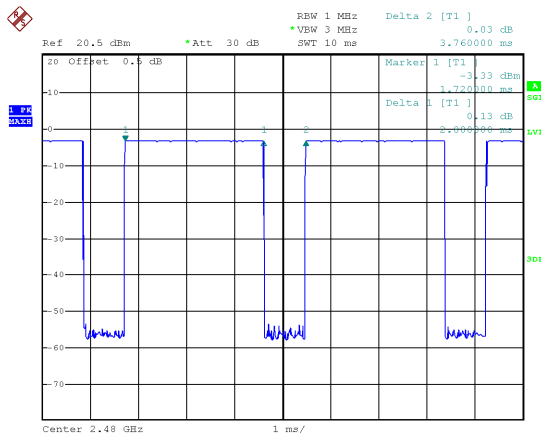


Date: 29.DEC.2023 09:28:51

Modulation:  $\pi/4$  DQPSK


Data Packet: 2DH5

Low Channel

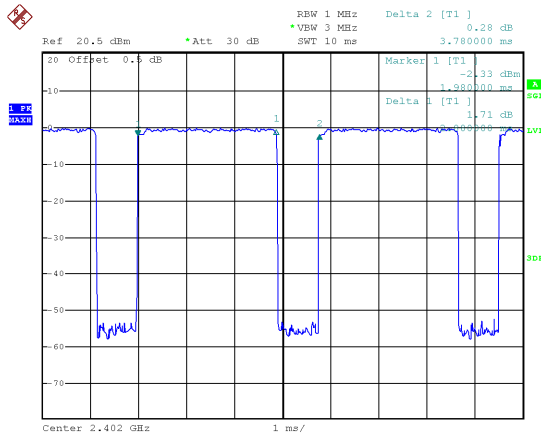


Date: 29.DEC.2023 09:30:45

Middle Channel

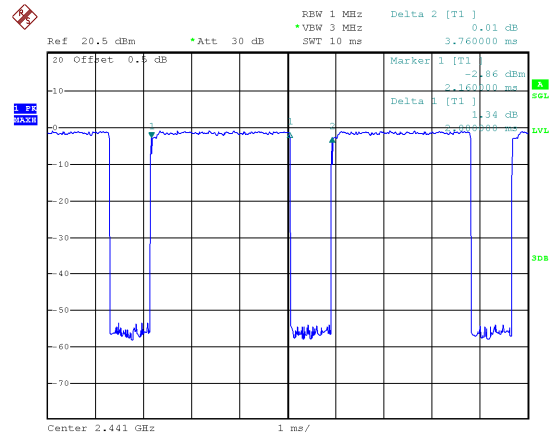

Date: 29.DEC.2023 09:31:25

High Channel

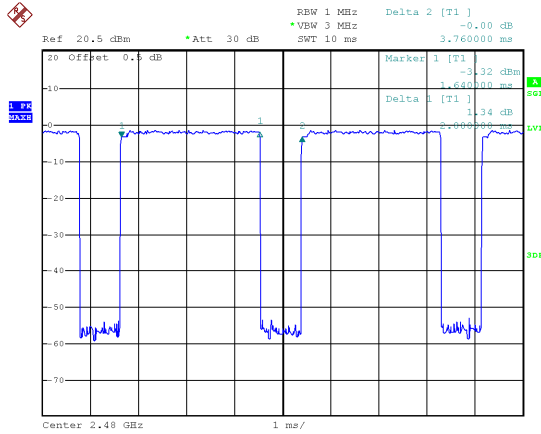


Date: 29.DEC.2023 09:32:02

Modulation: 8DPSK


Data Packet: 3DH5

Low Channel

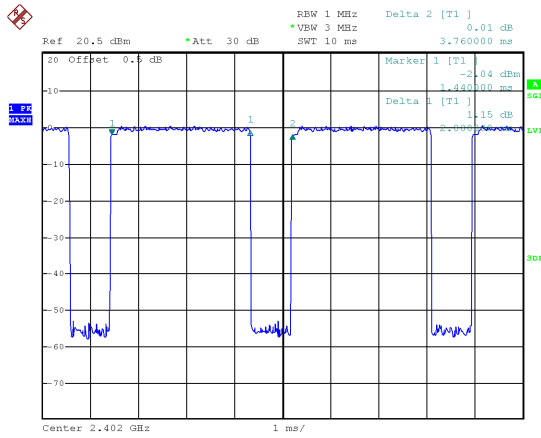


Date: 29.DEC.2023 09:32:47

Middle Channel

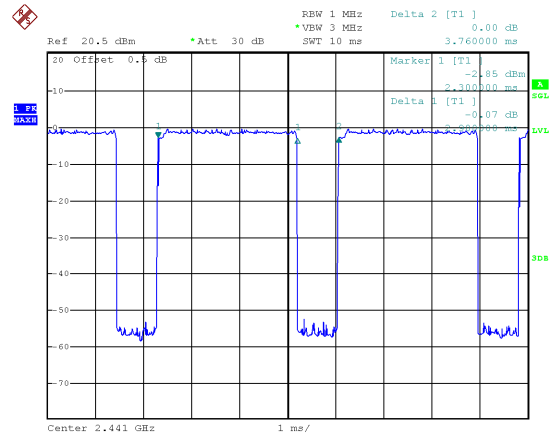

Date: 29.DEC.2023 09:33:27

High Channel

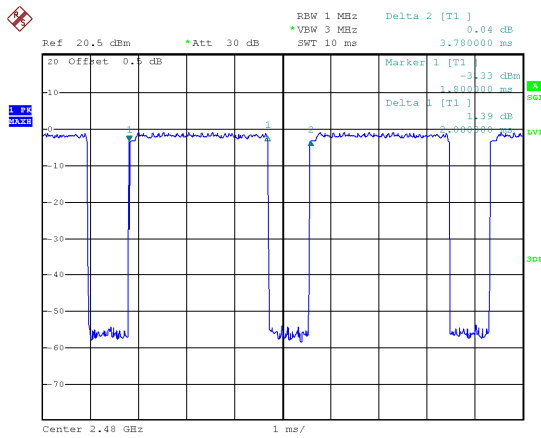

Date: 29.DEC.2023 09:34:07

## **14 Antenna Requirement**

According to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

This product has an integrated antenna fulfill the requirement of this section.

Note: Please refer to EUT photos for more details.

## **15 RF Exposure**

Note: Please refer to RF Exposure Report: WTD23D12264000W003.

## **16 Photographs –Test Setup and EUT Photos**

Note: Please refer to appendix: Appendix-CP-1.50-Photos.

=====**End of Report**=====