

TEST REPORT

FCC ID. :	2BAHU2023002	
Test Report No..... :	TCT230619E910	
Date of issue..... :	Jun. 29, 2023	
Testing laboratory :	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	DIALN PRODUCTS INC.	
Address..... :	8312 Page Ave, Saint Louis, Missouri 63130, United States	
Manufacturer's name ... :	SHENZHEN JREN TECHNOLOGY CO., LTD	
Address..... :	B Area, 9/F, A4 Building, Tianrui Industrial Park, No. 35, Fuyuan 1st Road, Zhancheng, Fuhai, Baoan District, Shenzhen, China.	
Standard(s) :	FCC CFR Title 47 Part 2 FCC CFR Title 47 Part22 FCC CFR Title 47 Part24 FCC CFR Title 47 Part27	
Product Name..... :	LTE Tablet	
Trade Mark :	DIALN	
Model/Type reference..... :	X10G, X10M	
Rating(s)..... :	Refer to EUT description of page 3	
Date of receipt of test item :	Jun. 19, 2023	
Date (s) of performance of test..... :	Jun. 19, 2023 - Jun. 29, 2023	
Tested by (+signature) ... :	Rleo LIU	
Check by (+signature).... :	Beryl ZHAO	
Approved by (+signature):	Tomsin	

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Table of Contents

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	4
1.3. Operation Frequency	5
2. Test Result Summary	6
3. General Information.....	7
3.1. Test environment and mode.....	7
3.2. Description of Support Units.....	8
3.3. Configuration of Tested System	9
3.4. Measurement Results Explanation Example.....	9
4. Facilities and Accreditations	10
4.1. Facilities	10
4.2. Location	10
4.3. Measurement Uncertainty.....	10
5. Test Results and Measurement Data	11
5.1. Field Strength of Spurious Radiation Measurement	11
Appendix B: Photographs of Test Setup	
Appendix C: Photographs of EUT	

1. General Product Information

1.1. EUT description

Product Name.....:	LTE Tablet
Model/Type reference.....:	X10G
Sample Number.....:	TCT230619E901-0101
3G Version	WCDMA: R99 HSDPA: Release 5 HSUPA: Release 6
Tx Frequency.....:	GPRS/EGPRS 850: 824.2MHz ~ 848.8MHz GPRS/EGPRS 1900: 1850.2MHz ~ 1909.8MHz WCDMA Band V: 826.4MHz ~ 846.6MHz WCDMA Band IV: 1712.4MHz ~ 1752.6MHz WCDMA Band II: 1852.4MHz ~ 1907.6MHz
Rx Frequency	GPRS/EGPRS 850: 869.2MHz ~ 893.8MHz GPRS/EGPRS 1900: 1930.2MHz ~ 1989.8MHz WCDMA Band V: 871.4MHz ~ 891.6MHz WCDMA Band IV: 2112.4MHz ~ 2152.6MHz WCDMA Band II: 1932.4MHz ~ 1987.6MHz
Maximum Output Power to Antenna.....:	GPRS850: 32.48dBm GPRS1900: 28.94dBm EGPRS850: 25.84dBm EGPRS1900: 24.83dBm WCDMA Band V: 22.36dBm WCDMA Band IV: 21.85dBm WCDMA Band II: 22.07dBm
99% Occupied Bandwidth.....:	GPRS850 Class 8: 243KGXW GPRS1900 Class 8: 246KGXW EGPRS850 Class 8: 242KG7W EGPRS1900 Class 8: 243KG7W WCDMA Band V RMC 12.2Kbps: 4M18F9W WCDMA Band IV RMC 12.2Kbps: 4M16F9W WCDMA Band II RMC 12.2Kbps: 4M17F9W
Type of Modulation.....:	GPRS: GMSK EGPRS: 8PSK WCDMA/HSDPA/HSUPA: QPSK
Antenna Type.....:	Internal Antenna
Antenna Gain.....:	GPRS/EGPRS 850: 0.8dBi GPRS/EGPRS 1900: 1.0dBi WCDMA Band V: 0.8dBi WCDMA Band IV: 1.0dBi WCDMA Band II: 1.0dBi
Rating(s).....:	Adapter Information: MODEL: BOS050200-01A INPUT: AC 100-240V, 50/60Hz, 0.45A OUTPUT: DC 5V, 2000mA Rechargeable Li-ion Battery DC 3.7V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

No.	Model No.	Tested with
1	X10G	☒
Other models	X10M	☐

Note: X10G is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names. So the test data of X10G can represent the remaining models.

1.3. Operation Frequency

GSM 850		PCS1900	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....			
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...	...	...	...
250	848.60	809	1909.60
251	848.80	810	1909.80

WCDMA Band IV		WCDMA Band V		WCDMA Band II	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
1312	1712.4	4132	826.40	9262	1852.40
....		4133	826.60	9263	1852.60
....					
....		4182	836.40	9399	1879.80
1413	1732.6	4183	836.60	9400	1880.00
....		4184	836.80	9401	1880.20
....		...	...	...	...
1513	1752.6	4233	846.60	9538	1907.60

2. Test Result Summary

Requirement	CFR 47 Section	Result
Conducted Output Power	§22.913; §2.1046 §24.232; §27.50(d)	PASS
Peak-to-Average Ratio	§2.1046; §24.232(d) §22.913; §27.50(d)	PASS
Effective Radiated Power	§2.1046; §22.913(a) §24.232; §27.50(d)	PASS
Equivalent Isotropic Radiated Power	§2.1046; §22.913(a) §24.232; §27.50(d)	PASS
Occupied Bandwidth	§2.1049	PASS
Band Edge	§2.1051 §22.917(a) §24.238(a) §27.53(g)	PASS
Conducted Spurious Emission	§2.1051; §22.917 §24.238; §27.53(h)	PASS
Field Strength of Spurious Radiation	§2.1053; §22.917(a) §24.238; §27.53(g)	PASS
Frequency Stability for Temperature & Voltage	§2.1055; §22.355 §24.235; §27.54	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. Those test results (Conducted Output Power, Peak-to-Average Ratio, Effective Radiated Power, Equivalent Isotropic Radiated Power, Occupied Bandwidth, Band Edge, Conducted Spurious Emission, Frequency Stability for Temperature & Voltage) was based on FCC ID: 2BAHU2023002; Change product model No. and shell material of EUT.

3. General Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Remark: This product has a built-in rechargeable battery, so in an independent test, the EUT battery was fully-charged.	

Keep the EUT in communication with CMU200 and select channel with modulation
All modes and data rates and positions were investigated.
Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
GSM 850	GPRS class 12 Link EGPRS class 12 Link	GPRS class 12 Link EGPRS class 12 Link
PCS 1900	GPRS class 12 Link EGPRS class 12 Link	GPRS class 12 Link EGPRS class 12 Link
WCDMA Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link
WCDMA Band IV	RMC 12.2Kbps Link	RMC 12.2Kbps Link
WCDM Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power. Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission. The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarization. The emissions worst-case (Z axis) are shown in Test Results of the following pages.

3.2. Description of Support Units

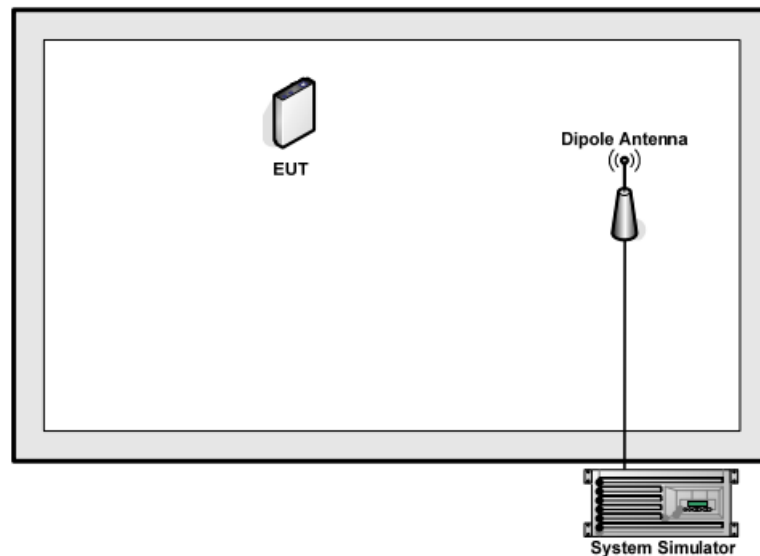
The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3.3. Configuration of Tested System



3.4. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 3 dB and a 5dB attenuator.

Example: *Offset (dB) = RF cable loss (dB) + attenuator factor (dB).*
= 8(dB)

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

4.3. Measurement Uncertainty

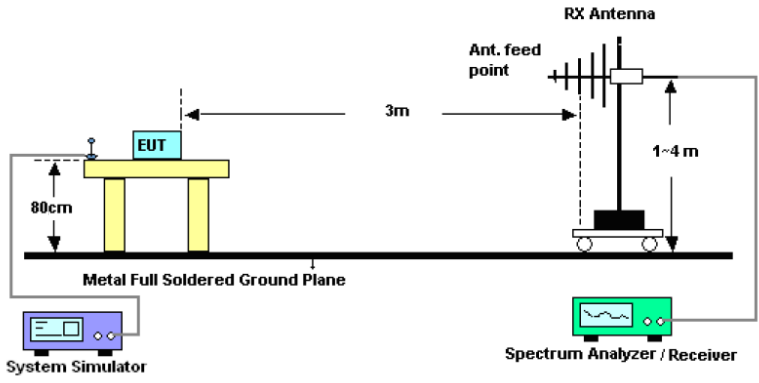
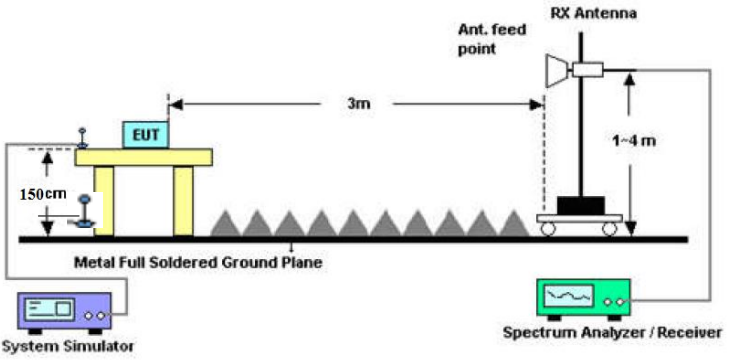
The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB
7	Temperature	$\pm 0.1^{\circ}\text{C}$
8	Humidity	$\pm 1.0\%$

5. Test Results and Measurement Data

5.1. Field Strength of Spurious Radiation Measurement

5.1.1. Test Specification

Test Requirement:	FCC part 22.917(a) and FCC part 24.238(a) FCC part 27.53(g)
Test Method:	FCC KDB 971168 D01v03r01
Operation mode:	Refer to item 3.1
Limit:	-13dBm
Test setup:	For 30MHz~1GHz  Above 1GHz 
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03r01 Section 6 and ANSI / TIA-603-D-2010 Section 2.2.12. 2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground. 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower. 4. The table was rotated 360 degrees to determine the position of the highest spurious emission. 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical

	polarizations. 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission. 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. 9. Taking the record of output power at antenna port. 10. Repeat step 7 to step 8 for another polarization. 11. $EIRP\ (dBm) = S.G.\ Power - Tx\ Cable\ Loss + Tx\ Antenna\ Gain$ 12. $ERP\ (dBm) = EIRP - 2.15$ 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. 14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts) $= P(W) - [43 + 10\log(P)]\ (dB)$ $= [30 + 10\log(P)]\ (dBm) - [43 + 10\log(P)]\ (dB)$ $= -13dBm.$
Test results:	PASS
Remark:	All modulations have been tested, but only the worst modulation show in this test item.

5.1.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Universal Radio Communication Tester	R&S	CMU200	110188	Jul. 04, 2023
Spectrum Analyzer	R&S	FSQ40	200061	Jul. 03, 2023
Signal Generator	HP	83623B	3614A00396	Feb. 24, 2024
Broadband Antenna	Schwarzbeck	VULB9163	340	Jul. 05, 2023
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jul. 05, 2023
Broadband Antenna	Schwarzbeck	VULB9163	412	Jul. 05, 2023
Horn Antenna	Schwarzbeck	BBHA 9120D	1201	Jul. 05, 2023
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Feb. 24, 2024
Coaxial cable	SKET	RC-18G-N-M	/	Feb. 24, 2024
Coaxial cable	SKET	RC_40G-K-M	/	Feb. 24, 2024
Antenna Mast	Keleto	RE-AM	/	/
EMI Test Software	Shurple Technology	EZ-EMC	/	/

5.1.3. Test Data

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Band	GSM 850	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1648.4	Vertical	-60.31	23.12	-37.19	-13.00	PASS
2472.6	V	-68.05	23.20	-44.85		
3296.8	V	-80.82	23.28	-57.54		
1648.4	Horizontal	-59.39	23.12	-36.27		
2472.6	H	-66.84	23.20	-43.64		
3296.8	H	-79.67	23.28	-56.39		

Band	GSM 850	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.2	Vertical	-60.39	23.17	-37.22	-13.00	PASS
2509.8	V	-70.76	23.26	-47.50		
3346.4	V	-81.14	23.38	-57.76		
1673.2	Horizontal	-59.48	23.17	-36.31		
2509.8	H	-68.44	23.26	-45.18		
3346.4	H	-81.50	23.38	-58.12		

Band	GSM 850	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1697.6	Vertical	-62.19	23.23	-38.96	-13.00	PASS
2546.4	V	-72.41	23.32	-49.09		
3395.2	V	-79.95	23.44	-56.51		
1697.6	Horizontal	-58.79	23.23	-35.56		
2546.4	H	-67.92	23.32	-44.60		
3395.2	H	-82.51	23.44	-59.07		

Band	PCS 1900	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3700.4	Vertical	-67.23	23.49	-43.74	-13.00	PASS
5550.6	V	-76.15	23.75	-52.40		
7400.8	V	-83.21	23.89	-59.32		
3700.4	Horizontal	-64.79	23.49	-41.30		
5550.6	H	-70.51	23.75	-46.76		
7400.8	H	-80.63	23.89	-56.74		

Band	PCS 1900	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3760.0	Vertical	-67.80	23.58	-44.22	-13.00	PASS
5640.0	V	-76.86	23.85	-53.01		
7520.0	V	-76.14	23.99	-52.15		
3760.0	Horizontal	-65.04	23.58	-41.46		
5640.0	H	-77.17	23.85	-53.32		
7520.0	H	-82.13	23.99	-58.14		

Band	PCS 1900	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3819.6	Vertical	-65.88	23.64	-42.24	-13.00	PASS
5729.4	V	-74.54	23.93	-50.61		
7639.2	V	-82.32	24.08	-58.24		
3819.6	Horizontal	-65.16	23.64	-41.52		
5729.4	H	-69.55	23.93	-45.62		
7639.2	H	-82.24	24.08	-58.16		

Band	WCDMA Band V	Test channel:	Lowest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1652.8	Vertical	-73.73	23.14	-50.59	-13.00	PASS
2479.2	V	-80.66	23.23	-57.43		
3305.6	V	-78.98	23.34	-55.64		
1652.8	Horizontal	-70.46	23.14	-47.32		
2479.2	H	-79.50	23.23	-56.27		
3305.6	H	-81.17	23.34	-57.83		

Band	WCDMA Band V	Test channel:	Middle
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.2	Vertical	-71.27	23.17	-48.10	-13.00	PASS
2509.8	V	-81.30	23.26	-58.04		
3346.4	V	-80.68	23.38	-57.30		
1673.2	Horizontal	-69.66	23.17	-46.49		
2509.8	H	-83.16	23.26	-59.90		
3346.4	H	-80.85	23.38	-57.47		

Band	WCDMA Band V	Test channel:	Highest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1693.2	Vertical	-75.37	23.20	-52.17	-13.00	PASS
2539.8	V	-81.90	23.29	-58.61		
3386.4	V	-84.64	23.42	-61.22		
1693.2	Horizontal	-71.34	23.20	-48.14		
2539.8	H	-80.26	23.29	-56.97		
3386.4	H	-85.21	23.42	-61.79		

Band	WCDMA Band IV	Test channel:	Lowest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
2452.3	Vertical	-83.32	23.16	-60.16	-13.00	PASS
3424.8	V	-81.19	23.37	-57.82		
5137.2	V	-82.90	23.65	-59.25		
2452.3	Horizontal	-81.15	23.16	-57.99		
3424.8	H	-81.06	23.37	-57.69		
5137.2	H	-80.27	23.65	-56.62		

Band	WCDMA Band IV	Test channel:	Middle
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
2641.3	Vertical	-83.55	23.30	-60.25	-13.00	PASS
3465.2	V	-79.12	23.42	-55.70		
5197.8	V	-84.70	23.73	-60.97		
2641.3	Horizontal	-80.57	23.30	-57.27		
3465.2	H	-83.38	23.42	-59.96		
5197.8	H	-82.32	23.73	-58.59		

Band	WCDMA Band IV	Test channel:	Highest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3102.2	Vertical	-81.63	23.35	-58.28	-13.00	PASS
3505.2	V	-82.06	23.45	-58.61		
5257.8	V	-78.82	23.82	-55.00		
3102.2	Horizontal	-82.25	23.35	-58.90		
3505.2	H	-81.80	23.45	-58.35		
5257.8	H	-84.91	23.82	-61.09		

Band	WCDMA Band II	Test channel:	Lowest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3704.8	Vertical	-70.82	23.53	-47.29	-13.00	PASS
5557.2	V	-82.65	23.78	-58.87		
7409.6	V	-85.38	23.92	-61.46		
3704.8	Horizontal	-72.56	23.53	-49.03		
5557.2	H	-80.37	23.78	-56.59		
7409.6	H	-85.00	23.92	-61.08		

Band	WCDMA Band II	Test channel:	Middle
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3760.0	Vertical	-81.77	23.58	-58.19	-13.00	PASS
5640.0	V	-83.82	23.85	-59.97		
7520.0	V	-73.67	23.99	-49.68		
3760.0	Horizontal	-79.88	23.58	-56.30		
5640.0	H	-84.44	23.85	-60.59		
7520.0	H	-81.96	23.99	-57.97		

Band	WCDMA Band II	Test channel:	Highest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3815.2	Vertical	-74.76	23.62	-51.14	-13.00	PASS
5722.8	V	-81.15	23.90	-57.25		
7630.4	V	-81.67	24.05	-57.62		
3815.2	Horizontal	-72.53	23.62	-48.91		
5722.8	H	-80.31	23.90	-56.41		
7630.4	H	-81.59	24.05	-57.54		

Appendix B: Photographs of Test Setup

Refer to the test report No. TCT230619E901

Appendix C: Photographs of EUT

Refer to the test report No. TCT230619E901

*******END OF REPORT*******