

TEST REPORT

Reference No..... : WTX23X06121604W008
FCC ID : 2BAHU2023021
Applicant : DIALN PRODUCTS INC
Address : 8312 Page Ave, St. Louis, Missouri, 63130, USA
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Smart Phone
Model No..... : X62
Standards : **FCC PART15 SUBPART B**
Date of Receipt sample : 2023-06-05
Date of Test..... : 2023-06-05 to 2023-07-03
Date of Issue : 2023-07-04
Test Report Form No. : WTX_FCC PART15B_001
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. CONDUCTED EMISSIONS	11
3.1 TEST PROCEDURE.....	11
3.2 BASIC TEST SETUP BLOCK DIAGRAM.....	11
3.3 ENVIRONMENTAL CONDITIONS	11
3.4 SUMMARY OF TEST RESULTS	11
4. RADIATED EMISSION	14
4.1 TEST PROCEDURE.....	14
4.2 BLOCK DIAGRAM OF TEST SETUP	14
4.3 TEST RECEIVER SETUP	15
4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
4.5 ENVIRONMENTAL CONDITIONS	15
4.6 SUMMARY OF TEST RESULTS	15
EXHIBIT 1 - EUT PHOTOGRAPHS.....	错误!未定义书签。
EXHIBIT 2 - EUT INTERNAL PHOTOGRAPHS.....	错误!未定义书签。
EXHIBIT 3 - TEST SETUP PHOTOGRAPHS	错误!未定义书签。
EXHIBIT 4 - USERS MANUAL	错误!未定义书签。

Report version

Version No.	Date of issue	Description
Rev.00	2023-07-04	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Smart Phone
Trade Name:	DIALN
Model No.:	X62
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	DC3.8V
Rated Current:	/
Rated Power:	/
Power Adapter:	TPA-46050200UU Input:AC100-220V 50/60Hz 0.3A Output: DC5V2000mA
Lowest Internal Frequency:	26MHz
Highest Internal Frequency:	5825MHz
Classification of ITE:	Class B

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15 Subpart B:Unintentional Radiators.

ANSI C63.4-2014:American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Charging And Playing	Connect to the Adapter;	AC120V 60Hz for adapter
TM2	Downloading	Connect to the Notebook;	AC120V 60Hz for PC
TM3	Camera on	Front Camera On;	AC120V 60Hz for adapter
TM4	Camera on	Back Camera On;	AC120V 60Hz for adapter
TM5	FM	Worst case FM 98MHz	DC3.8V
TM6	GPS	Receive 1575.42MHz	DC3.8V
TM7	GSM 850	Receiver	DC3.8V
TM8	WCMDA Band 5	Receiver	DC3.8V
TM9	LTE Band 5	Receiver	DC3.8V
<i>Note: For TM7-TM9, All bands are performed, but only the worst case is recorded in this report.</i>			

EUT Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
USB Cable	1.0	Shielded	Without Ferrite	/

Special Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
Headset Cable	1.2	Unshielded	Without Ferrite	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	ASUS	FA5061C	M8NRCX057996349

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Radiated Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
☐ Chamber A:Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2023-02-25	2024-02-24
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-02-25	2024-02-24
Amplifier	HP	8447F	2805A03475	2023-02-25	2024-02-24
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
☐ Chamber A:Above 1GHz					
Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
☐ Chamber B:Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
Amplifier	Agilent	8447D	2944A10179	2023-02-25	2024-02-24
☒ Chamber C:Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
Amplifier	HP	8447F	2944A03869	2023-02-25	2024-02-24
☒ Chamber C:Above 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
Horn Antenna	POAM	RTF-11A	LP228060221	2023-03-10	2026-03-09
Amplifier	Tonscend	TAP01018050	AP22E806235	2023-02-25	2024-02-24
☒ Conducted Room 1#					
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24
AC LISN	Schwarz beck	NSLK8126	8126-224	2023-02-25	2024-02-24
☐ Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	10129	2023-02-25	2024-02-24

Reference No.: WTX23X06121604W008

LISN	Rohde & Schwarz	ENV 216	100097	2023-02-25	2024-02-24
------	-----------------	---------	--------	------------	------------

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.107(a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant


N/A: not applicable

3. Conducted Emissions

3.1 Test Procedure

The test is conducted under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

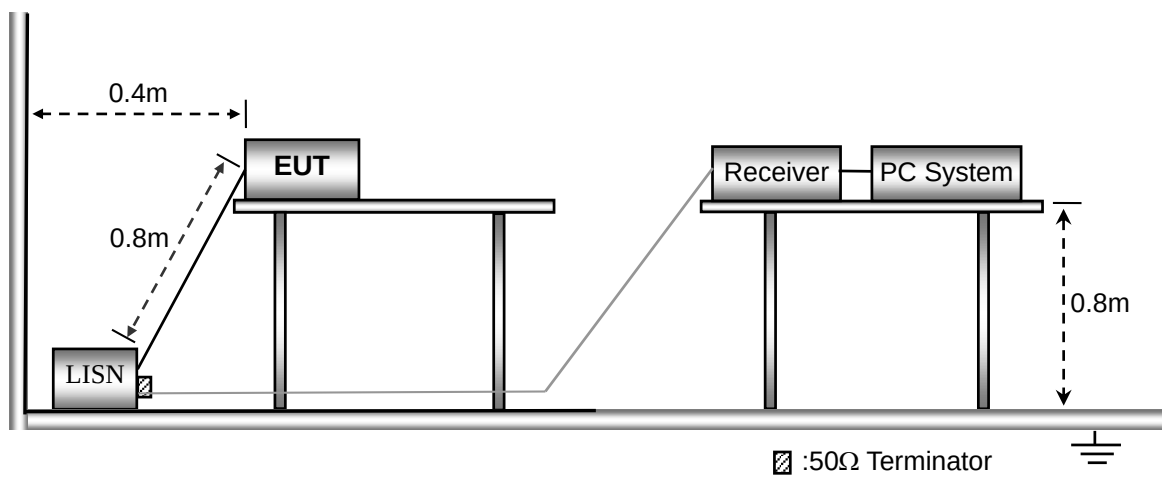


3.3 Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	54 %
ATM Pressure:	1014 mbar

3.4 Summary of Test Results


Please find the results below:

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

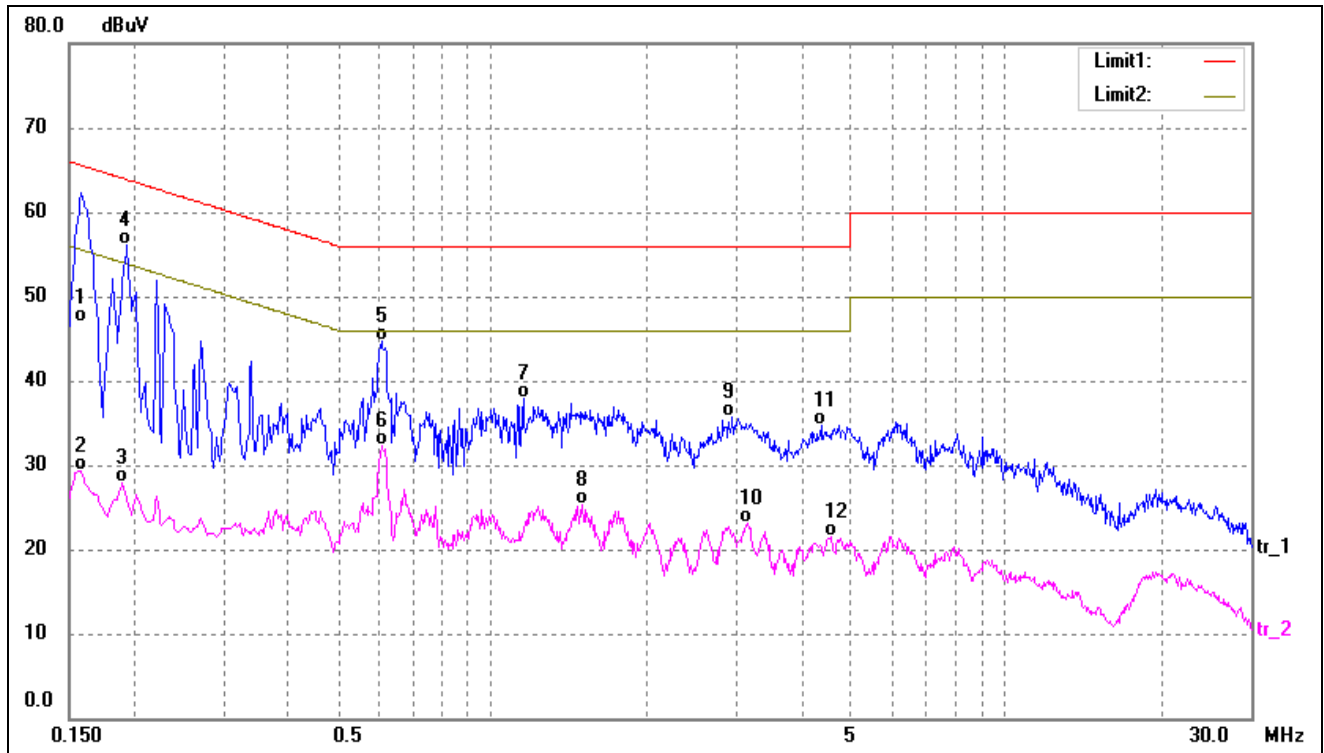

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	36.52	10.40	46.92	65.56	-18.64	QP
2	0.1580	18.89	10.40	29.29	55.56	-26.27	AVG
3	0.1900	17.43	10.39	27.82	54.03	-26.21	AVG
4*	0.1940	45.62	10.39	56.01	63.86	-7.85	QP
5	0.6099	34.46	10.22	44.68	56.00	-11.32	QP
6	0.6099	22.04	10.22	32.26	46.00	-13.74	AVG
7	1.1499	27.79	10.16	37.95	56.00	-18.05	QP
8	1.5020	15.03	10.24	25.27	46.00	-20.73	AVG
9	2.9380	25.27	10.35	35.62	56.00	-20.38	QP
10	3.1419	12.77	10.35	23.12	46.00	-22.88	AVG
11	4.3739	24.41	10.37	34.78	56.00	-21.22	QP
12	4.5780	11.10	10.37	21.47	46.00	-24.53	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

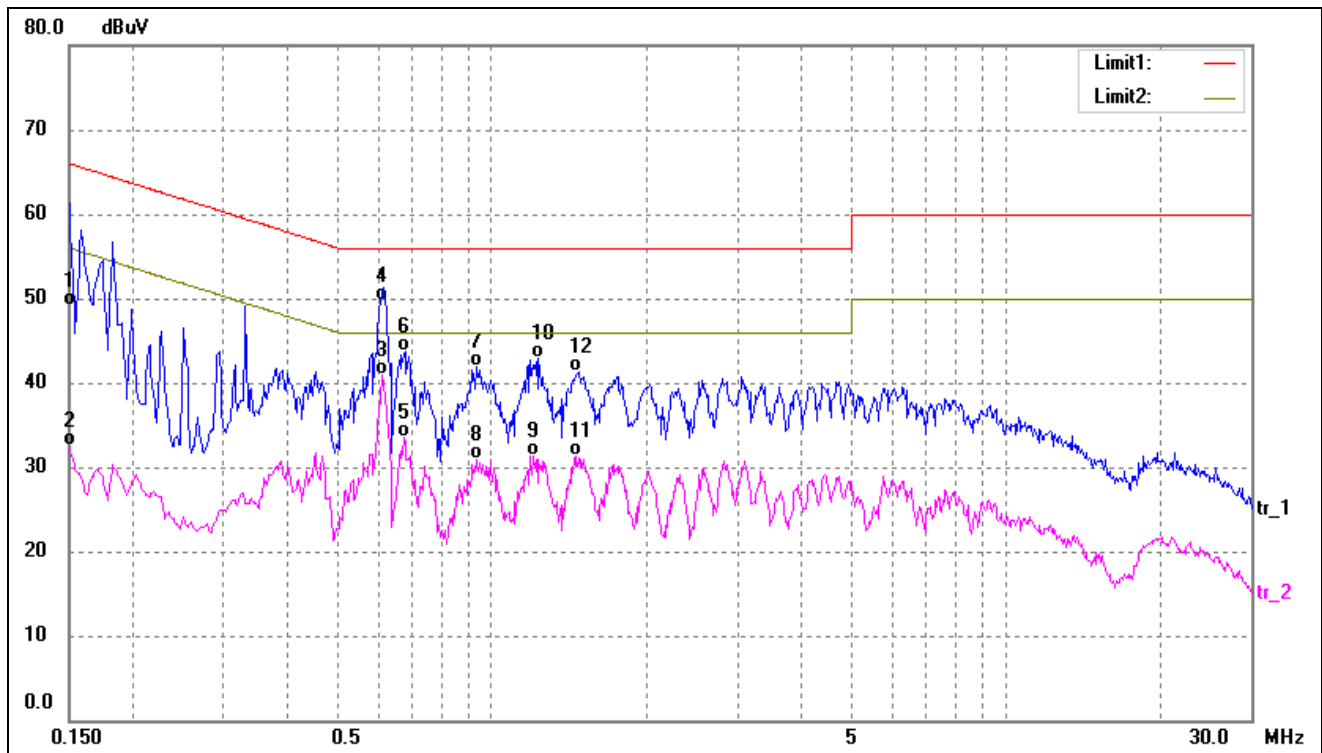

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	38.77	10.40	49.17	65.99	-16.82	QP
2	0.1500	22.12	10.40	32.52	55.99	-23.47	AVG
3*	0.6100	30.61	10.22	40.83	46.00	-5.17	AVG
4	0.6140	39.41	10.22	49.63	56.00	-6.37	QP
5	0.6740	23.31	10.20	33.51	46.00	-12.49	AVG
6	0.6780	33.42	10.20	43.62	56.00	-12.38	QP
7	0.9300	31.77	10.15	41.92	56.00	-14.08	QP
8	0.9300	20.75	10.15	30.90	46.00	-15.10	AVG
9	1.2020	21.18	10.18	31.36	46.00	-14.64	AVG
10	1.2340	32.65	10.18	42.83	56.00	-13.17	QP
11	1.4620	21.16	10.23	31.39	46.00	-14.61	AVG
12	1.4780	31.10	10.23	41.33	56.00	-14.67	QP


4. RADIATED EMISSION

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

4.2 Block Diagram of Test Setup

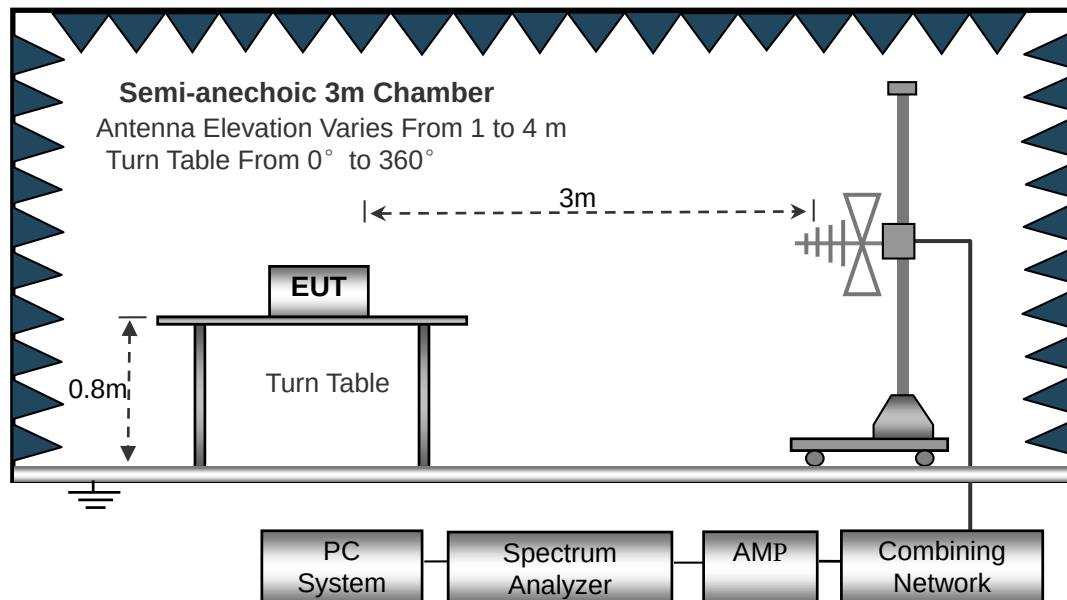

4.3 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Correct} \\ \text{Correct} = \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.5 Environmental Conditions


Temperature:	23.5°C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.6 Summary of Test Results

Please find the results below:


Below 1GHz

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

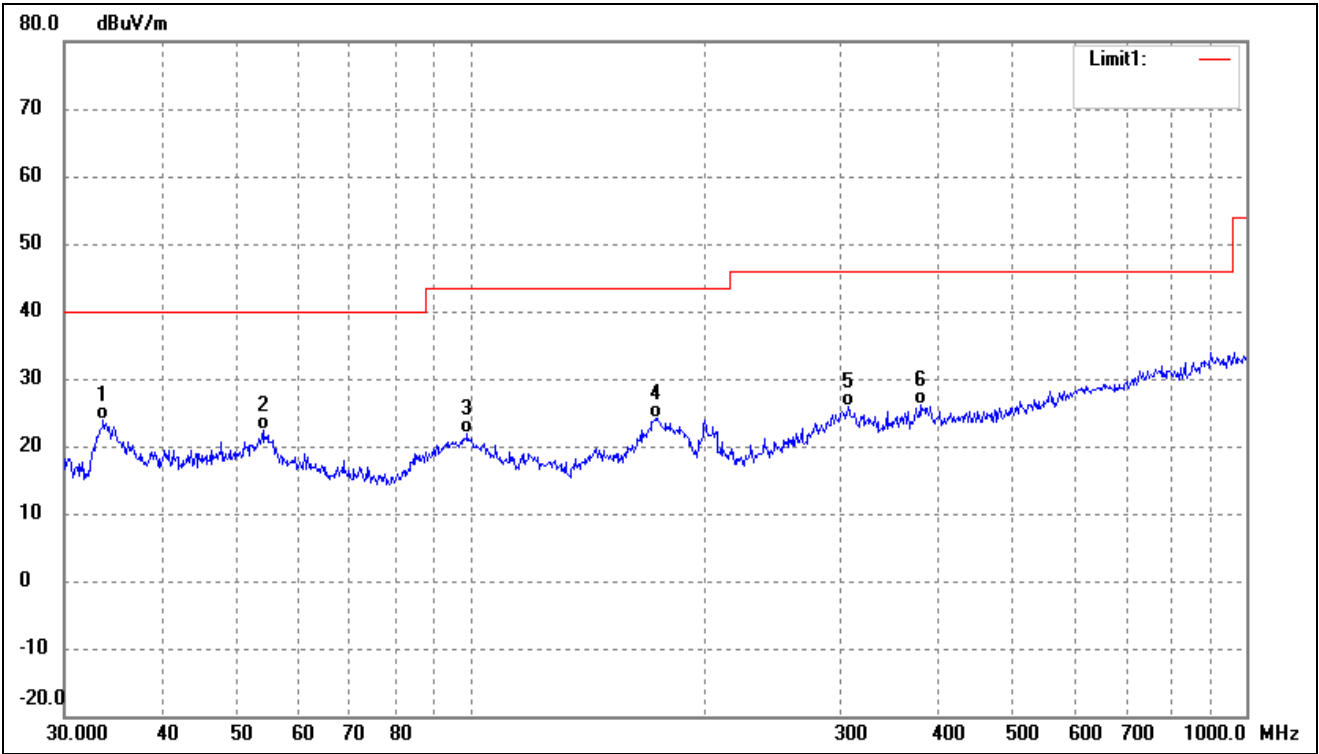


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.6802	33.88	-9.98	23.90	40.00	-16.10	-	-	QP
2	54.0711	29.96	-7.52	22.44	40.00	-17.56	-	-	QP
3	99.1797	30.58	-8.71	21.87	43.50	-21.63	-	-	QP
4	173.8135	34.61	-10.42	24.19	43.50	-19.31	-	-	QP
5	306.7537	30.54	-4.64	25.90	46.00	-20.10	-	-	QP
6	379.9141	29.24	-3.06	26.18	46.00	-19.82	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

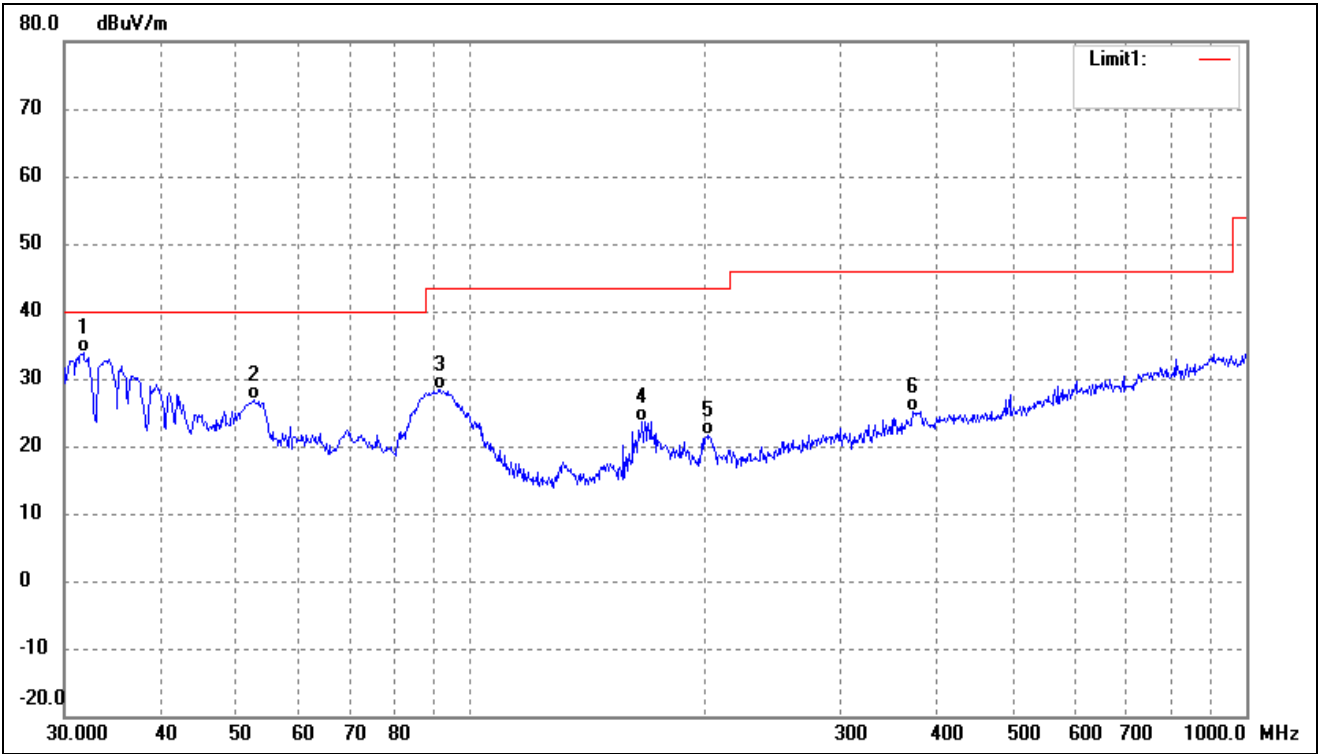


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.7313	44.35	-10.53	33.82	40.00	-6.18	-	-	QP
2	52.7600	34.21	-7.43	26.78	40.00	-13.22	-	-	QP
3	91.4949	38.64	-10.33	28.31	43.50	-15.19	-	-	QP
4	166.6514	34.52	-10.82	23.70	43.50	-19.80	-	-	QP
5	202.1005	29.55	-7.99	21.56	43.50	-21.94	-	-	QP
6	372.0045	28.44	-3.25	25.19	46.00	-20.81	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

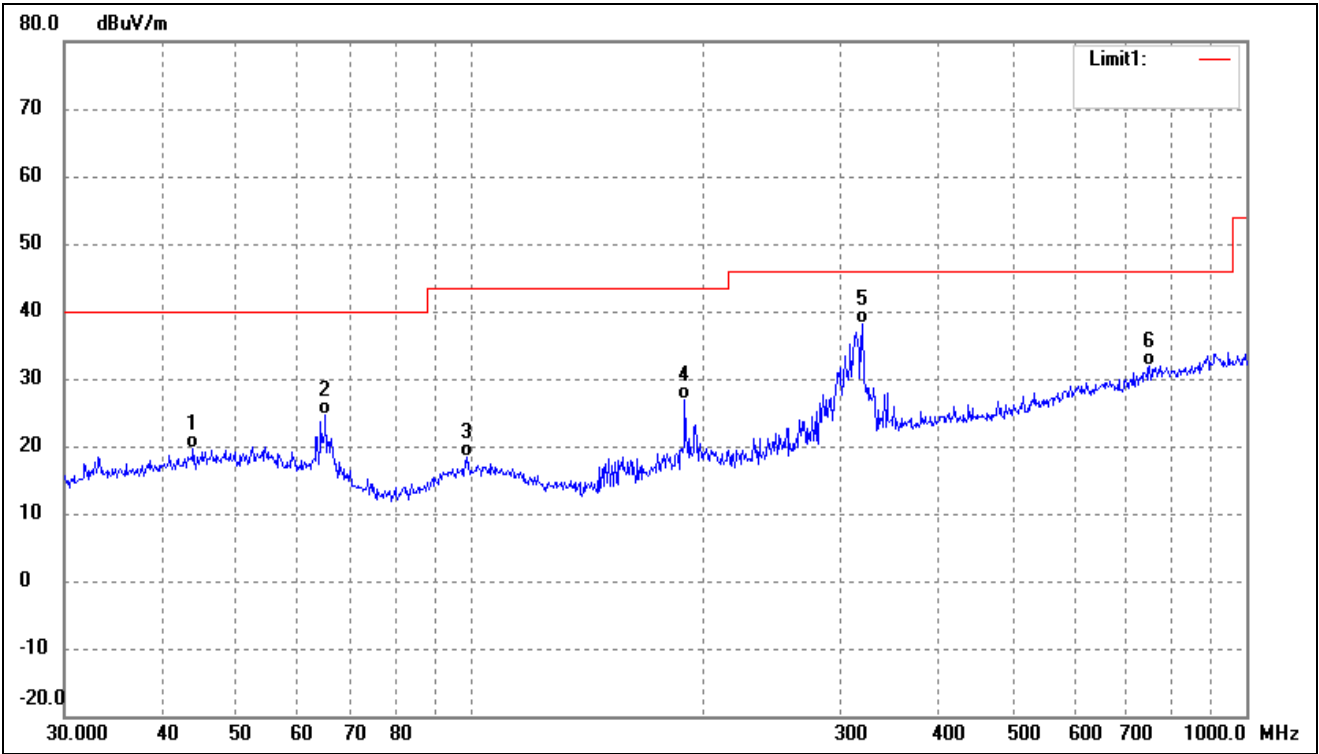


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	43.9658	27.43	-7.86	19.57	40.00	-20.43	-	-	QP
2	65.1145	34.37	-9.86	24.51	40.00	-15.49	-	-	QP
3	99.1797	27.10	-8.71	18.39	43.50	-25.11	-	-	QP
4	189.0743	35.61	-8.76	26.85	43.50	-16.65	-	-	QP
5	319.9370	42.51	-4.28	38.23	46.00	-7.77	-	-	QP
6	750.1083	52.89	-21.11	31.78	46.00	-14.22	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

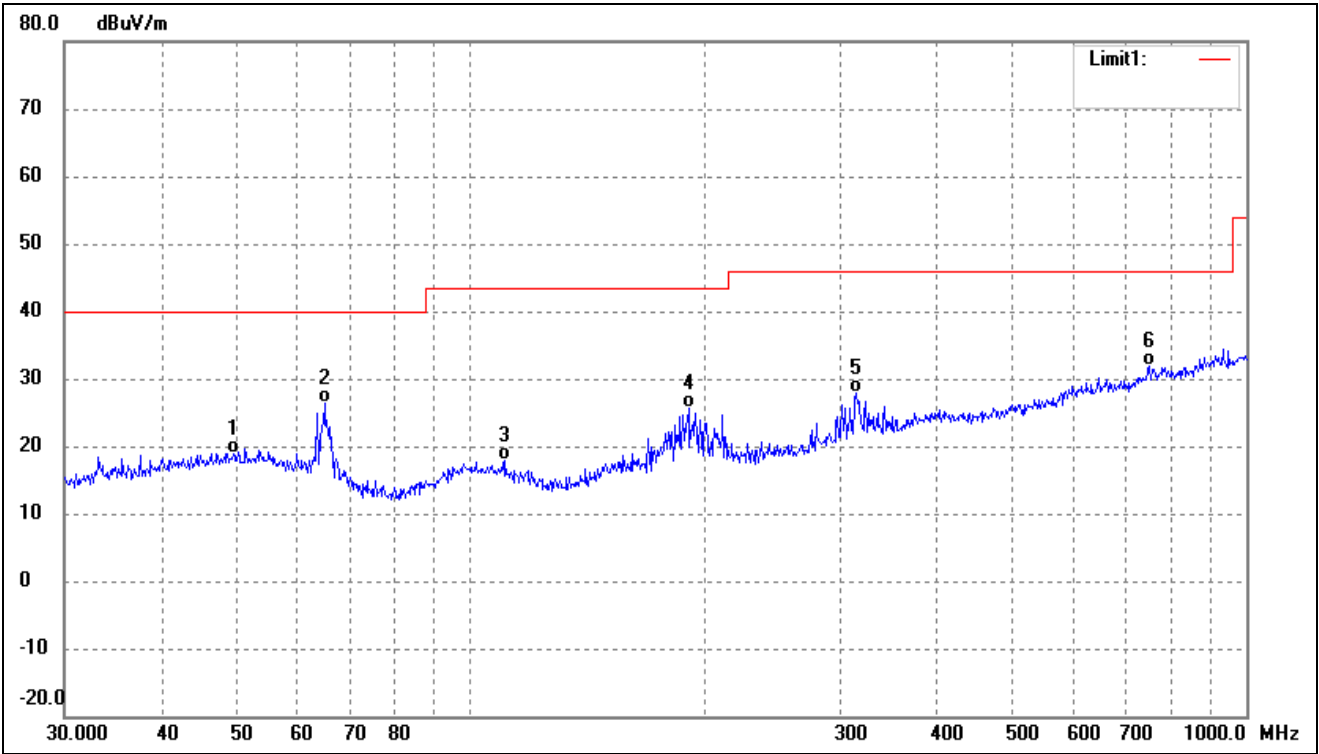


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.5328	26.31	-7.36	18.95	40.00	-21.05	-	-	QP
2	64.8865	36.06	-9.79	26.27	40.00	-13.73	-	-	QP
3	110.9571	26.82	-8.83	17.99	43.50	-25.51	-	-	QP
4	191.0738	34.17	-8.53	25.64	43.50	-17.86	-	-	QP
5	314.3765	32.25	-4.48	27.77	46.00	-18.23	-	-	QP
6	750.1083	52.96	-21.11	31.85	46.00	-14.15	-	-	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

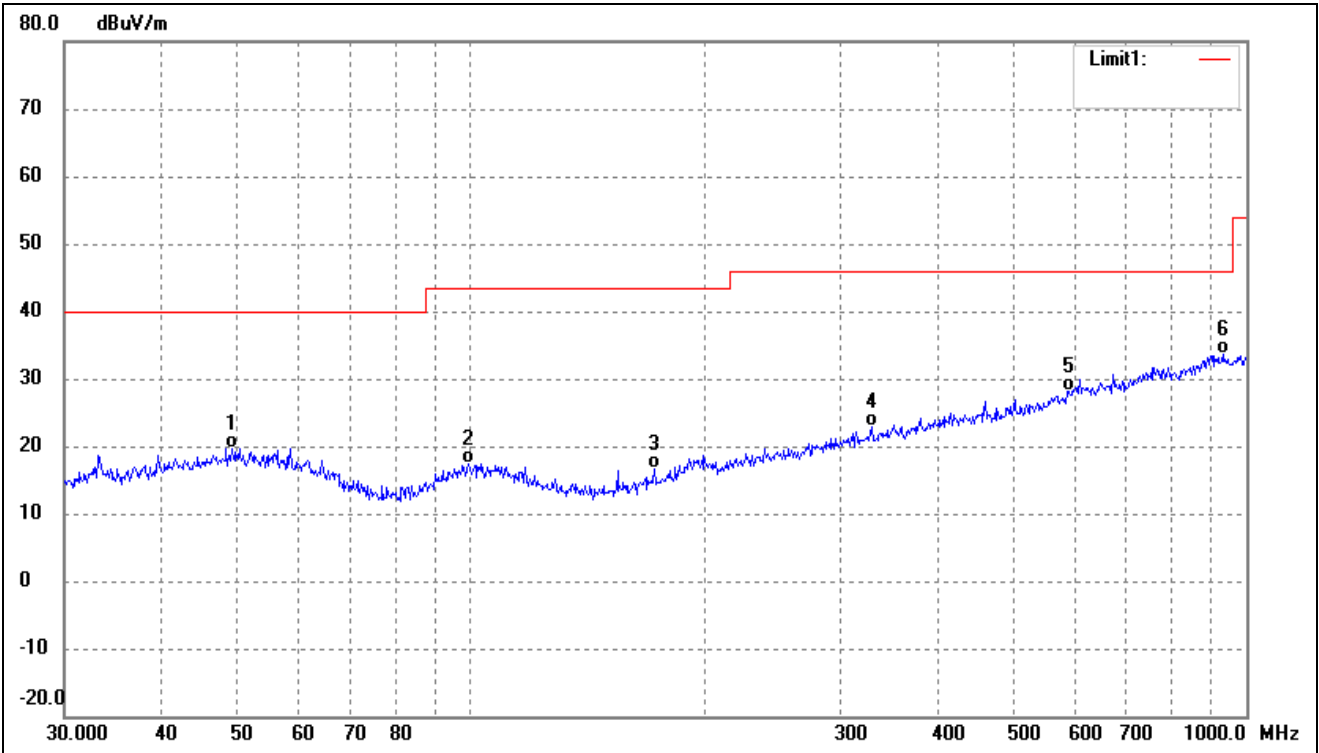


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.3594	27.11	-7.37	19.74	40.00	-20.26	-	-	QP
2	99.5281	26.06	-8.66	17.40	43.50	-26.10	-	-	QP
3	172.5988	27.20	-10.51	16.69	43.50	-26.81	-	-	QP
4	329.0390	26.69	-3.89	22.80	46.00	-23.20	-	-	QP
5	588.9051	27.13	0.88	28.01	46.00	-17.99	-	-	QP
6	932.2715	53.79	-20.28	33.51	46.00	-12.49	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

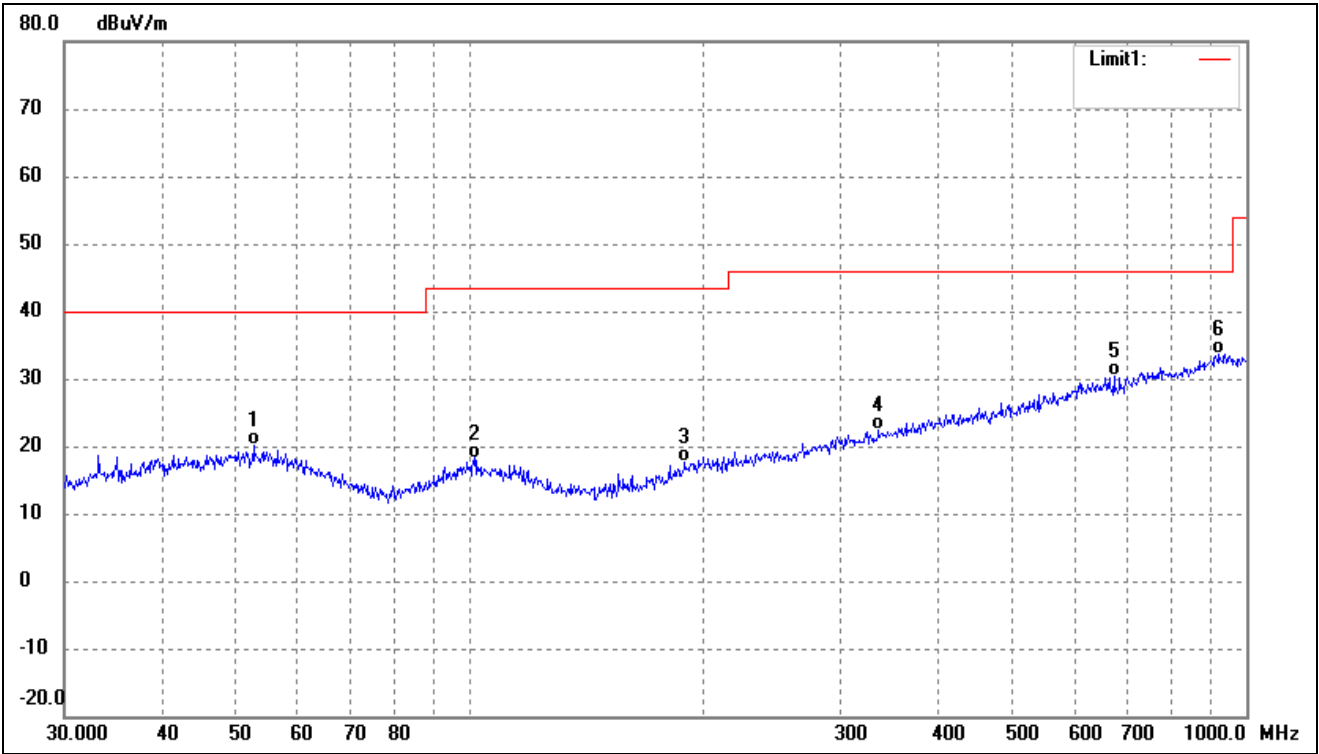


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.5753	27.59	-7.42	20.17	40.00	-19.83	-	-	QP
2	101.2885	26.78	-8.53	18.25	43.50	-25.25	-	-	QP
3	189.0743	26.27	-8.76	17.51	43.50	-25.99	-	-	QP
4	336.0352	25.90	-3.59	22.31	46.00	-23.69	-	-	QP
5	675.2080	51.74	-21.41	30.33	46.00	-15.67	-	-	QP
6	922.5157	53.98	-20.33	33.65	46.00	-12.35	-	-	QP

Test mode:	TM4	Polarity:	Horizontal
------------	-----	-----------	------------

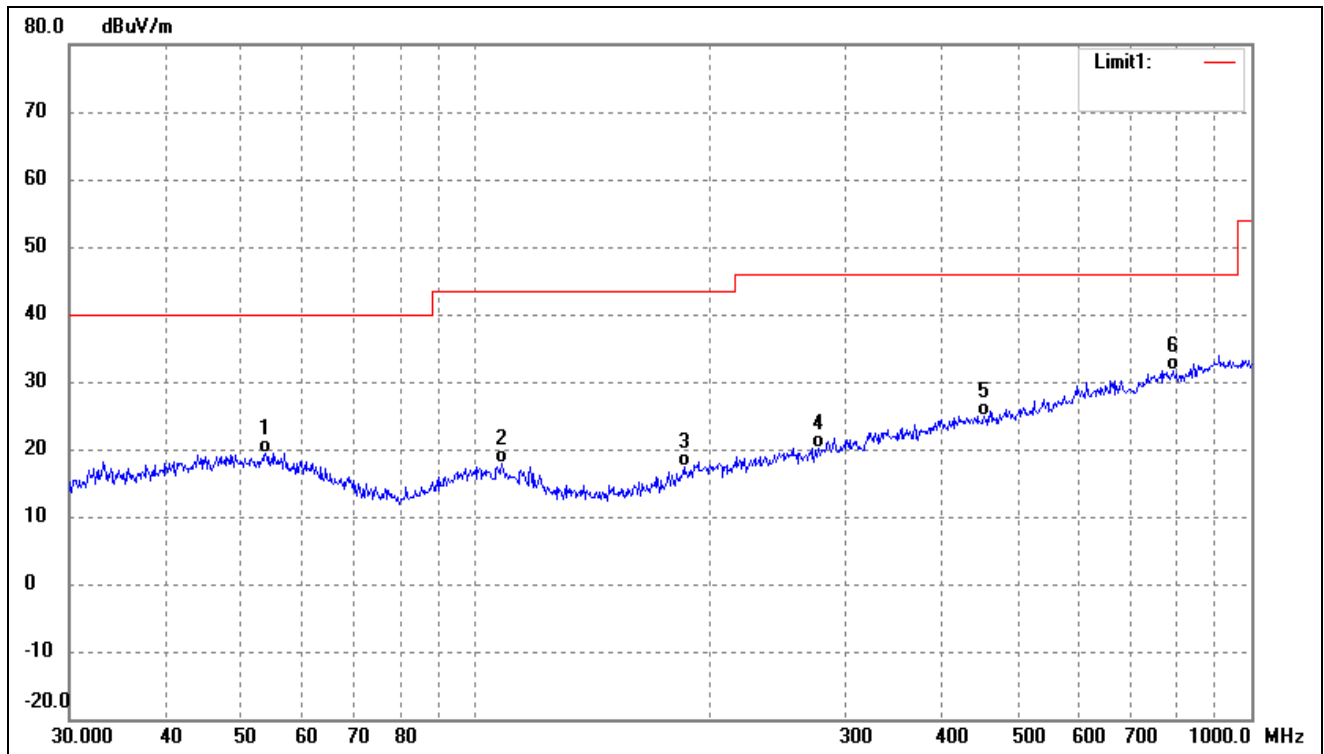


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.6932	26.95	-7.49	19.46	40.00	-20.54	-	-	QP
2	108.2667	26.54	-8.59	17.95	43.50	-25.55	-	-	QP
3	185.7882	26.50	-9.20	17.30	43.50	-26.20	-	-	QP
4	277.0935	25.68	-5.51	20.17	46.00	-25.83	-	-	QP
5	452.7197	26.93	-2.06	24.87	46.00	-21.13	-	-	QP
6	793.3960	52.63	-20.88	31.75	46.00	-14.25	-	-	QP

Test mode:	TM4	Polarity:	Vertical
------------	-----	-----------	----------

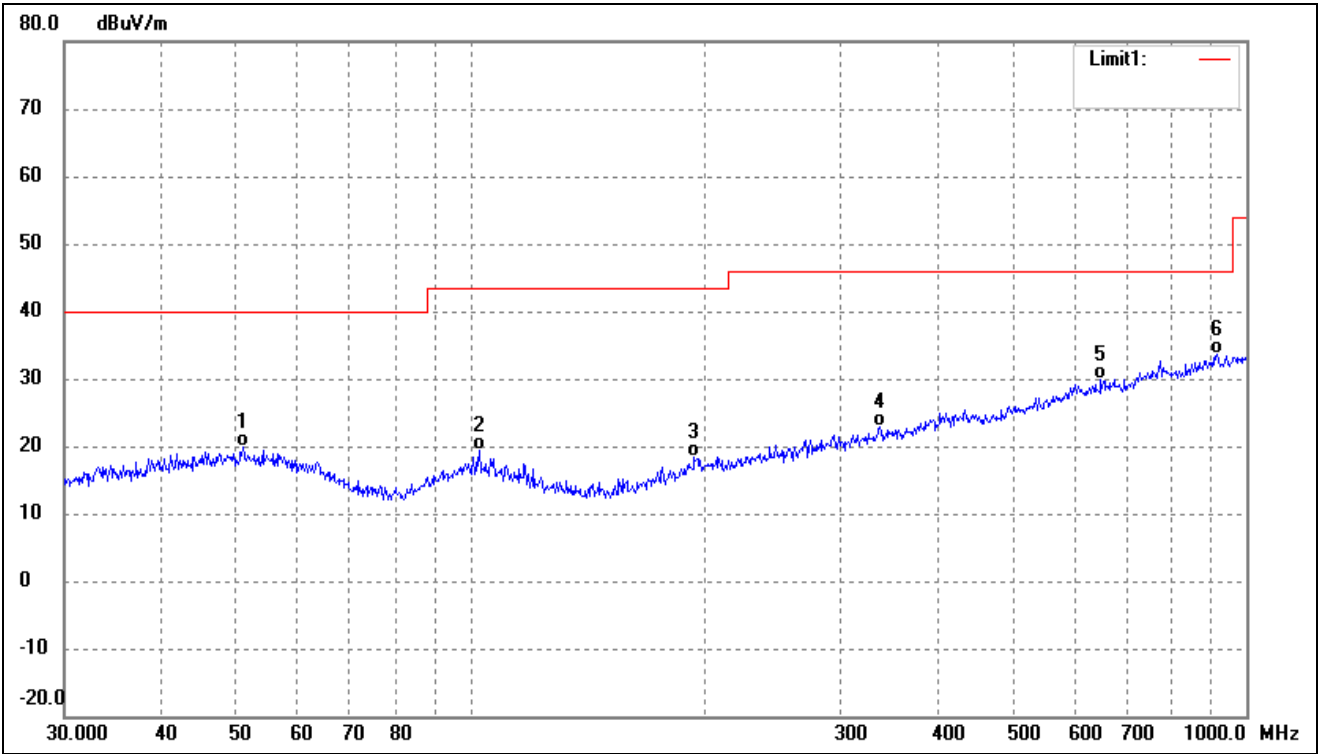


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.9420	27.16	-7.36	19.80	40.00	-20.20	-	-	QP
2	102.7192	27.89	-8.47	19.42	43.50	-24.08	-	-	QP
3	194.4534	26.55	-8.25	18.30	43.50	-25.20	-	-	QP
4	337.2155	26.46	-3.54	22.92	46.00	-23.08	-	-	QP
5	649.6597	27.82	2.00	29.82	46.00	-16.18	-	-	QP
6	916.0687	54.11	-20.36	33.75	46.00	-12.25	-	-	QP

Test mode:	TM5	Polarity:	Horizontal
------------	-----	-----------	------------

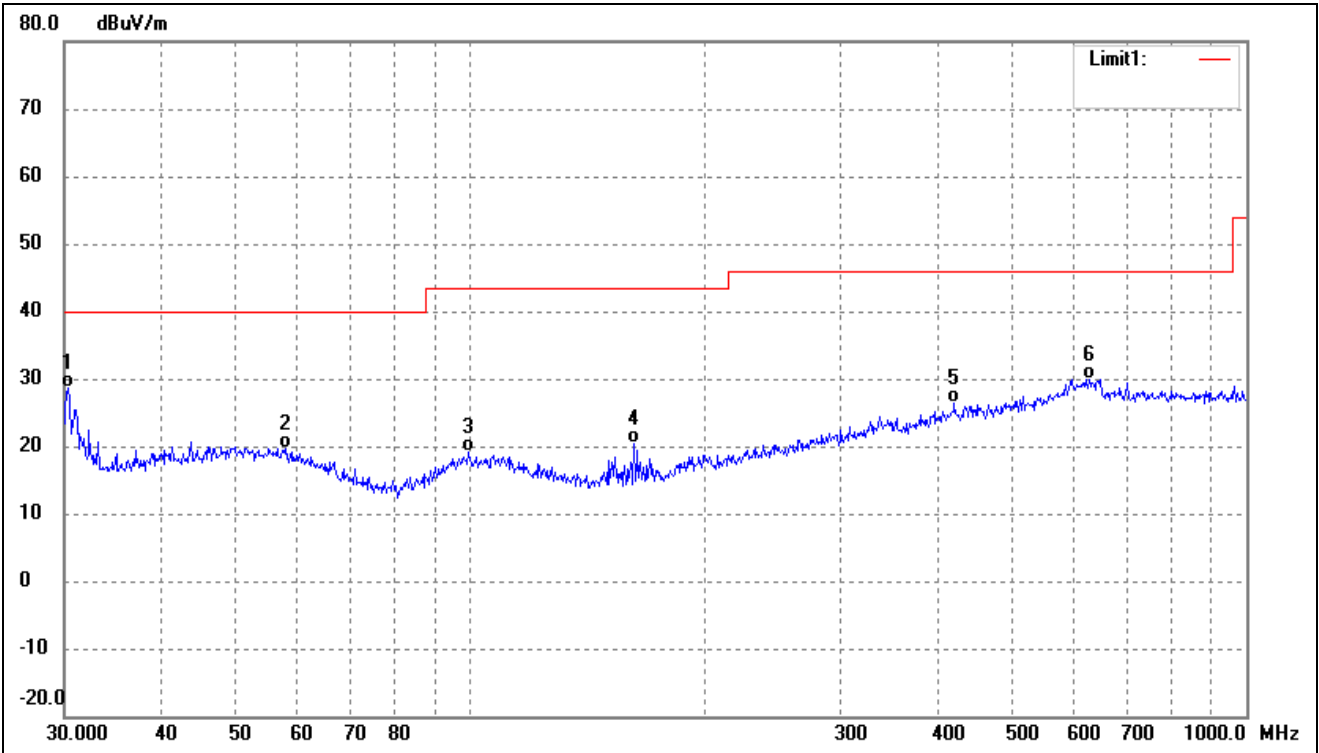


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.3173	39.50	-10.76	28.74	40.00	-11.26	-	-	QP
2	57.7962	27.68	-8.03	19.65	40.00	-20.35	-	-	QP
3	99.5281	27.89	-8.66	19.23	43.50	-24.27	-	-	QP
4	162.6106	31.39	-11.06	20.33	43.50	-23.17	-	-	QP
5	420.5803	28.67	-2.17	26.50	46.00	-19.50	-	-	QP
6	627.2738	28.35	1.50	29.85	46.00	-16.15	-	-	QP

Test mode:	TM5	Polarity:	Vertical
------------	-----	-----------	----------

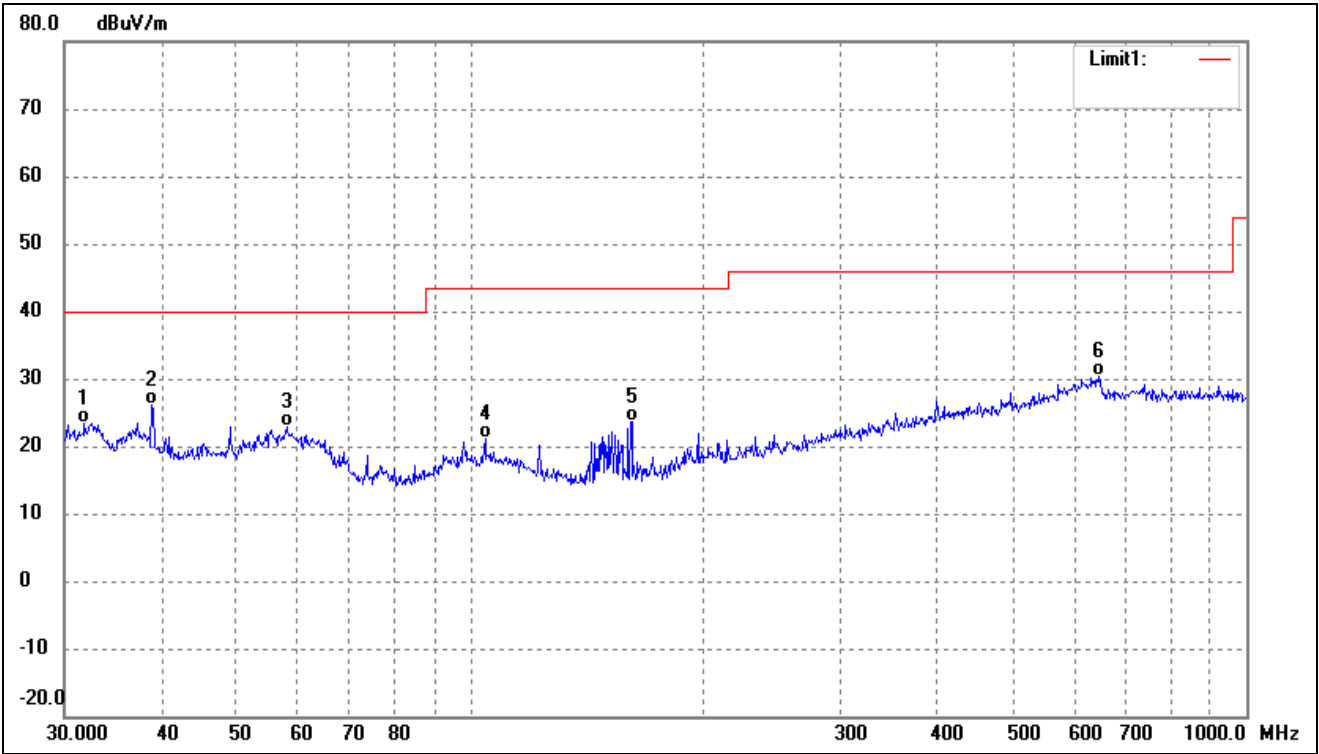


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.8427	33.85	-10.50	23.35	40.00	-16.65	-	-	QP
2	38.8878	34.87	-8.79	26.08	40.00	-13.92	-	-	QP
3	57.9993	30.93	-8.06	22.87	40.00	-17.13	-	-	QP
4	104.5361	29.56	-8.44	21.12	43.50	-22.38	-	-	QP
5	161.4742	34.83	-11.12	23.71	43.50	-19.79	-	-	QP
6	645.1195	28.48	1.94	30.42	46.00	-15.58	-	-	QP

Test mode:	TM6	Polarity:	Horizontal
------------	-----	-----------	------------

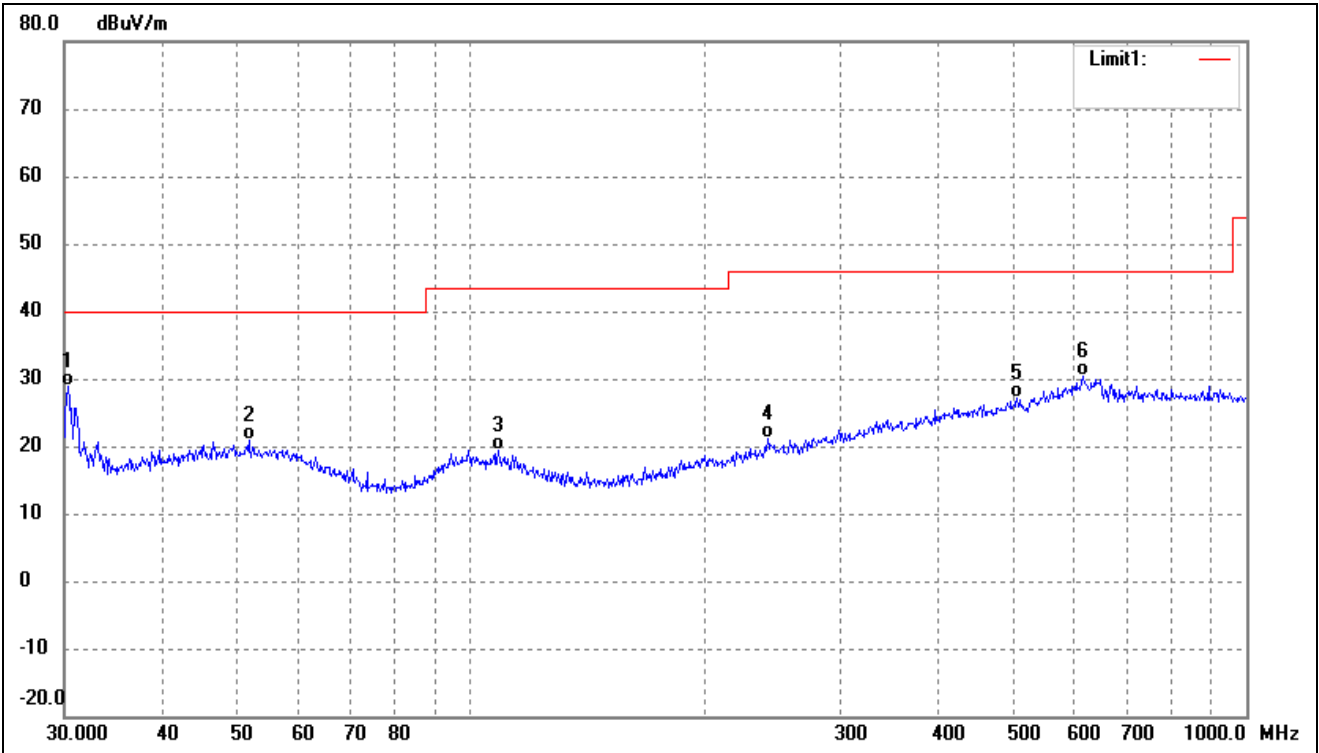

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.3173	39.60	-10.76	28.84	40.00	-11.16	-	-	QP
2	51.8430	28.35	-7.39	20.96	40.00	-19.04	-	-	QP
3	108.6470	28.00	-8.63	19.37	43.50	-24.13	-	-	QP
4	241.6763	27.82	-6.60	21.22	46.00	-24.78	-	-	QP
5	506.4791	28.04	-1.02	27.02	46.00	-18.98	-	-	QP
6	616.3718	28.89	1.48	30.37	46.00	-15.63	-	-	QP


Test mode:	TM6	Polarity:	Vertical
------------	-----	-----------	----------

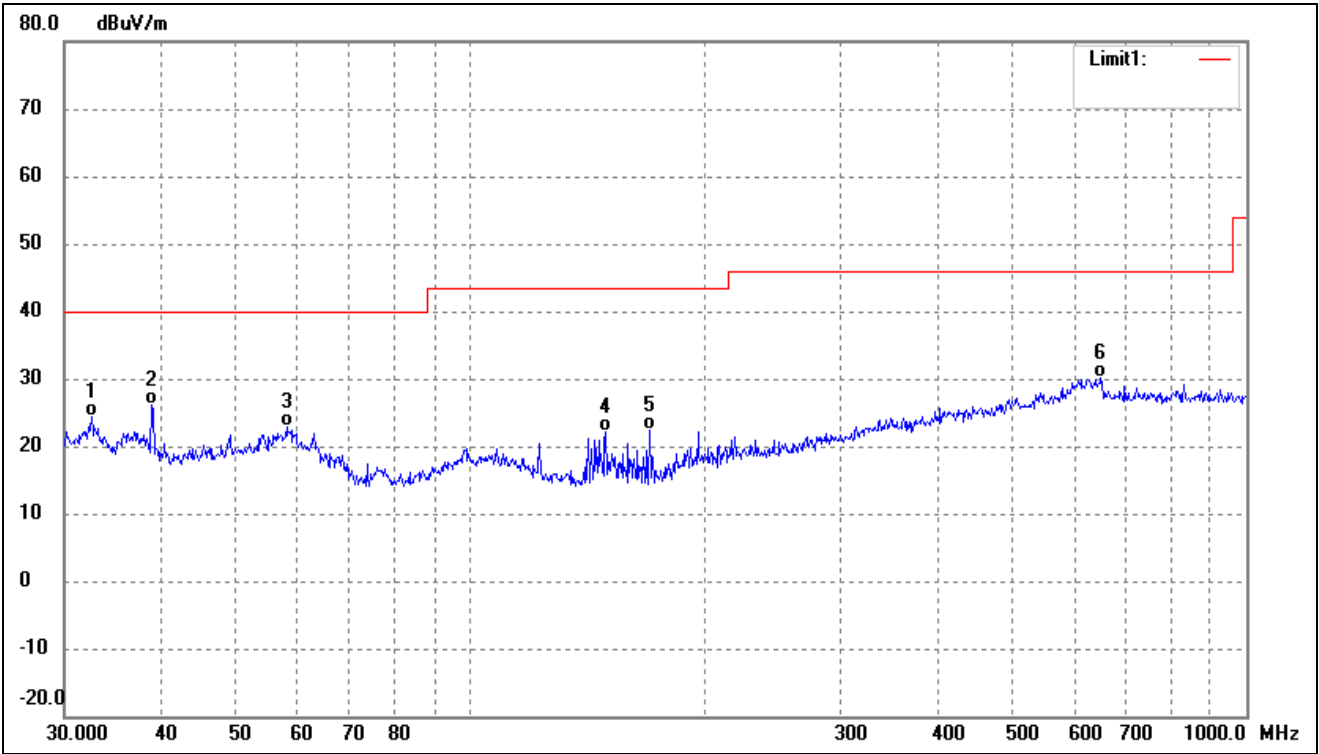

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.5198	34.69	-10.31	24.38	40.00	-15.62	-	-	QP
2	38.8878	35.02	-8.79	26.23	40.00	-13.77	-	-	QP
3	57.9993	30.98	-8.06	22.92	40.00	-17.08	-	-	QP
4	149.4857	33.75	-11.74	22.01	43.50	-21.49	-	-	QP
5	170.1948	33.05	-10.64	22.41	43.50	-21.09	-	-	QP
6	649.6597	28.05	2.00	30.05	46.00	-15.95	-	-	QP


Above 1GHz

Test mode:	TM1 (worst case)	Polarity:	Horizontal
------------	------------------	-----------	------------

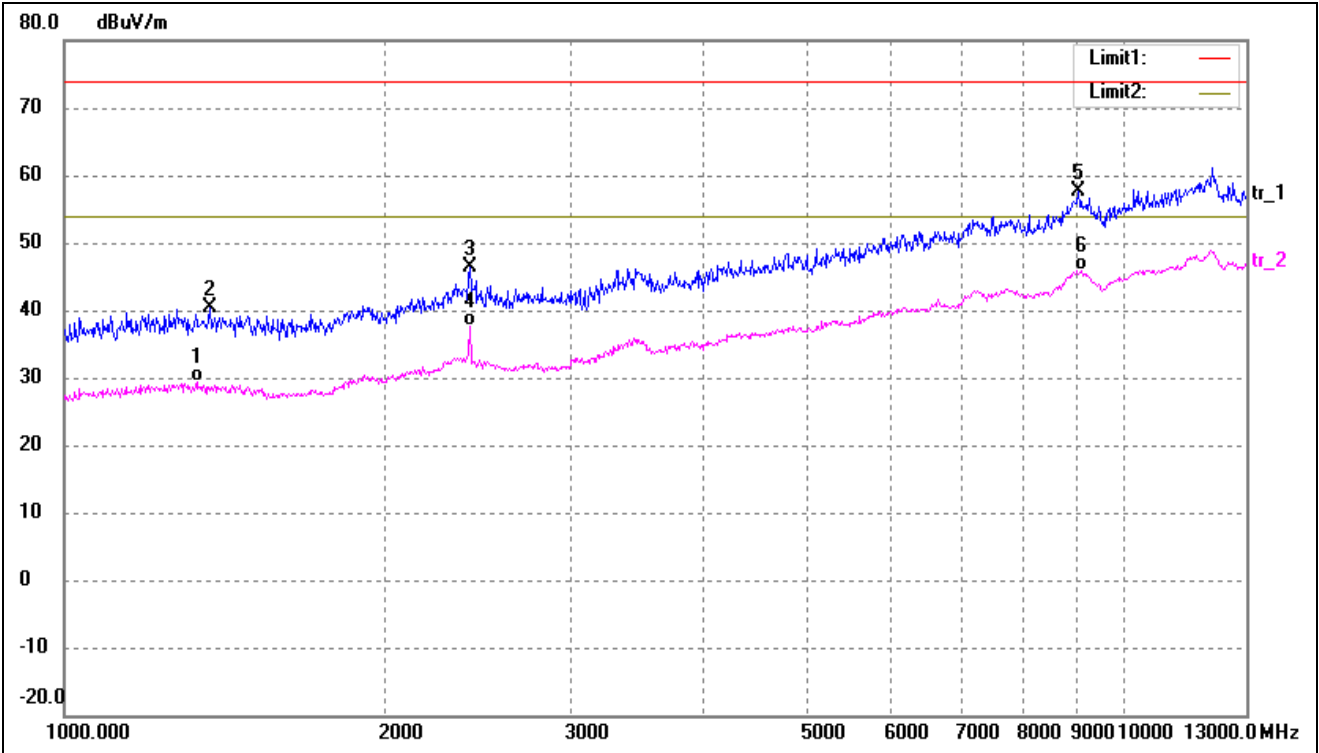

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	1332.790	41.63	-12.32	29.31	54.00	-24.69	-	-	AVG
2	1370.929	52.43	-12.15	40.28	74.00	-33.72	-	-	peak
3	2410.364	54.85	-8.41	46.44	74.00	-27.56	-	-	peak
4	2410.364	46.08	-8.41	37.67	54.00	-16.33	-	-	AVG
5	9031.573	51.21	6.36	57.57	74.00	-16.43	-	-	peak
6	9101.338	39.84	6.08	45.92	54.00	-8.08	-	-	AVG

Test mode:	TM1 (worst case)	Polarity:	Vertical
------------	------------------	-----------	----------

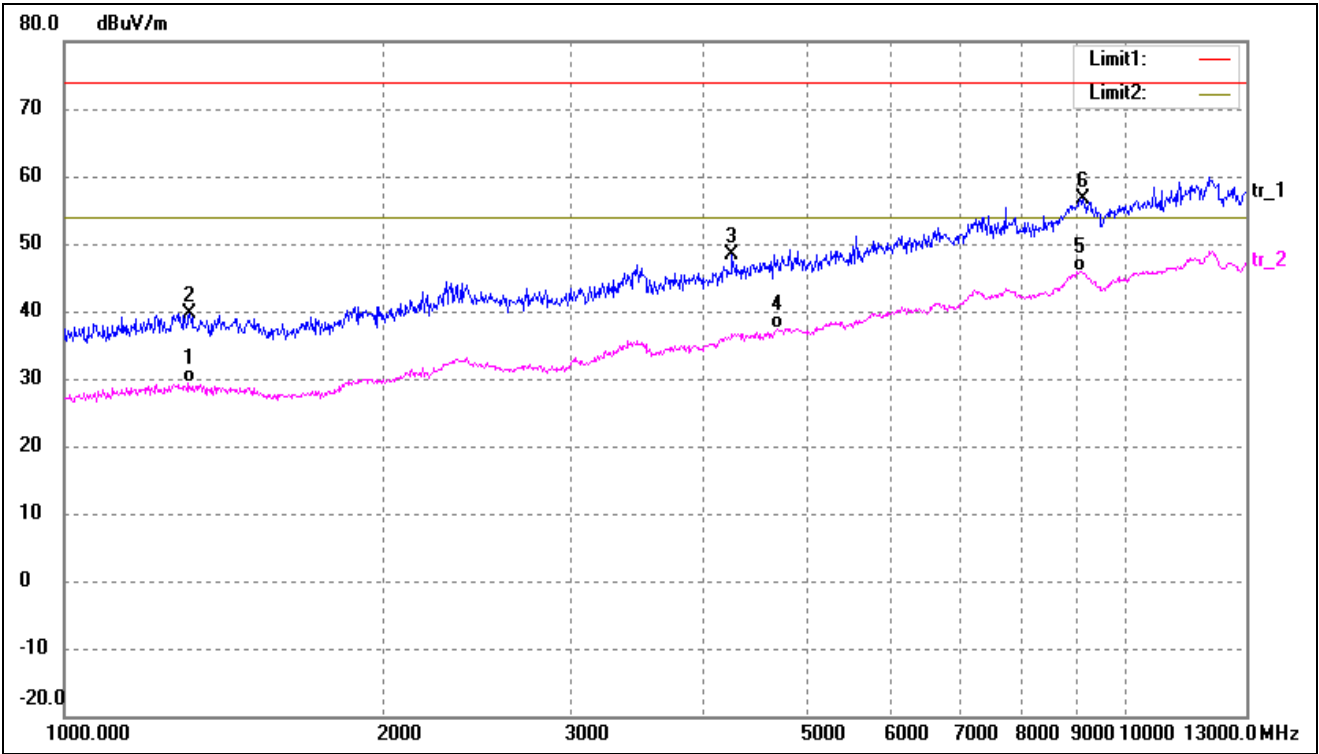

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	1309.074	41.75	-12.42	29.33	54.00	-24.67	-	-	AVG
2	1312.436	52.08	-12.40	39.68	74.00	-34.32	-	-	peak
3	4259.690	52.97	-4.53	48.44	74.00	-25.56	-	-	peak
4	4695.781	40.32	-3.06	37.26	54.00	-16.74	-	-	AVG
5	9054.768	39.74	6.25	45.99	54.00	-8.01	-	-	AVG
6	9124.712	50.59	6.00	56.59	74.00	-17.41	-	-	peak

Remark: '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****