



Test report No:
2290469R-RF-US-P06V03

FCC TEST REPORT

Product Name	AFC-SW01
Trademark	 HISINY 星奇世界
Model and /or type reference	md010501
FCC ID	2BAIV-MD010501
Applicant's name / address	Cockatoo & Friends Co., Ltd. Dongxiaojing Industrial Park, No. 205 Zone B, Unit 1277, Dongba Township, Chaoyang District, Beijing, China.
Test method requested, standard	CFR 47, FCC Part 15 C § 15.249 ANSI C63.10:2013
Verdict Summary	IN COMPLIANCE
Tested by (name / position & signature)	Jun Xu/ Project Manager 
Approved by (name / position & signature)	Jack Zhang/ Manager 
Date of issue	2023-10-12
Report Version	V1.1
Report template No	Template_FCC 15.249-RF-V1.0

INDEX

	page
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations.....	5
Document History.....	6
Remarks and Comments	6
Used Equipment.....	7
Uncertainty	9
1 General Information	10
1.1 General Description of the Item(s).....	10
1.2 Antenna Information	11
1.3 Channel List.....	12
2 Description of Test Setup.....	13
2.1 Operating mode(s) used for tests	13
2.2 Accessories Information	13
2.3 Test Configuration / Block diagram used for tests.....	14
2.4 Testing process	15
3 Verdict summary section.....	16
3.1 Standards	16
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	16
3.3 Overview of results	17
3.4 Power setting in test	18
3.5 Test Matrix	18
3.6 Test Facility.....	19
4 Test Results	20
4.1 AC Power Line Conducted Emission.....	20
4.1.1 Limit	20
4.1.2 Test Setup	20
4.1.3 Test Procedure	20
4.2 Radiated Emission Test.....	21
4.2.1 Limit	21
4.2.2 Test Setup	23
4.2.3 Test Procedure	24
4.3 20 dB Bandwidth.....	25

4.3.1	Limit	25
4.3.2	Test Setup	25
4.3.3	Test Procedure	25
4.4	Antenna Requirement.....	26
4.4.1	Limit:.....	26
4.4.2	Antenna Connector Construction:	26
5	Test setup photo and EUT Photo	27
	Appendix A: The fundamental field strength and the harmonics	28
	Appendix B: Radiated Emission.....	29
	Appendix C: 20dB Bandwidth	41

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date (receive sample)	Sept. 15, 2022
Date (start test)	Sept. 19, 2022
Date (finish test)	Feb. 15, 2023

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2290469R-RF-US-P06V03	V1.0	Initial issue of report.	2023-07-25
2290469R-RF-US-P06V03	V1.1	Appendix B adds test data. (The test report No.: 2290469R-RF-US-P06V03 V1.1 is to replace the test report No.: 2290469R-RF-US-P06V03 V1.0, and test report 2290469R-RF-US-P06V03 V1.0 is obsoleted.)	2023-10-12

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with CFR 47, FCC Part 15 Subpart C, ANSI C63.10:2013.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Information;
 - Chapter 1.3 Channel List.

USED EQUIPMENT

Conducted Test / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Wireless Connectivity Tester	R&S	CMW 270	102593	2022.05.21	2023.05.20
Coaxial Cable	N/A	N/A	2187	2022.06.09	2023.06.08
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2022.08.24	2023.08.23
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2022.07.07	2023.07.06
Test system					
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2022.03.16	2023.03.15
MAX Signal Analyzer	Keysight	N9020B	MY59050482	2022.09.17	2023.09.16
Switch Box	Keysight	X8749A	N/A	N/A	N/A
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2022.08.24	2023.08.23
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	2022.07.14	2023.07.13
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	2022.07.14	2023.07.13
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2022.09.28	2023.09.27
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2022.09.28	2023.09.27

Radiated Emission(9kHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2022.07.10	2023.07.09
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2022.08.28	2023.08.27
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2022.03.30	2023.03.29
Loop Antenna	R&S	HFH2-Z2	833799/003	2022.04.15	2023.04.14
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2022.07.07	2023.07.06

Radiated Emission (1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
MXA Signal Analyzer	Keysight	N9020B	MY60112218	2022.12.08	2023.12.07
Preamplifier	Chengyi	EMC184045SE	980263	2022.07.19	2023.07.18
Preamplifier	Chengyi	EMC184045SE	980263	2023.07.09	2024.07.08
Preamplifier	SKET	LNPA_0118G-45	SK2021041201	2022.04.15	2023.04.14
Preamplifier	SKET	LNPA_0118G-45	SK2021041201	2023.04.14	2024.04.13
DRG Horn	ETS-Lindgren	3117	00123988	2022.08.29	2023.08.28
DRG Horn	ETS-Lindgren	3117	00123988	2023.08.27	2024.08.26
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9170	01249	2022.09.22	2023.09.21
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9170	01249	2023.09.18	2024.09.17
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2022.03.30	2023.03.29
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2023.03.26	2024.03.25
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2022.03.21	2023.03.20
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2023.03.16	2024.03.15
Notch Filter	Micro-mve	MFN-2400.2485.S1	AN0003N	2022.07.18	2023.07.17
Notch Filter	Micro-mve	MFN-2400.2485.S1	AN0003N	2023.07.12	2024.07.11
High-Pass Filter	Wainwright	WHKX7.0/18G-8SS	27	2022.06.07	2023.06.06
High-Pass Filter	Wainwright	WHKX7.0/18G-8SS	27	2023.06.05	2024.06.04

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item	Uncertainty
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB Horizontal: 18GHz~40GHz: 5.50 dB Vertical: 18GHz~40GHz: 5.20 dB
The fundamental field strength and the harmonics	± 1.27 dB
Occupied Bandwidth	± 1 kHz

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	AFC-SW01
Model No.	md010501
Trademark	
FCC ID	2BAIV-MD010501
Hardware Version	5.0
Software Version	1.59
Manufacturer	Goertek Robotics Co,Ltd
Manufacturer Address	A218, Building A, No. 35, Lane 799, Jiasongzhong Road, Qingpu District, Shanghai
Factory	Goertek Robotics Co,Ltd
address.....	A218, Building A, No. 35, Lane 799, Jiasongzhong Road, Qingpu District, Shanghai

Wireless specification.....	SRD
Operating frequency range(s)	5732~5843MHz
Type of Modulation.....	GFSK
Number of channel.....	4

Rated power supply	Voltage and Frequency	
	<input type="checkbox"/>	AC: 220 – 240 V, 50/60 Hz
	<input type="checkbox"/>	AC: 110 – 130 Vac, 50/60 Hz
	<input checked="" type="checkbox"/>	DC: 3.7V
	<input type="checkbox"/>	Adapter: Input: Output:.....
Mounting position	<input type="checkbox"/>	Table top equipment
	<input type="checkbox"/>	Wall/Ceiling mounted equipment
	<input type="checkbox"/>	Floor standing equipment
	<input type="checkbox"/>	Hand-held equipment/ Portable equipment
	<input checked="" type="checkbox"/>	Other: RF Module

1.2 Antenna Information

Antenna model / type number	N/A		
Antenna serial number	N/A		
Antenna Delivery	<input checked="" type="checkbox"/>	1TX + 1RX	
	<input type="checkbox"/>	2TX + 2RX	
	<input type="checkbox"/>	Others:.....	
Antenna technology	<input checked="" type="checkbox"/>	SISO	
	<input type="checkbox"/>	MIMO	<input type="checkbox"/> CDD
			<input type="checkbox"/> Beam-forming
Antenna Type	<input type="checkbox"/>	External	<input type="checkbox"/> Dipole
			<input type="checkbox"/> Sectorized
	<input checked="" type="checkbox"/>	Internal	<input type="checkbox"/> PIFA
			<input checked="" type="checkbox"/> linear antenna
			<input type="checkbox"/> Dipole
			<input type="checkbox"/> Others.....
			Antenna Gain

1.3 Channel List

SRD Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
03	5732 MHz	04	5769 MHz	05	5806 MHz	06	5843 MHz

Note: The general description of the Item(s), antenna information and channel list in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode For SRD	Mode1: Transmit by SRD
-------------------	------------------------

Note 1: Regards to the frequency band operation: the lowest, middle and highest frequency channel were selected to perform the test, then shown on this report.

Note 2: For portable device, radiated tests was verified over X, Y, Z axis, and shown the worst case on this report.


2.2 Accessories Information

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
(1) Notebook	Think pad x220	Lenovo	Adapter
(2) USB Control Cable	N/A	N/A	N/A
(3) USB Control Cable	N/A	N/A	N/A
software	Type / Version	Manufacturer	Supplied by
flash_download_tool	V3.9.2	N/A	N/A


Accessories Information	Cable		
	Length used during test [m]	Attached during test	Shielded
(2)USB Control Cable	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
(3)USB Control Cable	8	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- Conducted test

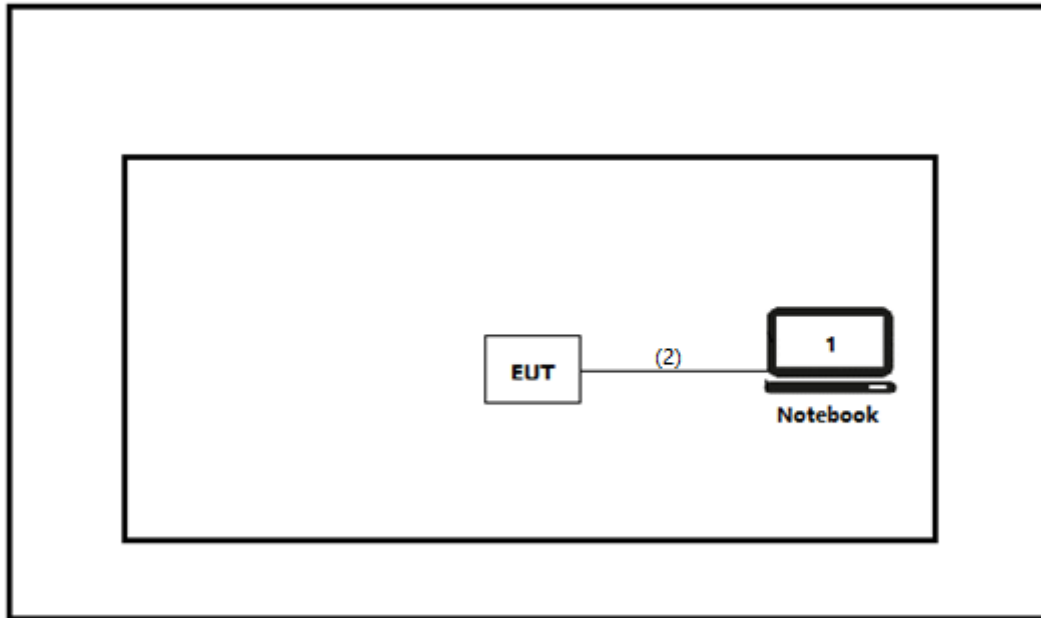

Test setup Diagram- Radiated Emission

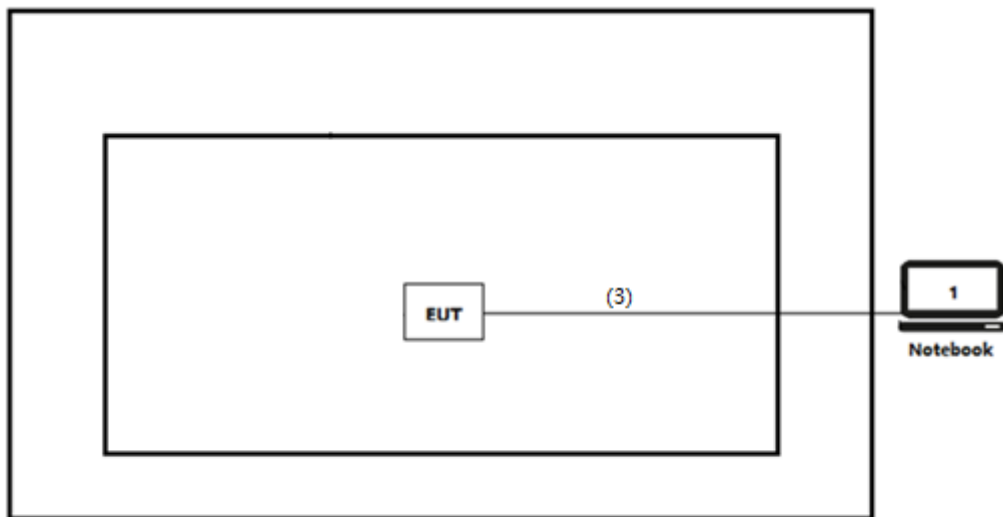

2.4 Testing process

1	Setup the EUT as shown in Section 2.4.
2	Run the software "flash_download_tool" on the notebook computer.
3	Open the serial port and enter the corresponding commands to configure the test mode, test channel, test power and data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.249	2023	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	N/A	The equipment is powered by DC
The fundamental field strength and the harmonics	FCC 15.249(a)	PASS	Please refer to Appendix A
Radiated Emission	FCC 15.249(d), FCC 15.209,15.205	PASS	Please refer to Appendix B
20dB Bandwidth	FCC 15.215(c)	PASS	Please refer to Appendix C
Antenna Requirement	FCC 15.203	PASS	---

3.4 Power setting in test

Mode	Channel	Frequency (MHz)	Power setting
Mode1	03	5735	Default
	05	5805	Default
	08	5839	Default

3.5 Test Matrix

Test item	md010501	
	1(#1)	2(#2)
The fundamental field strength and the harmonics	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Radiated Emission Test	<input type="checkbox"/>	<input checked="" type="checkbox"/>
20 dB Bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Antenna Requirement	<input type="checkbox"/>	<input checked="" type="checkbox"/>

3.6 Test Facility

USA : FCC Designation Number: CN1199

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: N/A

4.1.1 Limit

Standard FCC Part 15 Subpart C Paragraph 15.207

Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾	Limit: AV [dB(μV) ¹⁾
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

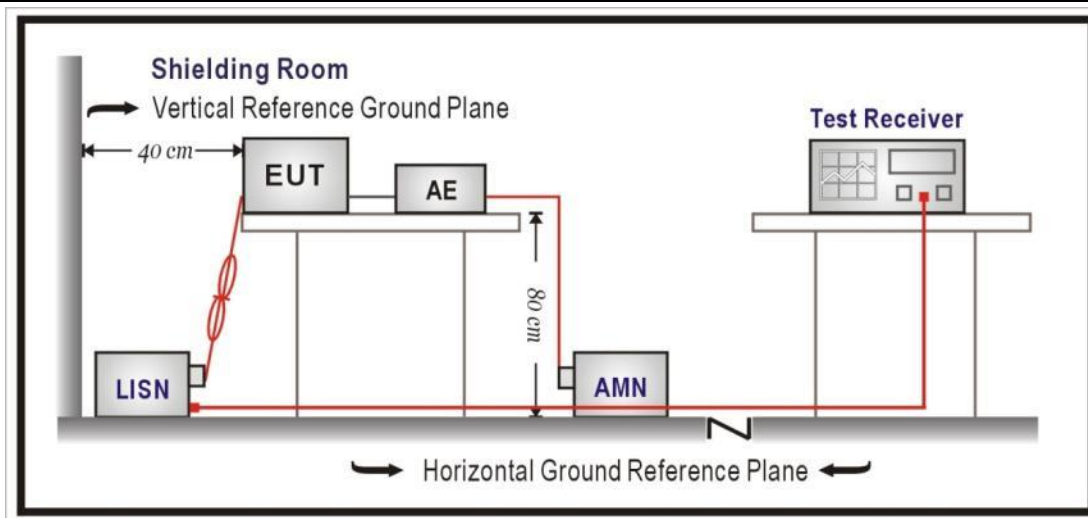

4.1.3 Test Procedure

	References Rule	Chapter	Item
<input checked="" type="checkbox"/>	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.2 Radiated Emission Test	VERDICT: PASS
-----------------------------------	----------------------

4.2.1 Limit

Fundamental and Harmonics Radiated Emissions 15.249(a) Limit

Fundamental Frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902 – 928 MHz	50	500
2400 -2483.5 MHz	50	500
5725 -5875 MHz	50	500
24.0 – 24.25 GHz	250	2500

Note: 1. RF Voltage (dBuV)=20 log Voltage(uV)
 2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 3. The emission limit in this paragraph os based on measurement instrumentation employing an average detector.Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.


Spurious Radiated Emissions 15.249(d) Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.


Restricted Bands of operation for FCC			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975–12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675–12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			
Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 -88	100	40	3 _(Note 2)
88-216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)
<p>Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).</p> <p>Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.</p> <p>Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).</p>			

4.2.2 Test Setup


Below 30MHz Test Setup:

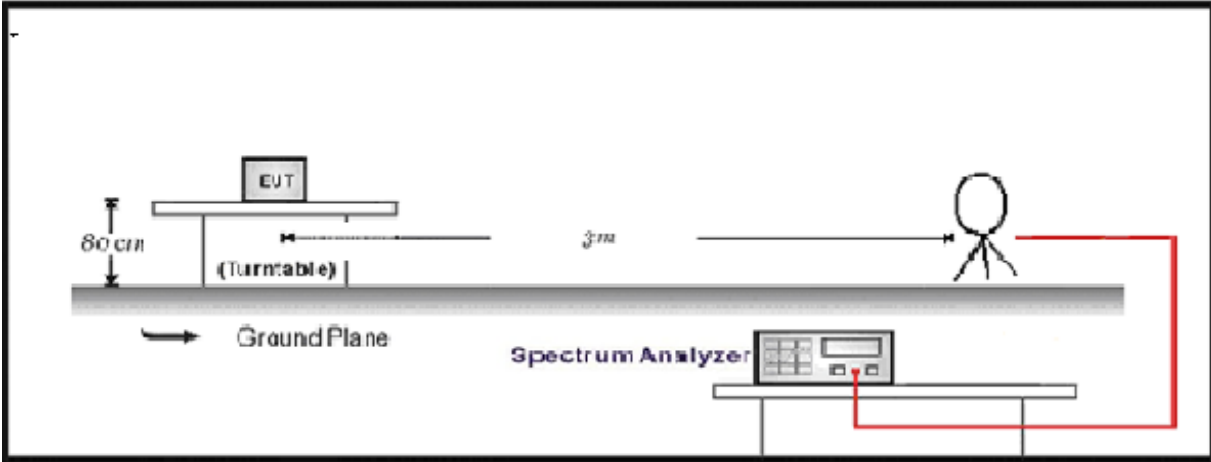

30MHz-1GHz Test Setup:

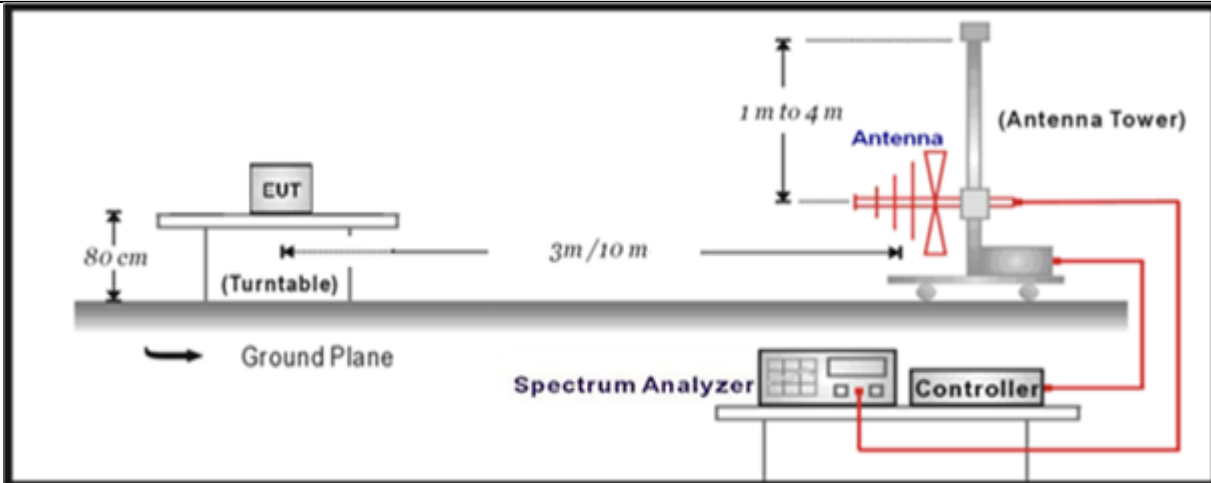

Above 1GHz Test Setup:

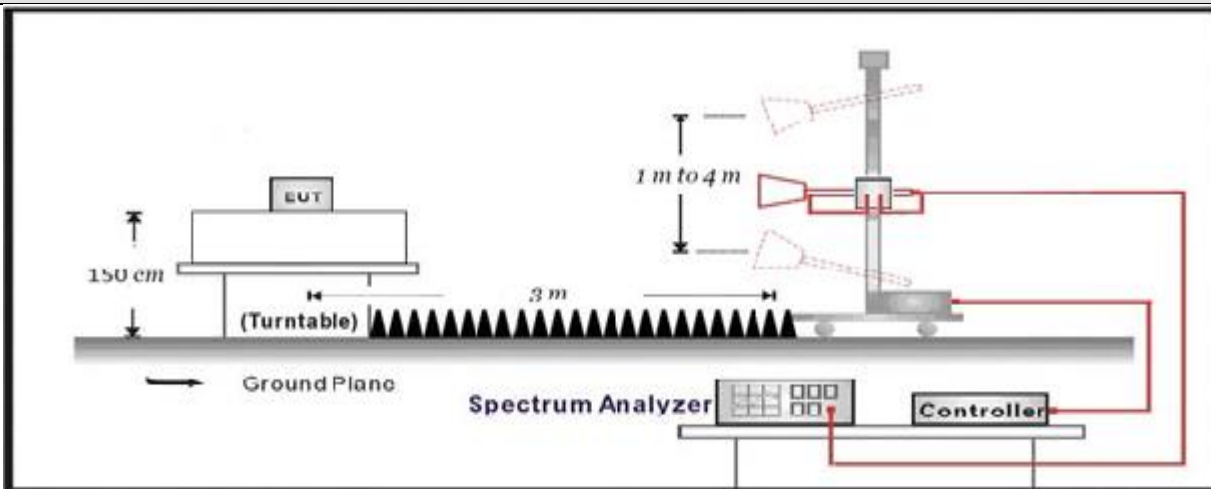

4.2.3 Test Procedure			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.12	Emissions in restricted frequency bands
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.2.7	Radiated spurious emission test
	<input checked="" type="checkbox"/> ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	<input checked="" type="checkbox"/> ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	<input checked="" type="checkbox"/> ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.3 20 dB Bandwidth	VERDICT: PASS
----------------------------	----------------------

4.3.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.215
-----------------	--

Contained within the frequency band designated in the rule section under which the equipment is operated.

4.3.2 Test Setup

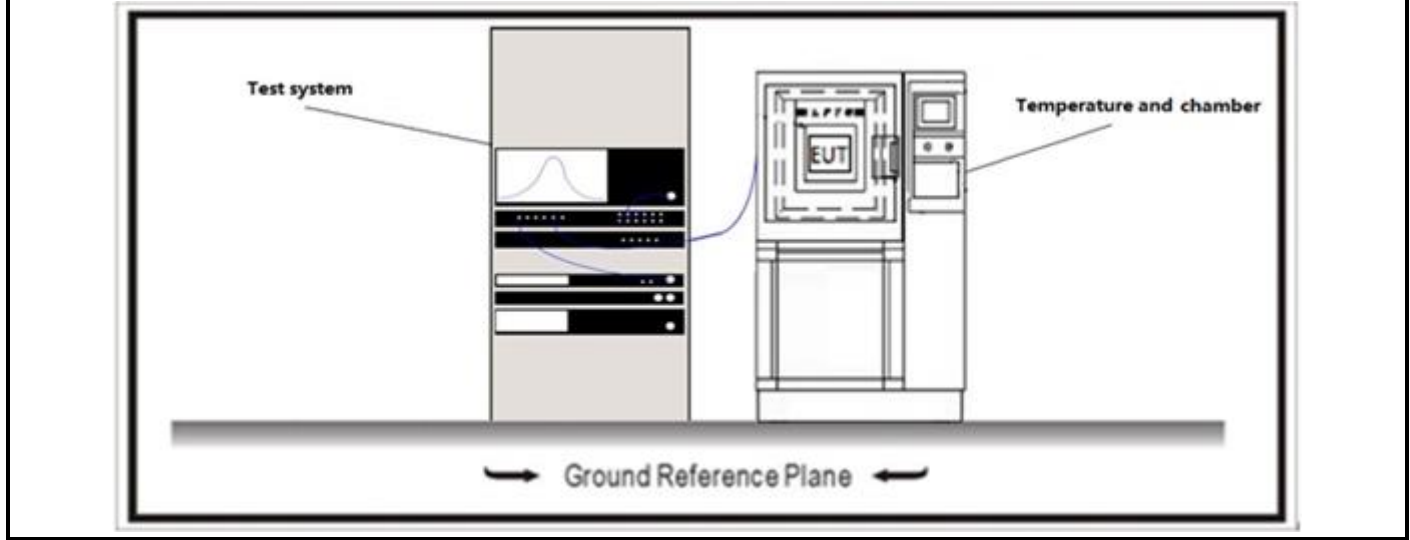

4.3.3 Test Procedure

	Reference Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	6.9	Occupied bandwidth tests
<input checked="" type="checkbox"/>	ANSI C63.10	6.9.2	Option 1
<input type="checkbox"/>	ANSI C63.10	6.9.3	Option 2

4.4 Antenna Requirement	VERDICT: PASS
--------------------------------	----------------------

4.4.1 Limit:

Standard	FCC Part 15 Subpart C Paragraph 15.203
-----------------	--

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.4.2 Antenna Connector Construction:

<input checked="" type="checkbox"/>	The use of a permanently attached antenna
<input type="checkbox"/>	The antenna use of a unique coupling to the intentional radiator
<input type="checkbox"/>	The use of a nonstandard antenna jack or electrical connector

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

Appendix A: The fundamental field strength and the harmonics

Freq. (MHz)	Read Level (dBuV) AV/PK	Reading Level (dBuV/m)	Factor (dB)	Radiated Emissions (dB)	HORIZ/ VERT	Limits (dBuV/m) AV/PK	Margin (dB)
5732	PK	33.709	38.212	71.921	H	114	42.079
5732	AV	24.150	38.212	62.362	H	94	31.638
5732	PK	35.012	38.213	73.225	V	114	40.775
5732	AV	24.863	38.212	63.075	V	94	30.925
5769	PK	33.789	38.119	71.907	H	114	42.093
5769	AV	23.761	38.119	61.879	H	94	32.121
5769	PK	34.558	38.119	72.676	V	114	41.324
5769	AV	23.021	38.119	61.140	V	94	32.86
5806	PK	31.419	38.229	69.648	H	114	44.352
5806	AV	21.735	38.230	59.965	H	94	34.035
5806	PK	33.208	38.228	71.436	V	114	42.564
5806	AV	22.113	38.230	60.343	V	94	33.657
5843	PK	30.133	38.184	68.317	H	114	45.683
5843	AV	19.420	38.186	57.606	H	94	36.394
5843	PK	28.127	38.181	66.308	V	114	47.692
5843	AV	19.578	38.184	57.762	V	94	36.238

Note: 1. Radiated Emissions = Factor+ Reading Level


2. Margin = Limits - Radiated Emissions

3. AV Limit (dBuV/m)=20 log Voltage(uV)=20 log (50000)=94 dBuV /m

4. PK Limit (dBuV/m)= AV Limit +20dB=114 dBuV /m


Appendix B: Radiated Emission

Profile: 2290469R	Page No.: 9
Engineer: Yuliu	
Site: AC5	Time: 2023/01/10 - 20:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode 1:Transmit at 5732MHz by SRD	

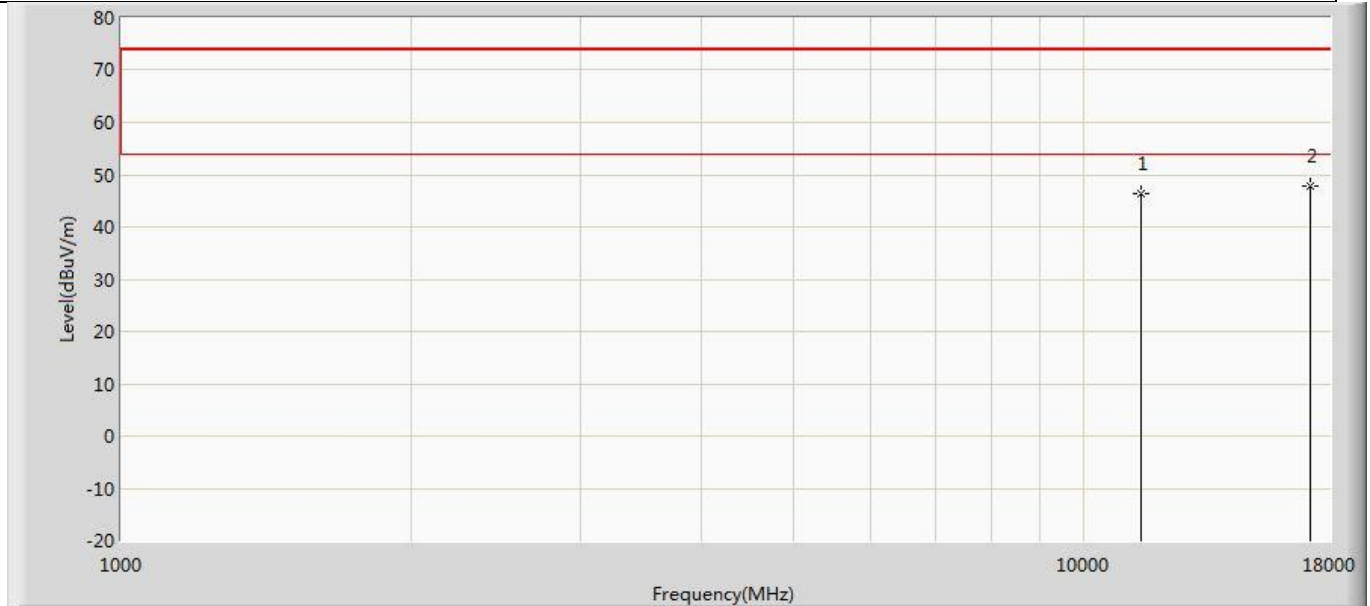


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11464.000	46.461	52.220	-27.539	74.000	-5.759	PK
2	*	17196.000	47.726	50.935	-26.274	74.000	-3.208	PK

Profile: 2290469R	Page No.: 10
Engineer: Yuliu	
Site: AC5	Time: 2023/01/10 - 20:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode 1:Transmit at 5732MHz by SRD	

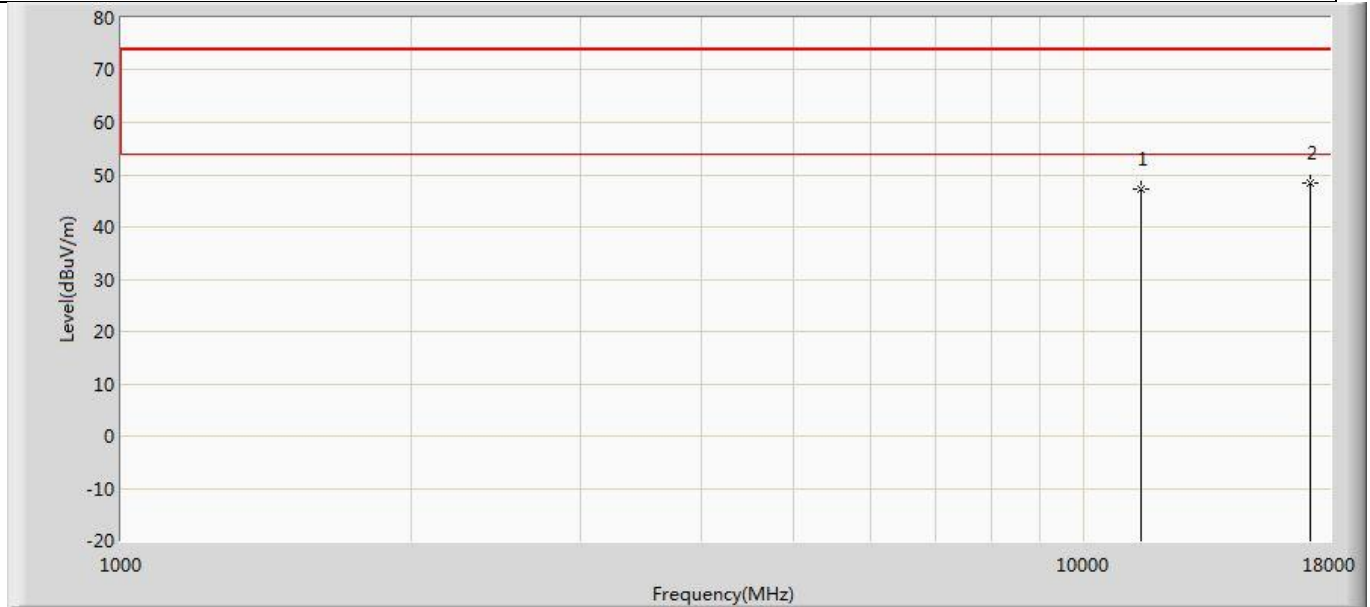


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11464.000	47.327	53.086	-26.673	74.000	-5.759	PK
2	*	17196.000	48.312	50.756	-25.688	74.000	-2.443	PK

Profile: 2290469R	Page No.: 11
Engineer: Yuliu	
Site: AC5	Time: 2023/01/10 - 20:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode 2:Transmit at 5769MHz by SRD	

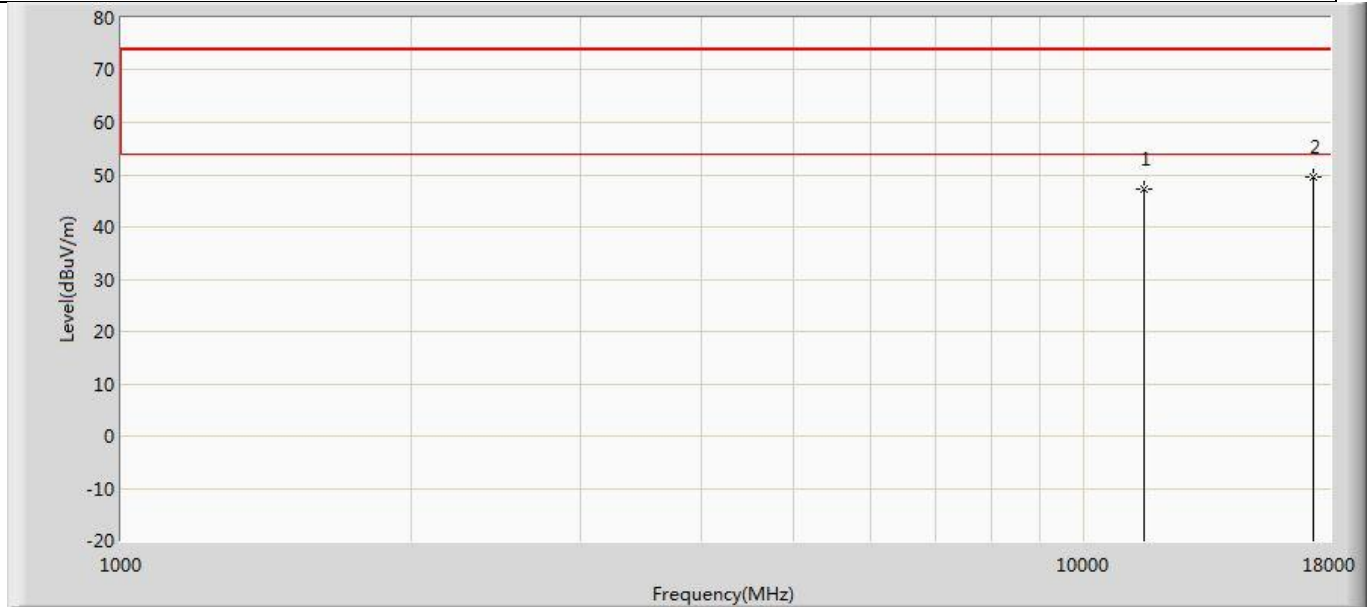


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11538.000	47.314	52.670	-26.686	74.000	-5.355	PK
2	*	17307.000	49.593	52.683	-24.407	74.000	-3.090	PK

Profile: 2290469R	Page No.: 12
Engineer: Yuliu	
Site: AC5	Time: 2023/01/10 - 20:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode 2:Transmit at 5769MHz by SRD	

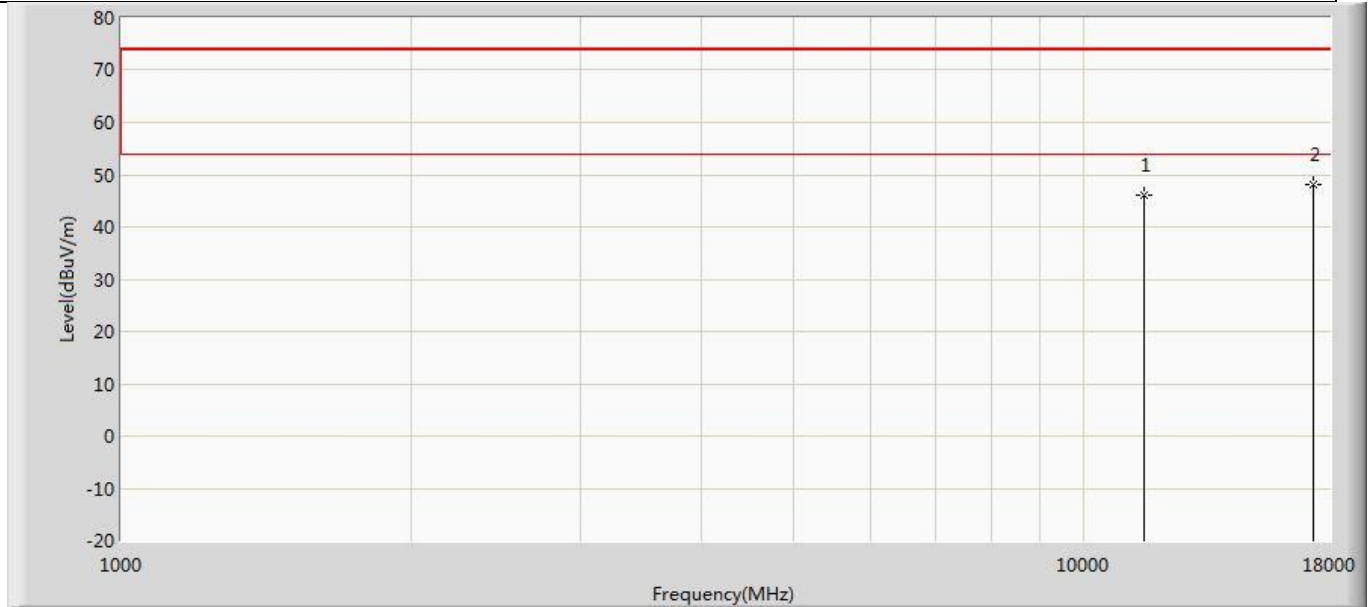


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11538.000	46.035	51.391	-27.965	74.000	-5.355	PK
2	*	17307.000	48.227	50.878	-25.773	74.000	-2.652	PK

Profile: 2290469R	Page No.: 13
Engineer: Yuliu	
Site: AC5	Time: 2023/01/10 - 20:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode 3:Transmit at 5806MHz by SRD	

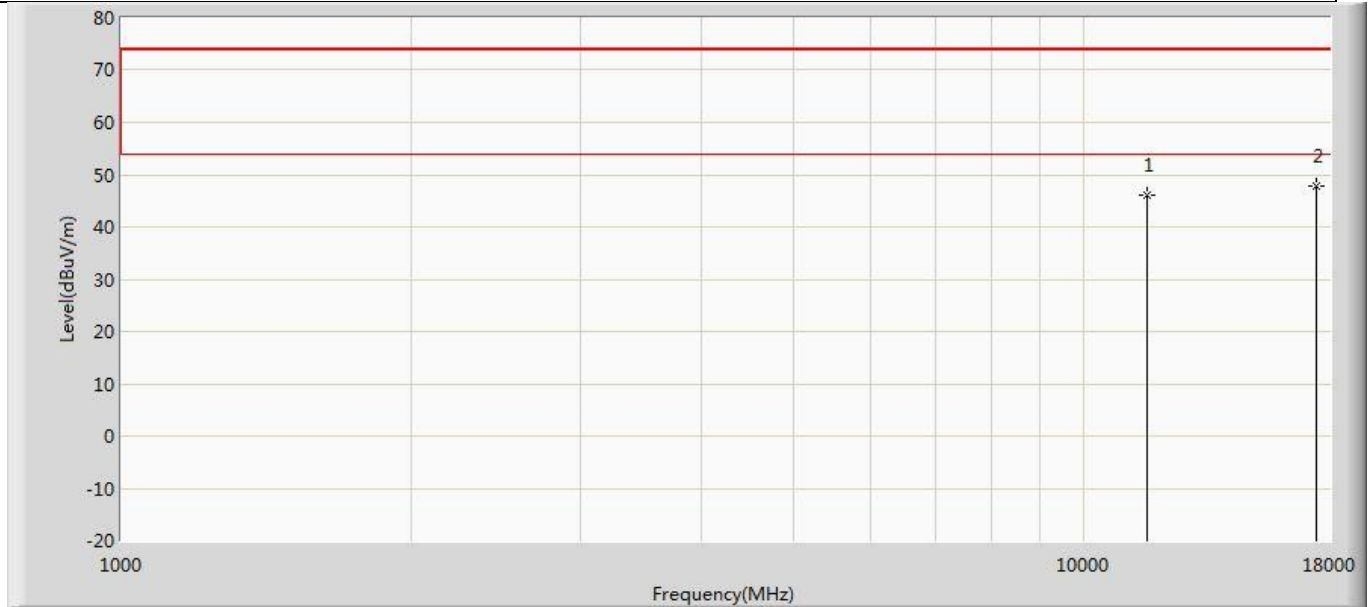


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11612.000	45.947	51.261	-28.053	74.000	-5.313	PK
2	*	17418.000	47.835	50.782	-26.165	74.000	-2.947	PK

Profile: 2290469R	Page No.: 14
Engineer: Yuliu	
Site: AC5	Time: 2023/01/10 - 20:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode 3:Transmit at 5806MHz by SRD	

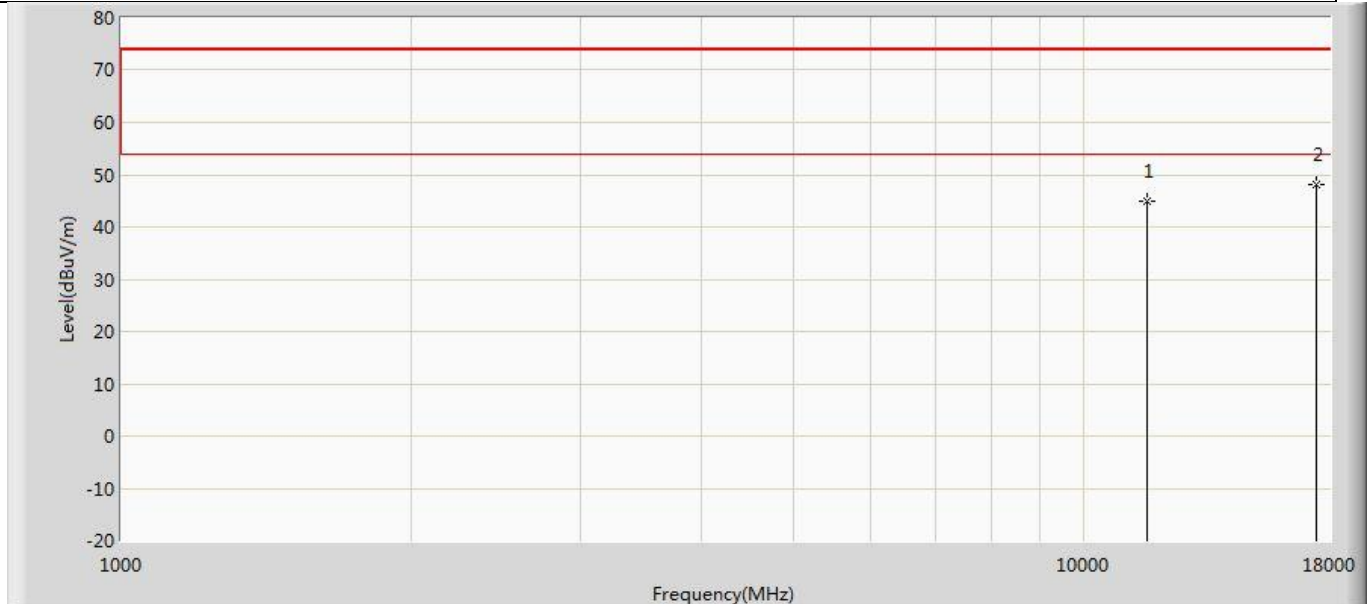


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11612.000	44.974	50.288	-29.026	74.000	-5.313	PK
2	*	17418.000	48.188	51.023	-25.812	74.000	-2.836	PK

Profile: 2290469R	Page No.: 15
Engineer: Yuliu	
Site: AC5	Time: 2023/01/10 - 20:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode 4:Transmit at 5843MHz by SRD	

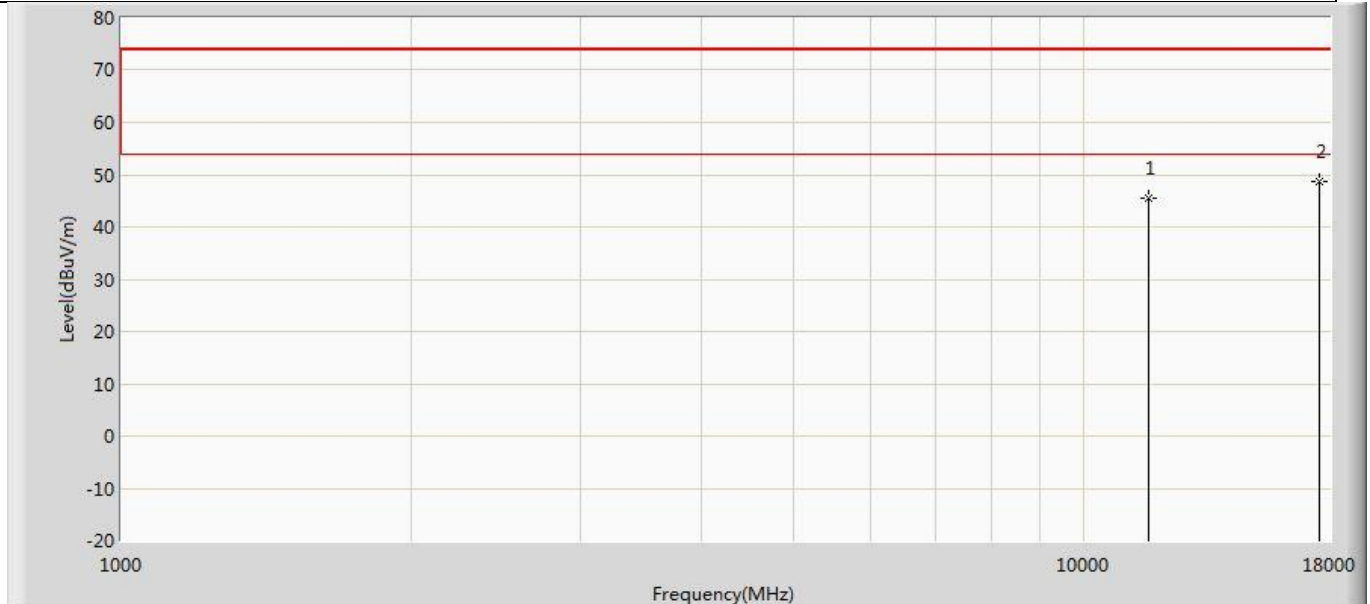

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11686.000	45.395	50.897	-28.605	74.000	-5.502	PK
2	*	17529.000	48.773	51.066	-25.227	74.000	-2.293	PK

Profile: 2290469R	Page No.: 16
Engineer: Yuliu	
Site: AC5	Time: 2023/01/10 - 20:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode 4:Transmit at 5843MHz by SRD	

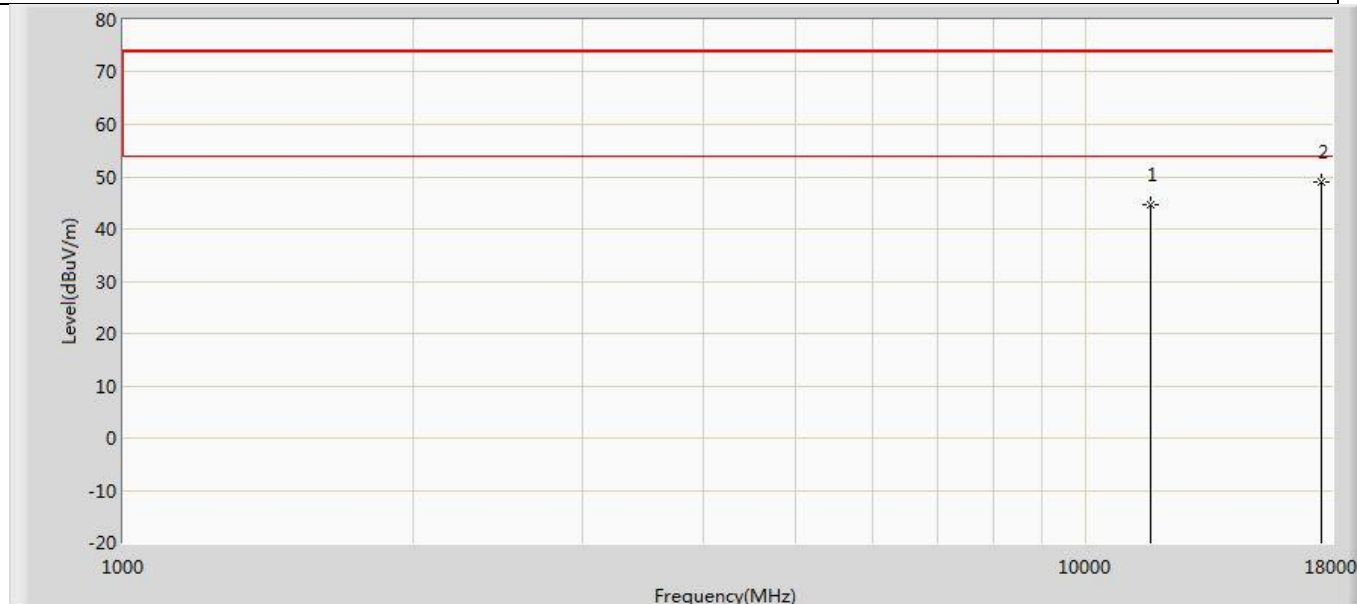


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11686.000	44.607	50.109	-29.393	74.000	-5.502	PK
2	*	17529.000	48.893	51.186	-25.107	74.000	-2.293	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range 9kHz~30MHz and above 18GHz, worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for both peak and average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. The points in graph are the highest data in test frequency range.
5. The above is the level of harmonics, The data other than harmonics is the noise base, so the test results comply with 15.249(d)

The worst case of Radiated Emission below 1GHz:


Profile: 2290469R	Page No.: 163
Engineer: Yuliu	
Site: AC3	Time: 2023/02/28 - 20:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3M(30-1000M)	Polarity: Horizontal
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode1:Transmit at 5843MHz by SRD	

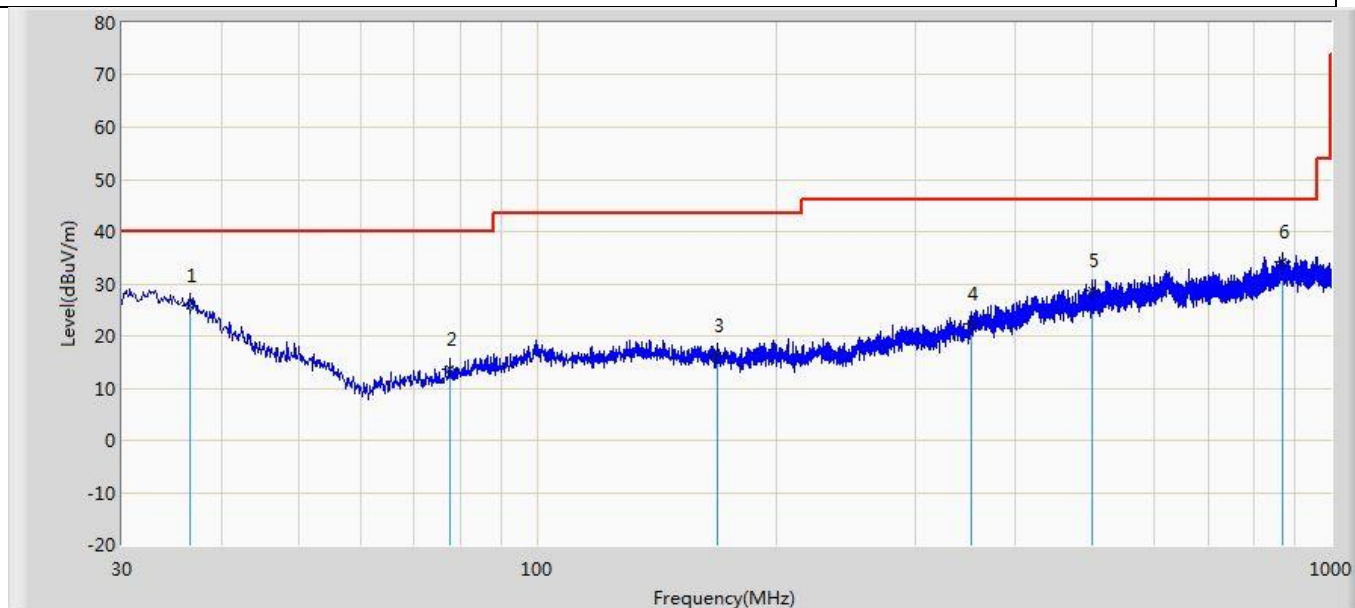

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		36.548	25.820	0.261	-14.180	40.000	25.559	QP
2		77.651	13.590	0.785	-26.410	40.000	12.804	QP
3		168.710	16.204	-1.068	-27.296	43.500	17.272	QP
4		352.646	22.229	-1.068	-23.771	46.000	23.297	QP
5		499.844	28.659	1.004	-17.341	46.000	27.655	QP
6	*	868.080	34.304	1.351	-11.696	46.000	32.953	QP

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

Profile: 2290469R	Page No.: 164
Engineer: Yuliu	
Site: AC3	Time: 2023/02/28 - 20:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3M(30-1000M)	Polarity: Vertical
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode1:Transmit at 5843MHz by SRD	

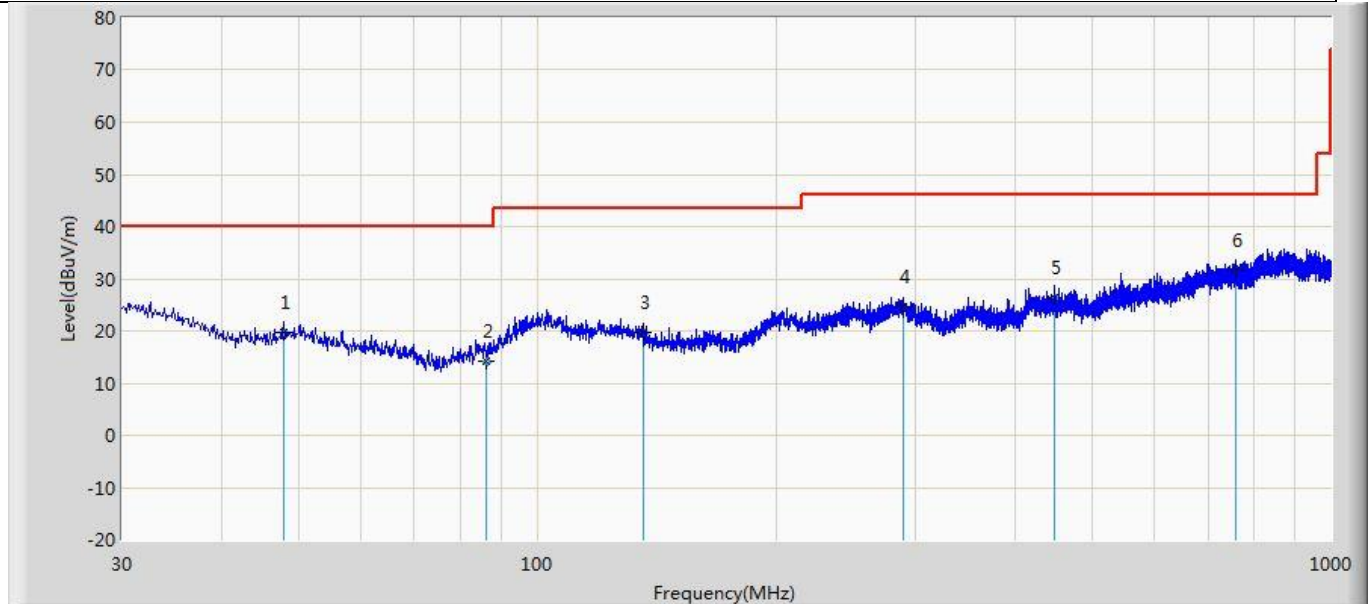


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		47.945	19.690	0.819	-20.310	40.000	18.871	QP
2		86.381	14.208	-2.347	-25.792	40.000	16.555	QP
3		136.094	19.661	0.334	-23.839	43.500	19.326	QP
4		289.233	24.507	-0.302	-21.493	46.000	24.809	QP
5		448.312	26.410	0.357	-19.590	46.000	26.053	QP
6	*	757.500	31.520	0.260	-14.480	46.000	31.260	QP

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)


The worst case of Simultaneous Radiated Emission:

Profile: 2290469R	Page No.: 17
Engineer: Pengchengyang	
Site: AC5	Time: 2023/10/10 - 16:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode 1 : Transmit at 2402MHz by LE_1Mbps & 5732MHz by SRD & 2402MHz by SRD	

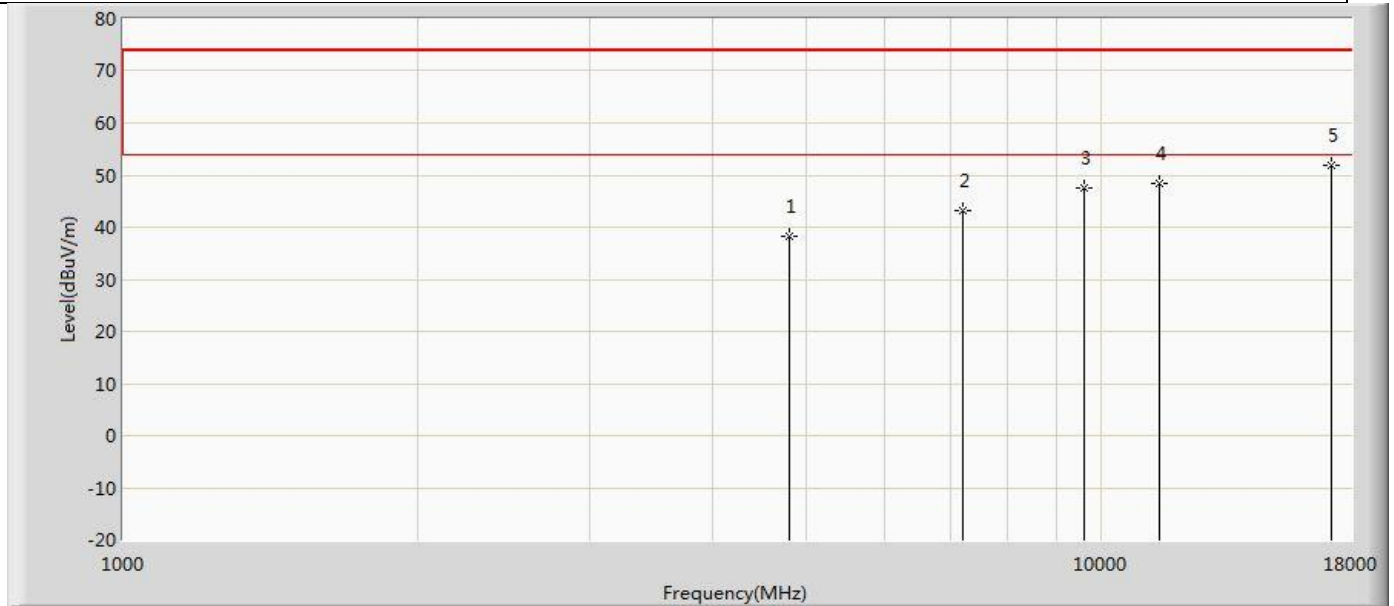

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	38.141	52.233	-35.859	74.000	-14.092	PK
2		7206.000	43.277	51.546	-30.723	74.000	-8.269	PK
3		9608.000	47.471	50.952	-26.529	74.000	-3.481	PK
4		11464.000	48.395	49.443	-25.605	74.000	-1.049	PK
5	*	17196.000	51.789	49.003	-22.211	74.000	2.786	PK

Profile: 2290469R	Page No.: 18
Engineer: Pengchengyang	
Site: AC5	Time: 2023/10/10 - 16:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: AFC-SW01	Power: DC 3.7V
Note: Mode 1 : Transmit at 2402MHz by LE_1Mbps & 5732MHz by SRD & 2402MHz by SRD	

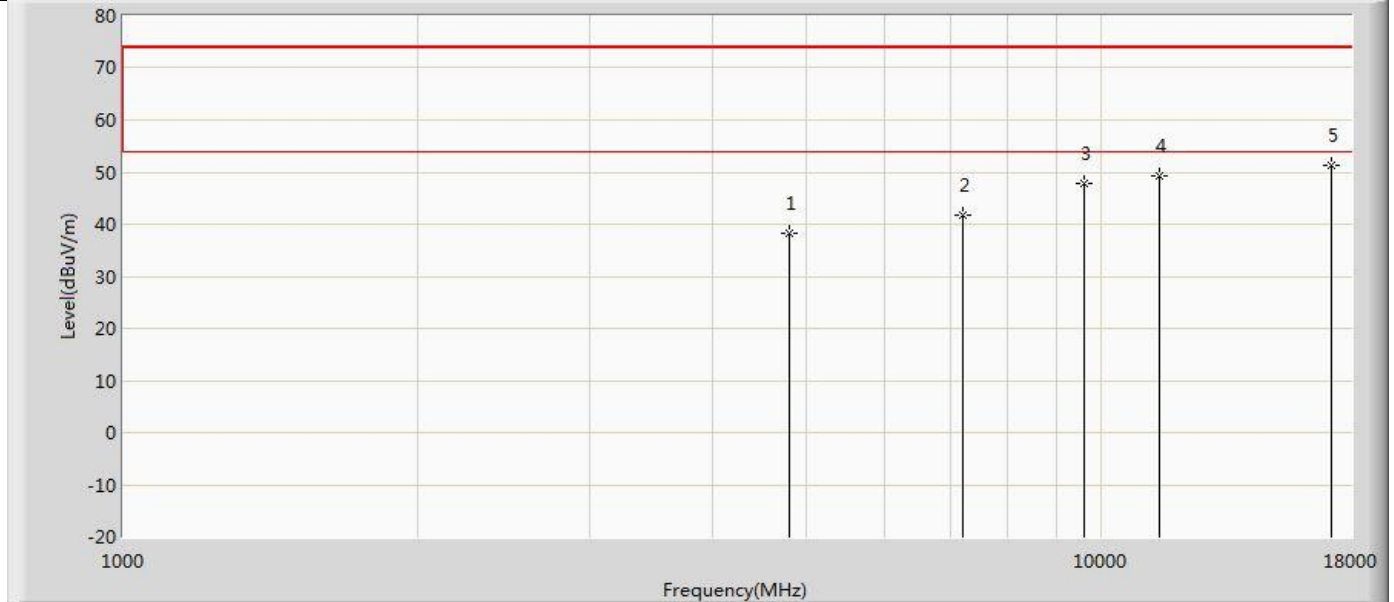


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	38.298	52.390	-35.702	74.000	-14.092	PK
2		7206.000	41.859	50.128	-32.141	74.000	-8.269	PK
3		9608.000	47.723	51.204	-26.277	74.000	-3.481	PK
4		11464.000	49.328	50.376	-24.672	74.000	-1.049	PK
5	*	17196.000	51.206	48.420	-22.794	74.000	2.786	PK


Appendix C: 20dB Bandwidth

Mode	CH.	Test Freq. (MHz)	20dB Occupied Bandwidth (kHz)	Limit (kHz)	Result
1	03	5732	7.849	Within operation in frequency band	Pass
	04	5769	8.121	Within operation in frequency band	Pass
	05	5806	8.049	Within operation in frequency band	Pass
	06	5843	7.986	Within operation in frequency band	Pass


Mode 1 CH03 5732MHz

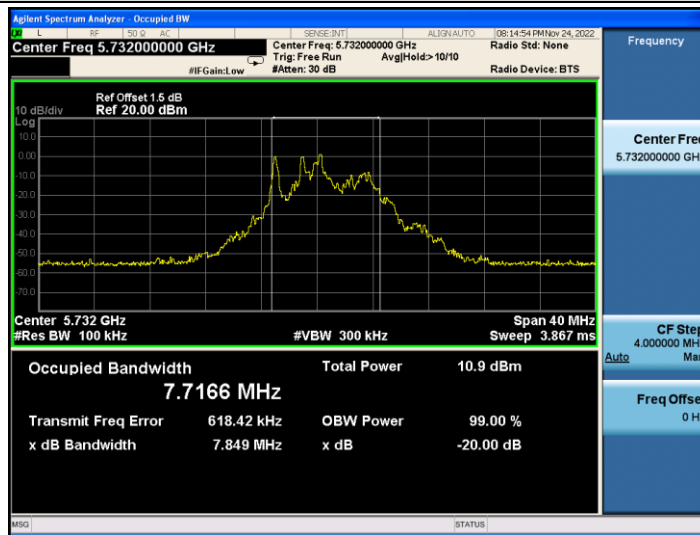


Mode 1 CH04 5769MHz

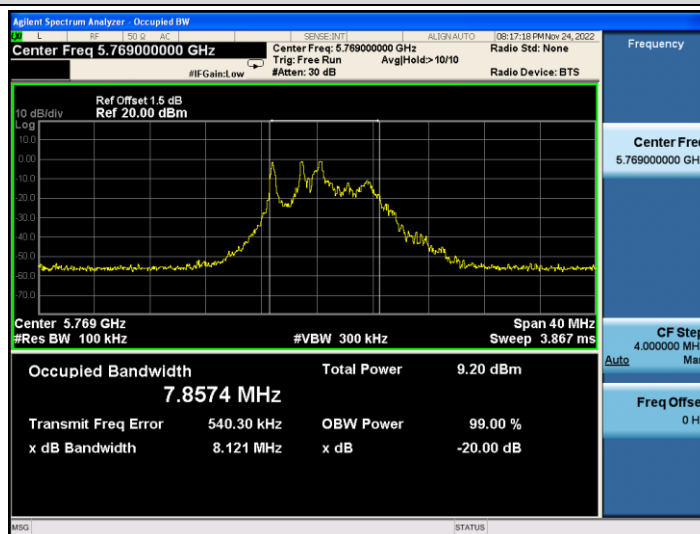

Mode 1 CH05 5806MHz

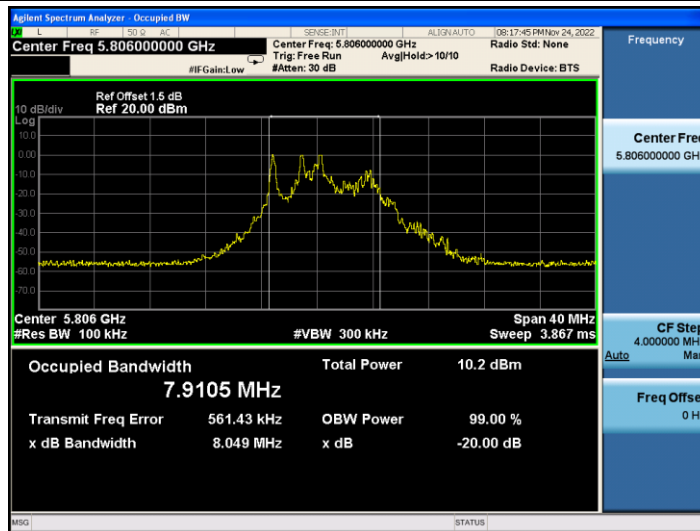

Mode 1 CH06 5843MHz

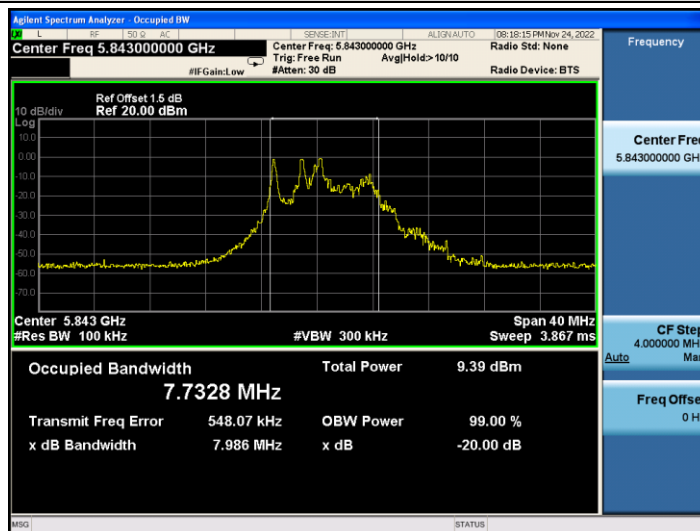

The End