



8. Band Edge

8.1. Test Limit

§22.917(a)


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

8.2. Test Procedures

- a. The EUT was set up for the maximum peak power with WWAN link data modulation. The power was measured with Spectrum Analyzer.
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss in the transmitted path track.
- c. The center frequency of spectrum is the band edge frequency. RB of the resolution bandwidth of at least one percent of the emission bandwidth.
- d. Record the max trace plot into the test report.



8.3. Test Setup

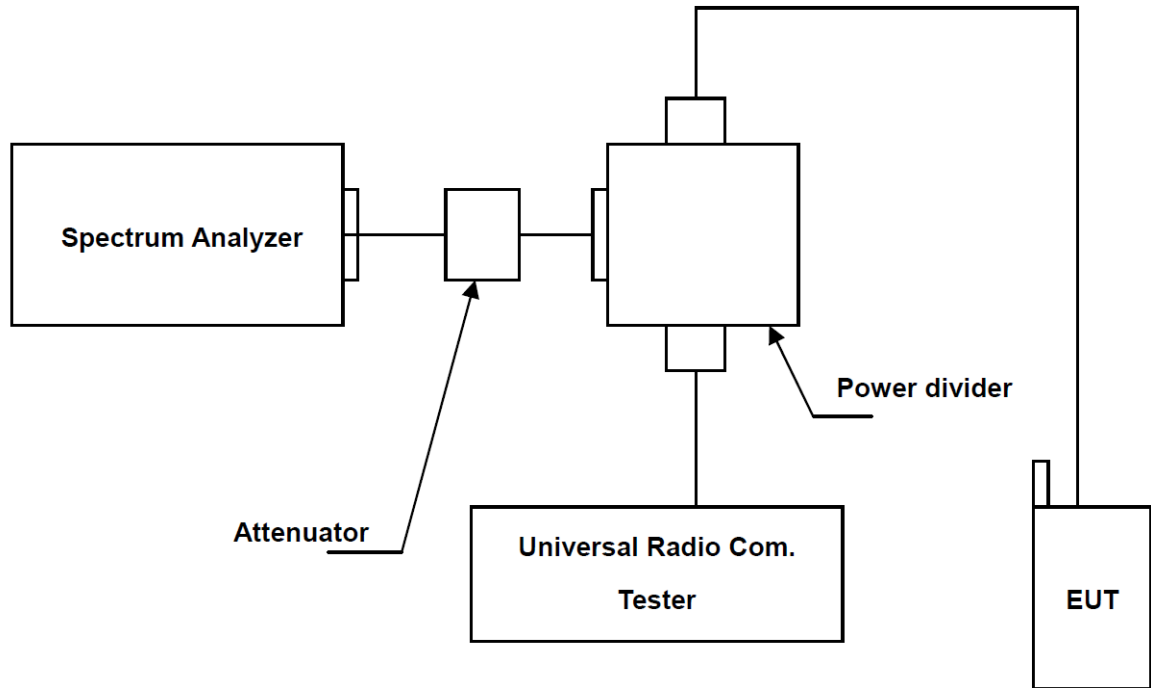




8.4. Test Result and Data

Cat M1


LTE Band 5 QPSK 1.4MHz, CH 20407

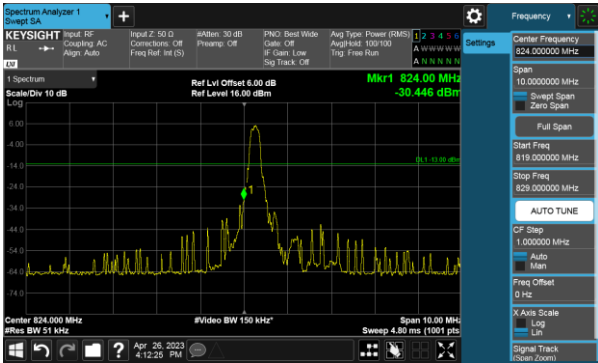


LTE Band 5 QPSK 10MHz, CH 20450



LTE Band 5 QPSK 1.4MHz, CH 20463

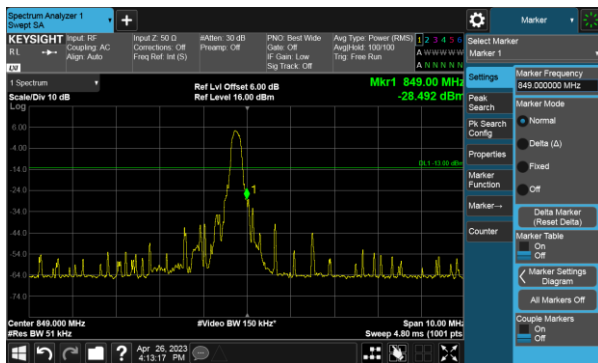


LTE Band 5 QPSK 10MHz, CH 20600

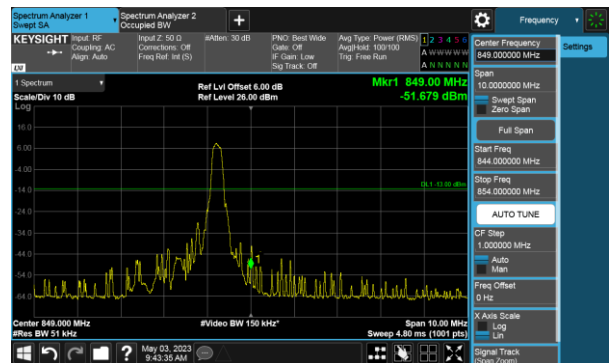





Cat M1
LTE Band 26 QPSK 1.4MHz, CH 26797

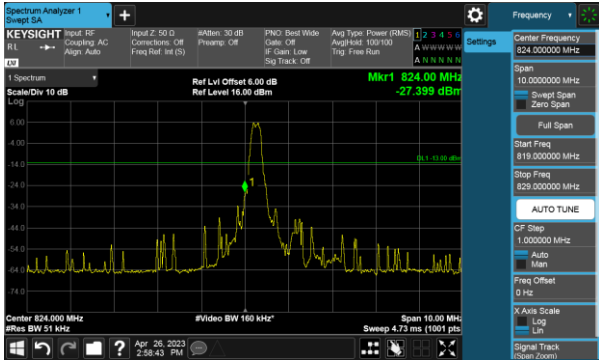


LTE Band 26 QPSK 15MHz, CH 26865

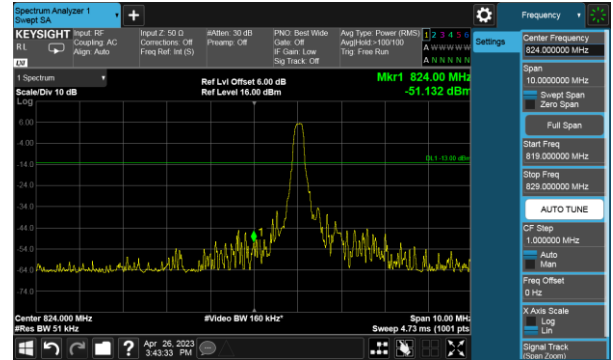

LTE Band 26 QPSK 1.4MHz, CH 27033

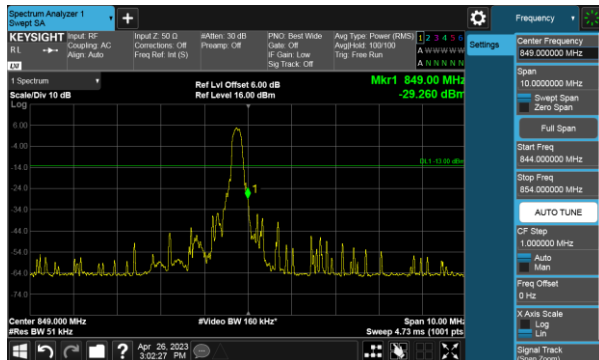


LTE Band 26 QPSK 15MHz, CH 26965

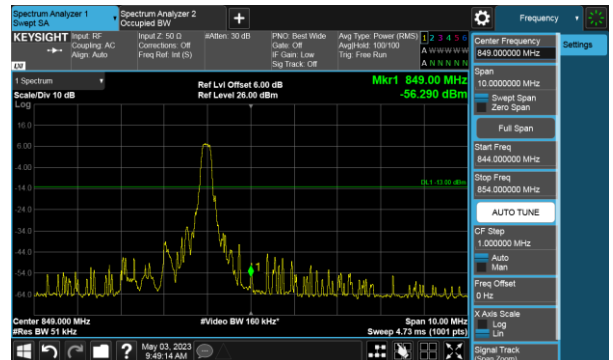




NB-IoT


LTE Band 5 QPSK 3.75KHz 1@0 CH 20402

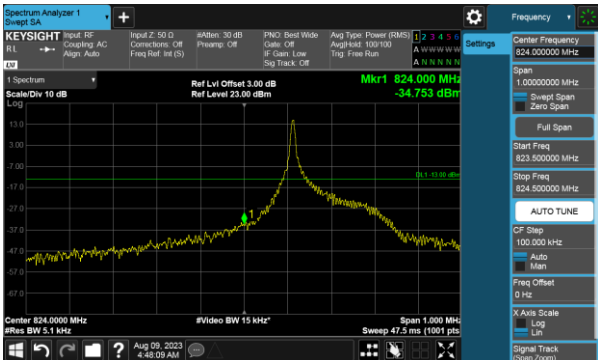


LTE Band 5 BPSK 3.75KHz 1@0 CH 20402

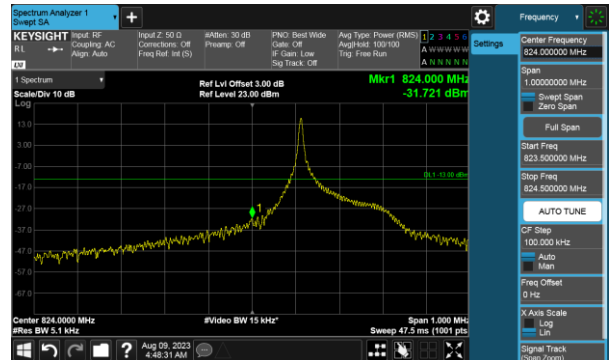


LTE Band 5 QPSK 15KHz 1@0 CH 20402

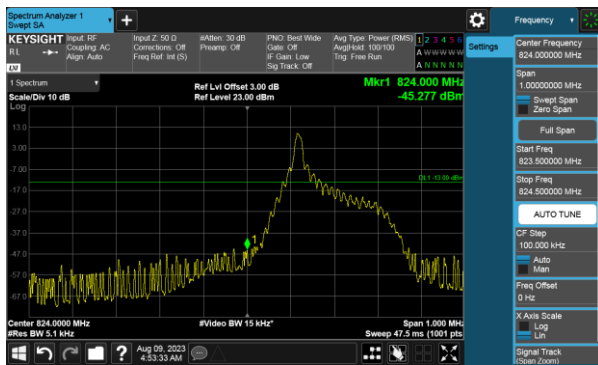

LTE Band 5 BPSK 15KHz 1@0 CH 20402

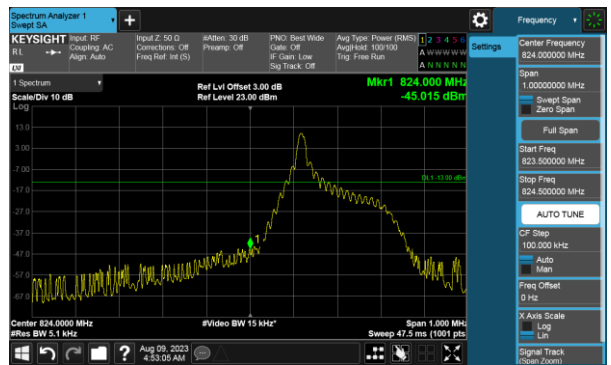


LTE Band 5 QPSK 15KHz 12@0 CH 20402

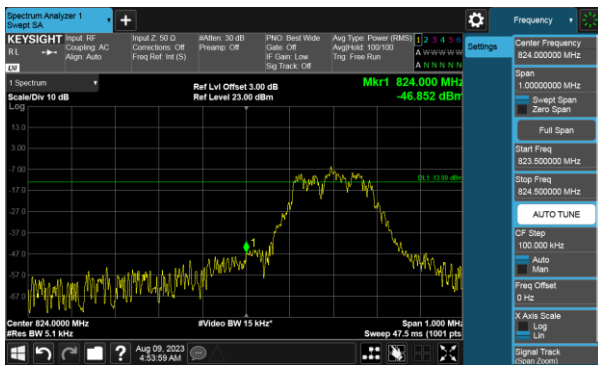



NB-IoT


LTE Band 5 QPSK 3.75KHz 1@47 CH 20648

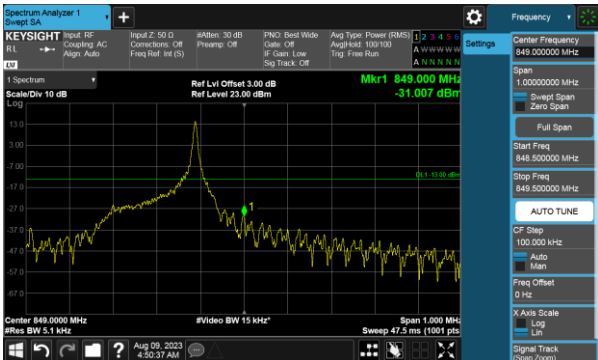


LTE Band 5 BPSK 3.75KHz 1@47 CH 20648




LTE Band 5 QPSK 15KHz 1@11 CH 20648

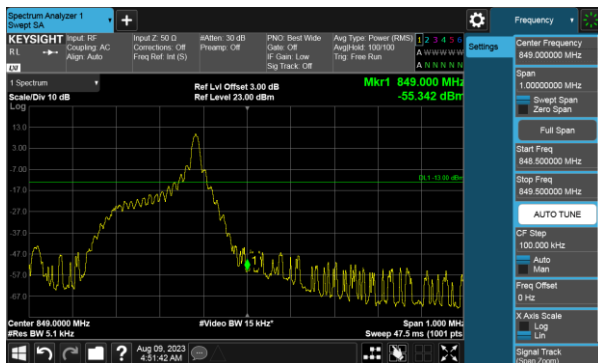

LTE Band 5 BPSK 15KHz 1@11 CH 20648

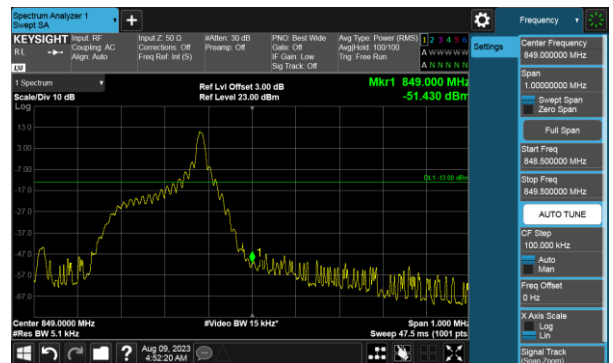


LTE Band 5 QPSK 15KHz 12@0 CH 20648

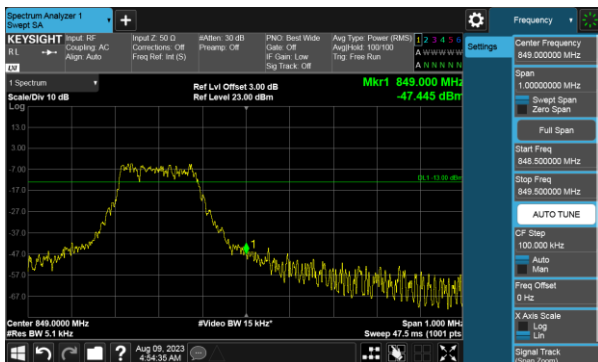




NB-IoT


LTE Band 26 QPSK 3.75KHz 1@0 CH 26792

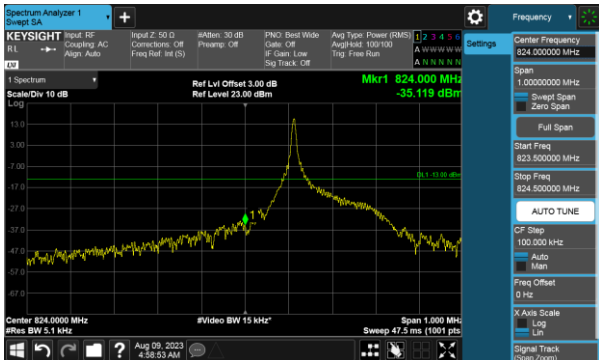


LTE Band 26 BPSK 3.75KHz 1@0 CH 26792

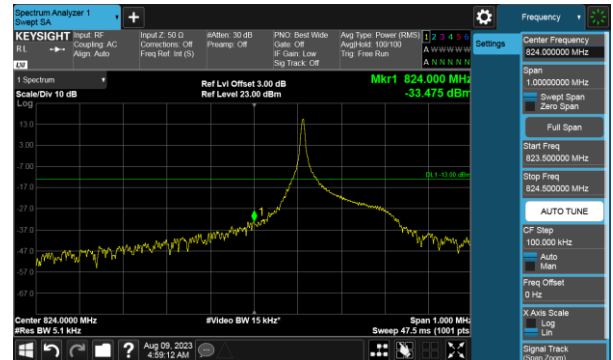

LTE Band 26 QPSK 15KHz 1@0 CH 26792

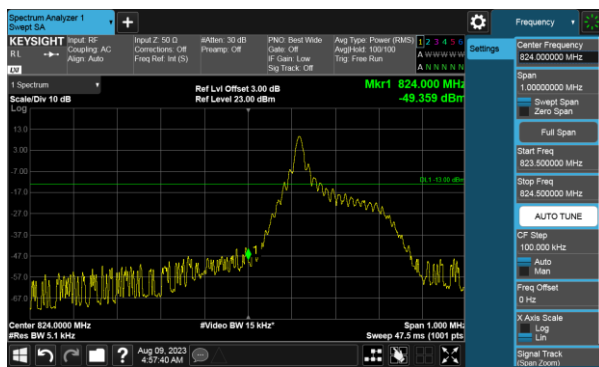

LTE Band 26 BPSK 15KHz 1@0 CH 26792

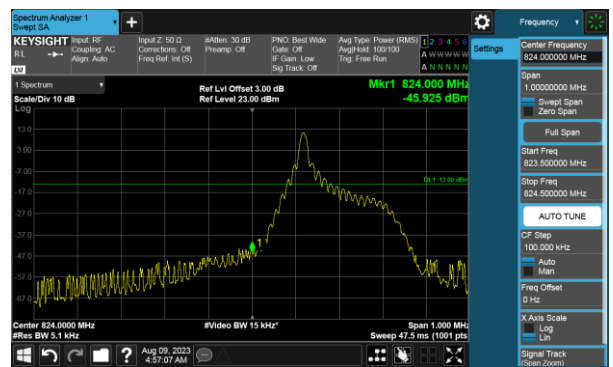


LTE Band 26 QPSK 15KHz 12@0 CH 26792






NB-IoT


LTE Band 26 QPSK 3.75KHz 1@47 CH 27038

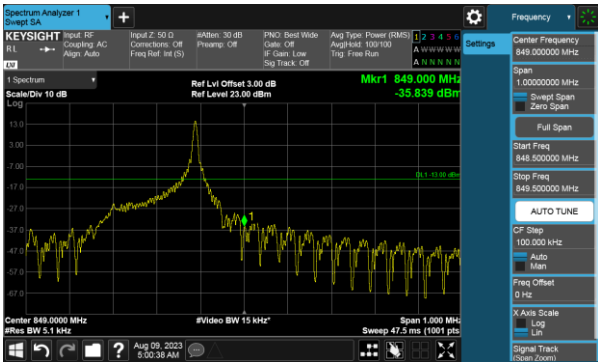


LTE Band 26 BPSK 3.75KHz 1@47 CH 27038

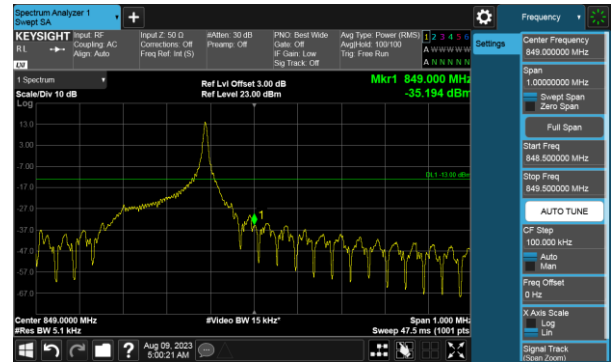


LTE Band 26 QPSK 15KHz 1@11 CH 27038

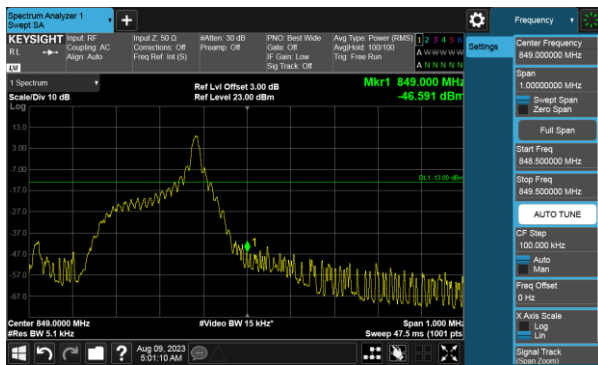

LTE Band 26 BPSK 15KHz 1@11 CH 27038

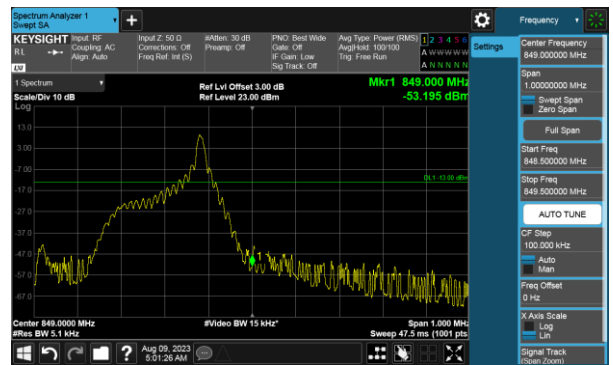

LTE Band 26 QPSK 15KHz 12@0 CH 27038

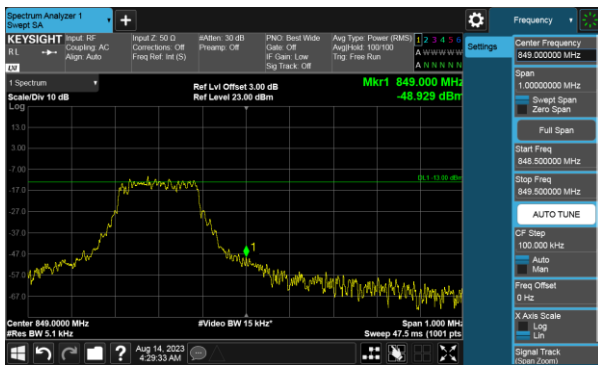



9. Conducted Spurious Emission Test


9.1. Test Limit

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

9.2. Test Procedures

- The EUT was set up for the maximum peak power with WWAN link data modulation. The power was measured with Spectrum Analyzer.
- The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- When the spectrum scanned from 30MHz to 1GHz. The spectrum set RBW=100KHz, VBW=300KHz.
- When the spectrum scanned from Above 1GHz. The spectrum set RBW=1MHz, VBW=3MHz.

9.3. Test Setup

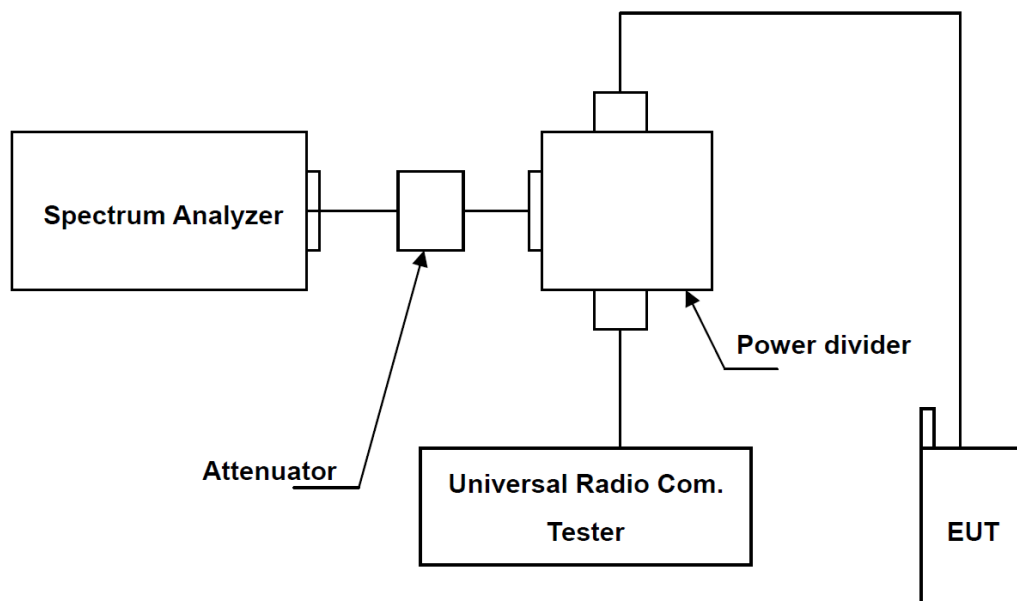





9.4. Test Result and Data

Cat M1

LTE Band 5 QPSK 1.4MHz, CH 20525

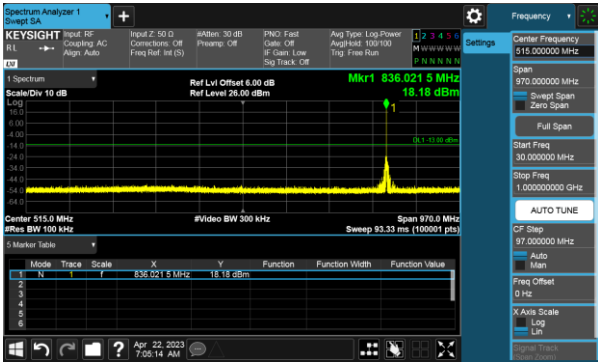

LTE Band 26 QPSK 1.4MHz, CH 26915

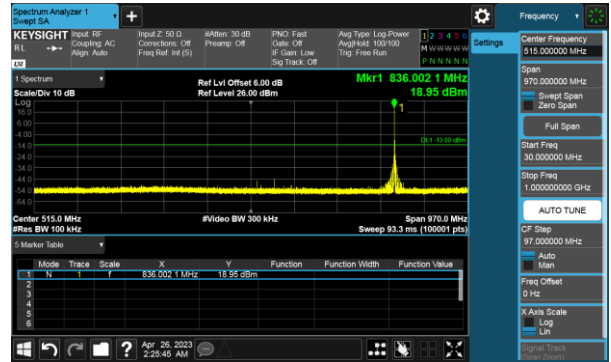

LTE Band 5 QPSK 1.4MHz, CH 20525




LTE Band 26 QPSK 1.4MHz, CH 26915






NB-IoT
LTE Band 5 QPSK, CH 20402

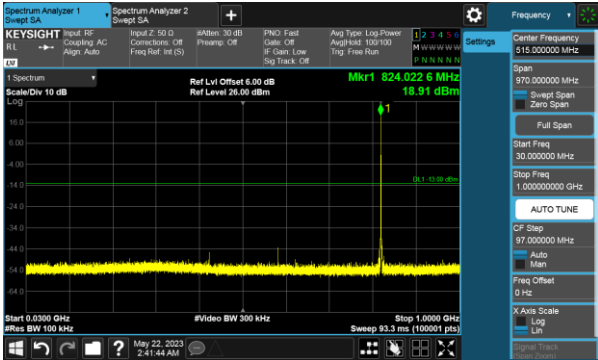


LTE Band 5 QPSK, CH 20525

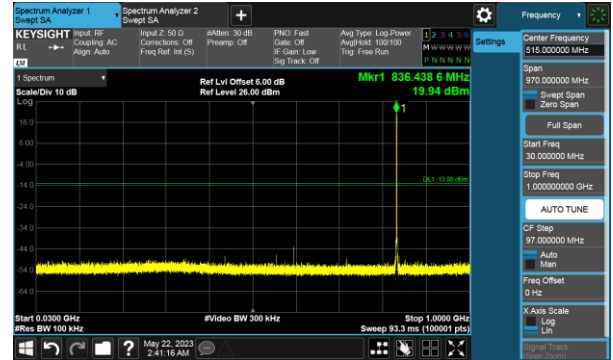

LTE Band 5 QPSK, CH 20402




LTE Band 5 QPSK, CH 20525

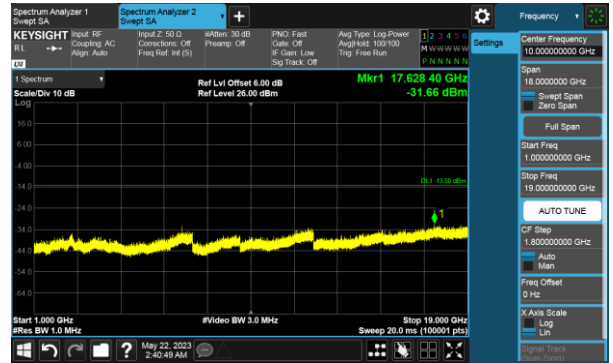




NB-IoT
LTE Band 5 QPSK, CH 20648

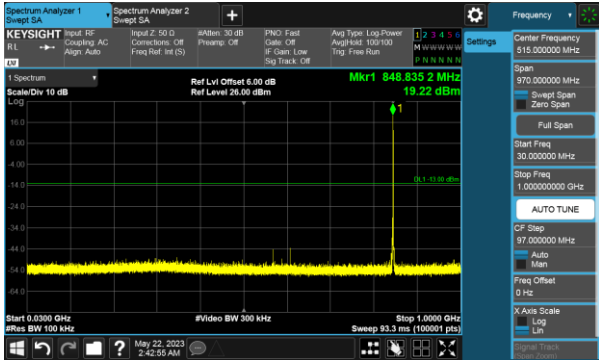


LTE Band 5 QPSK, CH 20648

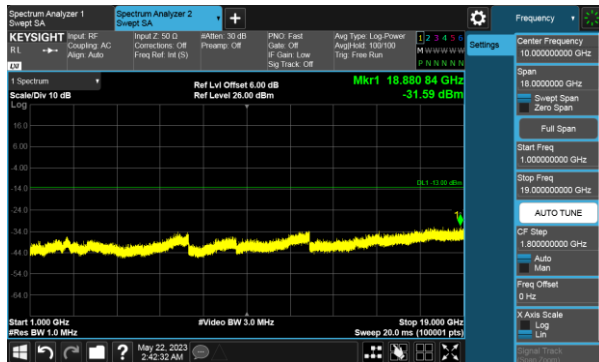





NB-IoT
LTE Band 26 QPSK, CH 26792

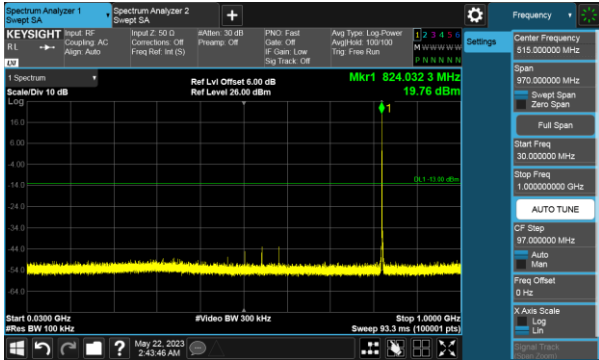


LTE Band 26 QPSK, CH 26915

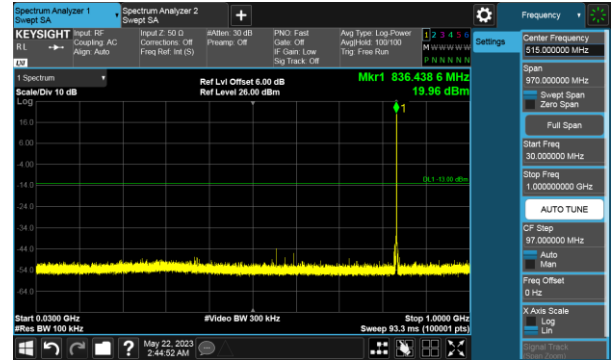

LTE Band 26 QPSK, CH 26792

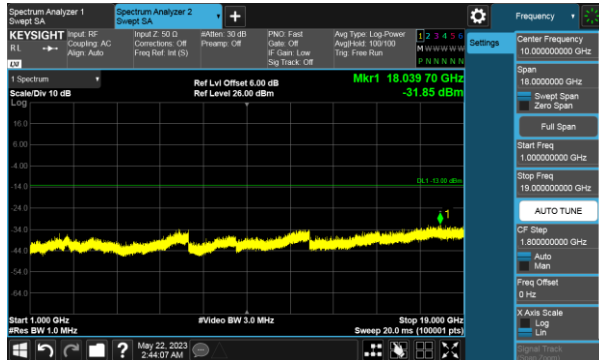


LTE Band 26 QPSK, CH 26915

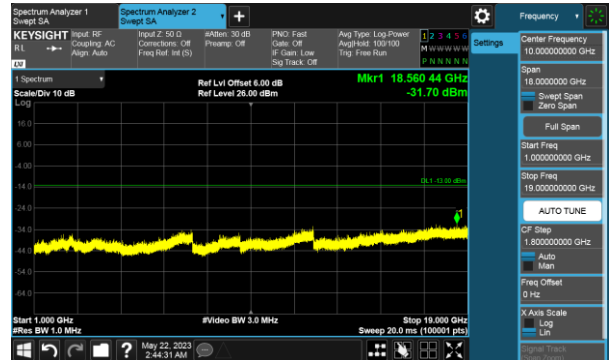




NB-IoT
LTE Band 26 QPSK, CH 27038

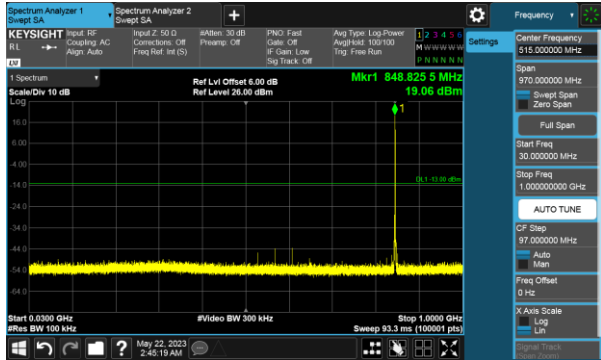

LTE Band 26 QPSK, CH 27038

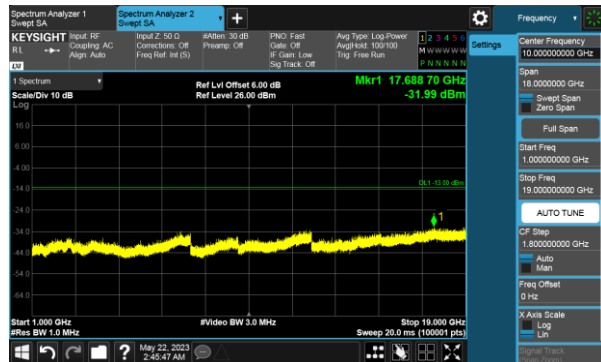



10. Radiation Emission Test

10.1. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

10.2. Test Procedure


- a. The EUT was set up for the maximum power with wwan link data modulation. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high operational frequency range).
- b. E.I.R.P power measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna (Note:1 & 2) is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- d. E.I.R.P. = Output power level of S.G - TX cable loss + Antenna gain of substitution horn
- e. E.R.P. = E.I.R.P.- 2.15 dB

Note: 1. Below 1GHz substituted method test: sleeve dipole antenna to Bi-Log Antenna.
2. Above 1GHz substituted method test: horn antenna to horn antenna.




10.3. Test Setup


Below 1GHz test setup

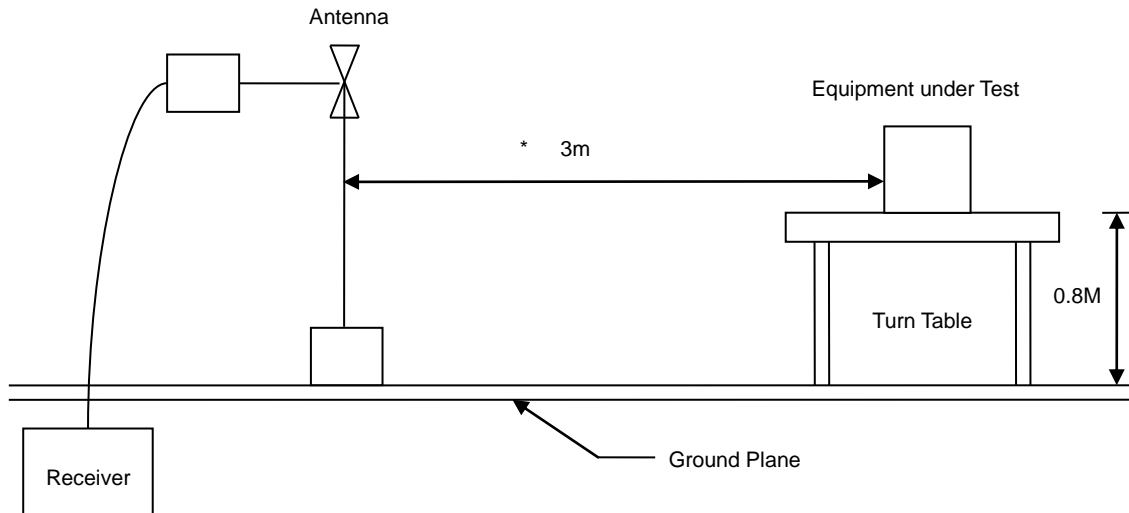

Above 1GHz Test Setup

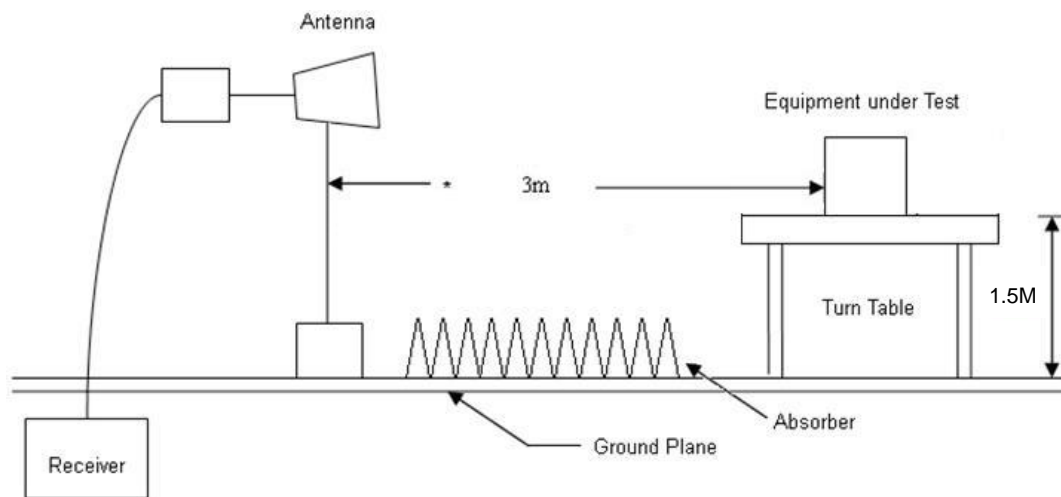



For Substituted Method Test Set-UP

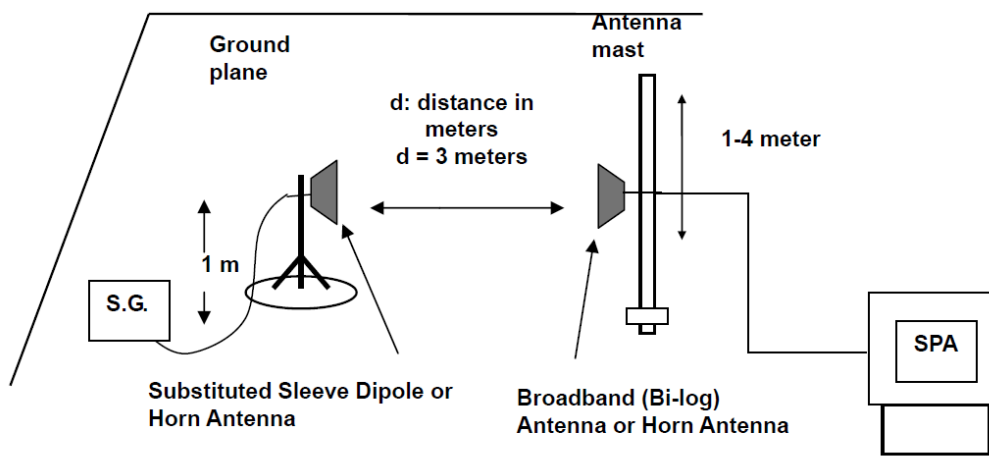




10.4. Test Result and Data (30MHz ~ 1GHz)

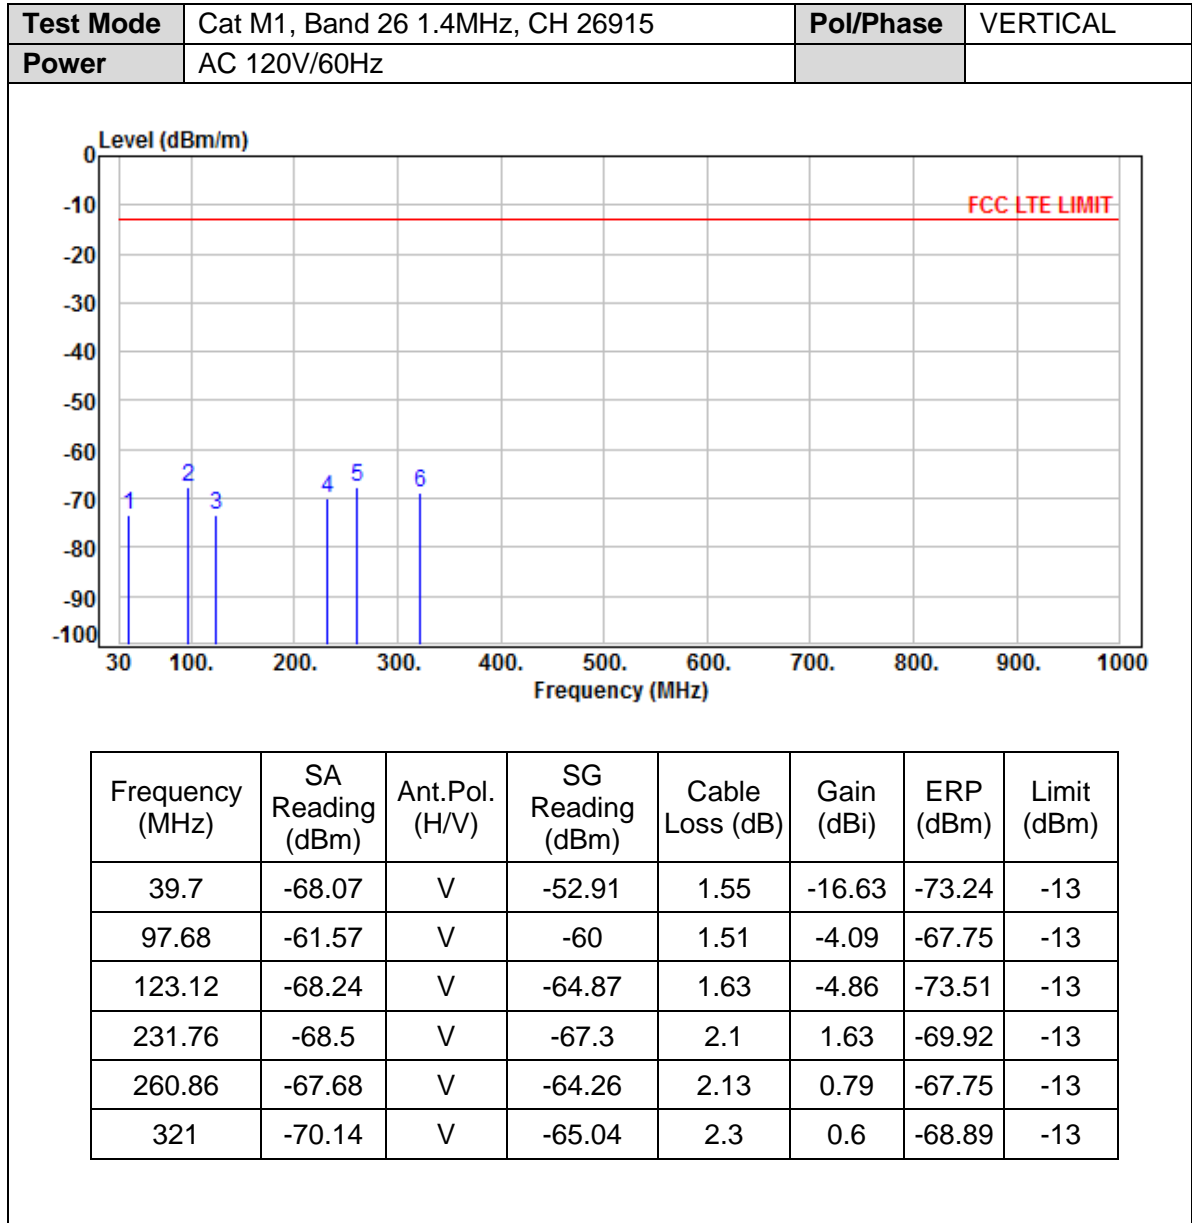

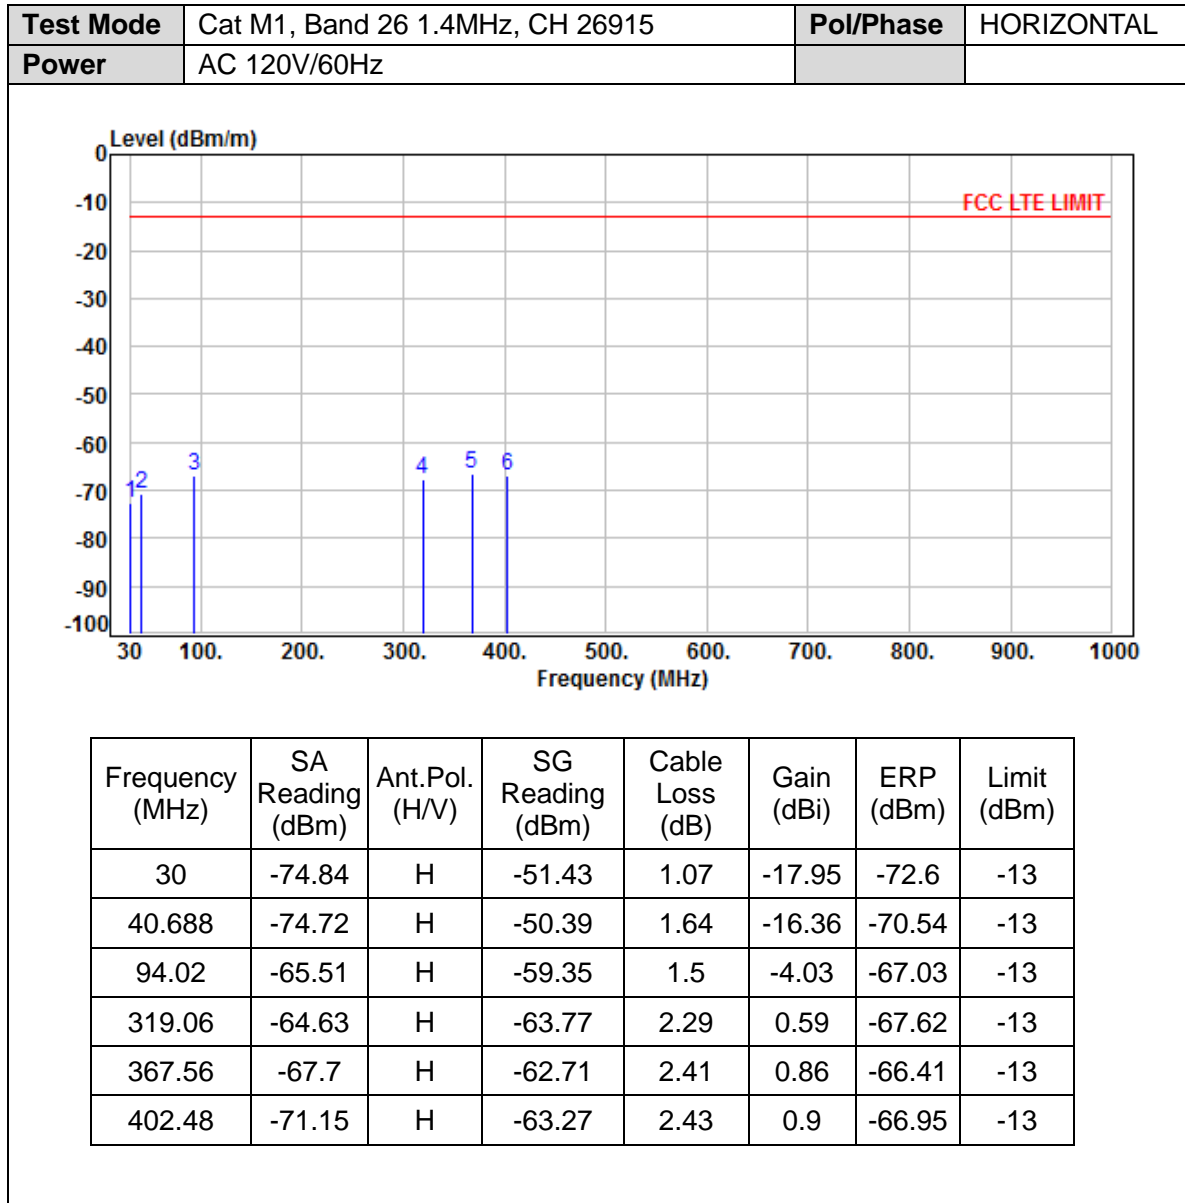




Test Mode	NB-IoT, Band 26, CH 26915	Pol/Phase	VERTICAL
Power	AC 120V/60Hz		

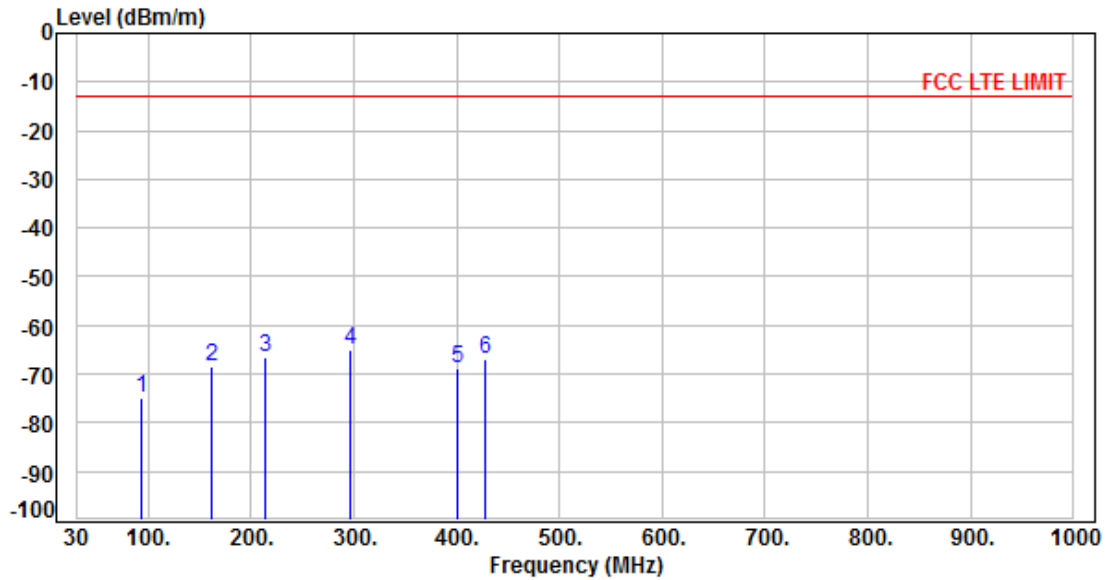

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
92.88	-68.5	V	-67.25	1.49	-4.18	-75.07	-13
161.98	-64.19	V	-59.94	1.77	-4.4	-68.26	-13
214.3	-64.3	V	-63.42	1.91	0.96	-66.52	-13
297.004	-66.71	V	-61.37	2.21	0.62	-65.11	-13
400.008	-68.3	V	-65.11	2.42	0.85	-68.83	-13
427.7	-66.89	V	-62.59	2.51	0.52	-66.73	-13




Test Mode	NB-IoT, Band 26, CH 26915	Pol/Phase	HORIZONTAL
Power	AC 120V/60Hz		

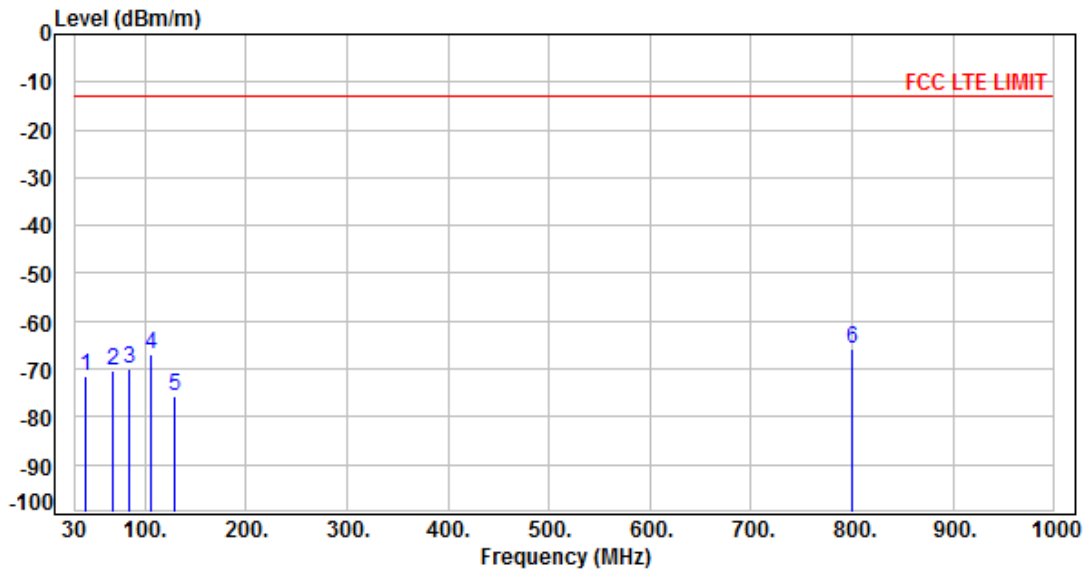

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
40.98	-75.51	H	-51.28	1.67	-16.24	-71.34	-13
68.8	-70.86	H	-56.49	1.22	-10.38	-70.24	-13
84.32	-68.8	H	-61.49	1.38	-5.1	-70.12	-13
105.66	-65.42	H	-58.63	1.58	-4.71	-67.07	-13
128.94	-72.22	H	-66.78	1.71	-4.88	-75.52	-13
800.18	-80.03	H	-60.53	3.32	0.17	-65.83	-13




10.5. Test Result and Data (1GHz ~ 20GHz)

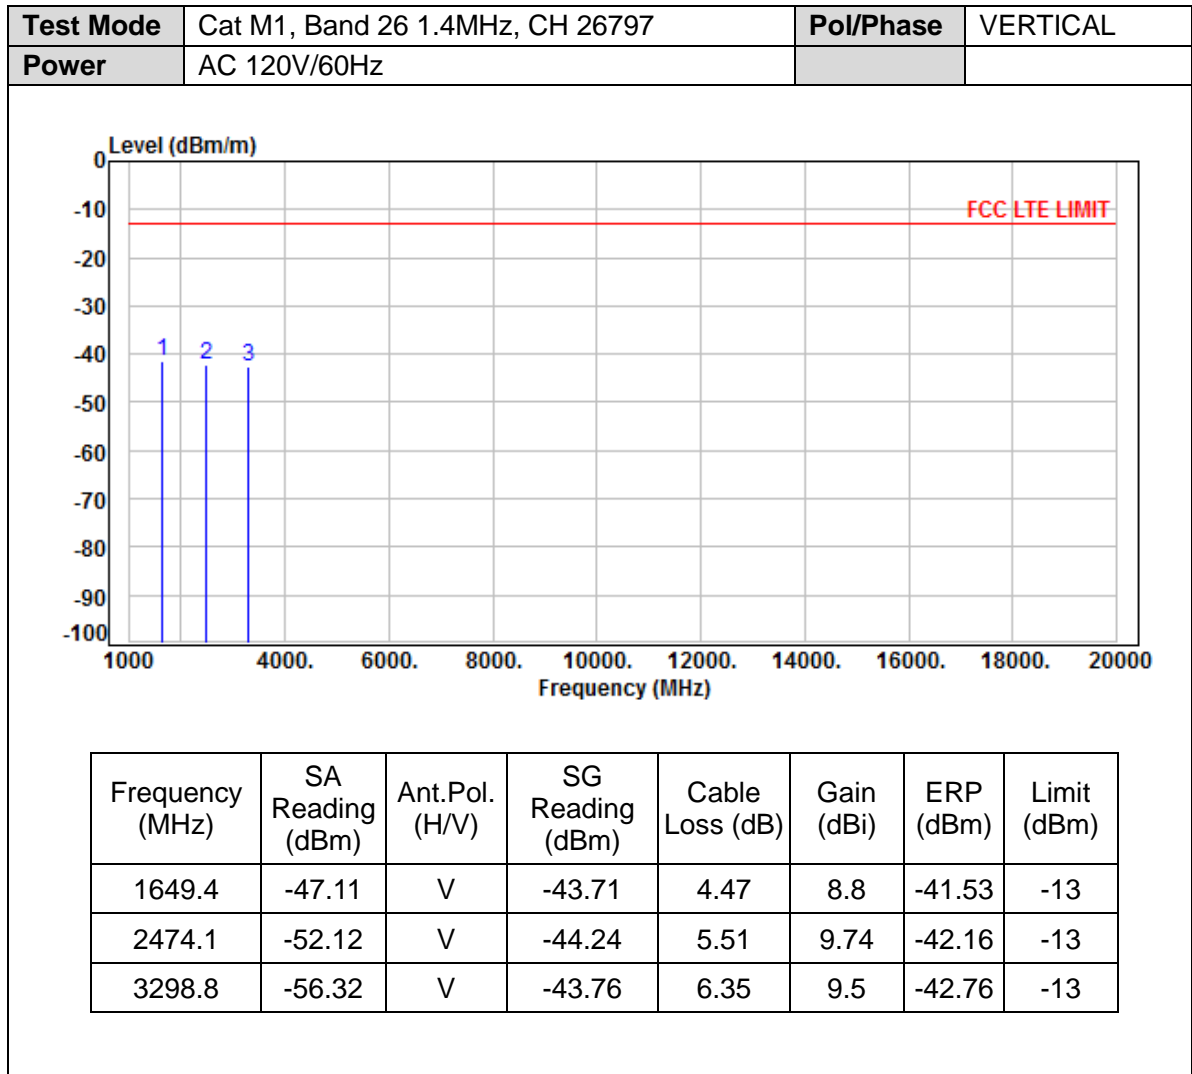




Test Mode	Cat M1, Band 26 1.4MHz, CH 26797	Pol/Phase	HORIZONTAL
Power	AC 120V/60Hz		

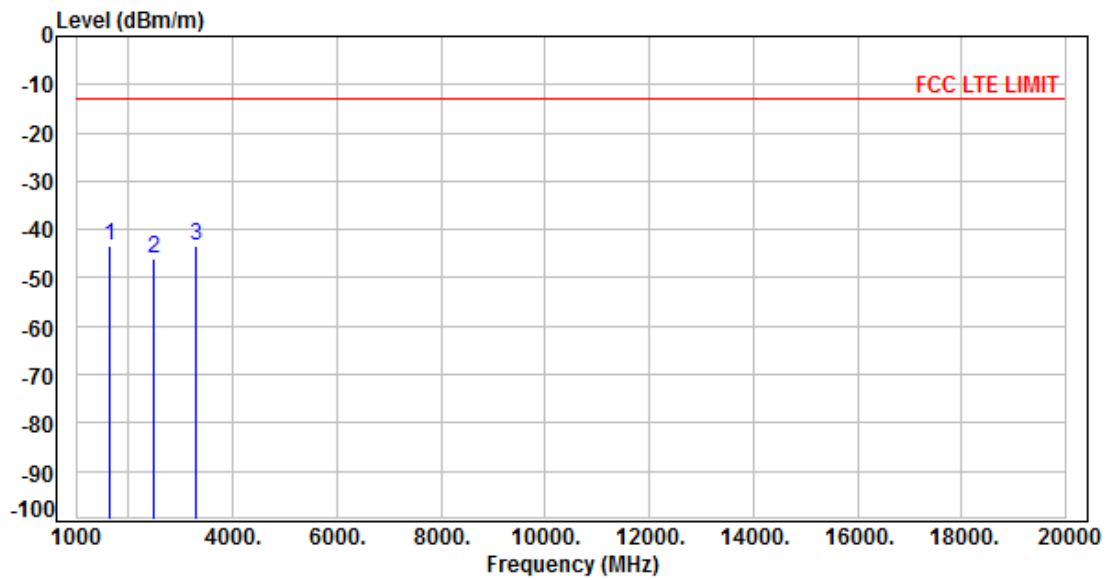

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1649.4	-49	H	-45.44	4.47	8.8	-43.26	-13
2474.1	-55.59	H	-47.96	5.51	9.74	-45.88	-13
3298.8	-56.53	H	-44.16	6.35	9.5	-43.16	-13




Test Mode	Cat M1, Band 26 1.4MHz, CH 26915	Pol/Phase	VERTICAL
Power	AC 120V/60Hz		

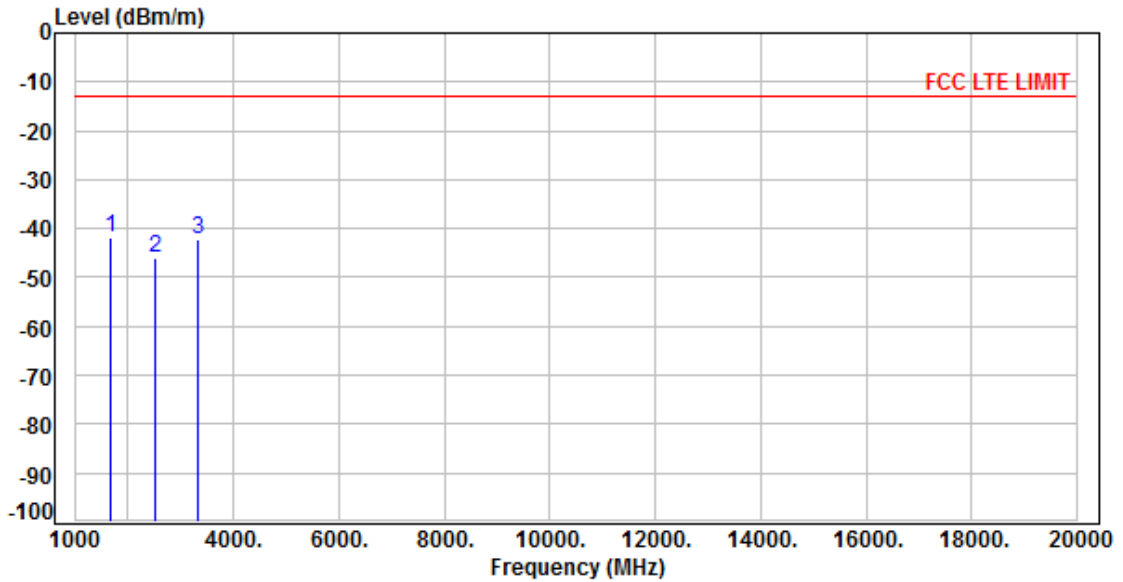

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1673	-47.63	V	-43.93	4.5	8.7	-41.88	-13
2509.5	-56.21	V	-48.11	5.55	9.7	-46.11	-13
3346	-55.87	V	-43.06	6.4	9.5	-42.11	-13




Test Mode	Cat M1, Band 26 1.4MHz, CH 26915	Pol/Phase	HORIZONTAL
Power	AC 120V/60Hz		

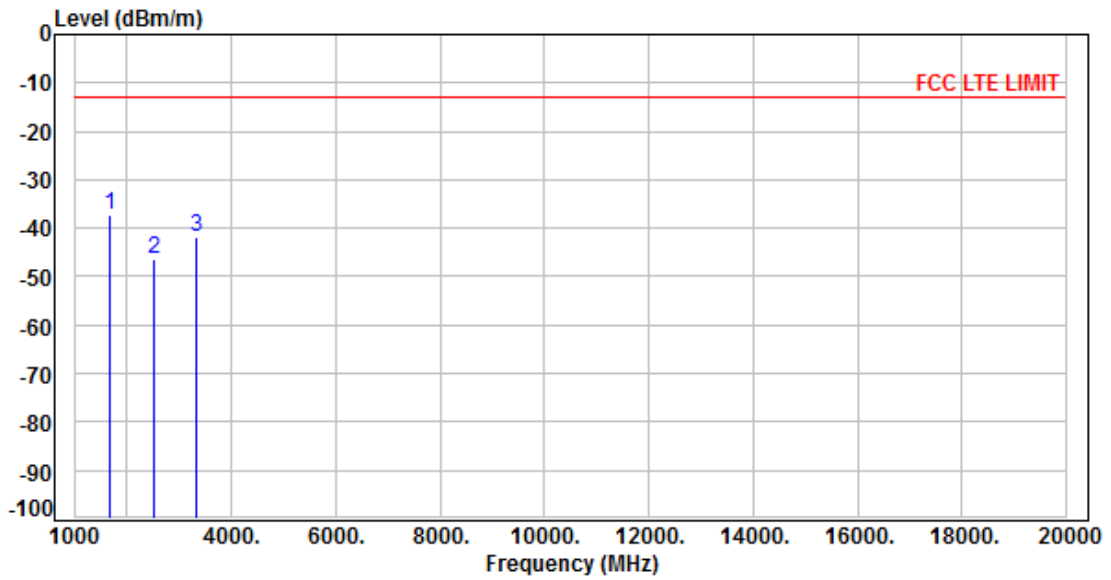

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1673	-43.07	H	-39.2	4.5	8.7	-37.15	-13
2509.5	-56.1	H	-48.28	5.55	9.7	-46.28	-13
3346	-55.33	H	-42.72	6.4	9.5	-41.77	-13




Test Mode	Cat M1, Band 26 1.4MHz, CH 27033	Pol/Phase	VERTICAL
Power	AC 120V/60Hz		

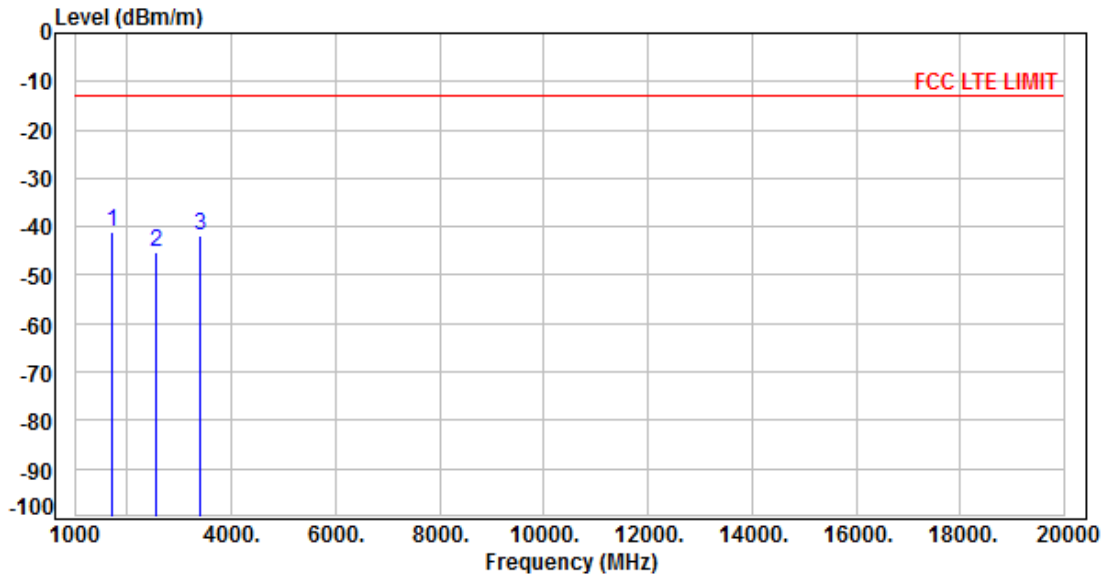

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1696.6	-47.17	V	-43.1	4.53	8.53	-41.25	-13
2544.9	-55.46	V	-47.17	5.59	9.7	-45.21	-13
3393.2	-55.86	V	-42.88	6.44	9.59	-41.88	-13




Test Mode	Cat M1, Band 2 1.4MHz, CH 27033	Pol/Phase	HORIZONTAL
Power	AC 120V/60Hz		

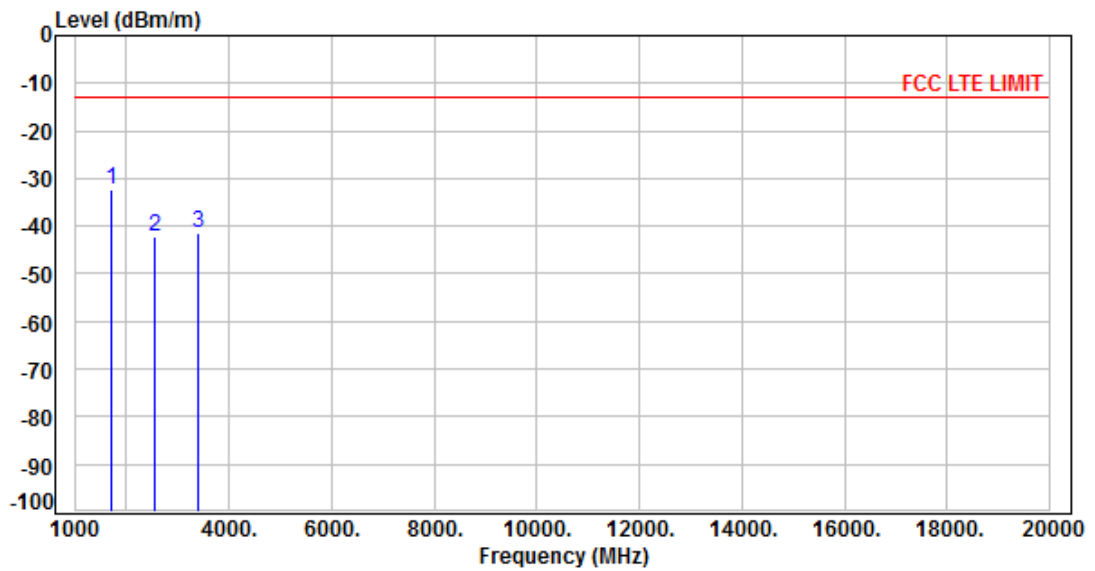

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1696.6	-38.28	H	-34.03	4.53	8.53	-32.18	-13
2544.9	-52.31	H	-44.28	5.59	9.7	-42.32	-13
3393.2	-55.3	H	-42.55	6.44	9.59	-41.55	-13




Test Mode	NB-IoT, Band 26, CH 26792	Pol/Phase	VERTICAL
Power	AC 120V/60Hz		

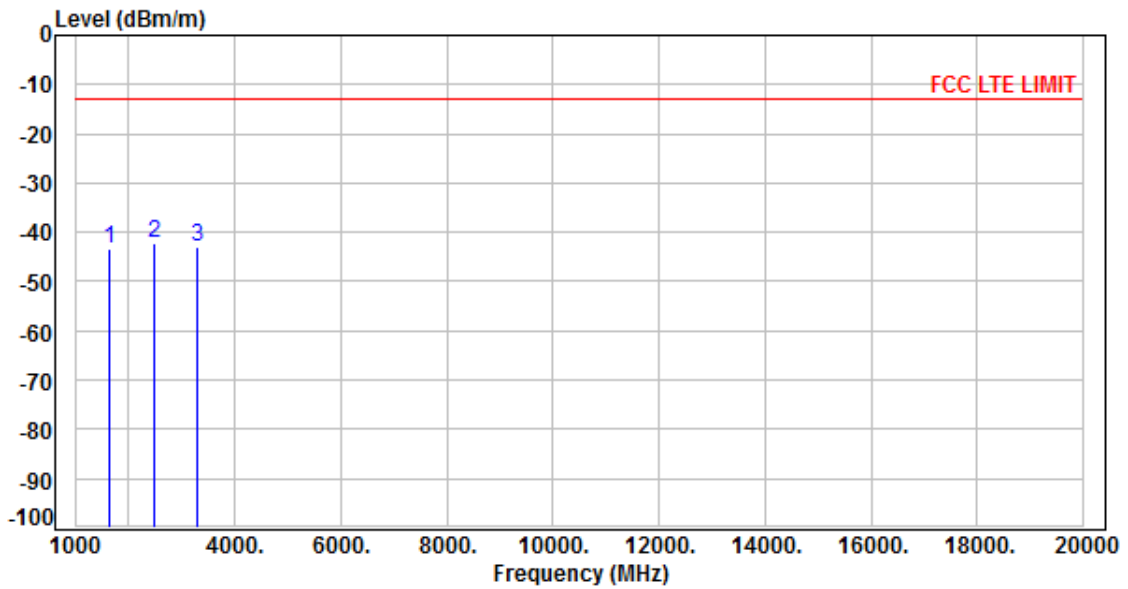

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1648.4	-48.75	V	-45.36	4.47	8.8	-43.18	-13
2472.6	-52.13	V	-44.23	5.51	9.72	-42.17	-13
3296.8	-56.53	V	-43.99	6.35	9.5	-42.99	-13




Test Mode	NB-IoT, Band 26, CH 26792	Pol/Phase	HORIZONTAL
Power	AC 120V/60Hz		

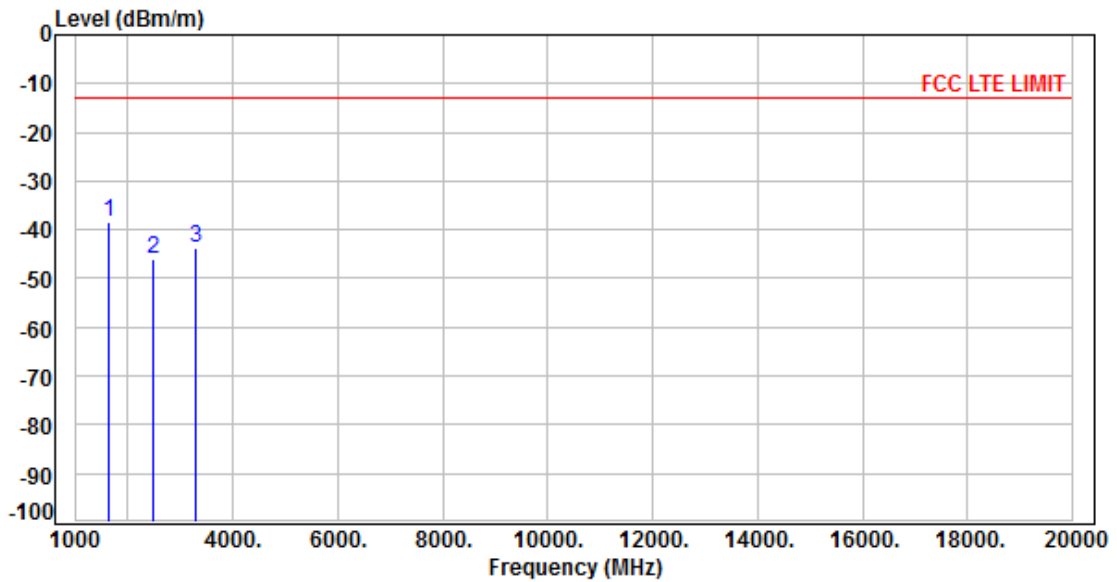

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1648.4	-44.21	H	-40.66	4.47	8.8	-38.48	-13
2472.6	-55.83	H	-48.18	5.51	9.72	-46.12	-13
3296.8	-57.08	H	-44.72	6.35	9.5	-43.72	-13




Test Mode	NB-IoT, Band 26, CH 26915	Pol/Phase	VERTICAL
Power	AC 120V/60Hz		

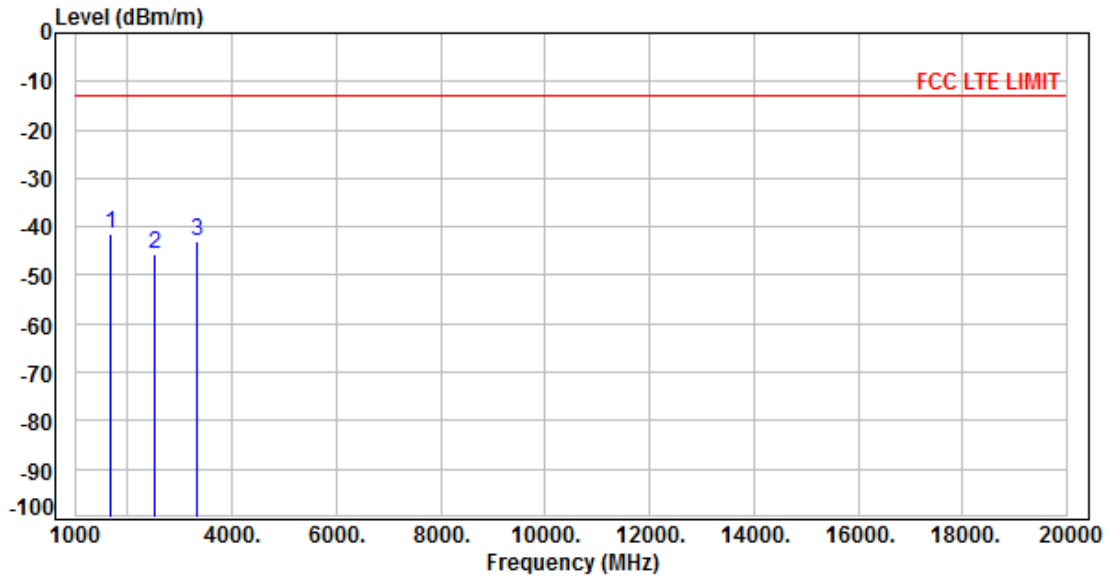

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1673	-47.08	V	-43.38	4.5	8.7	-41.33	-13
2509.5	-55.91	V	-47.81	5.55	9.7	-45.81	-13
3346	-56.59	V	-43.73	6.4	9.45	-42.83	-13




Test Mode	NB-IoT, Band 26, CH 26915	Pol/Phase	HORIZONTAL
Power	AC 120V/60Hz		

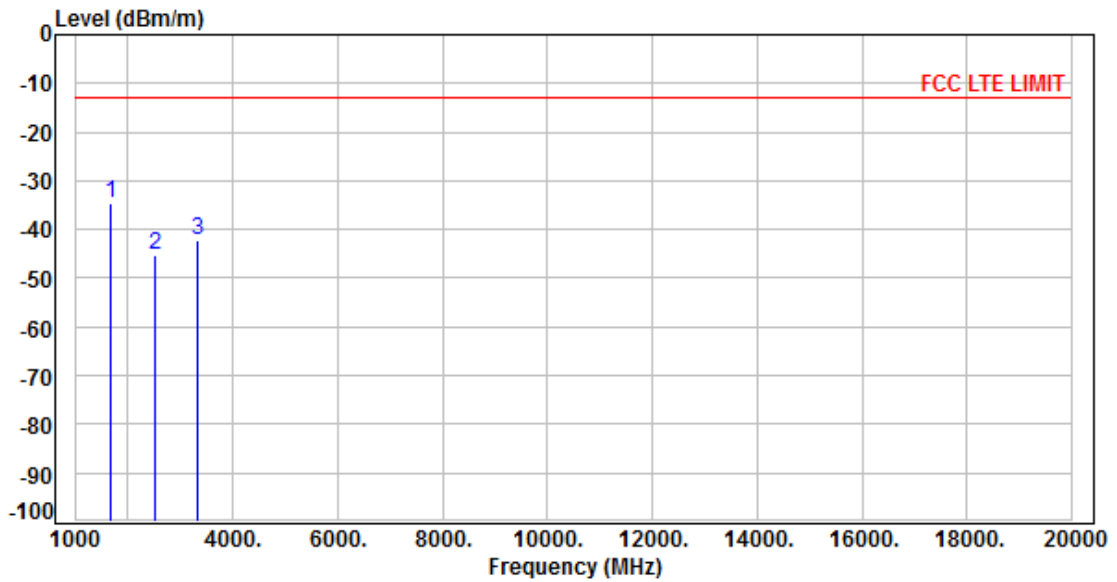

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1673	-40.44	H	-36.57	4.5	8.7	-34.52	-13
2509.5	-55.2	H	-47.38	5.55	9.7	-45.38	-13
3346	-55.67	H	-43.01	6.4	9.45	-42.11	-13




Test Mode	NB-IoT, Band 26, CH 27038	Pol/Phase	VERTICAL
Power	AC 120V/60Hz		

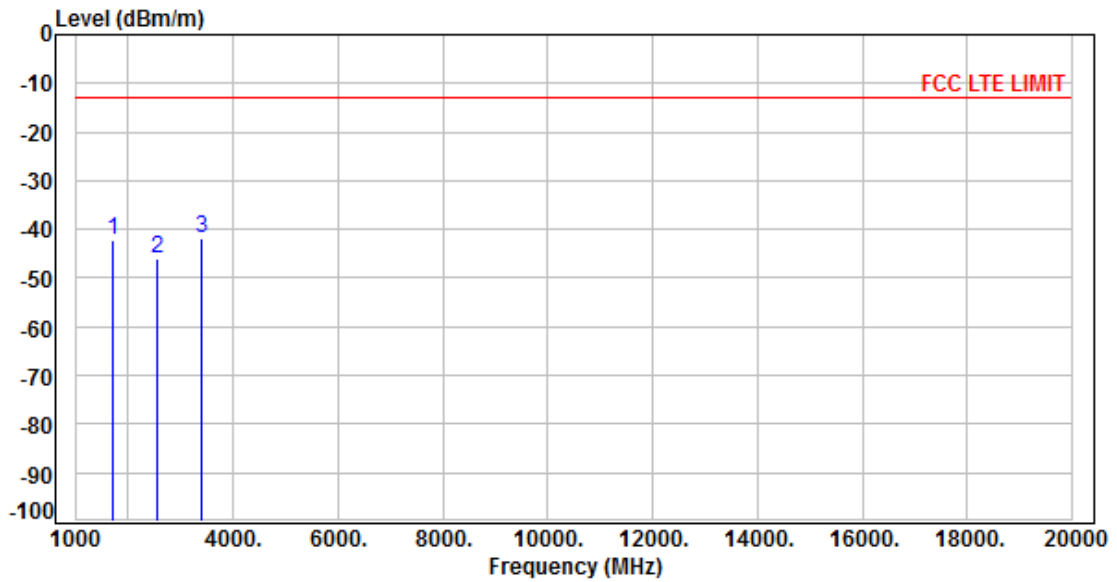

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1697.6	-48.28	V	-44.18	4.54	8.52	-42.35	-13
2546.4	-56.39	V	-48.09	5.59	9.7	-46.13	-13
3395.2	-55.87	V	-42.89	6.44	9.59	-41.89	-13



Test Mode	NB-IoT, Band 26, CH 27038	Pol/Phase	HORIZONTAL
Power	AC 120V/60Hz		

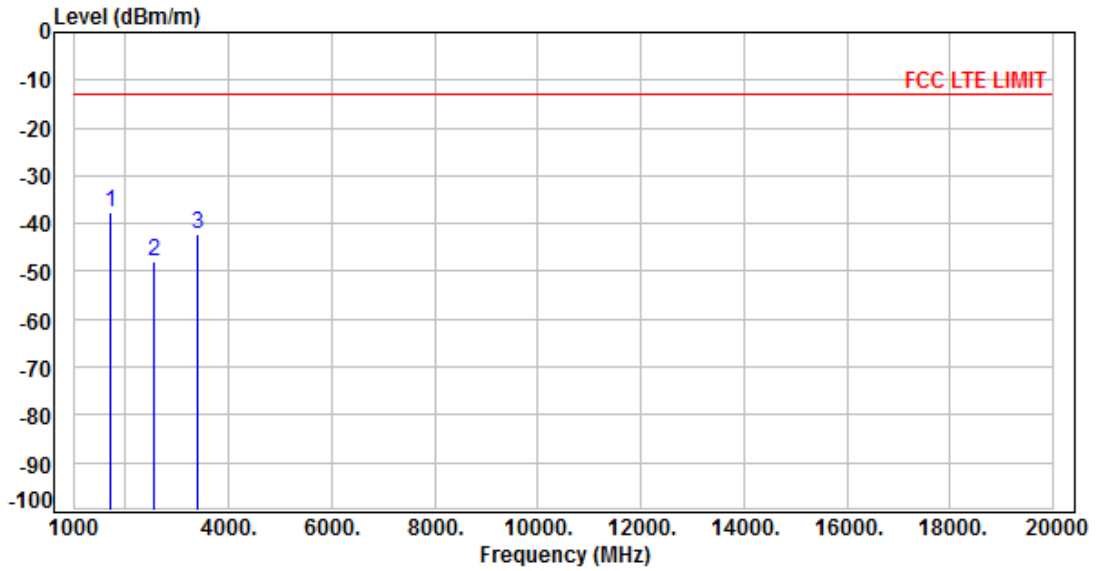

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERP (dBm)	Limit (dBm)
1697.6	-43.67	H	-39.39	4.54	8.52	-37.56	-13
2546.4	-57.73	H	-49.69	5.59	9.7	-47.73	-13
3395.2	-55.89	H	-43.13	6.44	9.59	-42.13	-13



11. Frequency Stability (Temperature & Voltage Variation) Test

11.1. Test Limit

Mobile:

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

Fixed or Base:


The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00015\%$ ($\pm 1.5\text{ppm}$) of the center frequency.

11.2. Test Procedure

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected as the following section.
5. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
6. The temperature tests were performed for the worst case.
7. Test data was recorded.



11.3. Test Setup

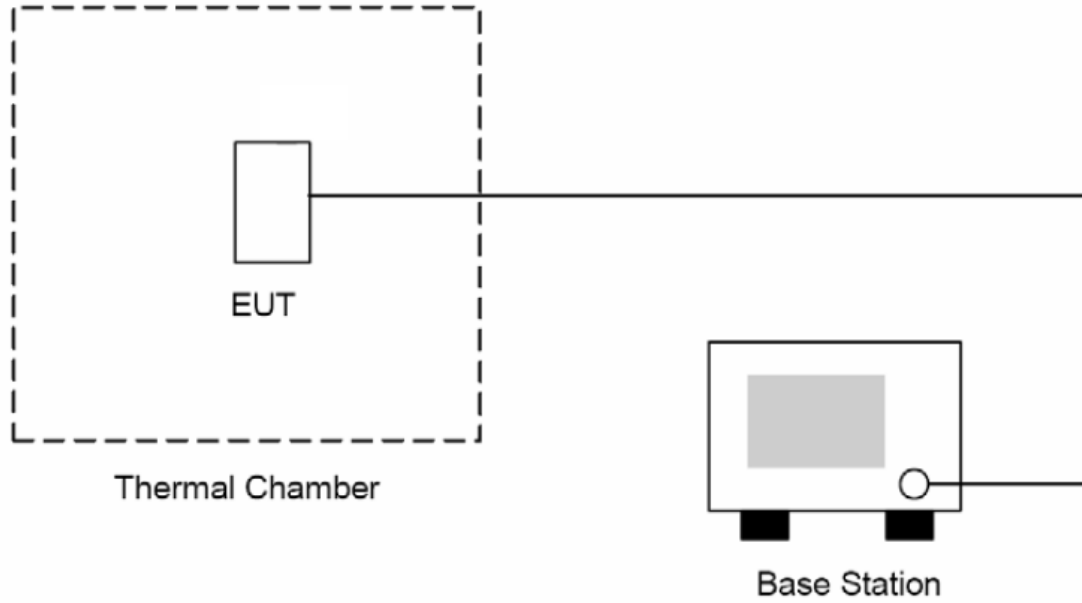



11.4. Test Result and Data

Cat M1

LTE Band 5 QPSK 10M middle channel

Frequency Stability under Temperature				
Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Frequency error (ppm)	Limit (ppm)
50	836.5	-4.15	-0.005	2.5
40	836.5	-3.12	-0.004	2.5
30	836.5	-1.23	-0.001	2.5
20	836.5	0.11	0.000	2.5
10	836.5	0.19	0.000	2.5
0	836.5	1.35	0.002	2.5
-10	836.5	1.69	0.002	2.5
-20	836.5	2.11	0.003	2.5
-30	836.5	3.54	0.004	2.5

LTE Band 5 QPSK 10M middle channel

Frequency Stability under Voltage at 20°C				
DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Frequency error (ppm)	Limit (ppm)
138	836.5	0.26	0.000	2.5
120	836.5	-1.33	-0.002	2.5
102	836.5	-1.58	-0.002	2.5



Cat M1

LTE Band 26 QPSK 15M middle channel

Frequency Stability under Temperature				
Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Frequency error (ppm)	Limit (ppm)
50	836.5	0.77	0.001	2.5
40	836.5	-1.54	-0.002	2.5
30	836.5	-1.22	-0.001	2.5
20	836.5	-2.67	-0.003	2.5
10	836.5	1.39	0.002	2.5
0	836.5	2.44	0.003	2.5
-10	836.5	1.56	0.002	2.5
-20	836.5	1.97	0.002	2.5
-30	836.5	-1.44	-0.002	2.5

LTE Band 26 QPSK 15M middle channel

Frequency Stability under Voltage at 20°C				
DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Frequency error (ppm)	Limit (ppm)
138	836.5	0.68	0.001	2.5
120	836.5	1.69	0.002	2.5
102	836.5	3.77	0.005	2.5



NB-IoT

Band 5 QPSK middle channel

Frequency Stability under Temperature				
Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Frequency error (ppm)	Limit (ppm)
50	836.5	1.31	0.002	2.5
40	836.5	1.02	0.001	2.5
30	836.5	2.16	0.003	2.5
20	836.5	2.89	0.003	2.5
10	836.5	-1.54	-0.002	2.5
0	836.5	0.22	0.000	2.5
-10	836.5	0.74	0.001	2.5
-20	836.5	-0.62	-0.001	2.5
-30	836.5	-2.59	-0.003	2.5

Band 5 QPSK middle channel

Frequency Stability under Voltage at 20°C				
DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Frequency error (ppm)	Limit (ppm)
138	836.5	2.61	0.003	2.5
120	836.5	1.37	0.002	2.5
102	836.5	0.29	0.000	2.5



NB-IoT

Band 26 QPSK middle channel

Frequency Stability under Temperature				
Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Frequency error (ppm)	Limit (ppm)
50	836.5	2.18	0.003	2.5
40	836.5	3.69	0.004	2.5
30	836.5	1.45	0.002	2.5
20	836.5	1.11	0.001	2.5
10	836.5	-0.24	0.000	2.5
0	836.5	0.95	0.001	2.5
-10	836.5	-0.11	0.000	2.5
-20	836.5	-1.35	-0.002	2.5
-30	836.5	-1.65	-0.002	2.5

Band 26 QPSK middle channel

Frequency Stability under Voltage at 20°C				
DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Frequency error (ppm)	Limit (ppm)
138	836.5	-0.29	0.000	2.5
120	836.5	1.45	0.002	2.5
102	836.5	-1.36	-0.002	2.5