

TEST REPORT

Report No.: BCTC2307757199-4E

Applicant: Shenzhen Qichang Intelligent Technology Co., Ltd

Product Name: Smart phone

Model/Type
reference: F101 PRO

Tested Date: 2023-07-03 to 2023-07-14

Issued Date: 2023-07-17


Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2BAK2-F101PRO

Product Name: Smart phone
Trademark: Fossibot
Model/Type reference: F101 PRO
F101 +, F101 PLUS, F101 S
Prepared For: Shenzhen Qichang Intelligent Technology Co., Ltd
Address: Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street, Longgang, Shenzhen
Manufacturer: Shenzhen Qichang Intelligent Technology Co., Ltd
Address: Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street, Longgang, Shenzhen
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2023-07-03
Sample tested Date: 2023-07-03 to 2023-07-14
Issue Date: 2023-07-17
Report No.: BCTC2307757199-4E
FCC Part15 15.407
Test Standards: ANSI C63.10-2013
KDB 662911 D01 v02r01
KDB 789033 D02 v02r01
Test Results: PASS

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	9
4.5 Test Mode	10
5. Test Facility And Test Instrument Used	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. Conducted Emissions	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test Procedure	14
6.4 EUT Operating Conditions	14
6.5 Test Result	15
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test Procedure	19
7.4 EUT Operating Conditions	20
7.5 Test Result	20
8. Power Spectral Density Test	35
8.1 Block Diagram Of Test Setup	35
8.2 Limit	35
8.3 Test Procedure	36
8.4 EUT Operating Conditions	36
8.5 Test Result	37
9. 26dB & 6dB & 99% Emission Bandwidth	52
9.1 Block Diagram Of Test Setup	52
9.2 Limit	52
9.3 Test Procedure	52
9.4 EUT Operating Conditions	53
9.5 Test Result	53
10. Maximum Conducted Output Power	83
10.1 Block Diagram Of Test Setup	83
10.2 Limit	83
10.3 Test Procedure	83
10.4 EUT Operating Conditions	84
10.5 Test Result	85
11. Out Of Band Emissions	100

11.1	Block Diagram Of Test Setup.....	100
11.2	Limit	100
11.3	Test Procedure	100
11.4	EUT Operating Conditions	100
11.5	Test Result.....	101
12.	Spurious RF Conducted Emissions.....	113
12.1	Block Diagram Of Test Setup.....	113
12.2	Limit	113
12.3	Test Procedure	113
12.4	Test Result.....	113
13.	Frequency Stability Measurement.....	128
13.1	Block Diagram Of Test Setup.....	128
13.2	Limit	128
13.3	Test Procedure	128
13.4	Test Result.....	129
14.	Antenna Requirement	135
14.1	Limit	135
14.2	Test Result.....	135
15.	EUT Photographs.....	136
16.	EUT Test Setup Photographs.....	137

(Note: N/A Means Not Applicable)

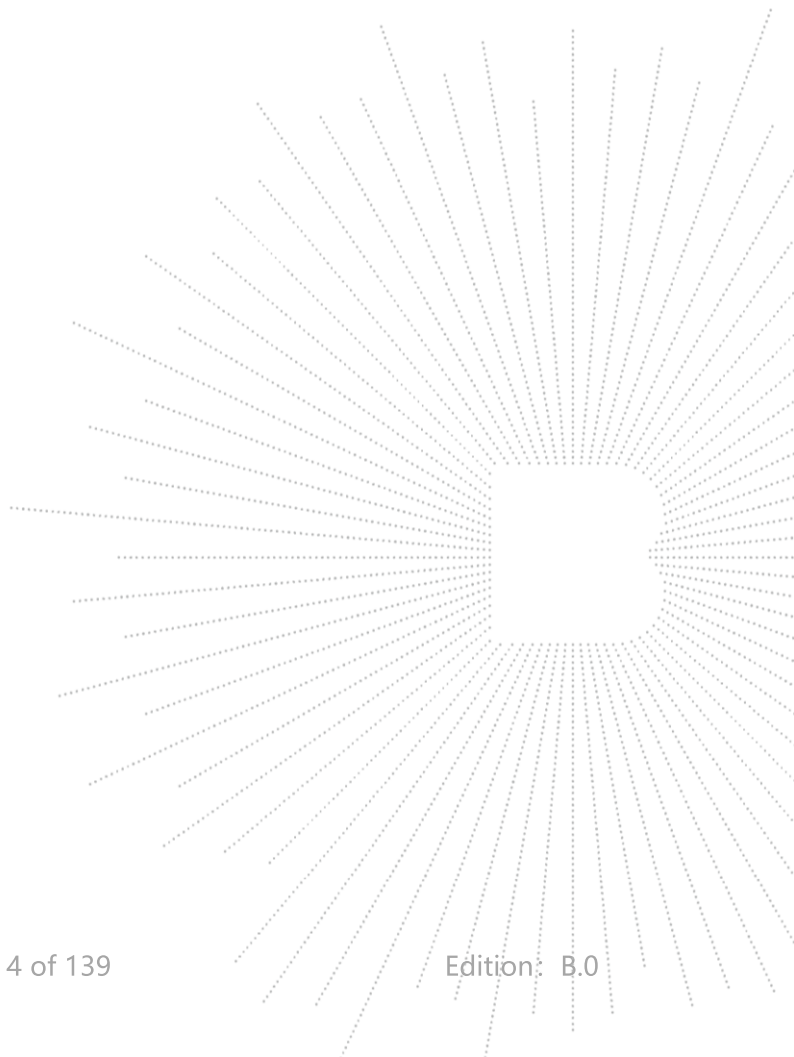

1. Version

Report No.	Issue Date	Description	Approved
BCTC2307757199-4E	2023-07-17	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	PASS
2	Conducted Emission	15.207	PASS
3	26 dB and 99% Emission Bandwidth	15.407 (a)(12) 15.1049	PASS
4	Minimum 6 dB bandwidth	15.407(e)	PASS
5	Maximum Conducted Output Power	15.407 (a)(1) 15.407 (a)(3)	PASS
6	Band Edge	2.1051, 15.407(b)(1) 15.407(b)(4)	PASS
7	Power Spectral Density	15.407 (a)(1) 15.407 (a)(3)	PASS
8	Spurious Emissions at Antenna Terminals	2.1051, 15.407(b)	PASS
9	Antenna Requirement	15.203	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup


4.1 Product Information

Model/Type Ref.:	F101 PRO F101 +, F101 PLUS, F101 S
Model differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	TE197_MAIN_PCB_V1.0
Software Version:	FOSSiBOT_F101 Pro_E
IEEE 802.11 WLAN Mode Supported	802.11a/n/ac(20MHz channel bandwidth) 802.11n/ac(40MHz channel bandwidth) 802.11ac(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n(HT20); 5190-5230MHz for 802.11n(HT40); 5210MHz for 802.11 ac80; 5745-5825 MHz for 802.11a/n(HT20); 5755-5795 MHz for 802.11n(HT40); 5775MHz for 802.11 ac80;
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
Number Of Channel	4 channels for 802.11a/n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; 5 channels for 802.11a/n20 in the 5745-5825MHz band ; 2 channels for 802.11 n40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band
Antenna installation:	Internal antenna
Antenna Gain:	1.8 dBi
Ratings:	DC 5V from adapter/DC 3.85V from battery
Adapter Information:	Model: HJ-FC017K7-US Input: 100-240V- 50/60Hz 0.6A Output: 5.0V  2.0A OR 7.0V  2.0A OR 9.0V  2.0A OR 12.0V  1.5A 18.0W


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Smart phone	Fossibot	F101 PRO	N/A	EUT
E-2	Adapter	N/A	HJ-FC017K7-US	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1M	DC cable unshielded

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

5.1G

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210

5.8G

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11ac 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155


Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We're testing antenna A data.

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Parameters	DEF	DEF	DEF

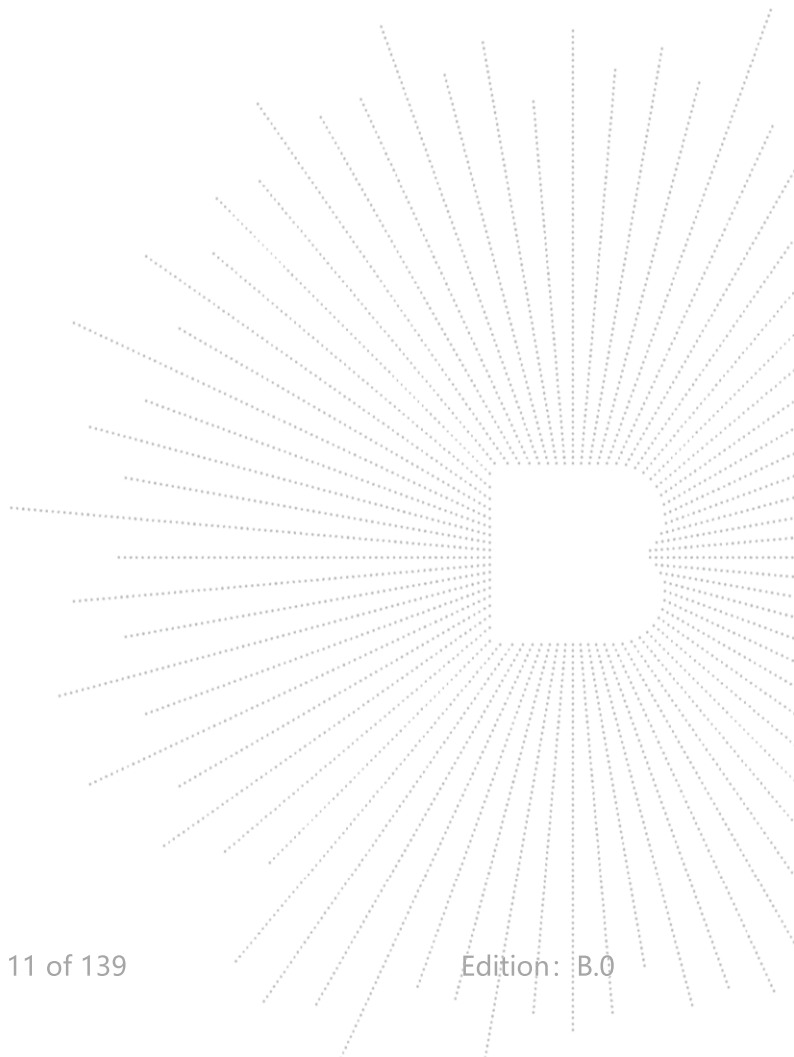

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
LISN	R&S	ENV216	101375	May 15, 2023	May 14, 2024
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 15, 2023	May 14, 2024


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 15, 2023	May 14, 2024
Power Sensor (AV)	Keysight	E9300A	\	May 15, 2023	May 14, 2024
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 15, 2023	May 14, 2024
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 15, 2023	May 14, 2024
Communication test set	R&S	CMW500	126173	Nov. 08, 2022	Nov. 07, 2023
Radio frequency control box	MAIWEI	MW200-RFC B	\	\	\
Software	MAIWEI	MTS 8200	\	\	\

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
Receiver	R&S	ESRP	101154	May 15, 2023	May 14, 2024
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 15, 2023	May 14, 2024
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 29, 2023	May 28, 2024
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 31, 2023	May 30, 2024
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 15, 2023	May 14, 2024
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 31, 2023	May 30, 2024
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 15, 2023	May 14, 2024
Horn Antenn(18GHz -40GHz)	Schwarzbeck	BBHA9170	00822	May 31, 2023	May 30, 2024
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 15, 2023	May 14, 2024
Communication test set	R&S	CMW500	126173	Nov. 08, 2022	Nov. 07, 2023
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

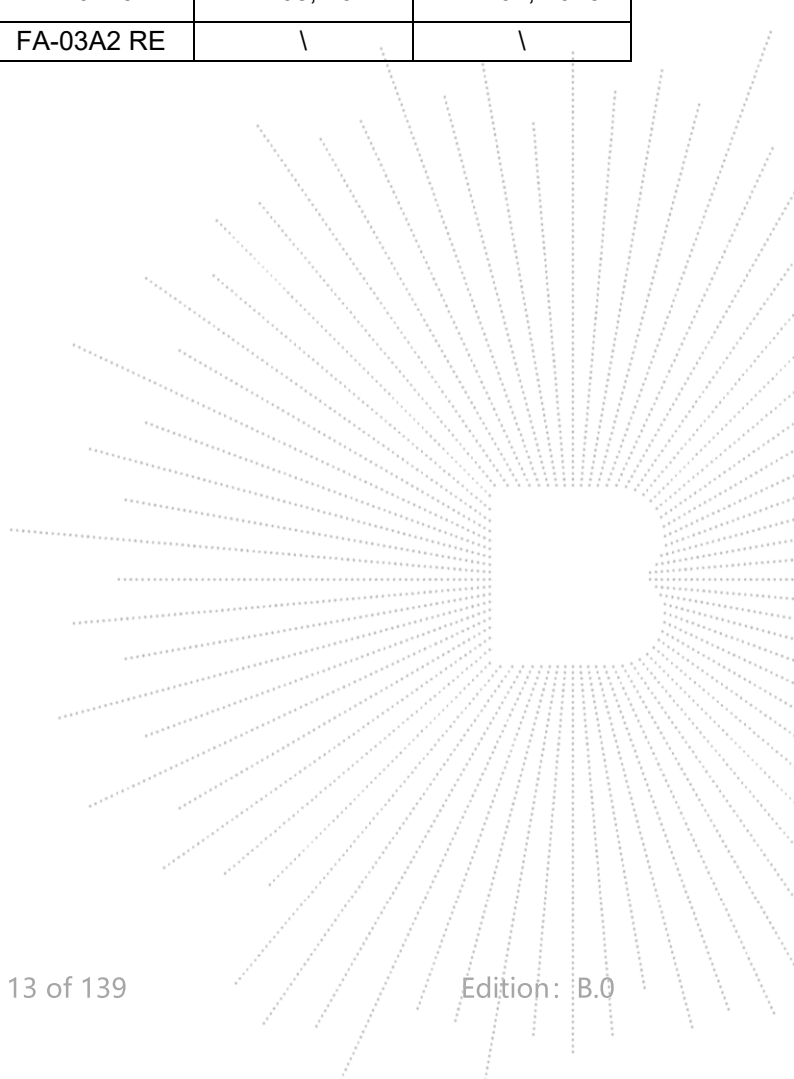

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

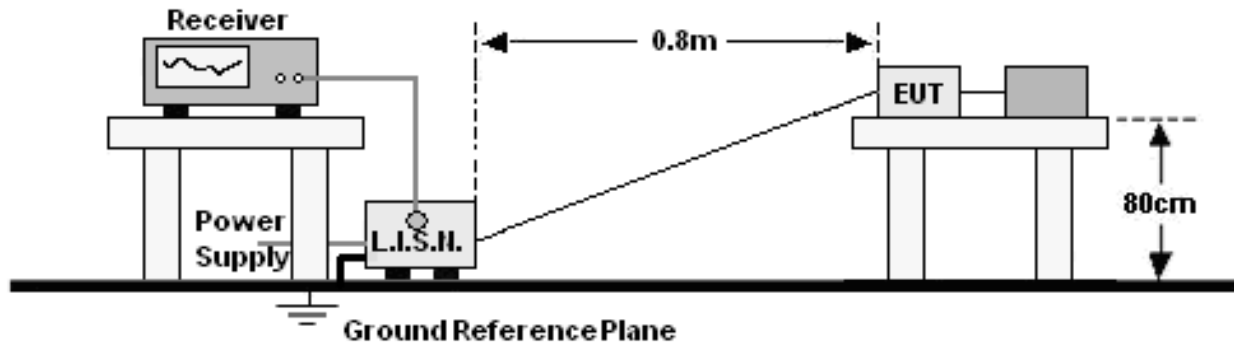

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 1	Test Voltage :	AC120V/60Hz

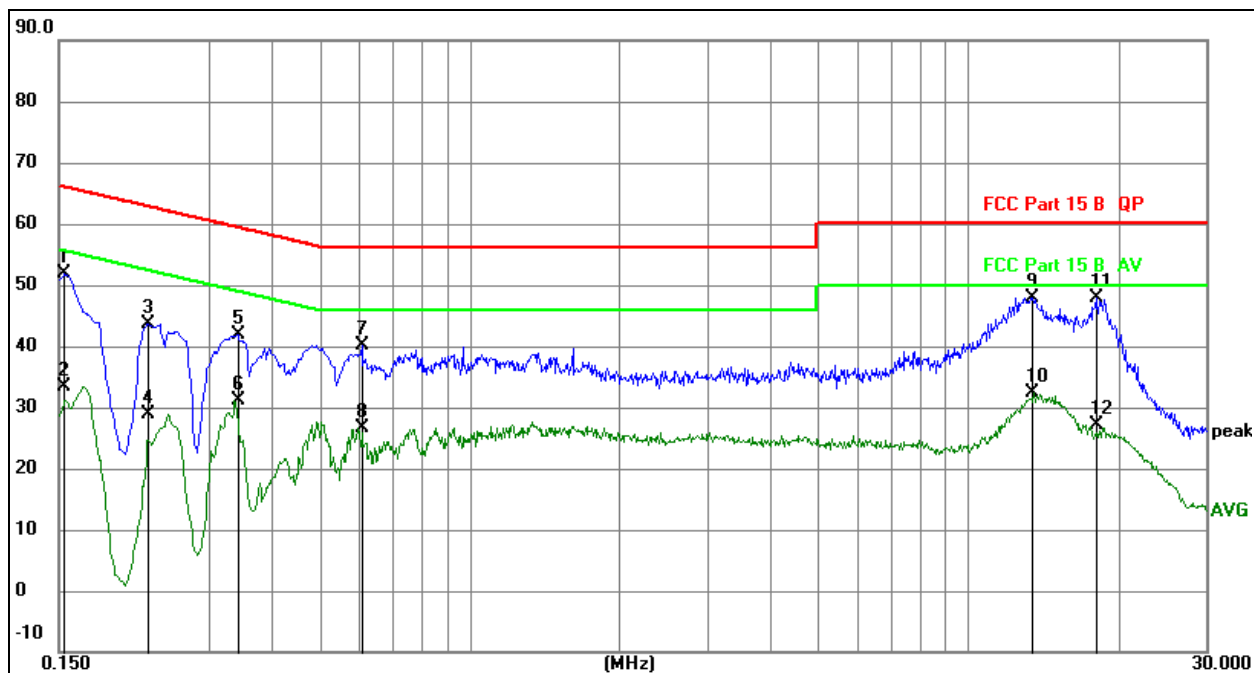


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over= Measurement-Limit

No. Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.1539	42.31	9.52	51.83	65.79	-13.96	QP
2	0.1539	23.97	9.52	33.49	55.79	-22.30	AVG
3	0.2256	34.09	9.61	43.70	62.61	-18.91	QP
4	0.2256	19.26	9.61	28.87	52.61	-23.74	AVG
5	0.3428	32.15	9.61	41.76	59.14	-17.38	QP
6	0.3428	21.42	9.61	31.03	49.14	-18.11	AVG
7	0.6075	30.61	9.62	40.23	56.00	-15.77	QP
8	0.6075	17.00	9.62	26.62	46.00	-19.38	AVG
9 *	13.3372	38.27	9.66	47.93	60.00	-12.07	QP
10	13.3372	22.66	9.66	32.32	50.00	-17.68	AVG
11	18.0393	38.06	9.73	47.79	60.00	-12.21	QP
12	18.0393	17.46	9.73	27.19	50.00	-22.81	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 1	Test Voltage :	AC120V/60Hz

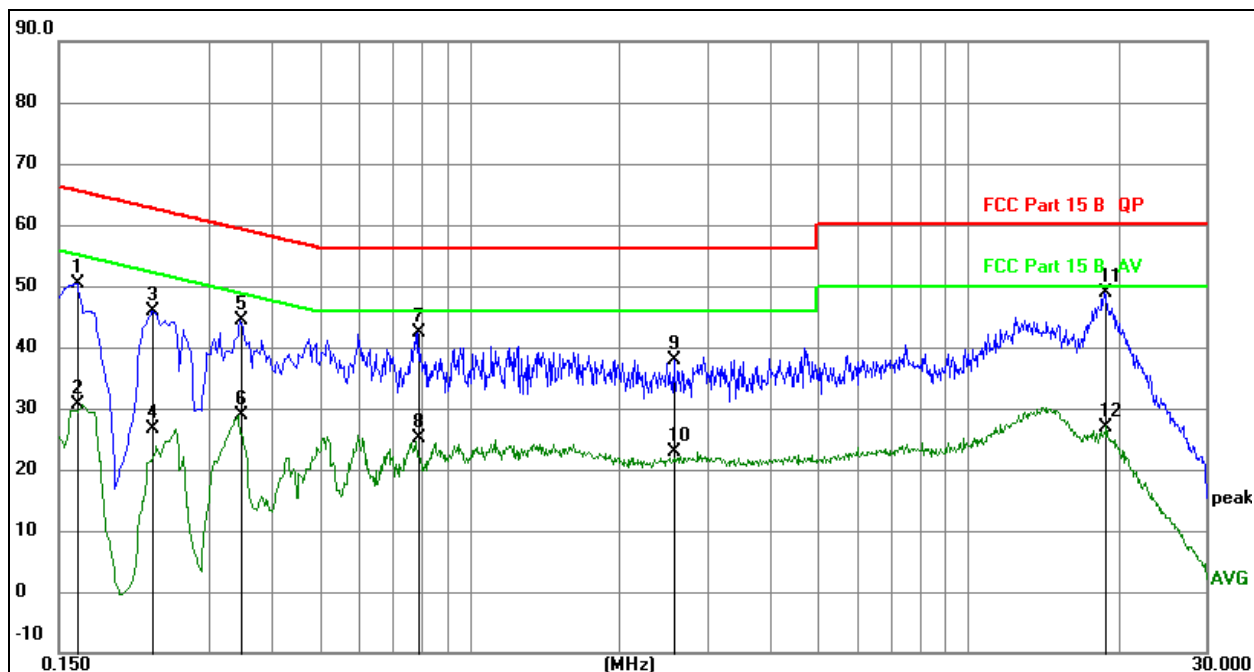

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over1 Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1635	40.87	9.54	50.41	65.28	-14.87	QP
2		0.1635	21.12	9.54	30.66	55.28	-24.62	AVG
3		0.2310	36.23	9.61	45.84	62.41	-16.57	QP
4		0.2310	17.06	9.61	26.67	52.41	-25.74	AVG
5		0.3480	34.83	9.61	44.44	59.01	-14.57	QP
6		0.3480	19.18	9.61	28.79	49.01	-20.22	AVG
7		0.7890	32.83	9.65	42.48	56.00	-13.52	QP
8		0.7890	15.44	9.65	25.09	46.00	-20.91	AVG
9		2.5800	28.24	9.76	38.00	56.00	-18.00	QP
10		2.5800	13.10	9.76	22.86	46.00	-23.14	AVG
11	*	18.8160	39.17	9.75	48.92	60.00	-11.08	QP
12		18.8160	17.25	9.75	27.00	50.00	-23.00	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

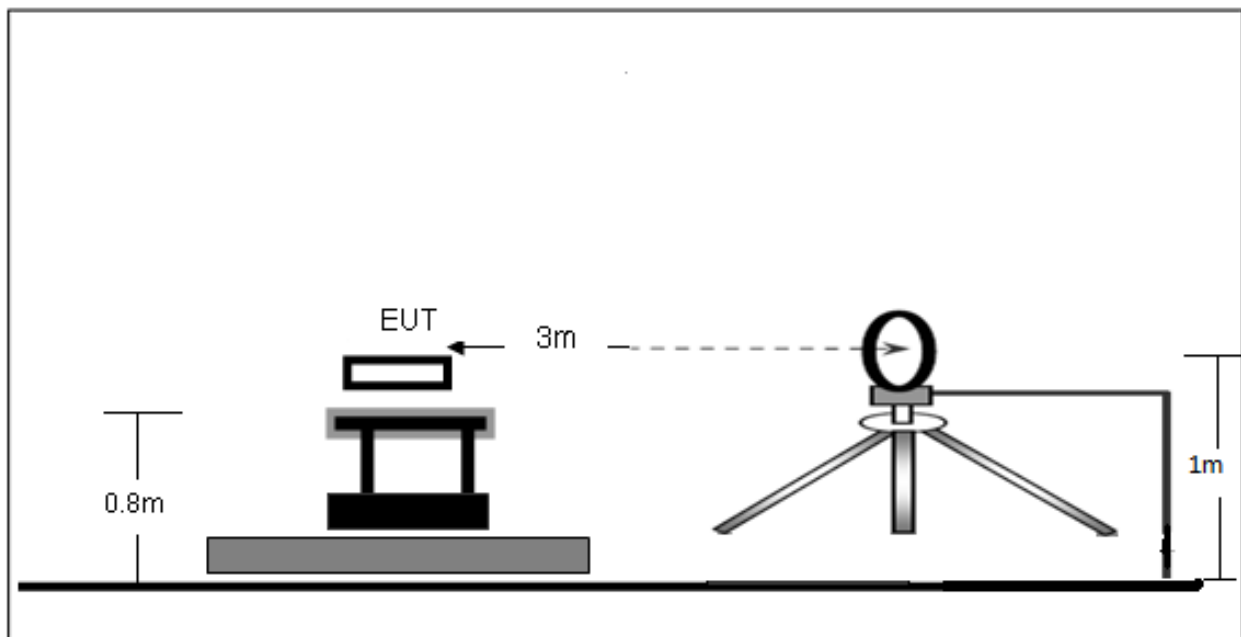

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

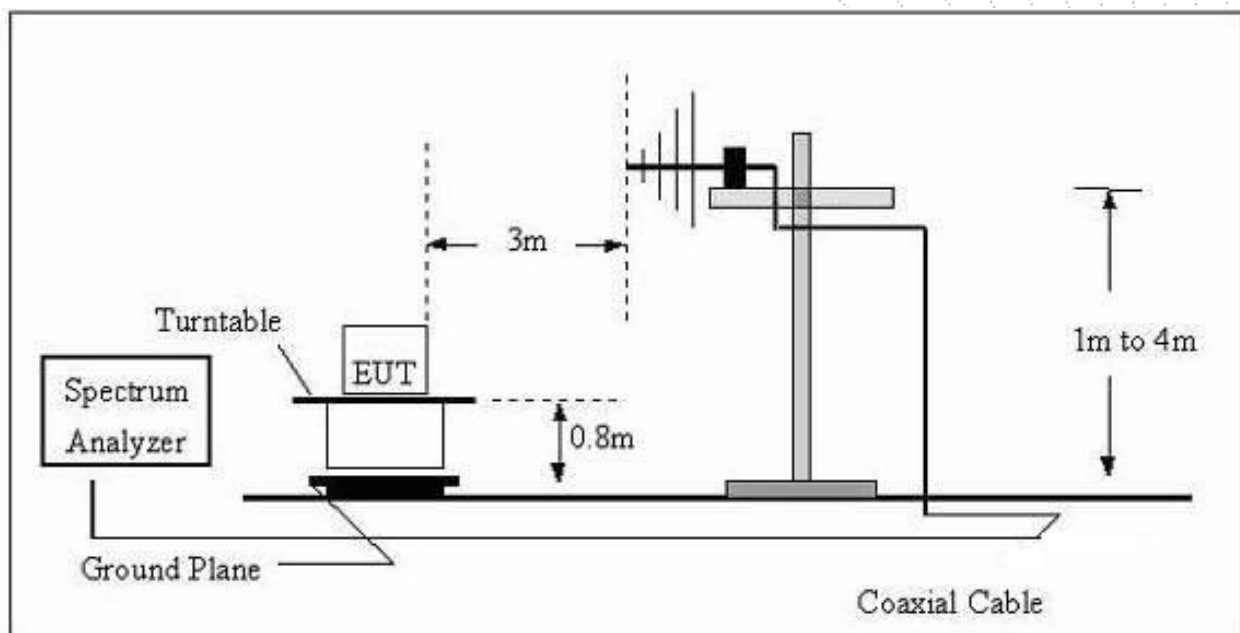

(C) Radiated Emission Test-Up Frequency Above 1GHz

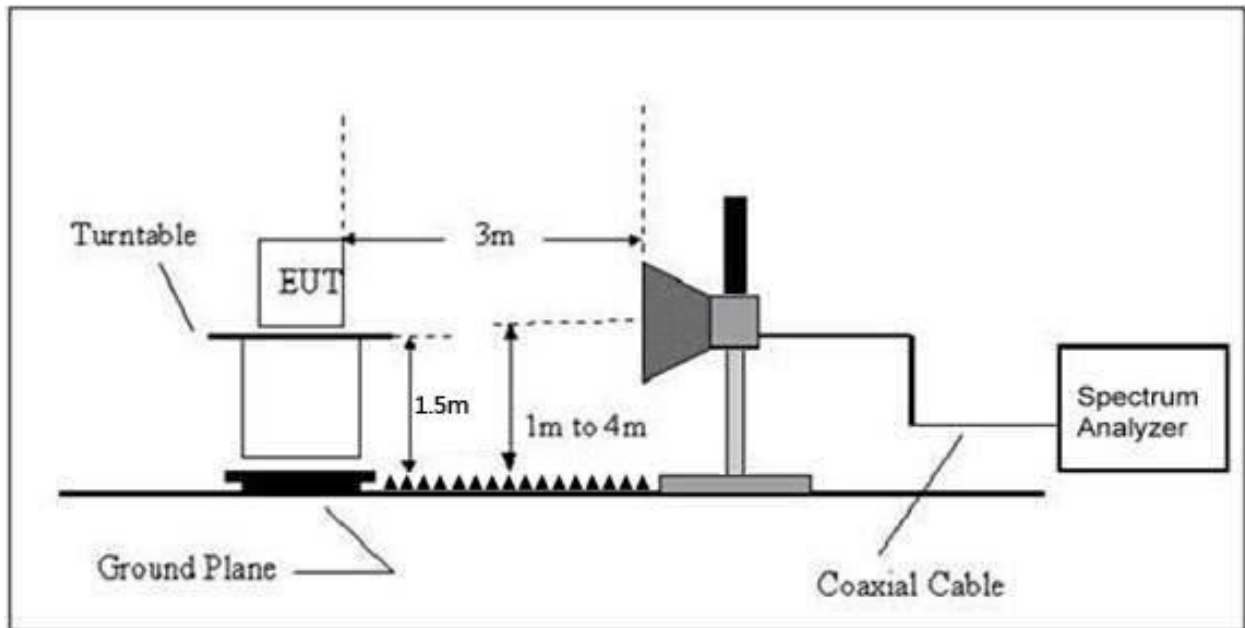

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.

It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance}) (dB)$;

Limit line = specific limits(dBuV) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 2	Test Voltage :	AC120V/60Hz

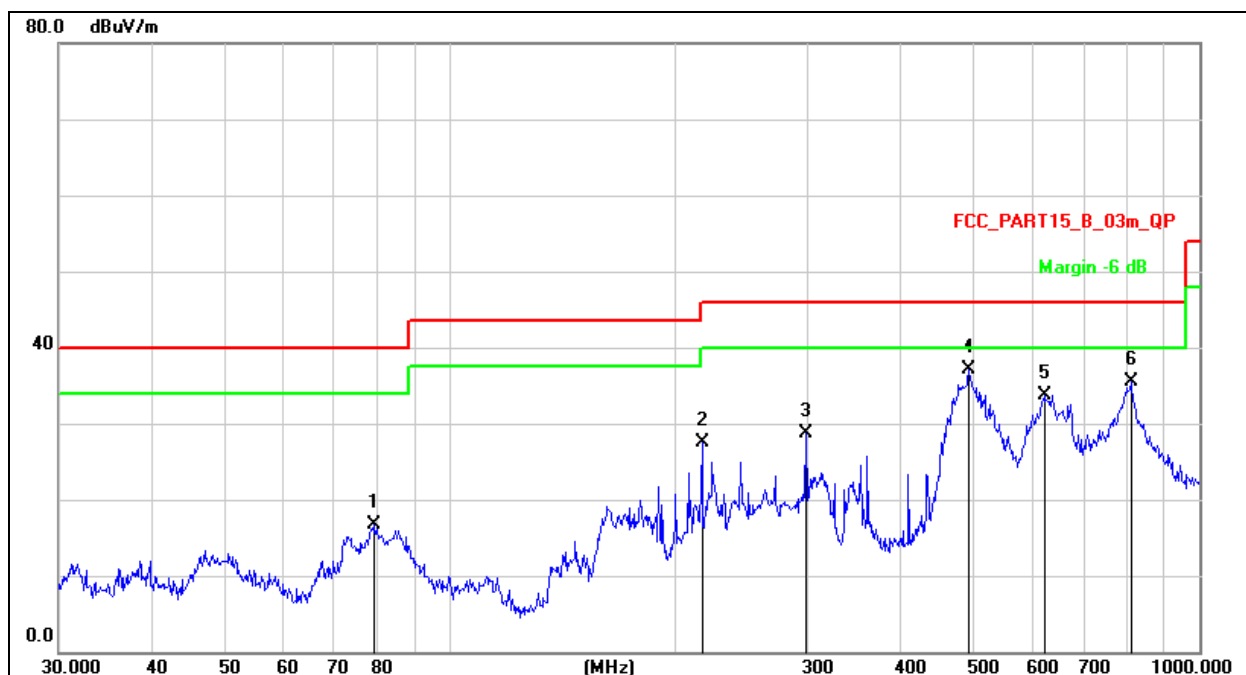


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		79.2426	38.12	-21.44	16.68	40.00	-23.32	QP
2		216.7828	44.33	-16.85	27.48	46.00	-18.52	QP
3		298.2681	43.39	-14.62	28.77	46.00	-17.23	QP
4	*	492.4685	47.63	-10.44	37.19	46.00	-8.81	QP
5		620.7096	41.78	-8.11	33.67	46.00	-12.33	QP
6		810.2654	41.02	-5.48	35.54	46.00	-10.46	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 2	Test Voltage :	AC120V/60Hz

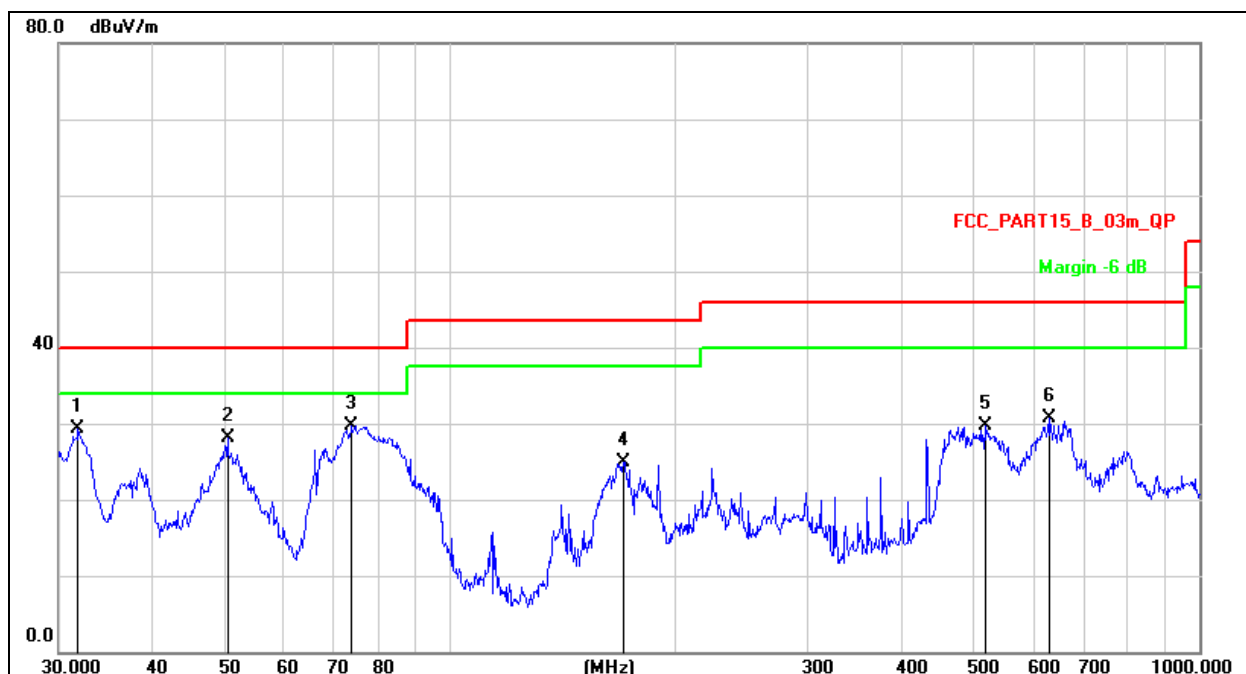

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over= Measurement-Limit

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	31.8427	47.45	-18.07	29.38	40.00	-10.62	QP
2	50.4089	43.83	-15.65	28.18	40.00	-11.82	QP
3 *	73.8756	50.29	-20.57	29.72	40.00	-10.28	QP
4	170.1948	44.54	-19.56	24.98	43.50	-18.52	QP
5	517.2480	39.66	-10.00	29.66	46.00	-16.34	QP
6	629.4772	38.76	-7.99	30.77	46.00	-15.23	QP

Between 1GHz – 40GHz

Test Mode:	TX(5.1G) - 802.11a
------------	--------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.118	62.80	5.94	35.40	44.00	60.14	68.2	-8.06	PK
V	4434.118	43.92	5.94	35.40	44.00	41.26	54	-12.74	AV
V	10360.157	62.77	8.46	39.75	44.50	66.48	68.2	-1.72	PK
V	10360.157	43.13	8.46	39.75	44.50	46.84	54	-7.16	AV
V	15540.033	63.62	10.12	38.80	44.10	68.44	74	-5.56	PK
V	15540.033	43.55	10.12	38.80	42.70	49.77	54	-4.23	AV
H	4434.005	64.88	5.94	35.18	44.00	62.00	68.2	-6.20	PK
H	4434.005	43.85	5.94	35.18	44.00	40.97	54	-13.03	AV
H	10360.075	50.00	8.46	38.71	44.50	52.67	68.2	-15.53	PK
H	10360.075	40.44	8.46	38.71	44.50	43.11	54	-10.89	AV
H	15540.125	52.02	10.12	38.38	44.10	56.42	74	-17.58	PK
H	15540.125	44.02	10.12	38.38	44.10	48.42	54	-5.58	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.138	61.25	6.48	36.35	44.05	60.03	74	-13.97	PK
V	4592.138	43.22	6.48	36.35	44.05	42.00	54	-12.00	AV
V	10400.044	63.19	8.47	37.88	44.51	65.03	68.2	-3.17	PK
V	10400.044	43.44	8.47	37.88	44.51	45.28	54	-8.72	AV
V	15600.036	63.98	10.12	38.80	44.10	68.80	74	-5.20	PK
V	15600.036	43.58	10.12	38.80	42.70	49.80	54	-4.20	AV
H	4592.128	63.57	6.48	36.37	44.05	62.37	74	-11.63	PK
H	4592.128	43.72	6.48	36.37	44.05	42.52	54	-11.48	AV
H	10400.195	50.69	8.47	38.64	44.50	53.30	68.2	-14.90	PK
H	10400.195	43.23	8.47	38.64	44.50	45.84	54	-8.16	AV
H	15600.162	52.50	10.12	38.38	44.10	56.90	74	-17.10	PK
H	15600.162	40.55	10.12	38.38	44.10	44.95	54	-9.05	AV
High Channel (5240 MHz)-Above 1G									
V	4739.069	64.87	7.10	37.24	43.50	65.71	74	-8.29	PK
V	4739.069	43.66	7.10	37.24	43.50	44.50	54	-9.50	AV
V	10480.159	63.54	8.46	37.68	44.50	65.18	68.2	-3.02	PK
V	10480.159	43.00	8.46	37.68	44.50	44.64	54	-9.36	AV
V	15720.126	61.80	10.12	38.80	44.10	66.62	74	-7.38	PK
V	15720.126	43.94	10.12	38.80	42.70	50.16	54	-3.84	AV
H	4739.161	60.53	7.10	37.24	43.50	61.37	74	-12.63	PK
H	4739.161	43.32	7.10	37.24	43.50	44.16	54	-9.84	AV
H	10480.132	51.03	8.46	38.57	44.50	53.56	68.2	-14.64	PK
H	10480.132	41.32	8.46	38.57	44.50	43.85	54	-10.15	AV
H	15720.161	54.78	10.12	38.38	44.10	59.18	74	-14.82	PK
H	15720.161	43.84	10.12	38.38	44.10	48.24	54	-5.76	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT20
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.111	62.08	5.94	35.40	44.00	59.42	68.2	-8.78	PK
V	4434.111	43.24	5.94	35.40	44.00	40.58	54	-13.42	AV
V	10360.188	61.19	8.46	39.75	44.50	64.90	68.2	-3.30	PK
V	10360.188	43.79	8.46	39.75	44.50	47.50	54	-6.50	AV
V	15540.106	64.38	10.12	38.80	44.10	69.20	74	-4.80	PK
V	15540.106	43.65	10.12	38.80	42.70	49.87	54	-4.13	AV
H	4434.162	64.79	5.94	35.18	44.00	61.91	68.2	-6.29	PK
H	4434.162	43.13	5.94	35.18	44.00	40.25	54	-13.75	AV
H	10360.128	53.04	8.46	38.71	44.50	55.71	68.2	-12.49	PK
H	10360.128	43.49	8.46	38.71	44.50	46.16	54	-7.84	AV
H	15540.079	50.32	10.12	38.38	44.10	54.72	74	-19.28	PK
H	15540.079	40.02	10.12	38.38	44.10	44.42	54	-9.58	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.077	60.65	6.48	36.35	44.05	59.43	74	-14.57	PK
V	4592.077	43.96	6.48	36.35	44.05	42.74	54	-11.26	AV
V	10400.017	61.46	8.47	37.88	44.51	63.30	68.2	-4.90	PK
V	10400.017	43.62	8.47	37.88	44.51	45.46	54	-8.54	AV
V	15600.077	62.40	10.12	38.80	44.10	67.22	74	-6.78	PK
V	15600.077	43.64	10.12	38.80	42.70	49.86	54	-4.14	AV
H	4592.046	62.76	6.48	36.37	44.05	61.56	74	-12.44	PK
H	4592.046	43.86	6.48	36.37	44.05	42.66	54	-11.34	AV
H	10400.028	51.49	8.47	38.64	44.50	54.10	68.2	-14.10	PK
H	10400.028	42.69	8.47	38.64	44.50	45.30	54	-8.70	AV
H	15600.097	51.02	10.12	38.38	44.10	55.42	74	-18.58	PK
H	15600.097	42.98	10.12	38.38	44.10	47.38	54	-6.62	AV
High Channel (5240 MHz)-Above 1G									
V	4739.116	61.91	7.10	37.24	43.50	62.75	74	-11.25	PK
V	4739.116	43.41	7.10	37.24	43.50	44.25	54	-9.75	AV
V	10480.165	61.53	8.46	37.68	44.50	63.17	68.2	-5.03	PK
V	10480.165	43.55	8.46	37.68	44.50	45.19	54	-8.81	AV
V	15720.151	62.63	10.12	38.80	44.10	67.45	74	-6.55	PK
V	15720.151	43.43	10.12	38.80	42.70	49.65	54	-4.35	AV
H	4739.195	61.43	7.10	37.24	43.50	62.27	74	-11.73	PK
H	4739.195	43.02	7.10	37.24	43.50	43.86	54	-10.14	AV
H	10480.193	53.98	8.46	38.57	44.50	56.51	68.2	-11.69	PK
H	10480.193	43.82	8.46	38.57	44.50	46.35	54	-7.65	AV
H	15720.179	50.27	10.12	38.38	44.10	54.67	74	-19.33	PK
H	15720.179	44.60	10.12	38.38	44.10	49.00	54	-5.00	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT40
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G									
V	4434.131	62.97	5.94	35.40	44.00	60.31	68.2	-7.89	PK
V	4434.131	43.36	5.94	35.40	44.00	40.70	54	-13.30	AV
V	10380.041	61.49	8.46	39.75	44.50	65.20	68.2	-3.00	PK
V	10380.041	43.38	8.46	39.75	44.50	47.09	54	-6.91	AV
V	15570.046	60.64	10.12	38.80	44.10	65.46	74	-8.54	PK
V	15570.046	43.28	10.12	38.80	42.70	49.50	54	-4.50	AV
H	4434.100	61.39	5.94	35.18	44.00	58.51	74	-15.49	PK
H	4434.100	43.43	5.94	35.18	44.00	40.55	54	-13.45	AV
H	10380.145	54.11	8.46	38.71	44.50	56.78	68.2	-11.42	PK
H	10380.145	44.40	8.46	38.71	44.50	47.07	54	-6.93	AV
H	15570.187	52.96	10.12	38.38	44.10	57.36	74	-16.64	PK
H	15570.187	43.30	10.12	38.38	44.10	47.70	54	-6.30	AV
middle Channel (5230 MHz)-Above 1G									
V	4739.053	61.40	6.48	36.35	44.05	60.18	68.2	-8.02	PK
V	4739.053	43.68	6.48	36.35	44.05	42.46	54	-11.54	AV
V	10460.031	60.64	8.47	37.88	44.51	62.48	68.2	-5.72	PK
V	10460.031	43.68	8.47	37.88	44.51	45.52	54	-8.48	AV
V	15690.127	60.79	10.12	38.80	44.10	65.61	74	-8.39	PK
V	15690.127	43.67	10.12	38.80	42.70	49.89	54	-4.11	AV
H	4739.026	61.04	6.48	36.37	44.05	59.84	68.2	-8.36	PK
H	4739.026	43.18	6.48	36.37	44.05	41.98	54	-12.02	AV
H	10460.198	52.87	8.47	38.64	44.50	55.48	68.2	-12.72	PK
H	10460.198	40.23	8.47	38.64	44.50	42.84	54	-11.16	AV
H	15690.094	50.07	10.12	38.38	44.10	54.47	74	-19.53	PK
H	15690.094	43.86	10.12	38.38	44.10	48.26	54	-5.74	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT20
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.193	64.22	5.94	35.40	44.00	61.56	68.2	-6.64	PK
V	4434.193	43.04	5.94	35.40	44.00	40.38	54	-13.62	AV
V	10360.160	61.59	8.46	39.75	44.50	65.30	68.2	-2.90	PK
V	10360.160	43.16	8.46	39.75	44.50	46.87	54	-7.13	AV
V	15540.150	62.06	10.12	38.80	44.10	66.88	74	-7.12	PK
V	15540.150	43.12	10.12	38.80	42.70	49.34	54	-4.66	AV
H	4434.059	61.21	5.94	35.18	44.00	58.33	68.2	-9.87	PK
H	4434.059	43.22	5.94	35.18	44.00	40.34	54	-13.66	AV
H	10360.032	52.91	8.46	38.71	44.50	55.58	68.2	-12.62	PK
H	10360.032	43.24	8.46	38.71	44.50	45.91	54	-8.09	AV
H	15540.051	51.37	10.12	38.38	44.10	55.77	74	-18.23	PK
H	15540.051	44.89	10.12	38.38	44.10	49.29	54	-4.71	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.028	64.33	6.48	36.35	44.05	63.11	74	-10.89	PK
V	4592.028	43.92	6.48	36.35	44.05	42.70	54	-11.30	AV
V	10400.011	62.53	8.47	37.88	44.51	64.37	68.2	-3.83	PK
V	10400.011	43.62	8.47	37.88	44.51	45.46	54	-8.54	AV
V	15600.154	64.03	10.12	38.80	44.10	68.85	74	-5.15	PK
V	15600.154	43.32	10.12	38.80	42.70	49.54	54	-4.46	AV
H	4592.062	64.13	6.48	36.37	44.05	62.93	74	-11.07	PK
H	4592.062	43.80	6.48	36.37	44.05	42.60	54	-11.40	AV
H	10400.165	52.34	8.47	38.64	44.50	54.95	68.2	-13.25	PK
H	10400.165	43.10	8.47	38.64	44.50	45.71	54	-8.29	AV
H	15600.081	52.19	10.12	38.38	44.10	56.59	74	-17.41	PK
H	15600.081	41.97	10.12	38.38	44.10	46.37	54	-7.63	AV
High Channel (5240 MHz)-Above 1G									
V	4739.054	61.87	7.10	37.24	43.50	62.71	74	-11.29	PK
V	4739.054	43.69	7.10	37.24	43.50	44.53	54	-9.47	AV
V	10480.116	64.59	8.46	37.68	44.50	66.23	68.2	-1.97	PK
V	10480.116	43.26	8.46	37.68	44.50	44.90	54	-9.10	AV
V	15720.013	60.56	10.12	38.80	44.10	65.38	74	-8.62	PK
V	15720.013	43.15	10.12	38.80	42.70	49.37	54	-4.63	AV
H	4739.070	61.12	7.10	37.24	43.50	61.96	74	-12.04	PK
H	4739.070	43.05	7.10	37.24	43.50	43.89	54	-10.11	AV
H	10480.012	52.34	8.46	38.57	44.50	54.87	68.2	-13.33	PK
H	10480.012	42.18	8.46	38.57	44.50	44.71	54	-9.29	AV
H	15720.123	51.72	10.12	38.38	44.10	56.12	74	-17.88	PK
H	15720.123	41.67	10.12	38.38	44.10	46.07	54	-7.93	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT40
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G									
V	4434.062	60.11	5.94	35.40	44.00	57.45	68.2	-10.75	PK
V	4434.062	43.10	5.94	35.40	44.00	40.44	54	-13.56	AV
V	10380.111	61.57	8.46	39.75	44.50	65.28	68.2	-2.92	PK
V	10380.111	43.51	8.46	39.75	44.50	47.22	54	-6.78	AV
V	15570.192	63.45	10.12	38.80	44.10	68.27	74	-5.73	PK
V	15570.192	43.27	10.12	38.80	42.70	49.49	54	-4.51	AV
H	4434.063	61.74	5.94	35.18	44.00	58.86	74	-15.14	PK
H	4434.063	43.36	5.94	35.18	44.00	40.48	54	-13.52	AV
H	10380.025	50.03	8.46	38.71	44.50	52.70	68.2	-15.50	PK
H	10380.025	41.43	8.46	38.71	44.50	44.10	54	-9.90	AV
H	15570.181	52.47	10.12	38.38	44.10	56.87	74	-17.13	PK
H	15570.181	43.09	10.12	38.38	44.10	47.49	54	-6.51	AV
middle Channel (5230 MHz)-Above 1G									
V	4739.069	62.05	6.48	36.35	44.05	60.83	68.2	-7.37	PK
V	4739.069	43.51	6.48	36.35	44.05	42.29	54	-11.71	AV
V	10460.138	64.52	8.47	37.88	44.51	66.36	68.2	-1.84	PK
V	10460.138	43.62	8.47	37.88	44.51	45.46	54	-8.54	AV
V	15690.107	63.08	10.12	38.80	44.10	67.90	74	-6.10	PK
V	15690.107	43.12	10.12	38.80	42.70	49.34	54	-4.66	AV
H	4739.116	61.56	6.48	36.37	44.05	60.36	68.2	-7.84	PK
H	4739.116	43.55	6.48	36.37	44.05	42.35	54	-11.65	AV
H	10460.019	52.40	8.47	38.64	44.50	55.01	68.2	-13.19	PK
H	10460.019	41.58	8.47	38.64	44.50	44.19	54	-9.81	AV
H	15690.018	53.45	10.12	38.38	44.10	57.85	74	-16.15	PK
H	15690.018	43.23	10.12	38.38	44.10	47.63	54	-6.37	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac 80
------------	------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5210 MHz)-Above 1G									
V	4434.128	64.08	5.94	35.40	44.00	61.42	68.2	-6.78	PK
V	4434.128	43.36	5.94	35.40	44.00	40.70	54	-13.30	AV
V	10420.189	62.86	8.46	39.75	44.50	66.57	68.2	-1.63	PK
V	10420.189	43.65	8.46	39.75	44.50	47.36	54	-6.64	AV
V	15630.197	61.55	10.12	38.80	44.10	66.37	74	-7.63	PK
V	15630.197	43.64	10.12	38.80	42.70	49.86	54	-4.14	AV
H	4434.009	63.57	5.94	35.18	44.00	60.69	68.2	-7.51	PK
H	4434.009	43.24	5.94	35.18	44.00	40.36	54	-13.64	AV
H	10420.129	50.07	8.46	38.71	44.50	52.74	68.2	-15.46	PK
H	10420.129	42.68	8.46	38.71	44.50	45.35	54	-8.65	AV
H	15630.142	51.56	10.12	38.38	44.10	55.96	74	-18.04	PK
H	15630.142	43.46	10.12	38.38	44.10	47.86	54	-6.14	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) -- 802.11a
------------	----------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.034	55.11	5.94	35.40	44.00	52.45	74	-21.55	PK
V	4679.034	43.69	5.94	35.40	44.00	41.03	54	-12.97	AV
V	11490.019	54.56	8.46	39.75	44.50	58.27	68.2	-9.93	PK
V	11490.019	43.32	8.46	39.75	44.50	47.03	54	-6.97	AV
V	17235.083	58.78	10.12	38.80	44.10	63.60	68.2	-4.60	PK
V	17235.083	43.63	10.12	38.80	42.70	49.85	54	-4.15	AV
H	4679.013	56.94	5.94	35.18	44.00	54.06	74	-19.94	PK
H	4679.013	43.41	5.94	35.18	44.00	40.53	54	-13.47	AV
H	11490.100	51.08	8.46	38.71	44.50	53.75	68.2	-14.45	PK
H	11490.100	43.62	8.46	38.71	44.50	46.29	54	-7.71	AV
H	17235.011	52.05	10.12	38.38	44.10	56.45	68.2	-11.75	PK
H	17235.011	43.57	10.12	38.38	44.10	47.97	54	-6.03	AV
middle Channel (5785 MHz)-Above 1G									
V	4592.114	58.91	6.48	36.35	44.05	57.69	74	-16.31	PK
V	4592.114	43.12	6.48	36.35	44.05	41.90	54	-12.10	AV
V	11570.083	57.33	8.47	37.88	44.51	59.17	68.2	-9.03	PK
V	11570.083	43.32	8.47	37.88	44.51	45.16	54	-8.84	AV
V	17355.166	60.81	10.12	38.80	44.10	65.63	68.2	-2.57	PK
V	17355.166	39.39	10.12	38.80	42.70	45.61	54	-8.39	AV
H	4592.171	59.64	6.48	36.37	44.05	58.44	74	-15.56	PK
H	4592.171	43.63	6.48	36.37	44.05	42.43	54	-11.57	AV
H	11570.178	52.38	8.47	38.64	44.50	54.99	68.2	-13.21	PK
H	11570.178	40.65	8.47	38.64	44.50	43.26	54	-10.74	AV
H	17355.158	54.69	10.12	38.38	44.10	59.09	68.2	-9.11	PK
H	17355.158	41.77	10.12	38.38	44.10	46.17	54	-7.83	AV
High Channel (5825 MHz)-Above 1G									
V	6039.101	58.63	7.10	37.24	43.50	59.47	68.2	-8.73	PK
V	6039.101	43.53	7.10	37.24	43.50	44.37	54	-9.63	AV
V	11650.050	61.78	8.46	37.68	44.50	63.42	74	-10.58	PK
V	11650.050	43.59	8.46	37.68	44.50	45.23	54	-8.77	AV
V	17475.105	56.76	10.12	38.80	44.10	61.58	68.2	-6.62	PK
V	17475.105	43.97	10.12	38.80	42.70	50.19	54	-3.81	AV
H	6039.050	57.65	7.10	37.24	43.50	58.49	68.2	-9.71	PK
H	6039.050	43.10	7.10	37.24	43.50	43.94	54	-10.06	AV
H	11650.149	53.89	8.46	38.57	44.50	56.42	74	-17.58	PK
H	11650.149	44.80	8.46	38.57	44.50	47.33	54	-6.67	AV
H	17475.001	53.45	10.12	38.38	44.10	57.85	68.2	-10.35	PK
H	17475.001	41.41	10.12	38.38	44.10	45.81	54	-8.19	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) --802.11n-HT20
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.146	58.26	5.94	35.40	44.00	55.60	74	-18.40	PK
V	4679.146	43.05	5.94	35.40	44.00	40.39	54	-13.61	AV
V	11490.153	53.22	8.46	39.75	44.50	56.93	68.2	-11.27	PK
V	11490.153	43.87	8.46	39.75	44.50	47.58	54	-6.42	AV
V	17235.134	60.12	10.12	38.80	44.10	64.94	68.2	-3.26	PK
V	17235.134	43.40	10.12	38.80	42.70	49.62	54	-4.38	AV
H	4679.137	57.94	5.94	35.18	44.00	55.06	74	-18.94	PK
H	4679.137	43.59	5.94	35.18	44.00	40.71	54	-13.29	AV
H	11490.009	49.32	8.46	38.71	44.50	51.99	68.2	-16.21	PK
H	11490.009	44.75	8.46	38.71	44.50	47.42	54	-6.58	AV
H	17235.089	53.63	10.12	38.38	44.10	58.03	68.2	-10.17	PK
H	17235.089	40.83	10.12	38.38	44.10	45.23	54	-8.77	AV
middle Channel (5785 MHz)-Above 1G									
V	4592.099	62.56	6.48	36.35	44.05	61.34	74	-12.66	PK
V	4592.099	43.83	6.48	36.35	44.05	42.61	54	-11.39	AV
V	11570.094	55.52	8.47	37.88	44.51	57.36	68.2	-10.84	PK
V	11570.094	43.64	8.47	37.88	44.51	45.48	54	-8.52	AV
V	17355.107	59.09	10.12	38.80	44.10	63.91	68.2	-4.29	PK
V	17355.107	43.03	10.12	38.80	42.70	49.25	54	-4.75	AV
H	4592.197	60.00	6.48	36.37	44.05	58.80	74	-15.20	PK
H	4592.197	43.32	6.48	36.37	44.05	42.12	54	-11.88	AV
H	11570.068	51.99	8.47	38.64	44.50	54.60	68.2	-13.60	PK
H	11570.068	43.34	8.47	38.64	44.50	45.95	54	-8.05	AV
H	17355.020	53.91	10.12	38.38	44.10	58.31	68.2	-9.89	PK
H	17355.020	41.90	10.12	38.38	44.10	46.30	54	-7.70	AV
High Channel (5825 MHz)-Above 1G									
V	6039.005	55.49	7.10	37.24	43.50	56.33	68.2	-11.87	PK
V	6039.005	43.32	7.10	37.24	43.50	44.16	54	-9.84	AV
V	11650.124	57.88	8.46	37.68	44.50	59.52	74	-14.48	PK
V	11650.124	43.85	8.46	37.68	44.50	45.49	54	-8.51	AV
V	17475.072	58.10	10.12	38.80	44.10	62.92	68.2	-5.28	PK
V	17475.072	43.31	10.12	38.80	42.70	49.53	54	-4.47	AV
H	6039.165	56.87	7.10	37.24	43.50	57.71	68.2	-10.49	PK
H	6039.165	43.65	7.10	37.24	43.50	44.49	54	-9.51	AV
H	11650.114	53.35	8.46	38.57	44.50	55.88	74	-18.12	PK
H	11650.114	44.14	8.46	38.57	44.50	46.67	54	-7.33	AV
H	17475.049	54.33	10.12	38.38	44.10	58.73	68.2	-9.47	PK
H	17475.049	41.63	10.12	38.38	44.10	46.03	54	-7.97	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) -- 802.11n-HT40
------------	---------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G									
V	4679.100	56.16	5.94	35.40	44.00	53.50	74	-20.50	PK
V	4679.100	43.55	5.94	35.40	44.00	40.89	54	-13.11	AV
V	11510.066	56.67	8.46	39.75	44.50	60.38	74	-13.62	PK
V	11510.066	43.28	8.46	39.75	44.50	46.99	54	-7.01	AV
V	17265.062	57.92	10.12	38.80	44.10	62.74	68.2	-5.46	PK
V	17265.062	43.72	10.12	38.80	42.70	49.94	54	-4.06	AV
H	4679.059	57.39	5.94	35.18	44.00	54.51	74	-19.49	PK
H	4679.059	43.73	5.94	35.18	44.00	40.85	54	-13.15	AV
H	11510.178	54.89	8.46	38.71	44.50	57.56	74	-16.44	PK
H	11510.178	40.83	8.46	38.71	44.50	43.50	54	-10.50	AV
H	17265.130	54.11	10.12	38.38	44.10	58.51	68.2	-9.69	PK
H	17265.130	40.58	10.12	38.38	44.10	44.98	54	-9.02	AV
middle Channel (5795 MHz)-Above 1G									
V	6039.152	59.65	6.48	36.35	44.05	58.43	68.2	-9.77	PK
V	6039.152	43.66	6.48	36.35	44.05	42.44	54	-11.56	AV
V	11590.012	57.22	8.47	37.88	44.51	59.06	74	-14.94	PK
V	11590.012	43.04	8.47	37.88	44.51	44.88	54	-9.12	AV
V	17385.184	55.22	10.12	38.80	44.10	60.04	68.2	-8.16	PK
V	17385.184	41.21	10.12	38.80	42.70	47.43	54	-6.57	AV
H	6039.063	60.63	6.48	36.37	44.05	59.43	68.2	-8.77	PK
H	6039.063	43.46	6.48	36.37	44.05	42.26	54	-11.74	AV
H	11590.027	52.27	8.47	38.64	44.50	54.88	74	-19.12	PK
H	11590.027	44.24	8.47	38.64	44.50	46.85	54	-7.15	AV
H	17385.182	51.99	10.12	38.38	44.10	56.39	68.2	-11.81	PK
H	17385.182	41.46	10.12	38.38	44.10	45.86	54	-8.14	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) --802.11ac-HT20
------------	---------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.073	59.08	5.94	35.40	44.00	56.42	74	-17.58	PK
V	4679.073	43.73	5.94	35.40	44.00	41.07	54	-12.93	AV
V	11490.091	54.94	8.46	39.75	44.50	58.65	68.2	-9.55	PK
V	11490.091	43.56	8.46	39.75	44.50	47.27	54	-6.73	AV
V	17235.050	58.34	10.12	38.80	44.10	63.16	68.2	-5.04	PK
V	17235.050	43.39	10.12	38.80	42.70	49.61	54	-4.39	AV
H	4679.017	57.81	5.94	35.18	44.00	54.93	74	-19.07	PK
H	4679.017	43.82	5.94	35.18	44.00	40.94	54	-13.06	AV
H	11490.078	50.79	8.46	38.71	44.50	53.46	68.2	-14.74	PK
H	11490.078	43.75	8.46	38.71	44.50	46.42	54	-7.58	AV
H	17235.107	53.26	10.12	38.38	44.10	57.66	68.2	-10.54	PK
H	17235.107	40.50	10.12	38.38	44.10	44.90	54	-9.10	AV
middle Channel (5785 MHz)-Above 1G									
V	4592.046	58.90	6.48	36.35	44.05	57.68	74	-16.32	PK
V	4592.046	43.89	6.48	36.35	44.05	42.67	54	-11.33	AV
V	11570.084	57.60	8.47	37.88	44.51	59.44	68.2	-8.76	PK
V	11570.084	43.74	8.47	37.88	44.51	45.58	54	-8.42	AV
V	17355.052	59.67	10.12	38.80	44.10	64.49	68.2	-3.71	PK
V	17355.052	39.71	10.12	38.80	42.70	45.93	54	-8.07	AV
H	4592.147	59.15	6.48	36.37	44.05	57.95	74	-16.05	PK
H	4592.147	43.21	6.48	36.37	44.05	42.01	54	-11.99	AV
H	11570.068	53.21	8.47	38.64	44.50	55.82	68.2	-12.38	PK
H	11570.068	44.50	8.47	38.64	44.50	47.11	54	-6.89	AV
H	17355.200	50.96	10.12	38.38	44.10	55.36	68.2	-12.84	PK
H	17355.200	42.02	10.12	38.38	44.10	46.42	54	-7.58	AV
High Channel (5825 MHz)-Above 1G									
V	6039.065	59.11	7.10	37.24	43.50	59.95	68.2	-8.25	PK
V	6039.065	43.93	7.10	37.24	43.50	44.77	54	-9.23	AV
V	11650.133	62.80	8.46	37.68	44.50	64.44	74	-9.56	PK
V	11650.133	43.31	8.46	37.68	44.50	44.95	54	-9.05	AV
V	17475.084	53.63	10.12	38.80	44.10	58.45	68.2	-9.75	PK
V	17475.084	43.56	10.12	38.80	42.70	49.78	54	-4.22	AV
H	6039.181	55.57	7.10	37.24	43.50	56.41	68.2	-11.79	PK
H	6039.181	43.08	7.10	37.24	43.50	43.92	54	-10.08	AV
H	11650.181	51.68	8.46	38.57	44.50	54.21	74	-19.79	PK
H	11650.181	41.20	8.46	38.57	44.50	43.73	54	-10.27	AV
H	17475.063	52.14	10.12	38.38	44.10	56.54	68.2	-11.66	PK
H	17475.063	41.44	10.12	38.38	44.10	45.84	54	-8.16	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11ac-HT40
-------------	----------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G									
V	4679.019	57.65	5.94	35.40	44.00	54.99	74	-19.01	PK
V	4679.019	43.65	5.94	35.40	44.00	40.99	54	-13.01	AV
V	11510.114	55.66	8.46	39.75	44.50	59.37	74	-14.63	PK
V	11510.114	43.15	8.46	39.75	44.50	46.86	54	-7.14	AV
V	17265.135	56.41	10.12	38.80	44.10	61.23	68.2	-6.97	PK
V	17265.135	43.05	10.12	38.80	42.70	49.27	54	-4.73	AV
H	4679.163	60.95	5.94	35.18	44.00	58.07	74	-15.93	PK
H	4679.163	43.30	5.94	35.18	44.00	40.42	54	-13.58	AV
H	11510.094	54.12	8.46	38.71	44.50	56.79	74	-17.21	PK
H	11510.094	40.29	8.46	38.71	44.50	42.96	54	-11.04	AV
H	17265.164	51.77	10.12	38.38	44.10	56.17	68.2	-12.03	PK
H	17265.164	44.02	10.12	38.38	44.10	48.42	54	-5.58	AV
middle Channel (5795 MHz)-Above 1G									
V	6039.108	58.16	6.48	36.35	44.05	56.94	68.2	-11.26	PK
V	6039.108	43.70	6.48	36.35	44.05	42.48	54	-11.52	AV
V	11590.114	58.45	8.47	37.88	44.51	60.29	74	-13.71	PK
V	11590.114	43.59	8.47	37.88	44.51	45.43	54	-8.57	AV
V	17385.109	55.95	10.12	38.80	44.10	60.77	68.2	-7.43	PK
V	17385.109	41.98	10.12	38.80	42.70	48.20	54	-5.80	AV
H	6039.094	60.88	6.48	36.37	44.05	59.68	68.2	-8.52	PK
H	6039.094	43.62	6.48	36.37	44.05	42.42	54	-11.58	AV
H	11590.199	51.26	8.47	38.64	44.50	53.87	74	-20.13	PK
H	11590.199	43.47	8.47	38.64	44.50	46.08	54	-7.92	AV
H	17385.007	51.68	10.12	38.38	44.10	56.08	68.2	-12.12	PK
H	17385.007	43.57	10.12	38.38	44.10	47.97	54	-6.03	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11ac 80
-------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5775 MHz)-Above 1G									
V	4679.027	57.33	5.94	35.40	44.00	54.67	74	-19.33	PK
V	4679.027	43.04	5.94	35.40	44.00	40.38	54	-13.62	AV
V	11550.165	57.71	8.46	39.75	44.50	61.42	74	-12.58	PK
V	11550.165	42.83	8.46	39.75	44.50	46.54	54	-7.46	AV
V	17325.172	57.42	10.12	38.80	44.10	62.24	68.2	-5.96	PK
V	17325.172	41.53	10.12	38.80	42.70	47.75	54	-6.25	AV
H	4679.173	55.99	5.94	35.18	44.00	53.11	74	-20.89	PK
H	4679.173	43.19	5.94	35.18	44.00	40.31	54	-13.69	AV
H	11550.016	51.08	8.46	38.71	44.50	53.75	74	-20.25	PK
H	11550.016	41.30	8.46	38.71	44.50	43.97	54	-10.03	AV
H	17325.004	53.14	10.12	38.38	44.10	57.54	68.2	-10.66	PK
H	17325.004	42.73	10.12	38.38	44.10	47.13	54	-6.87	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

8. Power Spectral Density Test

8.1 Block Diagram Of Test Setup



8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test Procedure


For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

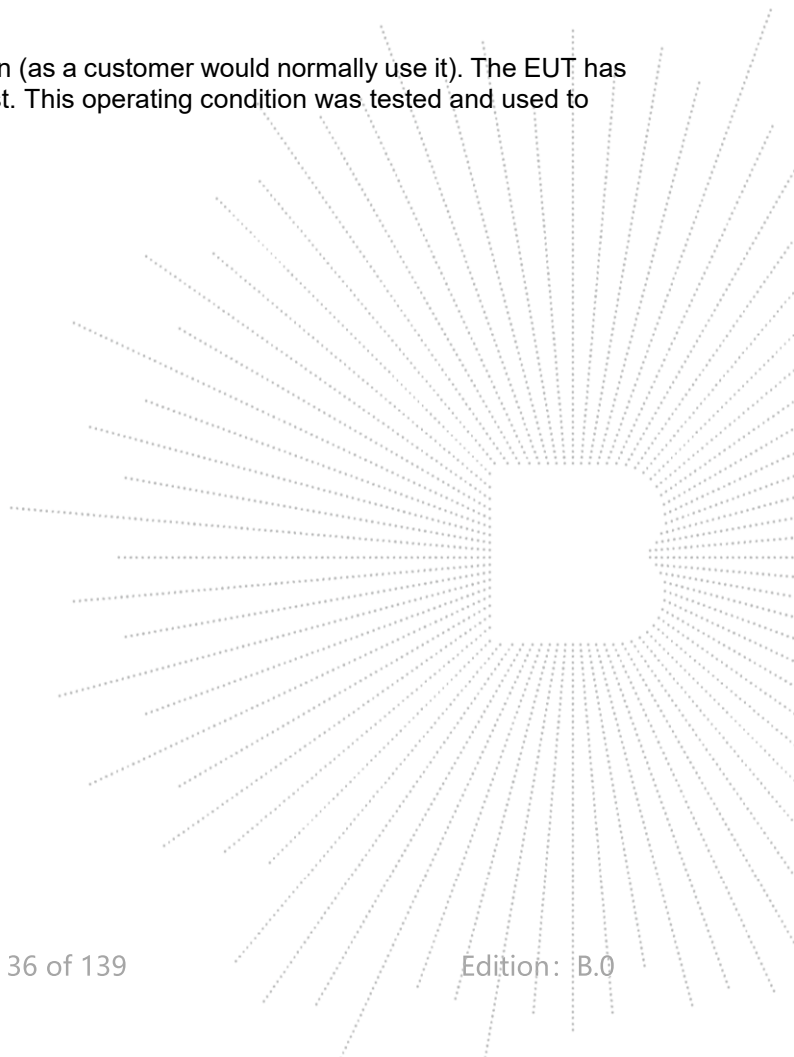




8.5 Test Result



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	(5180-5240MHz); (5745-5825MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/1MHz)	Limit (dBm/1MHz)	Verdict
NVNT	a	5180	2.03	11	Pass
NVNT	a	5200	0.44	11	Pass
NVNT	a	5240	-0.78	11	Pass
NVNT	n20	5180	-0.65	11	Pass
NVNT	n20	5200	-1.74	11	Pass
NVNT	n20	5240	-1.42	11	Pass
NVNT	n40	5190	-4.99	11	Pass
NVNT	n40	5230	-5.62	11	Pass
NVNT	ac20	5180	-0.14	11	Pass
NVNT	ac20	5200	-1.09	11	Pass
NVNT	ac20	5240	-0.61	11	Pass
NVNT	ac40	5190	-4.69	11	Pass
NVNT	ac40	5230	-6	11	Pass
NVNT	ac80	5210	-12.16	11	Pass



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	-1.67	30	Pass
NVNT	a	5785	-2.86	30	Pass
NVNT	a	5825	-3.55	30	Pass
NVNT	n20	5745	-3.31	30	Pass
NVNT	n20	5785	-3.24	30	Pass
NVNT	n20	5825	-5.79	30	Pass
NVNT	n40	5755	-8.15	30	Pass
NVNT	n40	5795	-8.69	30	Pass
NVNT	ac20	5745	-3.24	30	Pass
NVNT	ac20	5785	-3.75	30	Pass
NVNT	ac20	5825	-4.73	30	Pass
NVNT	ac40	5755	-9.02	30	Pass
NVNT	ac40	5795	-8.79	30	Pass
NVNT	ac80	5775	-13.53	30	Pass


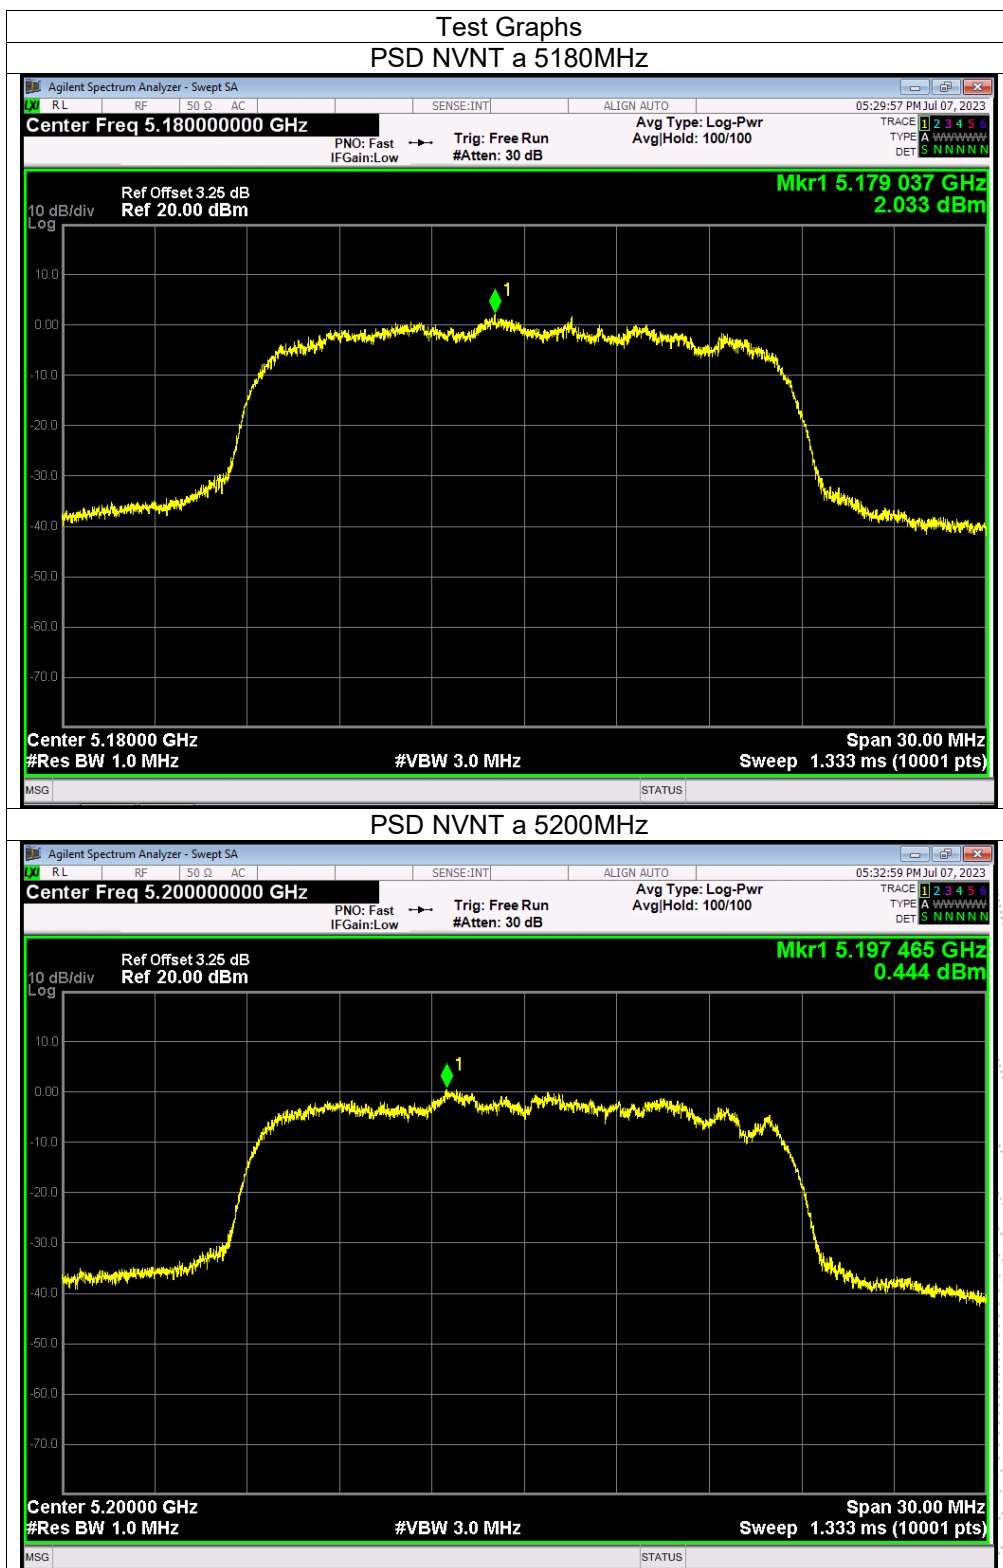


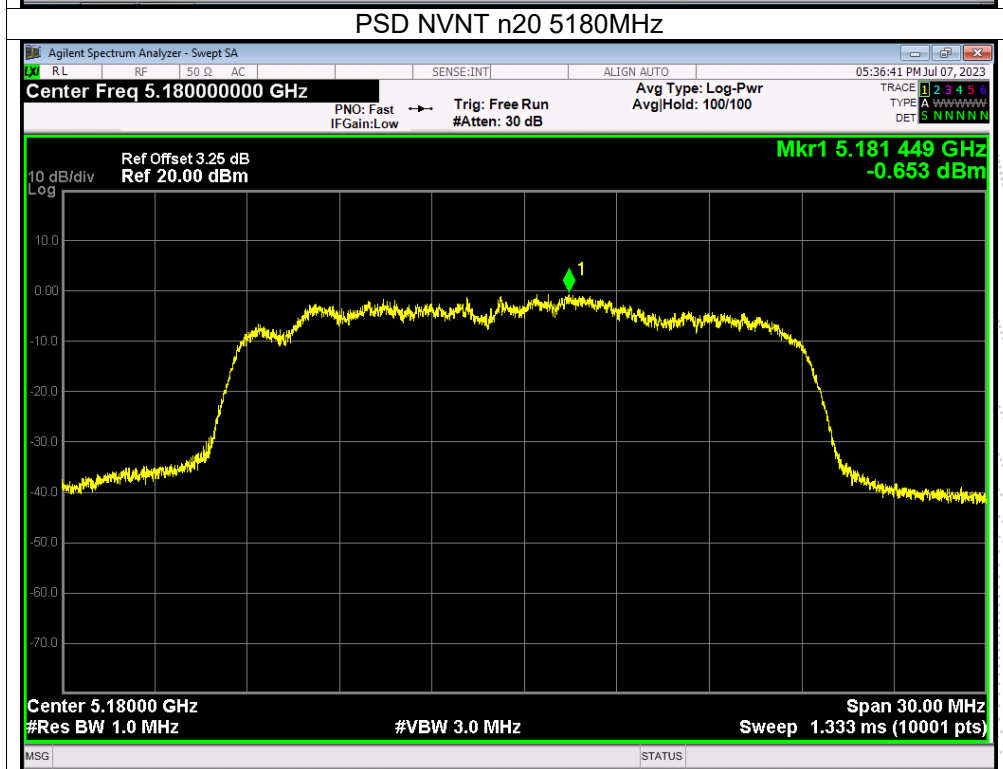
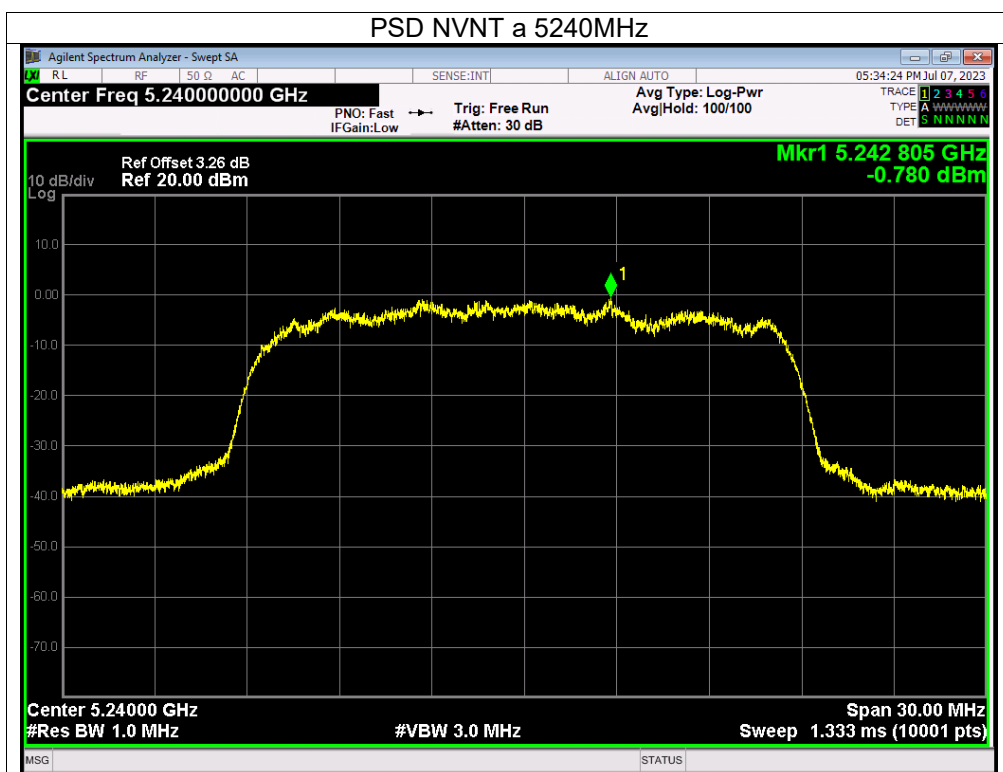


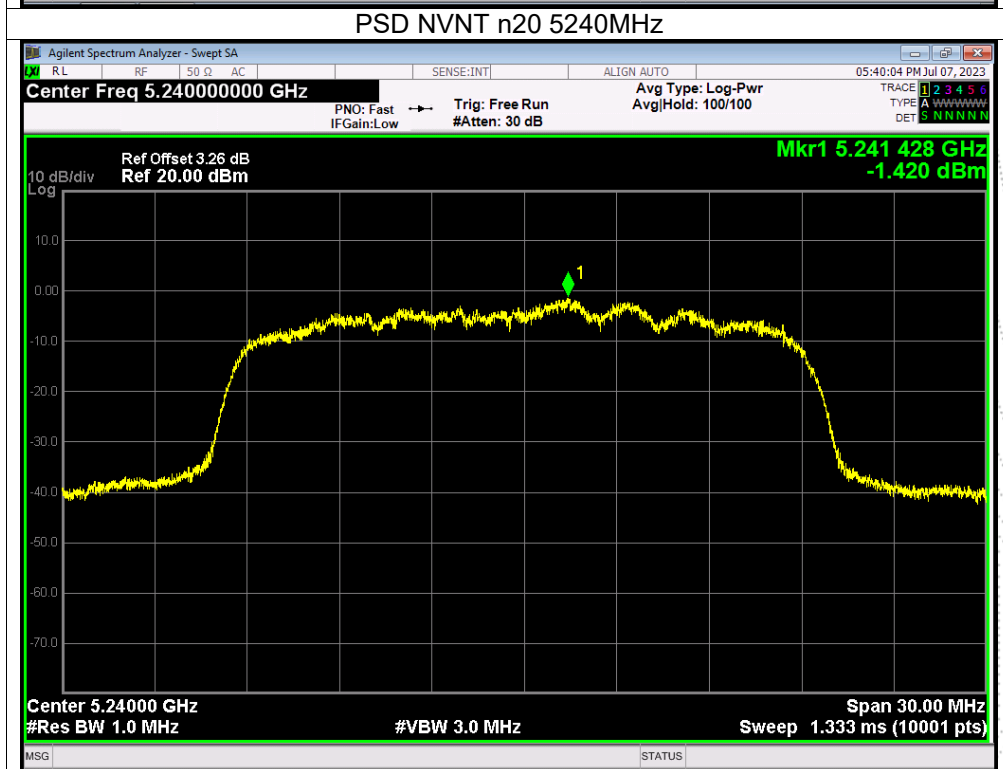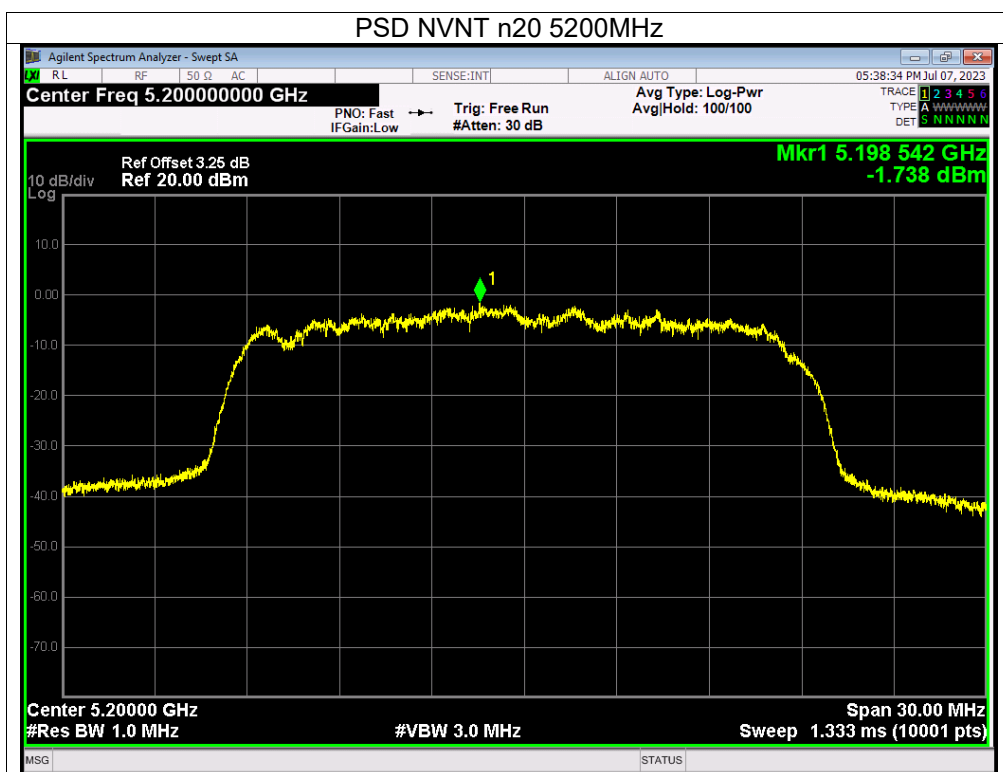


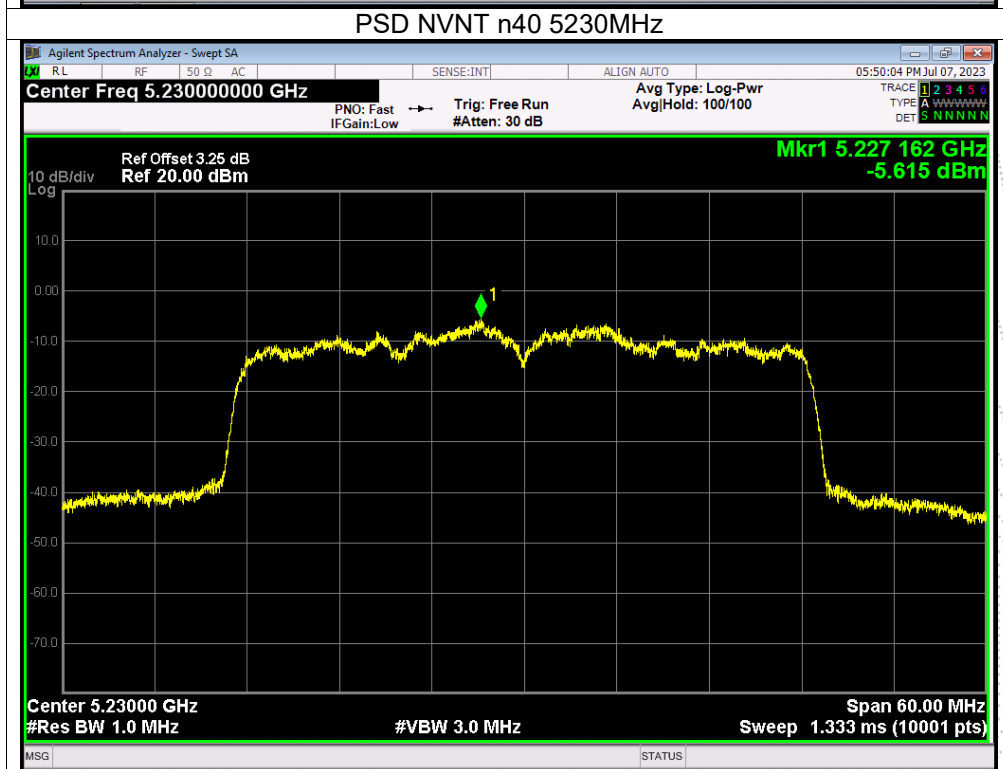
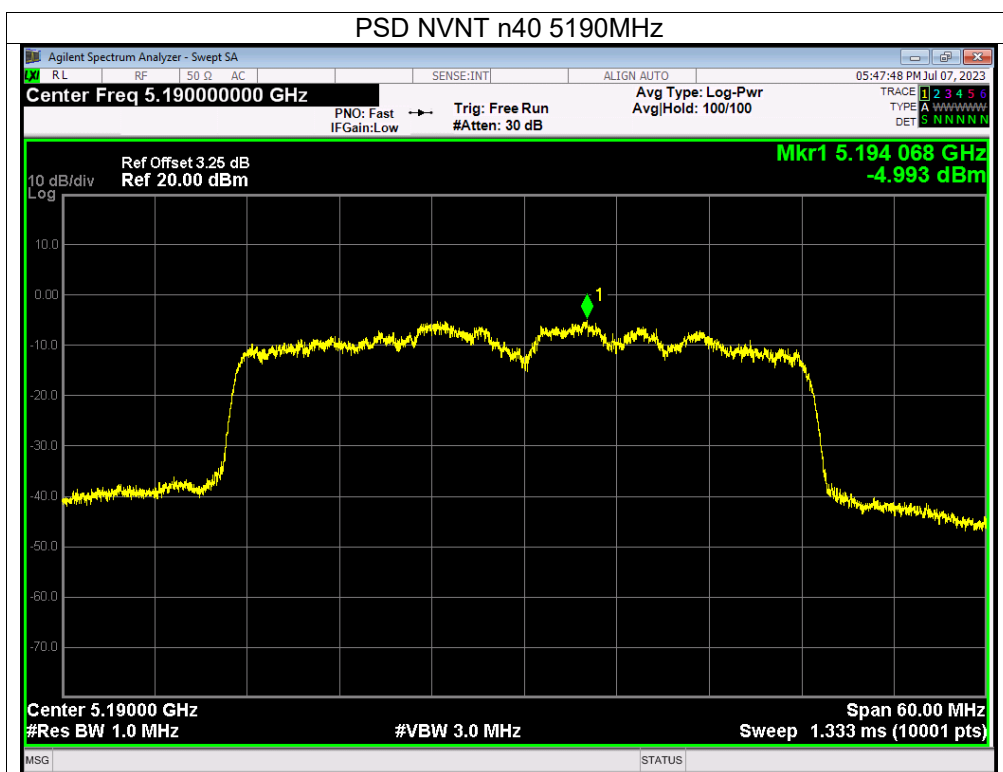


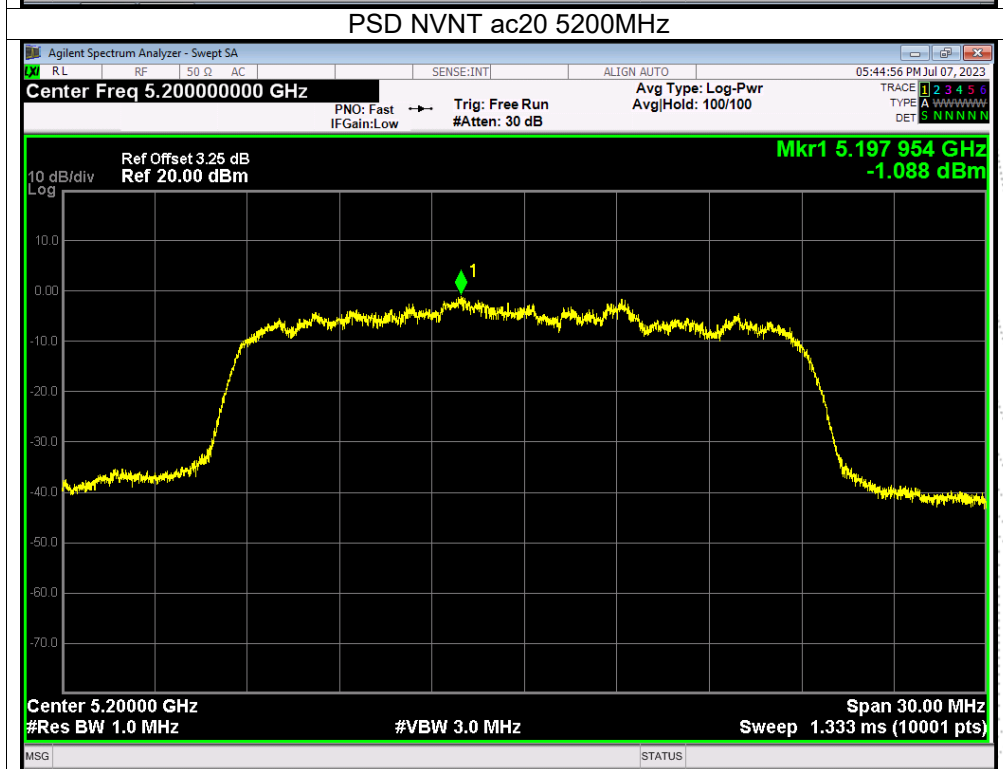
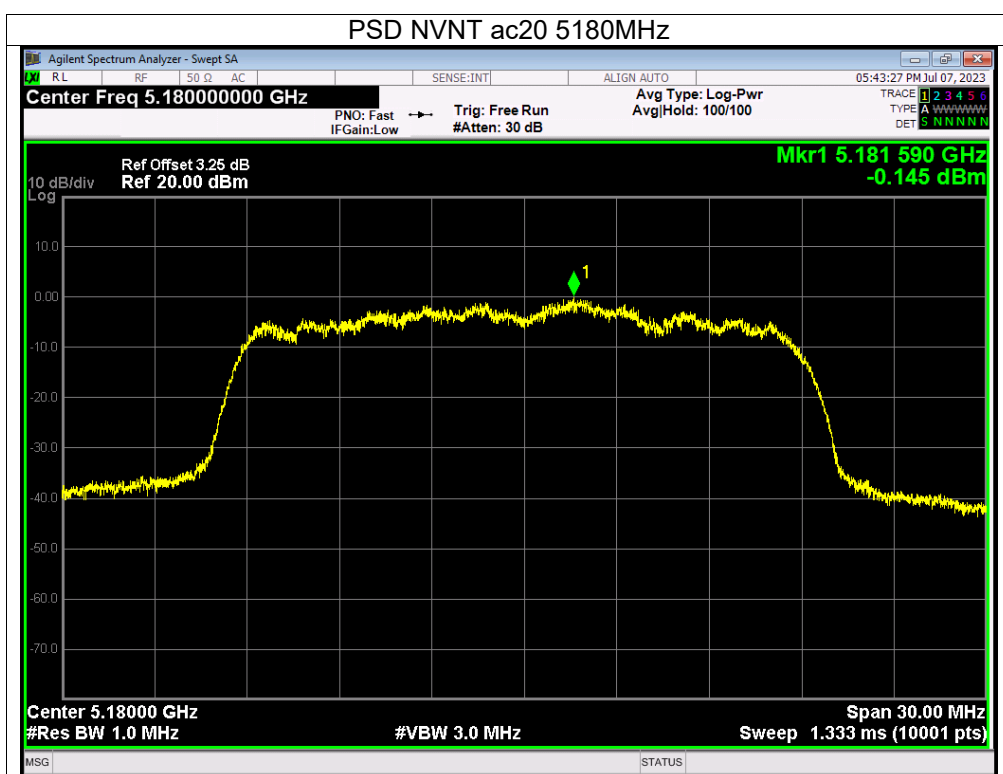


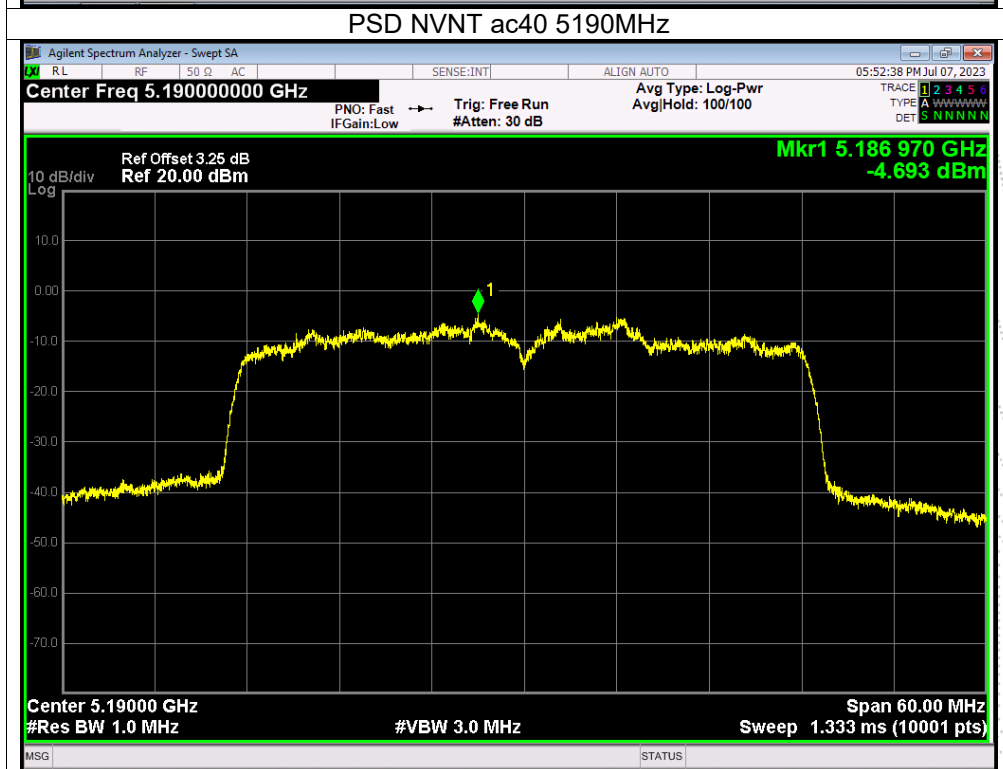
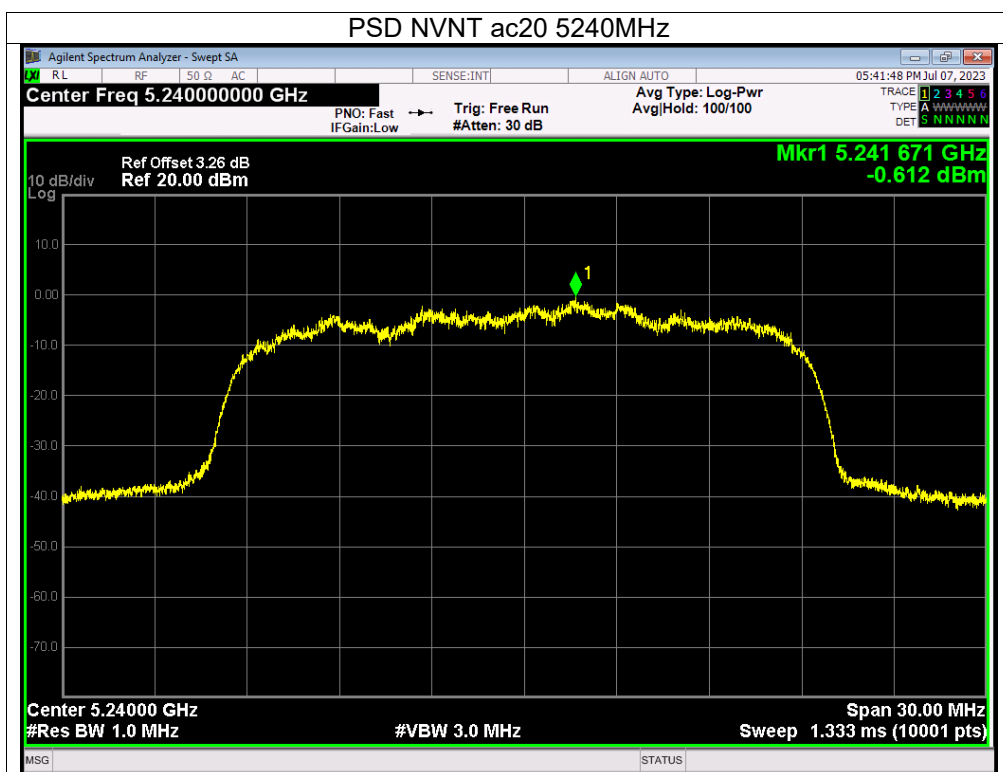


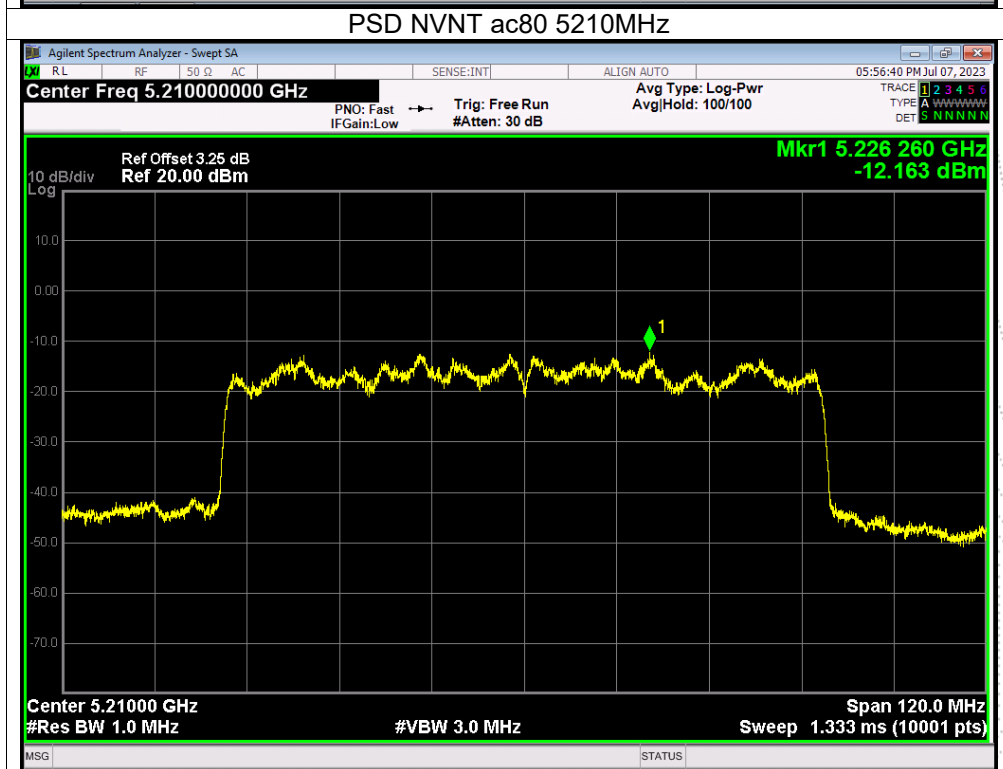
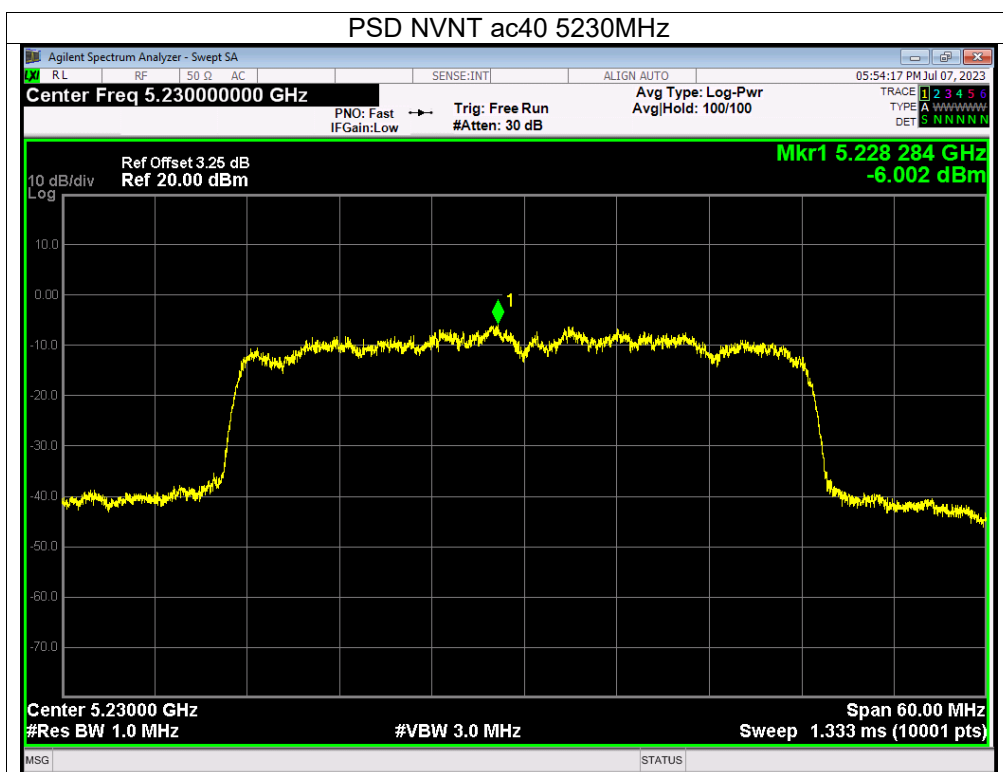



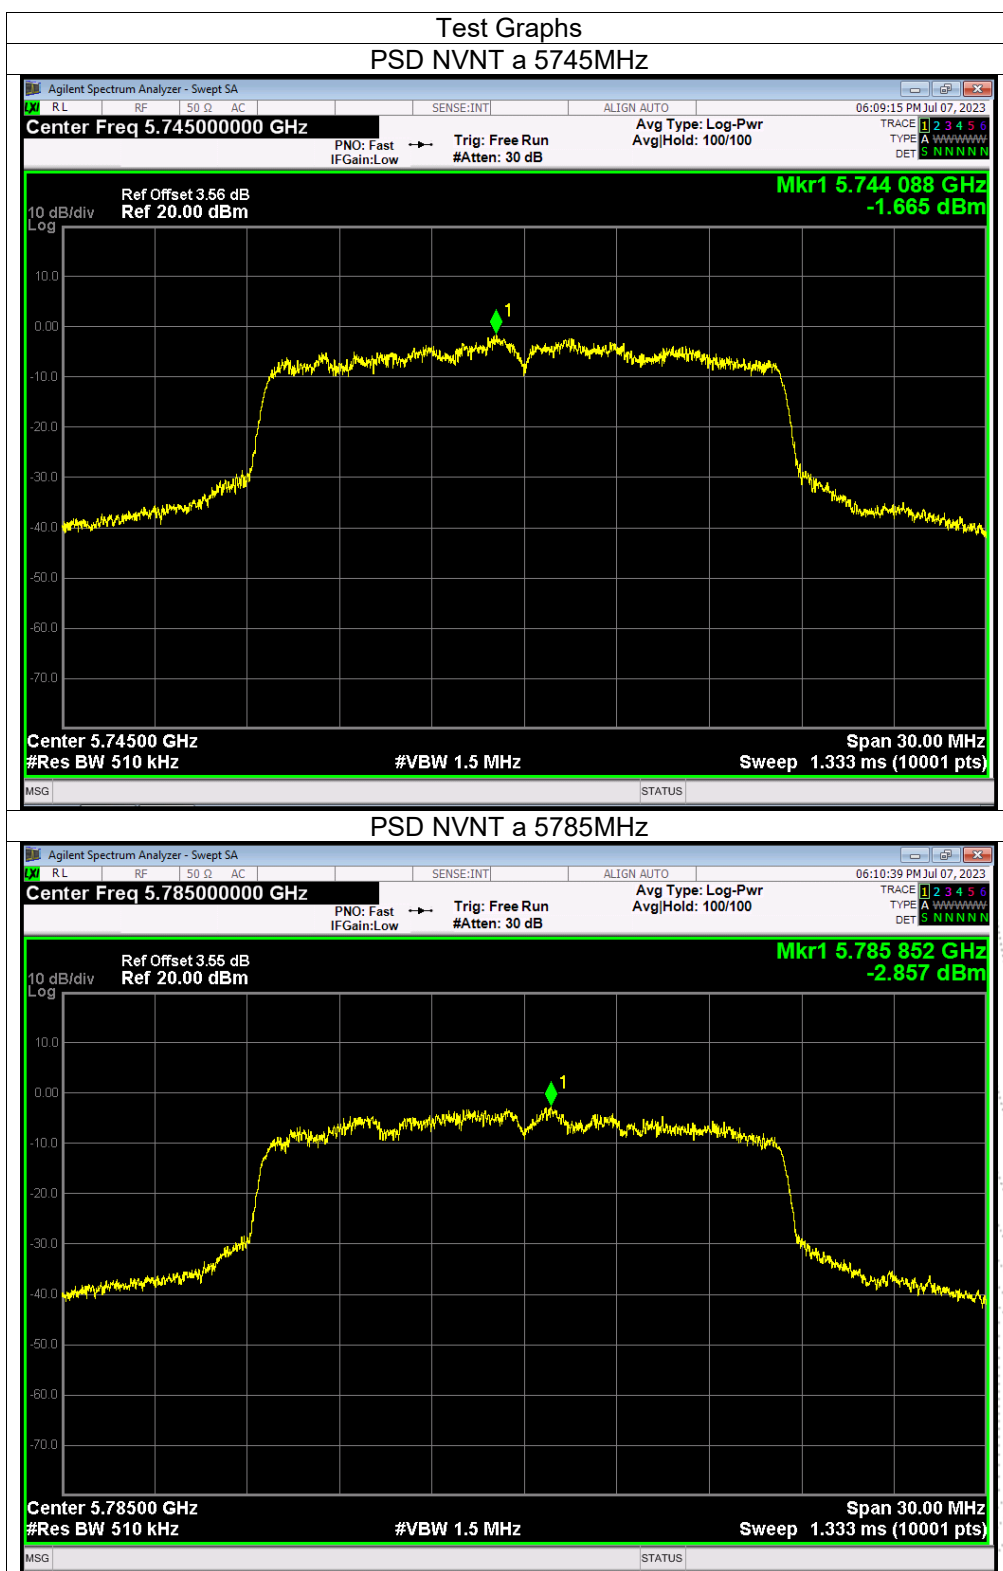


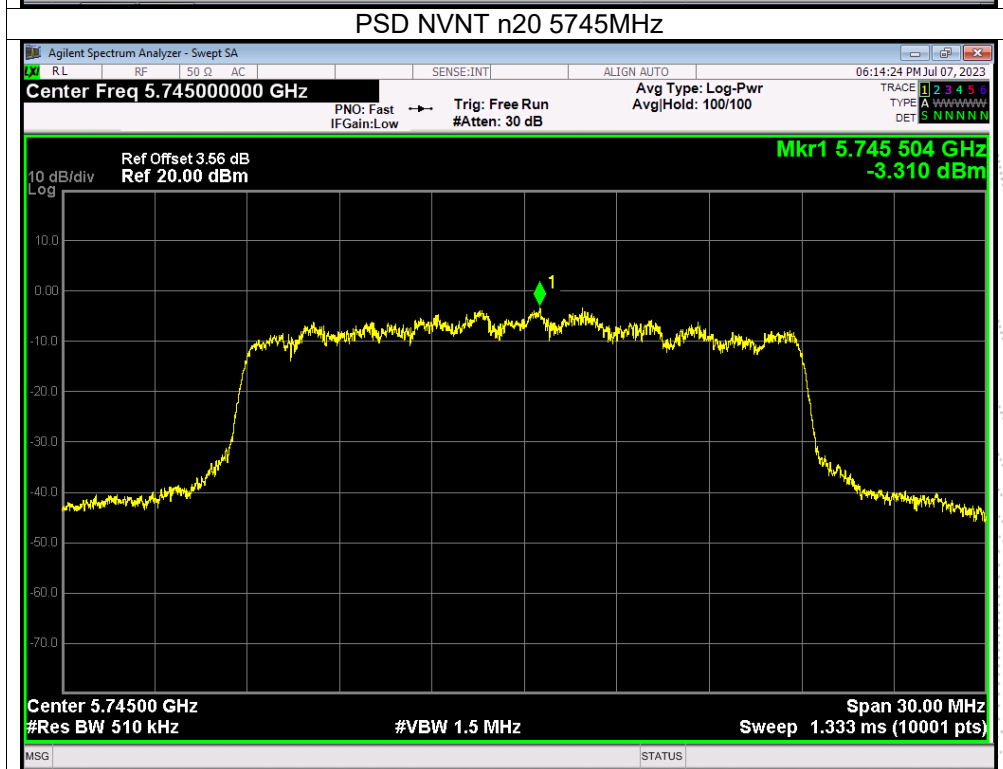
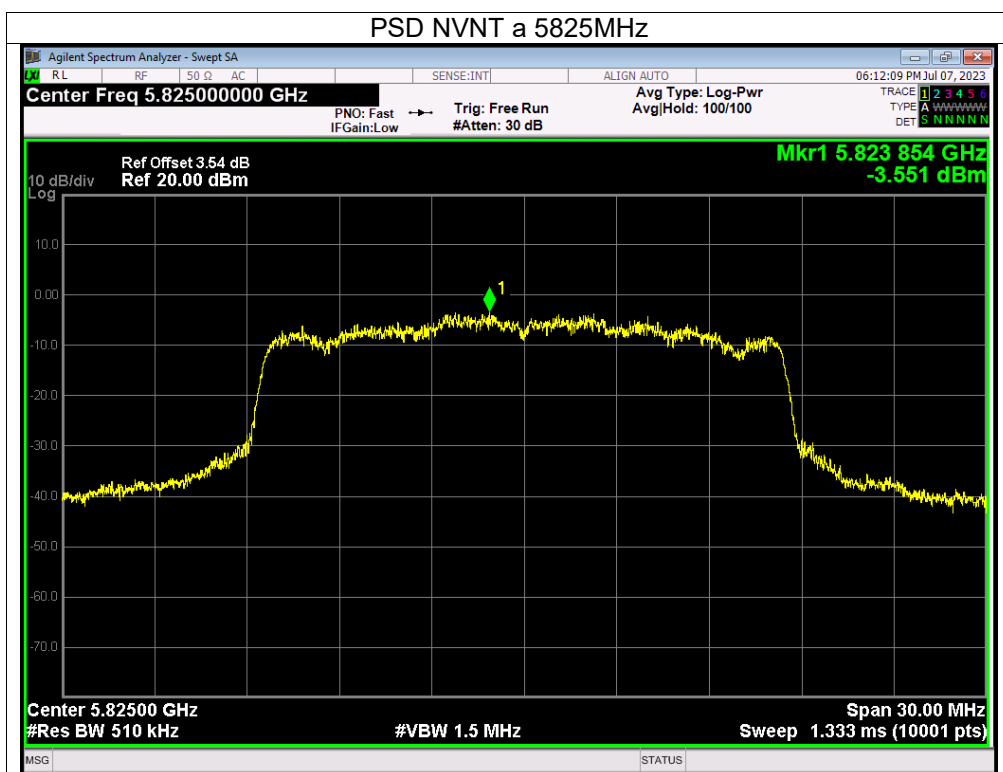


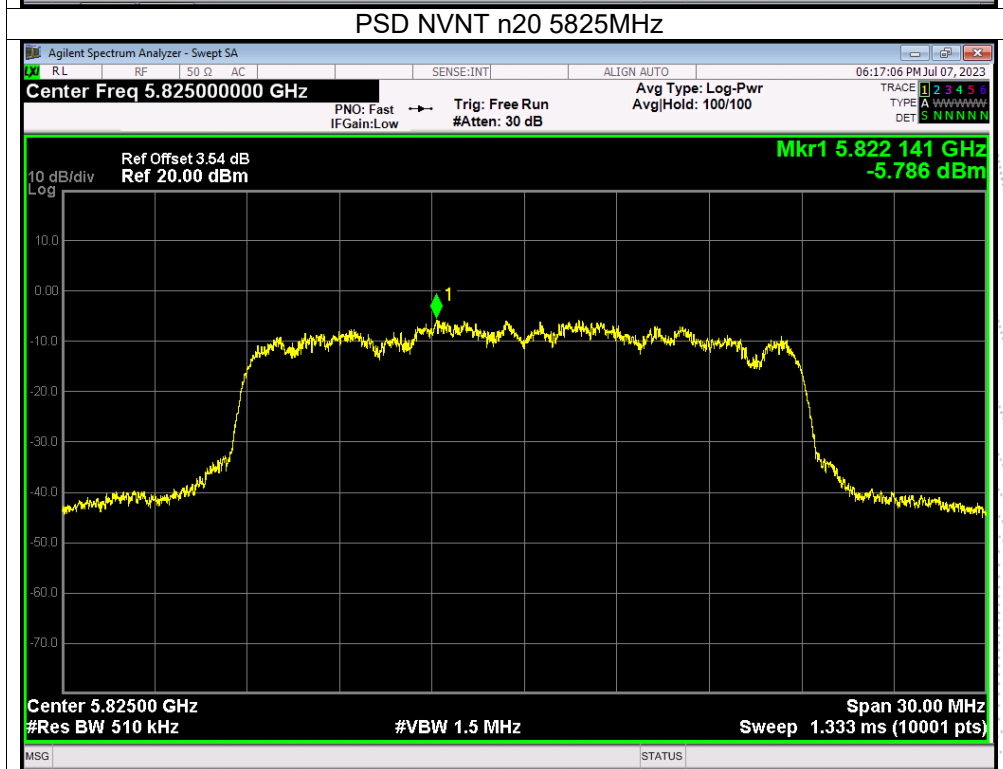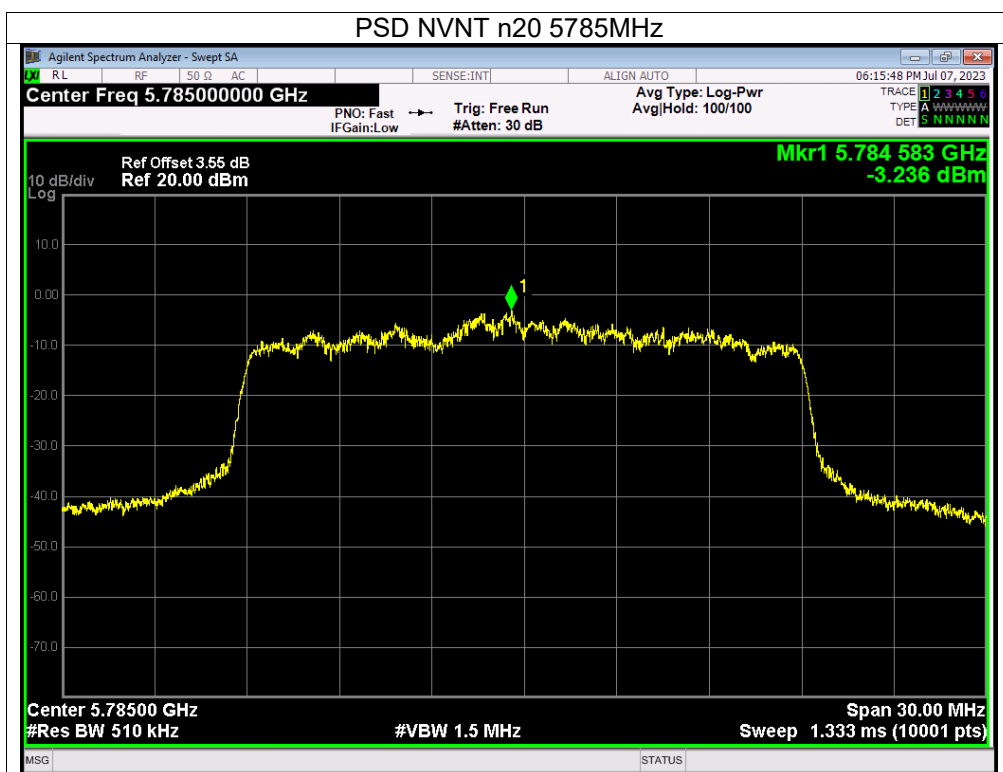

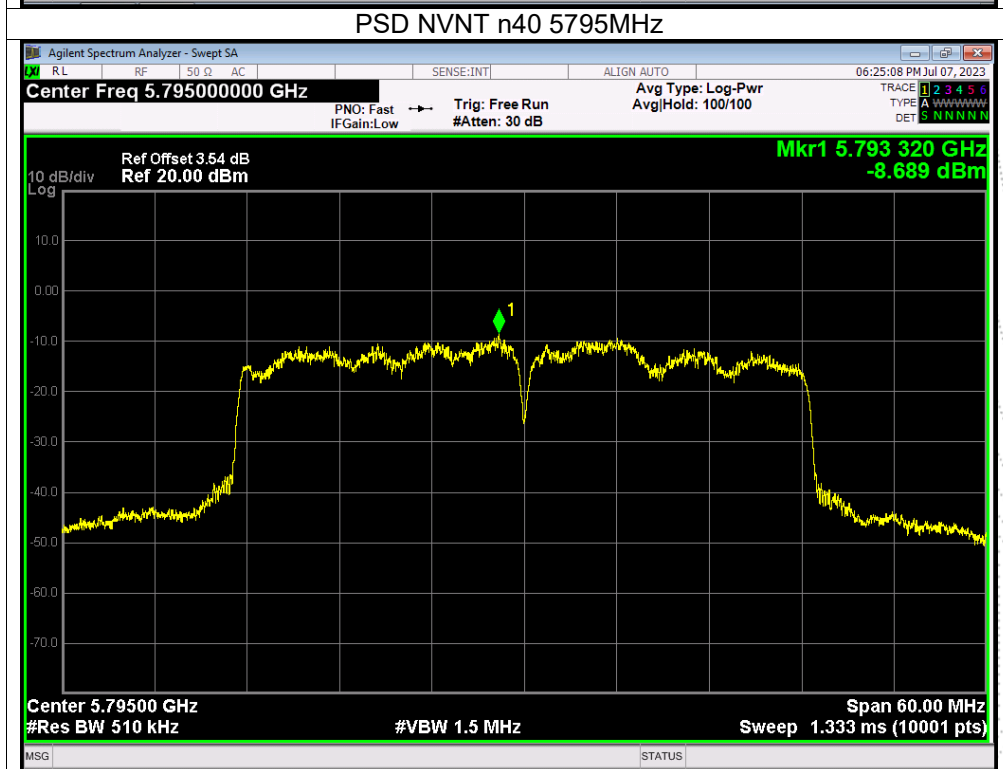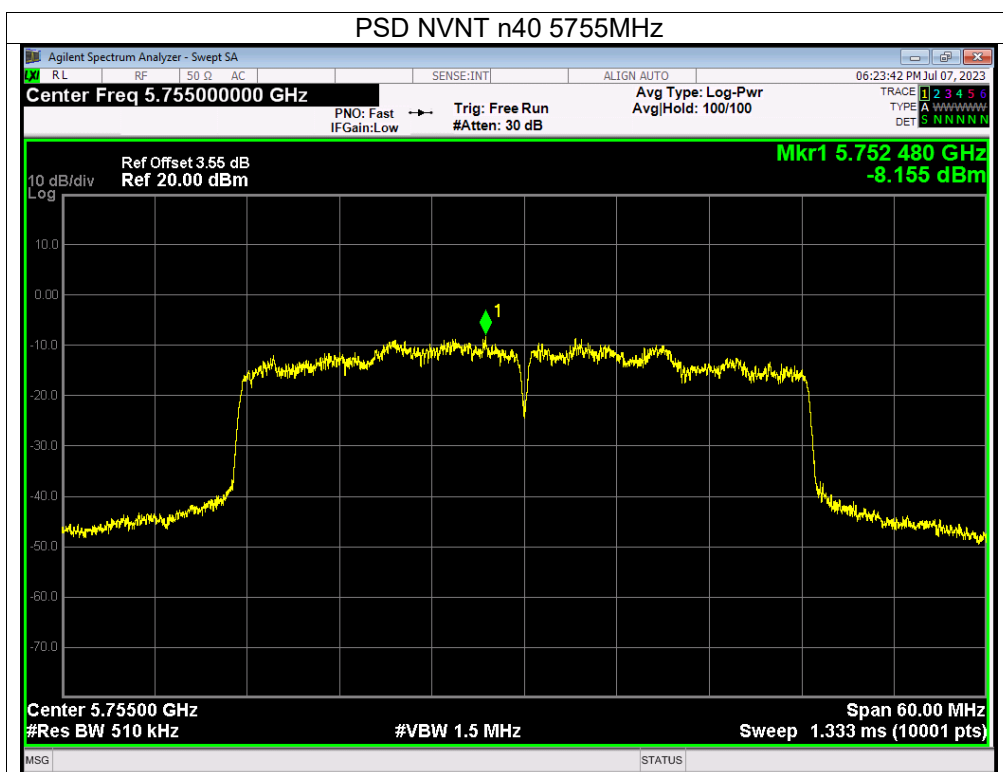

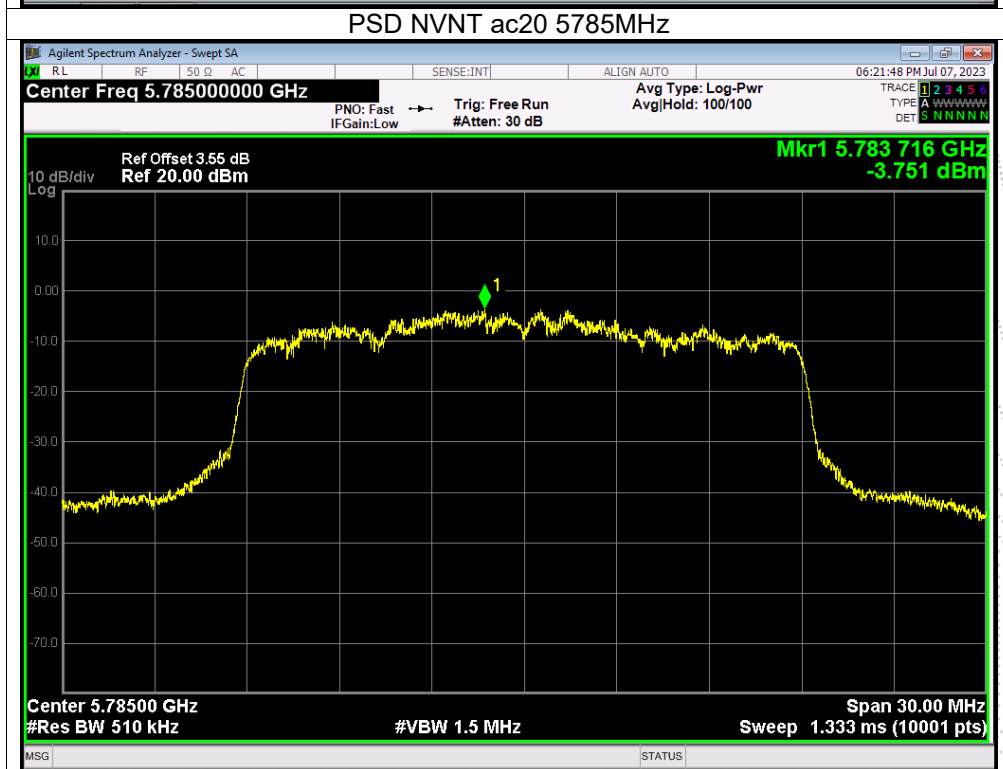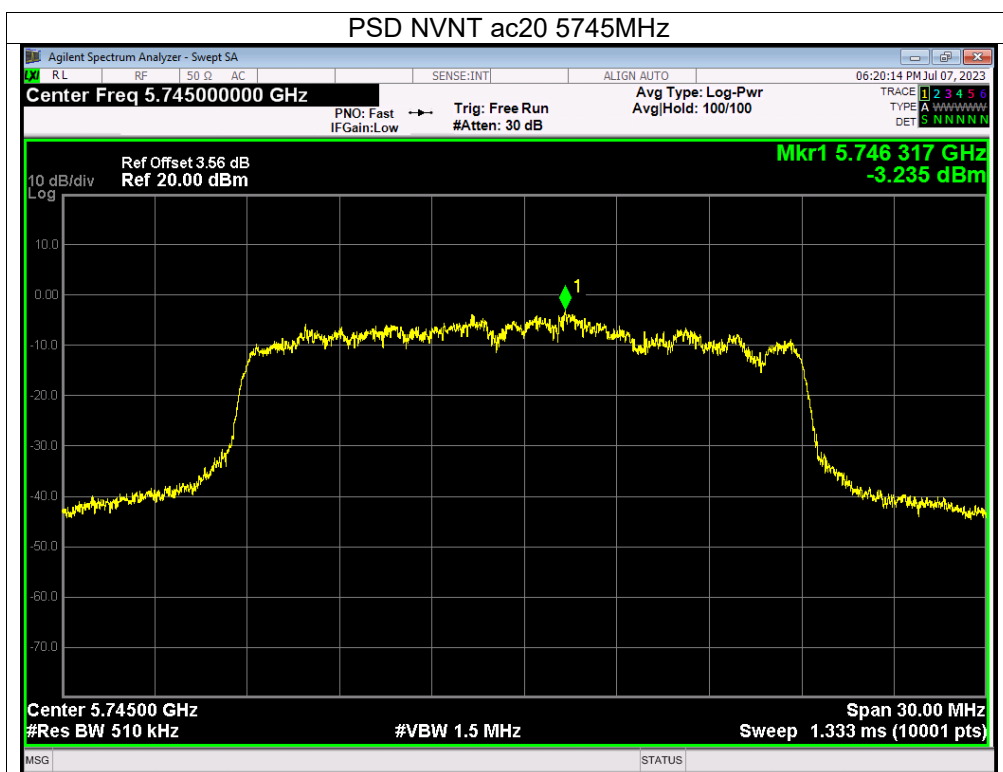


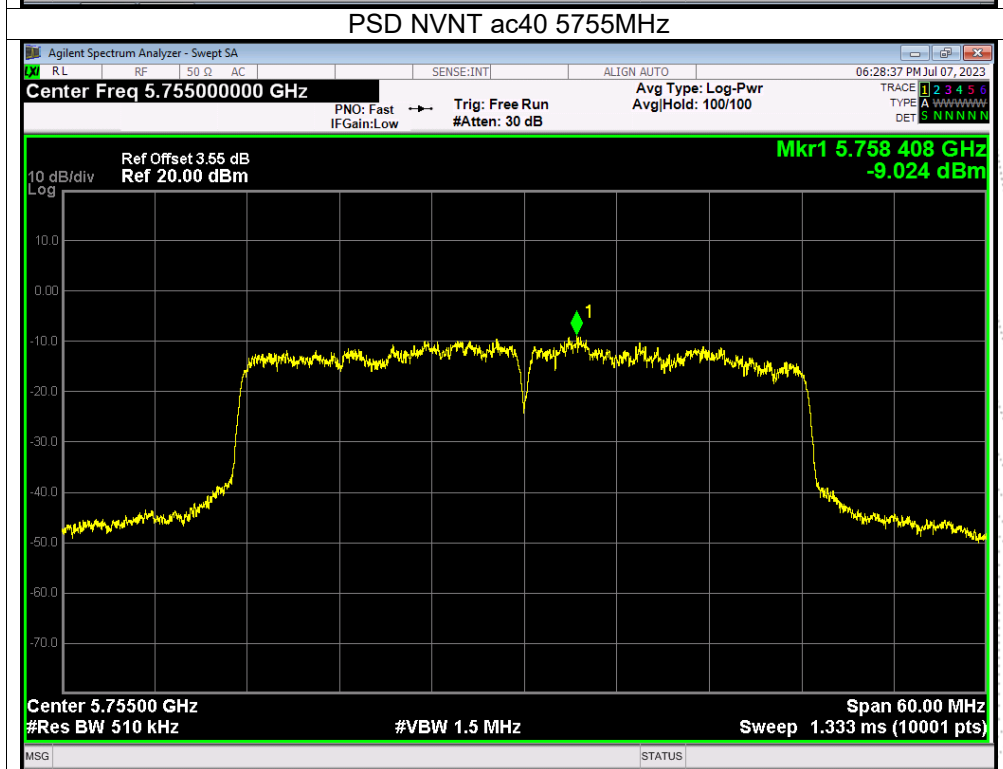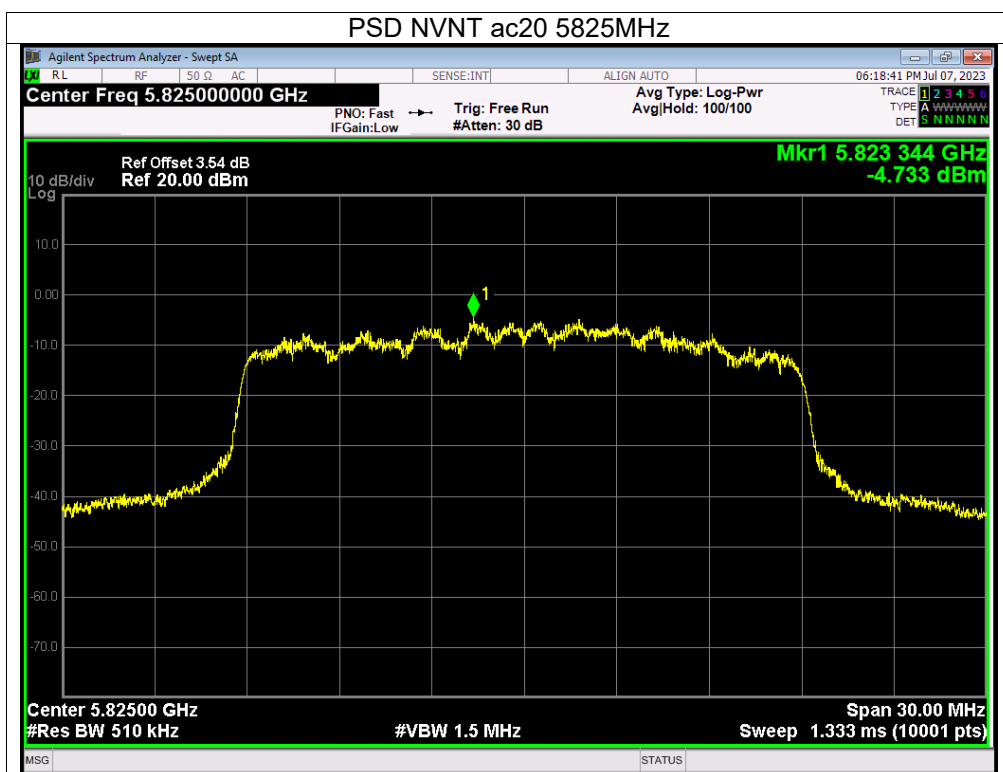

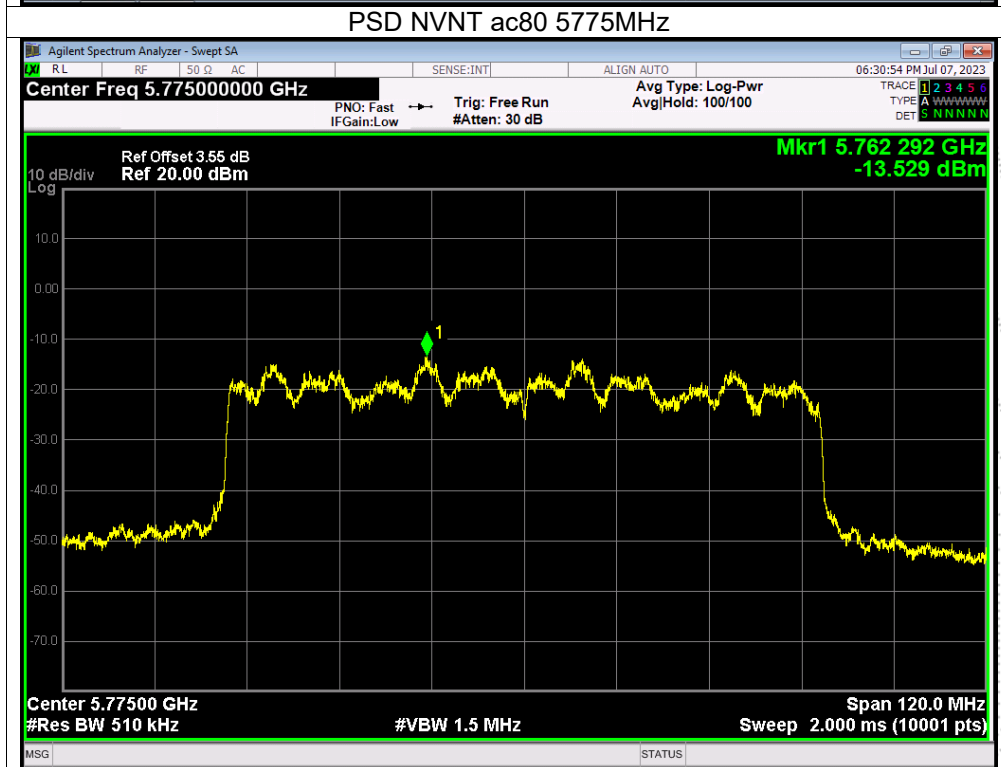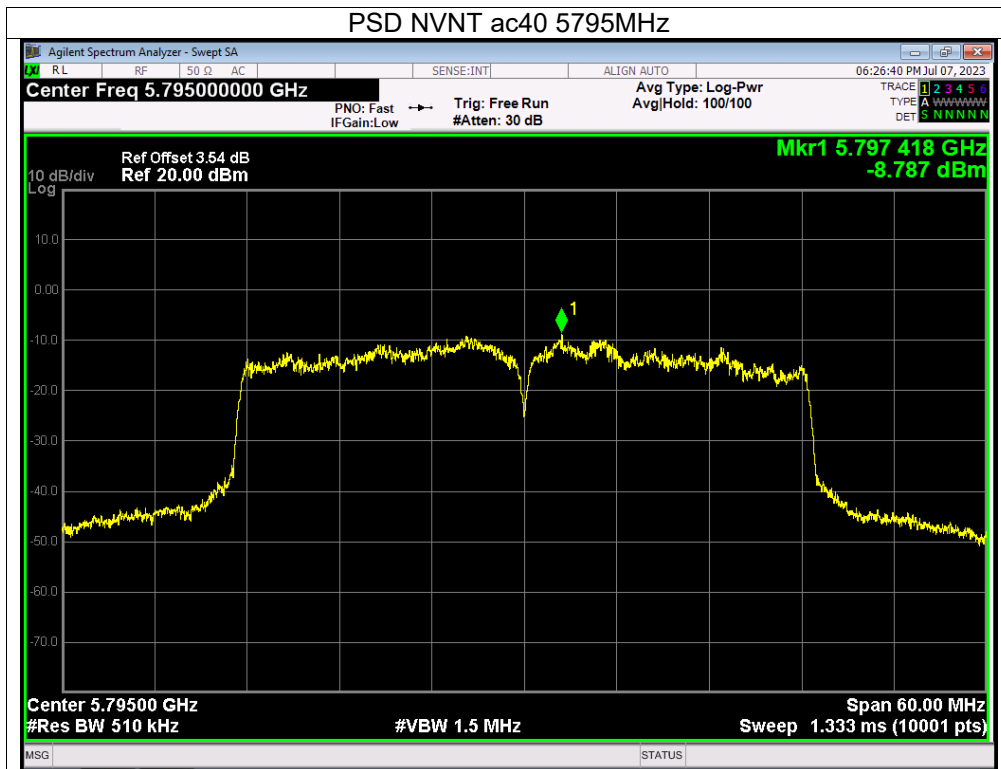

9. 26dB & 6dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

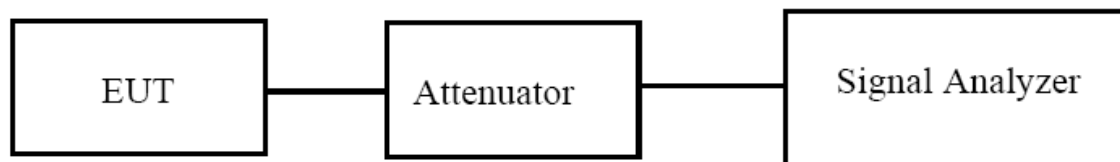

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.
(6dB bandwidth)>500kHz

9.3 Test Procedure

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1 % to 5 % of the OBW
- Set VBW $\geq 3 \cdot$ RBW
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99 % power bandwidth function of the instrument (if available).
- If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6dB

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.

6. Allow the trace to stabilize.

7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


9.4 EUT Operating Conditions



The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



9.5 Test Result



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		



Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-26dB bandwidth (MHz)	Result
NVNT	a	5180	16.377	20.44	Pass
NVNT	a	5200	16.392	20.389	Pass
NVNT	a	5240	16.393	20.215	Pass
NVNT	n20	5180	17.536	20.255	Pass
NVNT	n20	5200	17.539	20.315	Pass
NVNT	n20	5240	17.582	20.328	Pass
NVNT	n40	5190	35.901	41.162	Pass
NVNT	n40	5230	35.944	41.271	Pass
NVNT	ac20	5180	17.524	20.216	Pass
NVNT	ac20	5200	17.552	20.25	Pass
NVNT	ac20	5240	17.547	20.351	Pass
NVNT	ac40	5190	35.956	41.209	Pass
NVNT	ac40	5230	35.941	41.25	Pass
NVNT	ac80	5210	75.674	82.217	Pass


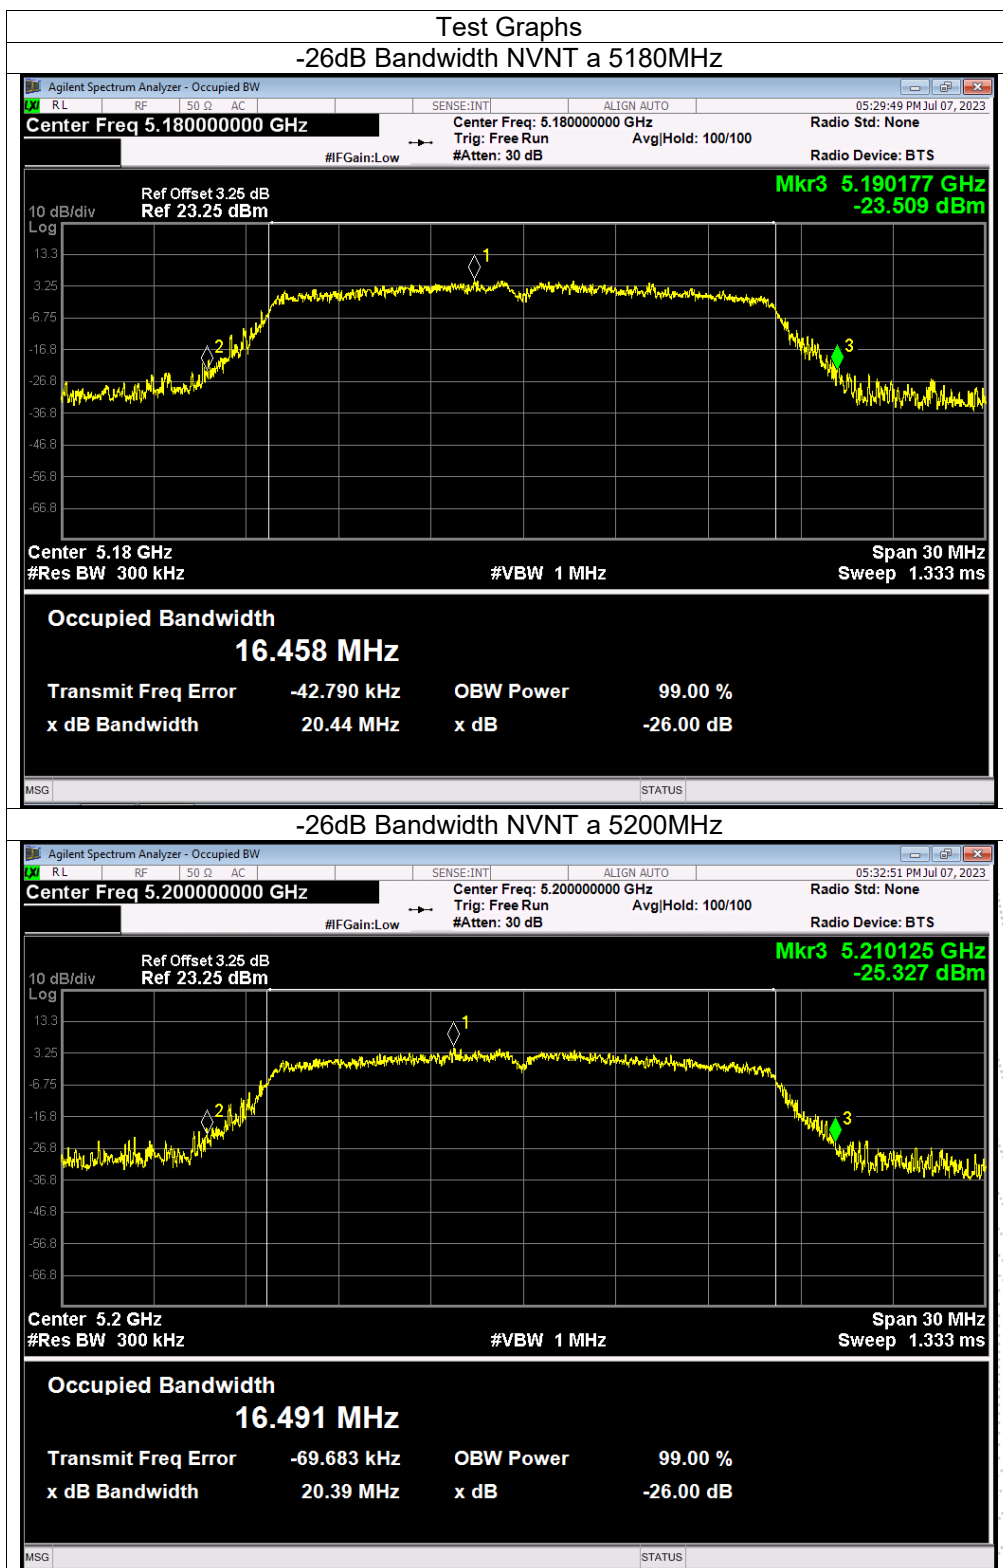


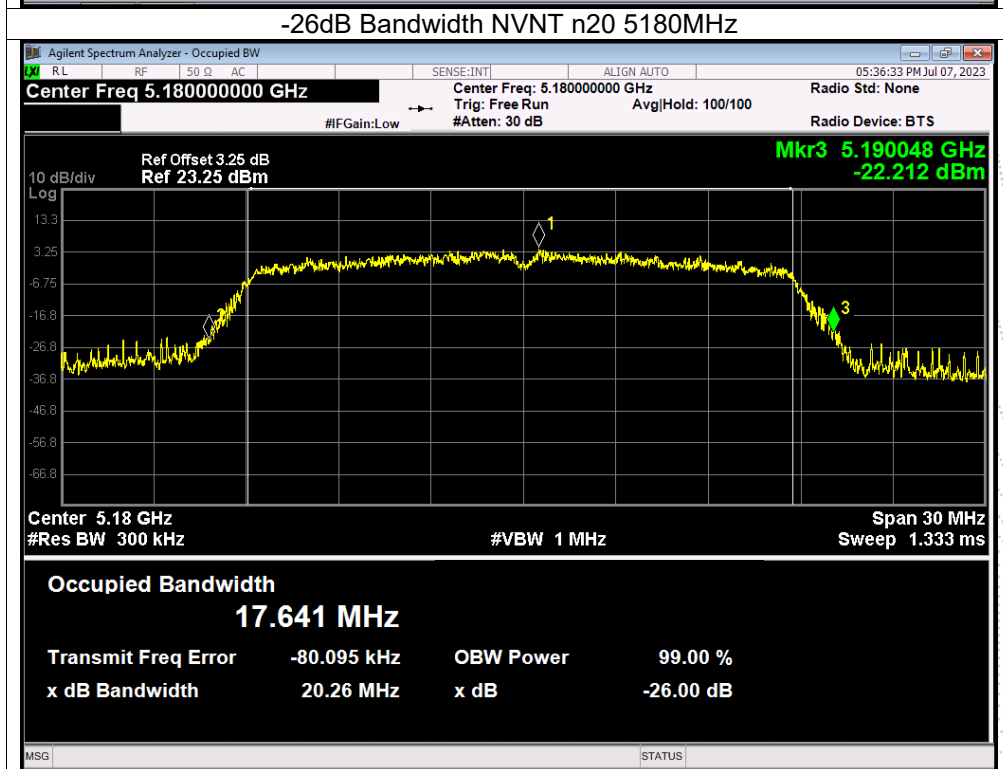
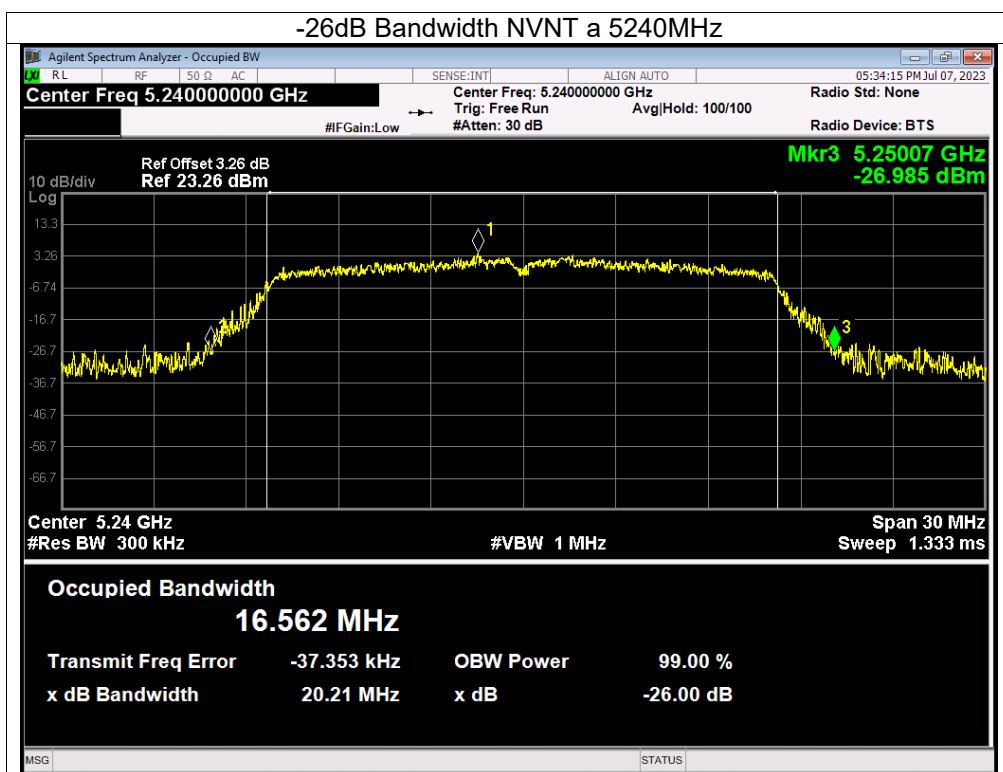


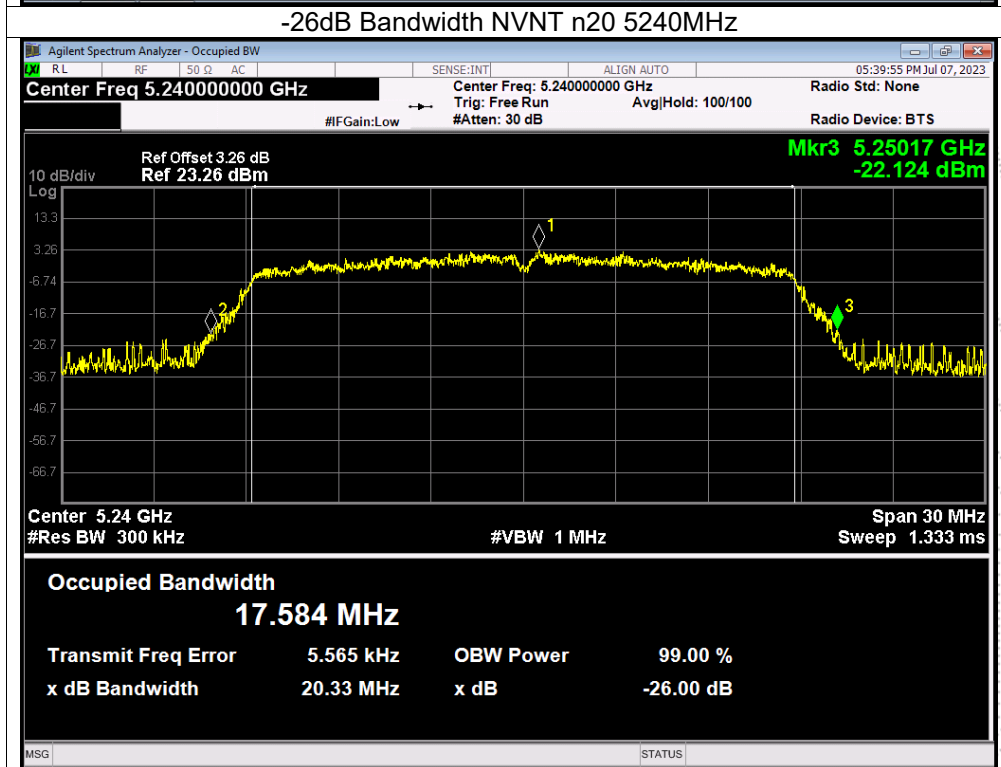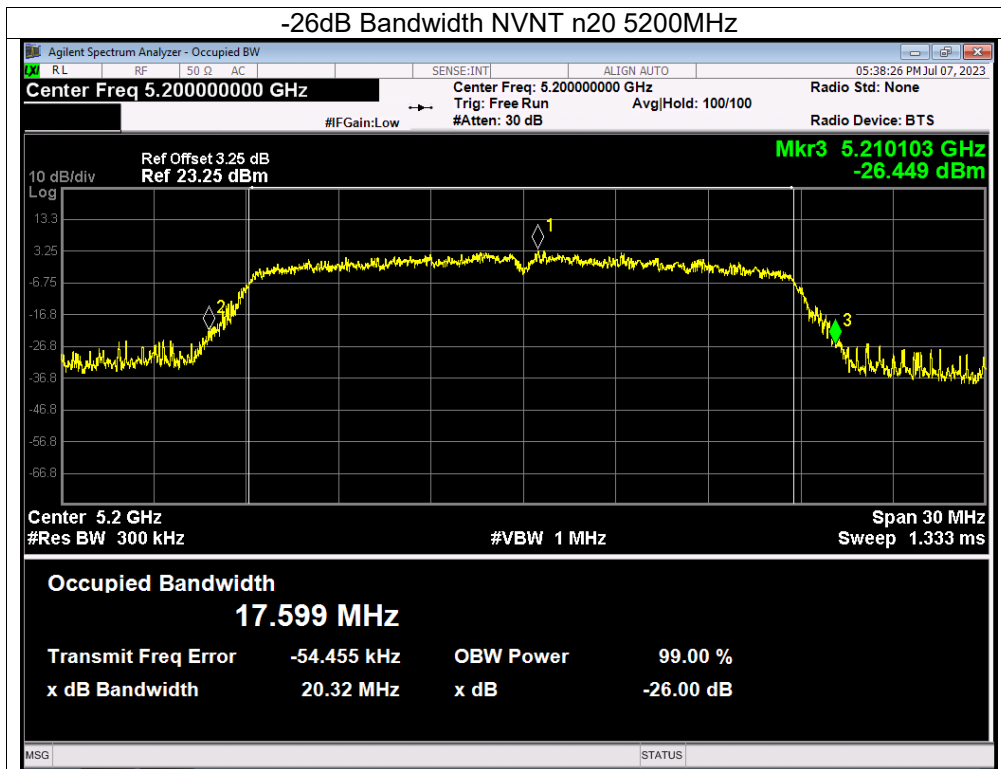


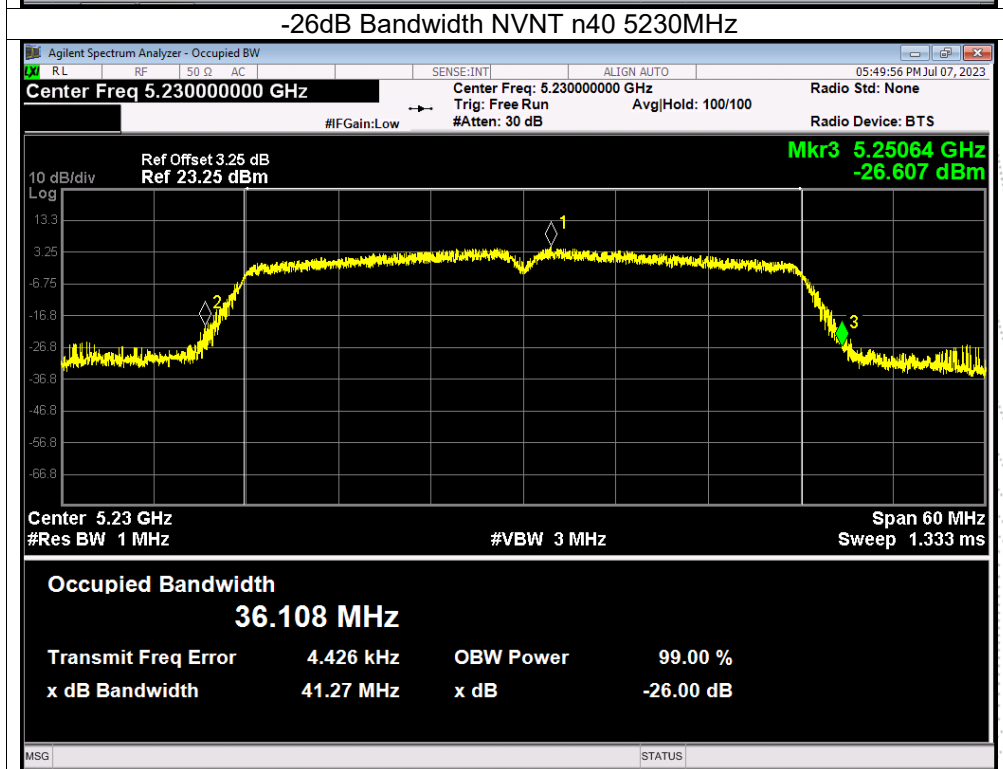
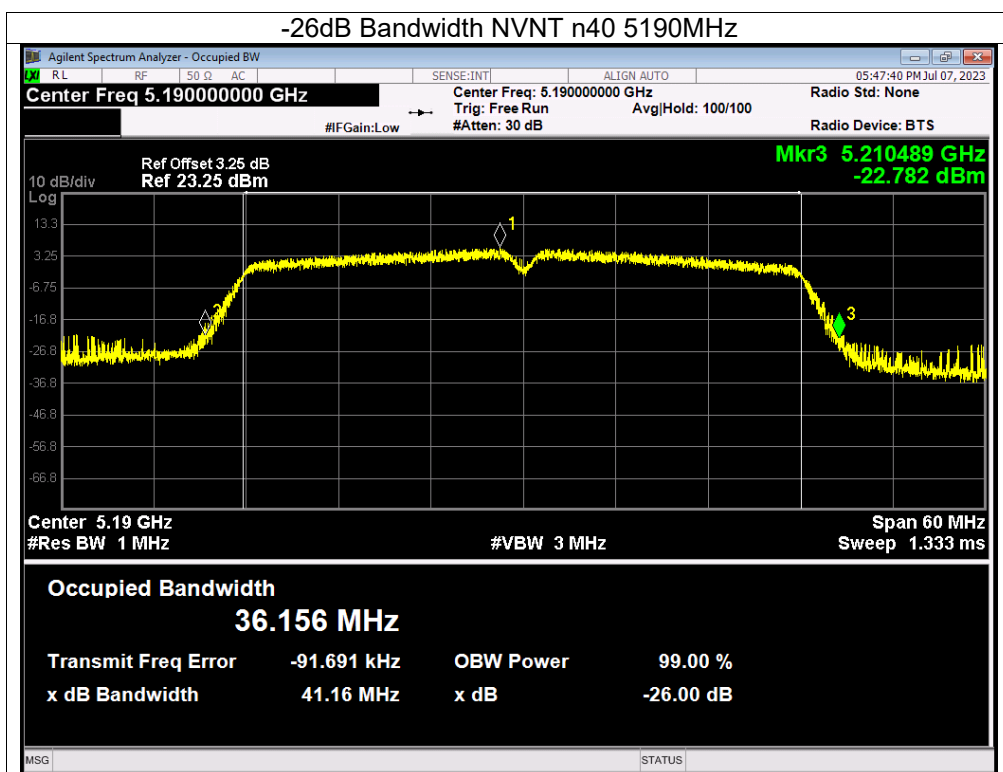


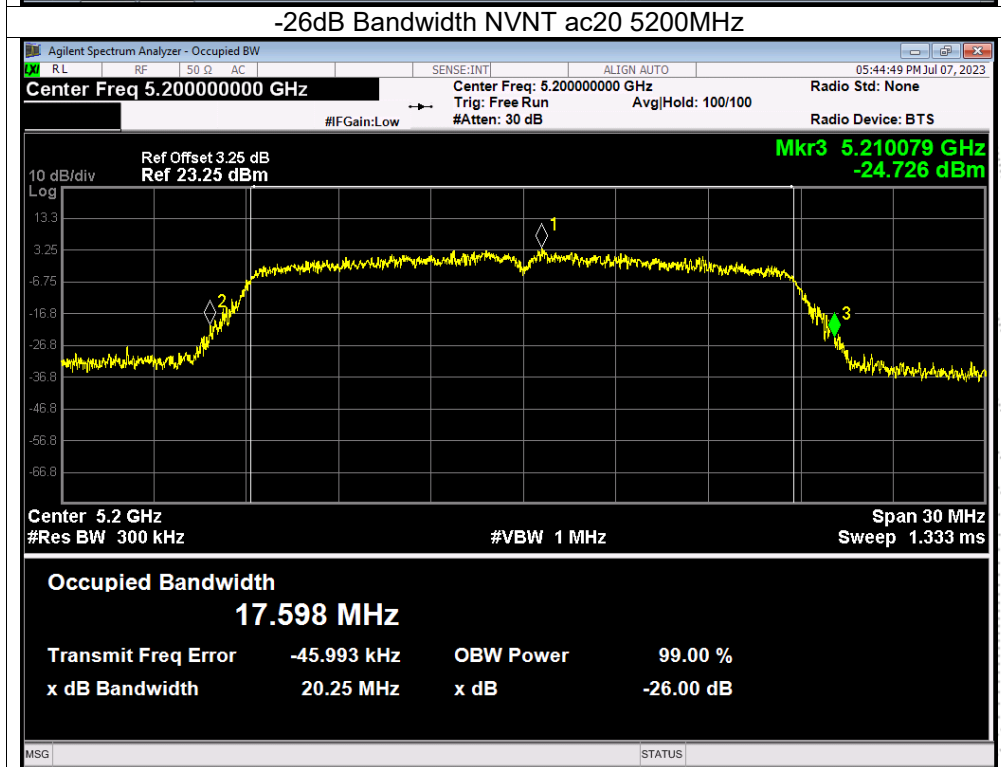
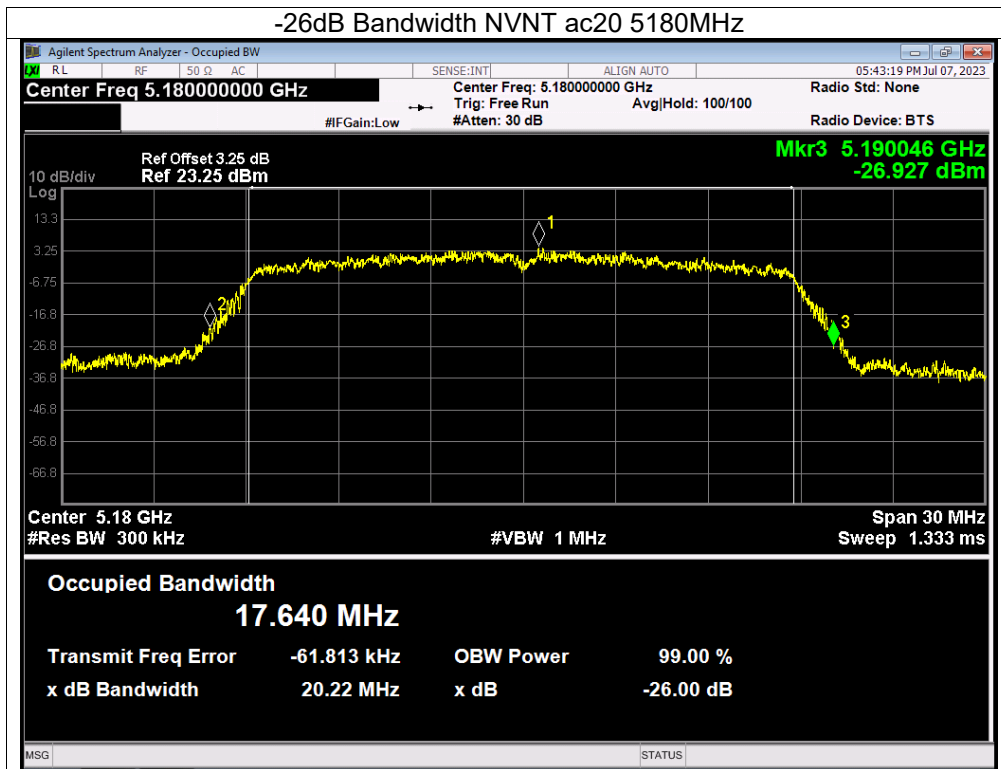


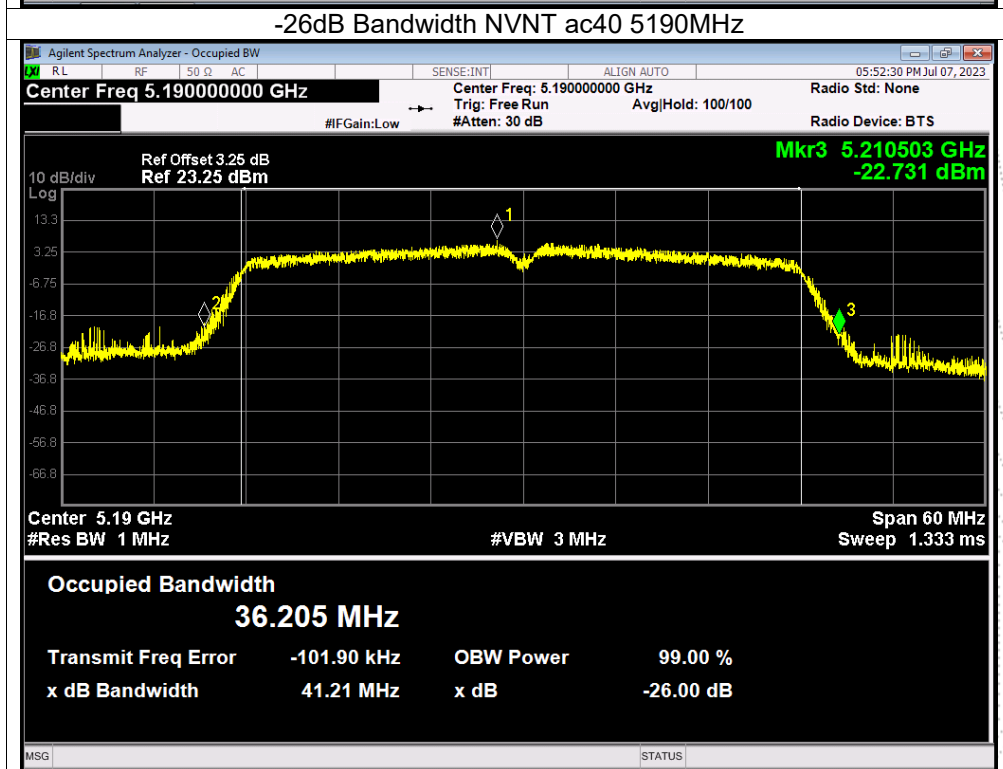
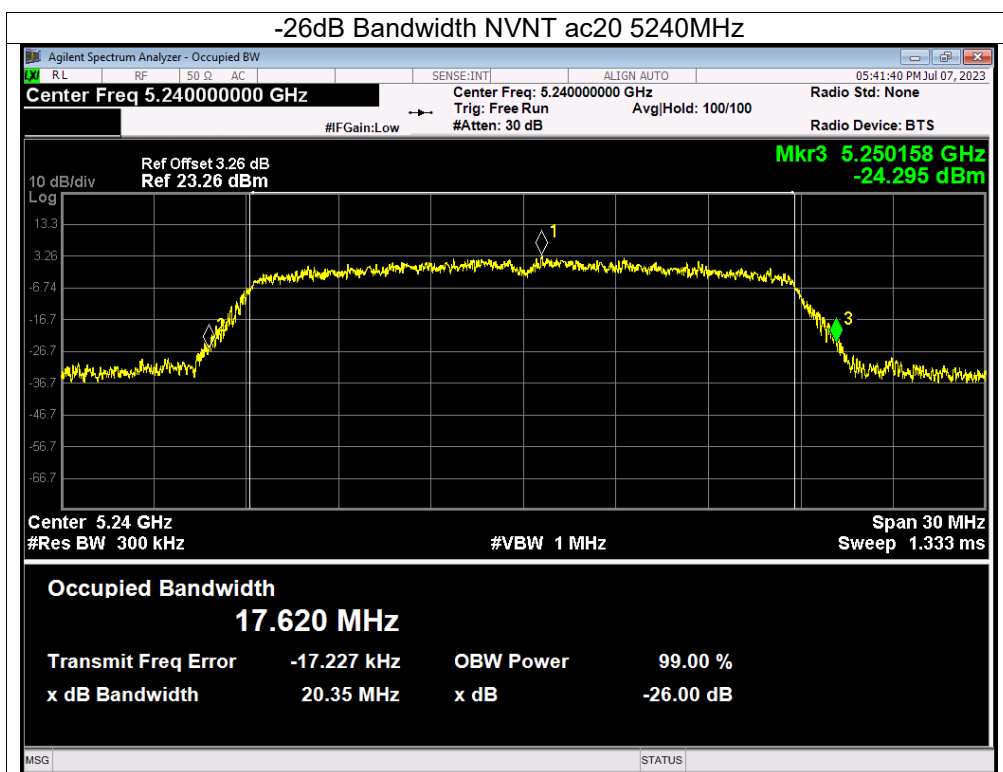


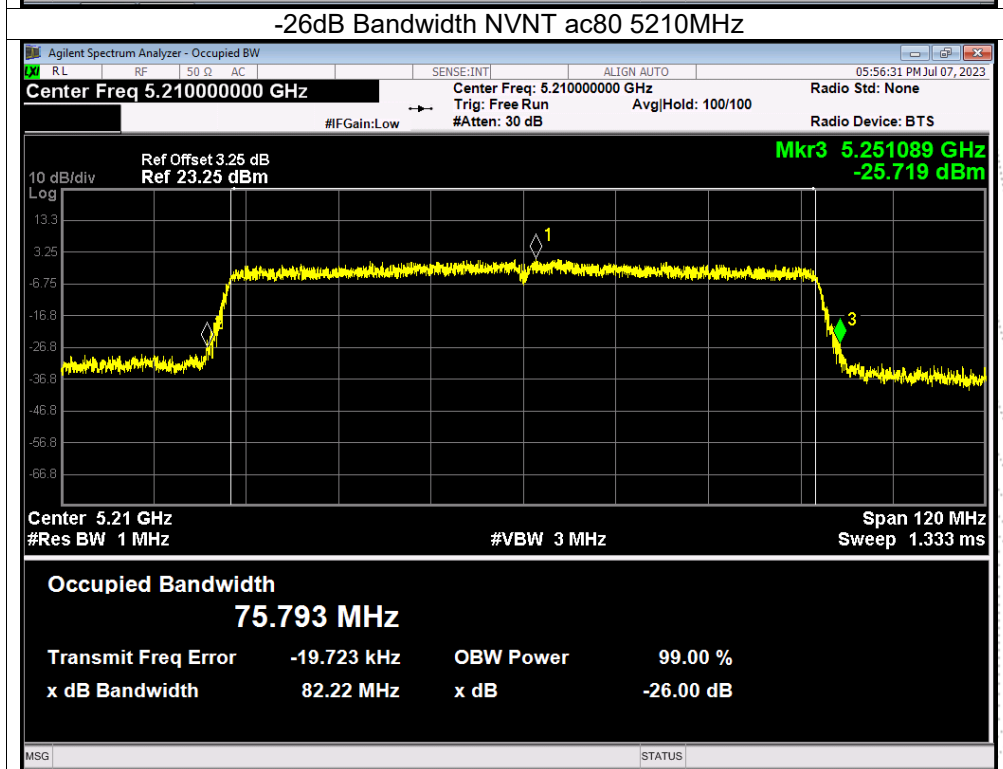
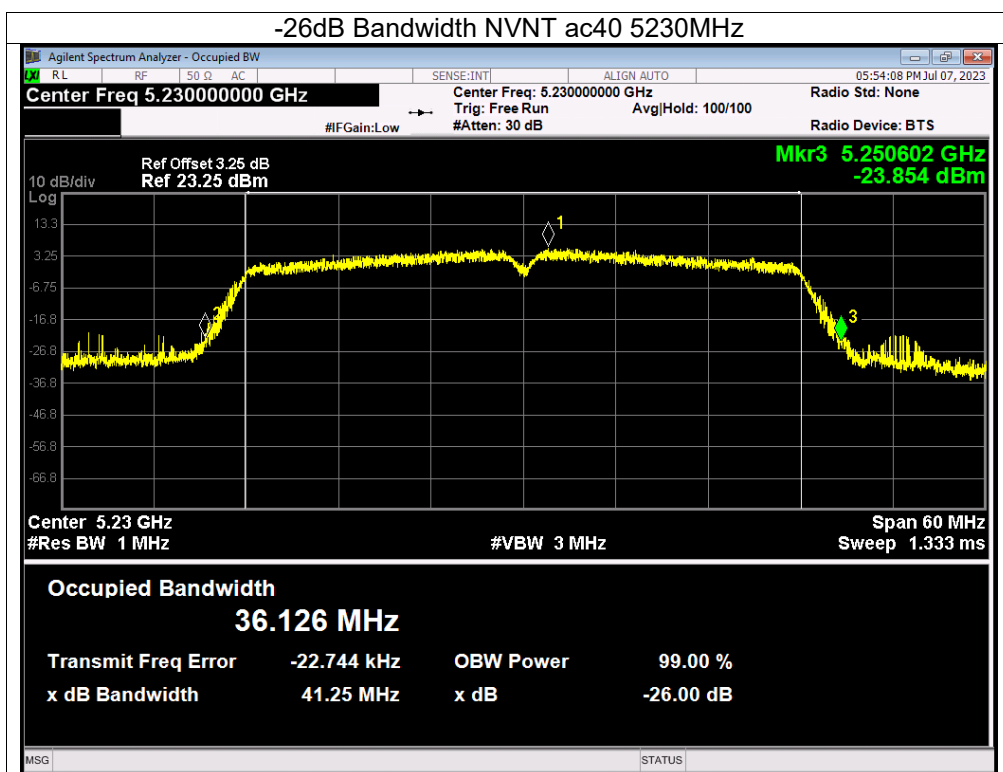



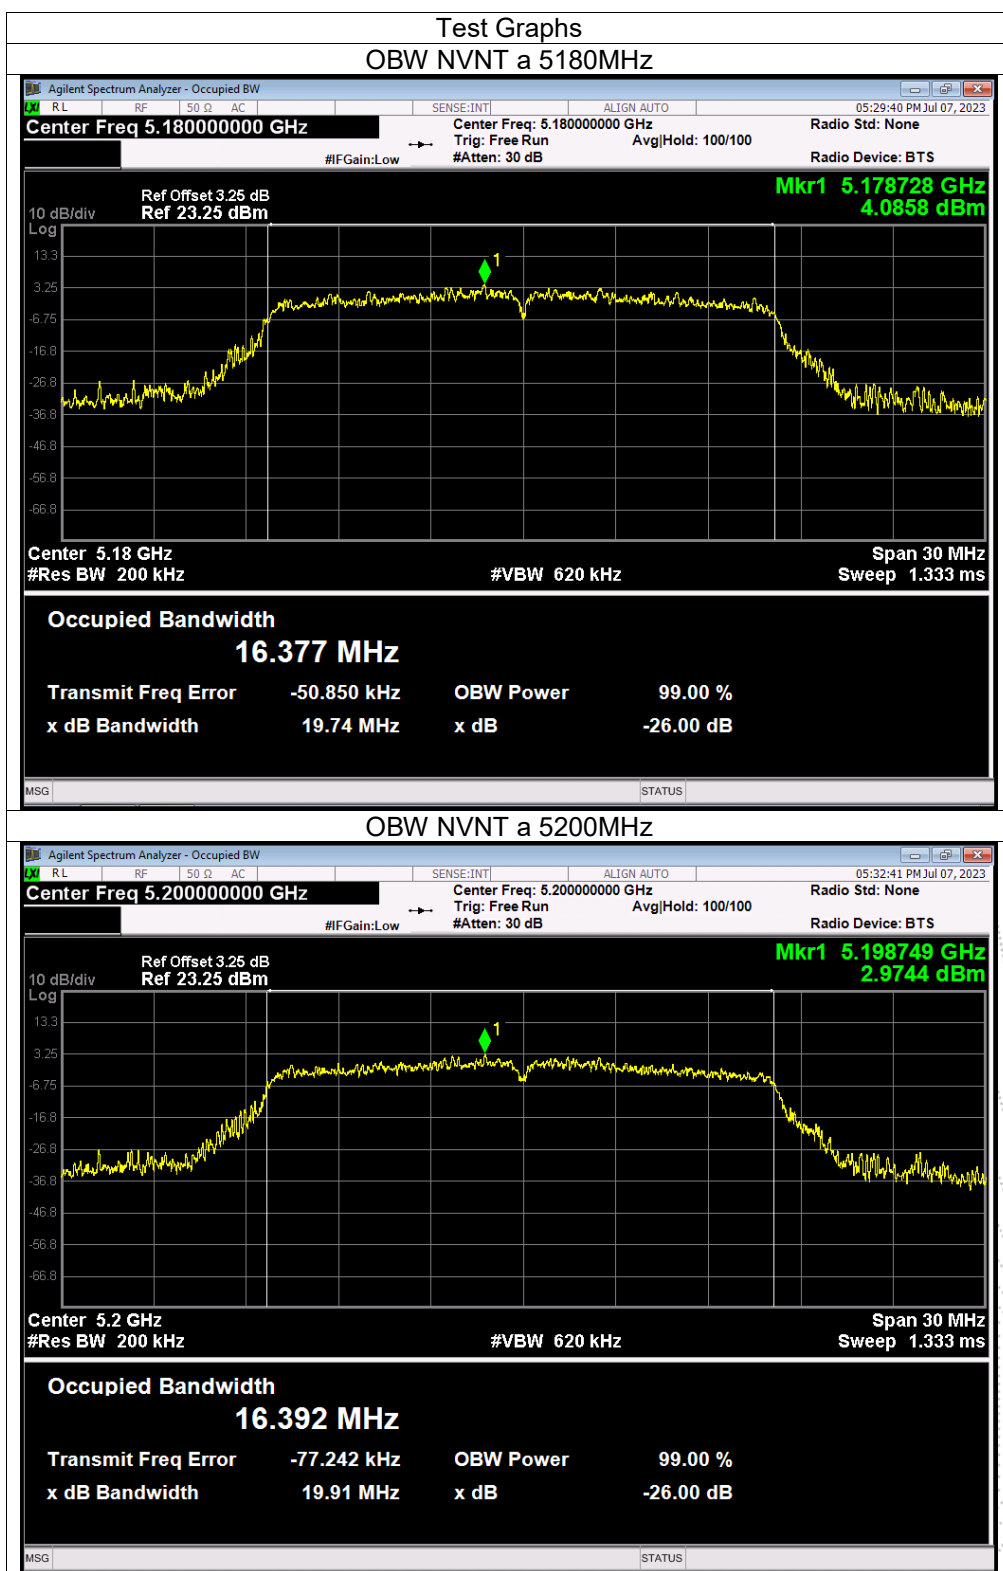


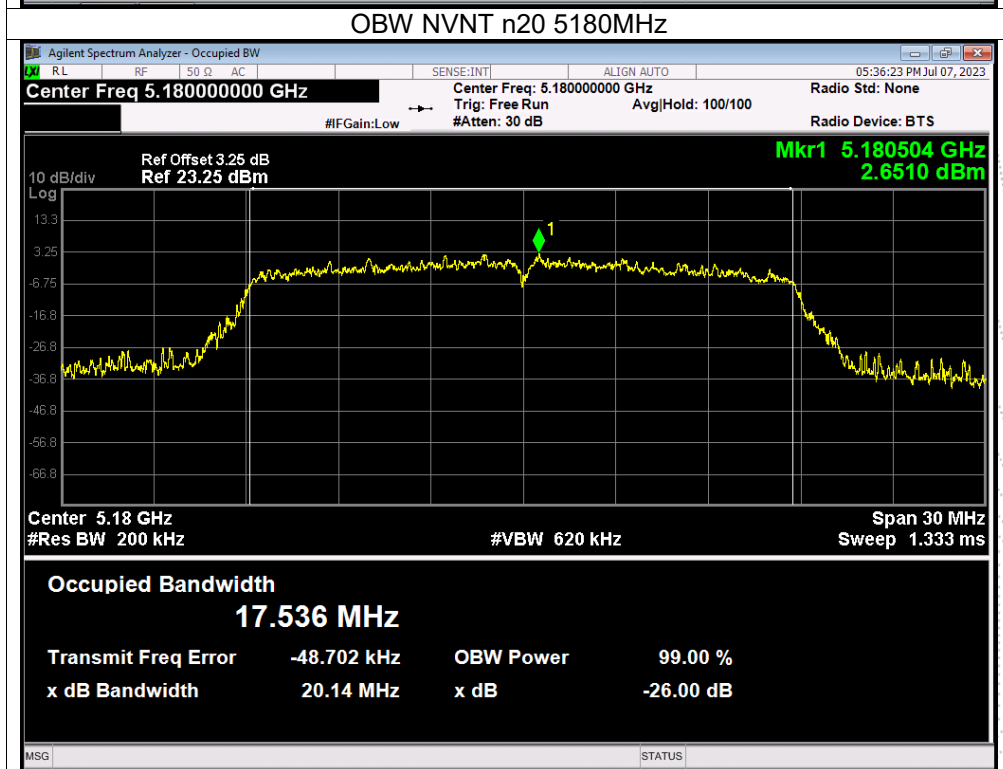
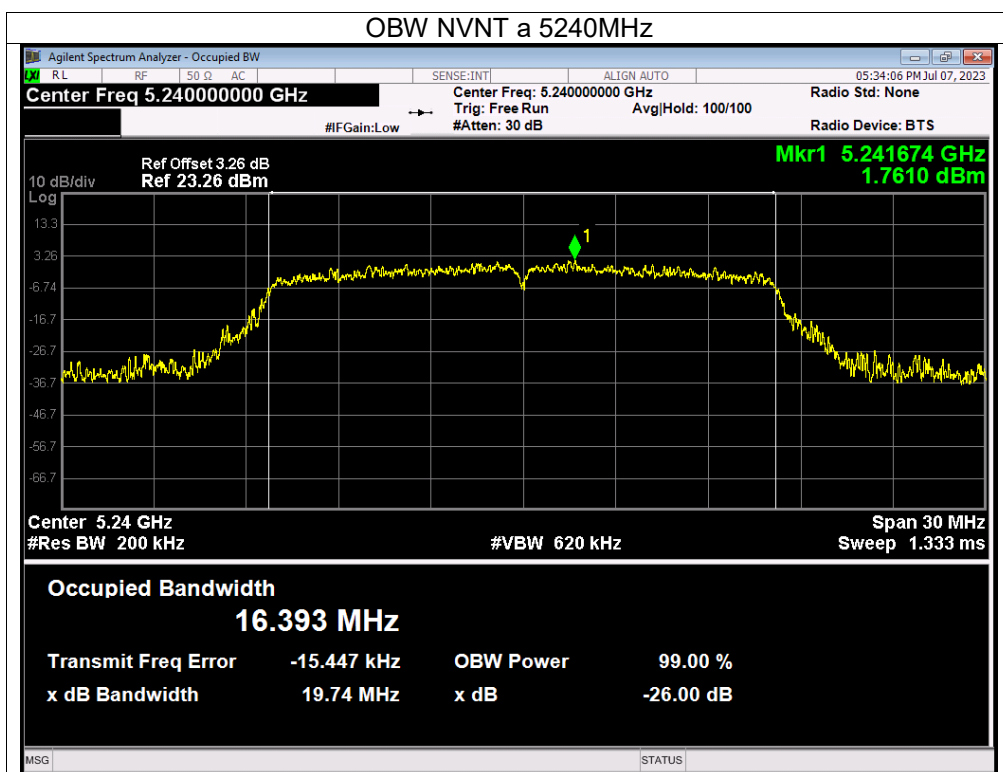


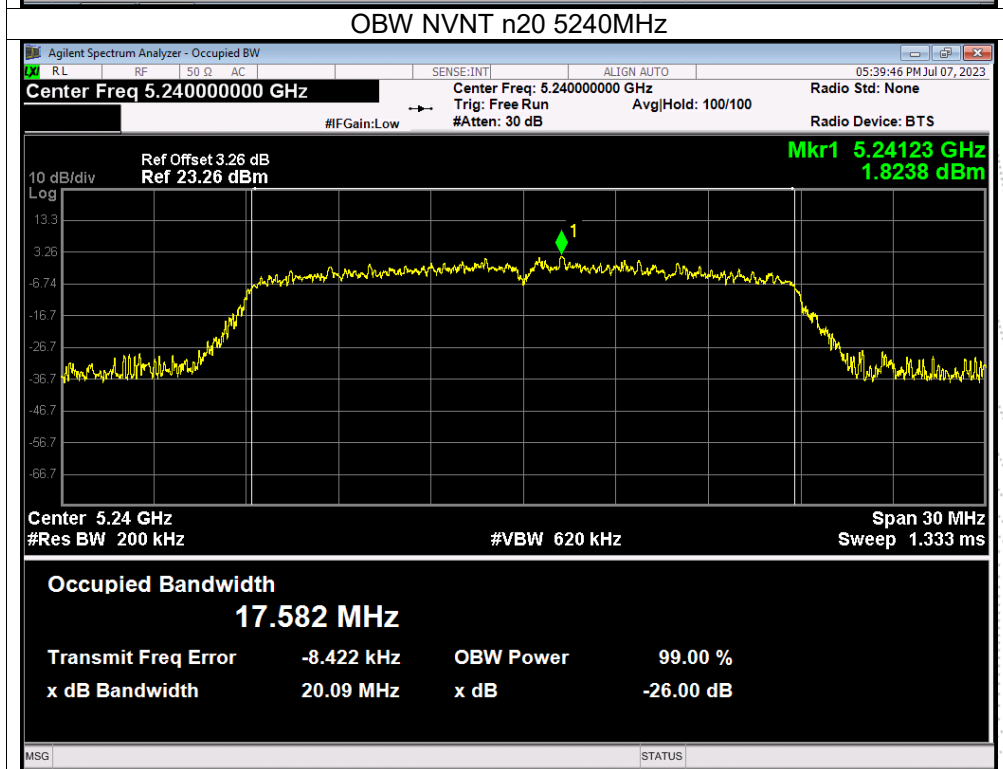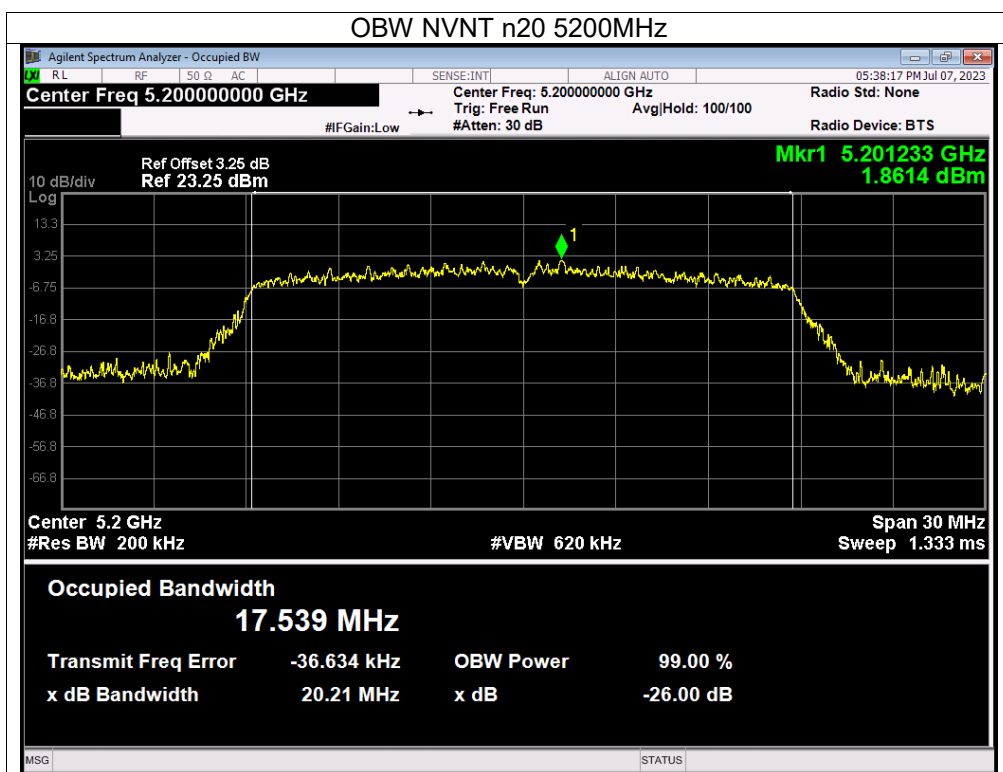

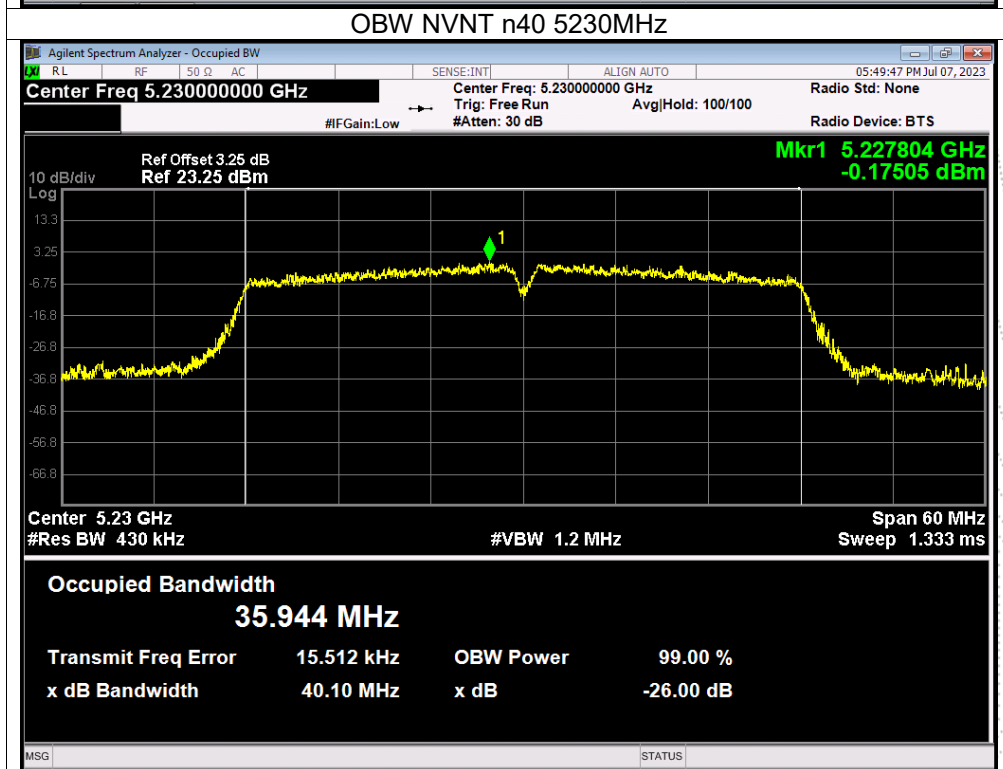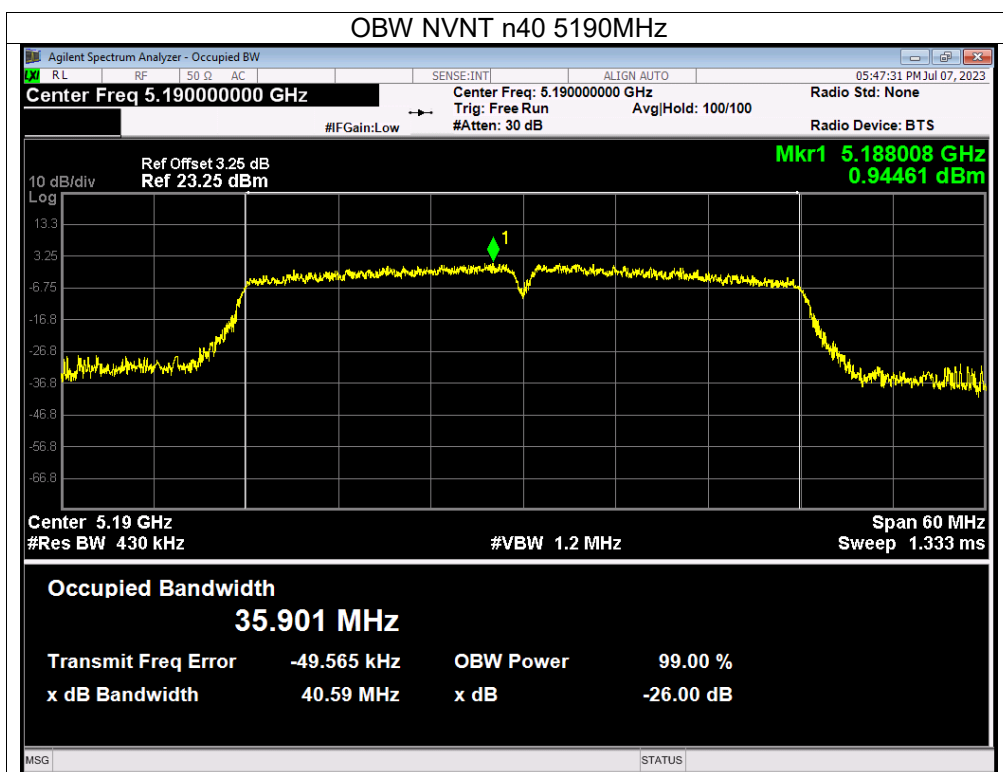

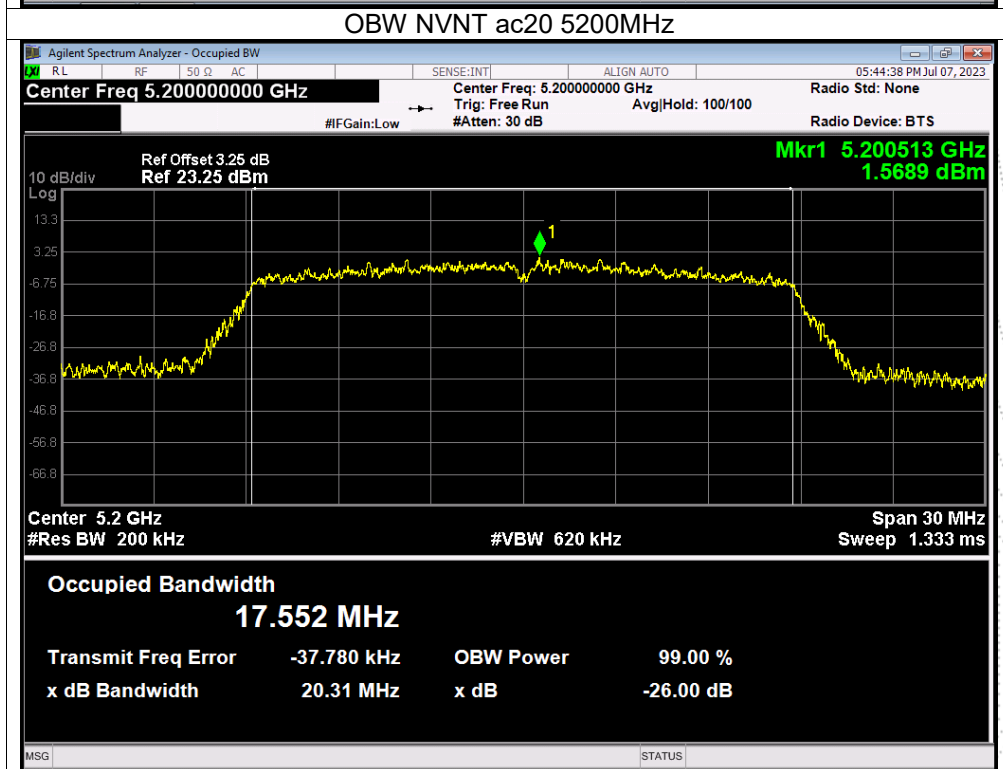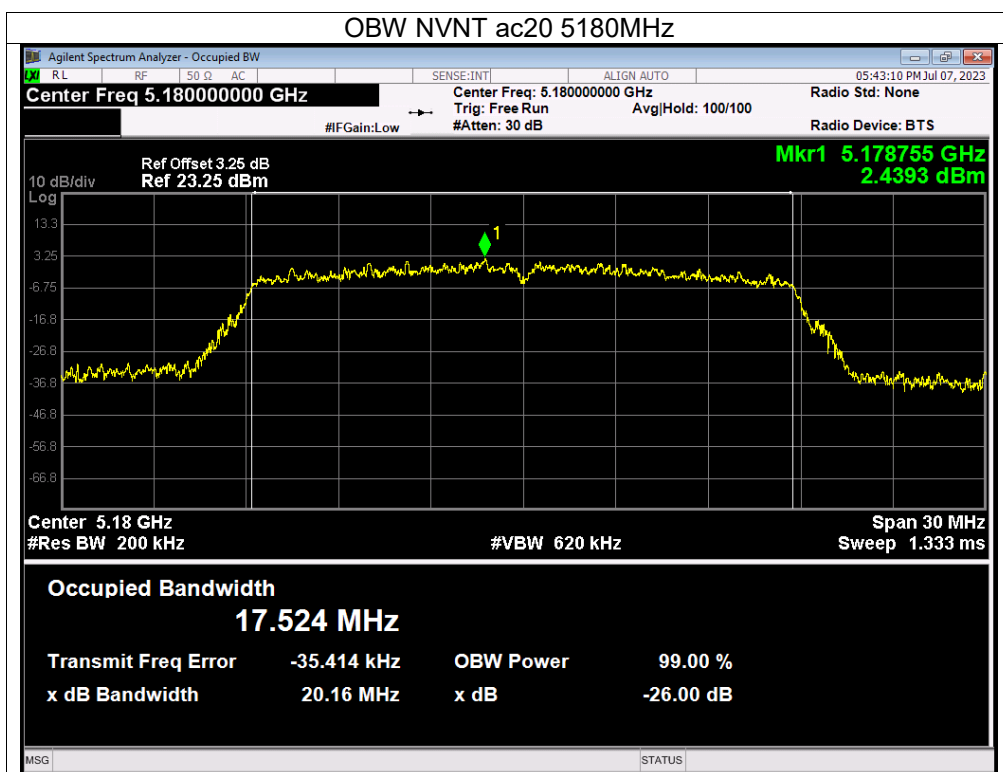

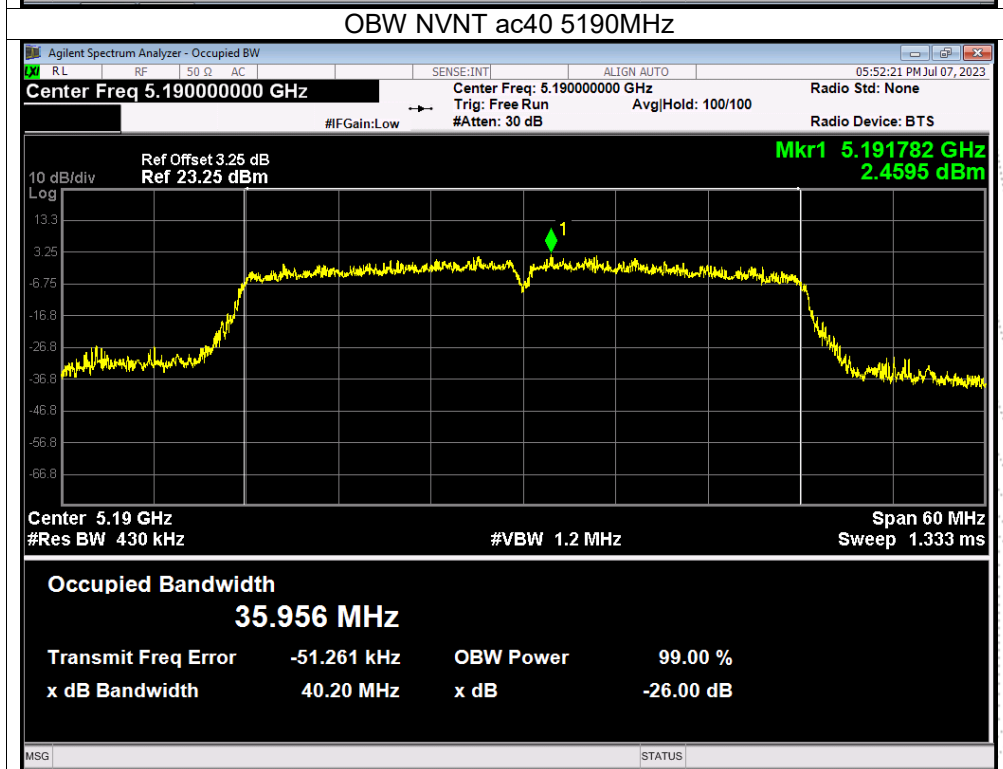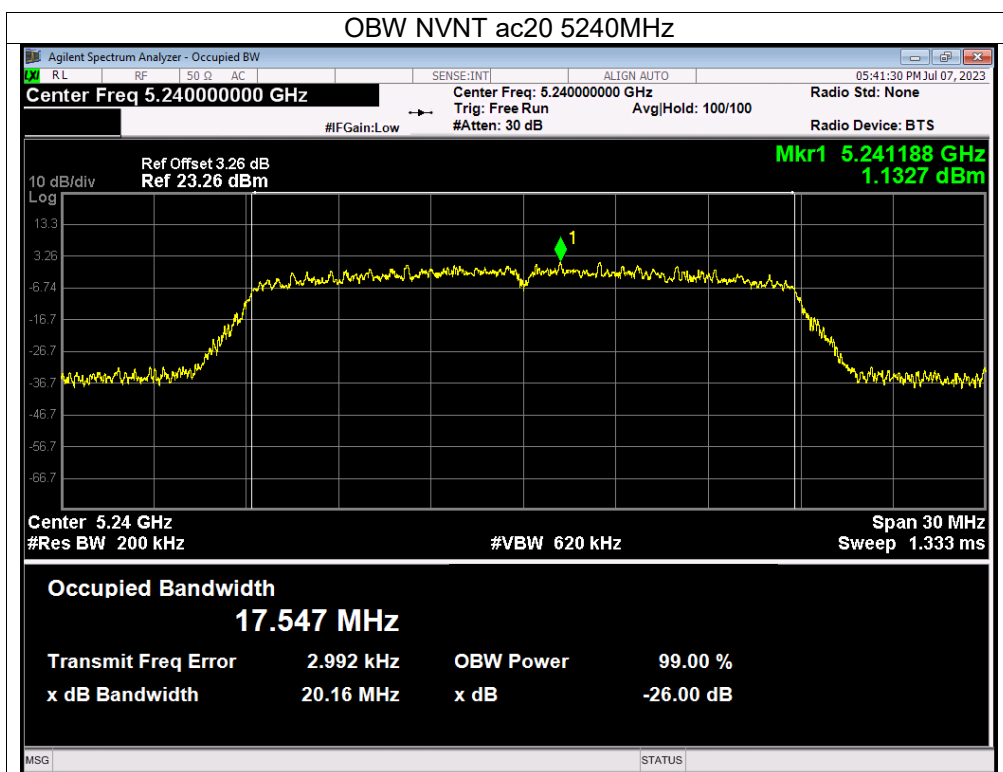

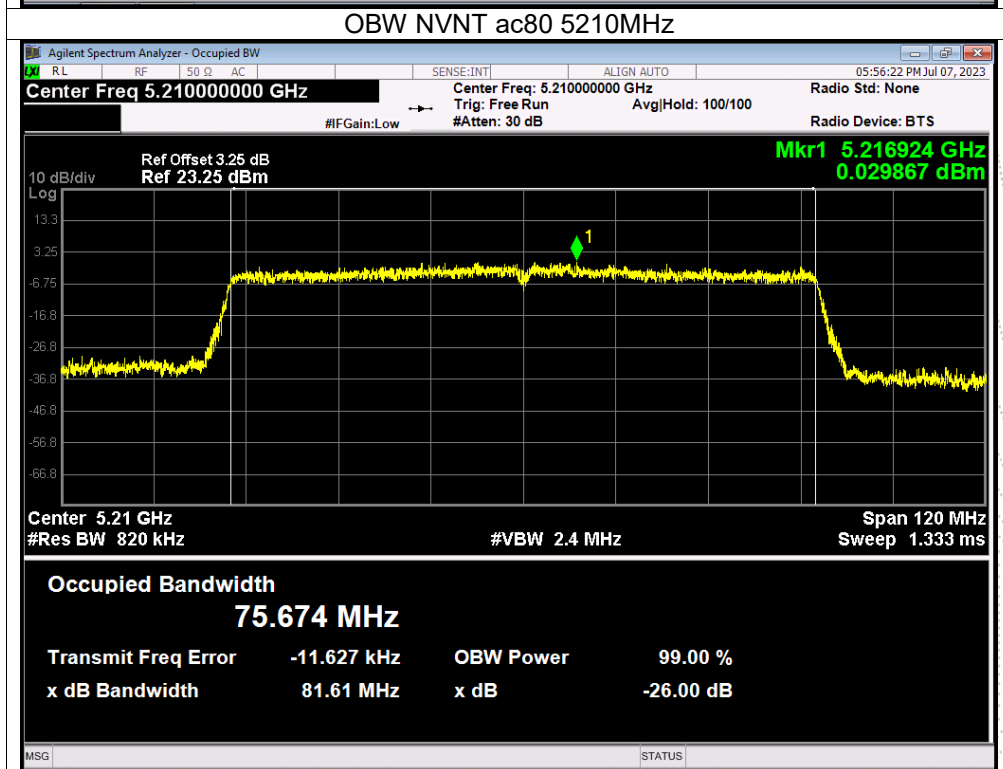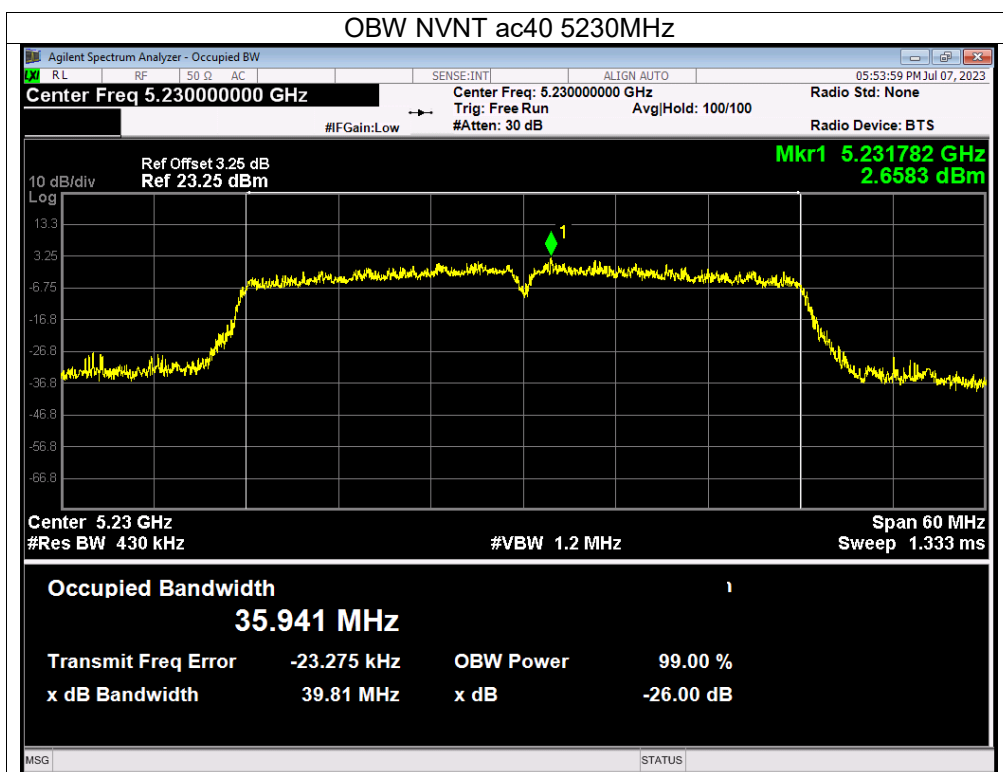


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		


Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-6dB bandwidth (MHz)	Limit -6dB bandwidth MHz	Result
NVNT	a	5745	16.375	13.799	≥500	Pass
NVNT	a	5785	16.401	15.073	≥500	Pass
NVNT	a	5825	16.452	13.735	≥500	Pass
NVNT	n20	5745	17.552	15.009	≥500	Pass
NVNT	n20	5785	17.546	14.669	≥500	Pass
NVNT	n20	5825	17.618	14.592	≥500	Pass
NVNT	n40	5755	35.861	35.068	≥500	Pass
NVNT	n40	5795	35.853	35.028	≥500	Pass
NVNT	ac20	5745	17.589	14.634	≥500	Pass
NVNT	ac20	5785	17.523	14.628	≥500	Pass
NVNT	ac20	5825	17.519	15.455	≥500	Pass
NVNT	ac40	5755	35.897	35.047	≥500	Pass
NVNT	ac40	5795	35.864	34.983	≥500	Pass
NVNT	ac80	5775	75.652	75.348	≥500	Pass



Test Graphs



-6dB Bandwidth NVNT a 5745MHz


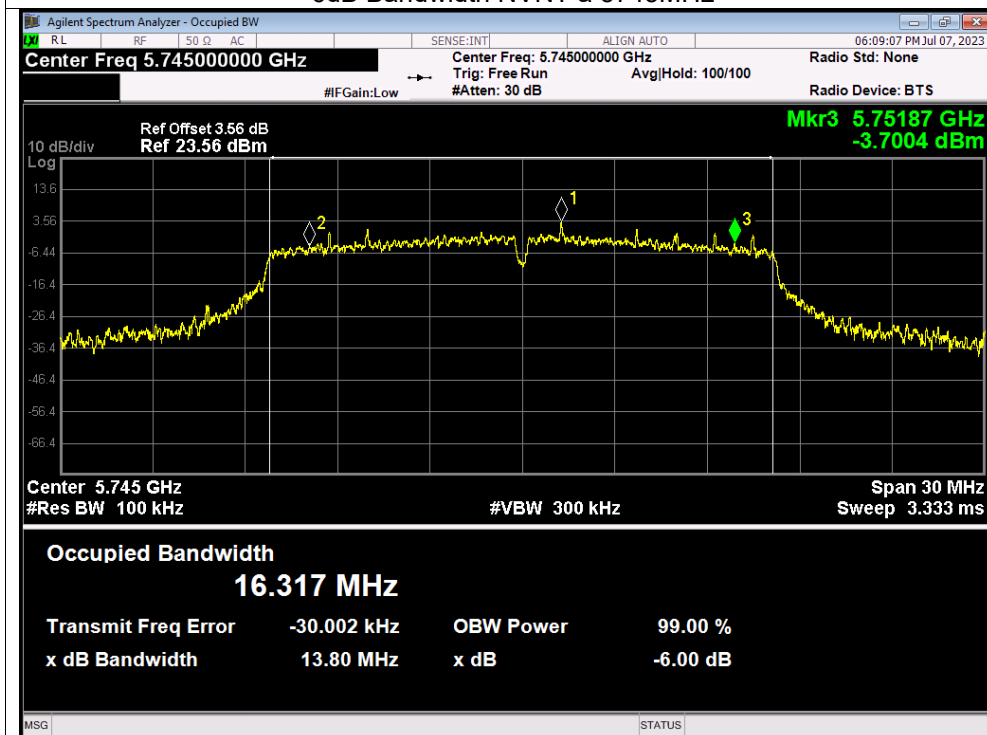




-6dB Bandwidth NVNT a 5785MHz


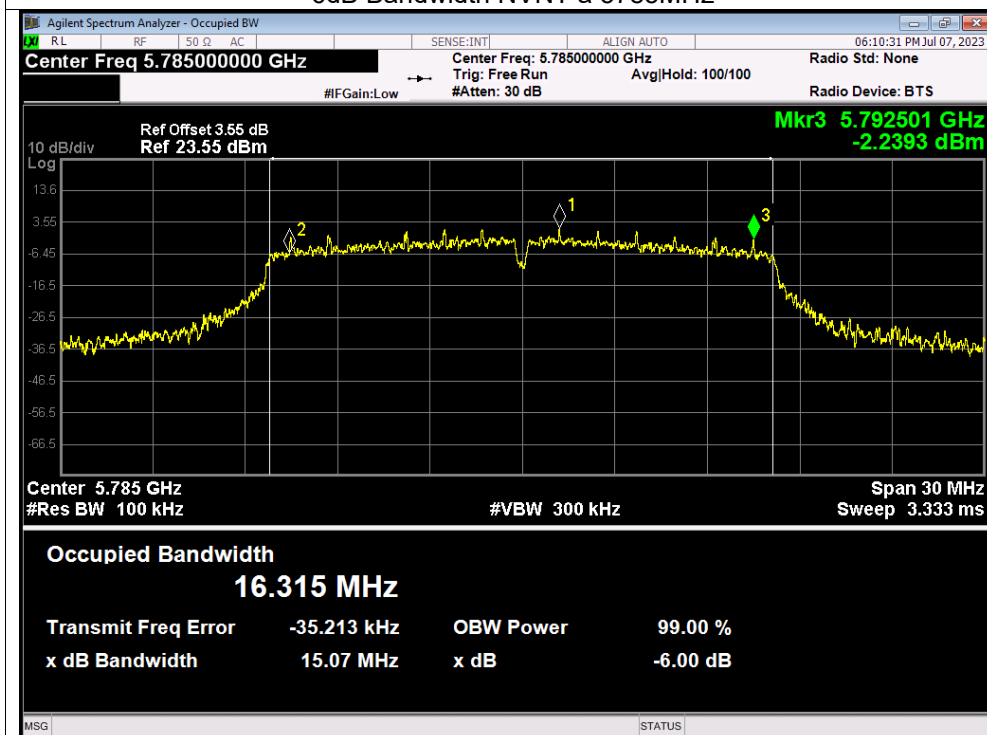


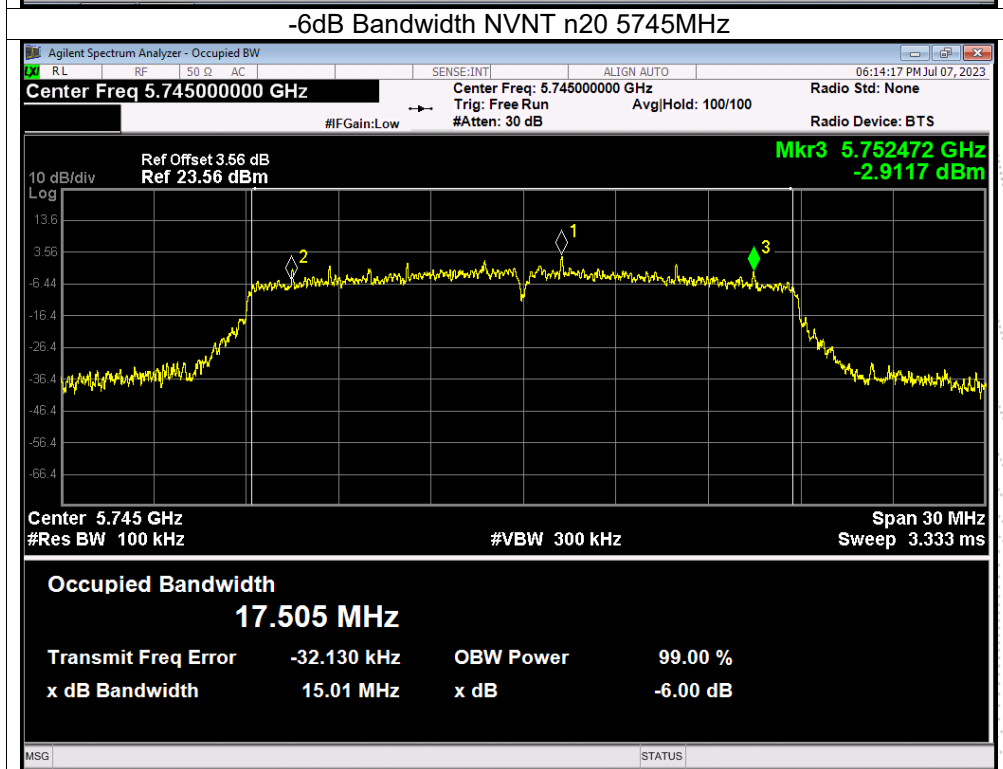
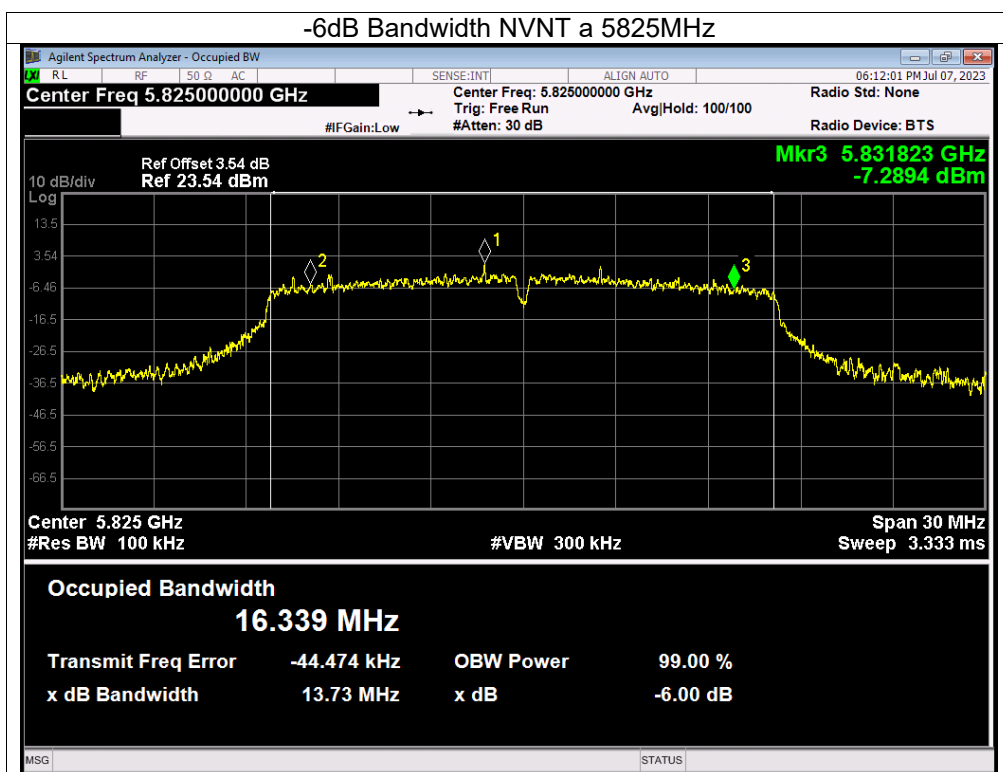


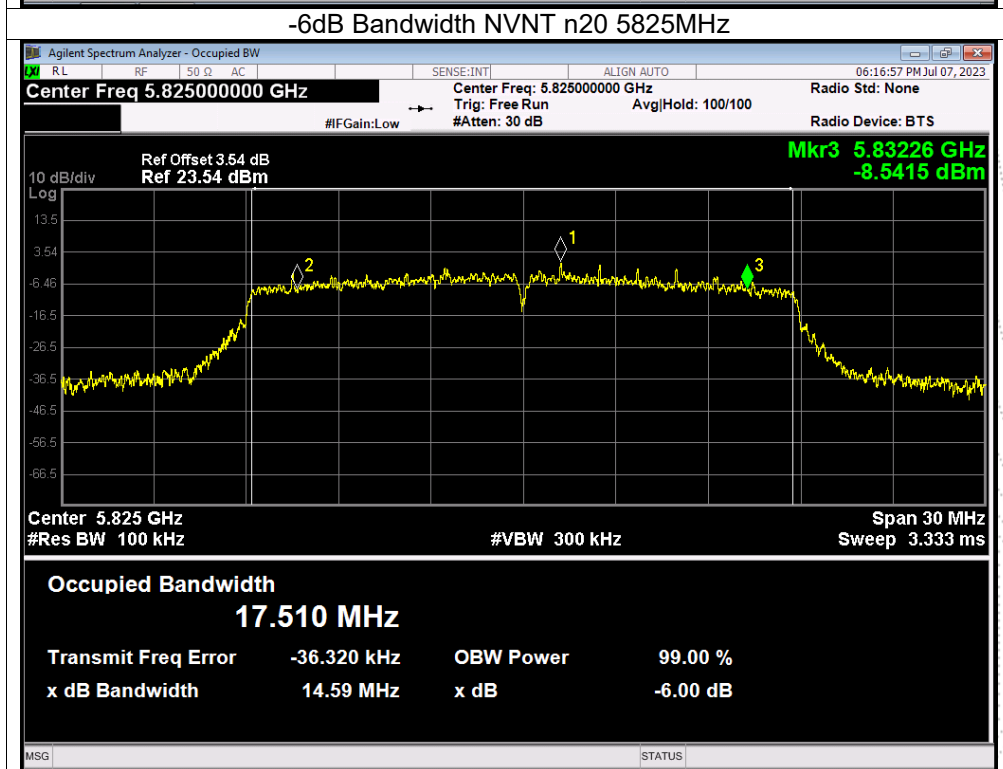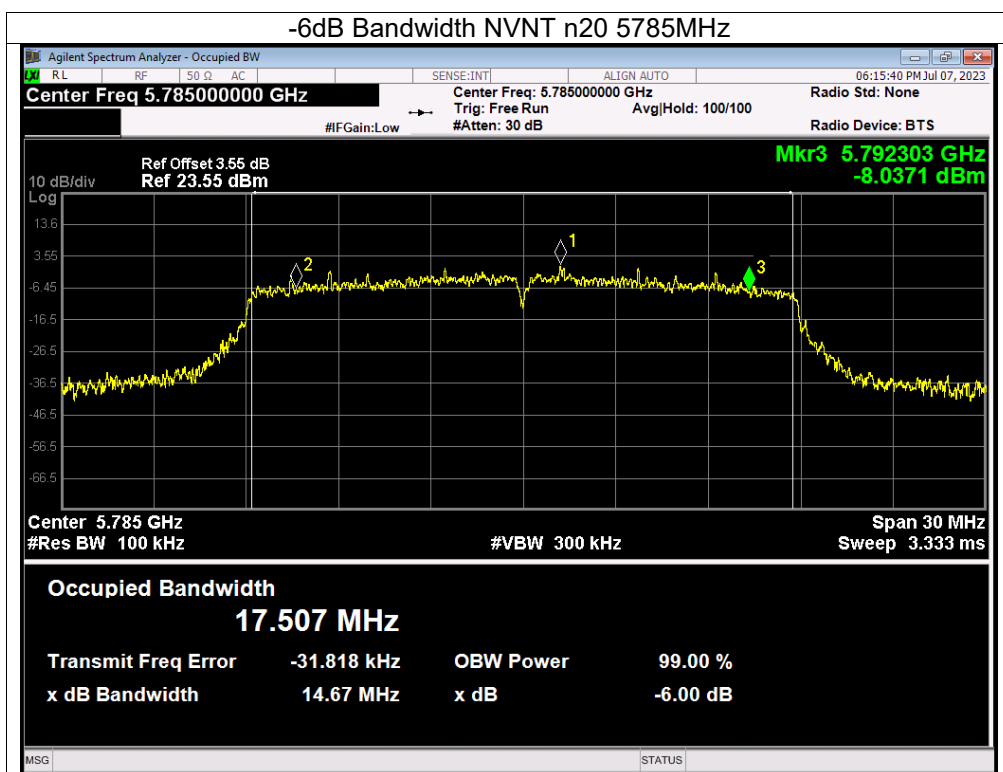


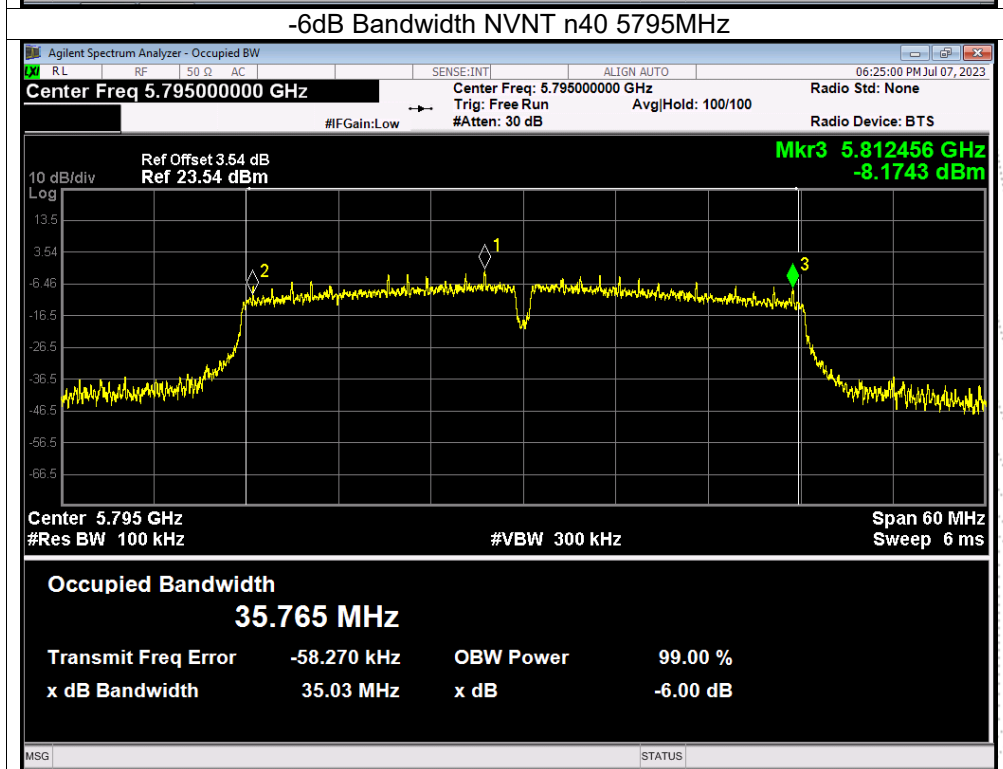
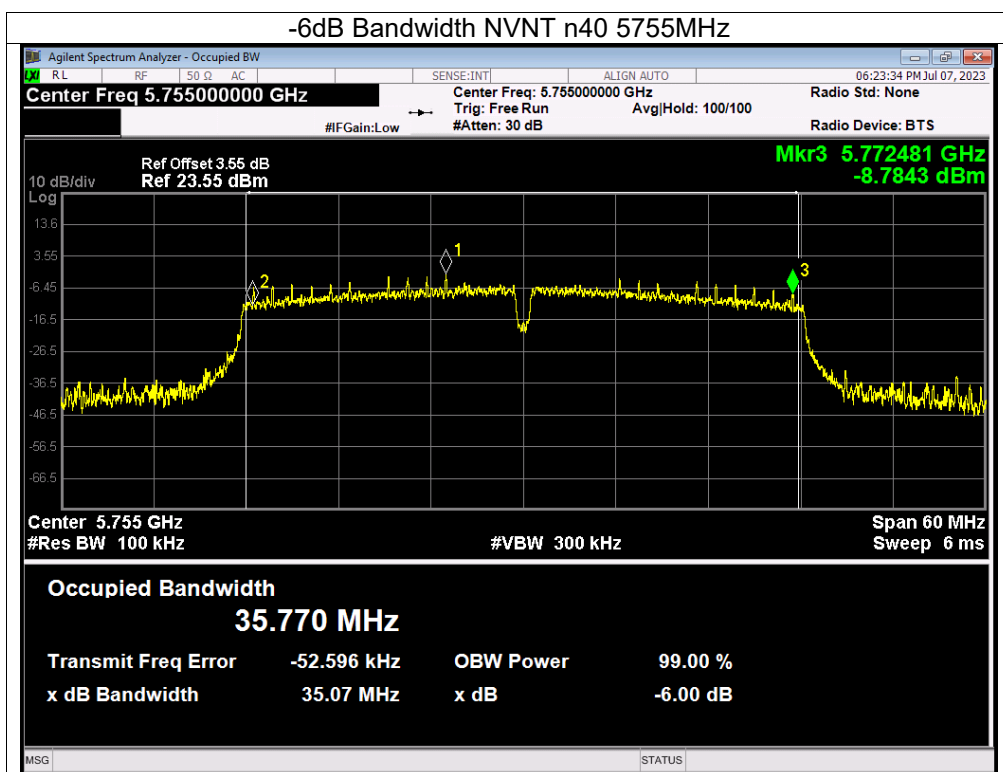


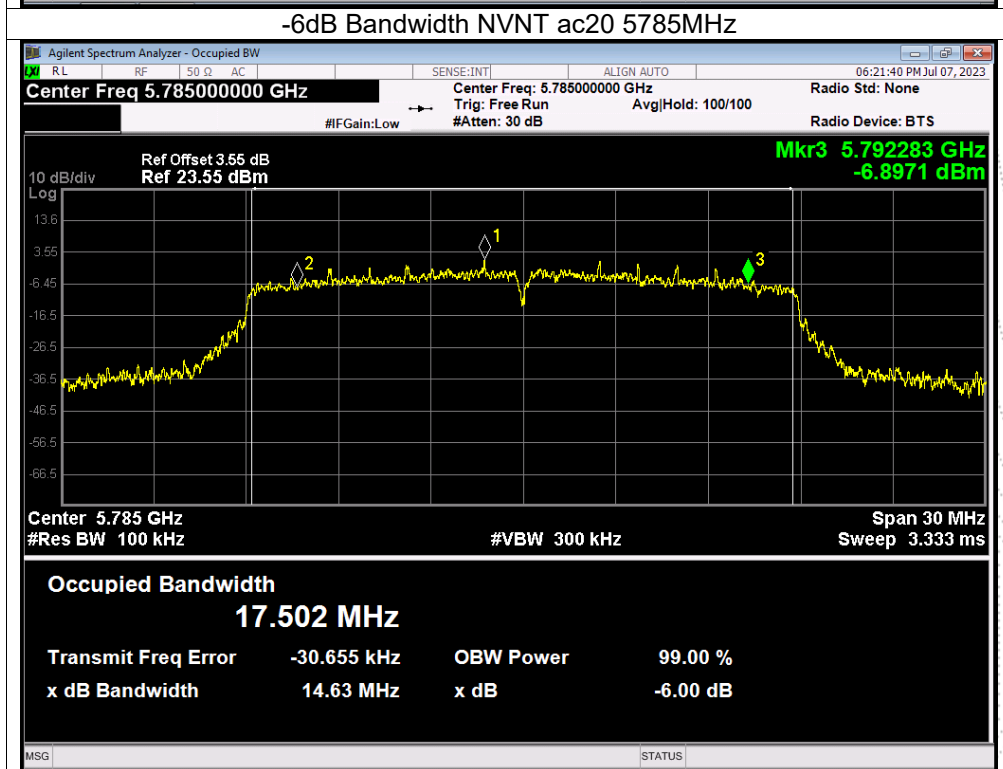
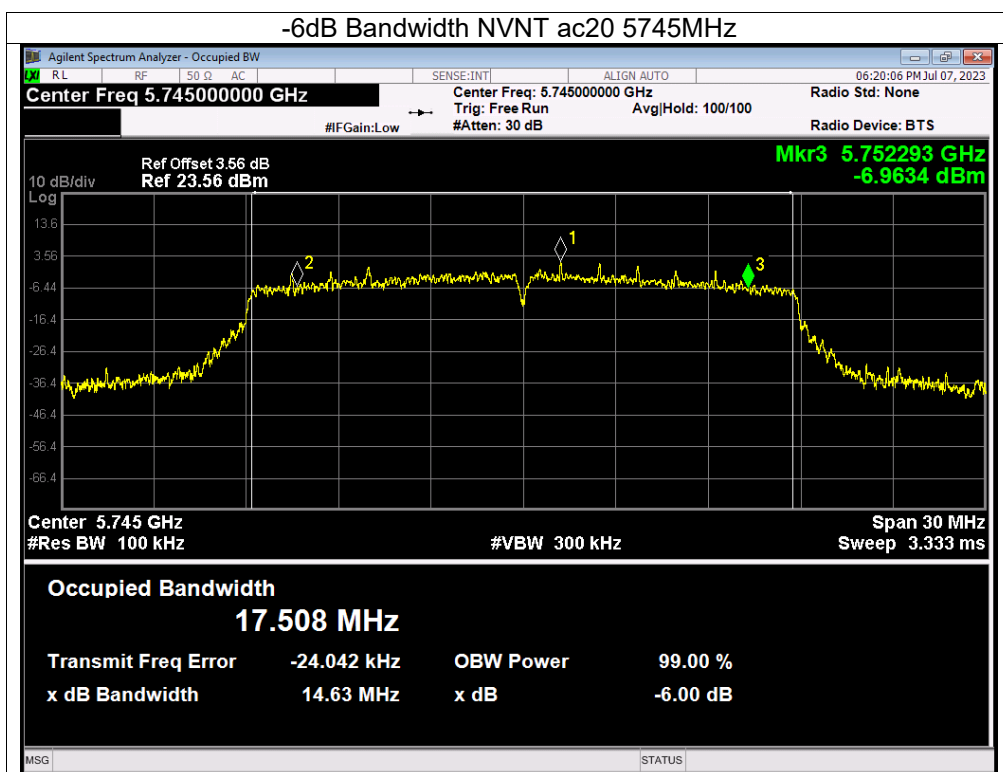


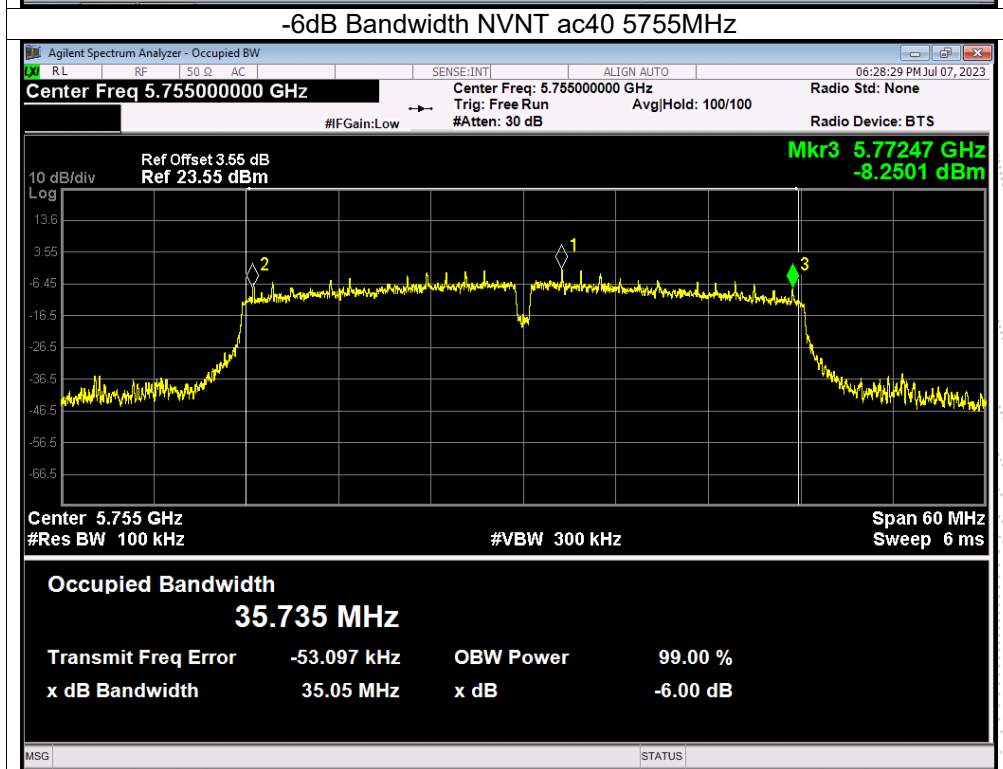
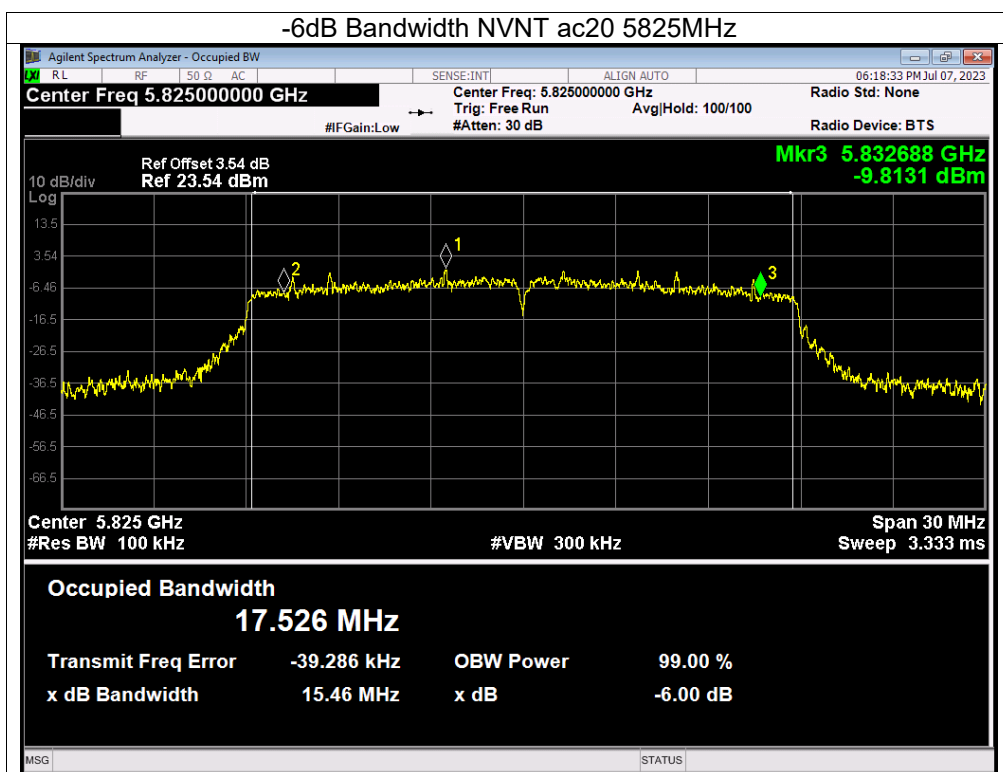


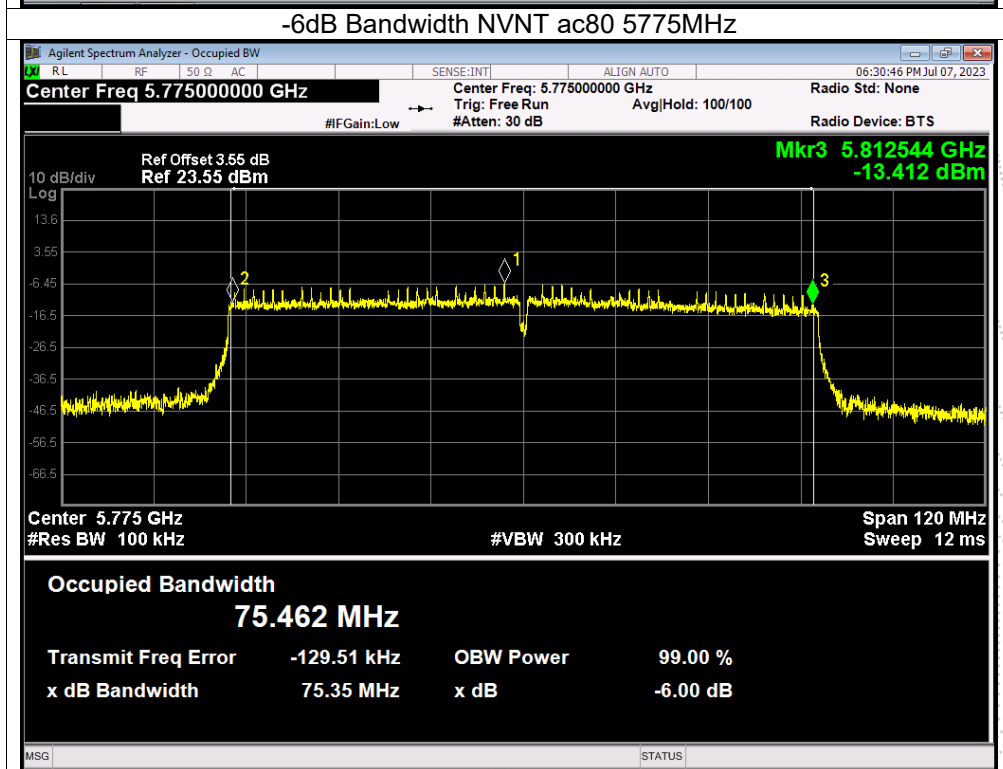
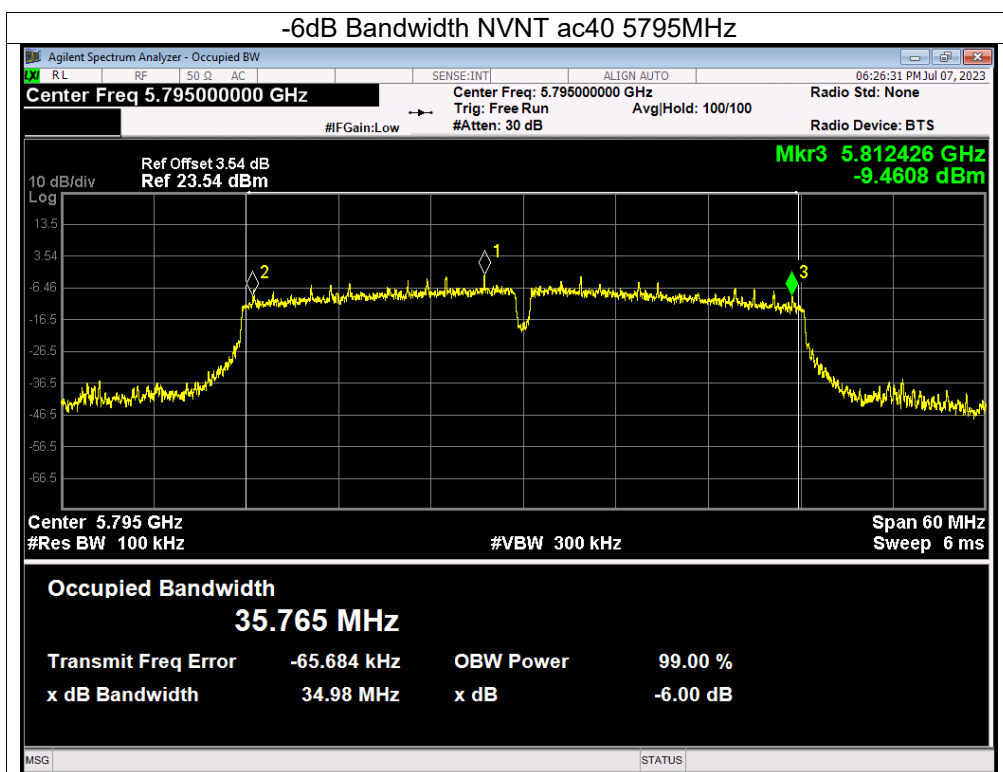



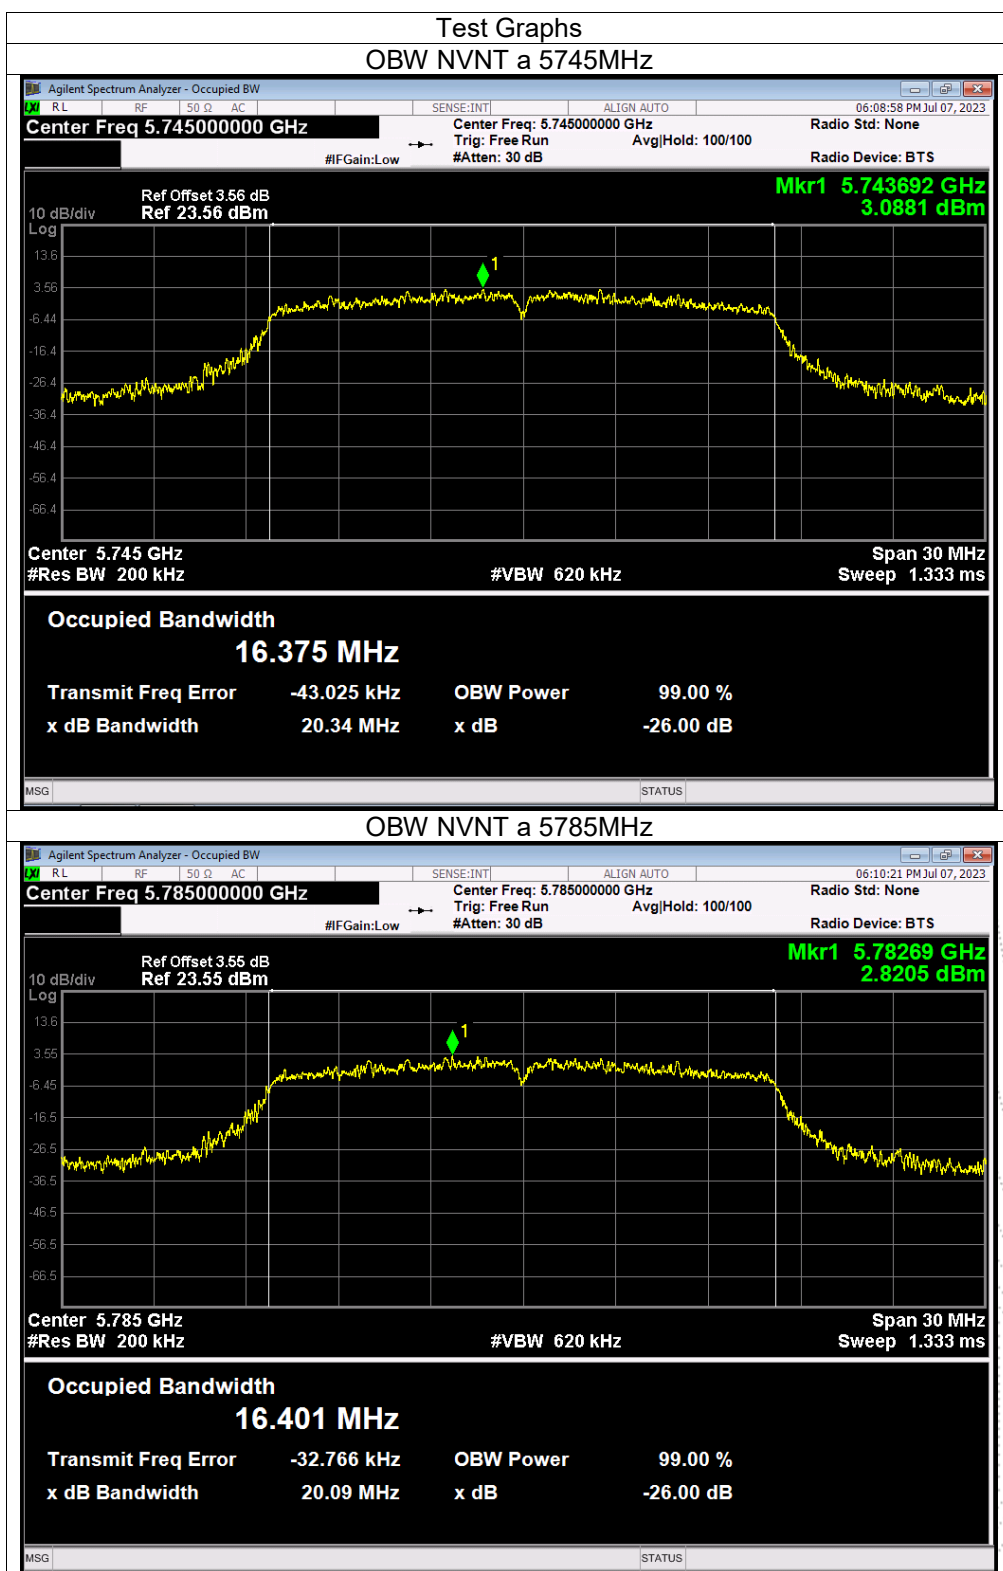


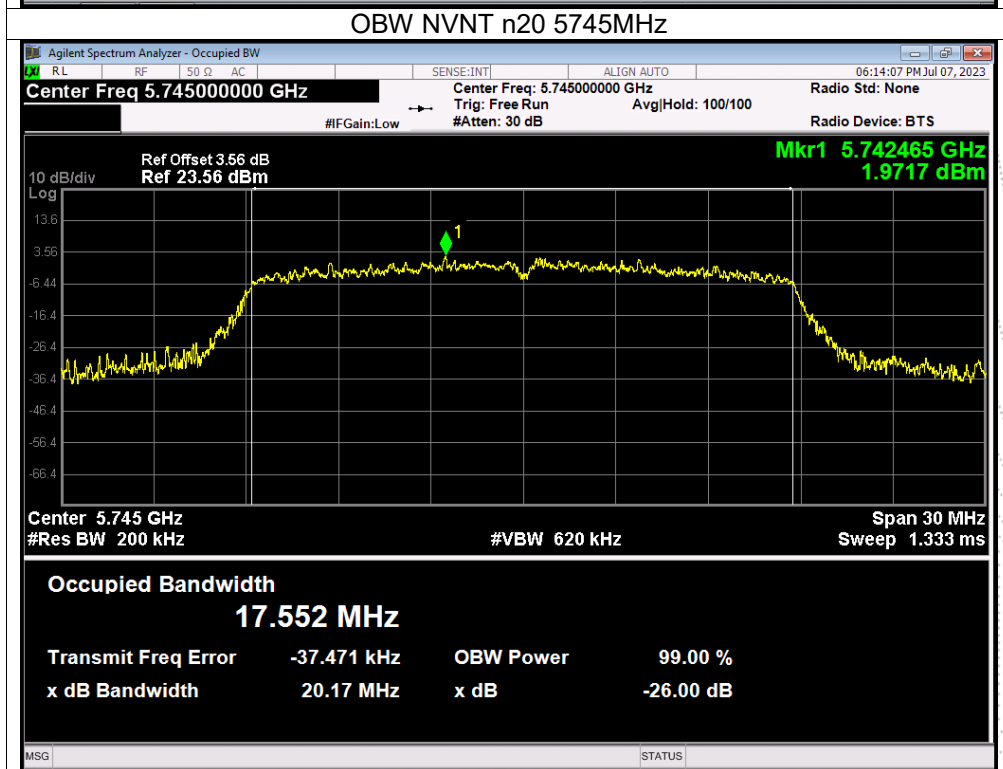
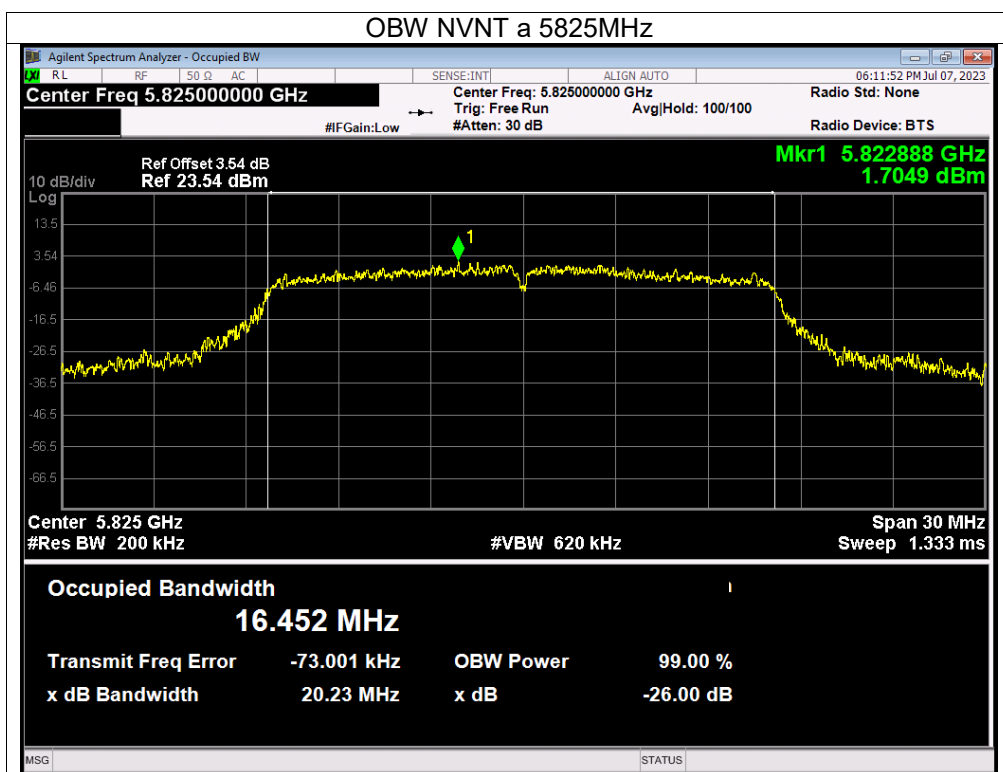


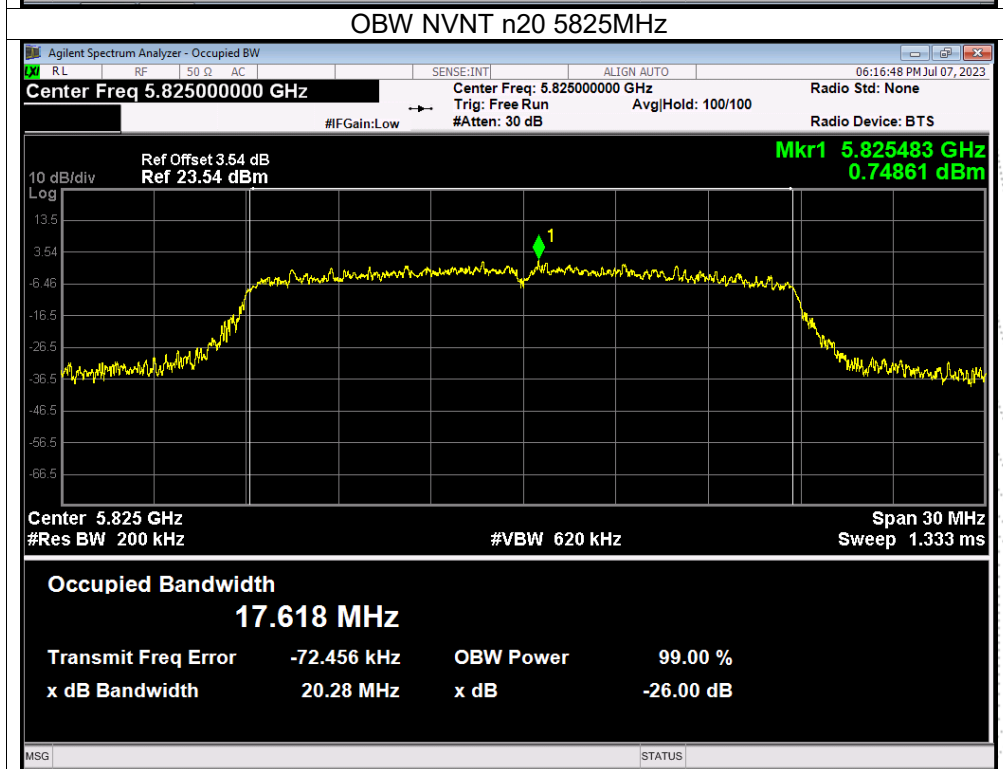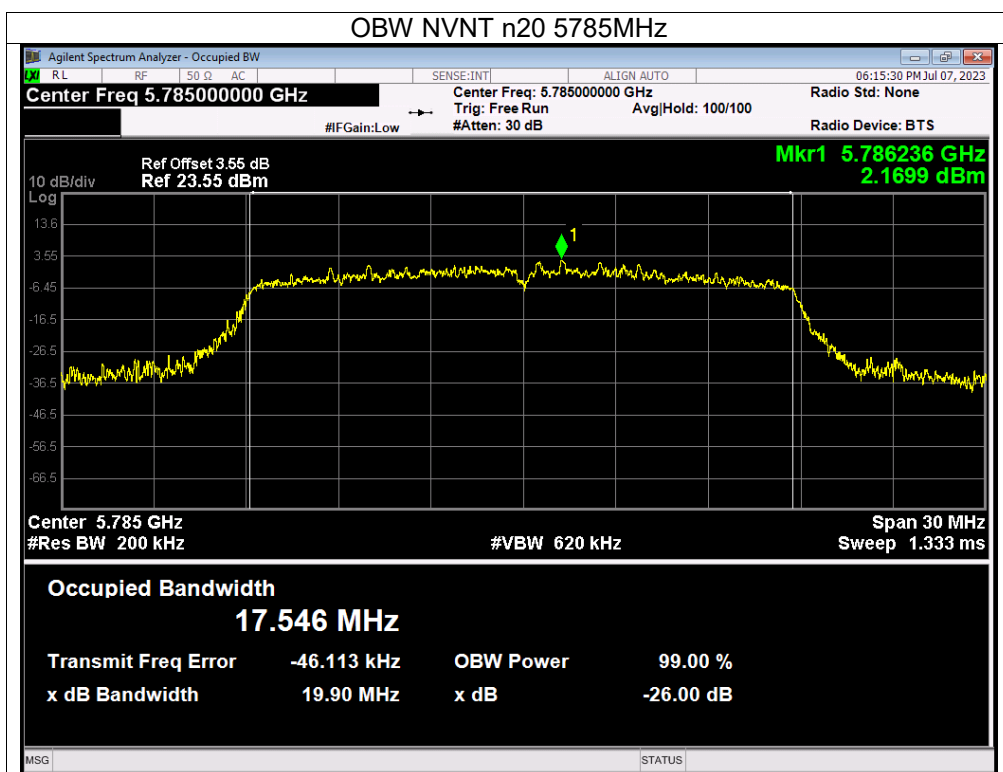

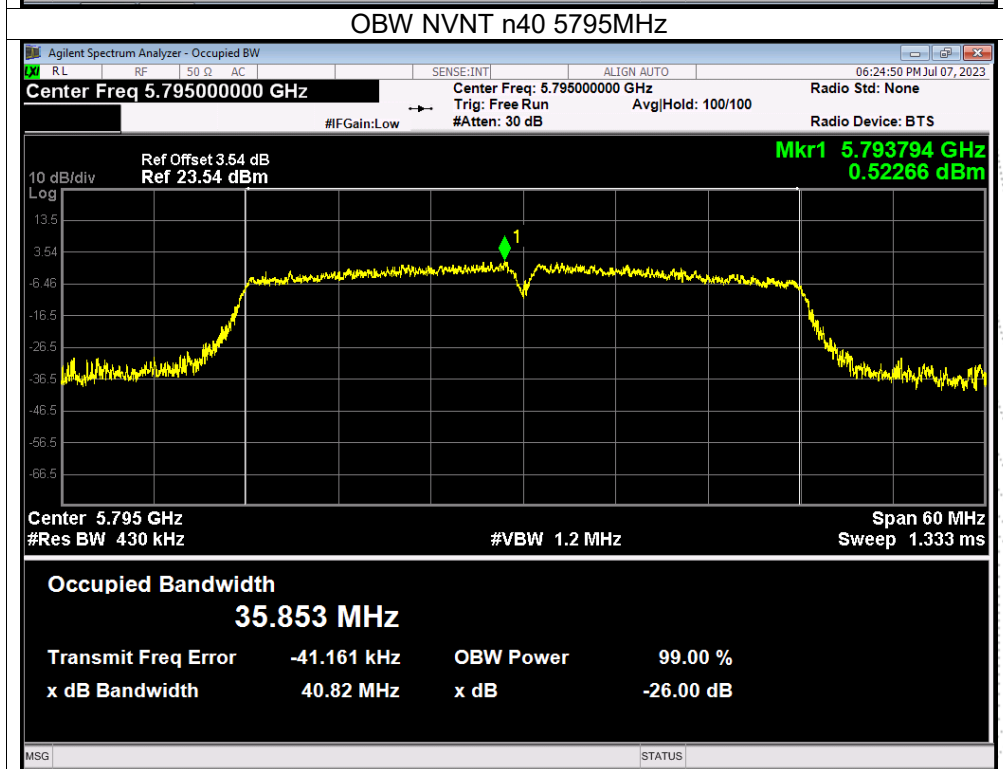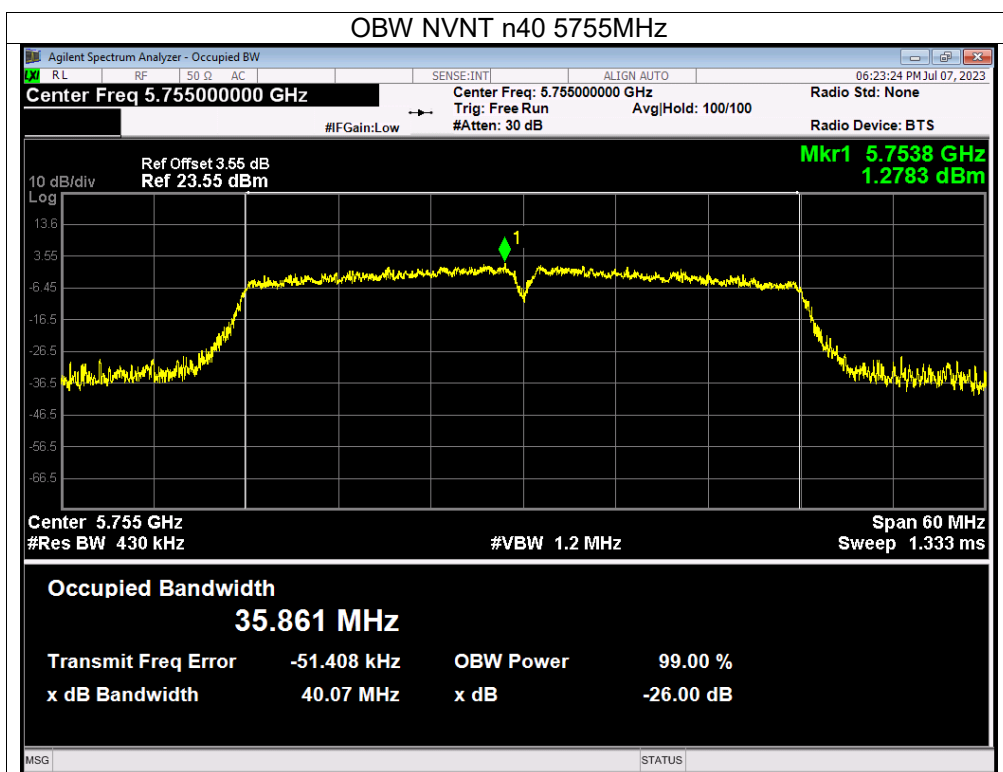

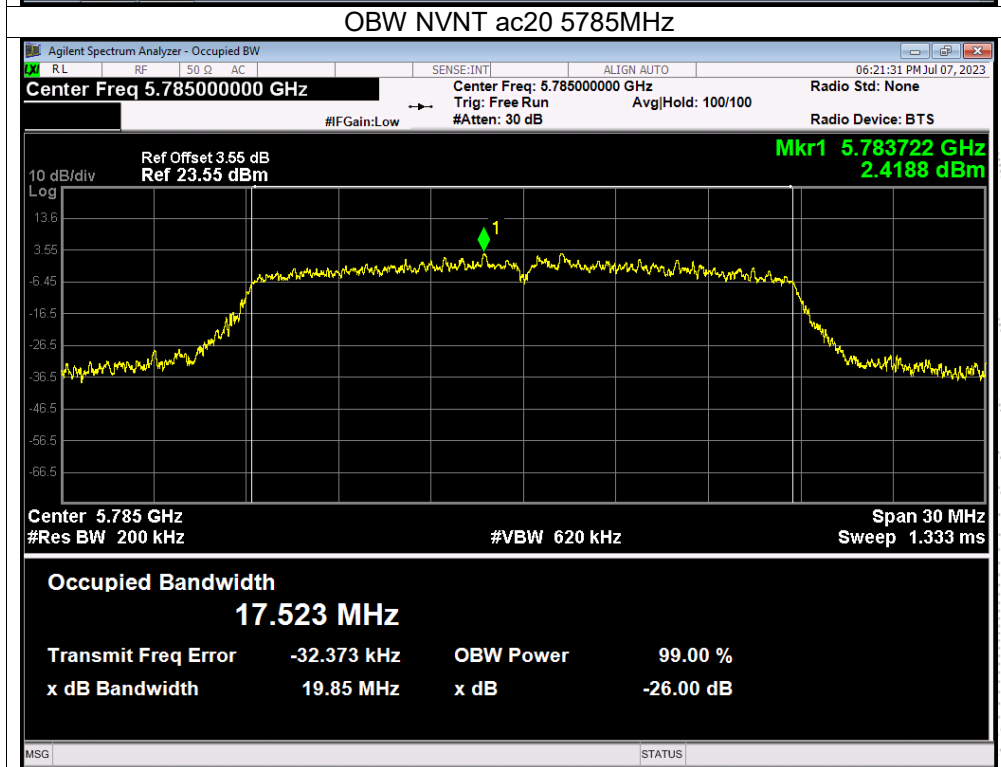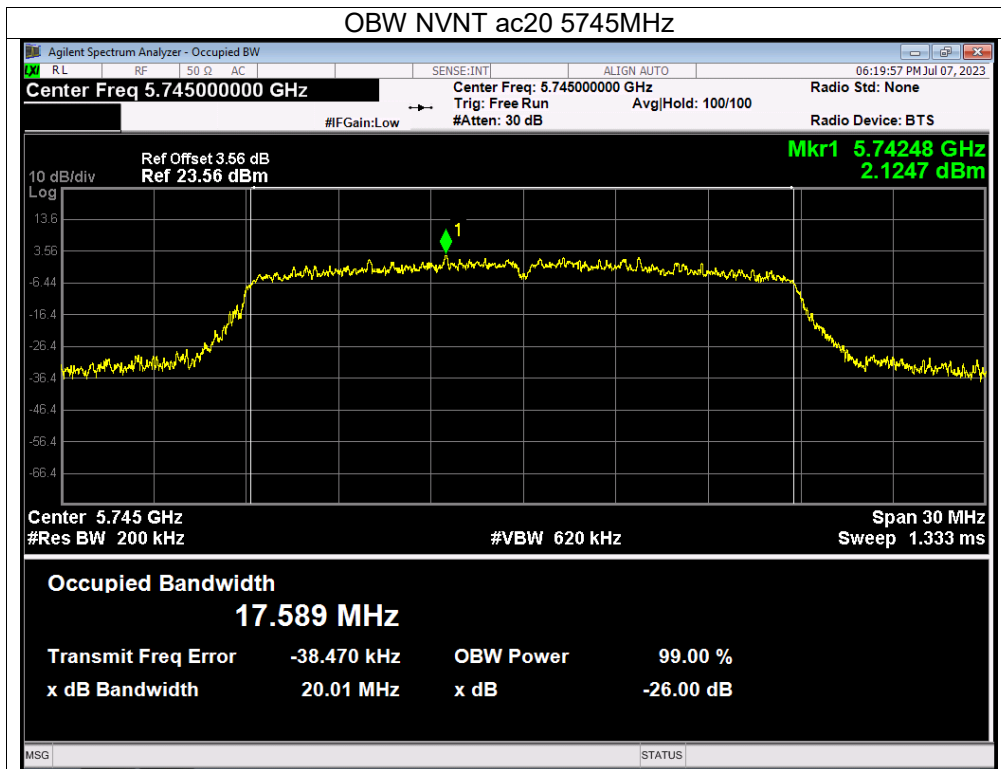

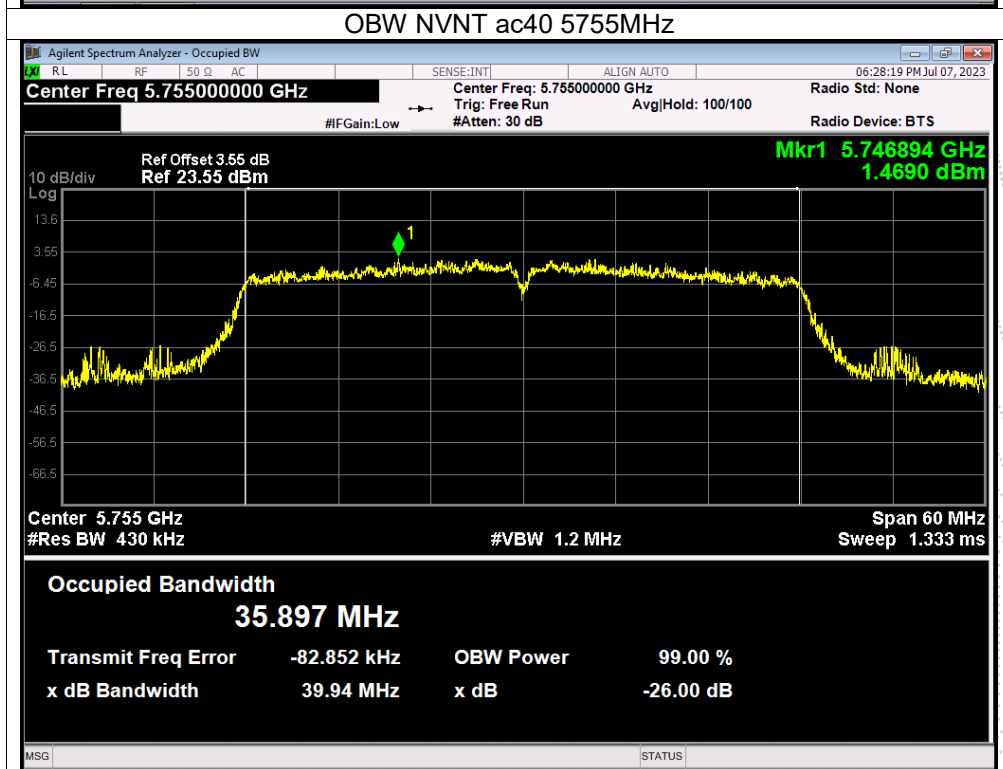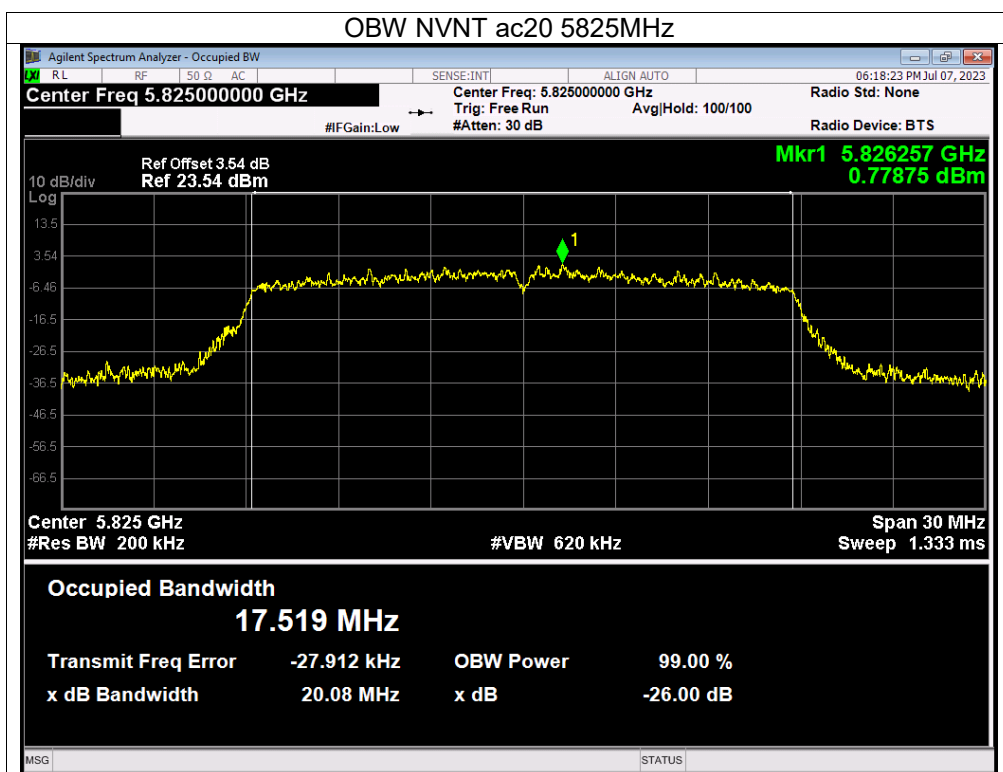

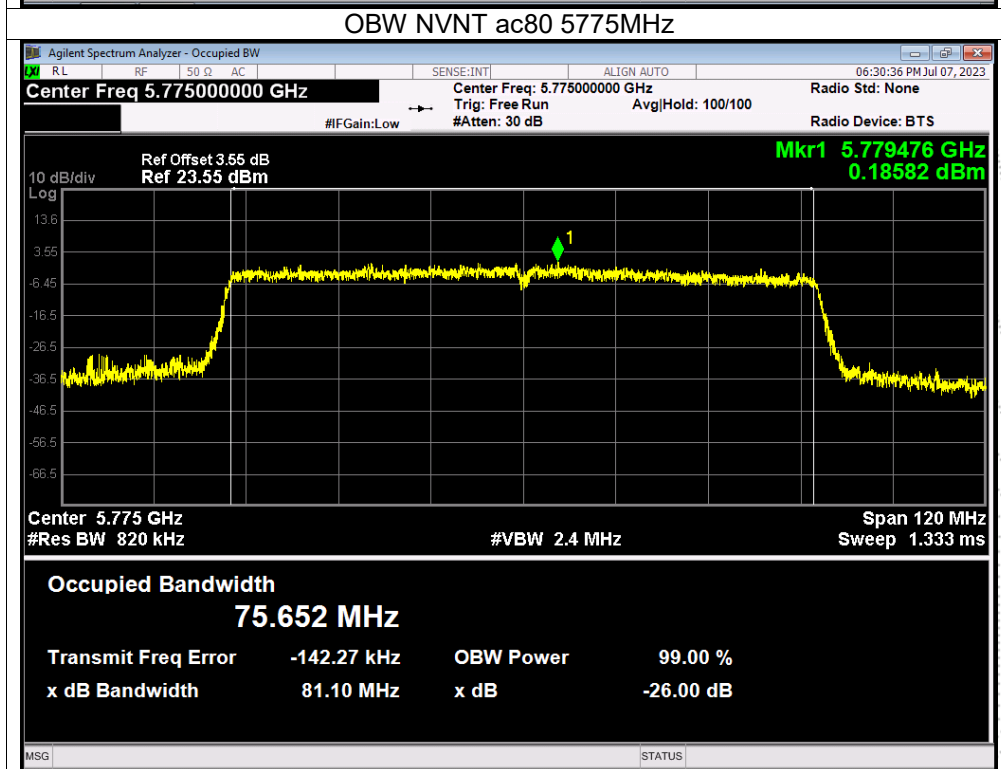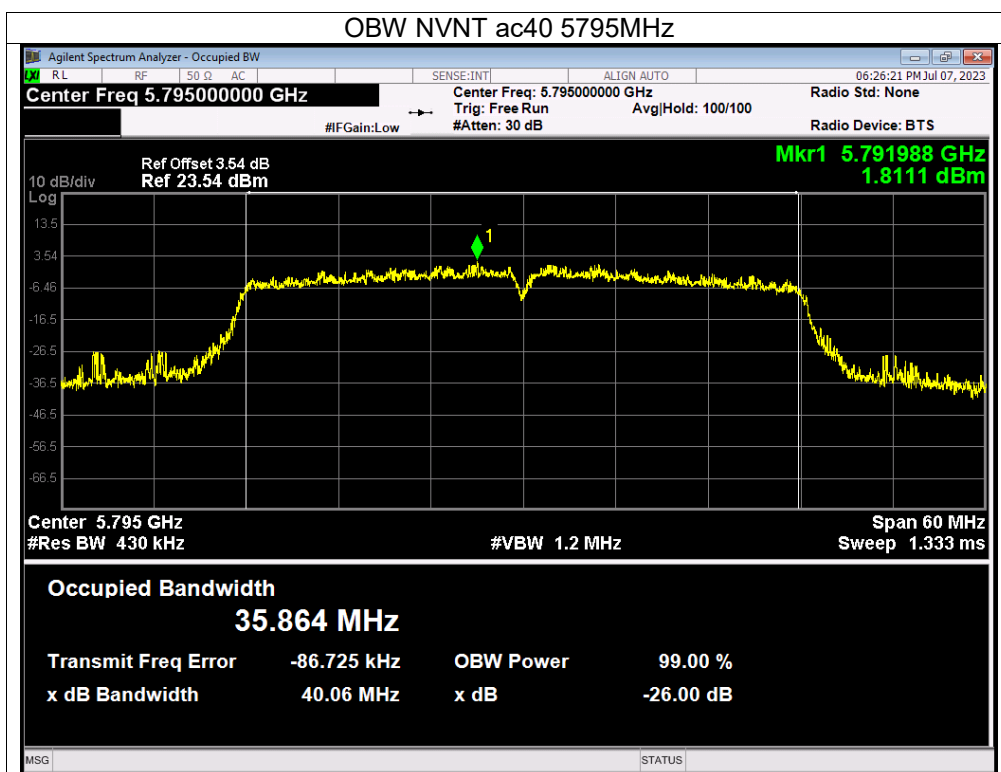

10. Maximum Conducted Output Power

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

10.3 Test Procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle $\geq$ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.


(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

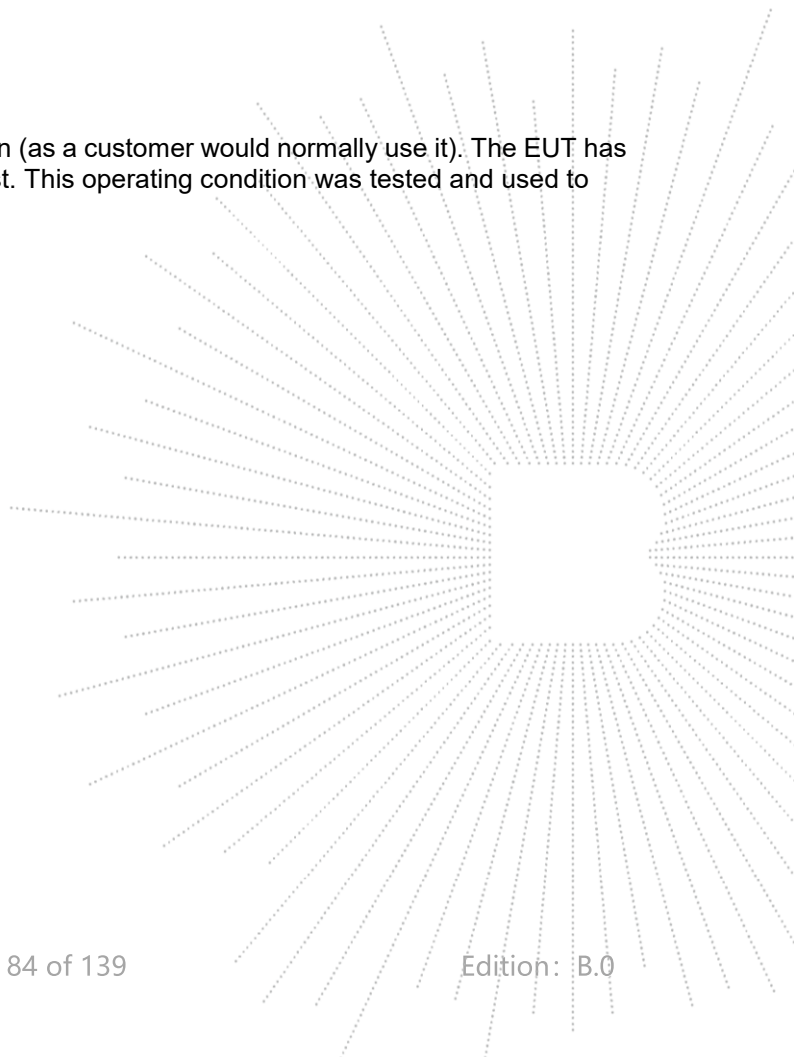

10.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	12.87	24	Pass
NVNT	a	5200	12.24	24	Pass
NVNT	a	5240	11.5	24	Pass
NVNT	n20	5180	11.98	24	Pass
NVNT	n20	5200	11.05	24	Pass
NVNT	n20	5240	10.69	24	Pass
NVNT	n40	5190	10.82	24	Pass
NVNT	n40	5230	9.77	24	Pass
NVNT	ac20	5180	11.68	24	Pass
NVNT	ac20	5200	10.87	24	Pass
NVNT	ac20	5240	10.65	24	Pass
NVNT	ac40	5190	10.89	24	Pass
NVNT	ac40	5230	10.82	24	Pass
NVNT	ac80	5210	9.7	24	Pass

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	12.49	30	Pass
NVNT	a	5785	12.14	30	Pass
NVNT	a	5825	11.18	30	Pass
NVNT	n20	5745	11.62	30	Pass
NVNT	n20	5785	11.03	30	Pass
NVNT	n20	5825	10.16	30	Pass
NVNT	n40	5755	10.31	30	Pass
NVNT	n40	5795	9.97	30	Pass
NVNT	ac20	5745	11.69	30	Pass
NVNT	ac20	5785	11.17	30	Pass
NVNT	ac20	5825	10.09	30	Pass
NVNT	ac40	5755	10.3	30	Pass
NVNT	ac40	5795	9.88	30	Pass
NVNT	ac80	5775	9.06	30	Pass

