

Prüfbericht-Nr.: <i>Test report no.:</i>	IN22G8KZ 001	Auftrags-Nr.: <i>Order no.:</i>	146747176 0010	Seite 1 von 47 Page 1 of 47	
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	2288216	Auftragsdatum: <i>Order date:</i>	2022-12-19		
Auftraggeber: <i>Client:</i>	Zywie, Inc 12000 Findley Road, Suite 360, Johns Creek, GA-30097, USA				
Prüfgegenstand: <i>Test item:</i>	ZywieZ3™ Sensor & Adhesive				
Bezeichnung <i>Identification</i>	Z31000016	Serien -Nr.: <i>Serial no.:</i>	PRT0036		
Auftrags-Inhalt: <i>Order content:</i>	Testing and issue of Test Report with Grant Certificate				
Prüfgrundlage: <i>Test specification:</i>	FCC Part 15 Subpart C 15.247,15.205, 15.207 & 15.209				
Wareneingangsdatum: <i>Date of sample receipt:</i>	2022-12-20				
Prüfmuster-Nr.: <i>Test sample no:</i>	A003392716-001 & A003392716-002				
Prüfzeitraum: <i>Testing period:</i>	2023-03-27 - 2023-03-27				
Ort der Prüfung: <i>Place of testing:</i>	Wireless laboratory, Bangalore				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (India) Pvt. Ltd. 27/B,2nd cross road, Electronic city Phase1, Bangalore-560100, India FCC Test Site Registration No: 496599 IC Test Site Registration No: 3466E-1				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>				
Datum: <i>Date:</i>	Ausstellatum: <i>Issue date:</i>				
Stellung / Position:	M.V.Naveen Kumar Engineer	Stellung / Position:	Madhu K.N Senior Engineer		
Sonstiges / Other:	FCC ID: 2BAK3Z3E				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar	5 = mangelhaft N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable	5 = poor N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Prüfbericht - Nr.:

Test Report No.:

IN22G8KZ 001

Seite 2 von 47

Page 2 of 47

- | | |
|---|---|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</p> <p>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird.</p> <p><i>The decision rule for statements of conformity in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report.</i></p> |

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 3 von 47
Page 3 of 47

TEST SUMMARY

Test Item	FCC	Result
Maximum conducted (Peak) output power	15.247 (b)(3)	Pass
Maximum Power Spectral Density	FCC 15.247(e)	Pass
DTS Bandwidth	FCC 15.247(a)(2)	Pass
Emissions in non-restricted frequency bands	15.247 (d)	Pass
Spurious Radiated Emissions and Restricted Bands of Operation	FCC 15.209 / FCC 15.205	Pass
Conducted Spurious Emission on AC Power lines	FCC 15.207	Pass

Product Category: Electronics Testing

Test Discipline: EMC Test Facility

Prüfbericht - Nr.:

Test Report No.:

IN22G8KZ 001

Seite 4 von 47

Page 4 of 47

REVISION HISTORY OF THIS REPORT

Report Number	Version	Description	Issue date
IN22G8KZ 001	01	Initial issue of report	2023-04-06

Table of Contents

1	GENERAL REMARKS	6
1.1	Attachments	6
2	TEST SITES	7
2.1	Testing Facilities.....	7
2.2	List of Test and Measurement Instruments.....	7
3	GENERAL PRODUCT INFORMATION.....	9
3.1	Product Function and Intended Use.....	9
3.2	Ratings and System Details of Equipment under Test	9
3.3	Measurement Uncertainty:	10
4	TEST SET-UP AND OPERATION MODE.....	11
4.1	Principle of Configuration Selection	11
4.2	Test Operation and Test Software	11
4.3	Special Accessories and Auxiliary Equipment	11
4.4	Countermeasures to achieve EMC Compliance	11
4.5	List of frequencies	11
4.6	TUV Sample Identification.....	12
5	Operational Description	13
6	TEST METHODOLOGY	14
6.1	Conducted Spurious Emission AC Power line Test.....	14
6.1.1	Test Setup Configuration	14
6.2	Radiated Emission Test	15
6.2.1	Test Setup Configuration	15
7	TEST RESULTS	17
7.1	Maximum Peak Conducted Output Power.....	17
7.2	DTS Bandwidth	20
7.3	Power Spectral Density	23
7.4	Emissions in non-restricted frequency bands and Conducted Spurious Emission.....	26
7.4.1	Band edge	27
7.4.2	Out-Of-Band Emissions.....	30
7.5	Spurious Radiated Emissions & Restricted Bands of Operation	33
7.6	Conducted spurious emission Test on AC Power lines	44
8	LIST OF TABLES.....	47
9	List of Figures	47

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 6 von 47
Page 6 of 47

1 GENERAL REMARKS

1.1 Attachments

All attachments are part of this test report and are issued in separate document

1. Test Setup photos
2. EUT External Photos
3. EUT Internal Photos
4. FCC Label and Label Location
5. Block Diagram
6. Specification of EUT
7. Schematic Diagrams
8. Bill of Material
9. User Manual
10. Maximum Permissible Exposure Information

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 7 von 47
Page 7 of 47

2 TEST SITES

2.1 Testing Facilities

1. TÜV Rheinland (India) Pvt.Ltd.,
27/B, 2nd Cross,
ElectronicCityPhase1
Bangalore – 560 100,
India
2. TUV Rheinland (India) Pvt.Ltd.,
108 , Beside ISBR Business School,
Electronic city Phase I
Bangalore - 560 100,
India

2.2 List of Test and Measurement Instruments

Table 1: List of test and measurement instruments

Equipment	Manufacturer	Model Name	Serial Number	Firmware Versions	Calibration Due Date	Periodicity	Test Facility
EMI Receiver	Rohde & Schwarz	ESW 44	101732	4.73 SP5	04.08.2023	Yearly	Radiated Spurious Emission
Loop antenna	Schwarzbeck	FMZB 1519 B	1519B-00111	-	12.10.2023	Yearly	
Balun & Biconical Antenna	Schwarzbeck Mess-Elektronik	BBA 9106+V HBB 9124	9124-1117	-	15.07.2023	Yearly	
Log Periodic Antenna	Schwarzbeck Mess-Elektronik	VUSLP 9111B	9111B-324	-	23.05.2023	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-01944	-	11.10.2023	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-0904	-	13.10.2023	Yearly	
EMI Test Receiver	Rohde & Schwarz	ESW44	101773	1.72.SP1	15.02.2024	Yearly	
Semi Anechoic Chamber	Frankonia	-	-	-	-	-	
Fully Anechoic Chamber	Albatross	-	-	-	-	-	
Spectrum Analyzer	Agilent	E4407B	ESA-E	A.14.07	21-12-2023	Yearly	Conducted Test Parameters
10dB Attenuator	H+S Electronics Pvt. Ltd	6810.17. A	770041	-	12.10.2023	Yearly	
EMI Receiver	Rohde & Schwarz	ESR7	101133	3.48 SP3	22.07.2023	Yearly	Conducted AC Power line Test
Line Impedance Stabilization Network	Rohde & Schwarz	ENV 216	101434	-	11.04.2023	Yearly	
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100811	-	12.07.2023	Yearly	

Prüfbericht - Nr.:

Test Report No.:

IN22G8KZ 001

Seite 8 von 47

Page 8 of 47

Table 2: Instrument application Software versions

SL. No.	Test Type	Application software	Version
1	Radiated spurious emission measurement in FAC	EMC 32	10.60.20
2	Radiated spurious emission measurement in 10mtr SAC	BAT EMC	3.20.0.17

3 GENERAL PRODUCT INFORMATION

3.1 Product Function and Intended Use

"ZywieZ3 Sensor is a wireless device intended for use by healthcare professionals for recording and displaying physiological data in-home or in healthcare settings. The physiological data includes electrocardiogram (ECG) data. This data is transmitted wirelessly to a separate location (such as a mobile phone) for storage, display, and transmission.

The device is an ambulatory, continuous recording system with intended use as general care for patients. The device is not intended to be used on critical care patients and does not replace current standards of care. It is intended to provide physiological data recordings to be viewed by healthcare professionals at a later time. "

3.2 Ratings and System Details of Equipment under Test

Table 3: Ratings and System Details as declared by Client*

Radio Protocol		Bluetooth Low Energy	
Operating Frequency Range		2400MHz-2483.5MHz	
No. of Channels		40	
Channel Spacing		2MHz	
Transmitter Power(dBm)		8dBm	
Measured peak conducted power (dBm)		4.72dBm@Low Channel(2402MHz)	
Modulation		GFSK	
Data Rates		2Mbps	
Number of antennas		1	
Antenna Gain		Peak gain is 0dBi	
Antenna Type	P/N:	2450 MHz Small SMD Chip Antenna	2450AT42B100
Supply Voltage to Product		5VDC, 500mA through AC/DC Adapter for all conducted parameters	
		5VDC Battery for Radiated Test cases	
Environmental conditions	Storage(°C)	50° F - 122° F (10° C - 50° C)	
	Operating(°C)	50° F - 113° F (10° C - 45° C)	
EUT Dimension(H x D) in mm		Height = 0.590" Diameter= 2.01"	

***Disclaimer:** The information/data is supplied by the client and the same is considered to arrive at the final value. Any changes made apart from the specified specification, can directly impact on the tests results. Refer the products user manual for more details.

3.3 Measurement Uncertainty:

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$

Table 4: Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 5 \%$
RF output power, conducted	$\pm 1.5 \text{ dB}$
Power Spectral Density, conducted	$\pm 3 \text{ dB}$
Unwanted Emissions, conducted	$\pm 3 \text{ dB}$
All emissions, radiated	$\pm 6 \text{ dB}$
Temperature	$\pm 3 \text{ }^{\circ}\text{C}$
Supply Voltages	$\pm 3 \%$
Time	$\pm 5 \%$

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 11 von 47
Page 11 of 47

4 TEST SET-UP AND OPERATION MODE

4.1 Principle of Configuration Selection

Transmission was enabled with highest possible duty cycle transmission on low, mid and high channel.

4.2 Test Operation and Test Software

Hardware Version: 1.2.0

Hardware Name: ZywieZ3 HW

Software Version: 1.0.16

Software Name: ZywieZ3 SDK

Firmware Name: ZywieZ3 FW

Firmware Version: 1.0.4.3

4.3 Special Accessories and Auxiliary Equipment

- None

4.4 Countermeasures to achieve EMC Compliance

- None

4.5 List of frequencies

Frequency Band (MHz)	Channel No.	Channel Frequency (MHz)
2402 – 2483.5 BLE	0	2402
	1	2404
	2	2406
	3	2408
	:	:
	11	2424
	12	2426
	:	:
	:	:
	20	2442
	:	:
	:	:
	:	:
	:	:
	36	2474
	37	2476
	38	2478
	39	2480

Table 5: List of BLE Center frequencies

Channel used for BLE testing

Channel low: 2402MHz

Channel mid: 2426MHz

Channel high : 2480MHz

Prüfbericht - Nr.:

Test Report No.:

IN22G8KZ 001

Seite 12 von 47

Page 12 of 47

4.6 TUV Sample Identification

1. TUV Sample Identification number : A003392716-001 – Radiated test Sample
A003392716-002 --Conducted test Sample

5 Operational Description

The ZywieZ3 Sensor is a wearable three-channel, rechargeable, reusable, ambulatory medical-grade device intended for continuous data recording using ZywieZ3 Adhesive, storage, and transmission of physiological data within healthcare settings or at home.

The device is an ambulatory, continuous recording system with the intended use as general care for patients. The device is not intended to be used on critical care patients and does not replace current standards of care. It is intended to provide physiological information recordings to be viewed at a later time by healthcare professionals.

The ZywieZ3 Sensor is a device for the acquisition, storage, and transmission of physiological data such as an electrocardiogram (ECG). It uses a disposable ZywieZ3 Adhesive to maintain contact with the patient's skin. The hydrogel in the ZywieZ3 Adhesive senses the electrical signals from the patient's body and conducts them to the ZywieZ3 Sensor. The ZywieZ3 Sensor comes with a mobile physiological data display application built from a proprietary software library, using which authorized persons could build their own applications.

The physiological data is available for viewing in real-time from the device (like a smartphone) that is paired with the ZywieZ3 Sensor. Healthcare professionals may be able to view the data either directly on the paired device or through an application that receives the data in an encrypted form from the paired device.


6 TEST METHODOLOGY

6.1 Conducted Spurious Emission AC Power line Test

Measured levels of ac power-line conducted emission across the 50Ω LISN port (to which the EUT is connected). All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer.

The device is placed on the test table, raised 80cm above the reference ground plane. The vertical conducting plane is located 40cm to the rear of the device. AC Conducted emission measurement is made over frequency range from 150 kHz to 30MHz, this measurement was performed an AC adaptor 110V AC 60Hz supply

6.1.1 Test Setup Configuration

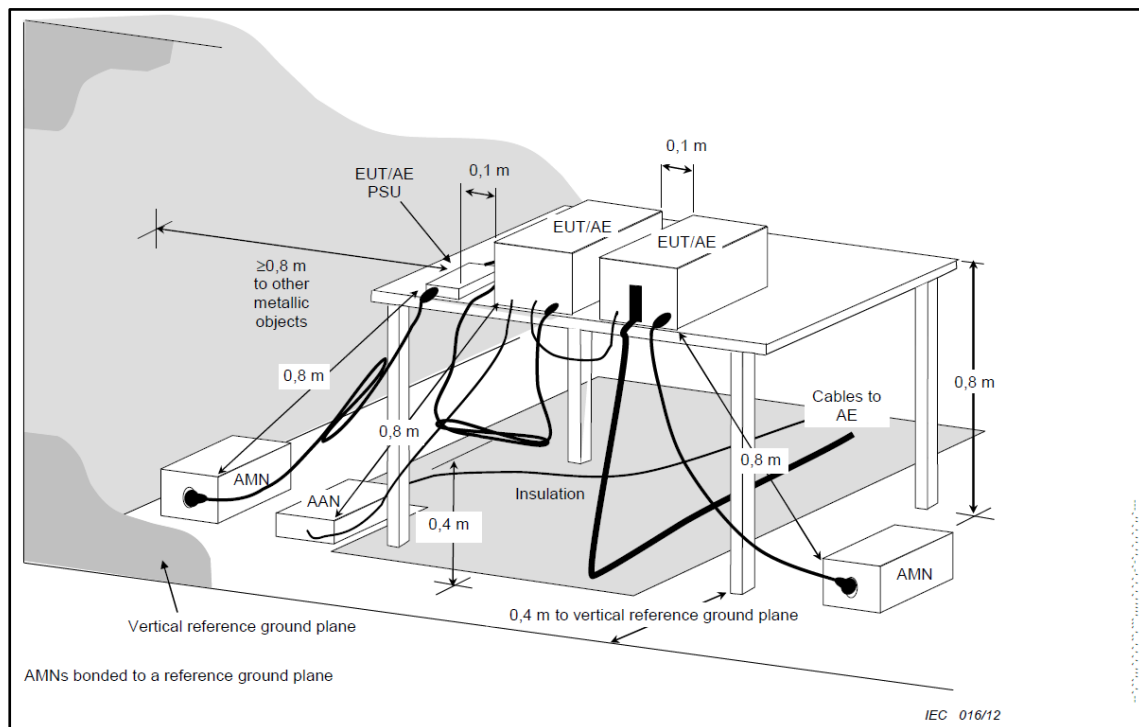

6.2 Radiated Emission Test

The radiated emission measurement was performed according to the procedures in ANSI C63.10-2013. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1 GHz & 1.5 m height for above 1 GHz measurement, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000 MHz was performed by horn antenna, the measurement below 30 MHz was performed by loop antenna, Measurement from 30 MHz to 200 MHz was performed by Balloon and Biconical Antenna, and measurement from 200 MHz to 1 GHz was performed by Log-Periodic Antenna.

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded

6.2.1 Test Setup Configuration

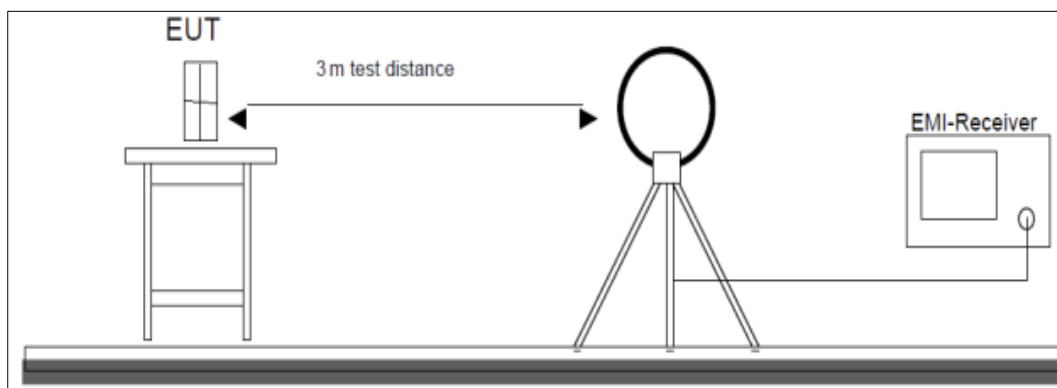


Figure 1: Frequency Range 9 kHz- 30 MHz

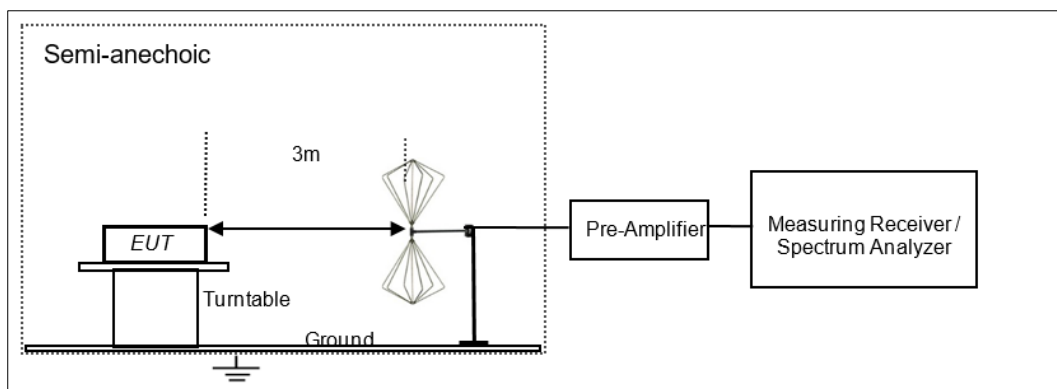


Figure 2: Frequency Range 30 MHz – 200 MHz

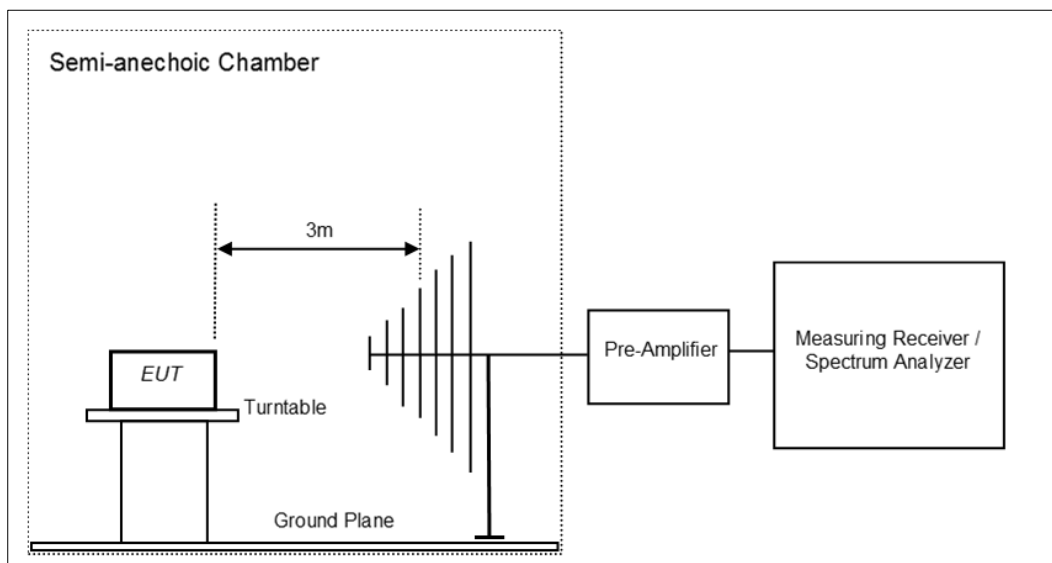


Figure 3: Frequency Range 200 MHz - 1GHz

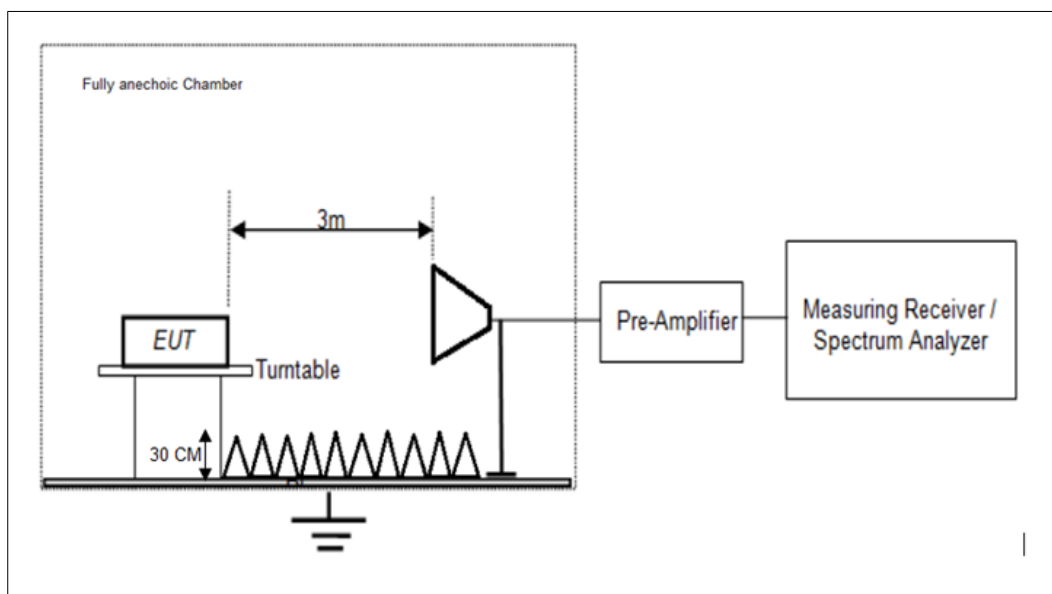


Figure 4: Frequency Range above 1 GHz

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 17 von 47
Page 17 of 47


7 TEST RESULTS

7.1 Maximum Peak Conducted Output Power

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (b)(3)
Test Method	Subclause 11.9.1.1 of ANSI C63.10
Measurement Bandwidth	3MHz
Detector	Peak
Port of testing	Antenna port
Requirement	Power $\leq$ 1 W (30 dBm)

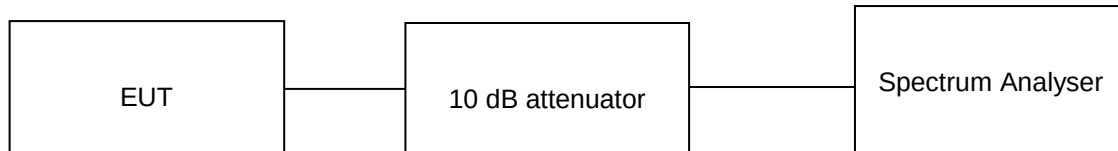

Test Condition

Normal Test Condition:

Temperature (Norm) = + 22.1 °C Voltage = 5VDC through AC/DC Adapter Relative humidity: 65%

KDB Guidelines applied:

Measurements were made as per section 8.3.1 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

Test Report No.:

IN22G8KZ 001

Seite 18 von 47

Page 18 of 47


Test results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Attenuator factor (10dB) + Cable loss (1dB)
3. This product do not support additional beamforming gain / directional gain, it uses single antenna and hence Directional gain of the single antenna is 0 dBi

Data Rate	Channel Frequency (MHz)	Measured Peak Power (dBm)	Power Limit (dBm)	Margin (dB)
2Mbps	2402	4.72	30.00	-25.28
	2426	4.36	30.00	-25.64
	2480	3.77	30.00	-26.23

Test Plots:

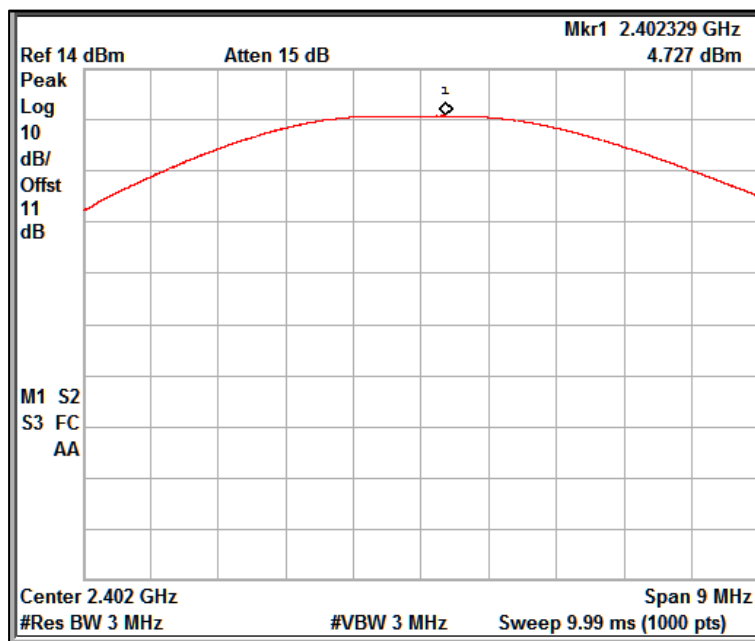


Channel Frequency: 2402MHz


Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 19 von 47
Page 19 of 47

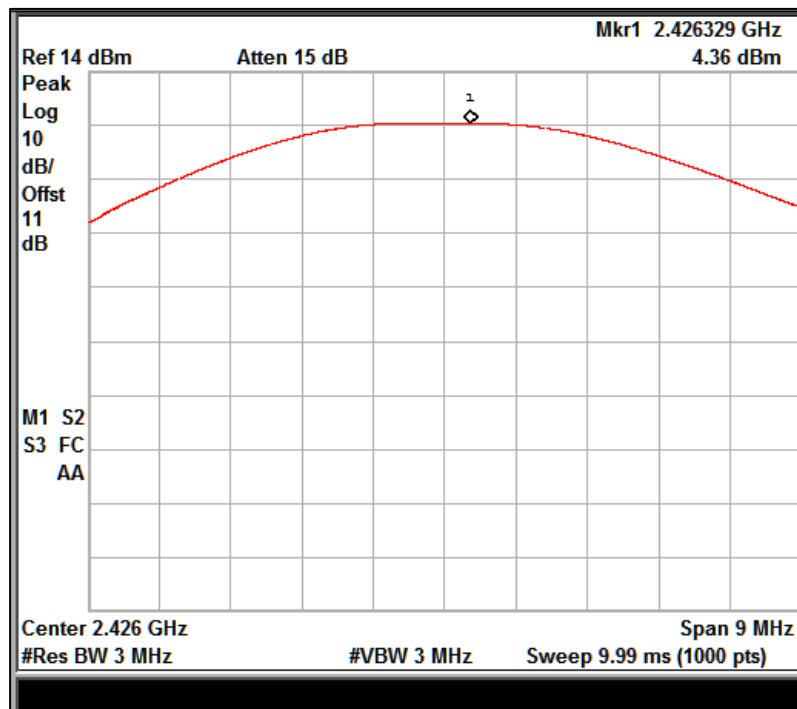

Channel Frequency: 2426MHz

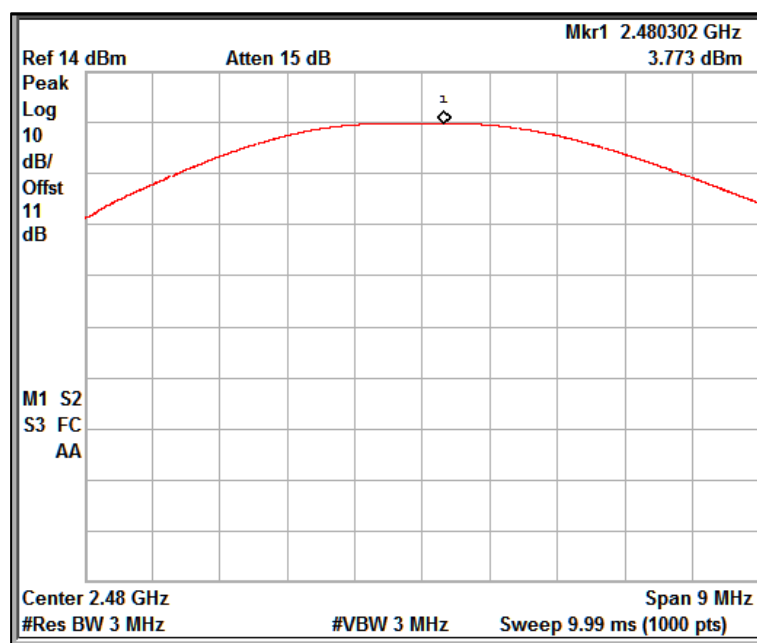

Channel Frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 20 von 47
Page 20 of 47


7.2 DTS Bandwidth

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (a) (2)
Test Method	Subclause 11.8.2 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Peak
Port of testing	Antenna port
Requirement	Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Method:

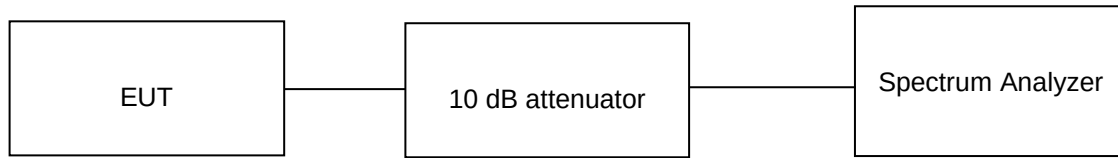

Test Condition

Normal Test Condition:

Temperature (Norm) = + 22.1 °C

Voltage = 5VDC through AC/DC Adapter

Relative humidity: 65%

KDB Guidelines applied:

Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 21 von 47
Page 21 of 47


Test results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. This product do not support additional beamforming gain / directional gain, it uses single antenna and hence directional gain of the single antenna is 0 dBi.

Data Rate	Channel Frequency (MHz)	Measured 99% Bandwidth (MHz)	Measured 6dB Bandwidth Limit (MHz)	Limit (MHz)
2Mbps	2402	2.050	1.17	0.5
	2426	2.055	1.19	0.5
	2480	2.054	1.20	0.5

Test Plots:

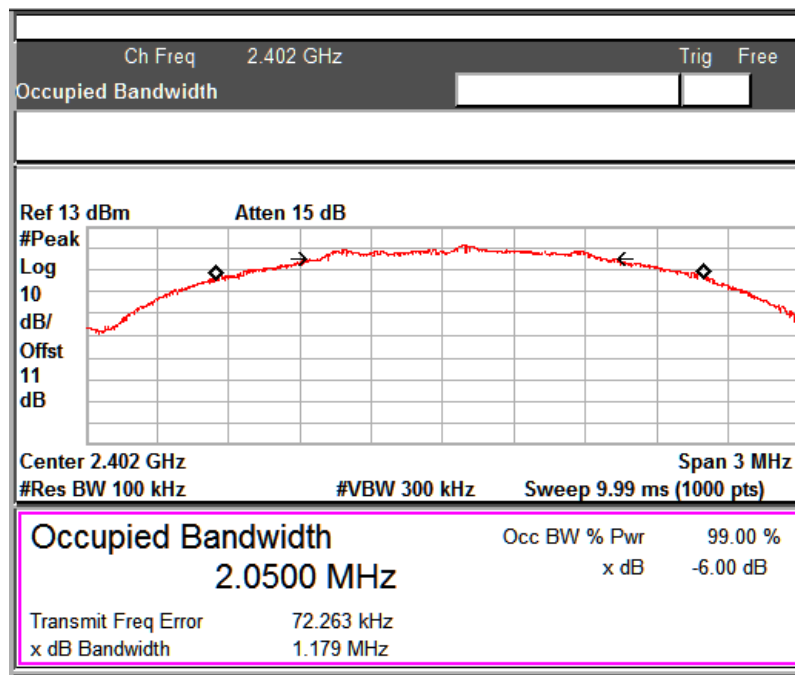


Channel frequency: 2402MHz


Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 22 von 47
Page 22 of 47

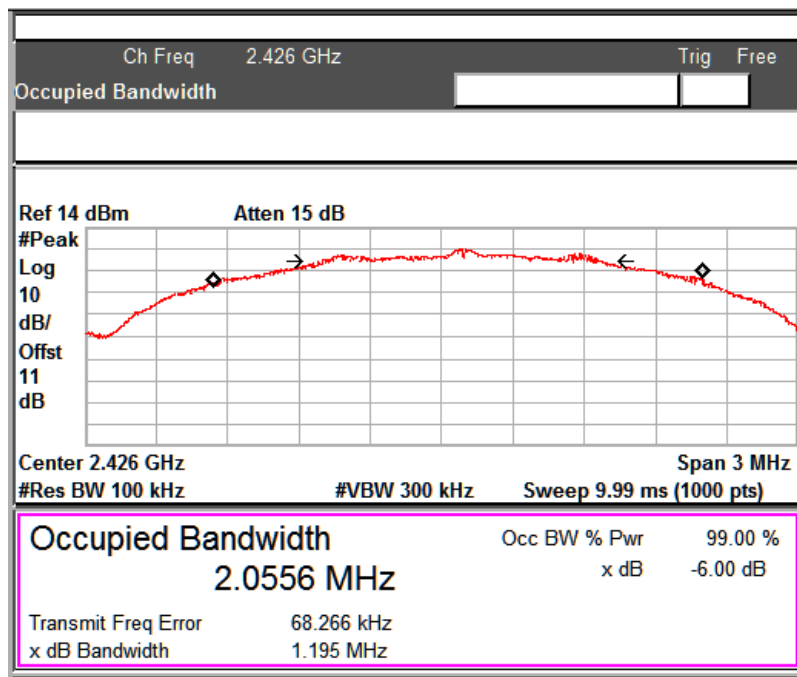

Channel frequency: 2426MHz

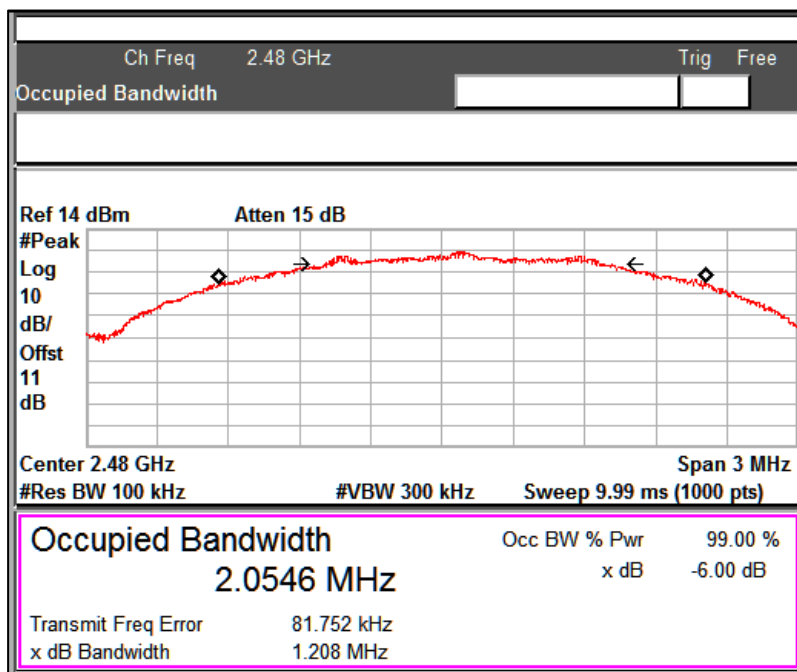

Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 23 von 47
Page 23 of 47

7.3 Power Spectral Density

Result

Pass

Test Specification

FCC Part 15 Subpart C Section 15.247 (e)

Test Method

Subclause 11.10.2 of ANSI C63.10

Measurement Bandwidth

100 kHz

Detector

Peak


Port of testing

Antenna port

Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 100 kHz band during any time interval of continuous transmission.

Test Method:

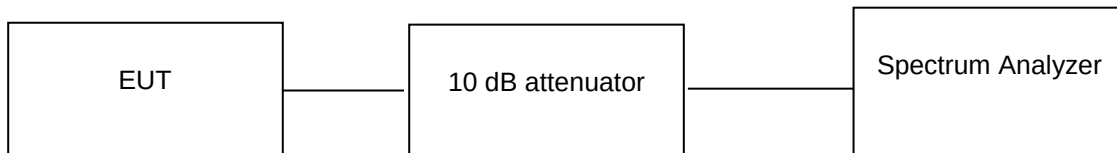

Test Condition

Normal Test Condition:

Temperature (Norm) = + 22.1 °C Voltage = 5VDC through AC/DC Adapter Relative humidity: 65%

KDB Guidelines applied:

Measurements were made as per section 8.4 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

Test Report No.:

IN22G8KZ 001

Seite 24 von 47

Page 24 of 47


Test results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report.

Data Rate	Channel Frequency (MHz)	Measured PSD (dBm)	Limit (dBm/kHz)	Margin (dB)
2Mbps	2402	4.20	8.00	-3.80
	2426	3.84	8.00	-4.16
	2480	3.23	8.00	-4.77

Test Plots:

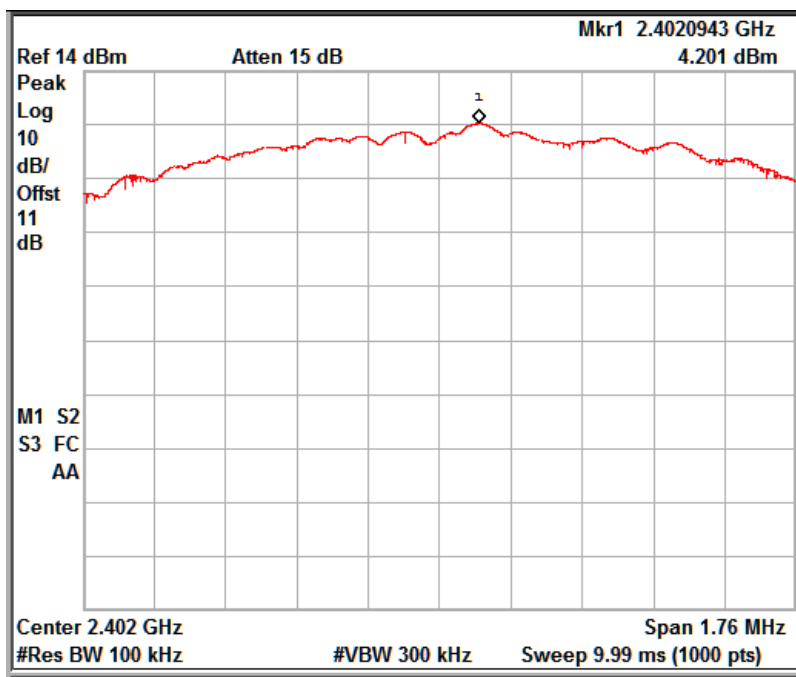


Channel Frequency: 2402MHz


Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 25 von 47
Page 25 of 47

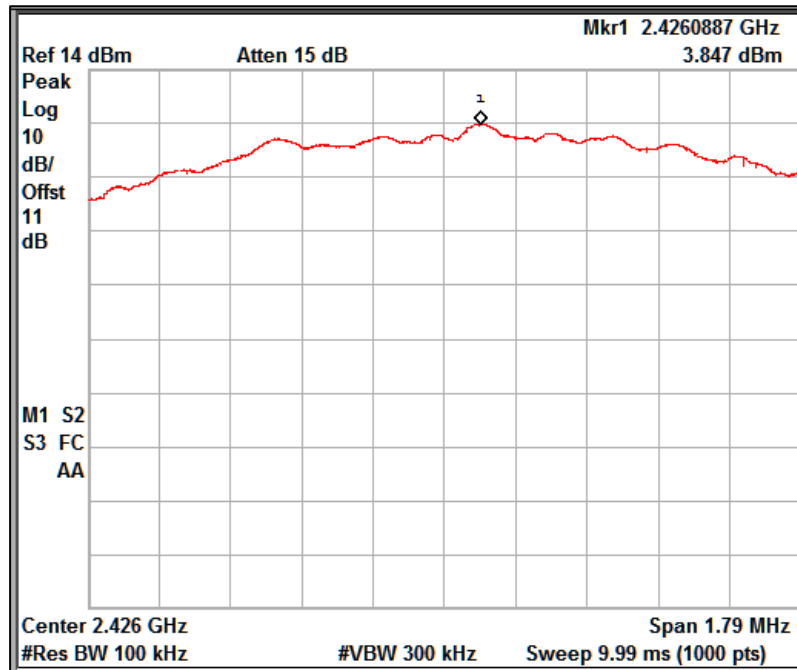

Channel Frequency: 2426MHz

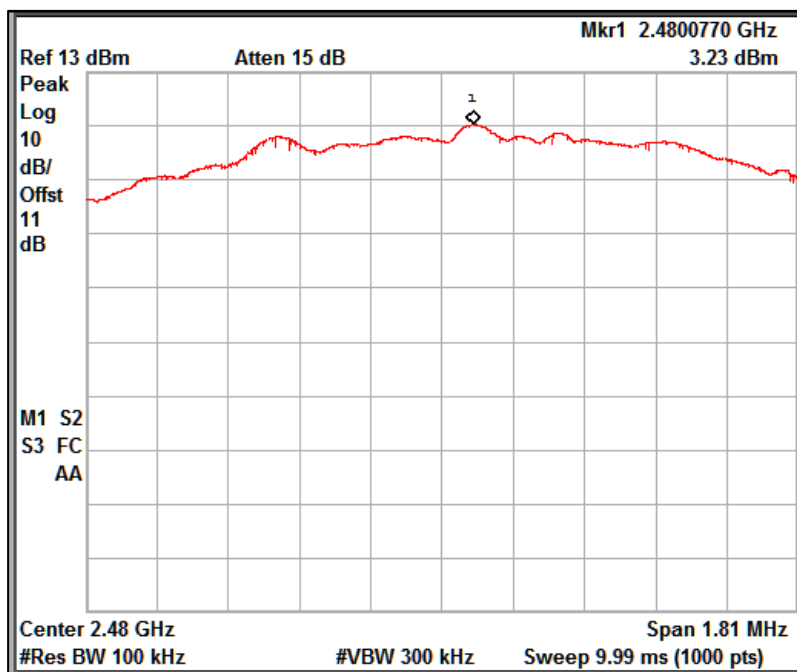

Channel Frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 26 von 47
Page 26 of 47

7.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission

Result

Pass

Test Specification

FCC part 15 Subpart C 15.247 (d)

Test Method

Subclause 11.11.3 of ANSI C63.10

Measurement Bandwidth

100 kHz

Detector

Peak

Port of testing


Antenna port

Requirement

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB

Test Method:

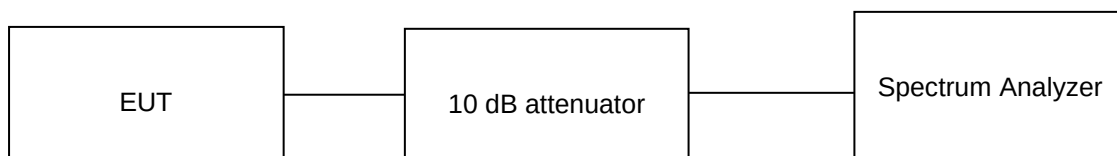

Test Condition

Normal Test Condition:

Temperature (Norm) = + 22.1 °C

Voltage = 5VDC through AC/DC Adapter

Relative humidity: 65%

KDB Guidelines applied:

Measurements were made as per section 8.5 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 27 von 47
Page 27 of 47

Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report
2. This product do not support additional beamforming gain / directional gain, it uses single antenna and hence Directional gain of the single antenna is 0dBi

7.4.1 Band edge

Channel Frequency (MHz)	Band edge Frequency (MHz)	Value at Band edge (A) (dBm)	Reference Value (B) (dBm)	A-B (dBc)	Minimum Limit (dBc)
2402	2390.00	-56.92	4.41	-61.33	-20.00
2480	2483.50	-51.10	3.44	-54.54	-20.00

Reference Plots:

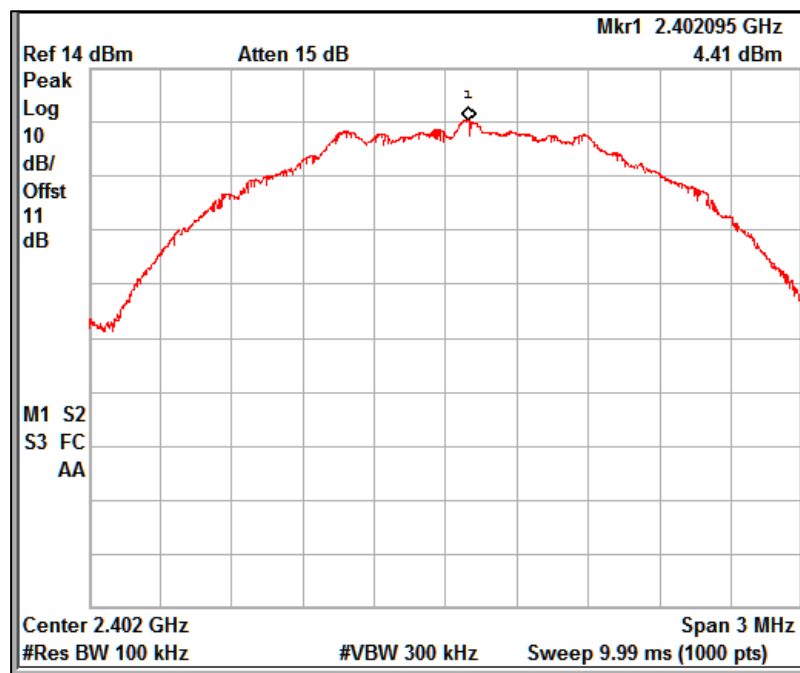

Channel Frequency: 2402MHz


Prüfbericht - Nr.:

Test Report No.:


IN22G8KZ 001

Seite 28 von 47

Page 28 of 47

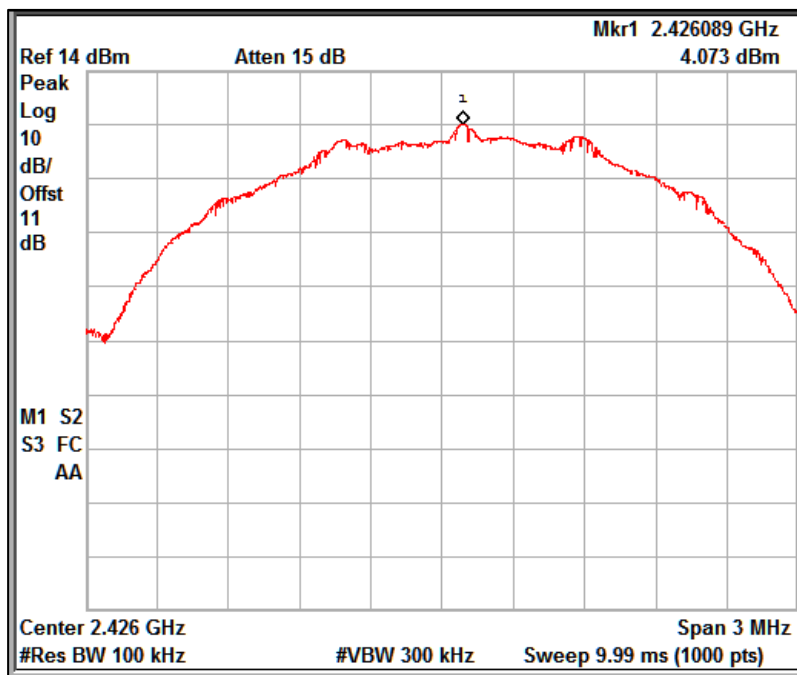

Channel Frequency: 2426MHz

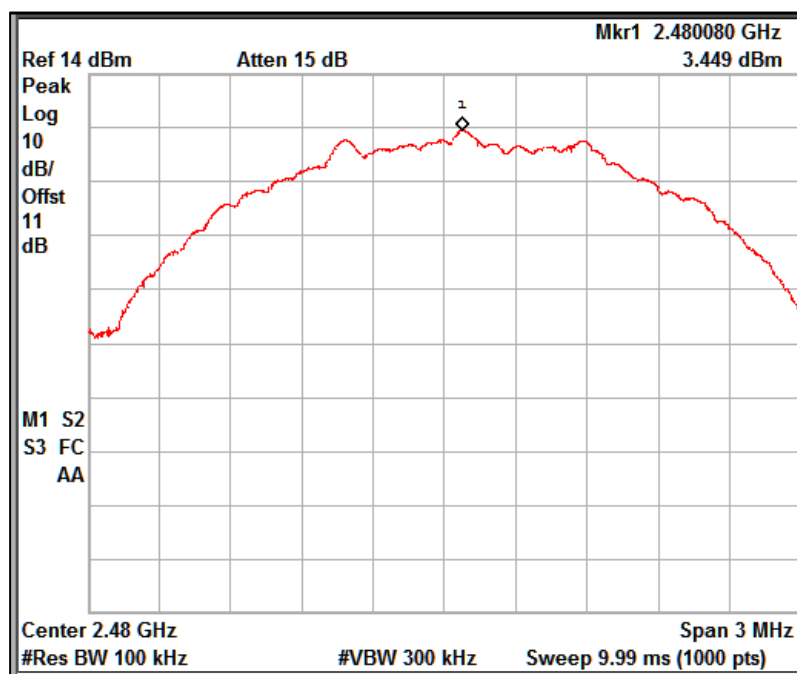


Channel Frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:


IN22G8KZ 001

Seite 29 von 47
Page 29 of 47

Bandedge Plots:

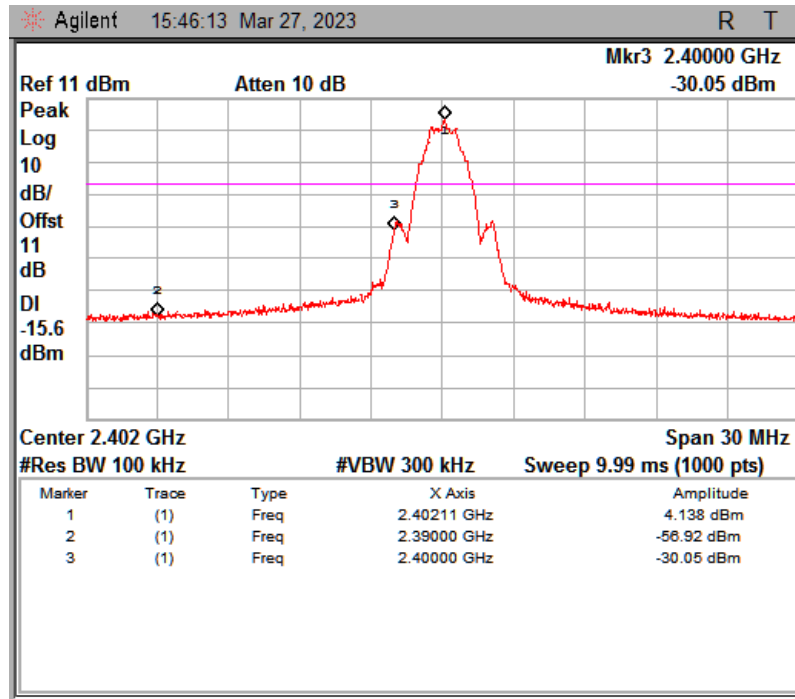


Channel Frequency:2402MHz

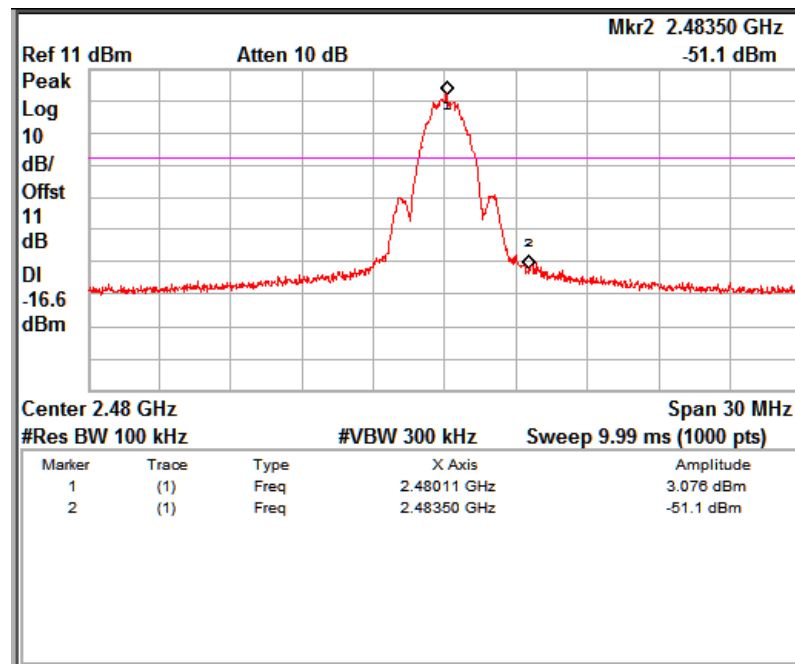


Channel Frequency:2480MHz

7.4.2 Out-Of-Band Emissions

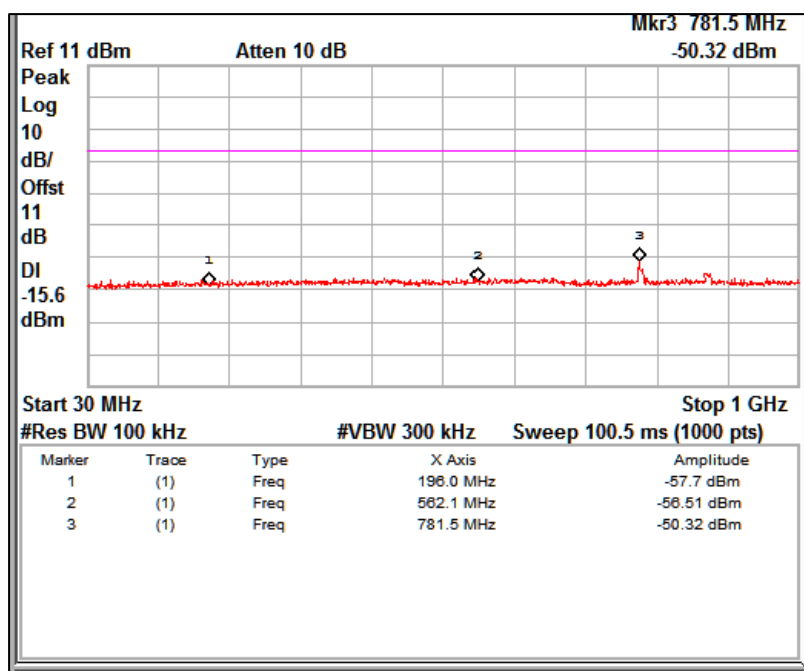

Channel Frequency: 2402 MHz Frequency Range 30 MHz – 1 GHz

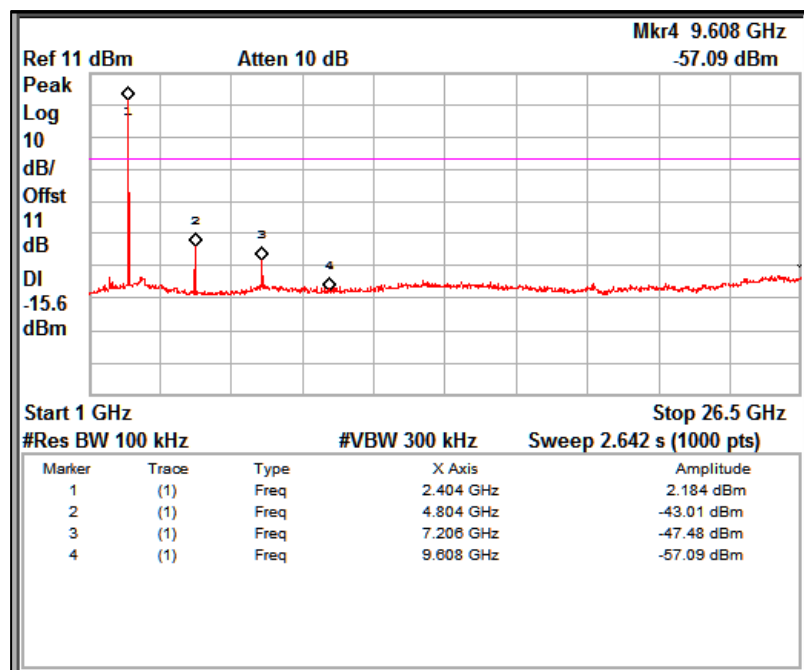


Channel Frequency: 2402 MHz Frequency Range 1 GHz – 26.5 GHz


Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 31 von 47
Page 31 of 47

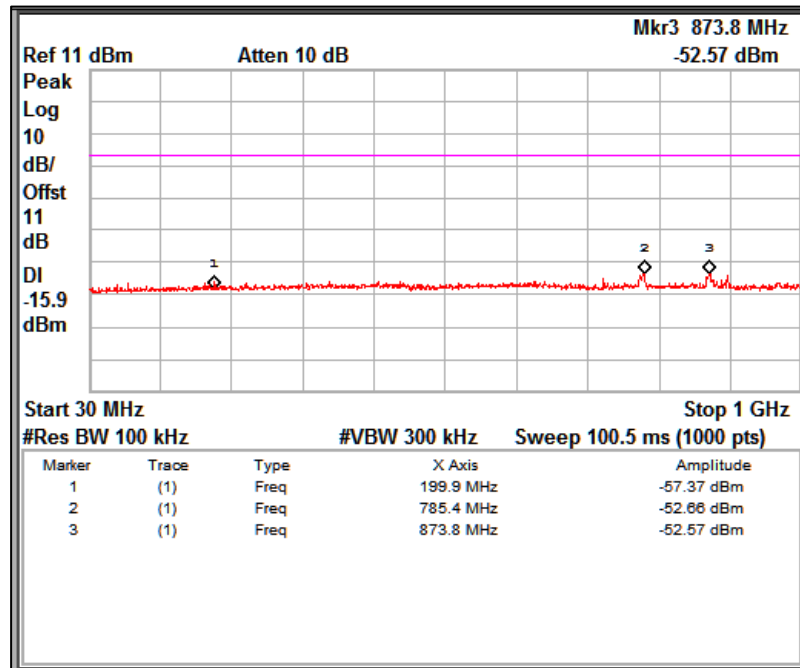

Channel Frequency: 2426MHz Frequency Range 30MHz – 1GHz

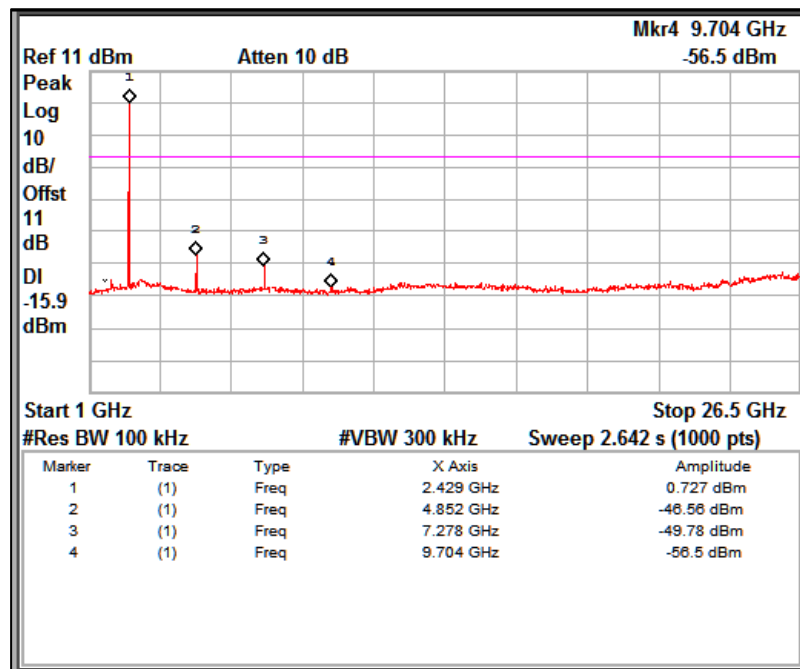


Channel Frequency: 2426MHz Frequency Range 1GHz – 26.5GHz


Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 32 von 47
Page 32 of 47

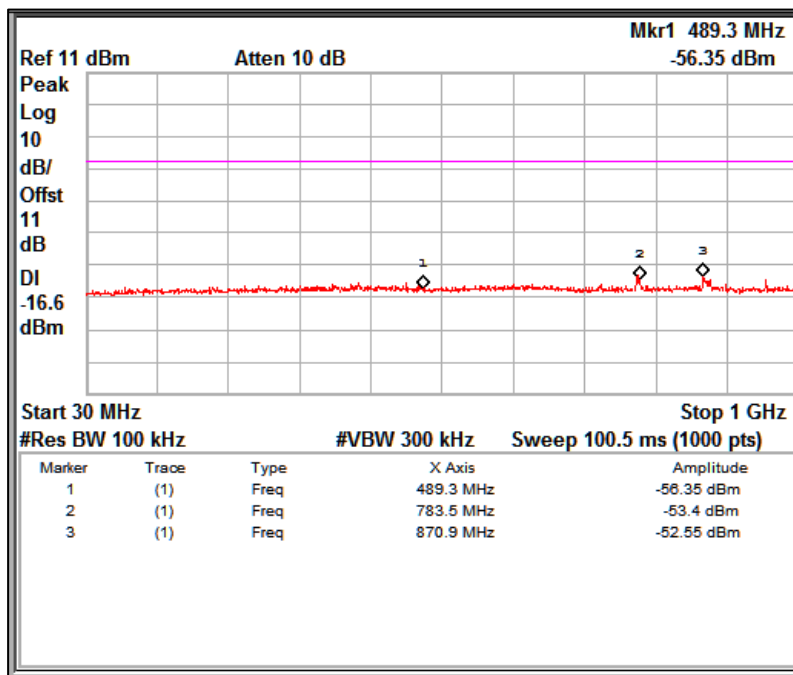

Channel Frequency: 2480MHz Frequency Range 30MHz – 1GHz

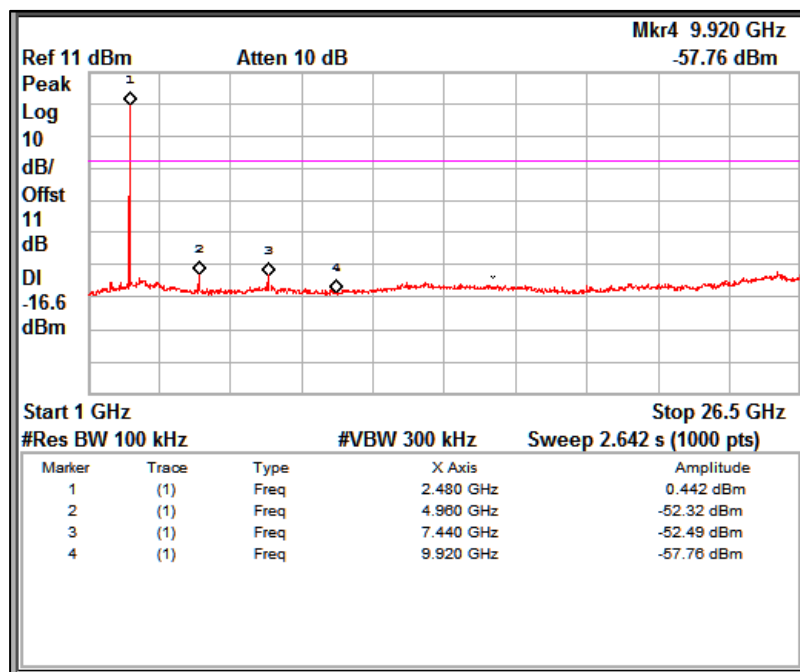

Channel Frequency: 2480MHz Frequency Range 1GHz – 26.5GHz

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 33 von 47
Page 33 of 47

7.5 Spurious Radiated Emissions & Restricted Bands of Operation

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205)
Test Method	ANSI C63.10
Measurement Location	Semi Anechoic Chamber 9kHz - 1 GHz Fully Anechoic Chamber 1 GHz - 40GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Refer TEST METHODOLOGY

Table 6: Transmitter limits for Radiated emission

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Temperature (Norm) = + 19.5 °C Voltage = 5VDC through AC/DC Adapter & 5VDC Lithium Polymer battery
Relative humidity: 63%

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 34 von 47
Page 34 of 47

Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details


Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported

Table 7: Test results for frequency range 30MHz – 200MHz

Charging mode:

Antenna Polarization	Measured Frequency (MHz)	Measured Peak Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Vertical	45.96	18.30	40.00	-21.70
	65.79	17.40	40.00	-22.60
	135.15	19.70	43.50	-23.80
Horizontal	45.84	18.50	40.00	-21.50
	65.55	18.00	40.00	-22.00
	103.08	18.90	43.50	-24.60
	158.70	17.80	43.50	-25.70

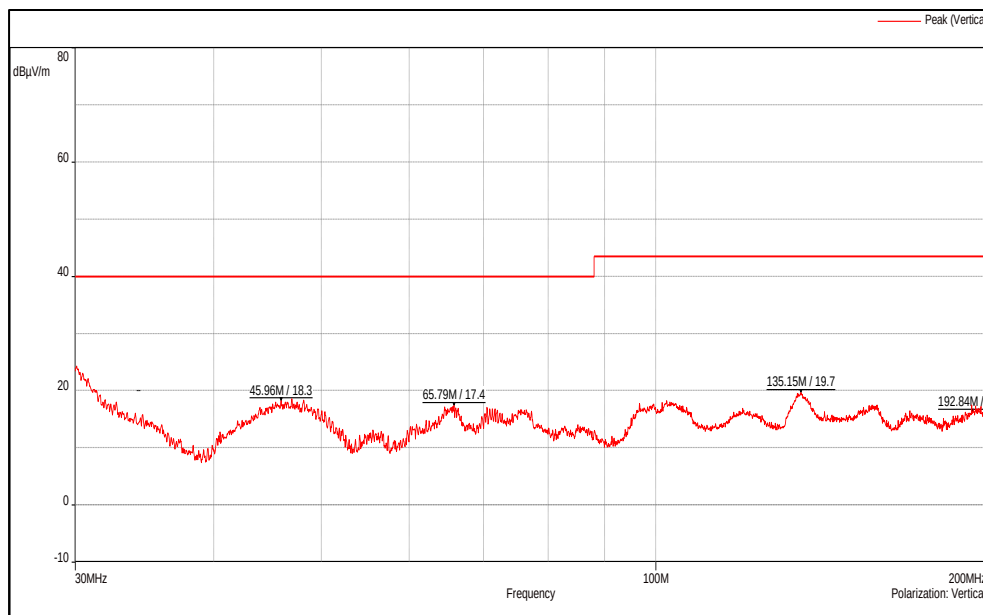


Channel Frequency 30MHz – 200MHz

Polarization Vertical

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 35 von 47
Page 35 of 47

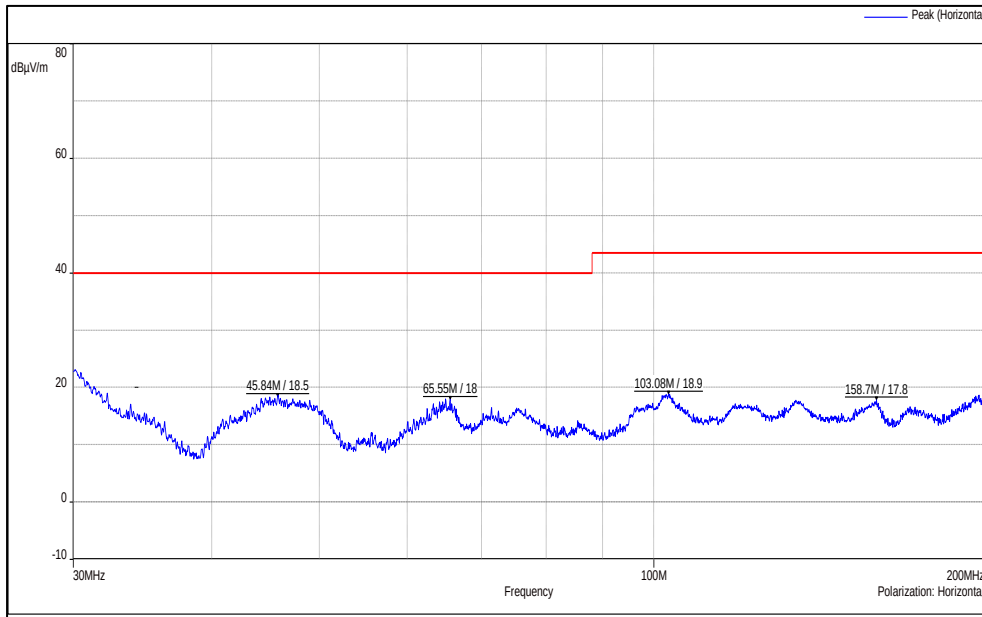

Channel Frequency 30MHz – 200MHz

Polarization Horizontal


Table 8: Test results for frequency range 200MHz – 1GHz

Antenna Polarization	Measured Frequency (MHz)	Measured Peak Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	205.04	17.60	43.50	-25.90
	245.54	17.90	46.00	-28.10
	504.02	24.20	46.00	-21.80
Horizontal	247.31	15.00	46.00	-31.00
	400.16	19.60	46.00	-26.40
	624.86	24.50	46.00	-21.50

Prüfbericht - Nr.:
Test Report No.:


IN22G8KZ 001

Seite 36 von 47
Page 36 of 47

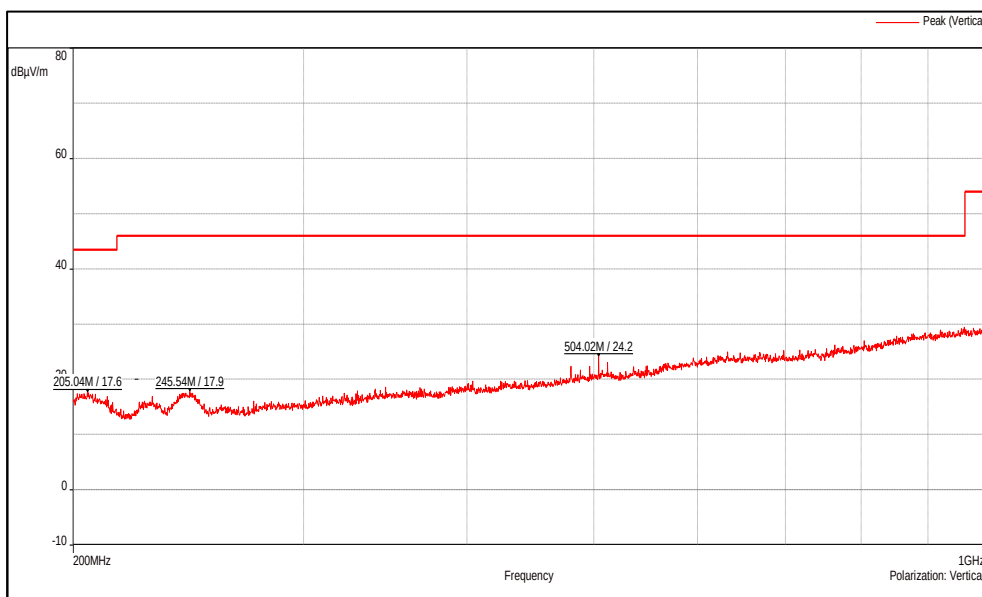

Channel Frequency 200MHz – 1GHz

Polarization Vertical

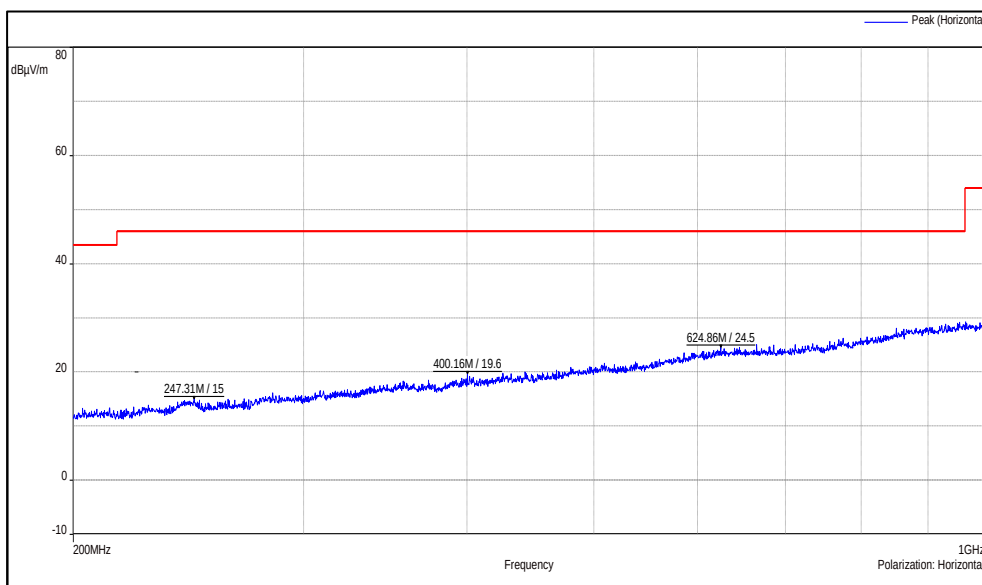

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:

Test Report No.:

IN22G8KZ 001

Seite 37 von 47


Page 37 of 47

Battery Mode:

Test Results from 30MHz to 200MHz

Antenna Polarization	Measured Frequency (MHz)	Measured Peak Value (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Vertical	33.48	10.50	40.00	-29.50
	65.64	9.40	40.00	-30.60
	121.23	11.20	43.50	-32.30
Horizontal	33.63	9.36	40.00	-30.64
	48.00	8.85	40.00	-31.15
	88.50	9.57	43.50	-33.93
	177.42	13.90	43.50	-29.60

Test Plots:

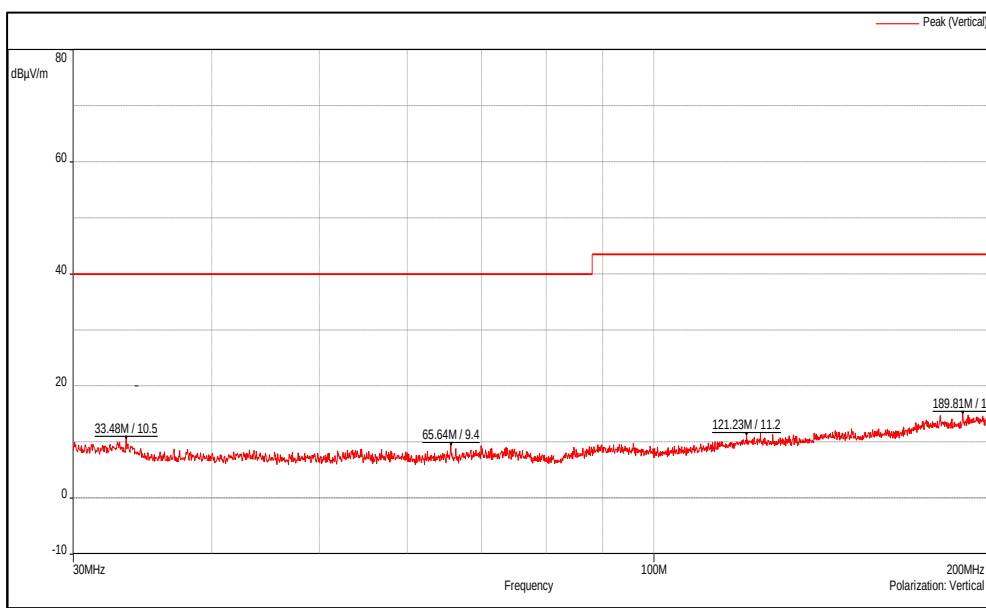


Channel Frequency: 30MHz – 200MHz

Polarization Vertical

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 38 von 47
Page 38 of 47

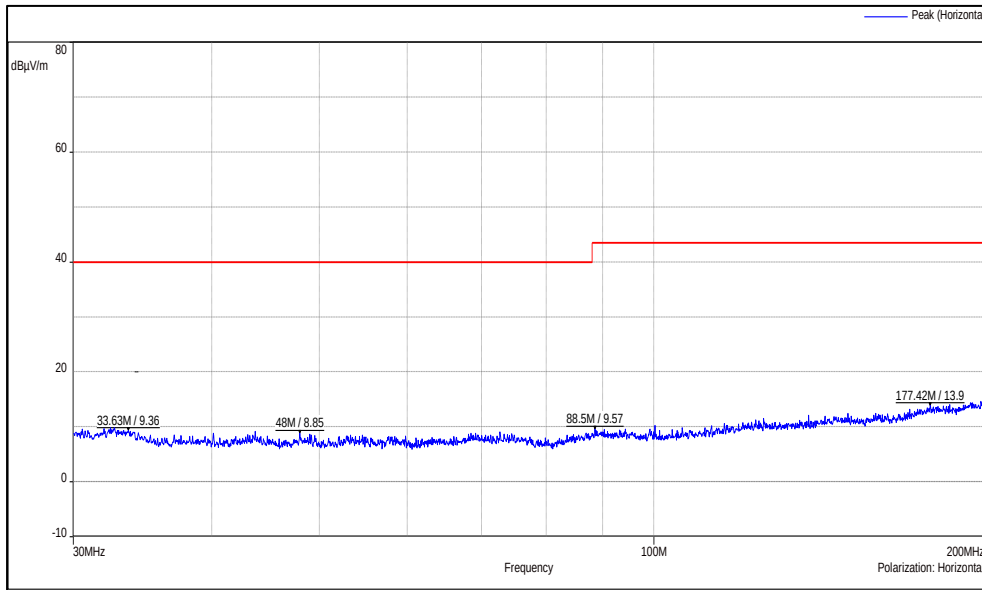

Channel Frequency: 30MHz – 200MHz

Polarization Horizontal

Test Results from frequency range of 200MHz to 1GHz


Antenna Polarization	Measured Frequency (MHz)	Measured Peak Value (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Vertical	280.91	15.40	46.00	-30.60
	504.02	23.30	46.00	-22.70
Horizontal	302.51	16.70	46.00	-29.30
	480.02	22.60	46.00	-23.40
	874.34	28.40	46.00	-17.60

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001


Seite 39 von 47
Page 39 of 47

Test Plots:

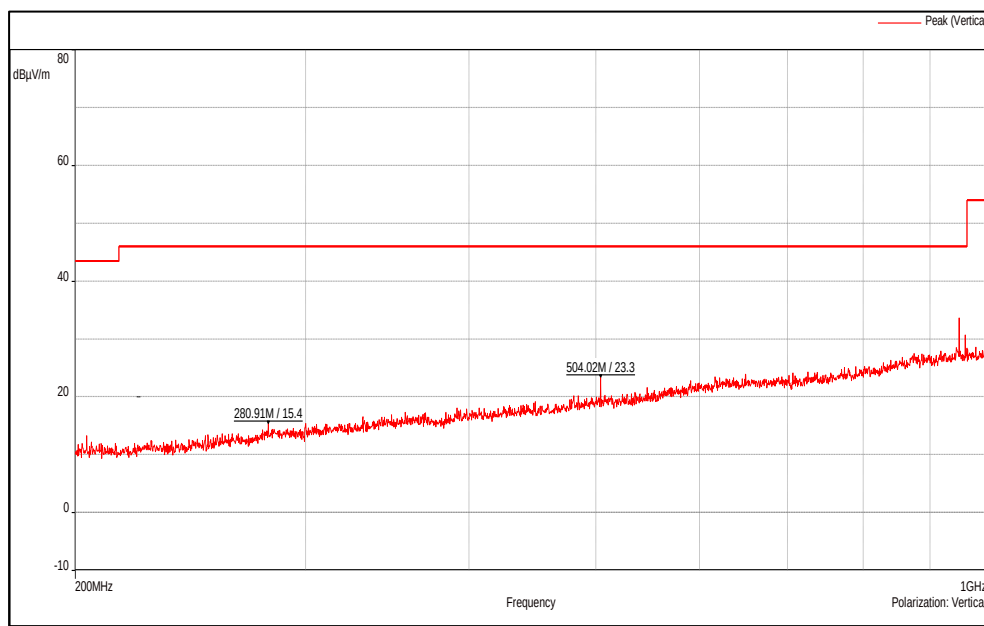

Channel Frequency: 200MHz – 1GHz

Polarization Vertical

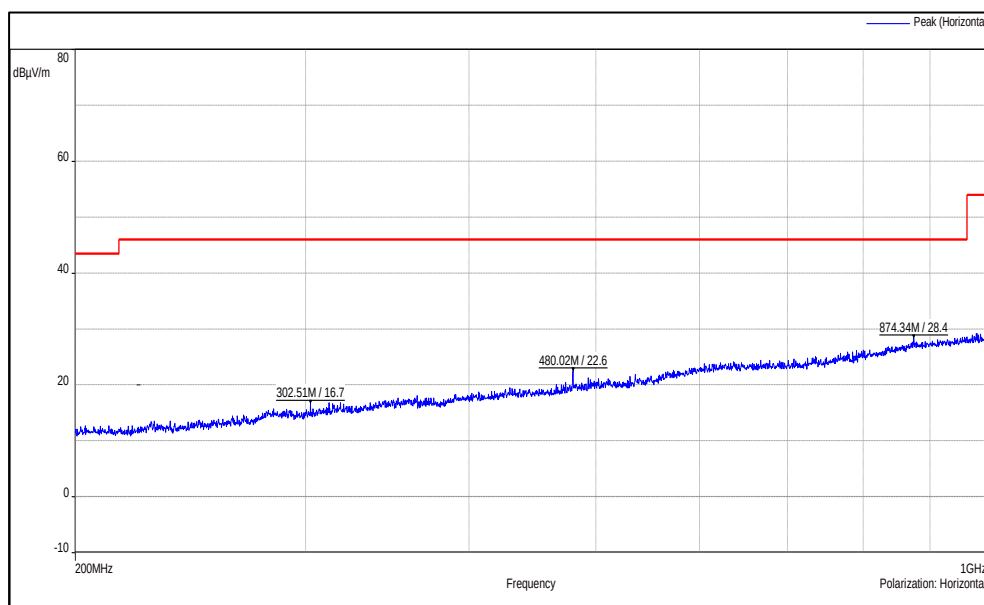

Channel Frequency: 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 40 von 47
Page 40 of 47

Table 9: Test results for the frequencies above 1GHz:

Data Rate: 2Mbps

Channel Frequency (MHz)	Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2390(Pk)	Vertical	38.98	74.00*	-35.02
	2390(Av)		24.65	54.00*	-29.35
	2402(Pk)		91.81	-	-
	2402(Av)		83.72	-	-
	4804(Pk)		55.86	74.00	-18.14
	4804(Av)		42.91	54.00	-11.09
	7206(Pk)		49.80	74.00	-24.20
	7206(Av)		36.68	54.00	-17.32
	2390(Pk)	Horizontal	46.23	74.00*	-27.77
	2390(Av)		29.17	54.00*	-24.83
	2402(Pk)		101.68	-	-
	2402(Av)		93.48	-	-
	4804(Pk)		58.45	74.00	-15.55
	4804(Av)		46.05	54.00	-7.95
	7206(Pk)		46.31	74.00	-27.69
	7206(Av)		34.38	54.00	-19.62
2426	2426(Pk)	Vertical	91.53	-	-
	2426(Av)		83.19	-	-
	4852(Pk)		53.32	74.00	-20.68
	4852(Av)		40.66	54.00	-13.34
	7278(Pk)		46.45	74.00	-27.55
	7278(Av)		35.55	54.00	-18.45
	2426(Pk)	Horizontal	102.51	-	-
	2426(Av)		94.40	-	-
	4852(Pk)		56.95	74.00	-17.05
	4852(Av)		44.66	54.00	-9.34
	7278(Pk)		46.76	74.00	-27.24
	7278(Av)		34.12	54.00	-19.88
2480	2480(Pk)	Vertical	92.39	-	-
	2480(Av)		83.95	-	-
	2483.5(Pk)		47.95	74.00*	-26.05
	2483.5(Av)		31.34	54.00*	-22.66
	4960(Pk)		51.17	74.00	-22.83
	4960(Av)		38.18	54.00	-15.82
	7440(Pk)		47.20	74.00	-26.80
	7440(Av)		34.83	54.00	-19.17
	2480(Pk)	Horizontal	102.86	-	-
	2480(Av)		94.77	-	-
	2483.5(Pk)		58.25	74.00*	-15.75
	2483.5(Av)		40.77	54.00*	-13.23
	4960(Pk)		55.02	74.00	-18.98
	4960(Av)		41.82	54.00	-12.18
	7440(Pk)		46.88	74.00	-27.12
	7440(Av)		34.32	54.00	-19.68

_ → Fundamental Frequency

*→ Restricted Band edges

Pk: Peak Detector;

Av: Average Detect


Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 41 von 47
Page 41 of 47


Test Plots:

Data Rate: 2Mbps

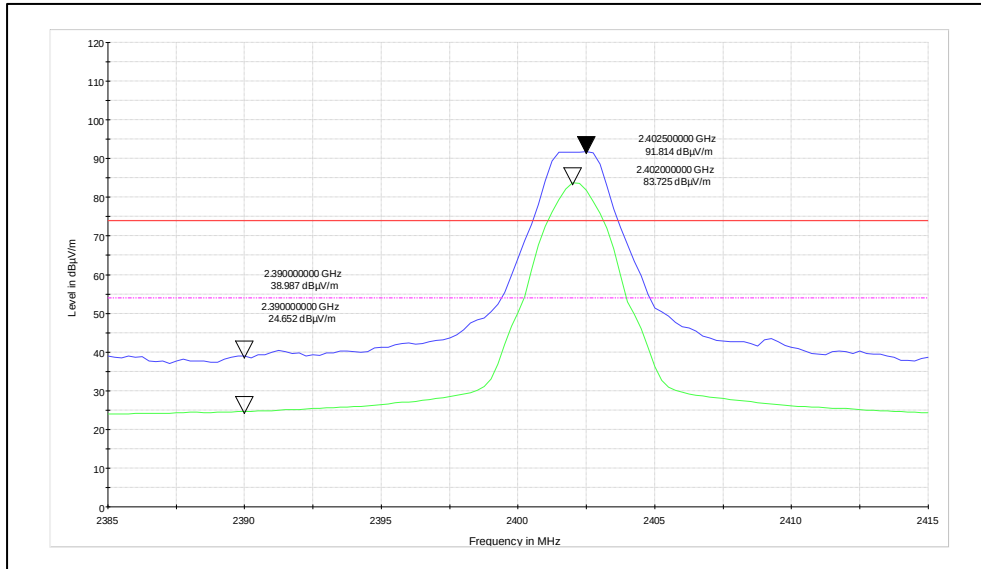

Channel Frequency: 2402MHz

Polarization: Vertical

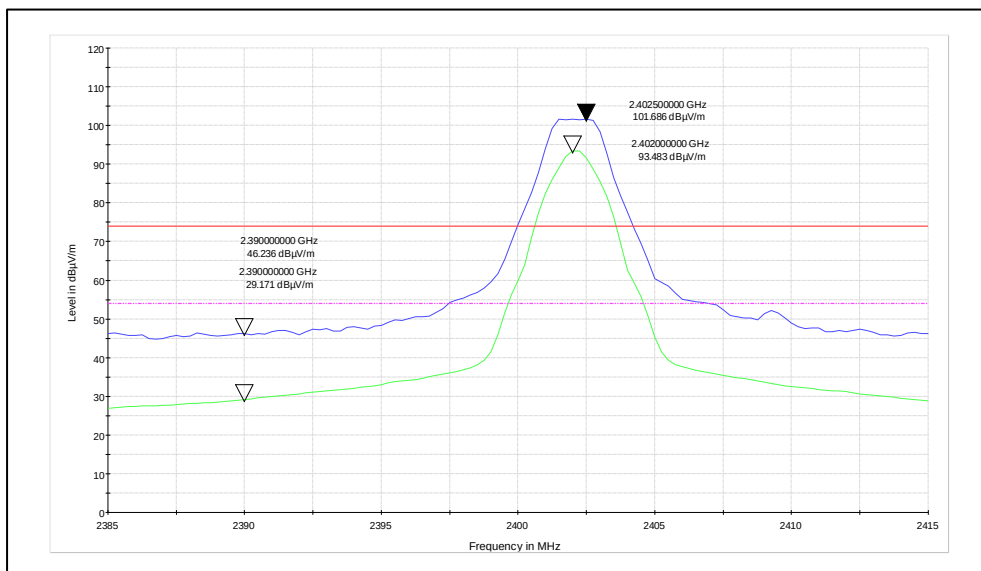


Channel Frequency: 2402MHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN22G8KZ 001

Seite 42 von 47
Page 42 of 47

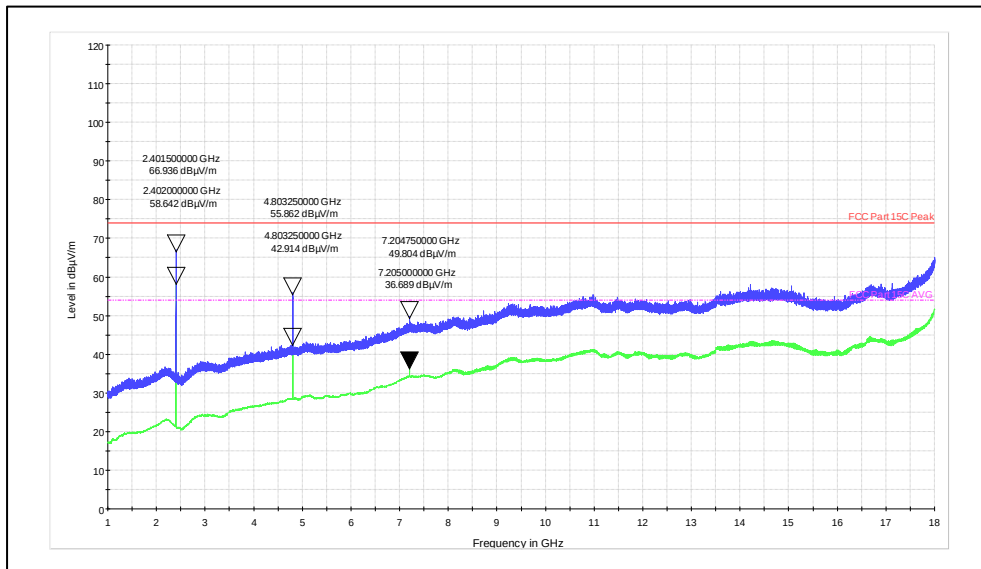


Polarization: Vertical

Frequency range: 1GHz to 18GHz

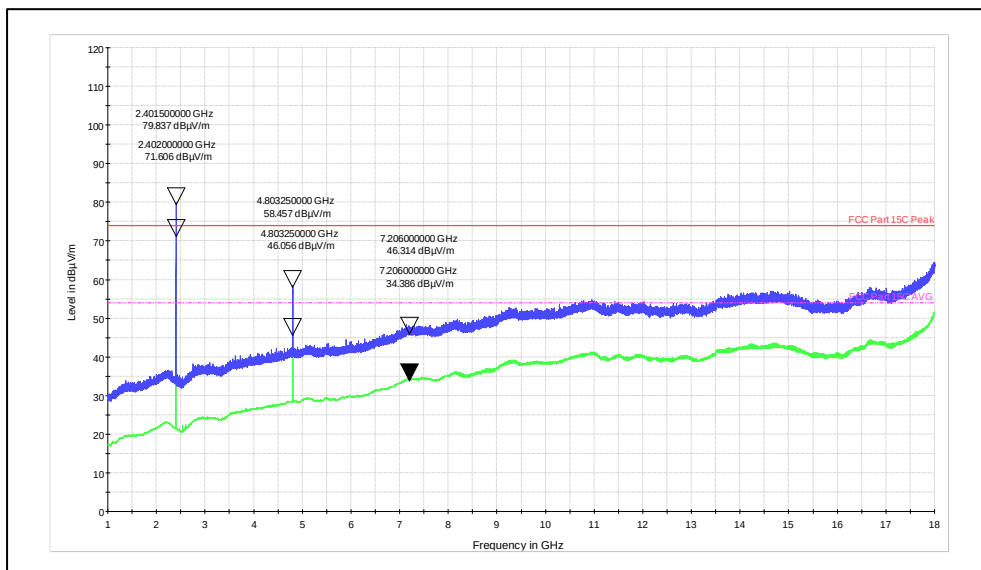


Polarization: Horizontal

Frequency range: 1GHz to 18GHz

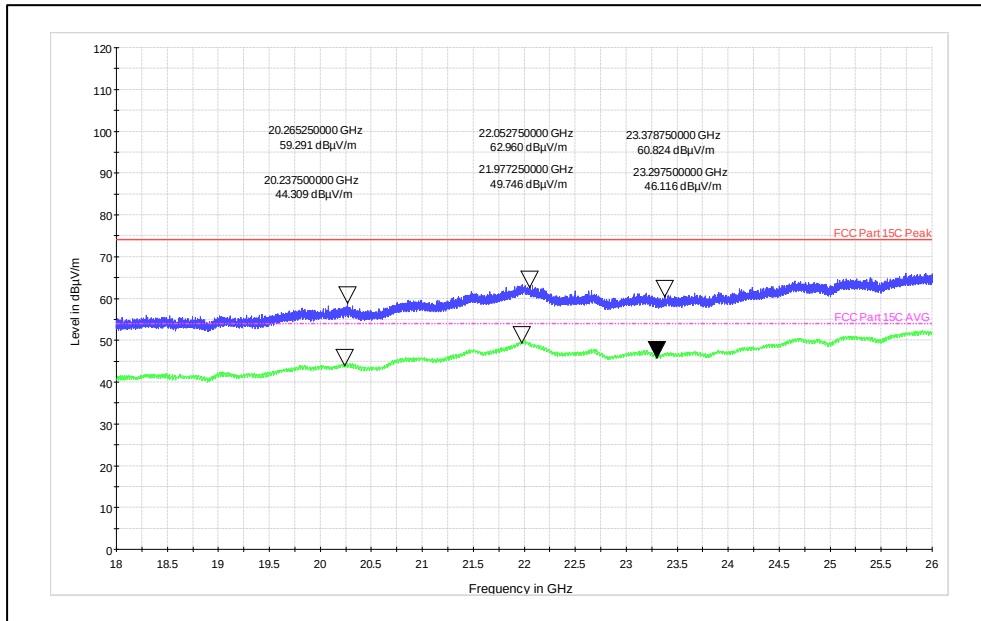

Polarization: Vertical

Frequency range: 18GHz to 26GHz

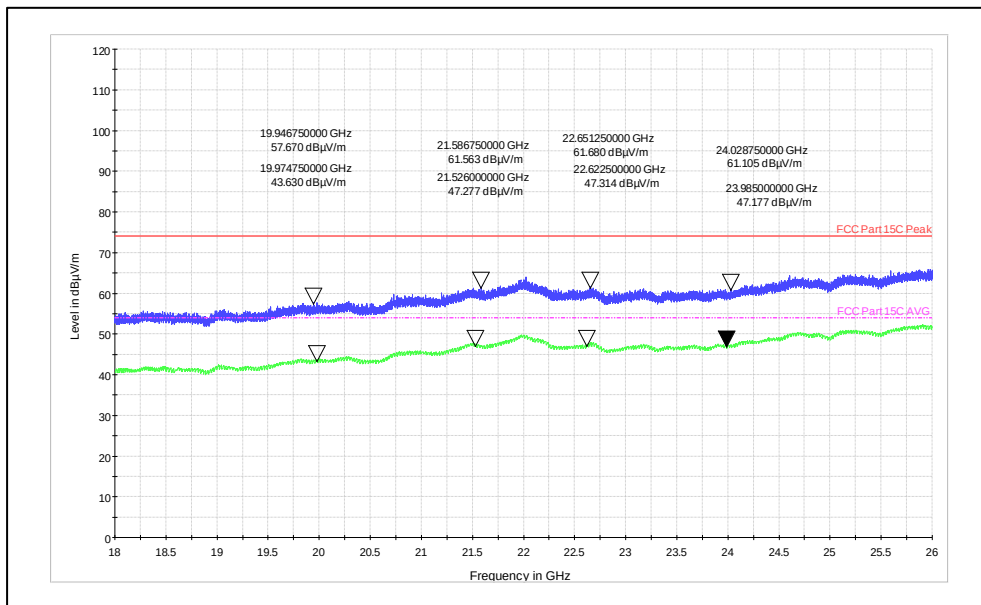

Polarization: Horizontal

Frequency range: 18GHz to 26GHz

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 44 von 47
Page 44 of 47

7.6 Conducted spurious emission Test on AC Power lines

Result

Pass

Test Specification : FCC Part 15 Section 15.207
Test Method : ANSI C 63.10-2013
Testing Location : Screened room
Measurement Bandwidth : 9kHz
Frequency Range : 150kHz – 30MHz
Supply Voltage : 110VAC,60Hz
Test Method : Refer TEST METHODOLOGY

Table 10: Limits for Conducted power line emission

Frequency of emission (MHz)	QP Limit (dBμV)	AV Limit (dBμV)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency

Test Conditions:

Temperature (Norm) = +24 °C Voltage = 110V AC (Through AC to DC Adapter) Relative humidity: 64%


Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 45 von 47
Page 45 of 47

Test results:

110VAC-60Hz-Line

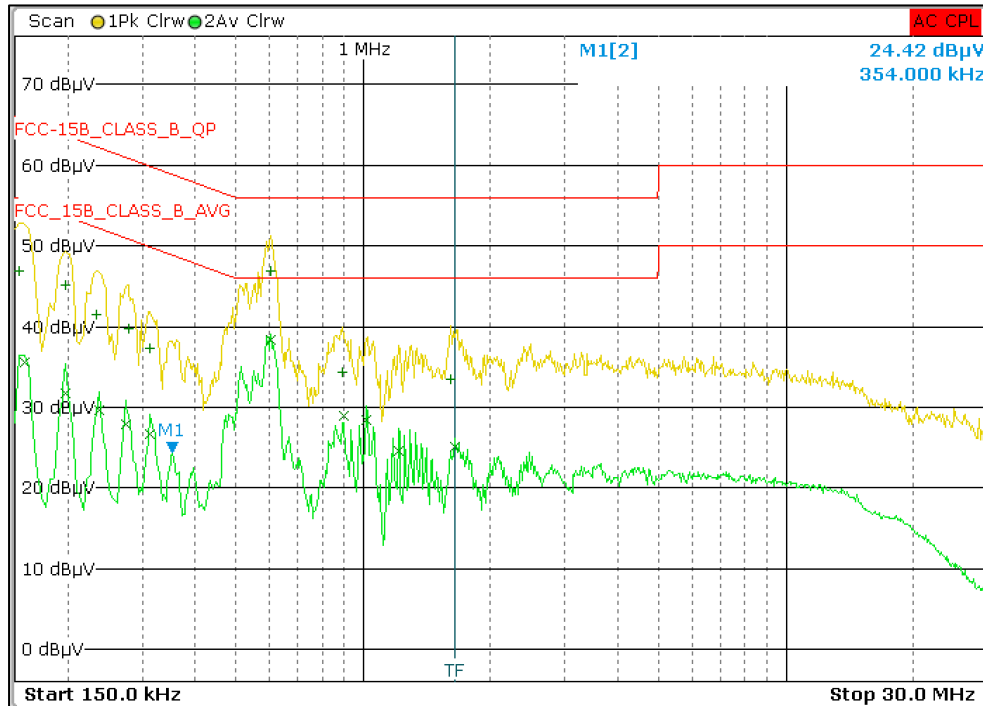

Line-Graph


Trace	Frequency	Level (dBµV)	Phase	Detector	Delta Limit/dB
1	154.000000000 kHz	46.97		Quasi Peak	-18.81
2	158.000000000 kHz	35.59		Average	-19.98
1	198.000000000 kHz	45.10		Quasi Peak	-18.59
2	198.000000000 kHz	31.65		Average	-22.04
1	234.000000000 kHz	41.56		Quasi Peak	-20.75
2	238.000000000 kHz	29.58		Average	-22.59
2	274.000000000 kHz	27.96		Average	-23.04
1	278.000000000 kHz	39.73		Quasi Peak	-21.15
1	314.000000000 kHz	37.30		Quasi Peak	-22.56
2	314.000000000 kHz	26.70		Average	-23.16
1	606.000000000 kHz	46.95		Quasi Peak	-9.05
2	606.000000000 kHz	38.36		Average	-7.64
1	894.000000000 kHz	34.42		Quasi Peak	-21.58
2	902.000000000 kHz	29.02		Average	-16.98
2	1.018000000 MHz	28.48		Average	-17.52
2	1.214000000 MHz	24.64		Average	-21.36
1	1.610000000 MHz	33.47		Quasi Peak	-22.53
2	1.650000000 MHz	25.13		Average	-20.87

Prüfbericht - Nr.:
Test Report No.:

IN22G8KZ 001

Seite 46 von 47
Page 46 of 47

110VAC-60Hz-Neutral:

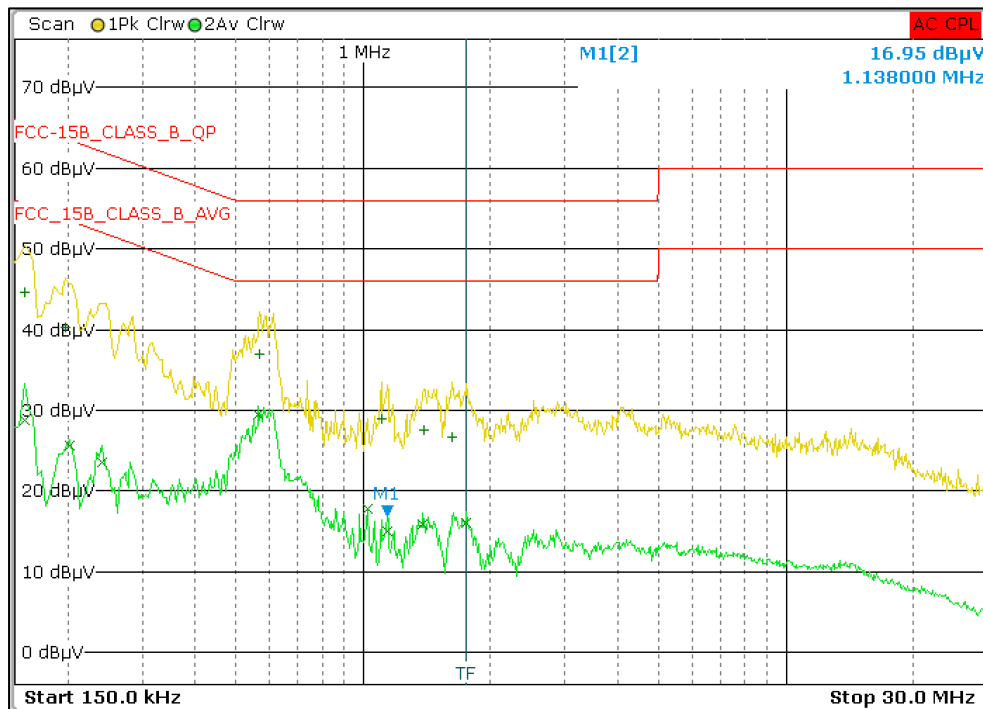

Neutral Graph

Trace	Frequency	Level (dBµV)	Phase	Detector	Delta Limit/dB
1	158.000000000 kHz	44.55		Quasi Peak	-21.02
2	158.000000000 kHz	28.85		Average	-26.72
1	198.000000000 kHz	40.23		Quasi Peak	-23.46
2	202.000000000 kHz	25.67		Average	-27.86
2	242.000000000 kHz	23.55		Average	-28.48
2	566.000000000 kHz	29.45		Average	-16.55
1	570.000000000 kHz	36.92		Quasi Peak	-19.08
2	1.022000000 MHz	17.78		Average	-28.22
1	1.106000000 MHz	28.87		Quasi Peak	-27.13
2	1.138000000 MHz	14.99		Average	-31.01
2	1.386000000 MHz	15.82		Average	-30.18
1	1.390000000 MHz	27.62		Quasi Peak	-28.38
1	1.622000000 MHz	26.61		Quasi Peak	-29.39
2	1.758000000 MHz	16.11		Average	-29.89

8 LIST OF TABLES

Table 1: List of test and measurement instruments	7
Table 2: Instrument application Software versions	8
Table 3: Ratings and System Details as declared by Client*	9
Table 4: Measurement Uncertainty	10
Table 5: List of BLE Center frequencies	11
Table 6: Transmitter limits for Radiated emission	33
Table 7: Test results for frequency range 30MHz – 200MHz	34
Table 8: Test results for frequency range 200MHz – 1GHz	35
Table 9: Test results for the frequencies above 1GHz:	40
Table 10: Limits for Conducted power line emission	44

9 List of Figures

Figure 1: Frequency Range 9 kHz- 30 MHz	15
Figure 2: Frequency Range 30 MHz – 200 MHz	15
Figure 3: Frequency Range 200 MHz - 1GHz	16
Figure 4: Frequency Range above 1 GHz	16

*****End of test report*****