

Product Number: JSP-19509304-22BN

Product Name: WIFI Antenna



Specification For Approval

日期 Date : 2023/01/011

编号 File No. : XBL23011103

版次 Version : 1.0

Customer: JX

Customer P/N: _____

Sinbolin P/N: JSP-19509304-22BN

Description : WIFI Antenna

Sinbolin Checked By:

Customer Approved By:



Sinbolin Technology Inc.

Room205,building6,No,162,East Zhen,an Road,Changan Town,Dongguan City

The phone: 13929204545

Product Number: JSP-19509304-22BN

Product Name: WIFI Antenna

(Index) :

A. Specification Cover/ Page 1

B. Specification Item/ Page 2

1. Product Specification/ Page 3

2. Reliability Test Data/ Page 4

3. SParameter Test Data/ Page 5

4. Efficiency and Gain Test Data/ Page 6

5. Active test data /Page 7


6. Mechanical Drawing/ Page 8

7. PackingSpecification/ Page 9

Product Number: JSP-19509304-22BN

Product Name: WIFI Antenna

1. Product Specification

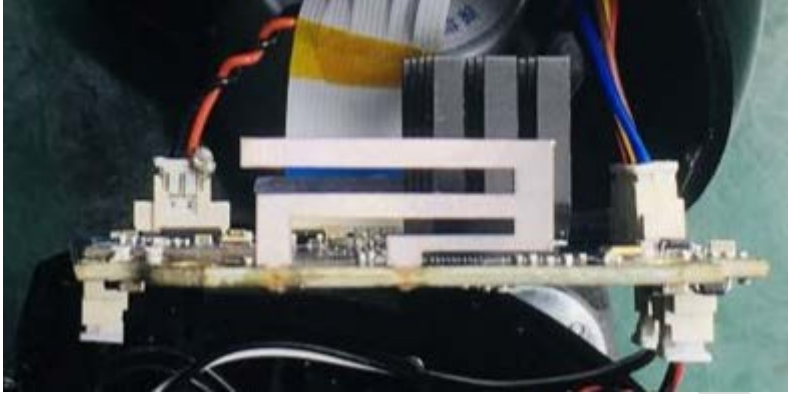Product Photo	
	
A. Electrical Characteristics	
Frequency	2400 ~ 2500 MHz
V.S.W.R	≤ 2.0 @2400 ~ 2500 MHz
Return Loss	≤ -10 dB @ 2400 ~ 2500 MHz
Antenna Gain	2.00dBi
Radiation Efficiency	50 ~ 70 %
Impedance	50 ± 15 Ohm
Polarization	Linear
Antenna Type	PIFA
B. Material & Mechanical Characteristics	
Material of Radiator)	Stainless steel
Cable Type	/
Connector Type	/
Pull Test	/
C. Environmental	
Operation Temperature	- 40 °C ~ + 75 °C
Storage Temperature	- 40 °C ~ + 85 °C

Product Number: JSP-19509304-22BN

Product Name: WIFI Antenna

2. Characteristics and Reliability Test

Test Items		Test Condition and Procedure	Requirements	Result
C1	V.S.W.R.	Set DUT on Network Analyzer; make individual calibration to test	Directive DUT specification	PASS
M1	Vibration	GB / T2423.48-2008 Amplitude: 0.03 inch (1.5mm); Freq: 20 to 80 to 20 Hz 3 directions; 2 hours for each direction	1. No Visual Damage 2. Frequency Tol.≤5%	PASS
M2	Random Drop	GB / T2423.8-1995 Single: Height: 1.0 Meter; 3 directions; 1 time for each direction	1. No parts separated, fracture 2. Frequency Tol.≤5%	PASS
M4	Pull Test	Holding with individual specification; force applied to axis of terminal .	1. Directive DUT specification 2. Frequency Tol.≤5%	PASS
M6	Dimension	Inspection of dimension, color, material, package, surface process.	Directive DUT specification	PASS
E2	Salt Spray	GB / T 2423.17-2008 Temp: 35°C; RH: ≥ 95%; NaCl solution: ≥ 5%;Time: 24H	1. No Visual Damage 2. Frequency Tol.≤5%	PASS
E3	Temperature and Humidity Chamber	GB / T 2423.3-2006 Temp: 80°C / 12 H; -40°C / 12H RH: ≥ 90%; Time: 24H	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.≤5%	PASS
E4	Thermal Shock	GB / T 2423.22 - 2008 - 40°C (30 minutes) to + 80°C (30 minutes); Cycles: 24	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.≤5%	PASS
E5	Aging test	GB /T 2423.2 - 2008 Temp: 80°C; Time: 24 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.≤5%	PASS

Product Number: JSP-19509304-22BN

Product Name: WIFI Antenna


4. SParameter Test Data



ROHDE&SCHWARZ ZVL

The test frequency range: 9KHz-6GHz

Testing capability: V.S.W.R、Return Loss、Smith Etc.

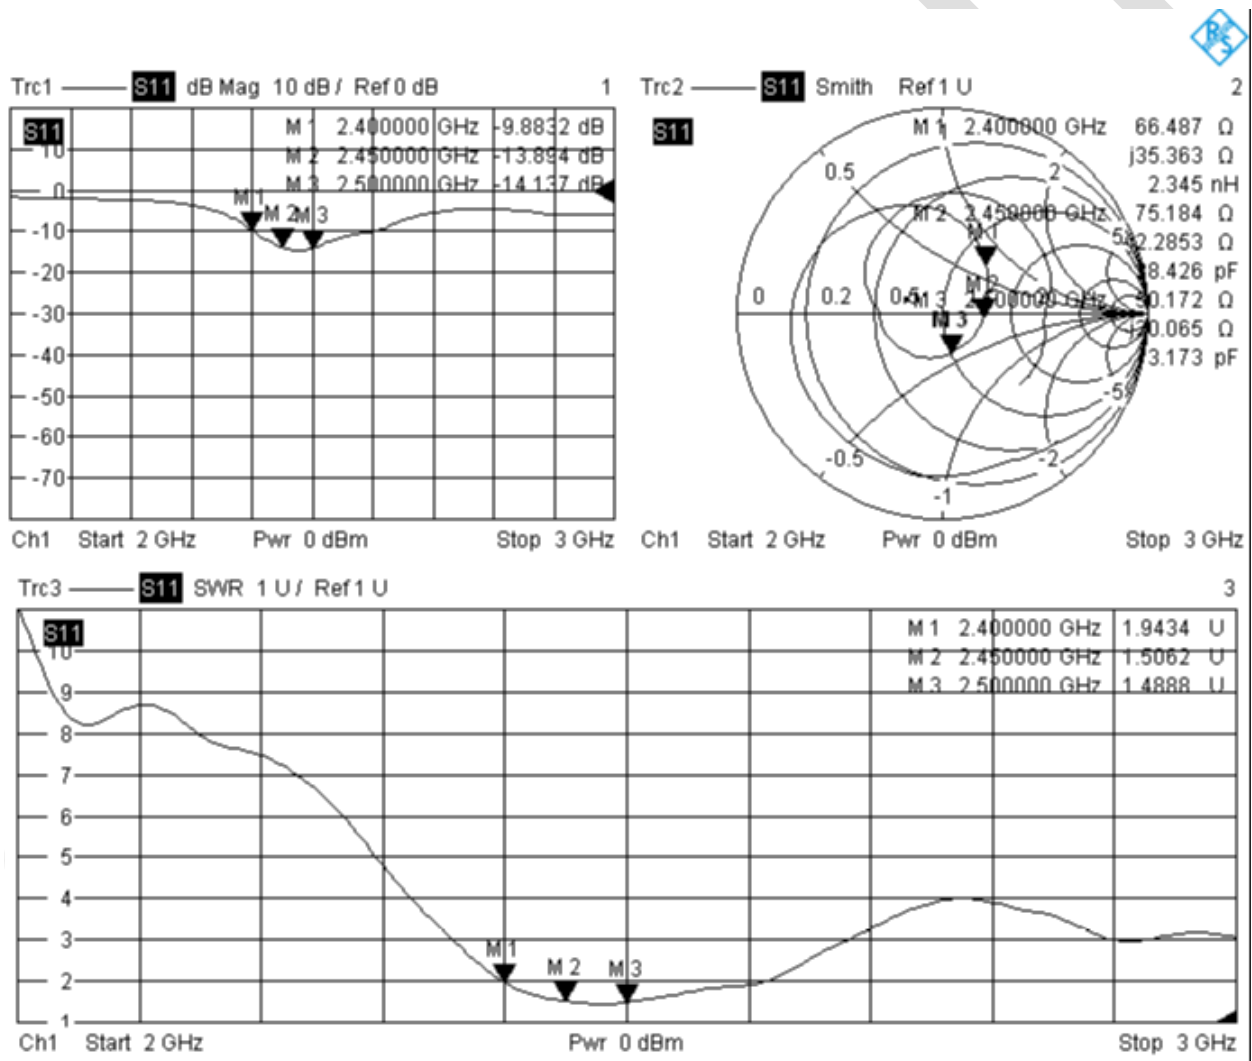


Product Number: JSP-19509304-22BN

Product Name: WIFI Antenna


5. Efficiency and Gain Test Data

Passive Test For WIFI2400


Freq (MHz)	Effi (%)	Gain (dBi)
2400	54.41	1.05
2410	51.96	0.81
2420	51.92	0.75
2430	52.68	0.82
2440	53.13	0.74
2450	54.49	1.98
2460	56.27	1.11
2470	56.73	1.08
2480	55.69	0.86
2490	56.25	0.86
2500	55.68	0.91

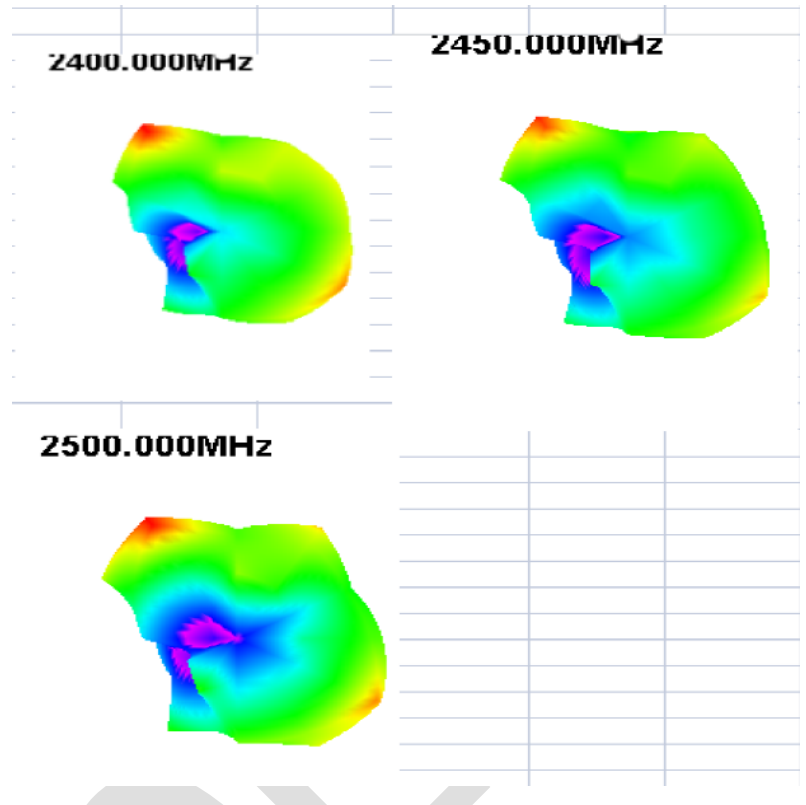

2400.00MHz - 2500.00MHz Gain

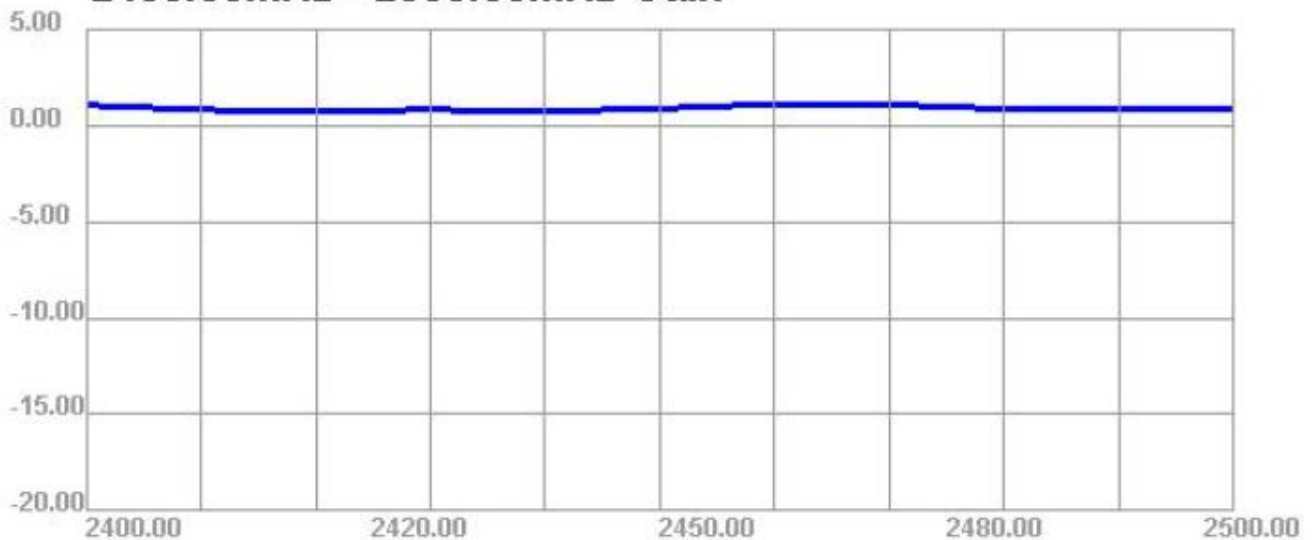

2400.00MHz - 2500.00MHz Efficiency

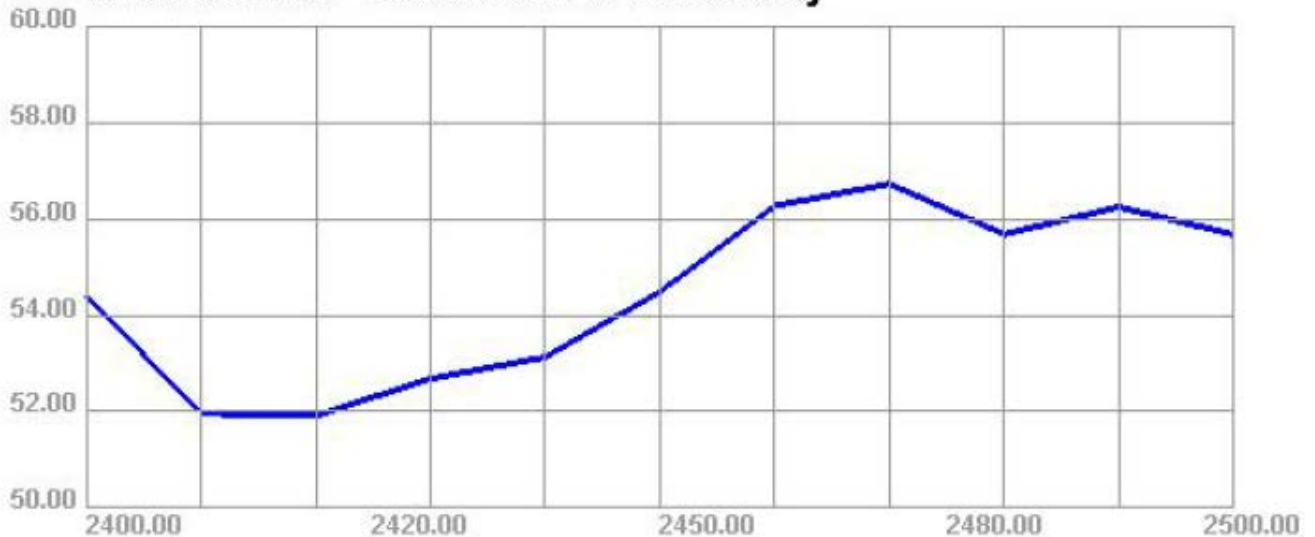

Product Number: JSP-19509304-22BN



Product Name: WIFI Antenna

6. Active test data

Mode	Band	Test Case	Channel	Data Rate	Test Results (dBm Worst)
				(Mbps)	机台型号: SC4336
WIFI 2.4G	802.11.b	TRP	1	11M	15.72
			7		16.15
			13		16.28
		TIS	1	11M	-76.21
			7		-77.3
			13		-76.86
	802.11.g	TRP	1	54M	14.57
			7		15.12
			13		14.88
		TIS	1	54M	-65.62
			7		-64.37
			13		-65.45
	802.11.n	TRP	1	ISM(65)	12.75
			7		13.43
			13		13.12
		TIS	1	ISM(65)	-62.5
			7		-62.47
			13		-63.05

SINBOLIN


HF

RoHS

REACH

CONFIDENTIAL

SIGN	DATE	DESCRIPTION	APPROVER
			YJH

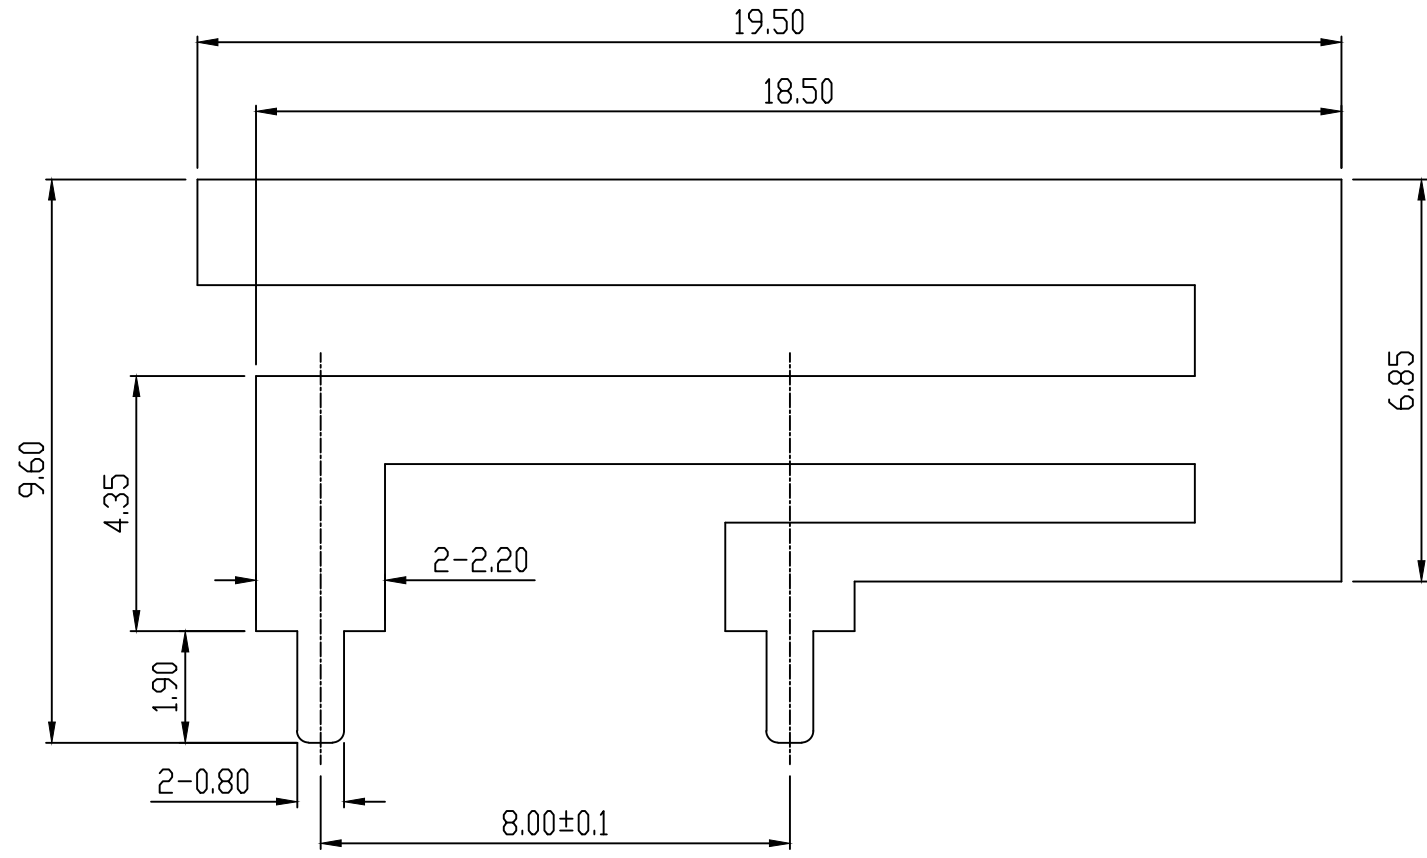

Technical requirements:

- 1.The material is stainless steel and the thickness is 0.4mm.
- 2.The color is nickel-plated

信博联 Dongguan Sinbolin Electronic Technology Co., LTD SINBOLIN					
TITLE: Sheetmetal			CUSTOMER P/N: /		
PART NO.: JSP-19509304-22BN			Standard Tolerance X.X ±0.2 ○ 0.02 X.XX ±0.1 ◎ 0.03 X° ±1 ▱ 0.05 UNITS: mm // 0.03 SCALE: 1/1 ⊥ 0.05 REVISION: B ≡ 0.05		
APP BY	CHK BY	RF BY	DES BY		
City 2023/01/11	Yixin 2023/01/11		XRS 2023/01/11		



PACKING CRITERION

Date: 2023/01/11

Page: 1 of 1


Part Number : JSP-19509304-22BN	Revision : A
Name: Sheet metal WIFI Antenna	Customer :

一. WITH THE ANT INTO THE PE BAG

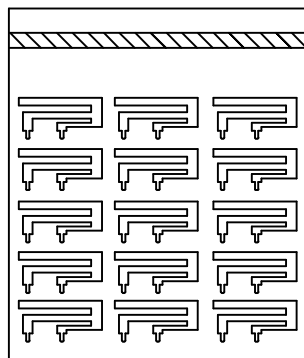

一袋2000PCS/PE



二. PACKING

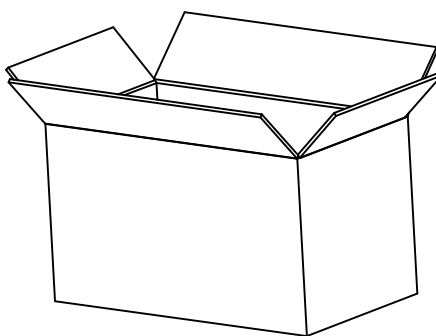

20000PCS/CARTON

Will be subject to the actual order quantity

三. SEALING

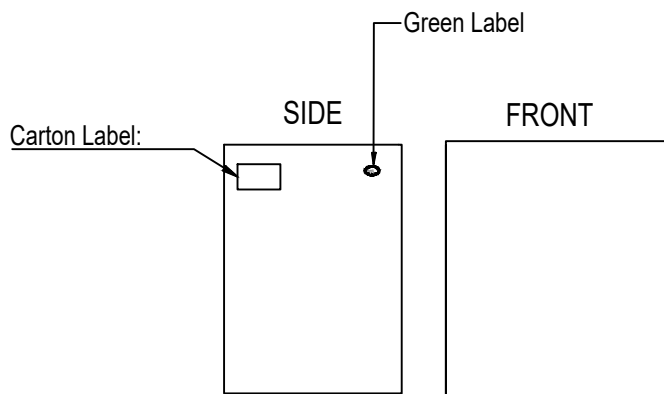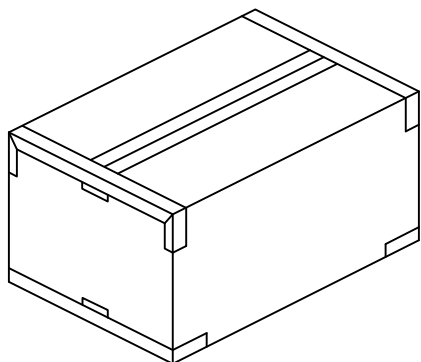

APPROVED BY : City

CHECKED BY : Yixin

DESIGNED BY : XRS