

承认书项目表

NO.	内容 (Contents)	页数 (Number of Page)	页码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	工程成品图 (Drawing)	1	3
4	电性测试报告 (Test Reports)	1	4
5	S 参数测试 (S Parameter)	1	5
6			
7			
8			
9			
10	-	-	-
11	-	-	-
12	-	-	-

1 2 3 4 5 6 7 8

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			


E

D

C

B

A

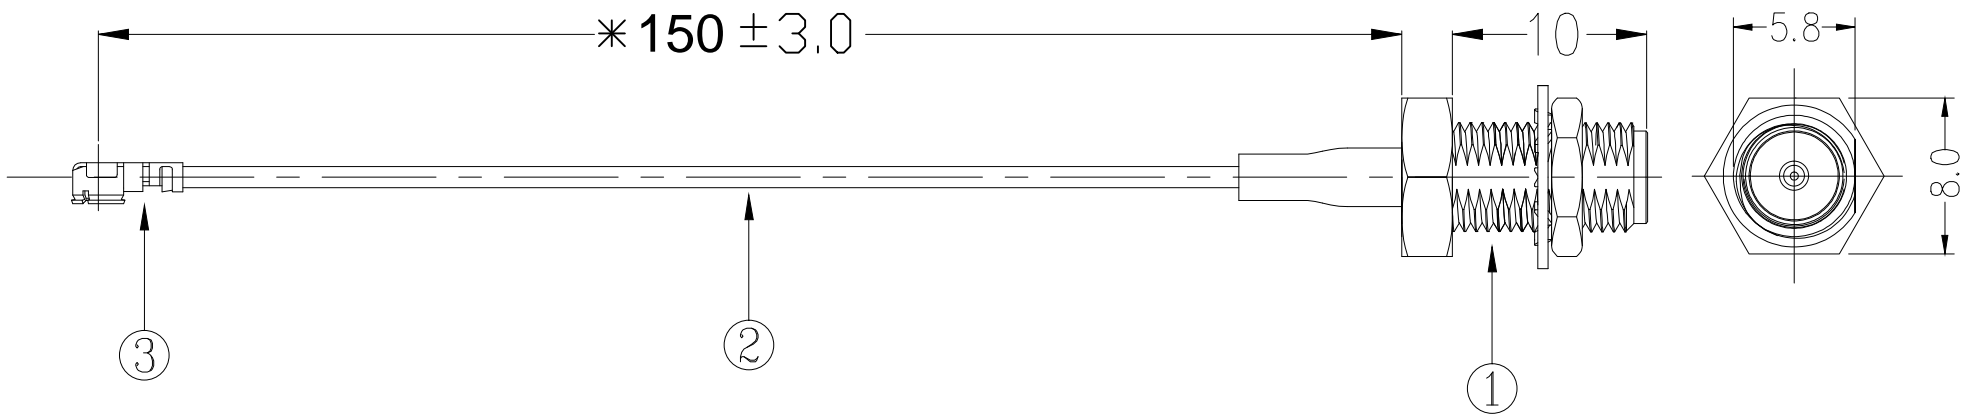

3	IX13	CONN	IPEX1.3	Au plated	1
2	RG-113B	CABLE	1.13	Black	1
1	SMA-SFR8-002	CONN	SMA Female RP	Au plated	1
No.	Part Number	Description	Material	Finish	Q'ty

东莞市创捷电子有限公司

TITLE: SMA to ipex			
PART NO.: SMASFN8-13B-150IX		DWG NAME: SMASFN8-13B-150IX.DWG	
APPROVED BY	CHECKED BY	DESIGNED BY	 Tolerance YD ±0.05 YD ±0.05 YD ±0.05
jeff 2014-02-26	leon 2014-02-26	YD 2014-02-26	
UNITS: mm		SCALE: 1/1	
		REVISION: A	

1 2 3 4 5 6 7 8

电性测试报告

Test Reports

Electrical Properties	
Frequency	DC - 6 GHz
Impedance	50 Ohm Nominal
V.S.W.R	1.5: 1 Max
Gain (dBi)	1dBi
Insulation Resistance	1000M ohm
Cable Loss	2.2 dB / m @ 1GHz
Contact Resistance	Center Contact: 10M ohm outer Contact: 5M ohm
Admitted Power	1 W
Connector	RP - SMA Female Mini Connector
Physical Properties	
Cable	O.D. 1.13mm // 150 mm
Operating Temp.	-10 ~ +60 °C
Storage Temp.	-10 ~ +70 °C
Cable Color	Black


ADD : 东莞市虎门镇大宁麒麟东路6号

Tel:15818375487

S 参数测试


S Parameter Test

Agilent E5071C

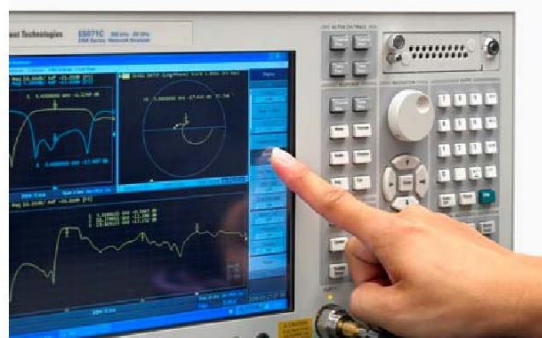


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State


Tr1 S11 Log Mag 5.000dB/ Ref -20.00dB

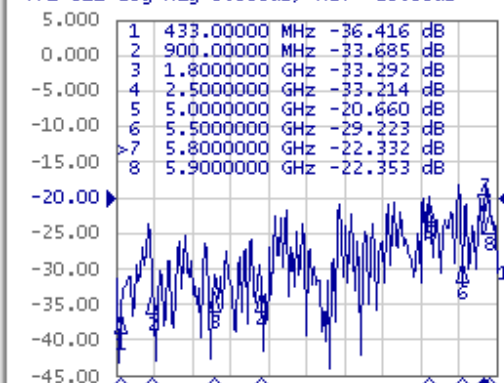


Tr2 S11 Smith (R+jX) Scale 1.000U

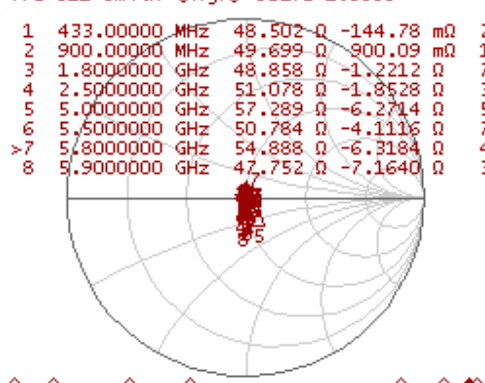

Tr3 S14 Log Mag 2.500dB/ Ref 0.000dB

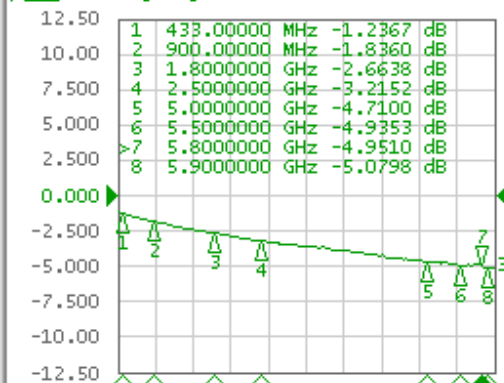

Tr4 S11 SWR 200.0m/ Ref 1.000

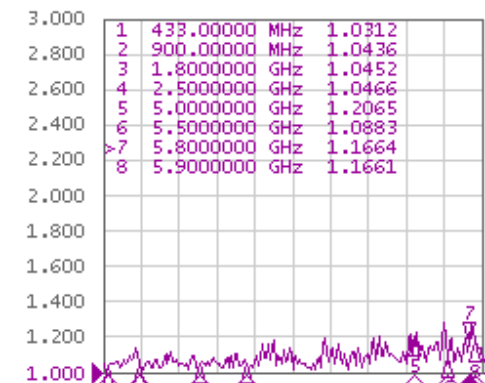

1 Start 350 MHz IFBW 70 kHz Stop 6 GHz Off

Trigger

Hold

Single

Continuous

Hold All Channels

Continuous Disp Channels

Trigger Source Internal

Trigger Event On Sweep

Restart

Trigger

Return

ADD : 东莞市虎门镇大宁麒麟东路6号

Tel:15818375487