TEST REPORT

Report No.:	TW2303261-02E
Applicant:	TOY'LI SAS
Product:	TOY'LI SPEAKER
Model No.:	JT-LISK01
Trademark:	TOY'LI
Test Standards:	FCC Part 15.225
Test Result:	It is herewith confirmed and found to comply with the requirements set up by ANSI C63.4&FCC Part 15.225, for the evaluation of electromagnetic compatibility

Approved By:

Terry Tang

Manager

Dated: April 07, 2023

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Test Report Conclusion

Content

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Telephone: +86 755 83448688

Fax: +86 755 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: TOY'LI SAS

Address: 229 RUE SAINT HONORÉ 75001 PARIS FRANCE

Telephone: 87091115

Fax: --

1.3 Description of EUT

Product:	TOY'LI SPEAKER
Manufacturer:	TOY'LI SAS
Address:	229 RUE SAINT HONORÉ 75001 PARIS FRANCE
Trademark:	TOY'LI
Model Number:	JT-LISK01
Additional Model Name	N/A
Additional Trade Name	N/A
Hardware Version:	GT2303-021/NFCPLY V1.0
Software Version:	GT2303-021/NFCPLY V1.0
Serial No.:	N/A
Rating:	DC5V, 1A
Battery:	DC3.7V, 2000mAh Li-ion battery
Operation Frequency:	13.56MHz
Modulation Type:	ASK
Antenna Designation	PCB Loop Antenna with Gain 0dBi (Get from the antenna specification)

1.4 Submitted Sample

1 Sample

1.5 Test Duration

2023-03-17 to 2023-04-07

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 9kHz-30MHz Uncertainty =4.3dB

Radiated Emissions below 30MHz-1GHz Uncertainty =4.7dB

Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

The sample tested by _____

Print Name: Andy Xiao

2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17
LISN	R&S	EZH3-Z5	100253	2022-07-18	2023-07-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2022-07-18	2023-07-17
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2022-07-15	2023-07-14
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17
Power meter	Anritsu	ML2487A	6K00003613	2022-07-18	2023-07-17
Power sensor	Anritsu	MA2491A	32263	2022-07-18	2023-07-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic	--	--	N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2022-07-15	2023-07-14
EMI Test Receiver	RS	ESCS 30	834115/006	2022-07-15	2023-07-14
Spectrum	HP/Agilent	E4407B	MY50441392	2022-07-15	2023-07-14
Spectrum	RS	FSP	1164.4391.38	2022-07-15	2023-07-14
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA	--	2022-07-15	2023-07-14
RF Cable	Zhengdi	7m	--	2022-07-15	2023-07-14
Pre-Amplifier	Schwarebeck	BBV9743	#218	2022-07-15	2023-07-14
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2022-07-15	2023-07-14
LISN	SCHAFFNER	NNB42	00012	2022-08-18	2023-07-17
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17

3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna requirements	**Pass**	Compliant
FCC Part 15, Paragraph 15.207	Conducted Emission Test	**Pass**	Compliant
FCC Part 15, Paragraph 15.209 (a) (f); FCC Part 15, Paragraph 15.225 (a)	Radiated Emissions	**Pass**	Compliant
FCC Part 15, Paragraph 15.225 (e)	Frequency Tolerance	**Pass**	Compliant
FCC Part 15, Paragraph 15.215	20dB Bandwidth Testing	**Pass**	Compliant

3.2 Test Standards

FCC Part 15 Subpart C , ANSI C63.4 :2014 and ANSI C63.10 :2013

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

5. Power Line Conducted Emission Test

5.1 Schematics of the test

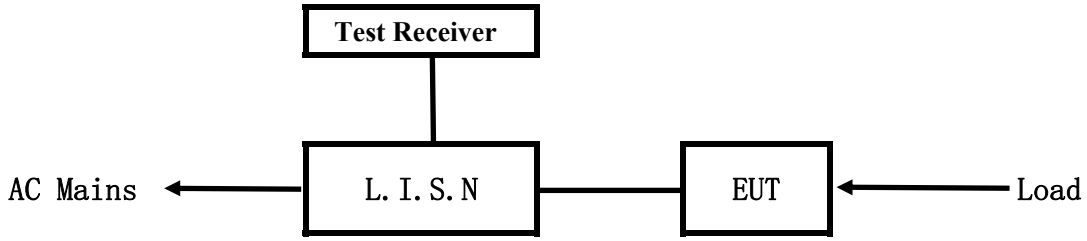

EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013.The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

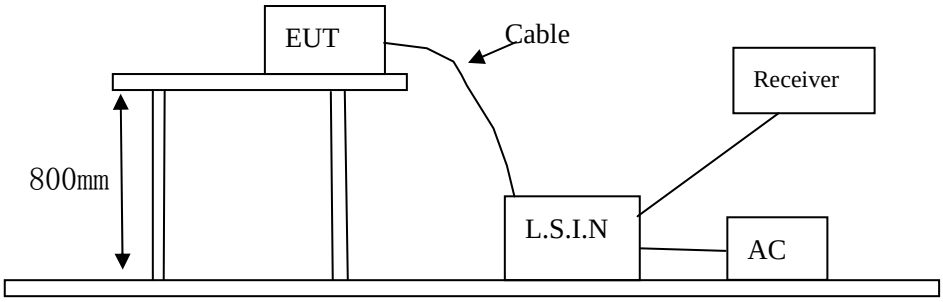

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
TOY'LI SPEAKER	TOY'LI SAS	JT-LISK01	2BANS-JT-LISK01

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	FUJIA	FJ-SW1260502000DN	Input: 100-240V~, 50/60Hz, 0.4A; Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2013.

A Setup the EUT and simulators as shown on follow

B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency (MHz)	Limits (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ～ 0.50	66.0～56.0*	56.0～46.0*
0.50 ～ 5.00	56.0	46.0
5.00 ～ 30.00	60.0	50.0

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz. (The average detector is necessary when the Quasi-peak emission level beyond the average Limit.)

A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 25℃ Humidity:75%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging + Keep Transmitting

Results: Pass

Please refer to following diagram for individual

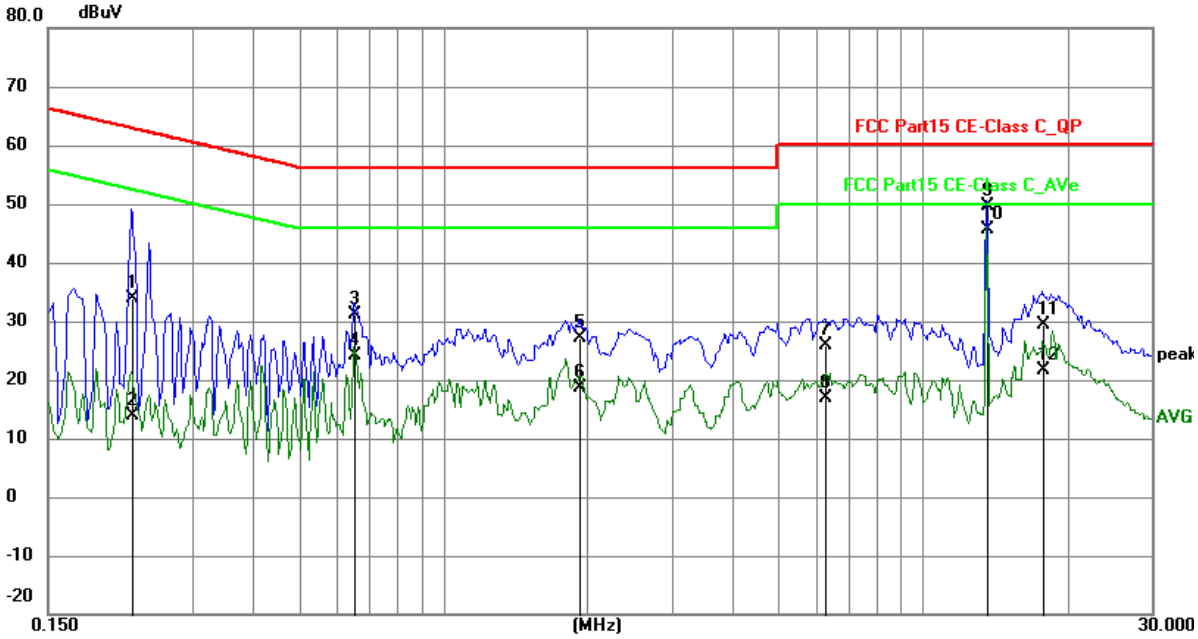

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2241	24.14	9.75	33.89	62.67	-28.78	QP	P
2	0.2241	4.04	9.75	13.79	52.67	-38.88	AVG	P
3	0.6531	21.43	9.78	31.21	56.00	-24.79	QP	P
4	0.6531	14.23	9.78	24.01	46.00	-21.99	AVG	P
5	1.9245	17.32	9.80	27.12	56.00	-28.88	QP	P
6	1.9245	8.81	9.80	18.61	46.00	-27.39	AVG	P
7	6.2721	16.02	9.98	26.00	60.00	-34.00	QP	P
8	6.2721	6.97	9.98	16.95	50.00	-33.05	AVG	P
9	13.5612	39.28	10.32	49.60	60.00	-10.40	QP	P
10	13.5612	35.21	10.32	45.53	50.00	-4.47	AVG	P
11	17.7849	18.95	10.55	29.50	60.00	-30.50	QP	P
12	17.7849	11.12	10.55	21.67	50.00	-28.33	AVG	P

B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 25℃ Humidity:75%RH Atmospheric Pressure: 101kPa

EUT set Condition: Charging + Keep Transmitting

Results: Pass

Please refer to following diagram for individual

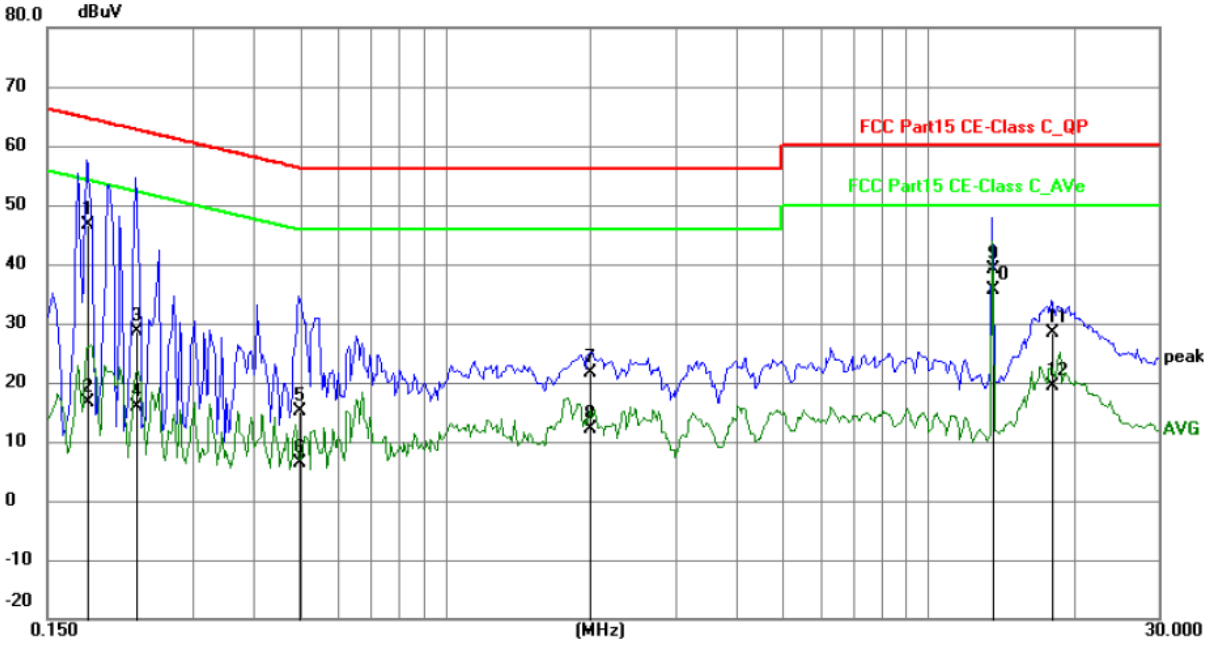

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1812	36.77	9.76	46.53	64.43	-17.90	QP	P
2	0.1812	6.97	9.76	16.73	54.43	-37.70	AVG	P
3	0.2280	18.76	9.75	28.51	62.52	-34.01	QP	P
4	0.2280	6.16	9.75	15.91	52.52	-36.61	AVG	P
5	0.4971	5.48	9.77	15.25	56.05	-40.80	QP	P
6	0.4971	-3.37	9.77	6.40	46.05	-39.65	AVG	P
7	1.9947	11.90	9.80	21.70	56.00	-34.30	QP	P
8	1.9947	2.35	9.80	12.15	46.00	-33.85	AVG	P
9	13.5612	28.92	10.32	39.24	60.00	-20.76	QP	P
10	13.5612	25.22	10.32	35.54	50.00	-14.46	AVG	P
11	17.9799	17.84	10.56	28.40	60.00	-31.60	QP	P
12	17.9799	8.94	10.56	19.50	50.00	-30.50	AVG	P

6 Radiated Emission Test

6.1 Test Method and test Procedure:

(1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at TIMEWAY EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189

(2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.

(3) The frequency spectrum from 9 kHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with RBW=120 kHz/VBW=300 kHz; All readings from 9 kHz to 30 MHz are quasi-peak values with RBW=10 kHz/VBW=30 kHz. For the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission test in these three bands are based on measurements employing an average detector. Measurements were made at 3 meters.

(4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.

(5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.

(6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

9kHz-30MHz

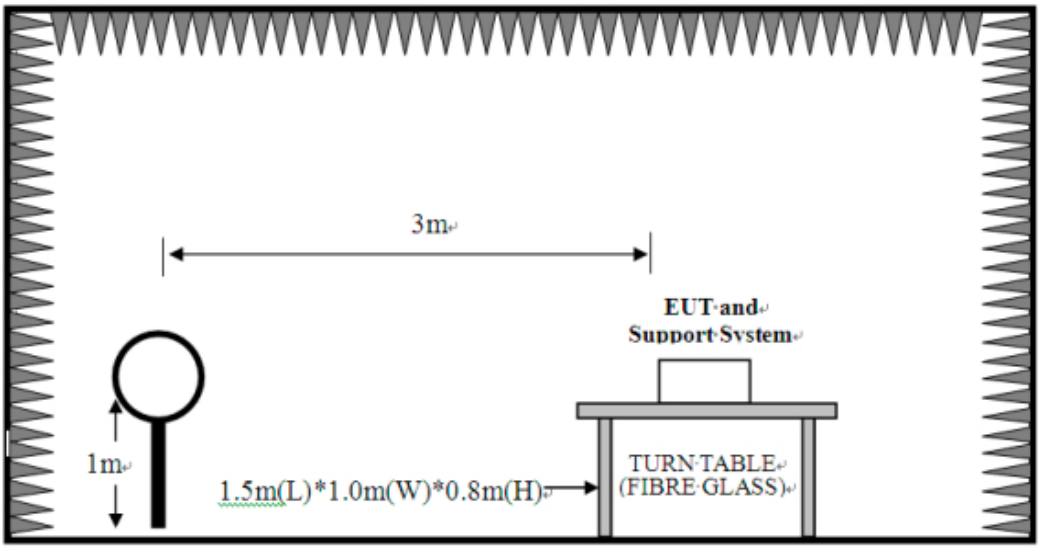

30MHz-1000MHz

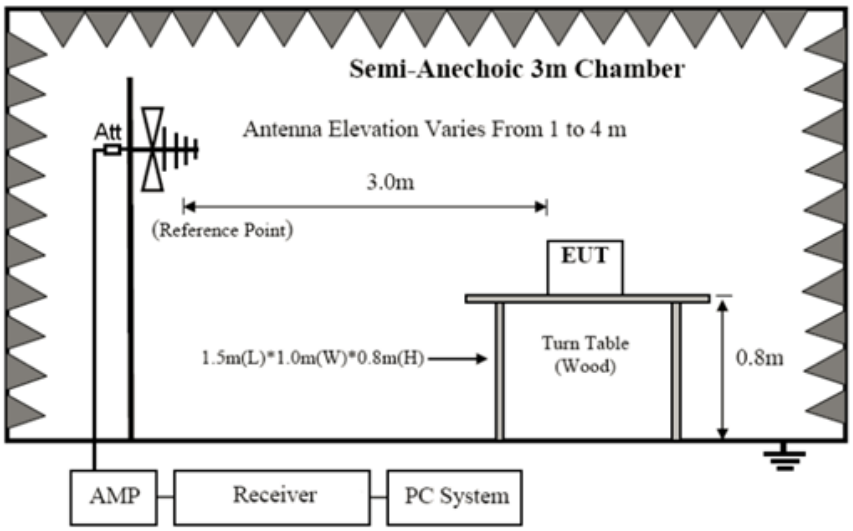

6.2 Configuration of The EUT

Same as section 5.3 of this report

6.3 EUT Operating Condition

Same as section 5.4 of this report.

6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A. Fundamental frequency are compiled to limit on Paragraph 15.225.

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

B. Frequencies in restricted band are compiled to limit on Paragraph 15.209.

Limits for frequency below 30MHz

Frequency Range (MHz)	Distance (m)	Field strength (V/m)
0.009-0.490	300	24000/F(kHz)
0.490-1.705	30	2400/F(kHz)
1.705-30	30	30

Limits for frequency above 30MHz

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

2. In the Above Table, the tighter limit applies at the band edges.

3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

4. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6.5 Test result

Measurement data:

Note: Limit dBuV/m @3m = Limit dBμV/m @300m+ 80

Limit dBuV/m @3m = Limit dBμV/m @30m + 40

For 13.56MHz, the limit is 124 dBμV/m

9 kHz~30 MHz

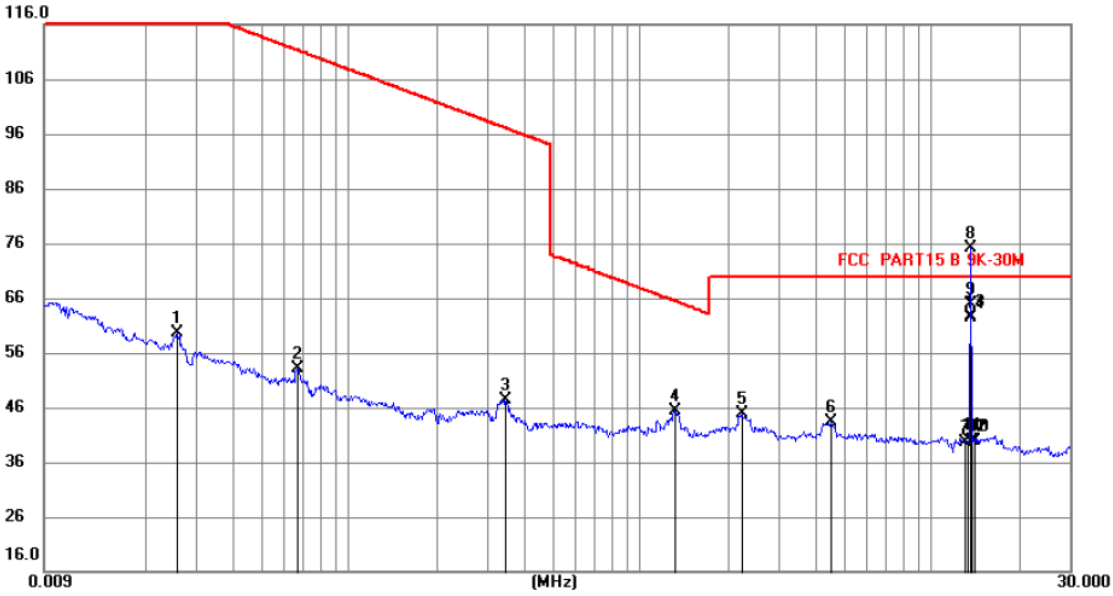

No.	Frequency (MHz)	Reading ()	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	0.0258	49.30	10.25	59.55	119.23	-59.68	peak	P
2	0.0666	43.26	9.77	53.03	111.04	-58.01	peak	P
3	0.3441	37.64	9.76	47.40	96.85	-49.45	peak	P
4	1.3207	35.53	9.79	45.32	65.21	-19.89	peak	P
5	2.2212	35.08	9.81	44.89	69.51	-24.62	peak	P
6	4.5162	33.38	9.91	43.29	69.53	-26.24	peak	P
7	13.1100	29.22	10.30	39.52	69.57	-30.05	peak	P
8	13.5603	64.69	10.32	75.01	69.57	5.44	peak	F
9	13.5603	54.57	10.32	64.89	69.57	-4.68	AVG	P
10	14.0100	29.62	10.34	39.96	69.57	-29.61	peak	P
11	13.4100	29.72	10.31	40.03	69.57	-29.54	peak	P
12	13.7100	29.52	10.32	39.84	69.57	-29.73	peak	P
13	13.5530	52.36	10.32	62.68	69.57	-6.89	peak	P
14	13.5670	51.98	10.32	62.30	69.57	-7.27	peak	P

A. General Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: **Pass**

Please refer to following diagram for individual

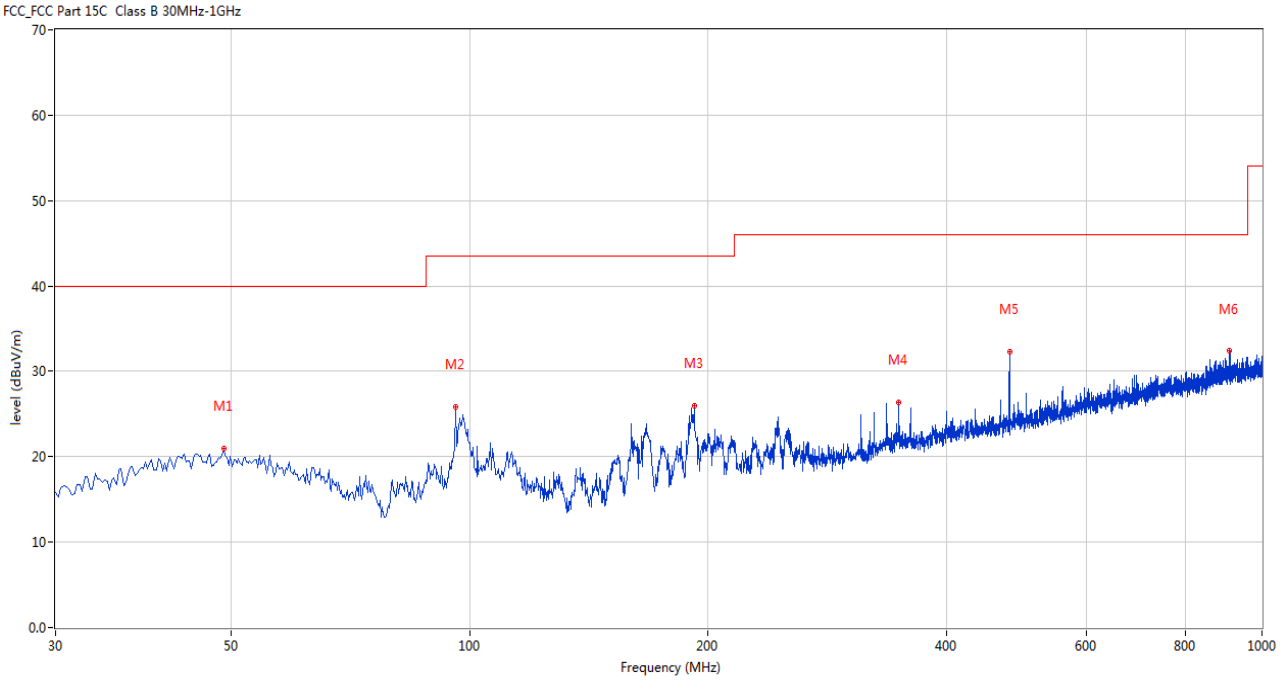

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	48.910	20.95	-11.21	40.0	-19.05	Peak	287.00	100	Horizontal	Pass
2	95.944	25.89	-14.16	43.5	-17.61	Peak	360.00	200	Horizontal	Pass
3	191.950	26.01	-14.07	43.5	-17.49	Peak	103.00	200	Horizontal	Pass
4	348.080	26.34	-9.43	46.0	-19.66	Peak	287.00	100	Horizontal	Pass
5	479.968	32.34	-7.40	46.0	-13.66	Peak	360.00	100	Horizontal	Pass
6	910.297	32.37	-1.76	46.0	-13.63	Peak	42.00	100	Horizontal	Pass

B. General Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: **Pass**

Please refer to following diagram for individual

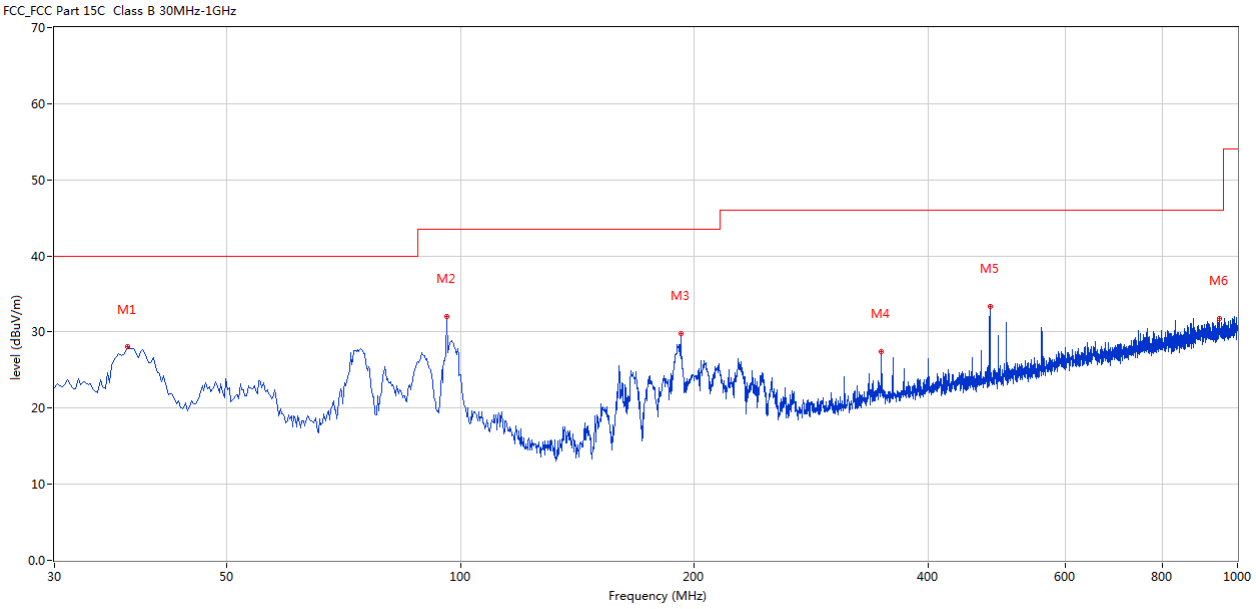

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	37.273	28.01	-13.06	40.0	-11.99	Peak	360.00	200	Vertical	Pass
2	95.944	32.00	-14.16	43.5	-11.50	Peak	187.00	100	Vertical	Pass
3	191.950	29.79	-14.07	43.5	-13.71	Peak	74.00	100	Vertical	Pass
4	348.080	27.38	-9.43	46.0	-18.62	Peak	207.00	200	Vertical	Pass
5	479.968	33.35	-7.40	46.0	-12.65	Peak	360.00	200	Vertical	Pass
6	947.148	31.82	-1.55	46.0	-14.18	Peak	167.00	200	Vertical	Pass

7.0 Frequency Stability

7.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of –20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees

7.2 Test Procedure

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

7.3 Test Result

Voltage vs. Frequency Stability

Voltage	Measurement Frequency
DC4.255V	13.5599067MHz
DC3.7V	13.5599070MHz
DC3.145V	13.5599059MHz
Nominal Frequency:	13.56MHz
Max. Deviation	-94.1Hz
Limit	±1356Hz (Note: ±0.01% of operated frequency)

Temperature（℃）: 20

Temperature vs. Frequency Stability

Temperature（℃）	Measurement Frequency
-20	13.5599051 MHz
-10	13.5599062 MHz
0	13.5599077 MHz
10	13.5599058 MHz
20	13.5599063 MHz
30	13.5599082 MHz
40	13.5599075 MHz
50	13.5599061 MHz
Nominal Frequency:	13.56 MHz
Max. Deviation	94.9Hz
Limit	±1356Hz (Note: ±0.01% of operated frequency)

Rated working voltage: DC3.7V

8.0 20dB Bandwidth Testing

8.1 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

8.3 Test Data

Frequency	20dB Bandwidth Emission (Hz)	Limit (kHz)	Result
13.56MHz	437	--	Pass

Refer to attached plots:

20dB Bandwidth

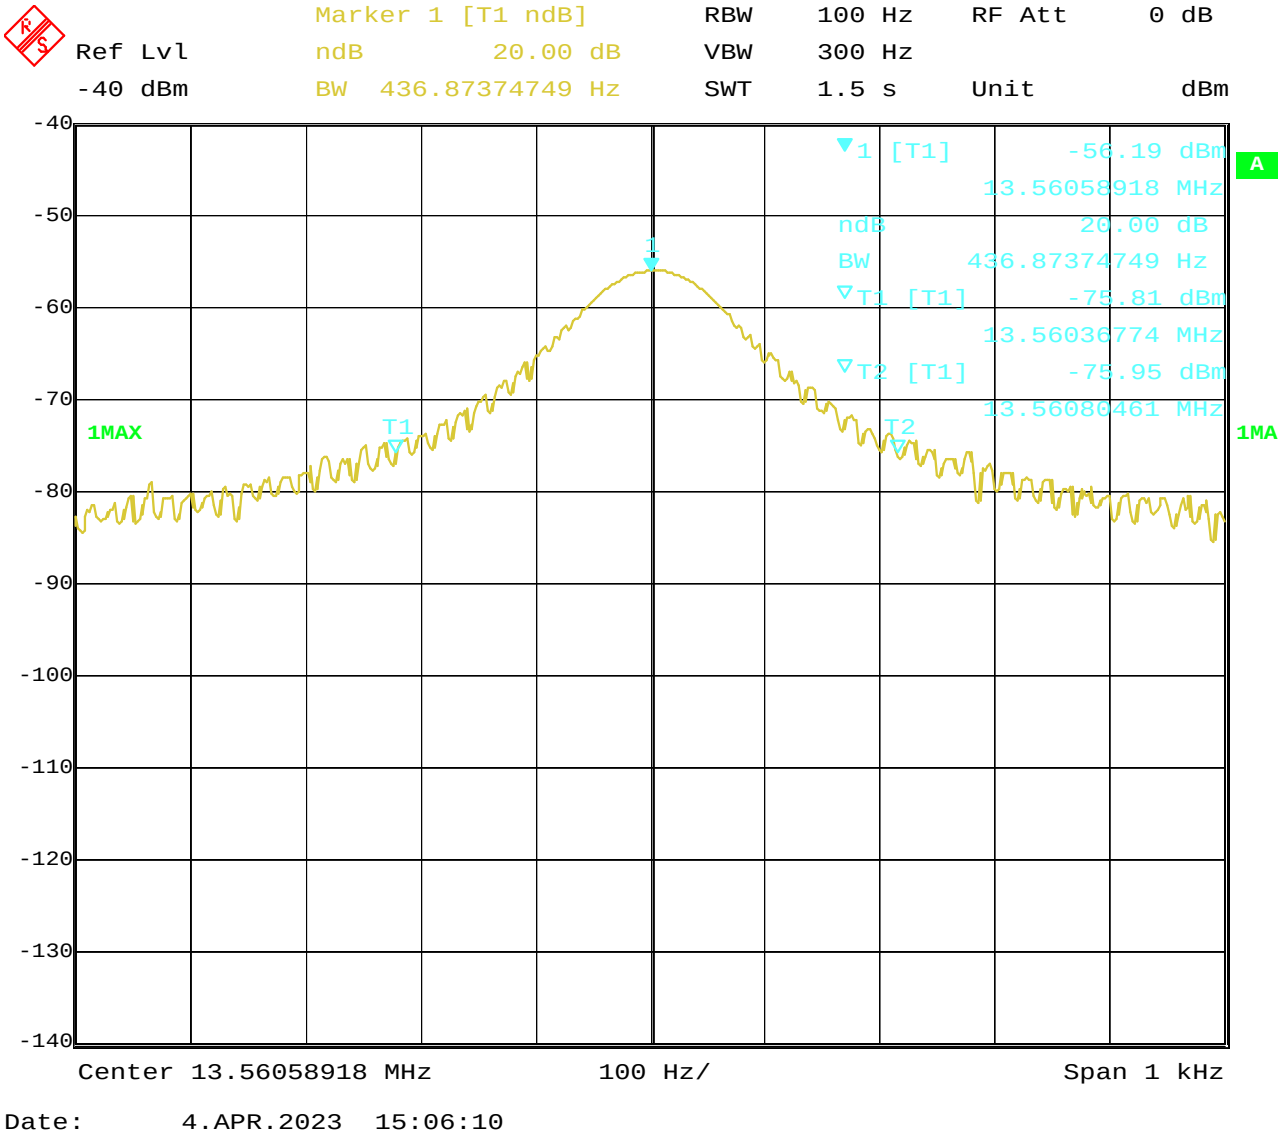

9.0 **Antenna Requirement**

9.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

9.2 Antenna Connected constructions

The antenna is PCB Loop Antenna. The antenna gain is 0dBi. So it meets the requirement of 15.203

10.0 FCC ID Label

FCC ID: 2BANS-JT-LISK01

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

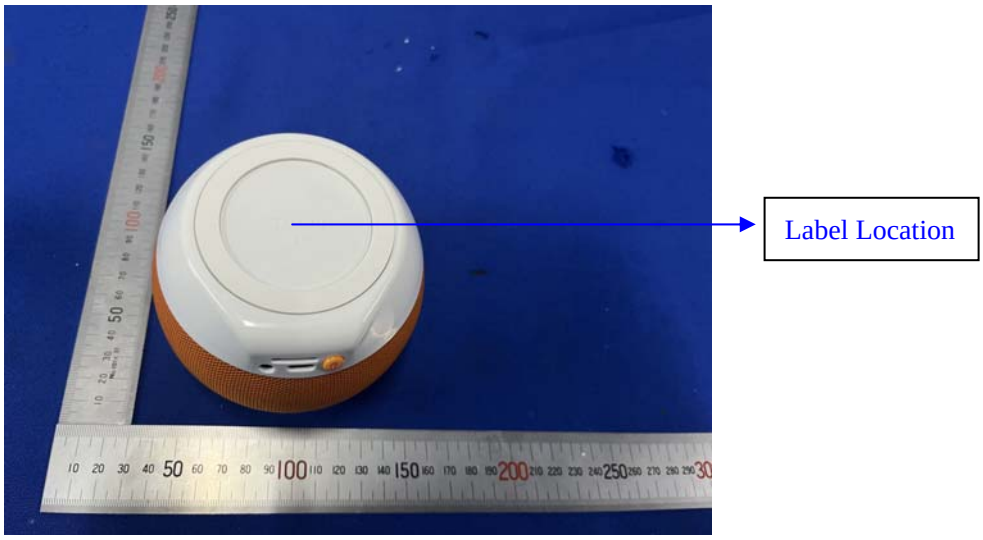

11.0. Photo of testing

11.1 Conducted test View

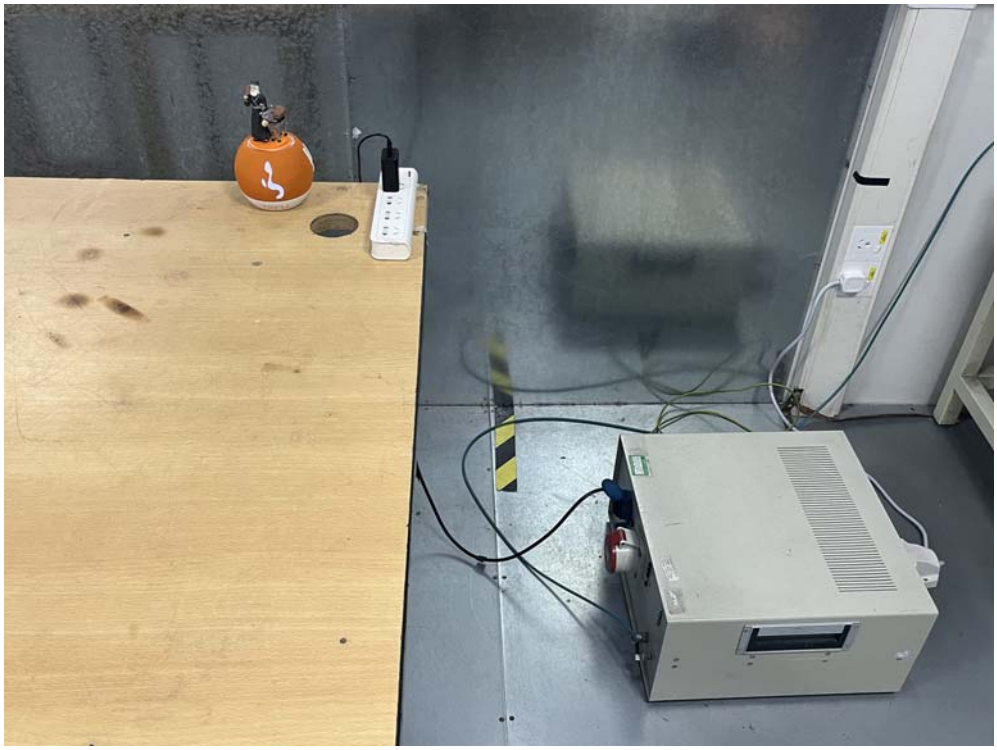

11.2 Radiated emission test view

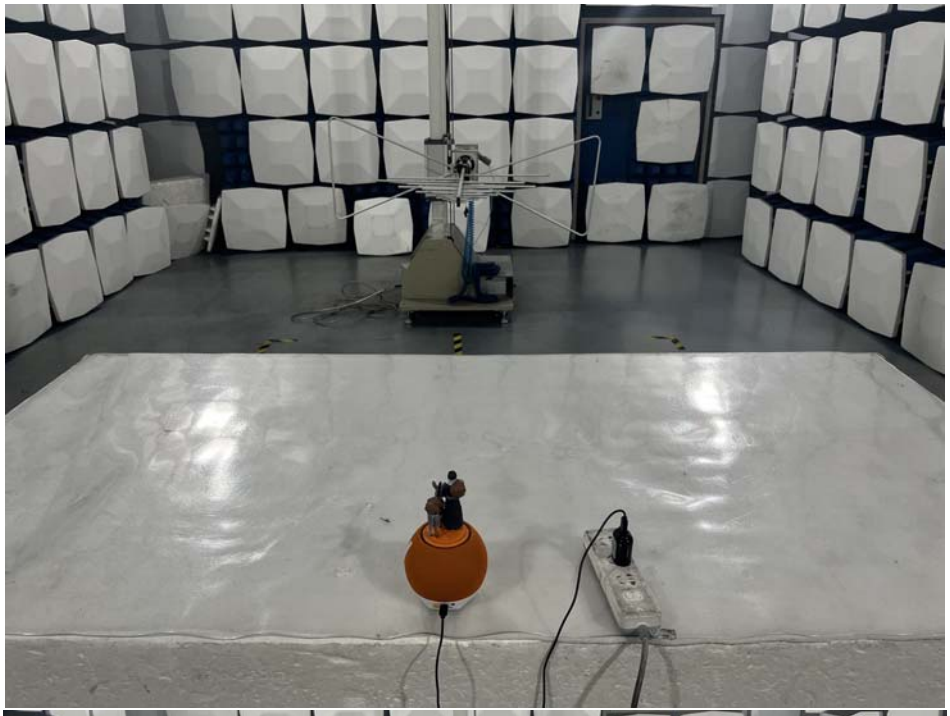

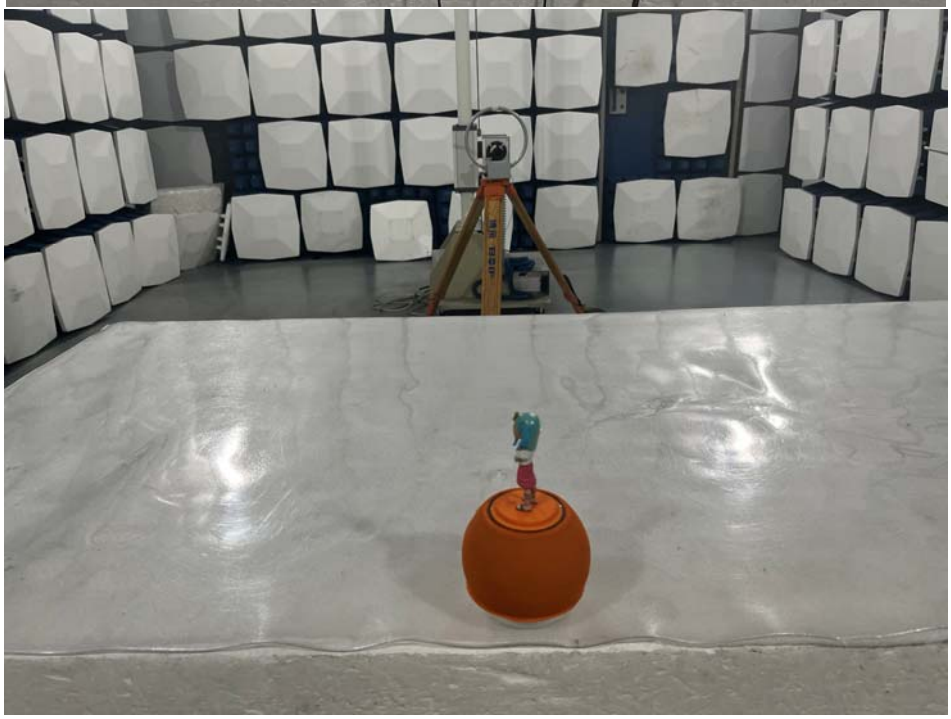

Photographs – EUT

Please refer test report TW2303261-01E

--End of Report--