



TEST REPORT NUMBER: (8523)109-0059

TEST REPORT

Applicant:	Tsuen Lee Metals & Plastic Toys Co.,Ltd.	Fax:	---
Address :	Room 303-304, 3/F., Crown Industrial Building, 106 How Ming Street, Kwun Tong, Kowloon, Hong Kong		
Test Date :	2023-4-13 to 2023-4-17		

Manufacturer or Supplier:	Tsuen Lee Metals & Plastic Toys Co.,Ltd.
Address:	Room 303-304, 3/F., Crown Industrial Building, 106 How Ming Street, Kwun Tong, Kowloon, Hong Kong
Sample Description:	TTR23 TRON TRACK SET (Tron Lightcycle Track Set)
Trade Mark:	Disney
Model number:	020S421U005
Additional Model :	N/A
Rated Voltage:	DC3V (1.5V*LR44*2) from button cell
FCC ID :	2BAP6020S421U005
The submitted sample of the above equipment has been tested according to following standard(s)	
47 CFR Part 15, Subpart C 249	
CONCLUSION: The submitted sample was found to COMPLY with the test requirement	

Project Manager

Name: Tom Chen
Date: Apr. 17, 2023

Bureau Veritas Shenzhen Co., Ltd
1st Floor, Block A, Minlida Industrial
Building, 4th Zone of Honghualing Industrial
Park, Shenzhen, Guangdong Province, China
Tel: +86 755 8600 0151
Fax: +86 755 8618 5206
www.bureauveritas.com/cps

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test sample identified herein. The report set forth in this report does not indicate the quality or acceptability of the item from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TEST REPORT NUMBER: (8523)109-0059

1 Test Summary

Test Item	IC Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	N/A
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	RSS-Gen section 6.12 & ANSI C63.10-2013	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	RSS-Gen section 6.13 & ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	RSS-Gen section 6.13 & ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	RSS-Gen section 6.7 & ANSI C63.10-2013	PASS



TEST REPORT NUMBER: (8523)109-0059

2 Contents

TEST REPORT	1
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 TEST ENVIRONMENT AND MODE	5
3.4 DESCRIPTION OF SUPPORT UNITS	5
3.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
3.6 TEST LOCATION	7
3.7 TEST FACILITY	7
3.8 DEVIATION FROM STANDARDS	7
3.9 ABNORMALITIES FROM STANDARD CONDITIONS	7
3.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
3.11 EQUIPMENT LIST	8
4 TEST RESULTS AND MEASUREMENT DATA	9
4.1 ANTENNA REQUIREMENT	9
4.2 RADIATED EMISSION	10
4.3 20dB BANDWIDTH	18
5 PHOTOGRAPHS	21
5.1 RADIATED EMISSION TEST SETUP	21
5.2 EUT CONSTRUCTIONAL DETAILS	21



TEST REPORT NUMBER: (8523)109-0059

3 General Information

3.1 Client Information

Applicant:	Tsuen Lee Metals & Plastic Toys Co.,Ltd.
Address of Applicant:	Room 303-304, 3/F., Crown Industrial Building, 106 How Ming Street, Kwun Tong, Kowloon, Hong Kong
Manufacturer:	Tsuen Lee Metals & Plastic Toys Co.,Ltd.
Address of Manufacturer:	Room 303-304, 3/F., Crown Industrial Building, 106 How Ming Street, Kwun Tong, Kowloon, Hong Kong
Factory:	ZHONG SHAN CITY HENG FENG TOYS CO.,LTD.
Address of Factory:	No. 3, Bi Hua 3rd Road, Bai Shi Industrial Area, San Xiang Town, Zhong Shan City Guang Dong Province, China

3.2 General Description of EUT

Name:	TTR23 TRON TRACK SET (TRON LIGHTCYCLE TRACK SET)
Test Model No.:	020S421U005
Model No.:	020S421U005
Trade Mark:	Disney
Serial No.:	---
Software Version:	V1.00
Hardware Version:	V1.00
Frequency Range:	2443-2477MHz
Modulation Type:	GFSK
Number of Channels:	7
Sample Type:	Portable product
Antenna Type:	PCB antenna
Antenna Gain:	1.5dBi
Power Supply:	DC3V (1.5V*LR44*2) from button cell



TEST REPORT NUMBER: (8523)109-0059

Operation Frequency each of channel					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2443MHz	7	2477MHz		
2	2447MHz				
3	2456MHz				
4	2460MHz				
5	2468MHz				
6	2470MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2443MHz
The Middle channel	2460MHz
The Highest channel	2477MHz

3.3 Test Environment and Mode

Operating Environment:	
Temperature:	29 °C
Humidity:	59 % RH
Atmospheric Pressure:	1001mbar
Test mode:	
Test Mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

3.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
/	/	/	/	CQA



TEST REPORT NUMBER: (8523)109-0059

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

No.	Item	Uncertainty
1	Radiated Emission (Below 1GHz)	5.12dB
2	Radiated Emission (Above 1GHz)	4.60dB
3	Conducted Disturbance (0.15~30MHz)	3.34dB
4	Radio Frequency	3×10^{-8}
5	Duty cycle	0.6 %
6	Occupied Bandwidth	1.1%
7	RF conducted power	0.86dB
8	RF power density	0.74
9	Conducted Spurious emissions	0.86dB
10	Temperature test	0.8°C
11	Humidity test	2.0%
12	Supply voltages	0.5 %
13	time	0.6 %.
14	Frequency Error	5.5 Hz



TEST REPORT NUMBER: (8523)109-0059

3.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

3.7 Test Facility

- **ISED No.: 22984**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

3.8 Deviation from Standards

None.

3.9 Abnormalities from Standard Conditions

None.

3.10 Other Information Requested by the Customer

None.



TEST REPORT NUMBER: (8523)109-0059

3.11 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2022/9/9	2023/9/8
Spectrum analyzer	R&S	FSU26	CQA-038	2022/9/9	2023/9/8
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2022/9/9	2023/9/8
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2022/9/9	2023/9/8
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/9/16	2024/9/15
Bilog Antenna	R&S	HL562	CQA-011	2021/9/16	2024/9/15
Horn Antenna	R&S	HF906	CQA-012	2021/9/16	2024/9/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/9/16	2024/9/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2022/9/9	2023/9/8
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2022/9/9	2023/9/8
Antenna Connector	CQA	RFC-01	CQA-080	2022/9/9	2023/9/8
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2022/9/9	2023/9/8
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2022/9/9	2023/9/8

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



TEST REPORT NUMBER: (8523)109-0059

4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
EUT Antenna:	Refer to PHOTOGRAPHS OF EUT for Internal photos
The antenna is soldered on the PCB, no need to consider replacement. best case gain Antenna is 1.5dBi.	



TEST REPORT NUMBER: (8523)109-0059

4.2 Radiated Emission

Test Requirement:	47 CFR Part 15, Subpart C Section 15.205/15.209				
Test Method:	ANSI C63.10 & RSS-Gen section 6.12/6.13				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.					
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.0		Average Value	
		114.0		Peak Value	
Test Setup:					



BUREAU
VERITAS

TEST REPORT NUMBER: (8523)109-0059

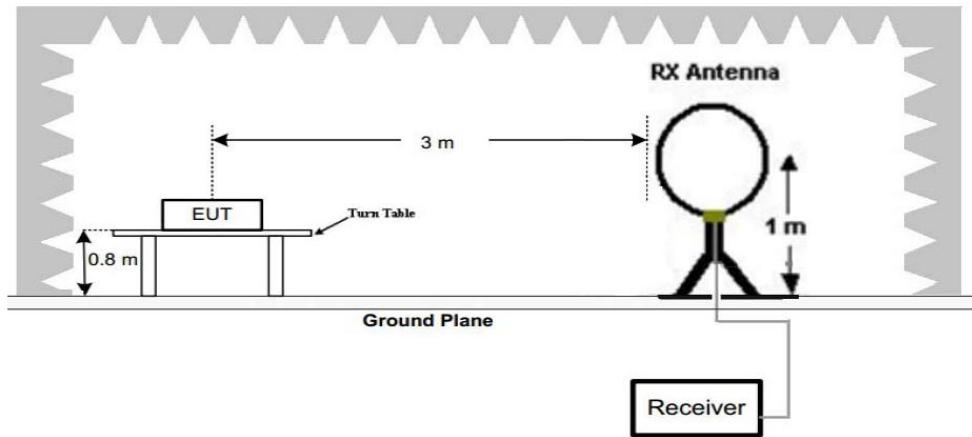


Figure 1. Below 30MHz

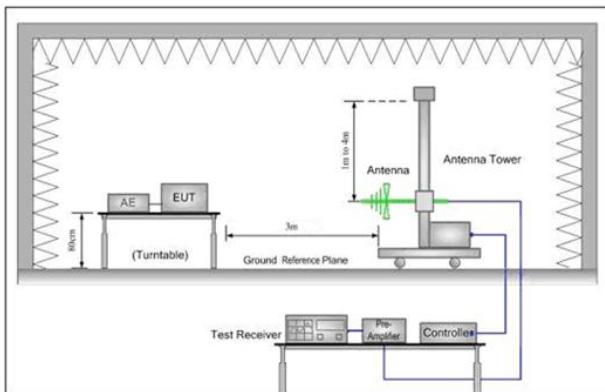


Figure 2. 30MHz to 1GHz

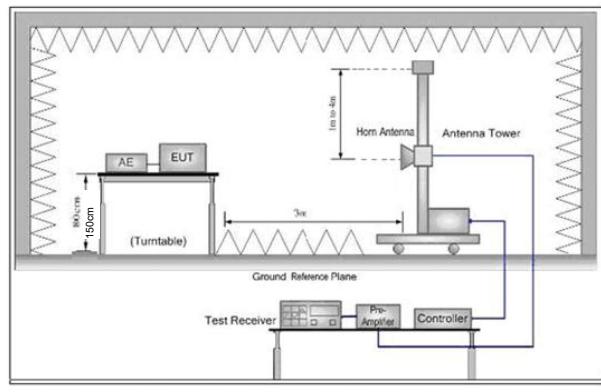


Figure 3. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

**TEST REPORT NUMBER: (8523)109-0059**

	<ul style="list-style-type: none">d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.g. Test the EUT in the lowest channel, the middle channel, the Highest channelh. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK at lowest, middle and highest channel.
Final Test Mode:	Pretest the EUT at Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Voltage:	DC3V (1.5V*LR44*2) from button cell
Test Results:	Pass




BUREAU
VERITAS

TEST REPORT NUMBER: (8523)109-0059

Measurement Data

30MHz~1GHz (the worst case)

Test mode:	Transmitting (Lowest channel)	Vertical
------------	-------------------------------	----------

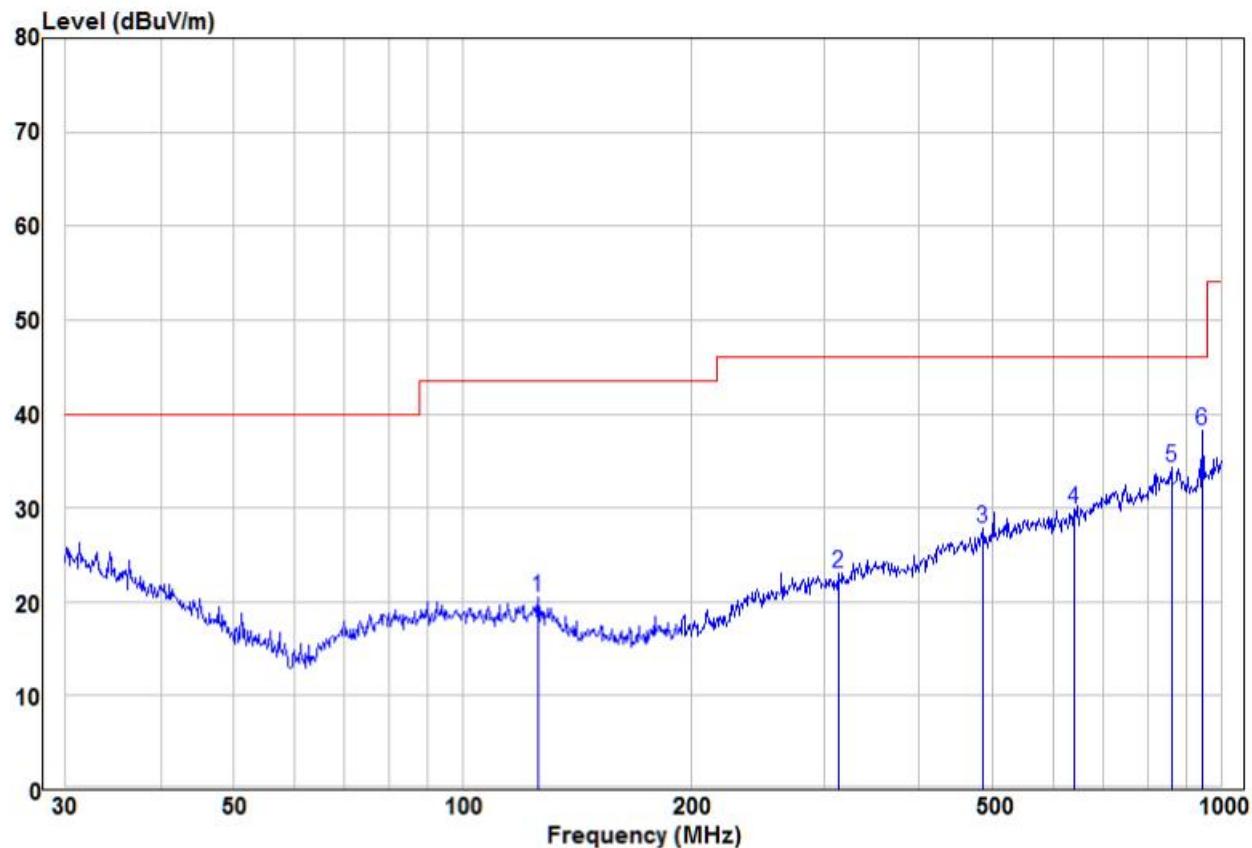

Freq	Read		Limit Level	Line	Over Limit	Over Remark	Pol/Phase
	Freq	Level	Factor				
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	125.89	10.01	10.47	20.48	43.50	-23.02	Peak VERTICAL
2	312.18	8.98	14.03	23.01	46.00	-22.99	Peak VERTICAL
3	485.61	9.91	17.83	27.74	46.00	-18.26	Peak VERTICAL
4	640.61	10.36	19.51	29.87	46.00	-16.13	Peak VERTICAL
5	860.04	10.36	24.01	34.37	46.00	-11.63	Peak VERTICAL
6 pp	945.44	14.63	23.62	38.25	46.00	-7.75	Peak VERTICAL




BUREAU
VERITAS

TEST REPORT NUMBER: (8523)109-0059

30MHz~1GHz (the worst case)

Test mode:	Transmitting (Lowest channel)	Horizontal
------------	-------------------------------	------------

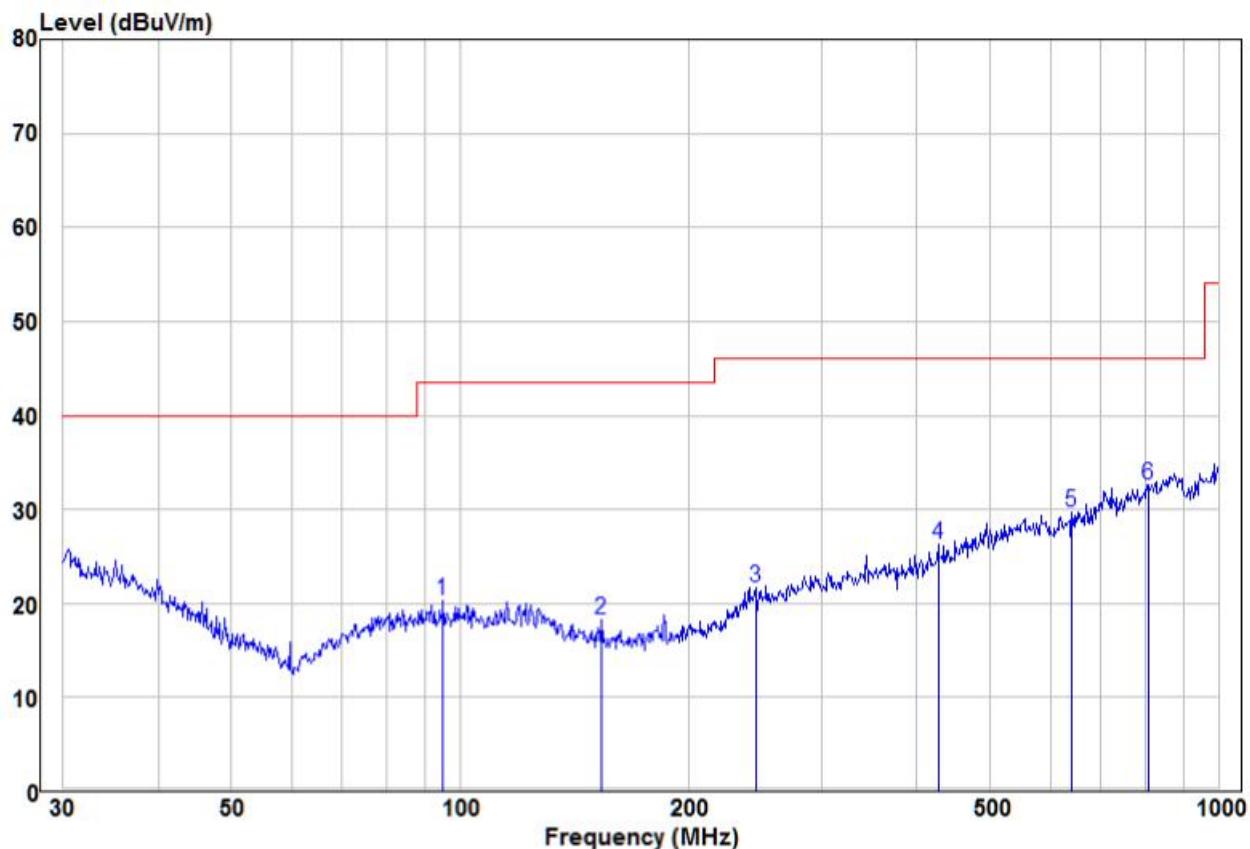

Freq	Read		Limit		Over		Pol/Phase
	Freq	Level	Factor	Level	Line	Limit	

	MHz	dB _{UV}	dB/m	dB _{UV} /m	dB _{UV} /m	dB	
1	95.09	9.99	10.34	20.33	43.50	-23.17	Peak HORIZONTAL
2	153.74	10.05	8.22	18.27	43.50	-25.23	Peak HORIZONTAL
3	245.09	9.81	11.93	21.74	46.00	-24.26	Peak HORIZONTAL
4	426.52	10.21	15.99	26.20	46.00	-19.80	Peak HORIZONTAL
5	640.61	10.26	19.51	29.77	46.00	-16.23	Peak HORIZONTAL
6 pp	810.27	9.36	23.27	32.63	46.00	-13.37	Peak HORIZONTAL



BUREAU
VERITAS

TEST REPORT NUMBER: (8523)109-0059

Above 1GHz							
Test mode:		Transmitting		Test channel:		Lowest	
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
2390	57.08	-4.28	52.80	74	-21.20	Peak	H
2390	42.24	-4.28	37.96	54	-16.04	AVG	H
2400	50.71	1.13	51.84	74	-22.16	Peak	H
2400	36.40	1.13	37.53	54	-16.47	AVG	H
2443	99.10	-9.33	89.77	114	-24.23	peak	H
2443	97.03	-9.33	87.70	94	-6.30	AVG	H
4886	56.84	-4.28	52.56	74	-21.44	peak	H
4886	43.50	-4.28	39.22	54	-14.78	AVG	H
7329	50.98	1.13	52.11	74	-21.89	peak	H
7329	38.30	1.13	39.43	54	-14.57	AVG	H
2390	60.42	-9.2	51.22	74	-22.78	peak	V
2390	44.22	-9.2	35.02	54	-18.98	AVG	V
2400	62.55	-9.2	53.35	74	-20.65	peak	V
2400	45.09	-9.2	35.89	54	-18.11	AVG	V
2443	99.44	-9.33	90.11	114	-23.89	peak	V
2443	97.48	-9.33	88.15	94	-5.85	AVG	V
4886	57.35	-4.28	53.07	74	-20.93	peak	V
4886	40.70	-4.28	36.42	54	-17.58	AVG	V
7329	53.09	1.13	54.22	74	-19.78	peak	V
7329	35.74	1.13	36.87	54	-17.13	AVG	V



BUREAU
VERITAS

TEST REPORT NUMBER: (8523)109-0059

Test mode:		Transmitting		Test channel:		Middle	
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
2460	100.22	-9.37	90.85	114	-23.15	peak	H
2460	97.28	-9.37	87.91	94	-6.09	AVG	H
4920	55.03	-4.14	50.89	74	-23.11	peak	H
4920	43.12	-4.14	38.98	54	-15.02	AVG	H
7380	51.91	0.56	52.47	74	-21.53	peak	H
7380	36.16	0.56	36.72	54	-17.28	AVG	H
2460	96.78	-9.36	87.42	114	-26.58	peak	V
2460	95.37	-9.36	86.01	94	-7.99	AVG	V
4920	56.46	-4.14	52.32	74	-21.68	peak	V
4920	42.77	-4.14	38.63	54	-15.37	AVG	V
7380	52.25	0.56	52.81	74	-21.19	peak	V
7380	36.71	0.56	37.27	54	-16.73	AVG	V



BUREAU
VERITAS

TEST REPORT NUMBER: (8523)109-0059

Test mode:		Transmitting		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2477	99.09	-9.23	89.86	114	-24.14	peak	H
2477	97.08	-9.23	87.85	94	-6.15	AVG	H
2483.5	60.31	-9.29	51.02	74	-22.98	Peak	H
2483.5	43.85	-9.29	34.56	54	-19.44	AVG	H
4954	54.75	-4.03	50.72	74	-23.28	peak	H
4954	41.46	-4.03	37.43	54	-16.57	AVG	H
7431	51.22	1.68	52.90	74	-21.10	peak	H
7431	37.57	1.68	39.25	54	-14.75	AVG	H
2477	96.83	-9.23	87.60	114	-26.40	peak	V
2477	94.21	-9.23	84.98	94	-9.02	AVG	V
2483.5	60.50	-9.29	51.21	74	-22.79	peak	V
2483.5	42.88	-9.29	33.59	54	-20.41	AVG	V
4954	55.47	-4.03	51.44	74	-22.56	peak	V
4954	41.21	-4.03	37.18	54	-16.82	AVG	V
7431	50.89	1.68	52.57	74	-21.43	peak	V
7431	35.94	1.68	37.62	54	-16.38	AVG	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 8GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .



TEST REPORT NUMBER: (8523)109-0059

4.3 20dB Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2013 & RSS-Gen Section 6.7
Test Setup:	
Test Mode:	Transmitting with GFSK at lowest, middle and highest channel.
Limit:	N/A
Test Results:	Pass

Measurement Data



Test channel	20dB bandwidth (MHz)	Results
Lowest	7.961	Pass
Middle	7.572	Pass
Highest	6.37	Pass



BUREAU
VERITAS

TEST REPORT NUMBER: (8523)109-0059


Test plot as follows:

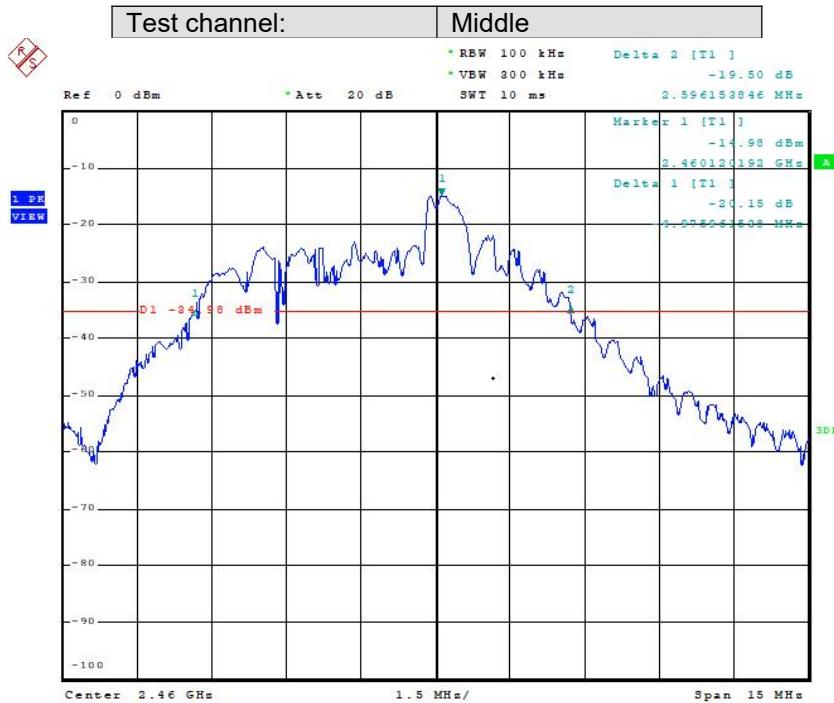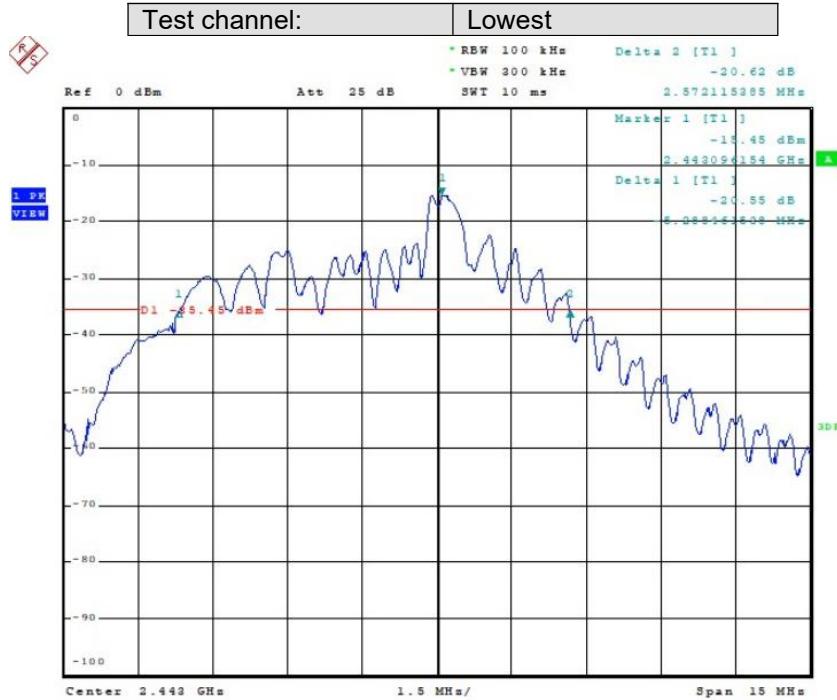



BUREAU
VERITAS

TEST REPORT NUMBER: (8523)109-0059

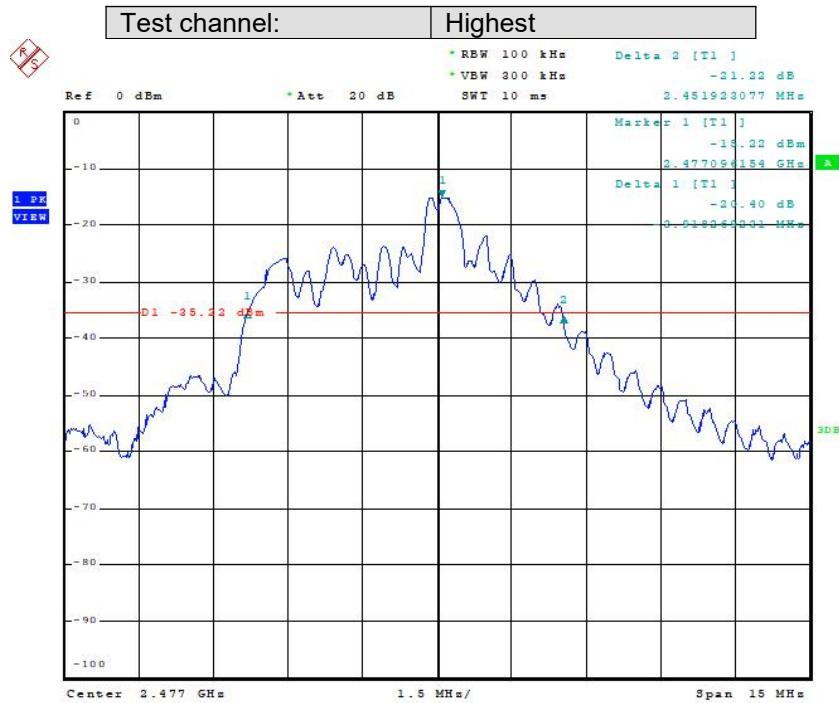



TEST REPORT NUMBER: (8523)109-0059

5 Photographs

5.1 Radiated Emission Test Setup

Refer to PHOTOGRAPHS OF EUT for Setup photos

5.2 EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for External photos and Internal photos

*** END OF REPORT ***