

TEST REPORT

Reference No...... : WTX22X12260158W003
FCC ID..... : 2BAQOFG80
Applicant..... : Beijing Speedata Technology Co.,Ltd
Address..... : Office 01-2 08, Block D, 8 / F, Building 1-4, Yard A, 18 Zhongguancun South Street, Haidian District, Beijing.
Manufacturer..... : The same as Applicant
Address..... : The same as Applicant
Product Name..... : Wireless mobile tablet data terminal
Model No...... : FG80
Standards..... : FCC Part 15.407
Date of Receipt sample..... : 2022-12-26
Date of Test..... : 2022-12-26 to 2023-03-28
Date of Issue..... : 2023-03-28
Test Report Form No...... : WTX_Part 15_407W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Jason Su

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	15
3. ANTENNA REQUIREMENT	16
3.1 STANDARD APPLICABLE	16
3.2 EVALUATION INFORMATION	16
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	17
4.1 STANDARD APPLICABLE	17
4.2 SUMMARY OF TEST RESULTS	17
5. POWER SPECTRAL DENSITY	18
5.1 STANDARD APPLICABLE	18
5.2 TEST PROCEDURE	18
5.3 SUMMARY OF TEST RESULTS/PLOTS	19
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	20
6.1 STANDARD APPLICABLE	20
6.2 TEST PROCEDURE	20
6.3 SUMMARY OF TEST RESULTS/PLOTS	22
7. MAXIMUM CONDUCTED OUTPUT POWER	23
7.1 STANDARD APPLICABLE	23
7.2 TEST PROCEDURE	23
7.3 SUMMARY OF TEST RESULTS/PLOTS	24
8. RADIATED SPURIOUS EMISSIONS	25
8.1 STANDARD APPLICABLE	25
8.2 TEST PROCEDURE	25
8.3 TEST RECEIVER SETUP	27
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	27
8.5 SUMMARY OF TEST RESULTS/PLOTS	27
9. FREQUENCY STABILITY	87
9.1 STANDARD APPLICABLE	87
9.2 TEST PROCEDURE	87
9.3 SUMMARY OF TEST RESULTS/PLOTS	87
10. CONDUCTED EMISSIONS	88
10.1 TEST PROCEDURE	88
10.2 BASIC TEST SETUP BLOCK DIAGRAM	88
10.3 TEST RECEIVER SETUP	88
10.4 SUMMARY OF TEST RESULTS/PLOTS	88
APPENDIX SUMMARY	91
APPENDIX A	92
APPENDIX B	107
APPENDIX C	135
APPENDIX D	150

APPENDIX PHOTOGRAPHS 152

Report version

Version No.	Date of issue	Description
Rev.00	2023-03-28	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Wireless mobile tablet data terminal
Trade Name:	思必拓speedata, Haitech
Model No.:	FG80
Adding Model(s):	FN80, FD80, FP80, FC80, FT80, GT80, SC80, SD100, SD80, SD100Plus, T80, T100, HPAD-FG80
Rated Voltage:	DC3.85V
Battery Capacity:	/
Power Adapter:	HYX024-U012125XYE Input:AC100-240V 50/60Hz 0.5A Output:DC5V/7V/9V1.67A; DC12V1.25A
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model FG80, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n-HT20 , 802.11n-HT40, 802.11ac-VHT20/40/80
Frequency Range:	5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
RF Output Power:	17.37dBm (Conducted)
Type of Modulation:	BPSK,QPSK, 16QAM, 64QAM, 256QAM
Type of Antenna:	FPC Antenna
Antenna Gain:	2.0dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter "3646631+=" into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	18	18	18	18	18	18	18	18	18	18	18	18	18
802.11n-HT20 MCS0	16	16	16	16	16	16	16	16	16	16	16	16	16
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	16	16	16	16	16	16	16	16	16	16			
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	16		16		16		16		16		16		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz,5590MHz,5670MHz,5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz,5290MHz,5530MHz,5610MHz,5775MHz
Note: 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40.		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	XiaoXin Pro 14IHU 2021	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SMET-1313	Spectrum Analyzer	Agilent	N9020A	MY54320548	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2022-03-22	2023-03-21
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	HP	8447F	2805A03475	2022-01-07	2023-01-06
SEMT-1008	Amplifier	HP	8447F	2805A03475	2022-12-30	2023-12-29
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B: Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08

SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-12-30	2023-12-29
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-02-25	2024-02-24
WTXE1022A 1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2023-02-25	2024-02-24
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2023-02-25	2024-02-24
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2023-02-25	2024-02-24
WTXE1044A 1001	Signal Generator	Agilent	83752A	3610A014 53	2023-02-25	2024-02-24
WTXE1045A 1001	Vector Signal Generator	Agilent	N5182A	MY470702 02	2023-02-25	2024-02-24
WTXE1018A 1001	Power Divider	Weinschel	1506A	PM204	2023-02-25	2024-02-24
WTXE1045A 1001	Power Divider	RF-Lambda	RFLT4W5M18G	14110400 027	2023-02-25	2024-02-24

☒ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2023-02-25	2024-02-24
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
☒ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A101 79	2023-02-25	2024-02-24
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
☐ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2023-02-25	2024-02-24
☐ Chamber C: Above 1GHz						
WTXE1093A	EMI Test	Rohde &	ESIB 26	100401	2023-02-25	2024-02-24

Reference No.: WTX22X12260158W003

1001	Receiver	Schwarz				
WTXE1103A 1005	Horn Antenna	POAM	RTF-11A	LP228060 221	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2023-02-25	2024-02-24
☒ Conducted Room 1#						
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-224	2023-02-25	2024-02-24
☐ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2023-02-25	2024-02-24
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2023-02-25	2024-02-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has a FPC Antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth ($< 1\text{MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTX22X12260158W003

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

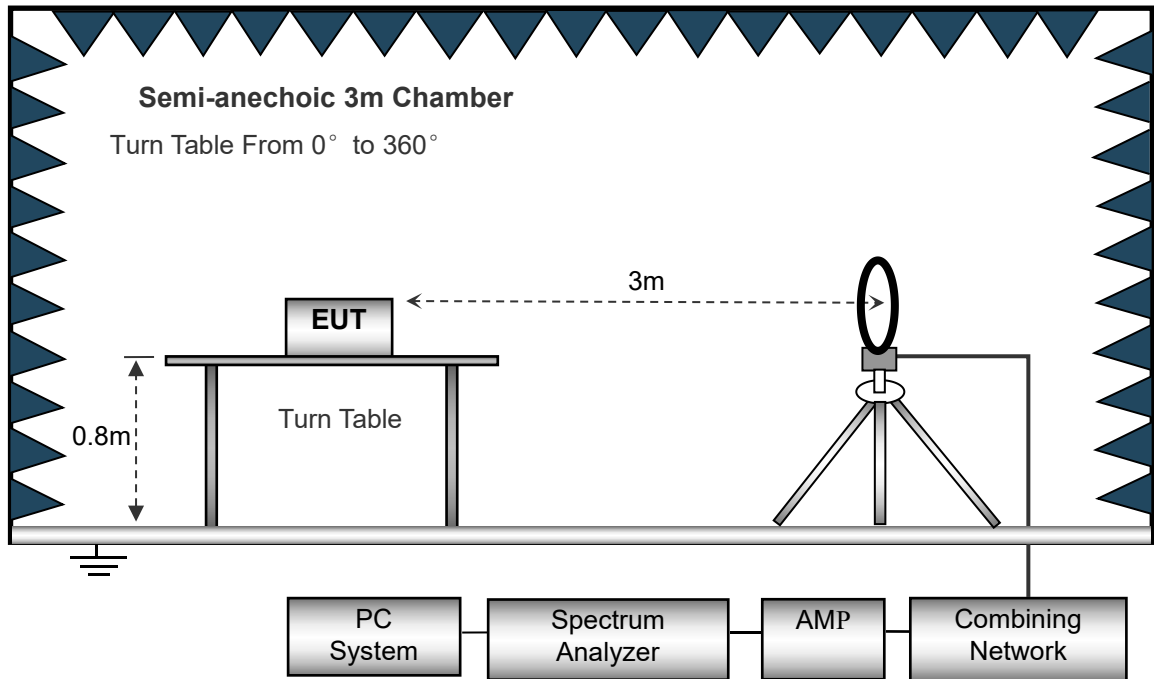
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

8.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



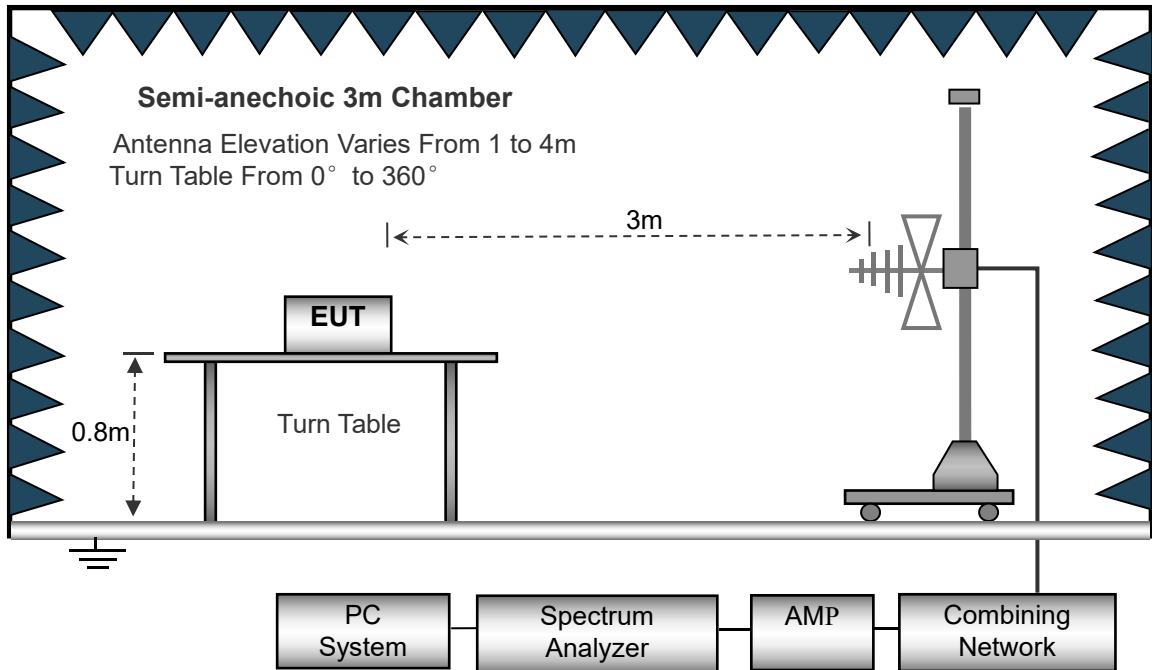The test setup for emission measurement from 30MHz to 1GHz.



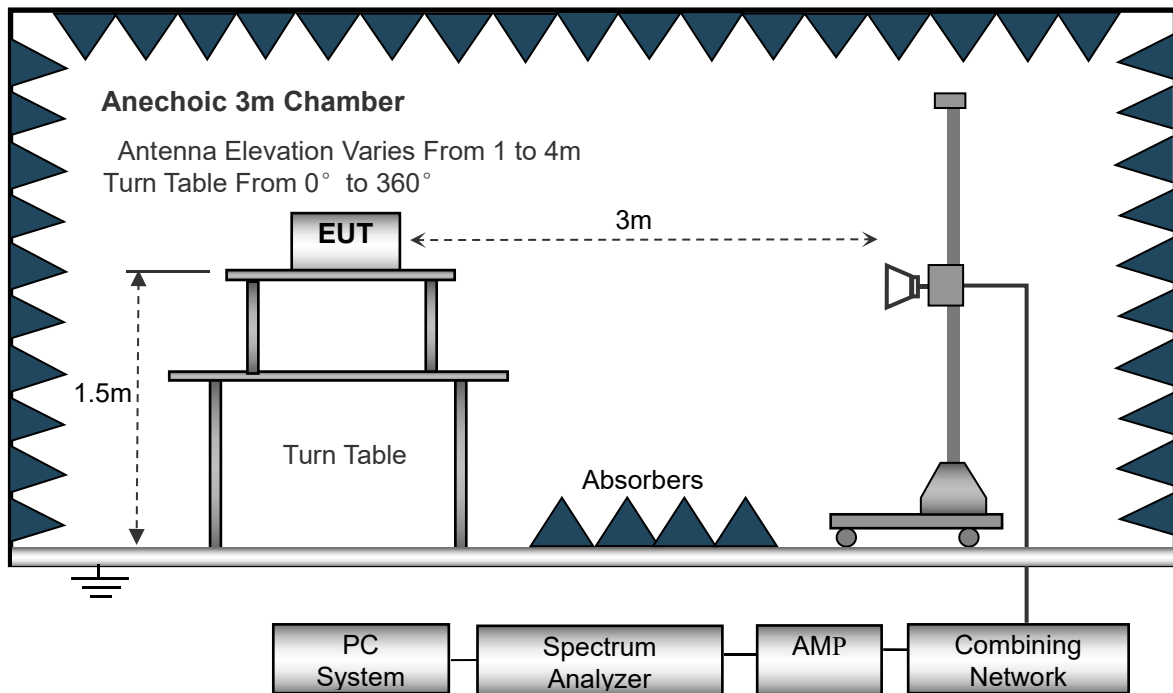The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz


802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

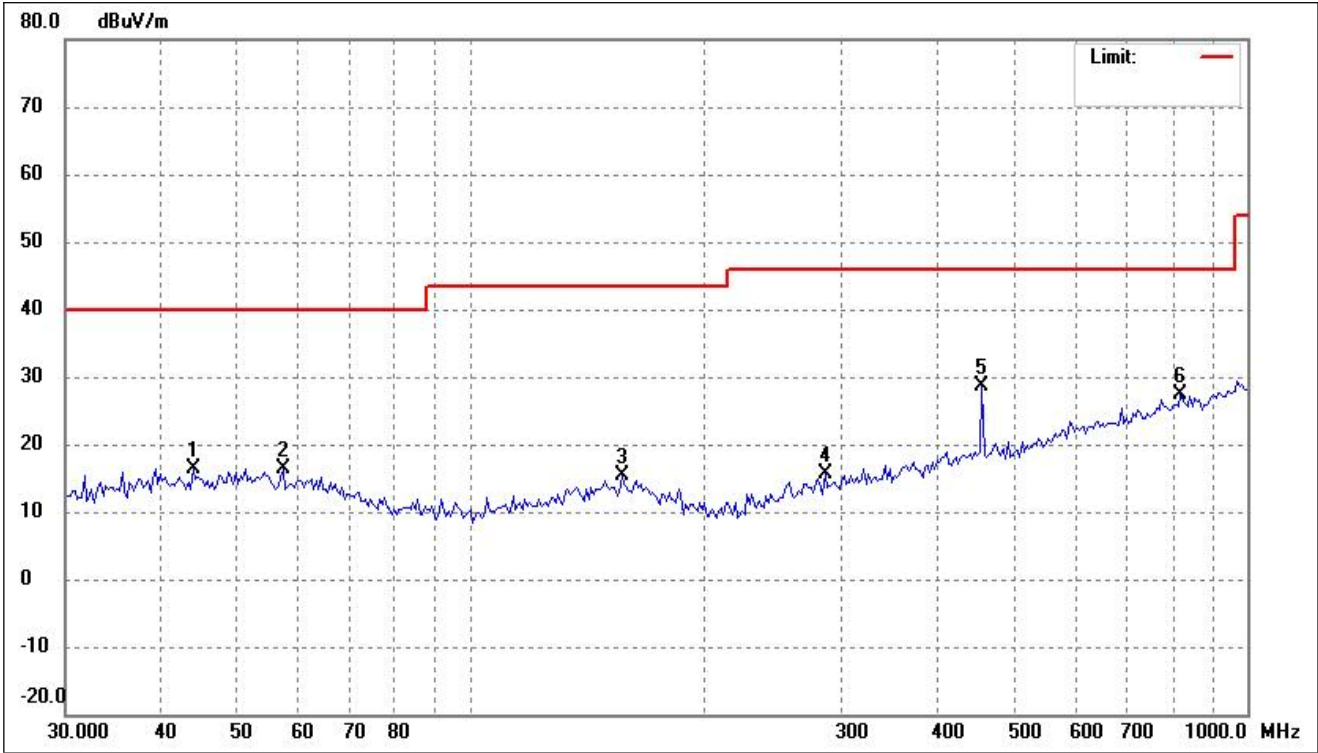

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.8452	24.84	-8.39	16.45	40.00	-23.55	-	-	peak
2	57.2654	25.11	-8.74	16.37	40.00	-23.63	-	-	peak
3	156.4259	24.26	-8.95	15.31	43.50	-28.19	-	-	peak
4	286.2653	24.46	-8.94	15.52	46.00	-30.48	-	-	peak
5	455.1888	34.32	-5.65	28.67	46.00	-17.33	-	-	peak
6	821.3871	26.23	1.13	27.36	46.00	-18.64	-	-	peak


802.11a

Test Channel	5180MHz(Worst case)	Polarity:	Vertical
--------------	---------------------	-----------	----------

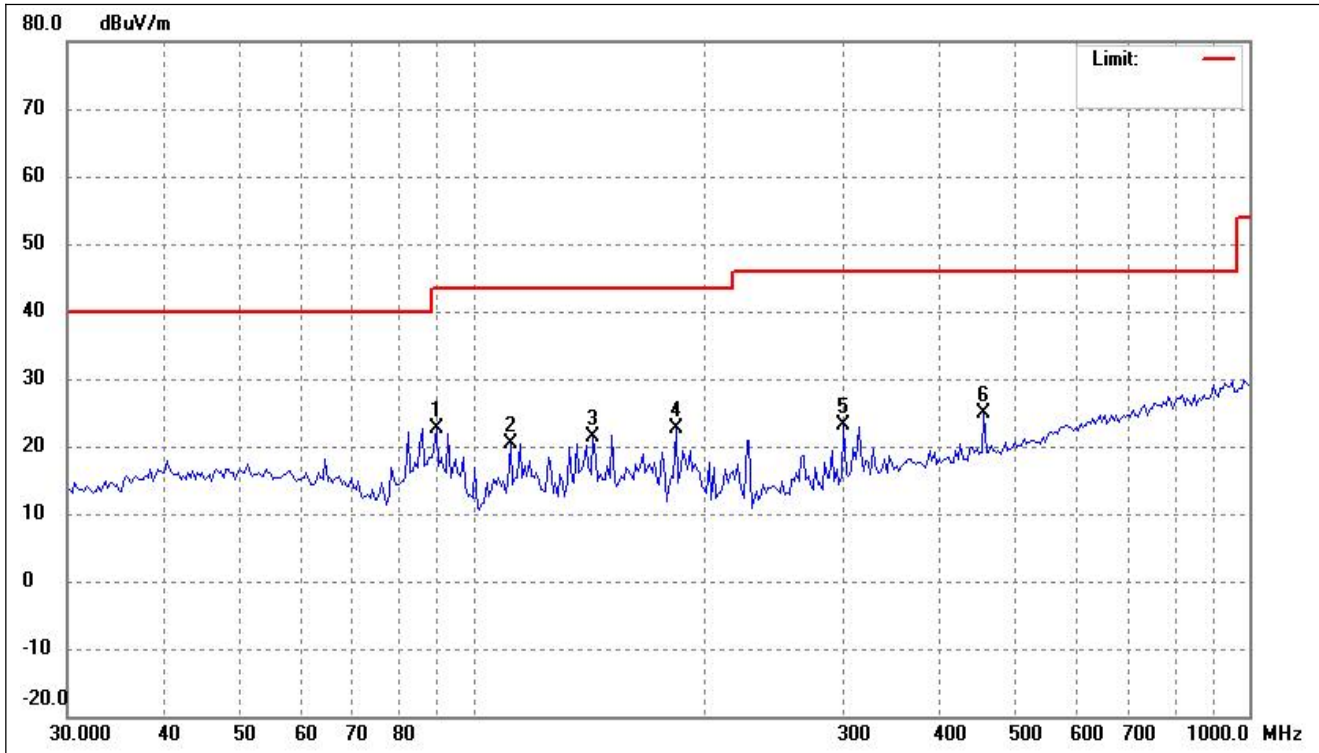


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	89.7866	36.08	-13.40	22.68	43.50	-20.82	-	-	peak
2	111.6399	32.27	-11.79	20.48	43.50	-23.02	-	-	peak
3	142.7692	30.83	-9.56	21.27	43.50	-22.23	-	-	peak
4	182.5785	33.50	-10.92	22.58	43.50	-20.92	-	-	peak
5	300.6988	31.48	-8.44	23.04	46.00	-22.96	-	-	peak
6	455.1888	30.64	-5.65	24.99	46.00	-21.01	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

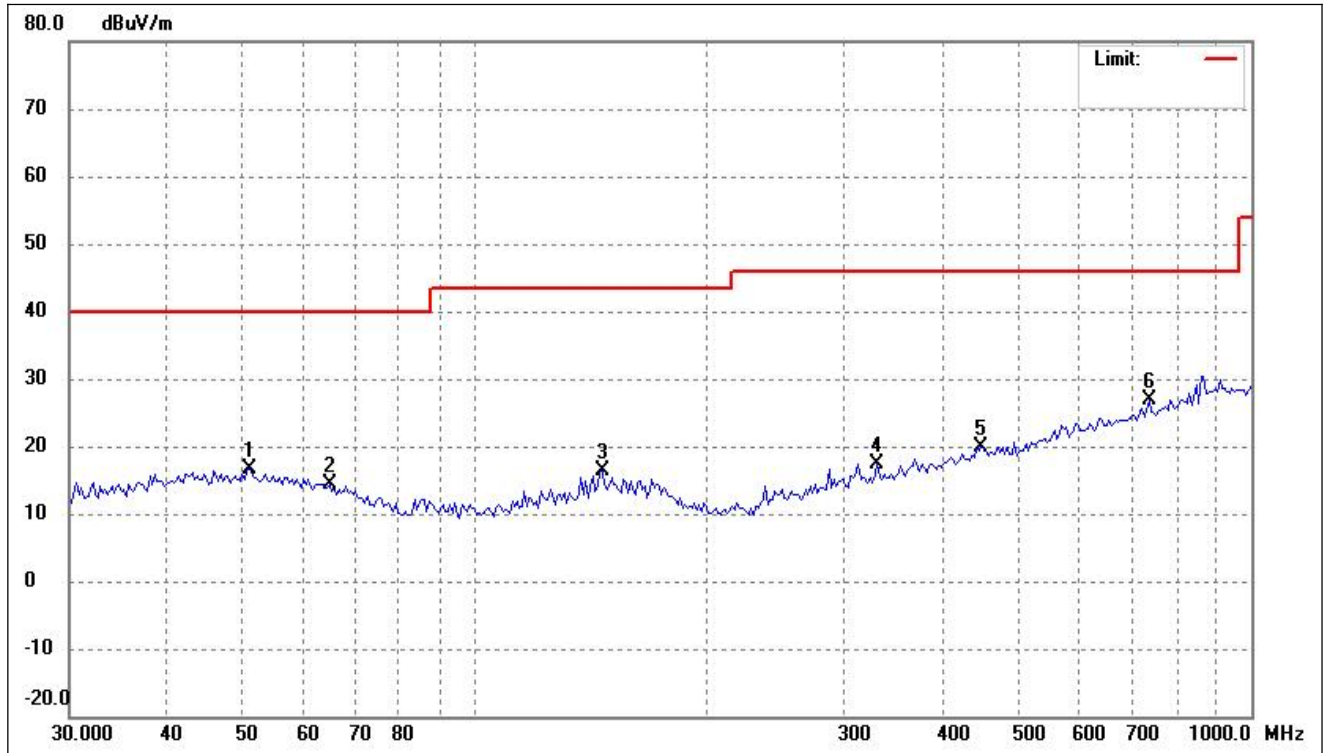


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1756	24.66	-8.13	16.53	40.00	-23.47	-	-	peak
2	64.9869	24.31	-9.89	14.42	40.00	-25.58	-	-	peak
3	145.8109	25.59	-9.30	16.29	43.50	-27.21	-	-	peak
4	329.4625	25.31	-7.85	17.46	46.00	-28.54	-	-	peak
5	448.8361	25.65	-5.70	19.95	46.00	-26.05	-	-	peak
6	739.2136	26.94	-0.17	26.77	46.00	-19.23	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

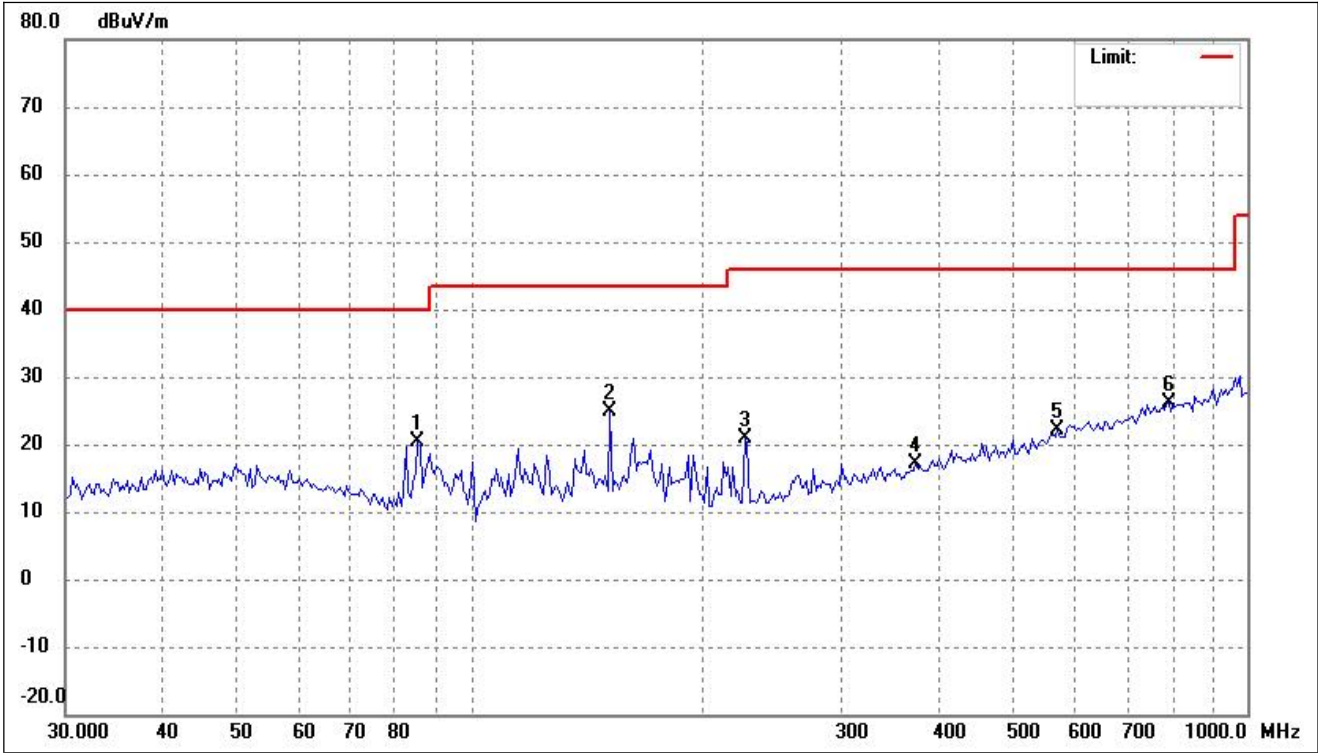


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	85.4769	33.70	-13.30	20.40	40.00	-19.60	-	-	peak
2	151.0252	33.89	-8.95	24.94	43.50	-18.56	-	-	peak
3	225.4267	32.91	-12.10	20.81	46.00	-25.19	-	-	peak
4	373.8862	24.26	-7.15	17.11	46.00	-28.89	-	-	peak
5	569.9688	25.49	-3.29	22.20	46.00	-23.80	-	-	peak
6	793.0281	25.43	0.79	26.22	46.00	-19.78	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

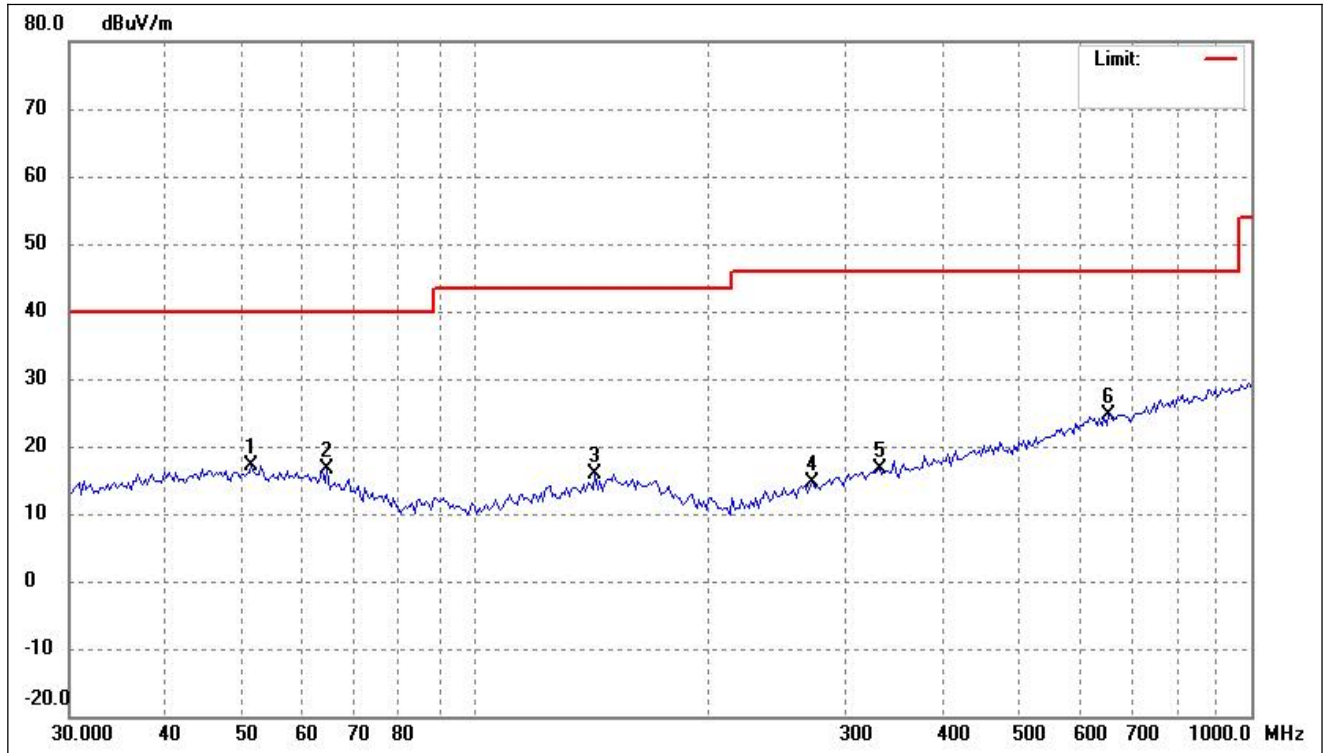


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.5365	25.39	-8.16	17.23	40.00	-22.77	-	-	peak
2	64.5319	26.43	-9.81	16.62	40.00	-23.38	-	-	peak
3	142.7692	25.37	-9.56	15.81	43.50	-27.69	-	-	peak
4	272.5246	24.01	-9.45	14.56	46.00	-31.44	-	-	peak
5	331.7858	24.38	-7.82	16.56	46.00	-29.44	-	-	peak
6	655.9766	26.24	-1.66	24.58	46.00	-21.42	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

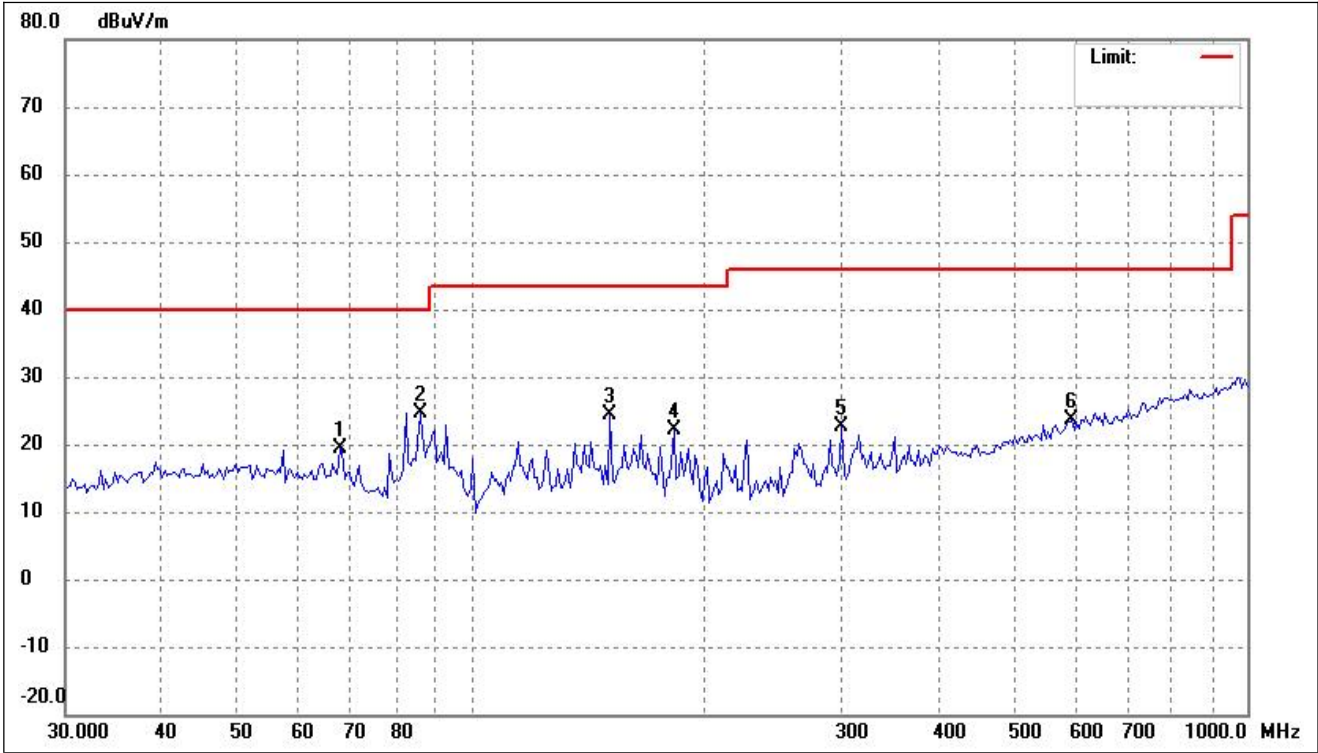


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	67.7856	29.91	-10.44	19.47	40.00	-20.53	-	-	peak
2	86.0796	38.02	-13.30	24.72	40.00	-15.28	-	-	peak
3	151.0252	33.32	-8.95	24.37	43.50	-19.13	-	-	peak
4	182.5785	33.17	-10.92	22.25	43.50	-21.25	-	-	peak
5	300.6988	31.07	-8.44	22.63	46.00	-23.37	-	-	peak
6	594.5143	26.14	-2.63	23.51	46.00	-22.49	-	-	peak

802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Horizontal

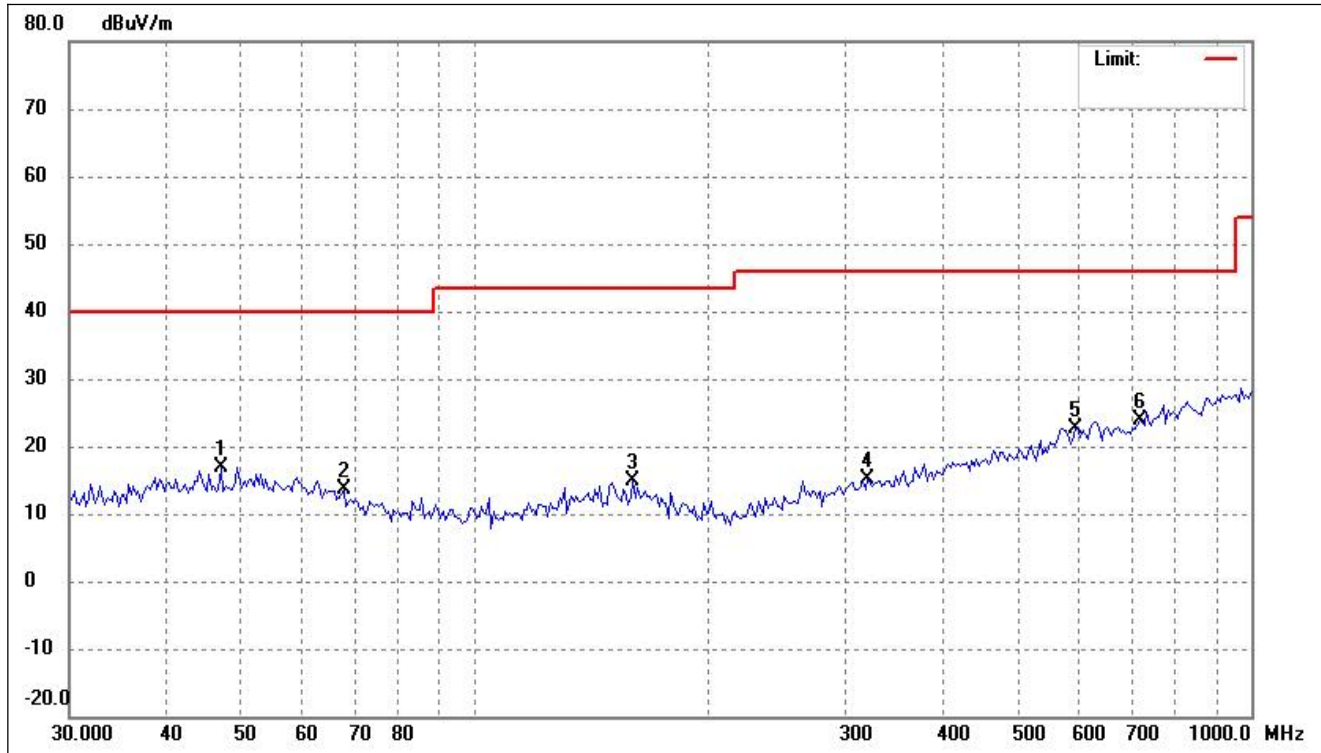

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	47.0371	25.13	-8.22	16.91	40.00	-23.09	-	-	peak
2	67.7856	23.98	-10.44	13.54	40.00	-26.46	-	-	peak
3	159.7586	23.71	-8.95	14.76	43.50	-28.74	-	-	peak
4	320.3306	23.05	-8.00	15.05	46.00	-30.95	-	-	peak
5	594.5143	25.29	-2.63	22.66	46.00	-23.34	-	-	peak
6	718.7246	24.59	-0.69	23.90	46.00	-22.10	-	-	peak


802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical

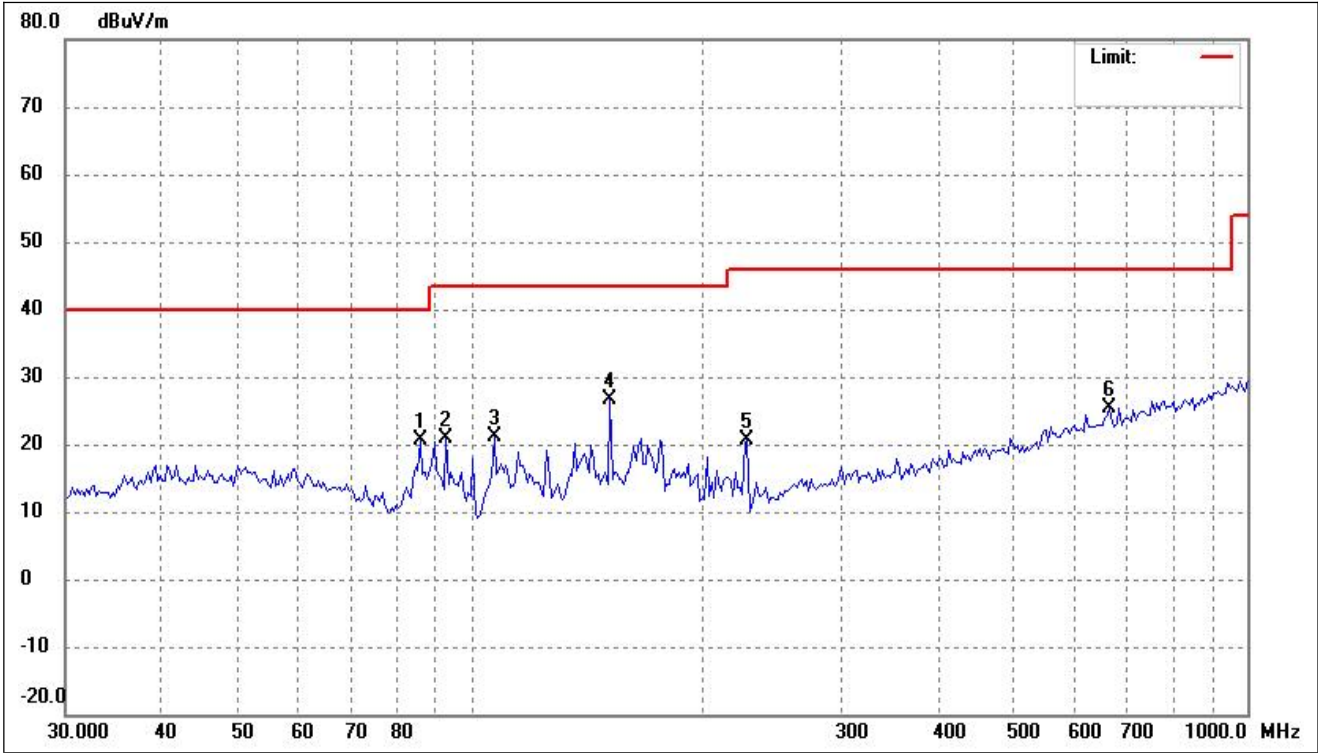

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	86.0796	33.94	-13.30	20.64	40.00	-19.36	-	-	peak
2	92.9974	34.18	-13.25	20.93	43.50	-22.57	-	-	peak
3	107.0306	33.34	-12.24	21.10	43.50	-22.40	-	-	peak
4	151.0252	35.68	-8.95	26.73	43.50	-16.77	-	-	peak
5	227.0164	32.78	-12.03	20.75	46.00	-25.25	-	-	peak
6	665.2610	26.90	-1.57	25.33	46.00	-20.67	-	-	peak


➤ 5250-5350MHz

802.11a			
Test Channel	5260MHz	Polarity:	Horizontal

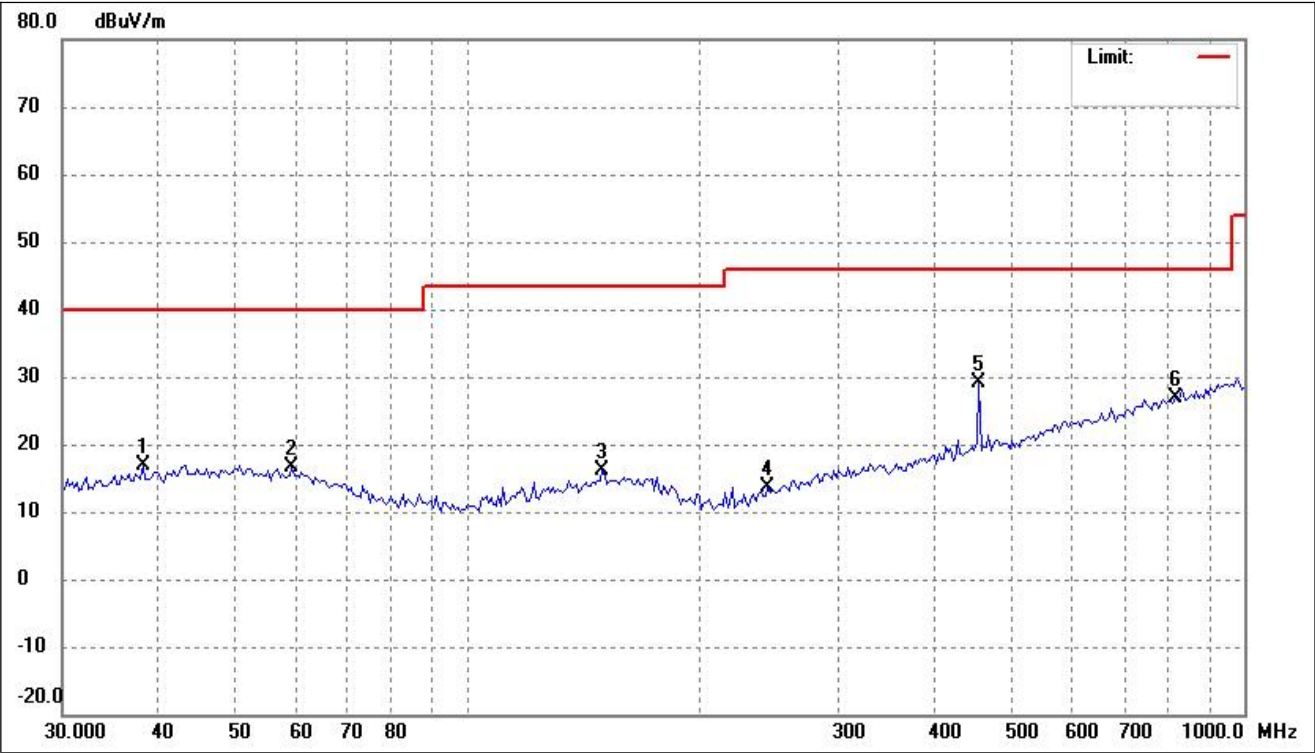


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.0965	25.70	-8.82	16.88	40.00	-23.12	-	-	peak
2	59.3133	25.55	-8.89	16.66	40.00	-23.34	-	-	peak
3	148.9175	25.12	-9.04	16.08	43.50	-27.42	-	-	peak
4	243.5431	24.32	-10.67	13.65	46.00	-32.35	-	-	peak
5	455.1888	34.67	-5.65	29.02	46.00	-16.98	-	-	peak
6	815.6353	25.81	1.07	26.88	46.00	-19.12	-	-	peak

802.11a			
Test Channel	5260MHz(worst case)	Polarity:	Vertical

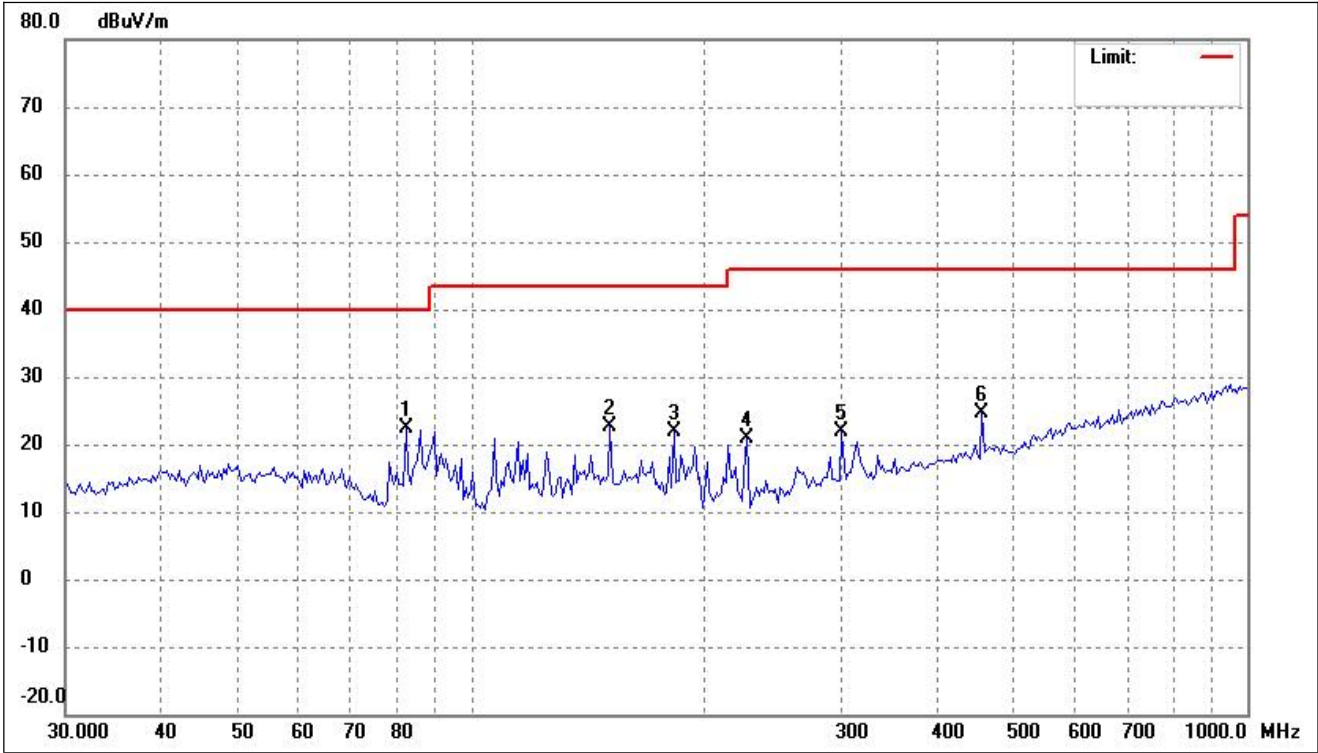


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	82.5257	35.63	-13.22	22.41	40.00	-17.59	-	-	peak
2	151.0252	31.69	-8.95	22.74	43.50	-20.76	-	-	peak
3	182.5785	32.70	-10.92	21.78	43.50	-21.72	-	-	peak
4	227.0164	32.98	-12.03	20.95	46.00	-25.05	-	-	peak
5	300.6988	30.22	-8.44	21.78	46.00	-24.22	-	-	peak
6	455.1888	30.34	-5.65	24.69	46.00	-21.31	-	-	peak

802.11n-HT20			
Test Channel	5260MHz(worst case)	Polarity:	Horizontal

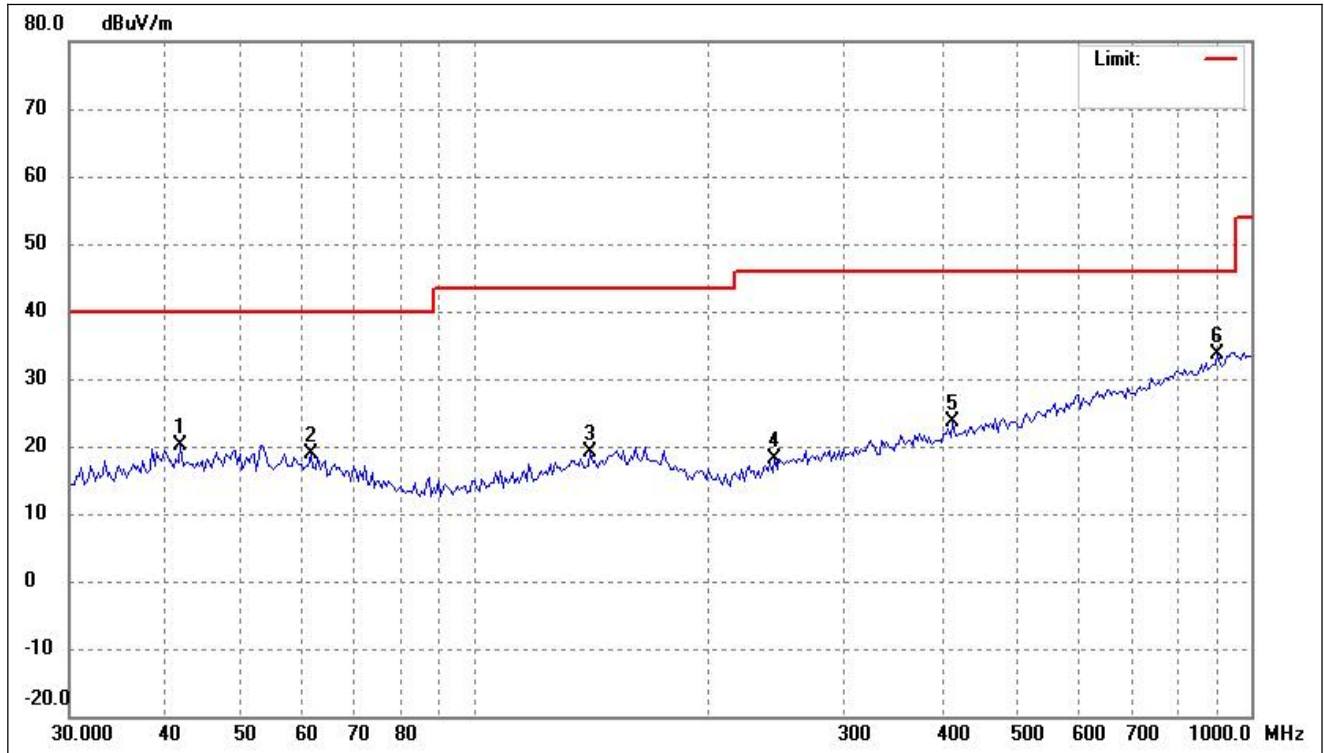


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.7406	28.54	-8.39	20.15	40.00	-19.85	-	-	peak
2	61.4343	28.20	-9.22	18.98	40.00	-21.02	-	-	peak
3	140.7767	28.98	-9.73	19.25	43.50	-24.25	-	-	peak
4	243.5431	28.86	-10.67	18.19	46.00	-27.81	-	-	peak
5	412.5395	30.07	-6.50	23.57	46.00	-22.43	-	-	peak
6	906.3041	31.53	2.13	33.66	46.00	-12.34	-	-	peak

802.11n-HT20			
Test Channel	5260MHz(worst case)	Polarity:	Vertical

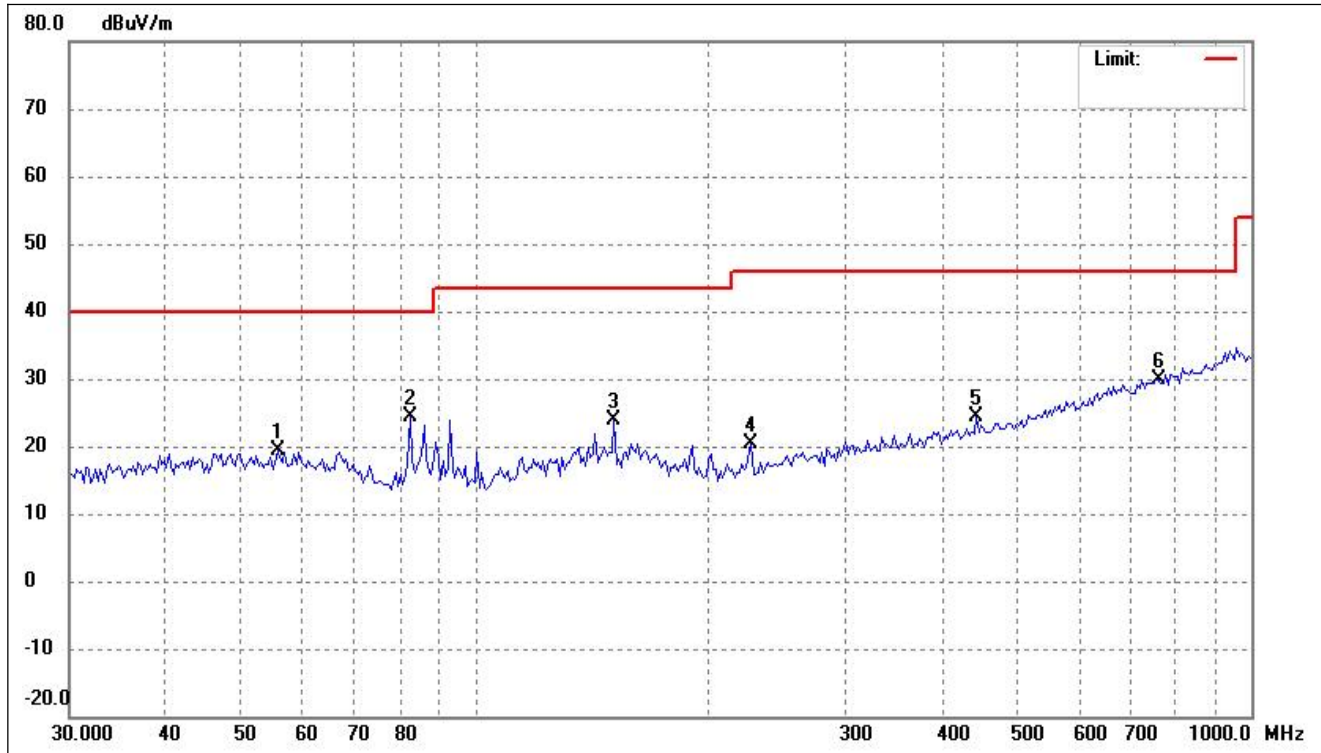


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.6782	27.98	-8.63	19.35	40.00	-20.65	-	-	peak
2	82.5257	37.65	-13.22	24.43	40.00	-15.57	-	-	peak
3	151.0252	32.81	-8.95	23.86	43.50	-19.64	-	-	peak
4	227.0164	32.41	-12.03	20.38	46.00	-25.62	-	-	peak
5	442.5722	30.22	-5.85	24.37	46.00	-21.63	-	-	peak
6	760.2867	29.66	0.26	29.92	46.00	-16.08	-	-	peak

802.11n-HT40			
Test Channel	5270MHz(worst case)	Polarity:	Horizontal

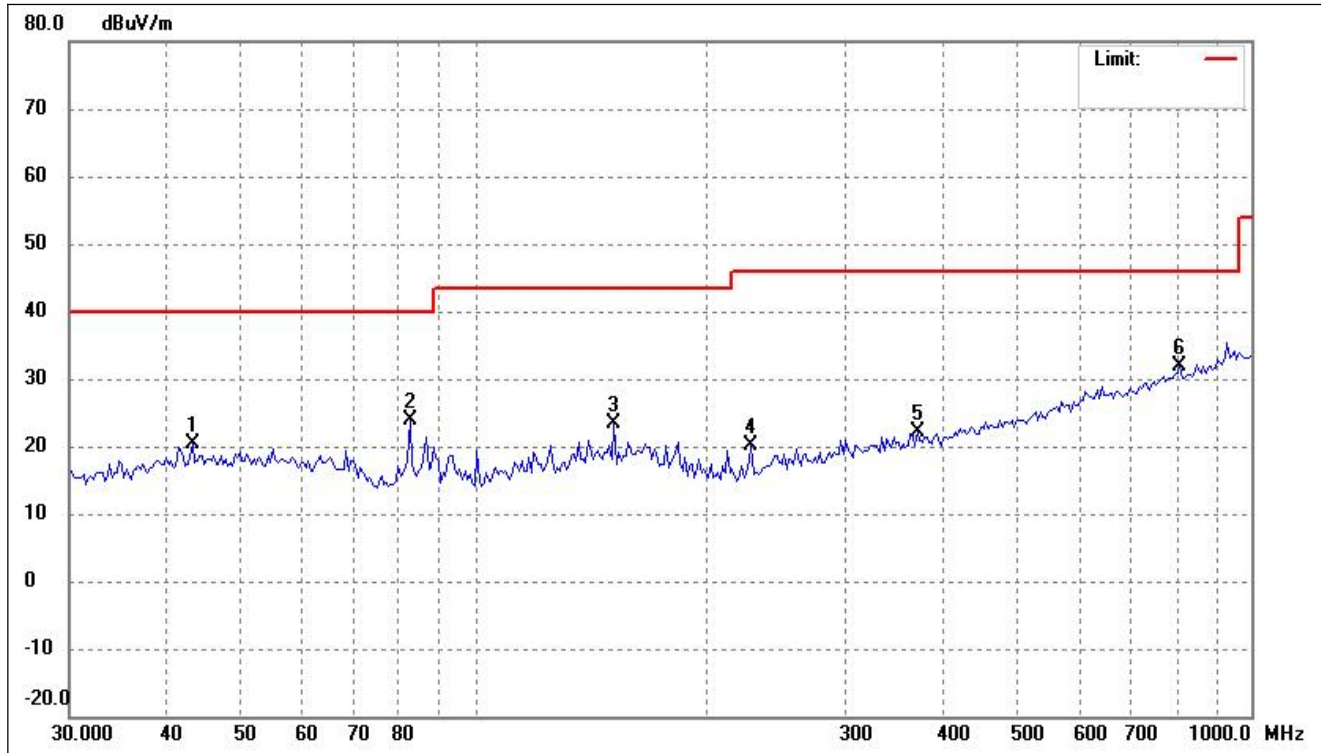

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.2333	28.83	-8.38	20.45	40.00	-19.55	-	-	peak
2	82.5257	37.07	-13.22	23.85	40.00	-16.15	-	-	peak
3	151.0252	32.35	-8.95	23.40	43.50	-20.10	-	-	peak
4	227.0164	32.13	-12.03	20.10	46.00	-25.90	-	-	peak
5	371.2679	29.32	-7.20	22.12	46.00	-23.88	-	-	peak
6	809.9238	30.88	1.01	31.89	46.00	-14.11	-	-	peak

802.11n-HT40			
Test Channel	5270MHz(worst case)	Polarity:	Vertical

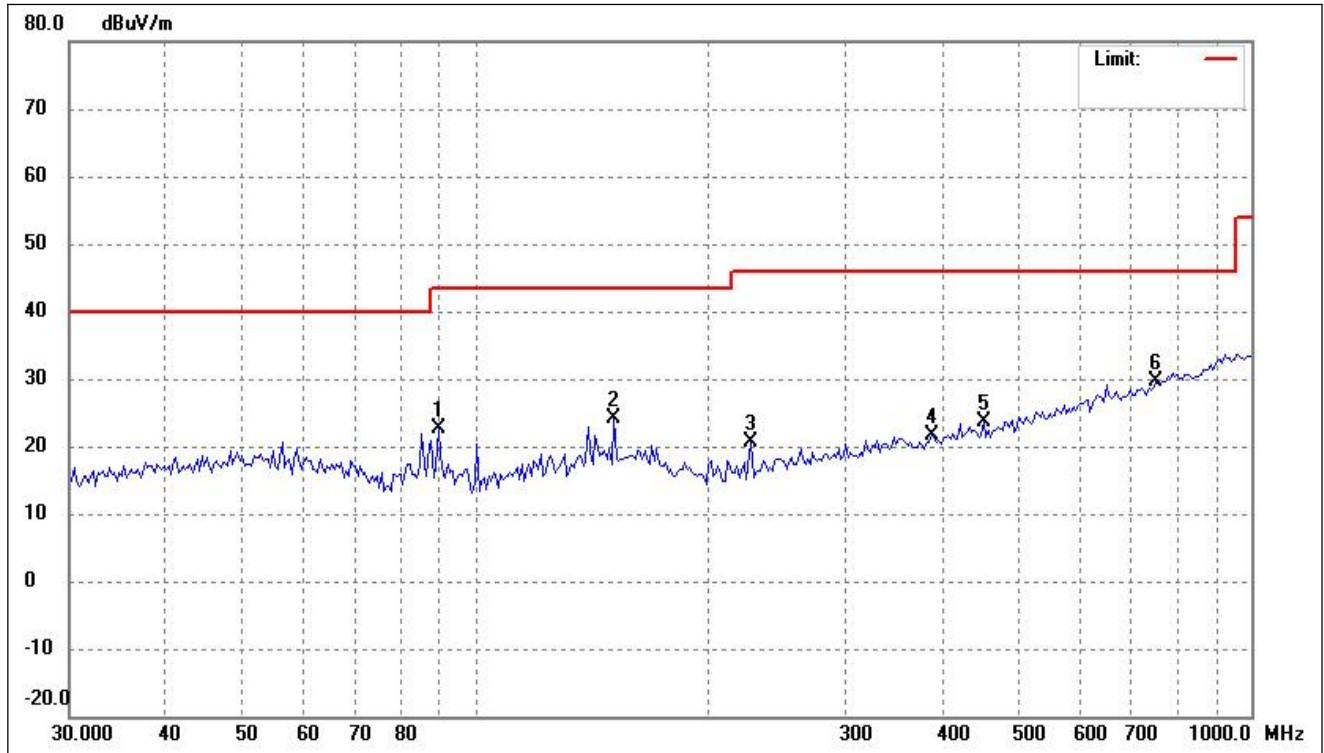

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	89.7866	36.01	-13.40	22.61	43.50	-20.89	-	-	peak
2	151.0252	33.01	-8.95	24.06	43.50	-19.44	-	-	peak
3	227.0164	32.54	-12.03	20.51	46.00	-25.49	-	-	peak
4	387.2565	28.49	-6.94	21.55	46.00	-24.45	-	-	peak
5	452.0013	29.37	-5.67	23.70	46.00	-22.30	-	-	peak
6	754.9628	29.50	0.18	29.68	46.00	-16.32	-	-	peak

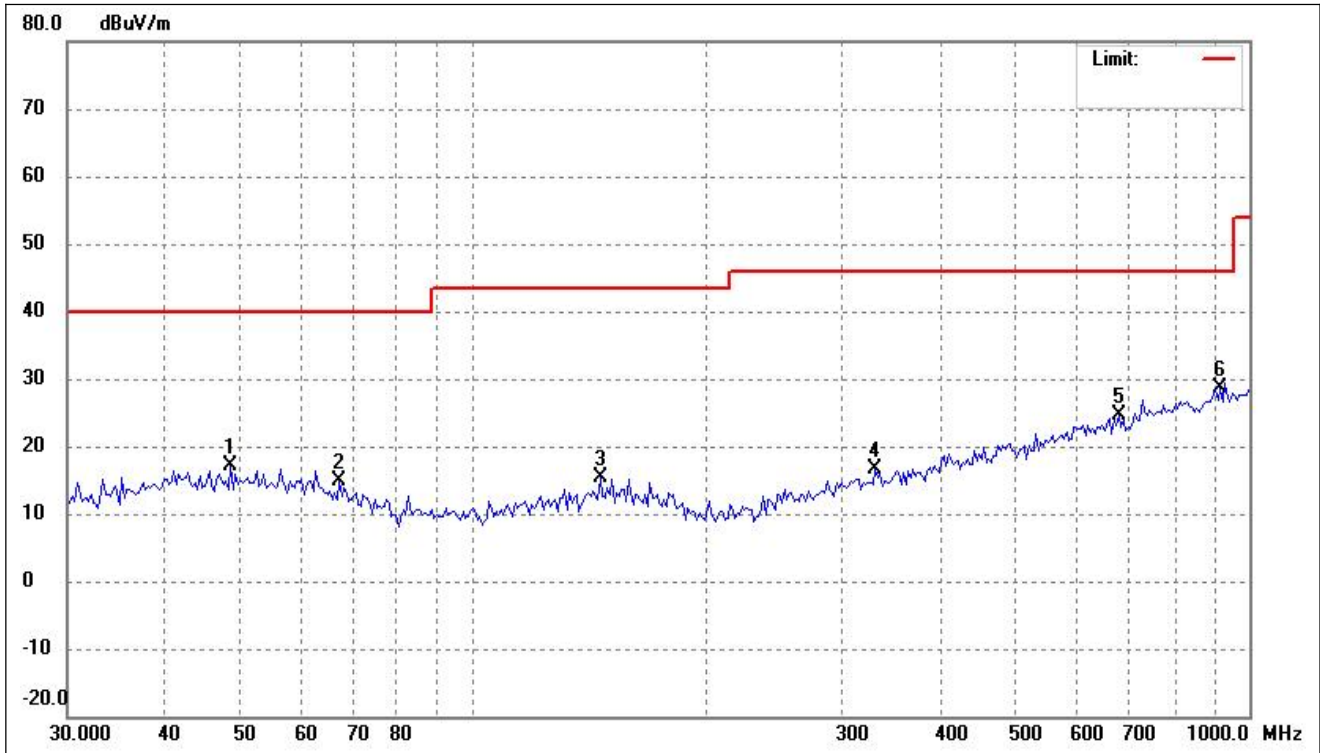
802.11ac-HT80

Test Channel

5290MHz(worst case)


Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.7191	25.26	-8.09	17.17	40.00	-22.83	-	-	peak
2	67.3109	25.17	-10.35	14.82	40.00	-25.18	-	-	peak
3	145.8109	24.66	-9.30	15.36	43.50	-28.14	-	-	peak
4	329.4625	24.50	-7.85	16.65	46.00	-29.35	-	-	peak
5	679.4346	26.05	-1.43	24.62	46.00	-21.38	-	-	peak
6	919.1315	26.13	2.43	28.56	46.00	-17.44	-	-	peak


802.11ac-HT80			
Test Channel	5290MHz(worst case)	Polarity:	Vertical

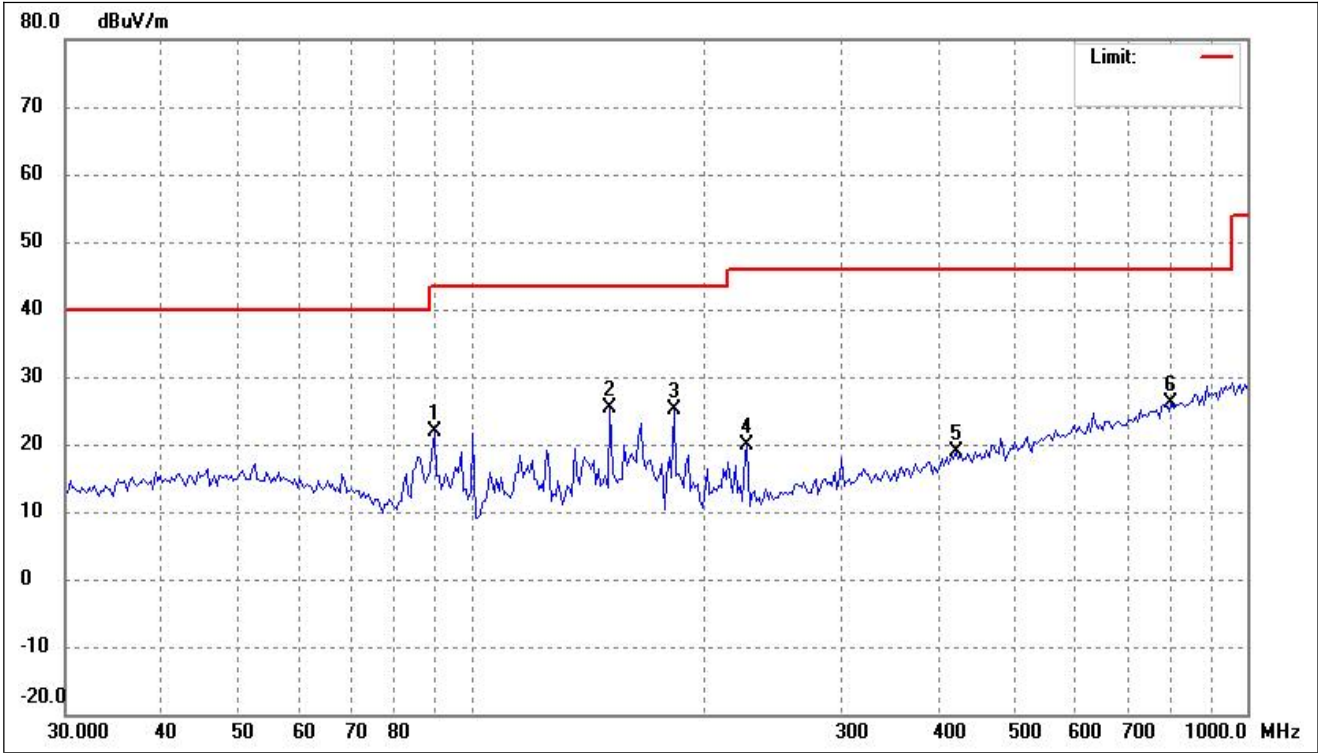

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	89.7866	35.29	-13.40	21.89	43.50	-21.61	-	-	peak
2	151.0252	34.40	-8.95	25.45	43.50	-18.05	-	-	peak
3	182.5785	35.95	-10.92	25.03	43.50	-18.47	-	-	peak
4	227.0164	31.89	-12.03	19.86	46.00	-26.14	-	-	peak
5	421.3287	25.09	-6.31	18.78	46.00	-27.22	-	-	peak
6	798.6205	25.34	0.88	26.22	46.00	-19.78	-	-	peak


➤ 5470-5725MHz

802.11a			
Test Channel	5500MHz(worst case)	Polarity:	Horizontal

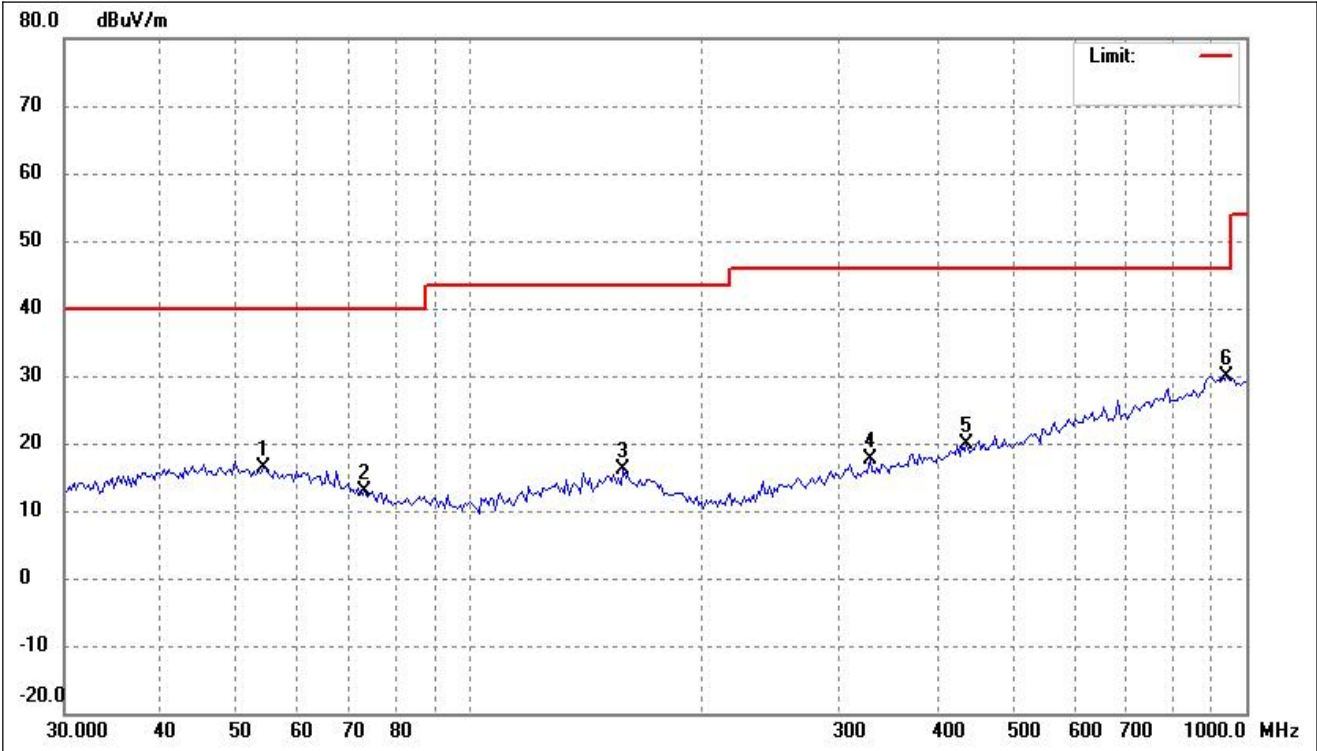


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	54.1349	24.77	-8.48	16.29	40.00	-23.71	-	-	peak
2	73.2331	24.44	-11.60	12.84	40.00	-27.16	-	-	peak
3	157.5290	25.17	-8.95	16.22	43.50	-27.28	-	-	peak
4	327.1554	25.61	-7.87	17.74	46.00	-28.26	-	-	peak
5	436.3956	25.86	-5.97	19.89	46.00	-26.11	-	-	peak
6	945.3336	26.91	3.04	29.95	46.00	-16.05	-	-	peak

802.11a			
Test Channel	5500MHz(worst case)	Polarity:	Vertical

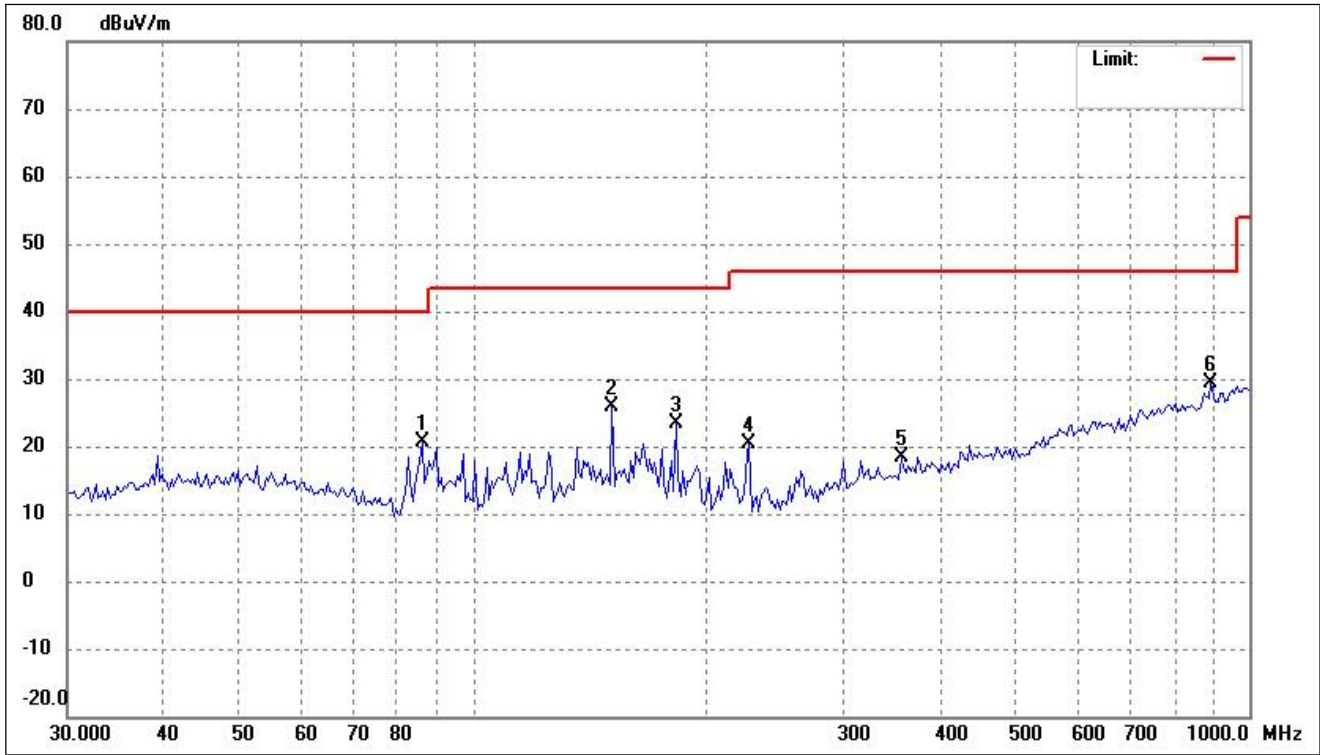


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	86.0796	33.92	-13.30	20.62	40.00	-19.38	-	-	peak
2	151.0252	34.77	-8.95	25.82	43.50	-17.68	-	-	peak
3	182.5785	34.30	-10.92	23.38	43.50	-20.12	-	-	peak
4	227.0164	32.35	-12.03	20.32	46.00	-25.68	-	-	peak
5	355.9397	25.83	-7.49	18.34	46.00	-27.66	-	-	peak
6	893.6557	27.38	1.92	29.30	46.00	-16.70	-	-	peak

802.11n-HT20			
Test Channel	5500MHz(worst case)	Polarity:	Horizontal

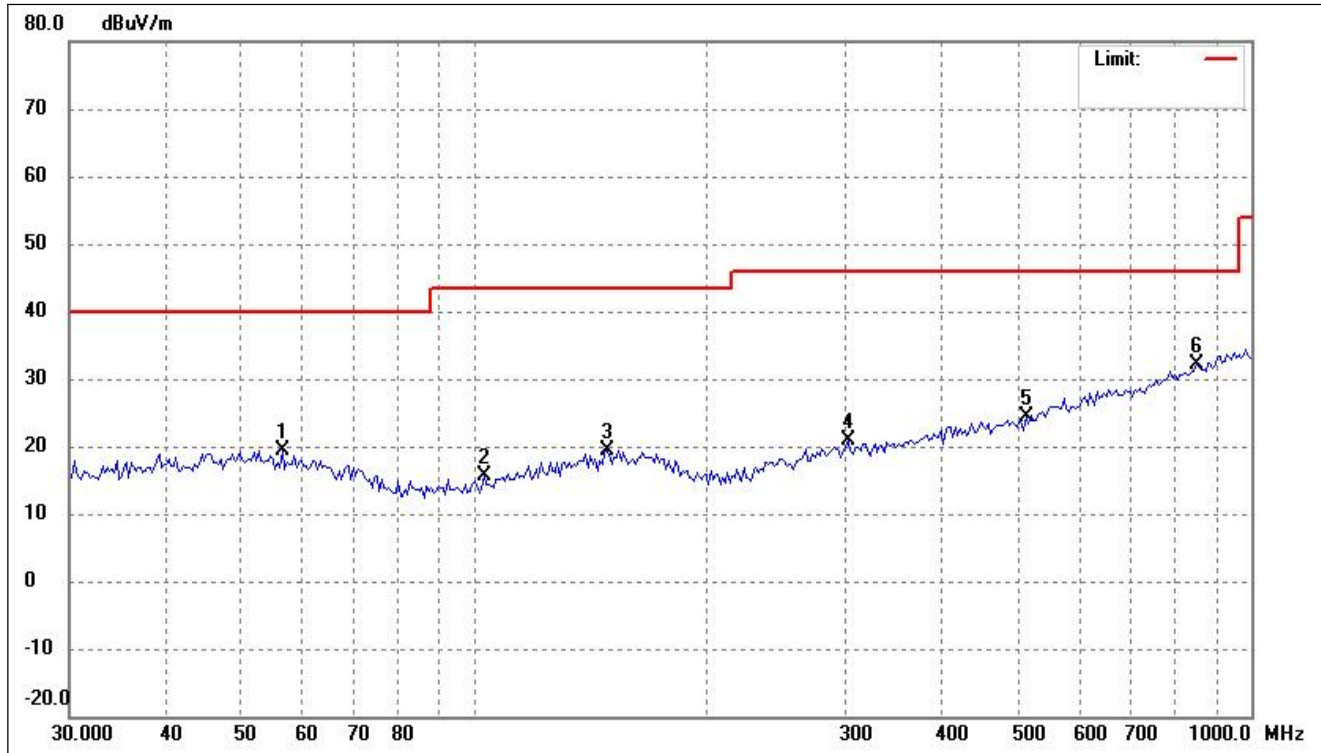


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	56.4662	28.08	-8.68	19.40	40.00	-20.60	-	-	peak
2	102.6117	28.19	-12.65	15.54	43.50	-27.96	-	-	peak
3	147.8747	28.54	-9.12	19.42	43.50	-24.08	-	-	peak
4	302.8193	29.37	-8.40	20.97	46.00	-25.03	-	-	peak
5	512.9477	29.35	-5.01	24.34	46.00	-21.66	-	-	peak
6	850.7603	30.69	1.45	32.14	46.00	-13.86	-	-	peak

802.11n-HT20			
Test Channel	5500MHz(worst case)	Polarity:	Vertical

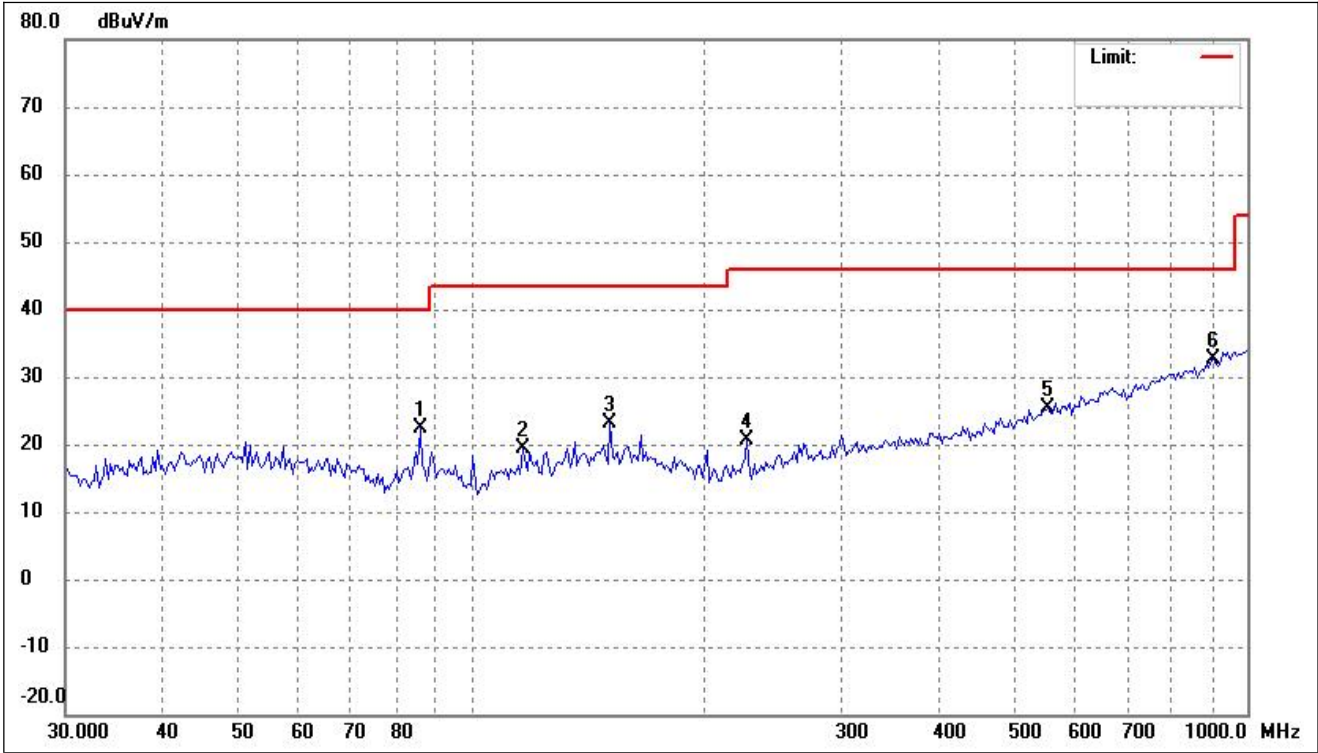


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	86.0795	35.80	-13.30	22.50	40.00	-17.50	-	-	peak
2	116.4476	30.60	-11.29	19.31	43.50	-24.19	-	-	peak
3	151.0252	31.99	-8.95	23.04	43.50	-20.46	-	-	peak
4	227.0164	32.72	-12.03	20.69	46.00	-25.31	-	-	peak
5	554.1708	29.13	-3.78	25.35	46.00	-20.65	-	-	peak
6	906.3041	30.60	2.13	32.73	46.00	-13.27	-	-	peak

802.11n-HT40			
Test Channel	5510MHz(worst case)	Polarity:	Horizontal

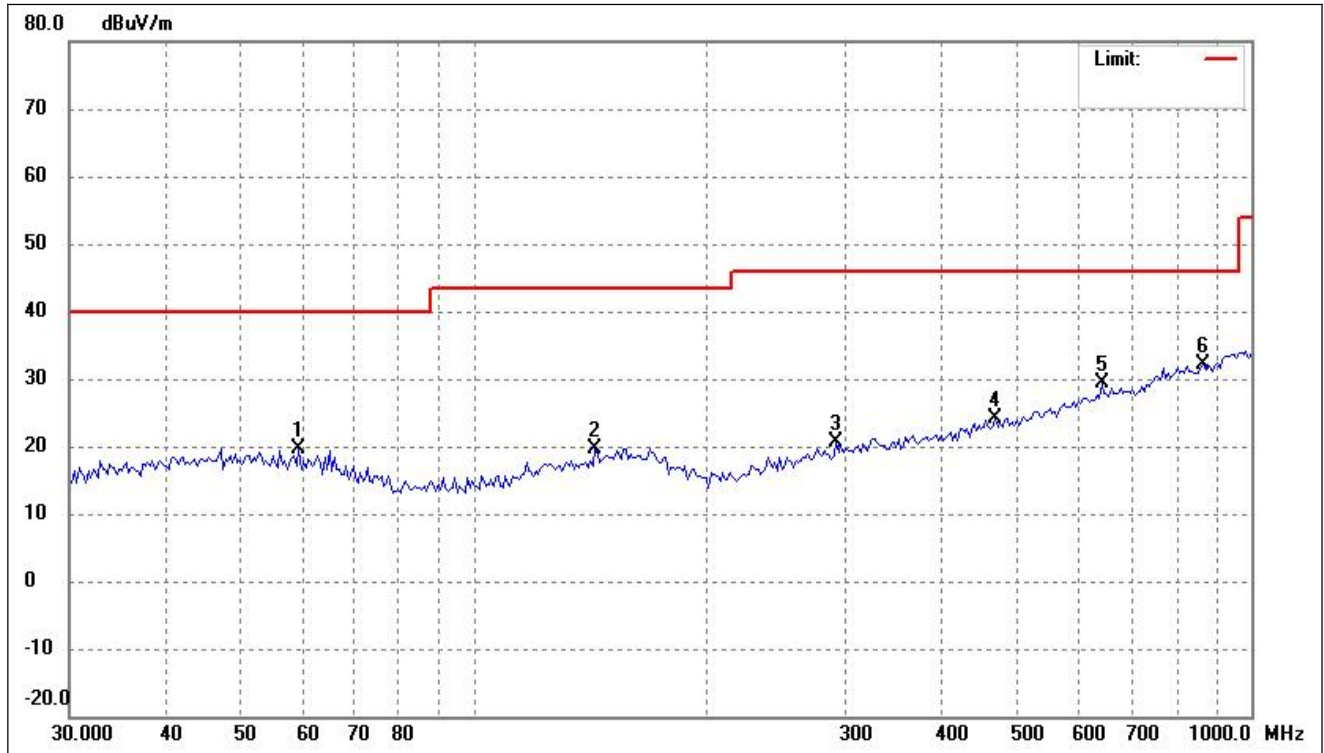


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.3133	28.60	-8.89	19.71	40.00	-20.29	-	-	peak
2	142.7692	29.13	-9.56	19.57	43.50	-23.93	-	-	peak
3	292.3643	29.30	-8.73	20.57	46.00	-25.43	-	-	peak
4	468.1651	29.79	-5.55	24.24	46.00	-21.76	-	-	peak
5	642.2923	31.05	-1.79	29.26	46.00	-16.74	-	-	peak
6	868.8860	30.49	1.65	32.14	46.00	-13.86	-	-	peak

802.11n-HT40			
Test Channel	5510MHz(worst case)	Polarity:	Vertical

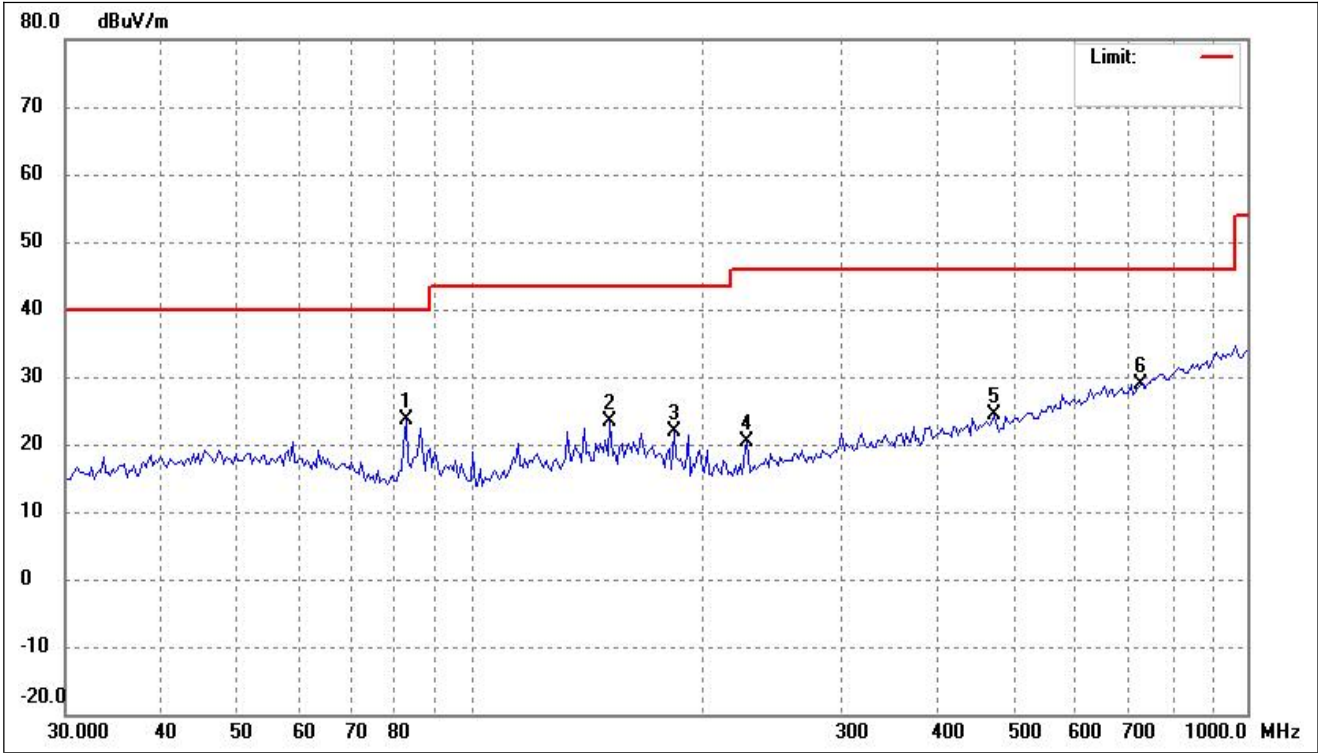


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	82.5257	36.95	-13.22	23.73	40.00	-16.27	-	-	peak
2	151.0252	32.39	-8.95	23.44	43.50	-20.06	-	-	peak
3	182.5785	32.85	-10.92	21.93	43.50	-21.57	-	-	peak
4	227.0164	32.36	-12.03	20.33	46.00	-25.67	-	-	peak
5	471.4665	29.84	-5.52	24.32	46.00	-21.68	-	-	peak
6	728.8971	29.40	-0.44	28.96	46.00	-17.04	-	-	peak

802.11ac-HT80			
Test Channel	5530MHz(worst case)	Polarity:	Horizontal

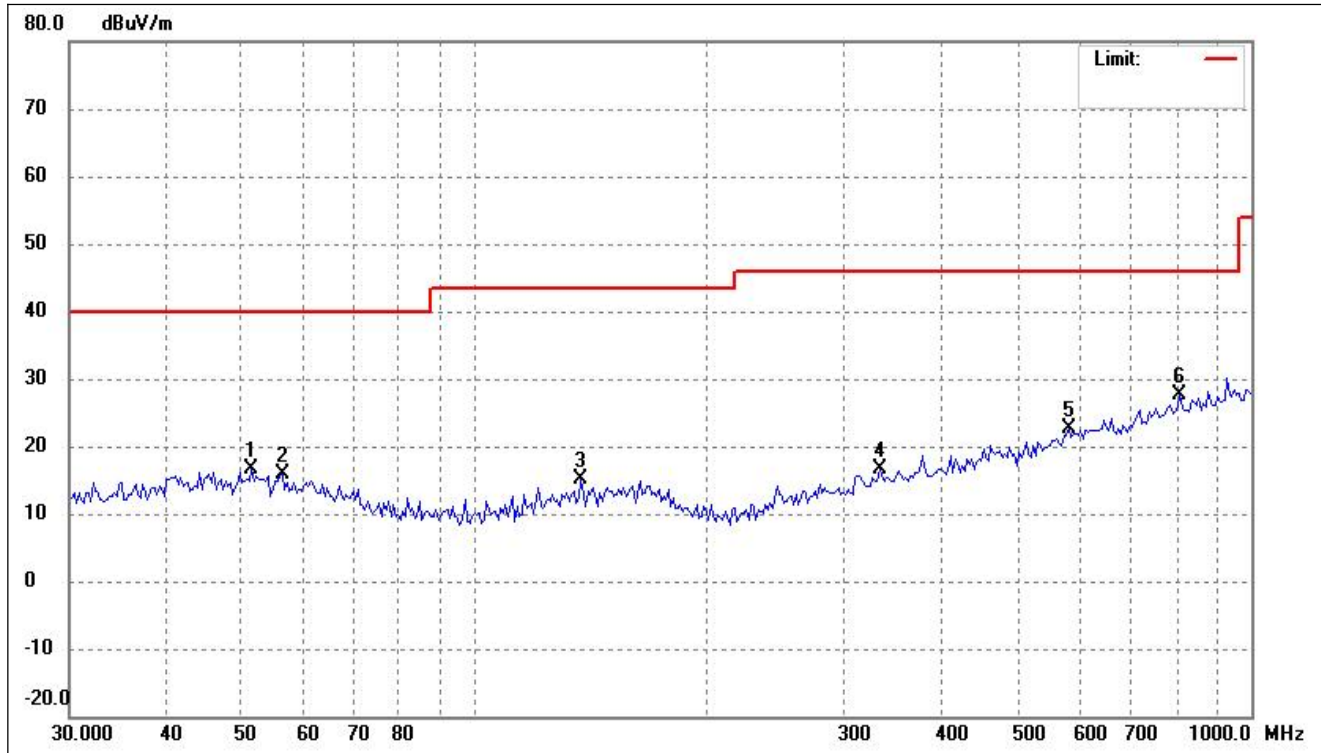

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.5365	24.72	-8.16	16.56	40.00	-23.44	-	-	peak
2	56.4662	24.49	-8.68	15.81	40.00	-24.19	-	-	peak
3	136.8747	25.00	-9.93	15.07	43.50	-28.43	-	-	peak
4	331.7858	24.34	-7.82	16.52	46.00	-29.48	-	-	peak
5	582.1122	25.56	-2.97	22.59	46.00	-23.41	-	-	peak
6	809.9238	26.64	1.01	27.65	46.00	-18.35	-	-	peak


802.11ac-HT80			
Test Channel	5530MHz(worst case)	Polarity:	Vertical

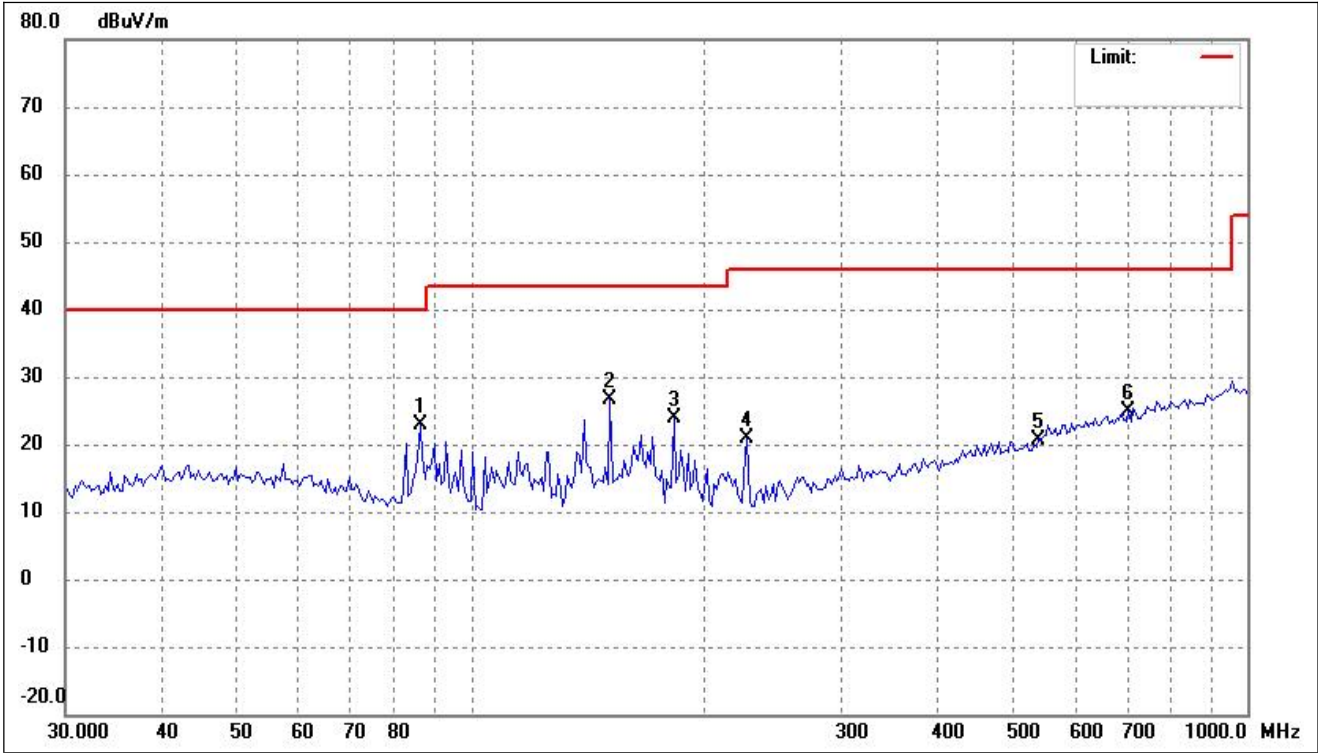

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	86.0796	36.27	-13.30	22.97	40.00	-17.03	-	-	peak
2	151.0252	35.61	-8.95	26.66	43.50	-16.84	-	-	peak
3	182.5785	34.77	-10.92	23.85	43.50	-19.65	-	-	peak
4	227.0164	32.84	-12.03	20.81	46.00	-25.19	-	-	peak
5	538.8107	24.99	-4.29	20.70	46.00	-25.30	-	-	peak
6	703.7314	25.83	-1.06	24.77	46.00	-21.23	-	-	peak


➤ 5725-5850MHz

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

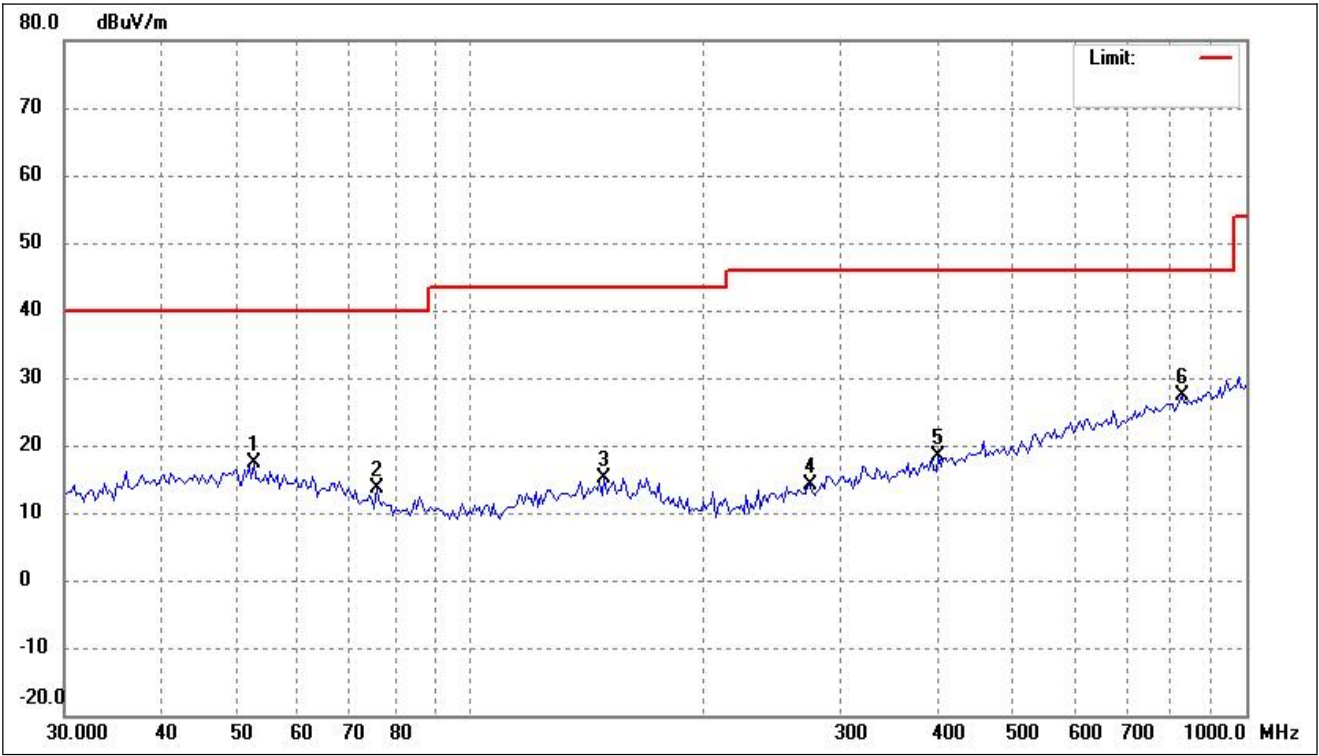


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.6345	25.70	-8.30	17.40	40.00	-22.60	-	-	peak
2	75.8520	25.80	-12.21	13.59	40.00	-26.41	-	-	peak
3	148.9175	24.25	-9.04	15.21	43.50	-28.29	-	-	peak
4	274.4464	23.46	-9.36	14.10	46.00	-31.90	-	-	peak
5	401.1050	25.03	-6.74	18.29	46.00	-27.71	-	-	peak
6	827.1795	26.28	1.19	27.47	46.00	-18.53	-	-	peak

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

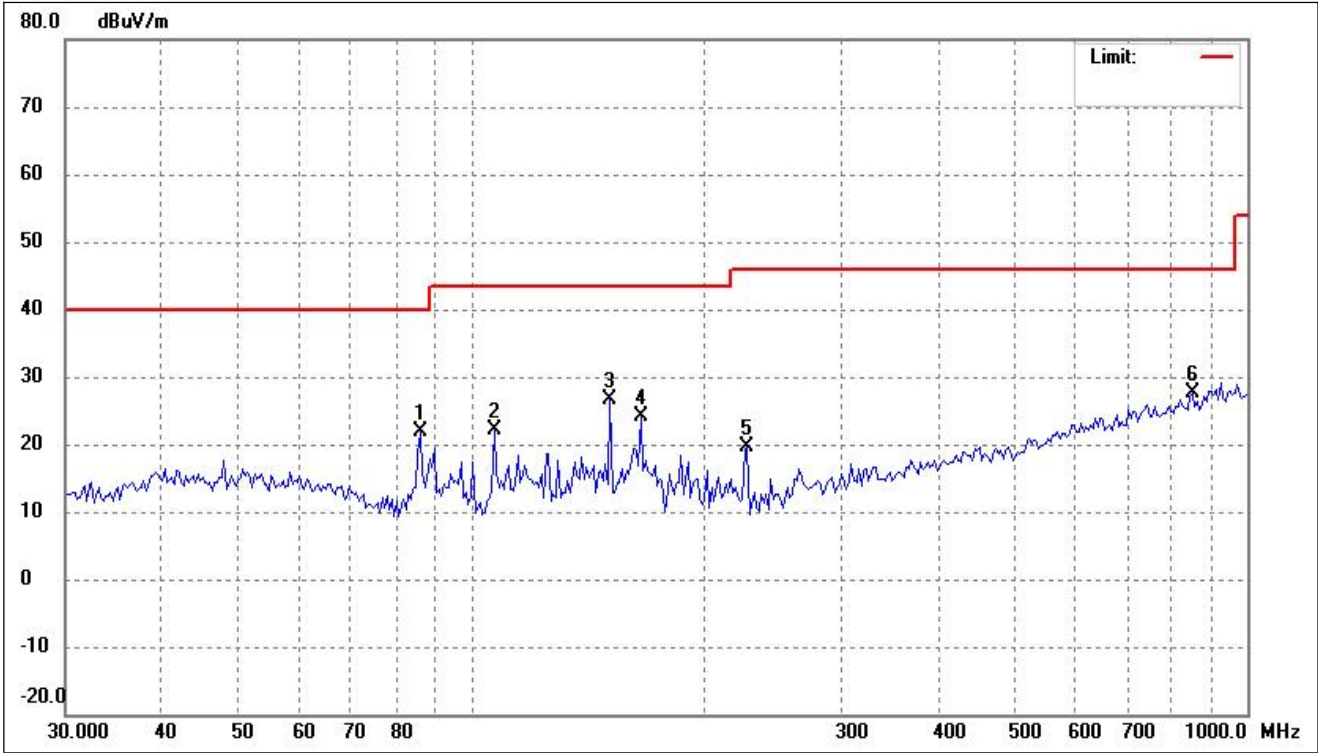


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	86.0796	35.10	-13.30	21.80	40.00	-18.20	-	-	peak
2	107.0306	34.47	-12.24	22.23	43.50	-21.27	-	-	peak
3	151.0252	35.63	-8.95	26.68	43.50	-16.82	-	-	peak
4	165.4716	33.10	-9.09	24.01	43.50	-19.49	-	-	peak
5	227.0164	31.76	-12.03	19.73	46.00	-26.27	-	-	peak
6	850.7603	26.15	1.45	27.60	46.00	-18.40	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

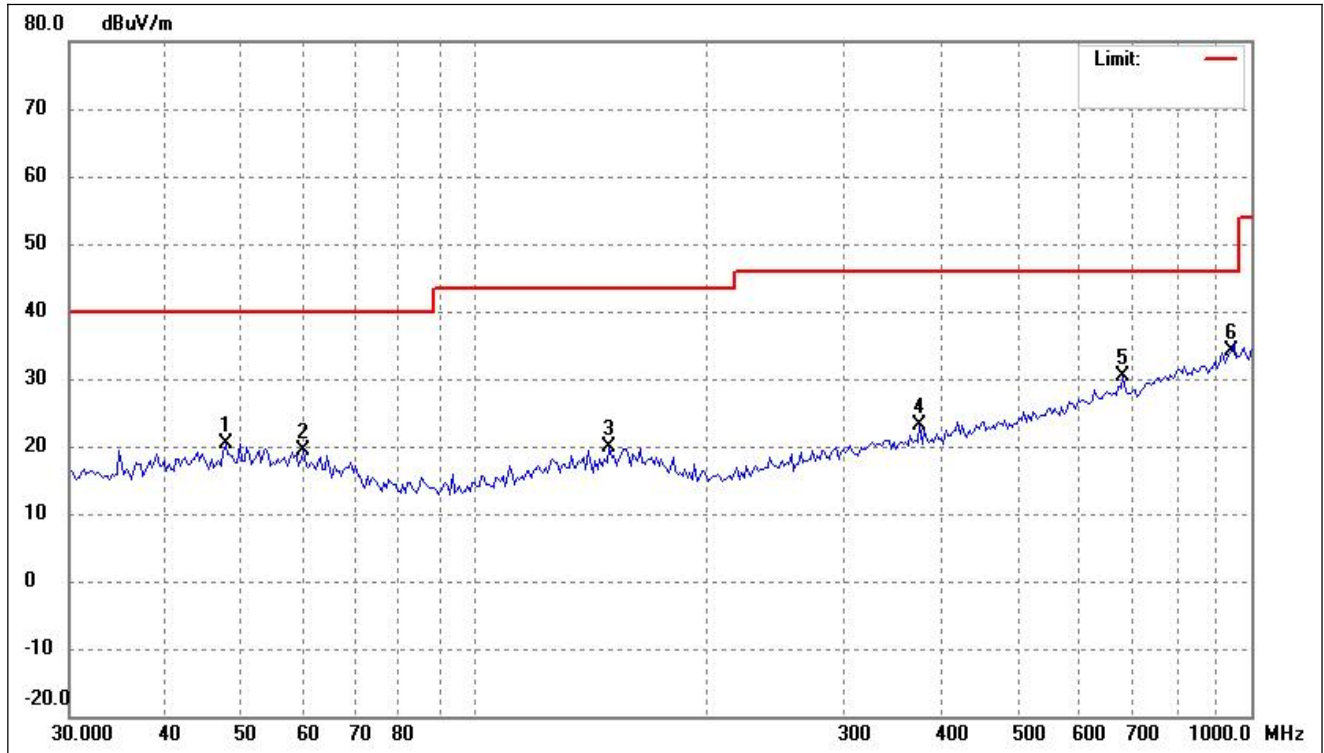


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	47.7028	28.48	-8.17	20.31	40.00	-19.69	-	-	peak
2	60.1528	28.26	-8.97	19.29	40.00	-20.71	-	-	peak
3	148.9175	29.00	-9.04	19.96	43.50	-23.54	-	-	peak
4	373.8861	30.16	-7.15	23.01	46.00	-22.99	-	-	peak
5	684.2259	31.69	-1.37	30.32	46.00	-15.68	-	-	peak
6	945.3336	31.04	3.04	34.08	46.00	-11.92	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

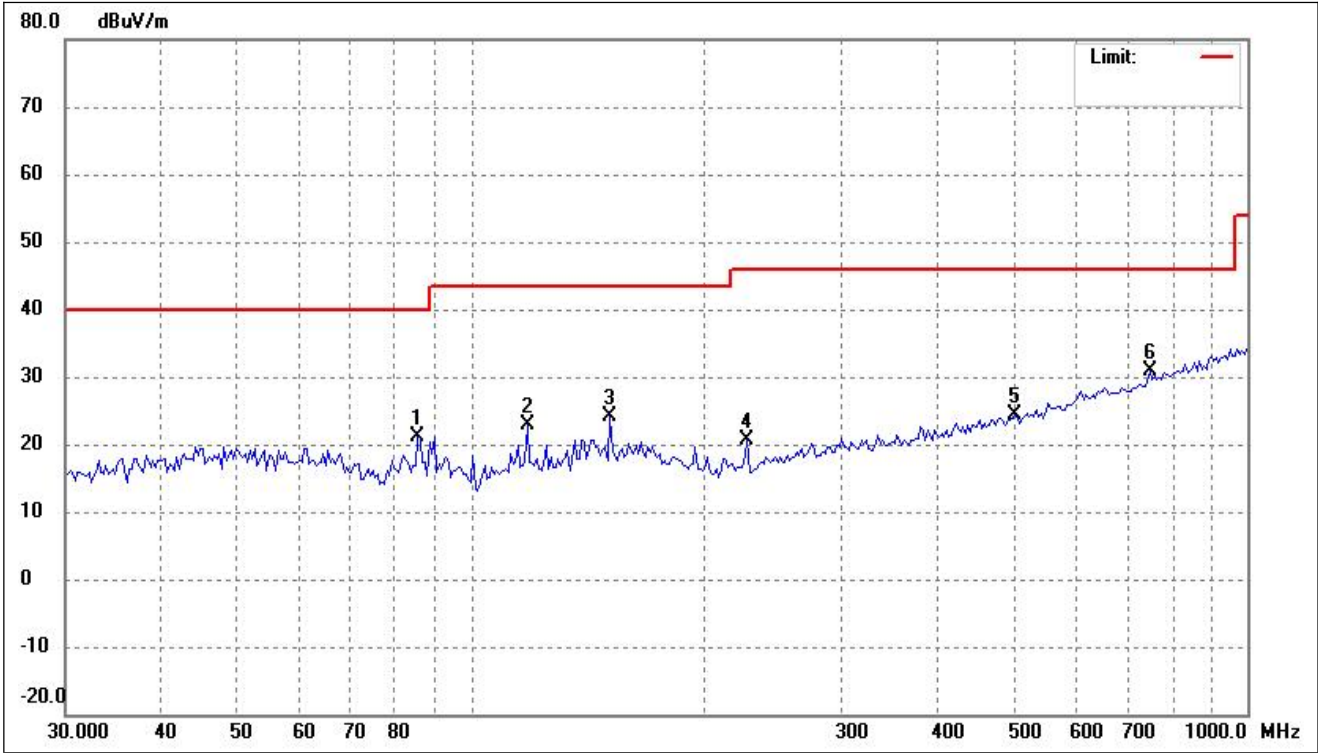


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	85.4769	34.47	-13.30	21.17	40.00	-18.83	-	-	peak
2	118.0957	33.98	-11.11	22.87	43.50	-20.63	-	-	peak
3	151.0252	33.00	-8.95	24.05	43.50	-19.45	-	-	peak
4	227.0164	32.64	-12.03	20.61	46.00	-25.39	-	-	peak
5	502.2473	29.75	-5.26	24.49	46.00	-21.51	-	-	peak
6	749.6761	30.69	0.09	30.78	46.00	-15.22	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

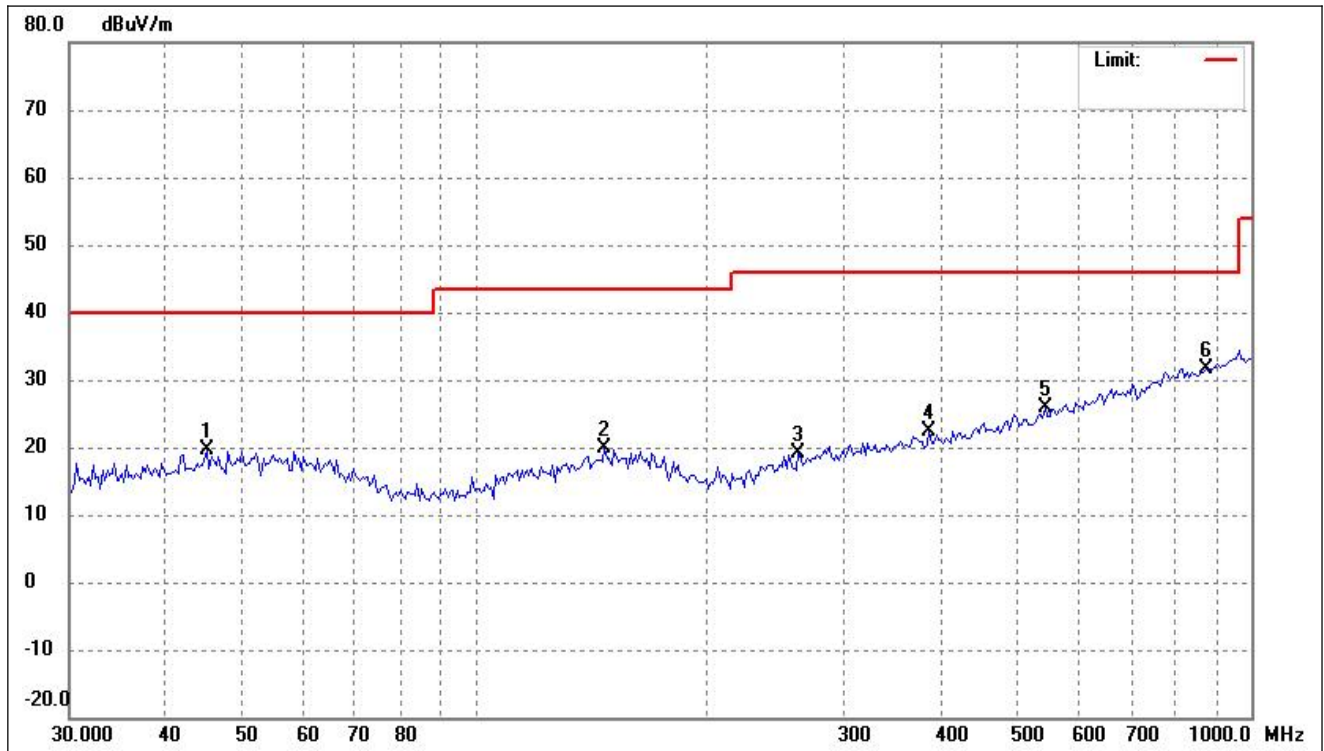


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.0951	28.09	-8.37	19.72	40.00	-20.28	-	-	peak
2	146.8392	29.21	-9.21	20.00	43.50	-23.50	-	-	peak
3	261.2730	28.99	-9.95	19.04	46.00	-26.96	-	-	peak
4	384.5447	29.44	-6.99	22.45	46.00	-23.55	-	-	peak
5	542.6104	29.98	-4.16	25.82	46.00	-20.18	-	-	peak
6	875.0133	29.95	1.72	31.67	46.00	-14.33	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

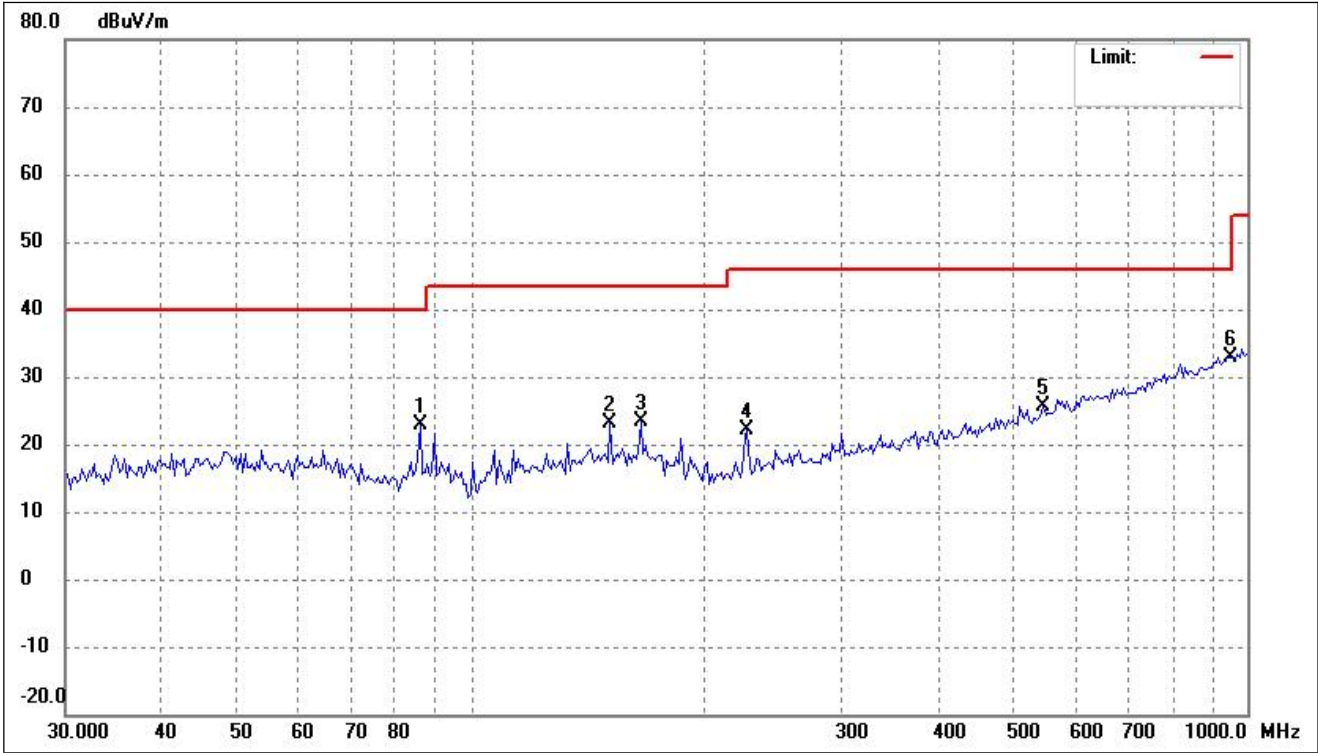


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	86.0796	36.08	-13.30	22.78	40.00	-17.22	-	-	peak
2	151.0252	32.04	-8.95	23.09	43.50	-20.41	-	-	peak
3	165.4716	32.43	-9.09	23.34	43.50	-20.16	-	-	peak
4	227.0164	34.05	-12.03	22.02	46.00	-23.98	-	-	peak
5	546.4368	29.72	-4.03	25.69	46.00	-20.31	-	-	peak
6	952.0001	29.83	3.15	32.98	46.00	-13.02	-	-	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

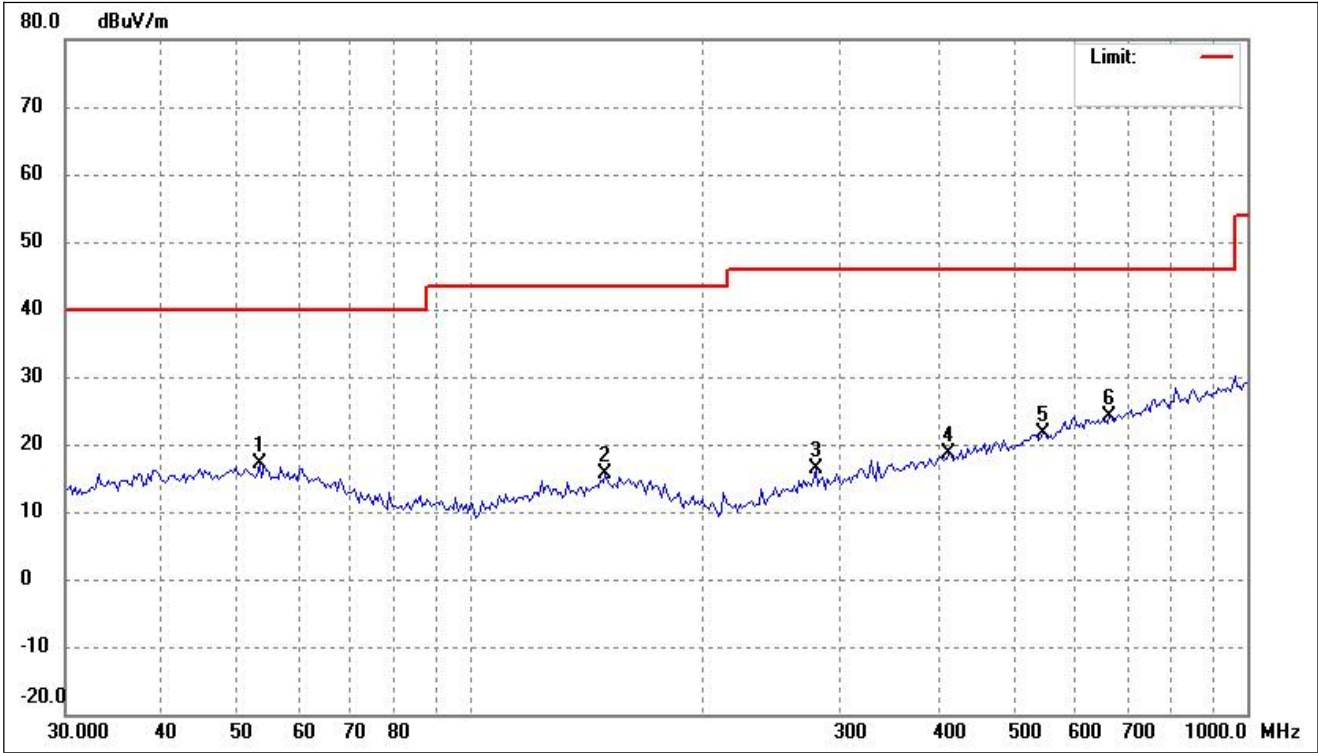

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.3794	25.39	-8.38	17.01	40.00	-22.99	-	-	peak
2	148.9175	24.57	-9.04	15.53	43.50	-27.97	-	-	peak
3	278.3308	25.69	-9.22	16.47	46.00	-29.53	-	-	peak
4	412.5395	25.11	-6.50	18.61	46.00	-27.39	-	-	peak
5	546.4368	25.77	-4.03	21.74	46.00	-24.26	-	-	peak
6	665.2610	25.77	-1.57	24.20	46.00	-21.80	-	-	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Vertical

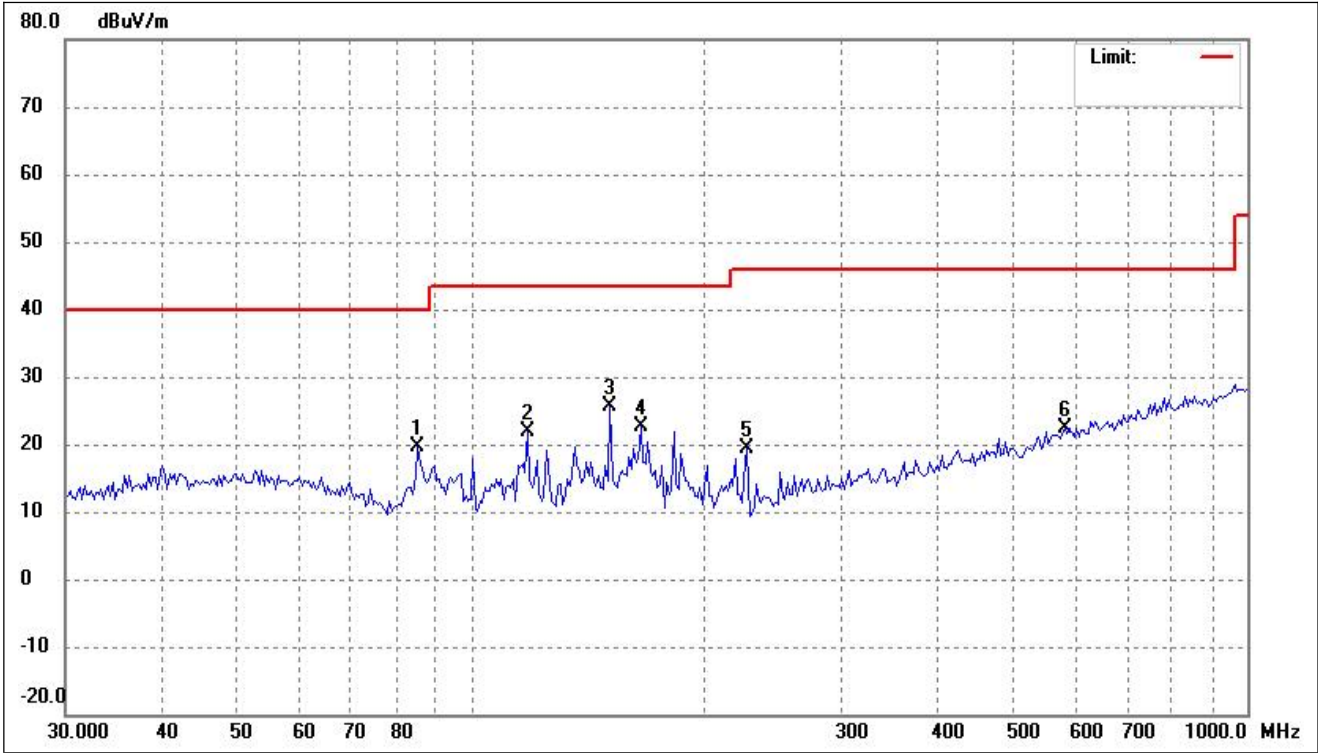


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	85.4769	32.94	-13.30	19.64	40.00	-20.36	-	-	peak
2	118.0957	33.03	-11.11	21.92	43.50	-21.58	-	-	peak
3	151.0252	34.51	-8.95	25.56	43.50	-17.94	-	-	peak
4	165.4716	31.84	-9.09	22.75	43.50	-20.75	-	-	peak
5	227.0164	31.46	-12.03	19.43	46.00	-26.57	-	-	peak
6	582.1122	25.35	-2.97	22.38	46.00	-23.62	-	-	peak

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

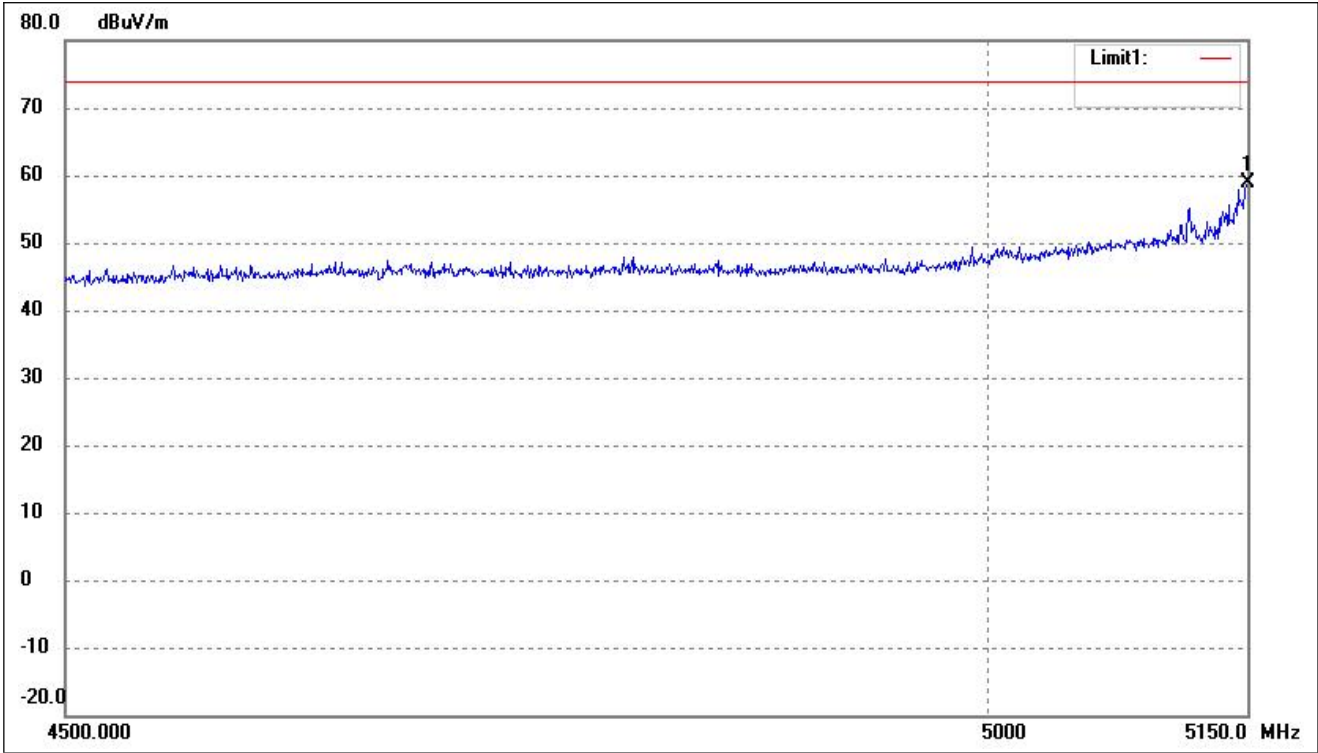


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	63.69	-4.77	58.92	74.00	-15.08	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

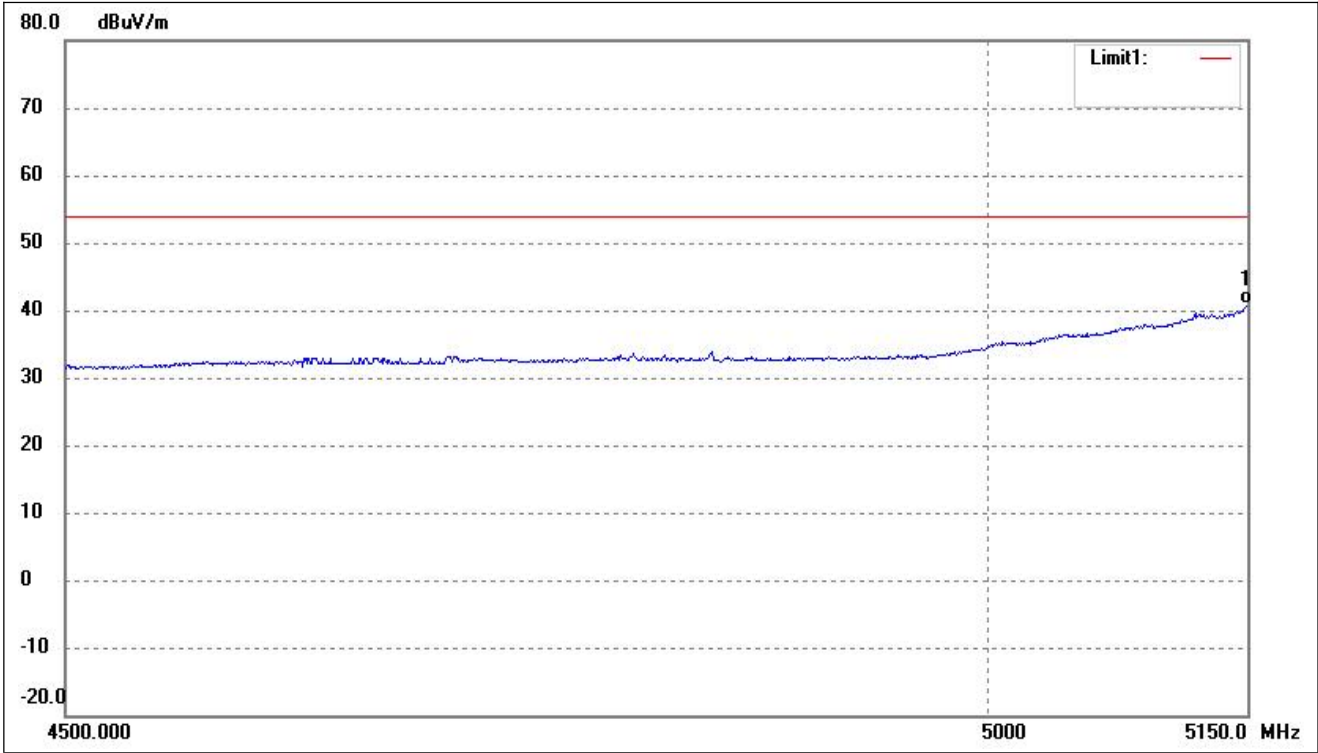


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	45.59	-4.77	40.82	54.00	-13.18	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

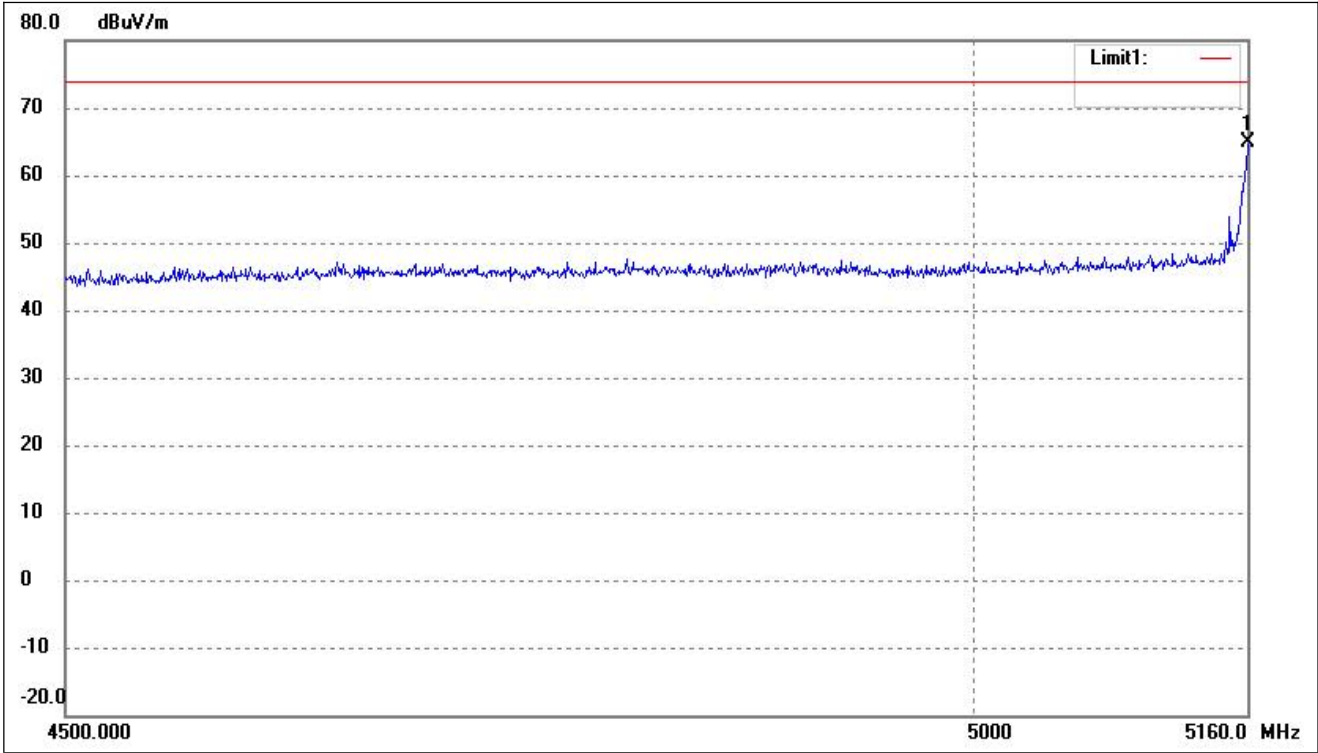


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5160.000	69.76	-4.76	65.00	74.00	-9.00	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

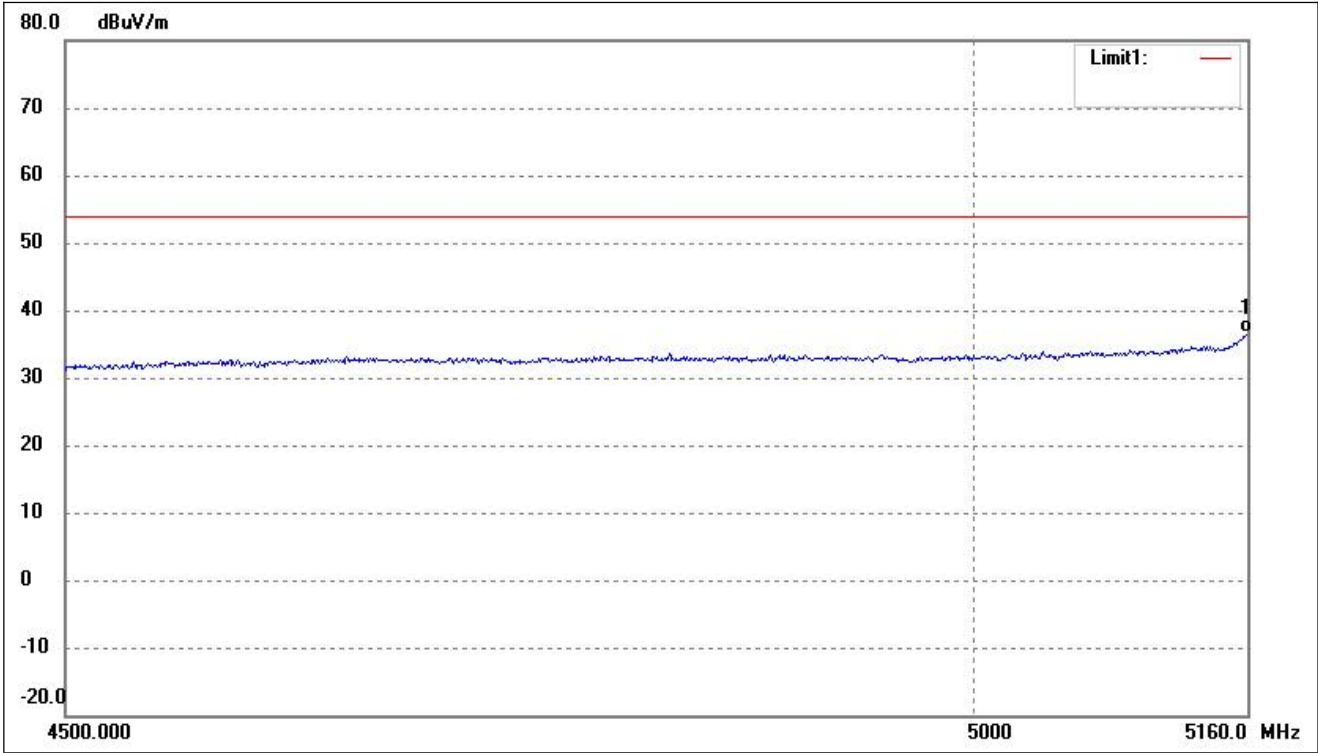


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5160.000	41.41	-4.76	36.65	54.00	-17.35	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

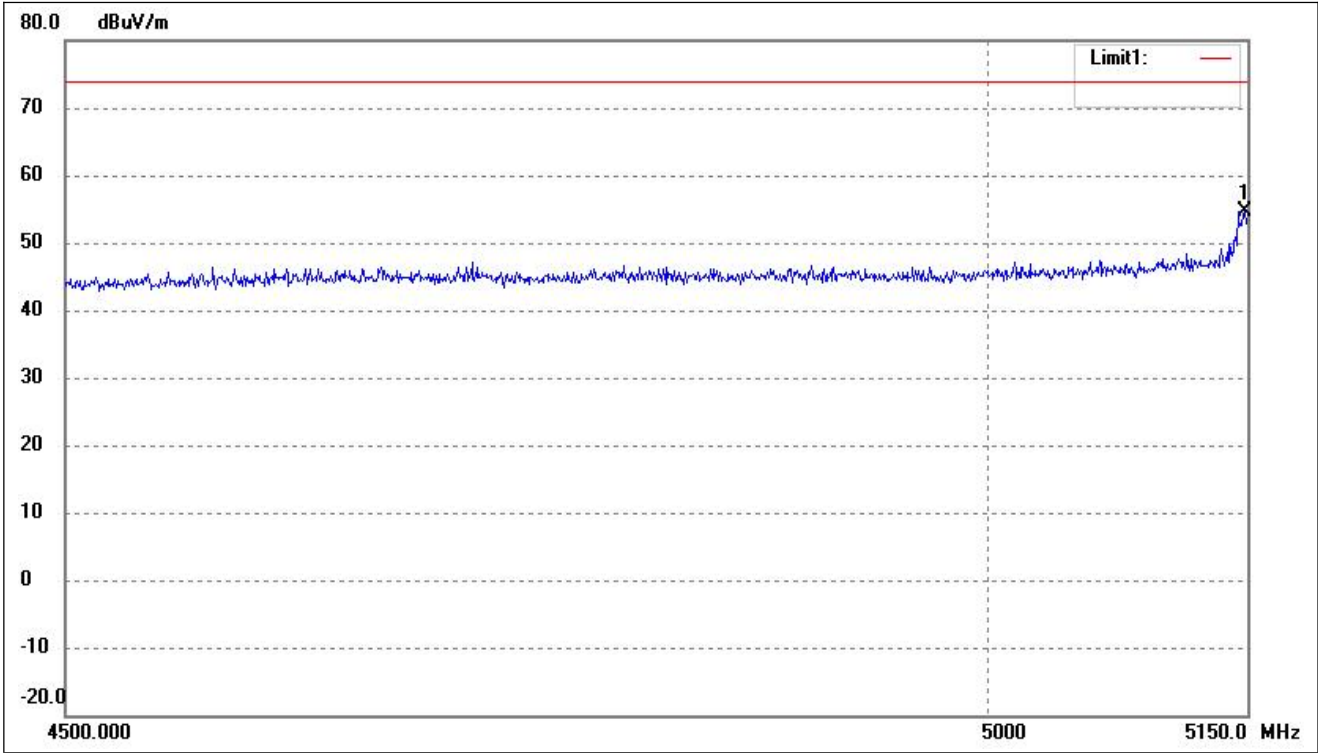


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5148.610	59.44	-4.77	54.67	74.00	-19.33	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

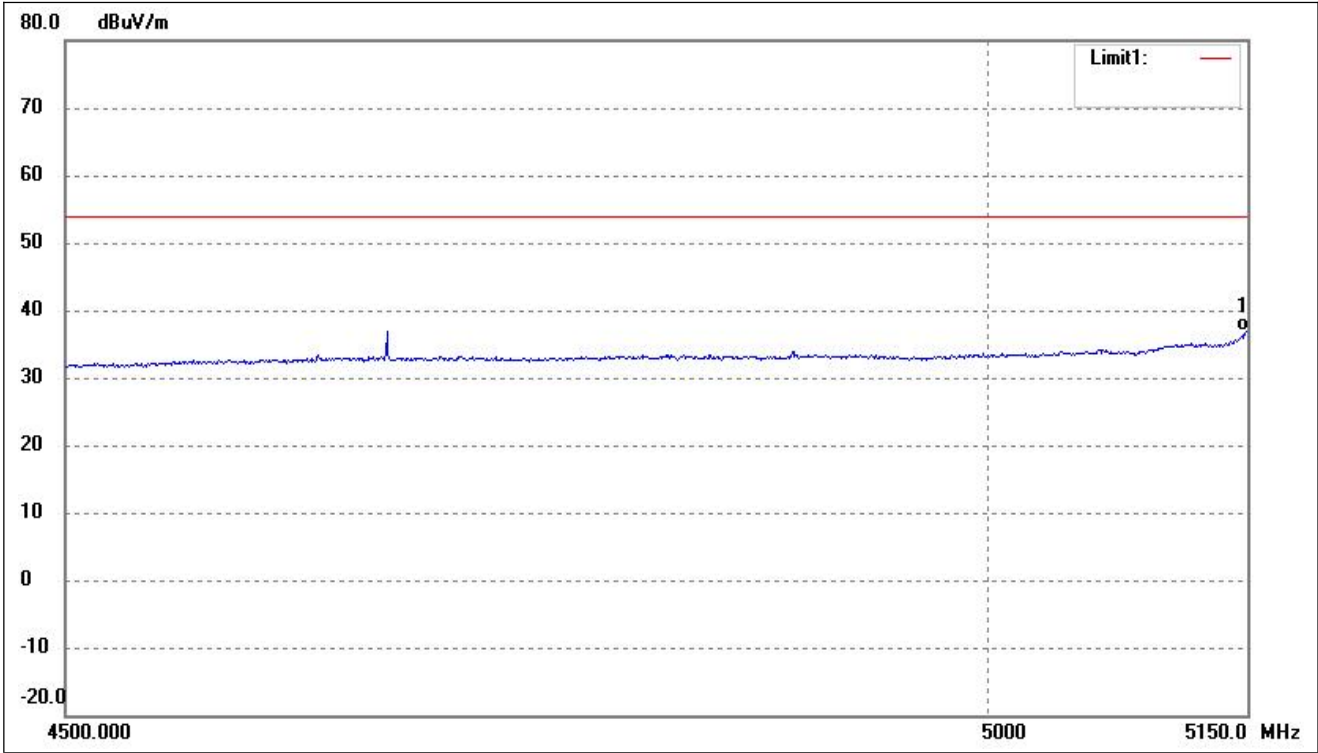


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	41.63	-4.77	36.86	54.00	-17.14	-	-	AVG

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

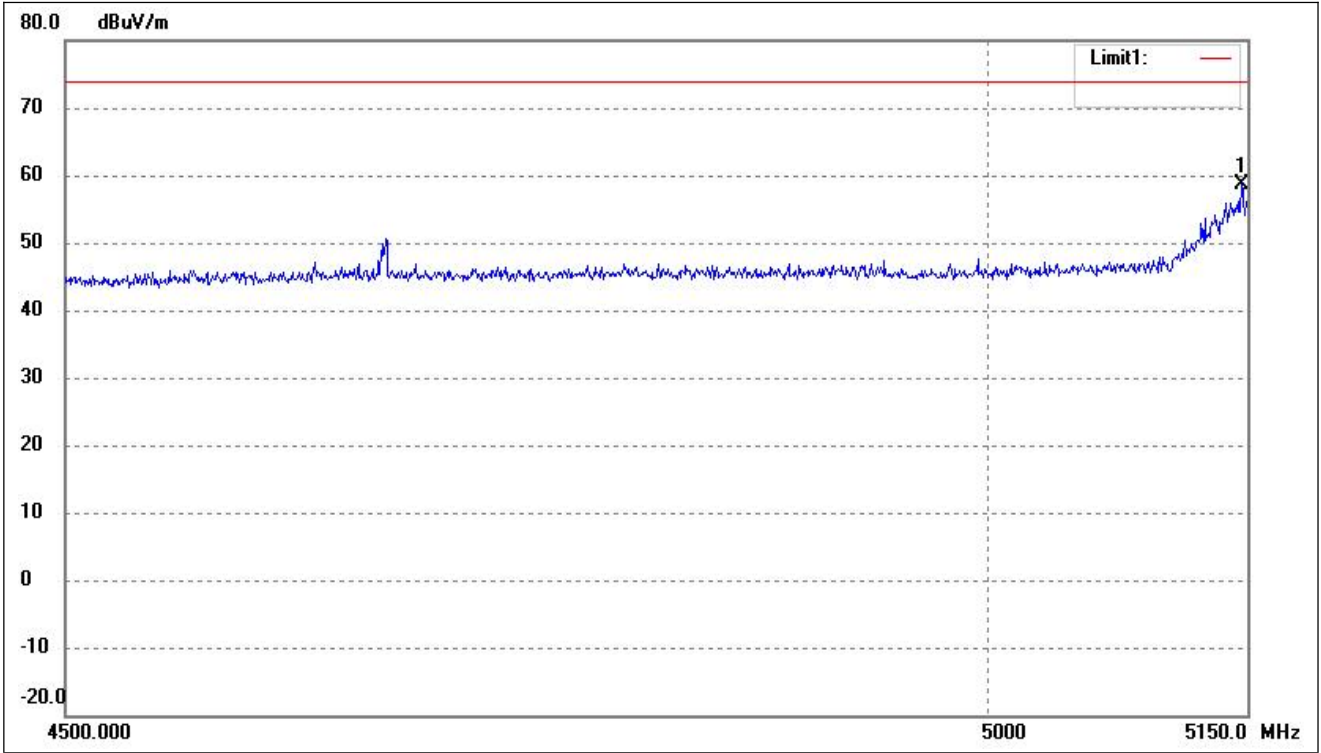

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5146.527	63.51	-4.78	58.73	74.00	-15.27	-	-	peak

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

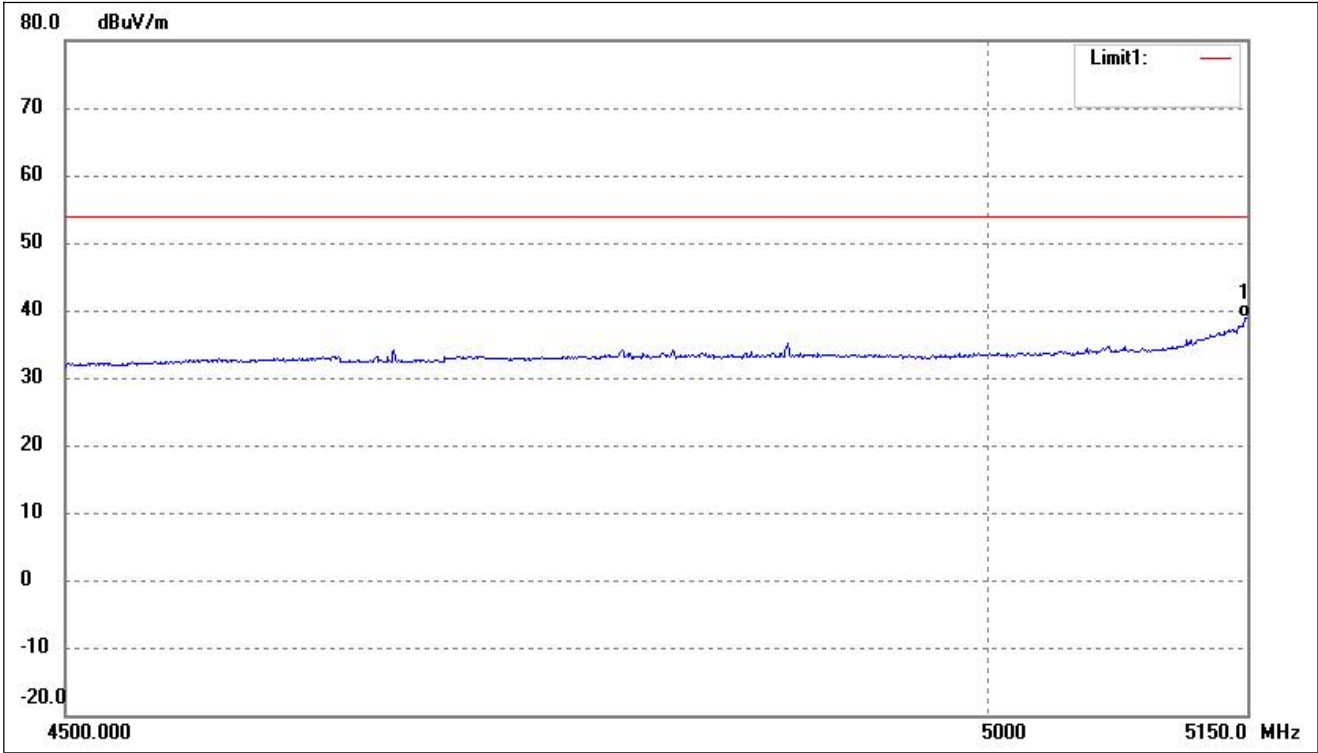


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5148.610	43.64	-4.77	38.87	54.00	-15.13	-	-	AVG

802.11a- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Horizontal (worst case)




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5480.000	59.43	-4.03	55.40	74.00	-18.60	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Horizontal (worst case)

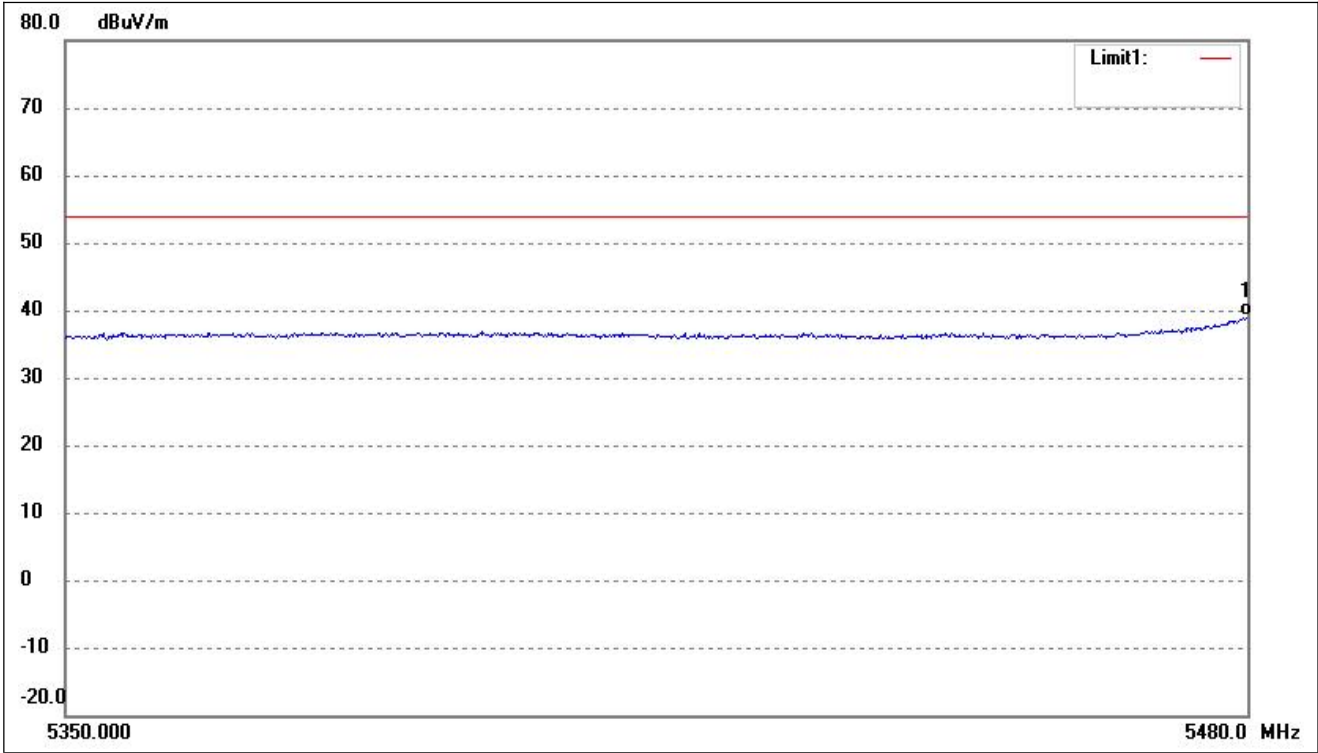


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5480.000	43.12	-4.03	39.09	54.00	-14.91	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Horizontal (worst case)

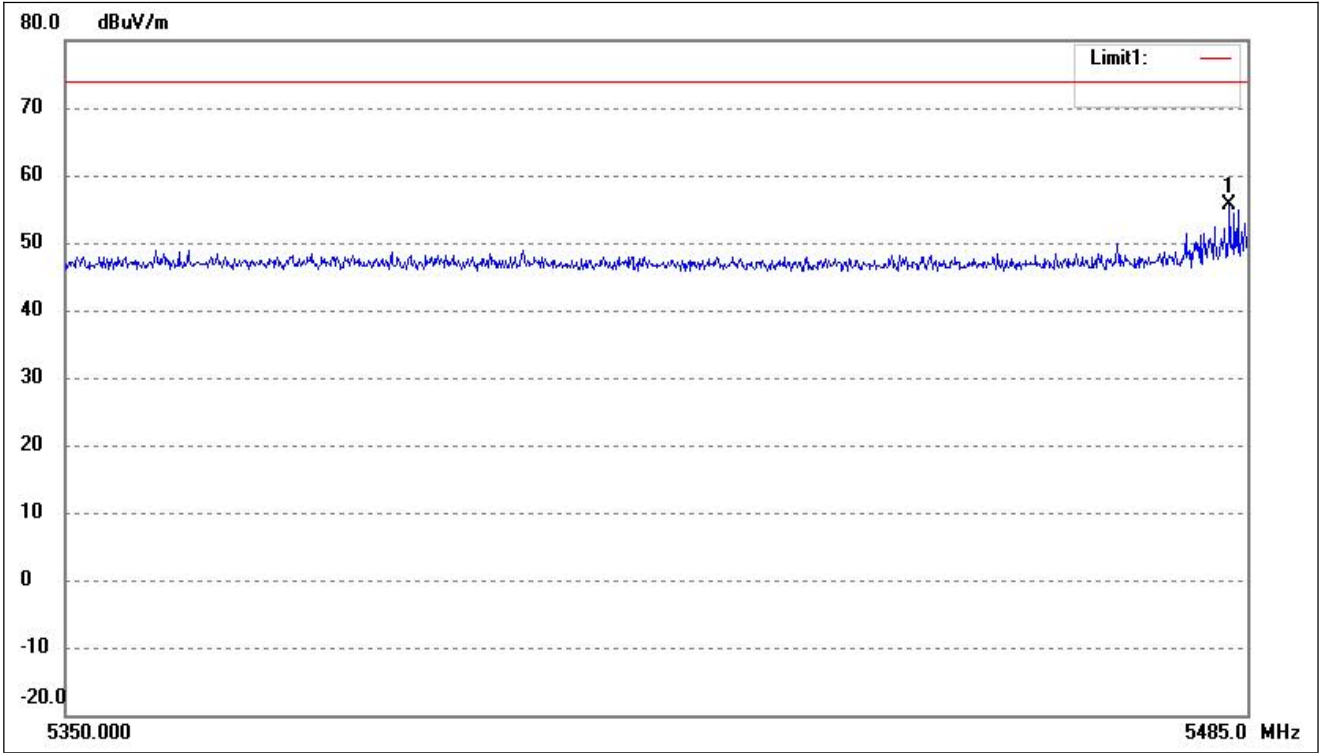


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5482.950	59.76	-4.02	55.74	74.00	-18.26	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Horizontal (worst case)

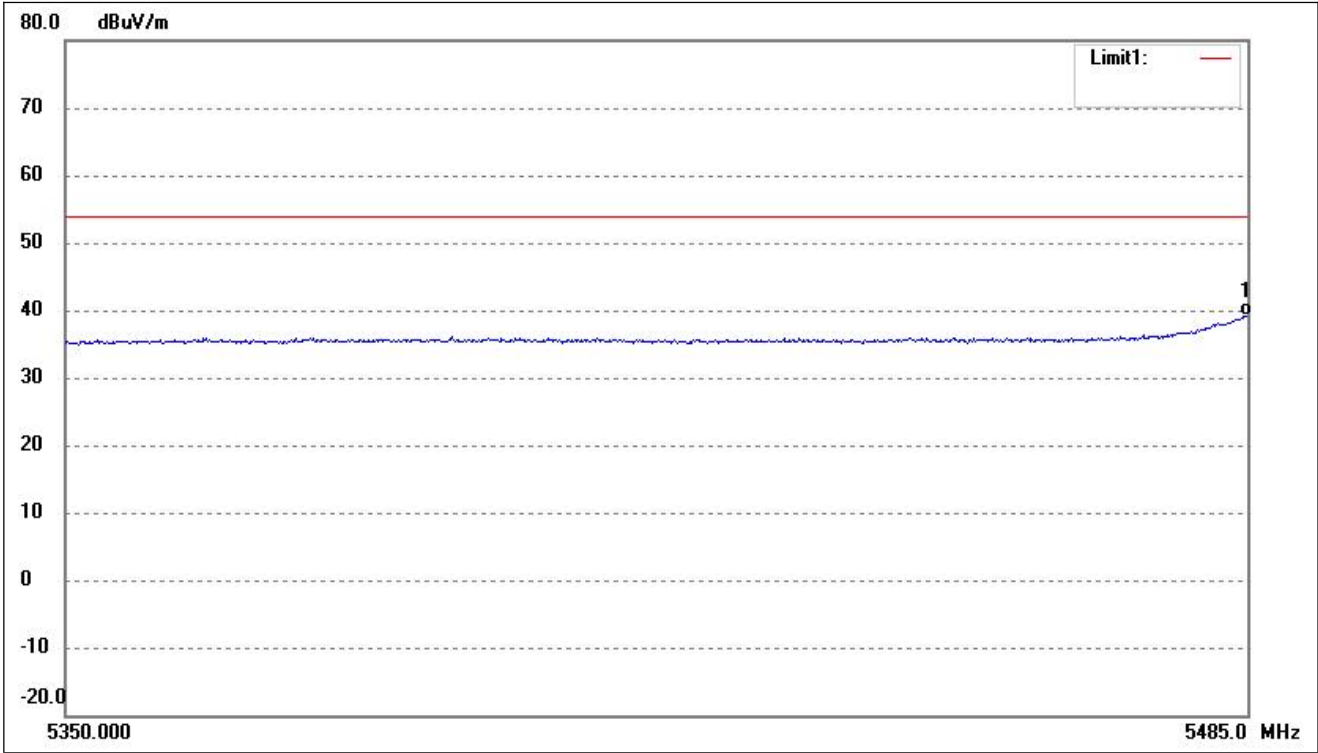


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5484.727	43.22	-4.02	39.20	54.00	-14.80	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Horizontal (worst case)

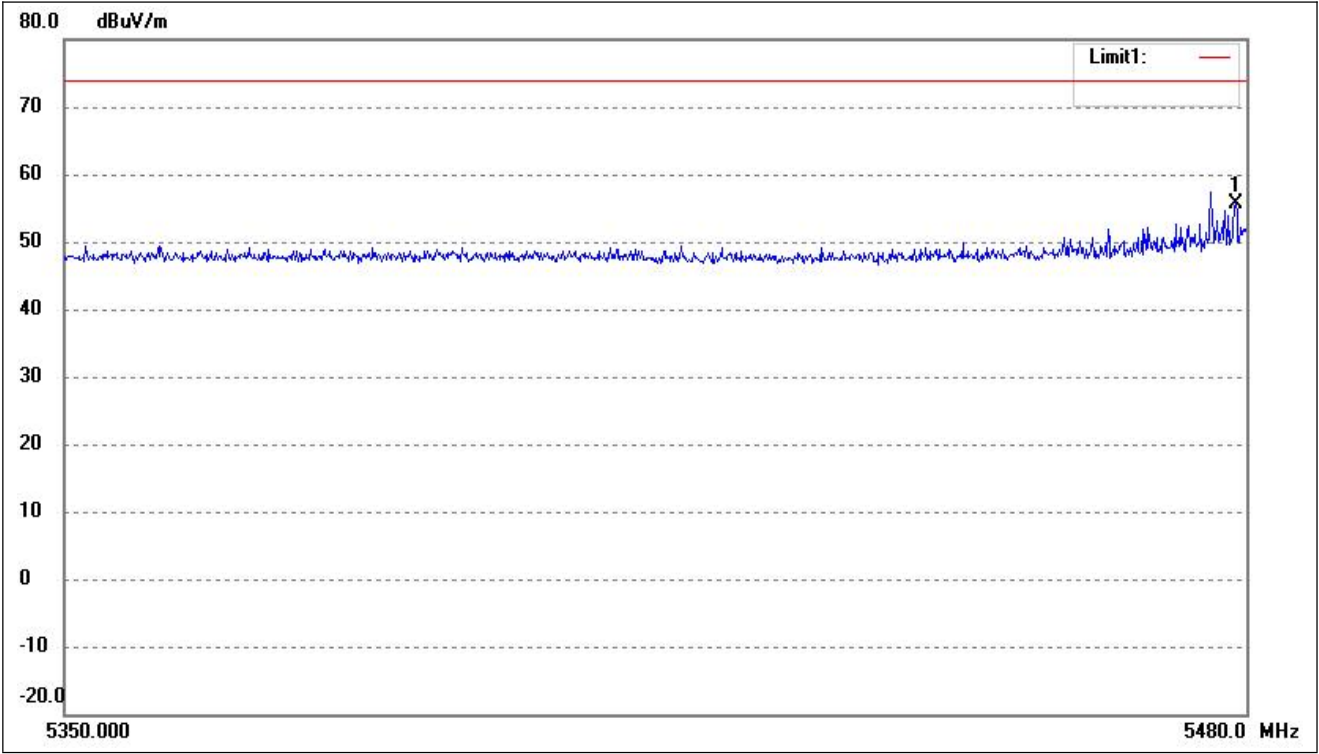


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5478.816	59.56	-4.03	55.53	74.00	-18.47	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Horizontal (worst case)

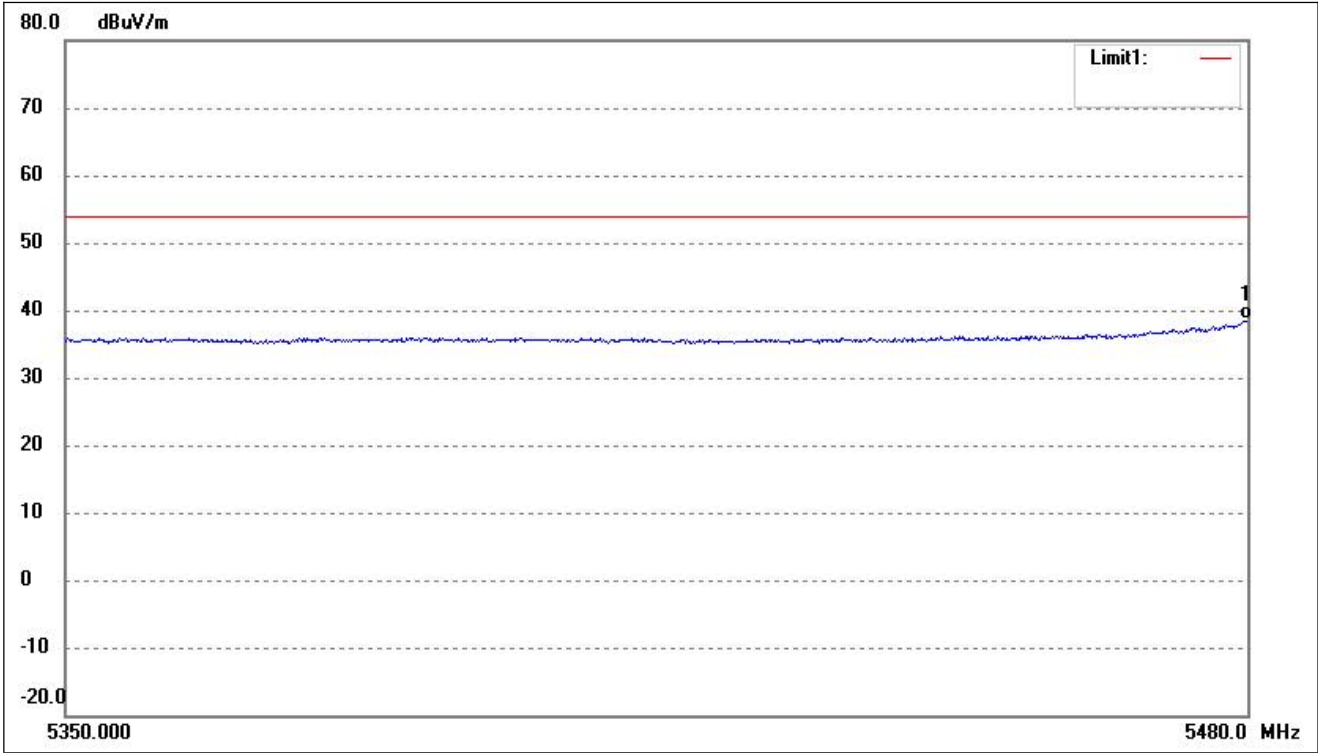


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5480.000	42.69	-4.03	38.66	54.00	-15.34	-	-	AVG

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Horizontal (worst case)

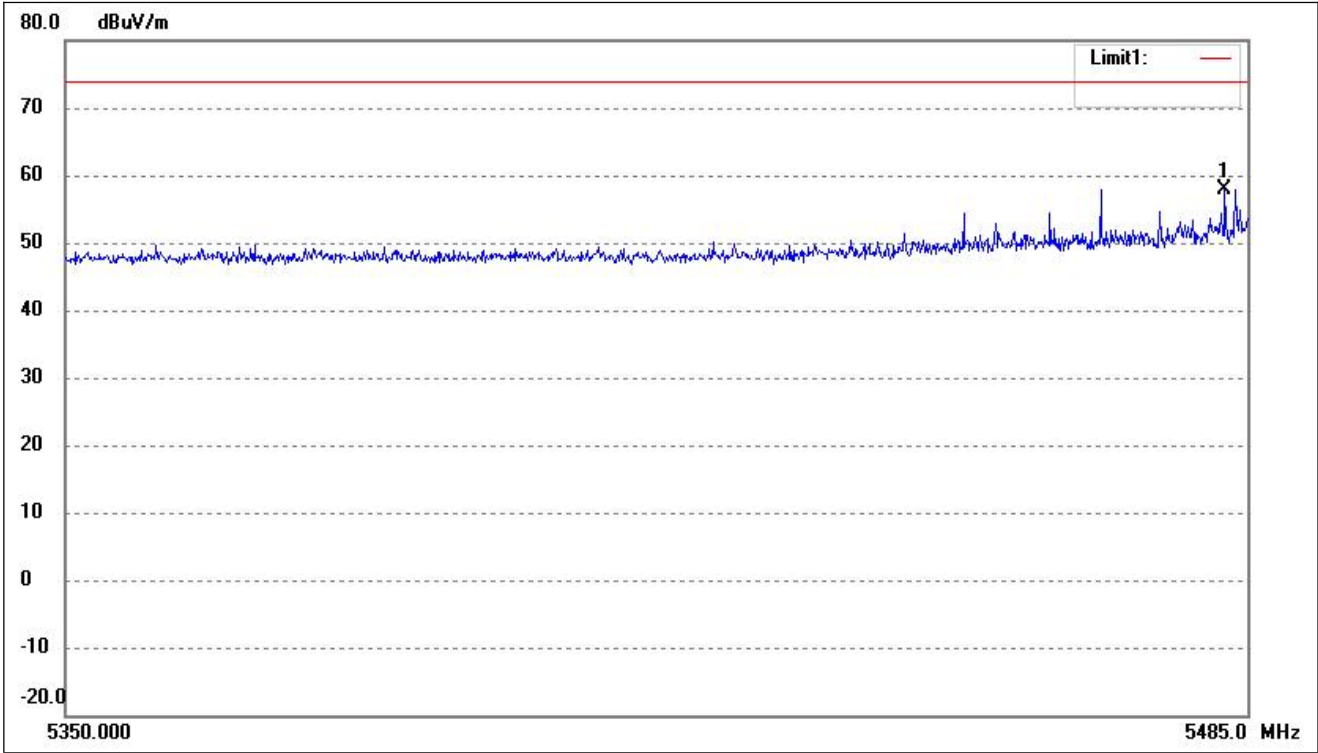

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5482.404	62.00	-4.02	57.98	74.00	-16.02	-	-	peak

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Horizontal (worst case)

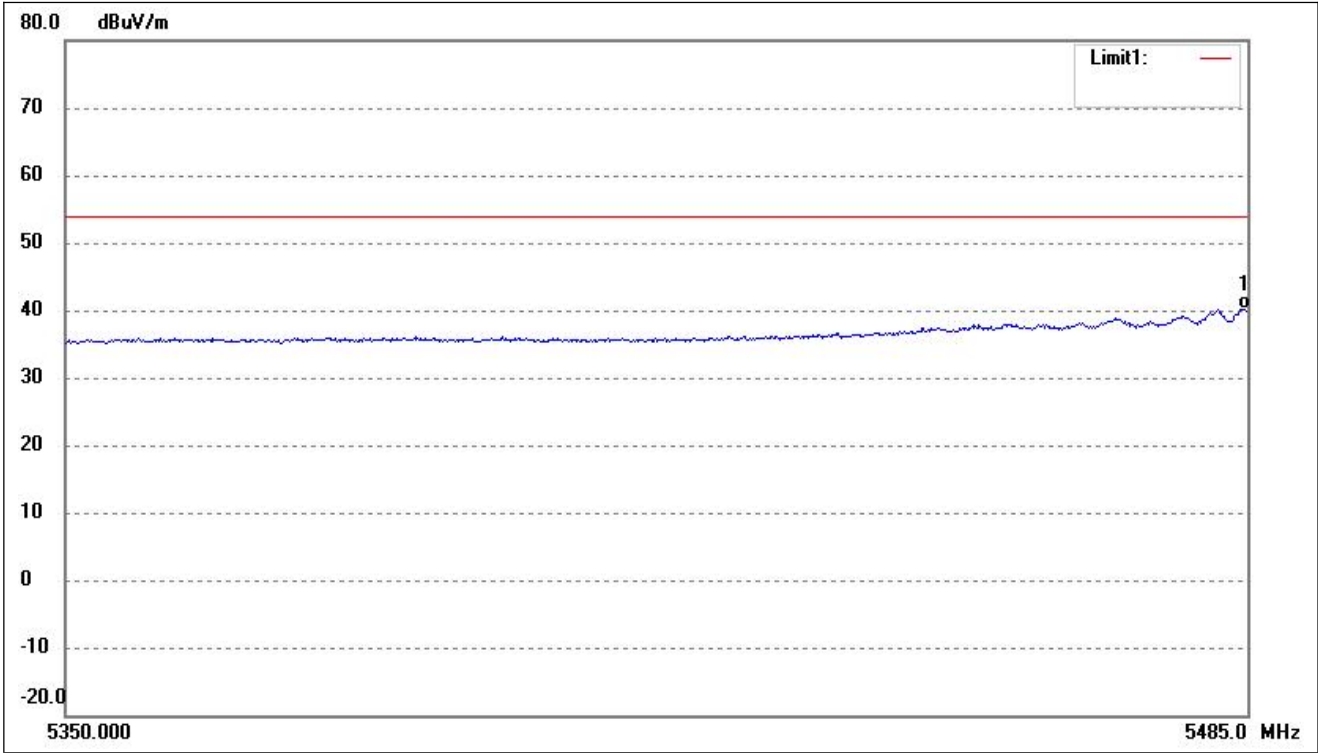

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5484.727	44.25	-4.02	40.23	54.00	-13.77	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	54.37	7.11	61.48	74	-12.52	H	PK
15540	39.21	7.11	46.32	54	-7.68	H	AV
10360	52.87	7.11	59.98	74	-14.02	V	PK
15540	37.25	7.11	44.36	54	-9.64	V	AV
Middle Channel (5200MHz)							
10400	53.99	7.22	61.21	74	-12.79	H	PK
15600	38.54	7.22	45.76	54	-8.24	H	AV
10400	54.56	7.22	61.78	74	-12.22	V	PK
15600	40.81	7.22	48.03	54	-5.97	V	AV
High Channel (5240MHz)							
10480	55.50	7.69	63.19	74	-10.81	H	PK
15720	38.22	7.69	45.91	54	-8.09	H	AV
10480	52.48	7.69	60.17	74	-13.83	V	PK
15720	39.98	7.69	47.67	54	-6.33	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	53.12	7.96	61.08	74	-12.92	H	PK
15780	40.49	7.96	48.45	54	-5.55	H	AV
10520	55.56	7.96	63.52	74	-10.48	V	PK
15780	37.43	7.96	45.39	54	-8.61	V	AV
Middle Channel (5280MHz)							
10560	55.44	8.02	63.46	74	-10.54	H	PK
15840	37.01	8.02	45.03	54	-8.97	H	AV
10560	54.69	8.02	62.71	74	-11.29	V	PK
15840	39.71	8.02	47.73	54	-6.27	V	AV
High Channel (5320MHz)							
10640	54.47	8.35	62.82	74	-11.18	H	PK
15960	38.64	8.35	46.99	54	-7.01	H	AV
10640	54.50	8.35	62.85	74	-11.15	V	PK
15960	37.85	8.35	46.20	54	-7.80	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	53.49	8.82	62.31	74	-11.69	H	PK
16500	38.79	8.82	47.61	54	-6.39	H	AV
11000	53.03	8.82	61.85	74	-12.15	V	PK
16500	39.06	8.82	47.88	54	-6.12	V	AV
Middle Channel (5600MHz)							
11200	54.17	8.92	63.09	74	-10.91	H	PK
16800	39.63	8.92	48.55	54	-5.45	H	AV
11200	55.45	8.92	64.37	74	-9.63	V	PK
16800	37.71	8.92	46.63	54	-7.37	V	AV
High Channel (5700MHz)							
11400	55.17	9.36	64.53	74	-9.47	H	PK
17100	38.72	9.36	48.08	54	-5.92	H	AV
11400	55.30	9.36	64.66	74	-9.34	V	PK
17100	38.05	9.36	47.41	54	-6.59	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	54.77	9.45	64.22	74	-9.78	H	PK
17235	38.85	9.45	48.30	54	-5.70	H	AV
11490	55.94	9.45	65.39	74	-8.61	V	PK
17235	39.67	9.45	49.12	54	-4.88	V	AV
Middle Channel (5785MHz)							
11570	52.97	9.62	62.59	74	-11.41	H	PK
17355	38.07	9.62	47.69	54	-6.31	H	AV
11570	55.30	9.62	64.92	74	-9.08	V	PK
17355	38.45	9.62	48.07	54	-5.93	V	AV
High Channel (5825MHz)							
11650	53.92	9.84	63.76	74	-10.24	H	PK
17475	36.32	9.84	46.16	54	-7.84	H	AV
11650	52.20	9.84	62.04	74	-11.96	V	PK
17475	37.63	9.84	47.47	54	-6.53	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-42.25	-27
Highest	Above 5350	-41.02	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-43.32	-27
Highest	Above 5350	-41.87	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-39.62	-27
Highest	Above 5725	-37.12	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-38.80	-27
	5650 to 5700	-37.52	-27 to -17
	5700 to 5720	-35.83	-17 to 15.6
	5720 to 5725	-37.52	15.6 to 27
Highest	5850 to 5855	-38.81	27 to 15.6
	5855 to 5875	-37.38	15.6 to -17
	5875 to 5925	-36.06	-17 to -27
	Above 5925	-37.48	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	52.89	7.11	60.00	74	-14.00	H	PK
10360	38.16	7.11	45.27	54	-8.73	H	AV
10360	54.60	7.11	61.71	74	-12.29	V	PK
10360	39.91	7.11	47.02	54	-6.98	V	AV
Middle Channel (5200MHz)							
10400	55.09	7.22	62.31	74	-11.69	H	PK
10400	38.49	7.22	45.71	54	-8.29	H	AV
10400	52.81	7.22	60.03	74	-13.97	V	PK
10400	37.77	7.22	44.99	54	-9.01	V	AV
High Channel (5240MHz)							
10480	54.96	7.69	62.65	74	-11.35	H	PK
10480	38.60	7.69	46.29	54	-7.71	H	AV
10480	54.33	7.69	62.02	74	-11.98	V	PK
10480	37.69	7.69	45.38	54	-8.62	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	52.79	7.96	60.75	74	-13.25	H	PK
10520	39.61	7.96	47.57	54	-6.43	H	AV
10520	55.60	7.96	63.56	74	-10.44	V	PK
10520	38.61	7.96	46.57	54	-7.43	V	AV
Middle Channel (5280MHz)							
10560	53.99	8.02	62.01	74	-11.99	H	PK
10560	38.82	8.02	46.84	54	-7.16	H	AV
10560	54.94	8.02	62.96	74	-11.04	V	PK
10560	37.13	8.02	45.15	54	-8.85	V	AV
High Channel (5320MHz)							
10640	53.07	8.35	61.42	74	-12.58	H	PK
10640	40.22	8.35	48.57	54	-5.43	H	AV
10640	52.49	8.35	60.84	74	-13.16	V	PK
10640	40.66	8.35	49.01	54	-4.99	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	52.56	8.82	61.38	74	-12.62	H	PK
11000	38.05	8.82	46.87	54	-7.13	H	AV
11000	52.99	8.82	61.81	74	-12.19	V	PK
11000	38.93	8.82	47.75	54	-6.25	V	AV
Middle Channel (5600MHz)							
11200	52.98	8.92	61.90	74	-12.10	H	PK
11200	38.11	8.92	47.03	54	-6.97	H	AV
11200	53.24	8.92	62.16	74	-11.84	V	PK
11200	39.19	8.92	48.11	54	-5.89	V	AV
High Channel (5700MHz)							
11400	55.35	9.84	65.19	74	-8.81	H	PK
11400	38.99	9.84	48.83	54	-5.17	H	AV
11400	55.76	9.84	65.60	74	-8.40	V	PK
11400	39.75	9.84	49.59	54	-4.41	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	52.52	9.45	61.97	74	-12.03	H	PK
11490	40.73	9.45	50.18	54	-3.82	H	AV
11490	54.75	9.45	64.20	74	-9.80	V	PK
11490	38.90	9.45	48.35	54	-5.65	V	AV
Middle Channel (5785MHz)							
11570	56.35	9.62	65.97	74	-8.03	H	PK
11570	40.03	9.62	49.65	54	-4.35	H	AV
11570	52.79	9.62	62.41	74	-11.59	V	PK
11570	39.59	9.62	49.21	54	-4.79	V	AV
High Channel (5825MHz)							
11650	55.62	9.84	65.46	74	-8.54	H	PK
11650	38.17	9.84	48.01	54	-5.99	H	AV
11650	53.52	9.84	63.36	74	-10.64	V	PK
11650	35.97	9.84	45.81	54	-8.19	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.52	-27
Highest	Above 5350	-41.02	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.25	-27
Highest	Above 5350	-42.65	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-37.12	-27
Highest	Above 5725	-39.31	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-38.92	-27
	5650 to 5700	-37.48	-27 to -17
	5700 to 5720	-35.74	-17 to 15.6
	5720 to 5725	-37.34	15.6 to 27
Highest	5850 to 5855	-38.98	27 to 15.6
	5855 to 5875	-37.23	15.6 to -17
	5875 to 5925	-35.77	-17 to -27
	Above 5925	-37.39	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	53.05	7.89	60.94	74	-13.06	H	PK
10380	39.83	7.89	47.72	54	-6.28	H	AV
10380	53.74	7.89	61.63	74	-12.37	V	PK
10380	40.58	7.89	48.47	54	-5.53	V	AV
High Channel (5230MHz)							
10460	54.75	7.97	62.72	74	-11.28	H	PK
10460	40.44	7.97	48.41	54	-5.59	H	AV
10460	54.49	7.97	62.46	74	-11.54	V	PK
10460	37.57	7.97	45.54	54	-8.46	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5270MHz)							
10540	53.29	8.16	61.45	74	-12.55	H	PK
10540	38.65	8.16	46.81	54	-7.19	H	AV
10540	53.83	8.16	61.99	74	-12.01	V	PK
10540	40.20	8.16	48.36	54	-5.64	V	AV
High Channel (5310MHz)							
10620	52.99	8.57	61.56	74	-12.44	H	PK
10620	37.49	8.57	46.06	54	-7.94	H	AV
10620	55.27	8.57	63.84	74	-10.16	V	PK
10620	37.83	8.57	46.40	54	-7.60	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5510MHz)							
11020	54.12	9.16	63.28	74	-10.72	H	PK
11020	38.11	9.16	47.27	54	-6.73	H	AV
11020	53.96	9.16	63.12	74	-10.88	V	PK
11020	39.74	9.16	48.90	54	-5.10	V	AV
Middle Channel (5590MHz)							
11180	52.68	9.29	61.97	74	-12.03	H	PK
11180	40.41	9.29	49.70	54	-4.30	H	AV
11180	55.95	9.29	65.24	74	-8.76	V	PK
11180	37.26	9.29	46.55	54	-7.45	V	AV
High Channel (5670MHz)							
11340	54.45	9.43	63.88	74	-10.12	H	PK
11340	37.61	9.43	47.04	54	-6.96	H	AV
11340	55.26	9.43	64.69	74	-9.31	V	PK
11340	40.77	9.43	50.20	54	-3.80	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	52.80	9.45	62.25	74	-11.75	H	PK
11510	38.68	9.45	48.13	54	-5.87	H	AV
11510	53.03	9.45	62.48	74	-11.52	V	PK
11510	41.49	9.45	50.94	54	-3.06	V	AV
High Channel (5795MHz)							
11590	52.90	9.27	62.17	74	-11.83	H	PK
11590	39.10	9.27	48.37	54	-5.63	H	AV
11590	53.03	9.27	62.30	74	-11.70	V	PK
11590	36.20	9.27	45.47	54	-8.53	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.52	-27
Highest	Above 5350	-37.12	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.52	-27
Highest	Above 5350	-37.34	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-35.96	-27
Highest	Above 5725	-37.04	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-39.05	-27
	5650 to 5700	-37.49	-27 to -17
	5700 to 5720	-35.92	-17 to 15.6
	5720 to 5725	-37.14	15.6 to 27
Highest	5850 to 5855	-39.14	27 to 15.6
	5855 to 5875	-37.56	15.6 to -17
	5875 to 5925	-35.98	-17 to -27
	Above 5925	-37.54	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	55.62	7.53	63.15	74	-10.85	H	PK
10420	38.56	7.53	46.09	54	-7.91	H	AV
10420	54.89	7.53	62.42	74	-11.58	H	PK
10420	37.83	7.53	45.36	54	-8.64	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5290MHz							
10580	55.94	7.95	63.89	74	-10.11	H	PK
10580	39.12	7.95	47.07	54	-6.93	H	AV
10580	52.58	7.95	60.53	74	-13.47	V	PK
10580	39.03	7.95	46.98	54	-7.02	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5530MHz)							
11060	55.51	9.42	64.93	74	-9.07	H	PK
11060	37.81	9.42	47.23	54	-6.77	H	AV
11060	53.03	9.42	62.45	74	-11.55	V	PK
11060	38.08	9.42	47.50	54	-6.50	V	AV
High Channel (5610MHz)							
11220	52.60	9.69	62.29	74	-11.71	H	PK
11220	38.55	9.69	48.24	54	-5.76	H	AV
11220	54.86	9.69	64.55	74	-9.45	V	PK
11220	38.81	9.69	48.50	54	-5.50	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	55.35	9.93	65.28	74	-8.72	H	PK
11550	38.73	9.93	48.66	54	-5.34	H	AV
11550	52.24	9.93	62.17	74	-11.83	V	PK
11550	40.14	9.93	50.07	54	-3.93	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.25	-27
Highest	Above 5350	-36.21	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.48	-27
Highest	Above 5350	-36.12	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-39.65	-27
Highest	Above 5725	-37.15	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-38.79	-27
	5650 to 5700	-37.30	-27 to -17
	5700 to 5720	-35.83	-17 to 15.6
	5720 to 5725	-37.34	15.6 to 27
Highest	5850 to 5855	-38.78	27 to 15.6
	5855 to 5875	-37.56	15.6 to -17
	5875 to 5925	-35.98	-17 to -27
	Above 5925	-37.52	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40Ghz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

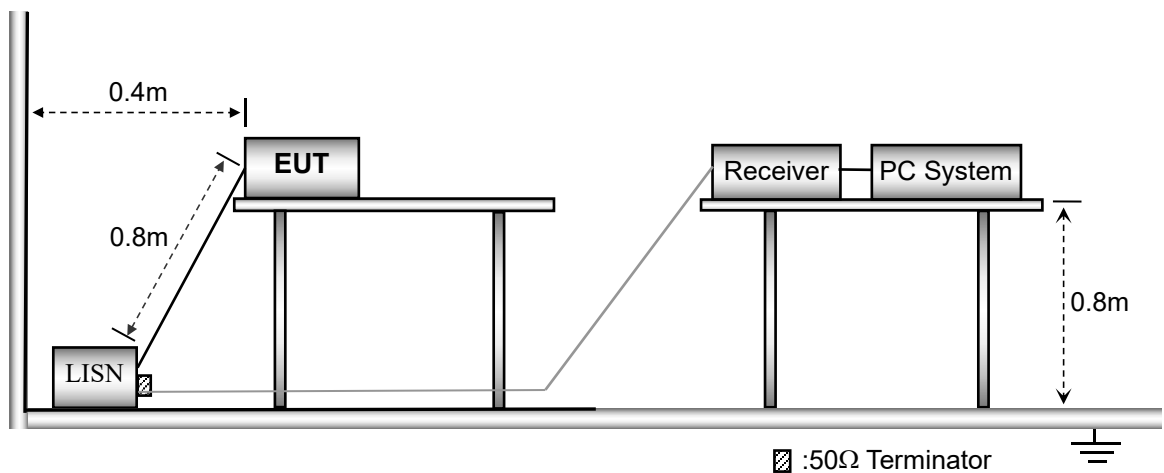
10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram




10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150kHz
Stop Frequency.....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth.....	9kHz
Quasi-Peak Adapter Mode.....	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

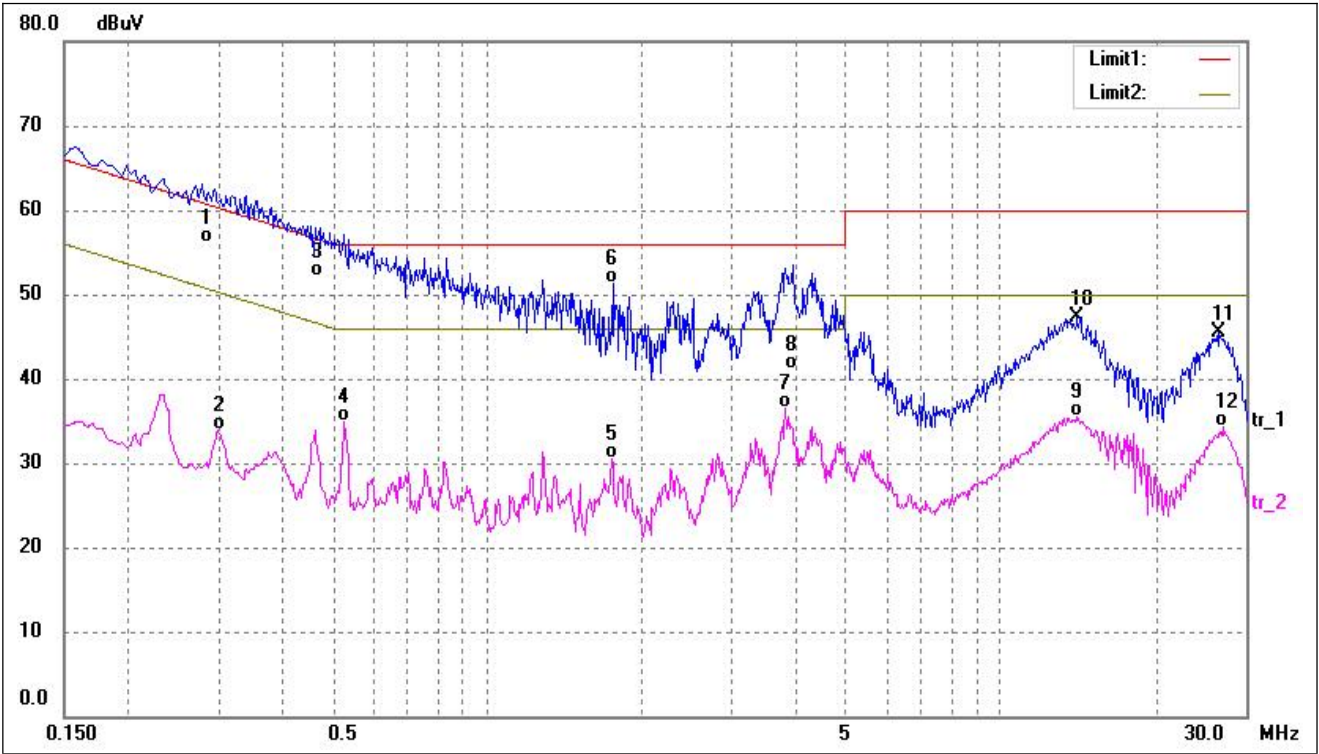

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2780	45.95	10.25	56.20	60.88	-4.68	QP
2	0.2980	23.64	10.24	33.88	50.30	-16.42	AVG
3*	0.4700	41.88	10.23	52.11	56.51	-4.40	QP
4	0.5260	24.72	10.22	34.94	46.00	-11.06	AVG
5	1.7500	20.23	10.23	30.46	46.00	-15.54	AVG
6	1.7540	41.02	10.23	51.25	56.00	-4.75	QP
7	3.8060	26.24	10.30	36.54	46.00	-9.46	AVG
8	3.9340	30.72	10.30	41.02	56.00	-14.98	QP
9	14.0220	25.18	10.26	35.44	50.00	-14.56	AVG
10	14.0660	37.08	10.26	47.34	60.00	-12.66	peak
11	26.6540	35.10	10.39	45.49	60.00	-14.51	peak
12	27.1140	23.98	10.40	34.38	50.00	-15.62	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

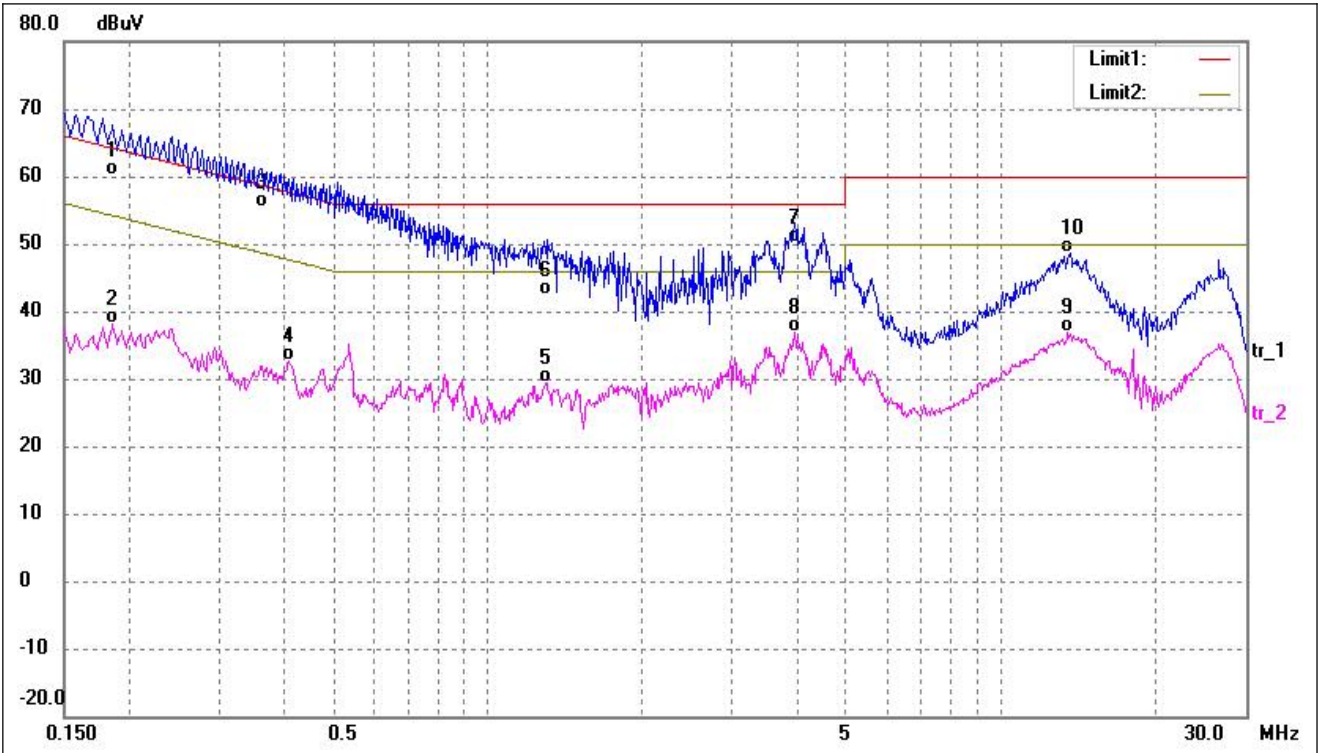

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1859	49.81	10.31	60.12	64.21	-4.09	QP
2	0.1859	27.90	10.31	38.21	54.21	-16.00	AVG
3*	0.3619	45.09	10.23	55.32	58.68	-3.36	QP
4	0.4099	22.45	10.22	32.67	47.65	-14.98	AVG
5	1.3060	19.24	10.17	29.41	46.00	-16.59	AVG
6	1.3140	32.19	10.17	42.36	56.00	-13.64	QP
7	3.9820	39.80	10.30	50.10	56.00	-5.90	QP
8	3.9820	26.48	10.30	36.78	46.00	-9.22	AVG
9	13.4860	26.73	10.27	37.00	50.00	-13.00	AVG
10	13.6300	38.47	10.27	48.74	60.00	-11.26	QP

APPENDIX SUMMARY

Project No.	WTX22X12260158W	Test Engineer	Gala Wang
Start date	2023/2/12	Finish date	2023/2/14
Temperature	23℃	Humidity	43%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A




Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	5.04	11
	5200	5.15	11
	5240	7.12	11
802.11n-HT20	5180	2.92	11
	5200	3.79	11
	5240	4.34	11
802.11n-HT40	5190	0.97	11
	5230	1.18	11
802.11ac-HT80	5210	-3.36	11

U-NII-2A: 5250-5350MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5260	6.46	11
	5280	6.38	11
	5320	7.02	11
802.11n-HT20	5260	3.70	11
	5280	4.22	11
	5320	4.03	11
802.11n-HT40	5270	0.02	11
	5310	1.12	11
802.11ac-HT80	5290	-2.24	11

U-NII-2C: 5470-5725MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5500	4.84	11
	5580	5.66	11
	5700	5.78	11
802.11n-HT20	5500	3.23	11
	5580	4.51	11
	5700	4.02	11
802.11n-HT40	5510	0.32	11
	5550	1.15	11
	5670	1.17	11
802.11ac-HT80	5530	-2.95	11
	5610	-2.25	11

U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	6.07	2.22	8.29	30
	5785	6.12	2.22	8.34	30
	5825	6.39	2.22	8.61	30
802.11n-HT20	5745	3.80	2.22	6.02	30
	5785	4.07	2.22	6.29	30
	5825	4.18	2.22	6.40	30
802.11n HT40	5755	-0.19	2.22	2.03	30
	5795	1.18	2.22	3.40	30
802.11ac VH80	5775	-2.43	2.22	-0.21	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

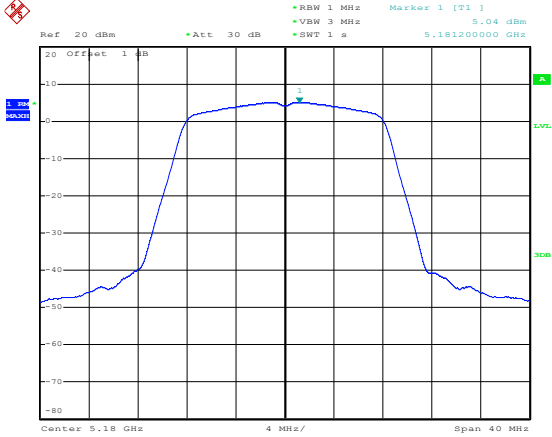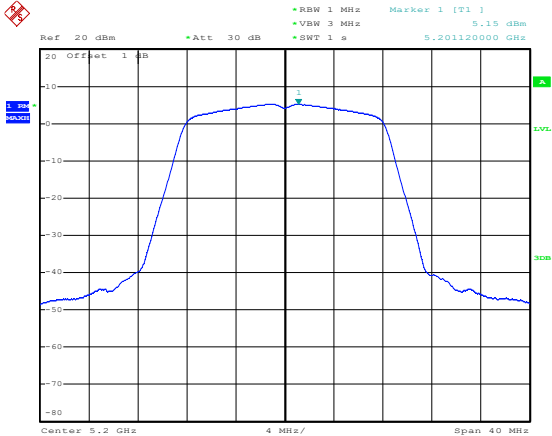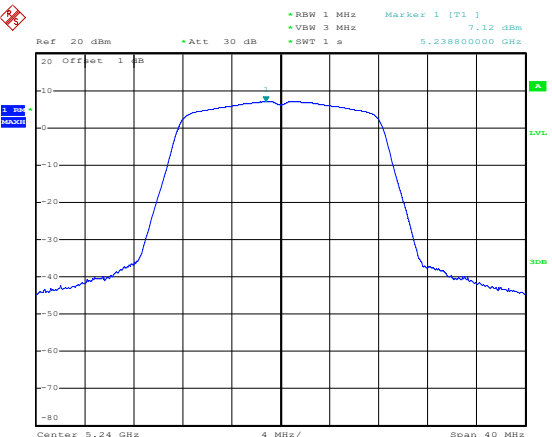5150-5250MHz

802.11a-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 5.04 dBm, 5.1820000 GHz Center 5.18 GHz, 4 MHz/, Span 40 MHz Date: 14.FEB.2023 09:36:57
802.11a-Middle	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 5.15 dBm, 5.2012000 GHz Center 5.2 GHz, 4 MHz/, Span 40 MHz Date: 14.FEB.2023 09:37:35
802.11a-High	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 7.12 dBm, 5.2380000 GHz Center 5.24 GHz, 4 MHz/, Span 40 MHz Date: 14.FEB.2023 09:37:59

802.11n-HT20-Low

802.11n-HT20-Middle

802.11n-HT20-High

The figure displays three spectral plots for 802.11n-HT20 channels, each showing a flat noise floor with a sharp peak at the center frequency. The plots are arranged vertically, corresponding to Low, Middle, and High frequency bands. Each plot includes a title, a date, and a time stamp. The plots are generated using a spectrum analyzer with a resolution bandwidth (RBW) of 1 MHz, a video bandwidth (VBW) of 3 MHz, and a sweep time (SWT) of 1 s. The center frequency is 5.18 GHz for the Low band, 5.20125 GHz for the Middle band, and 5.241 GHz for the High band. The power level is 20 dBm, and the attenuation is 30 dB. The plots show a flat noise floor with a sharp peak at the center frequency, indicating a clean signal.

Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 2.92 dBm, 5.181040000 GHz

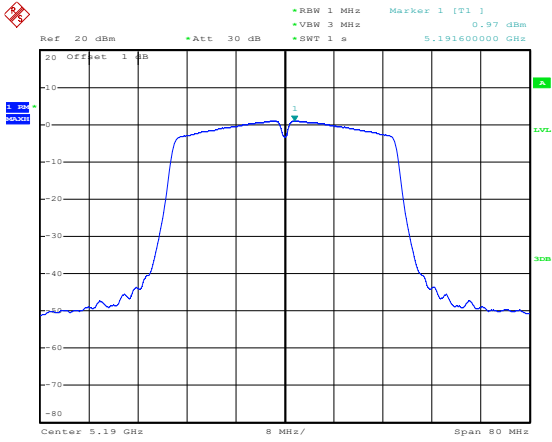
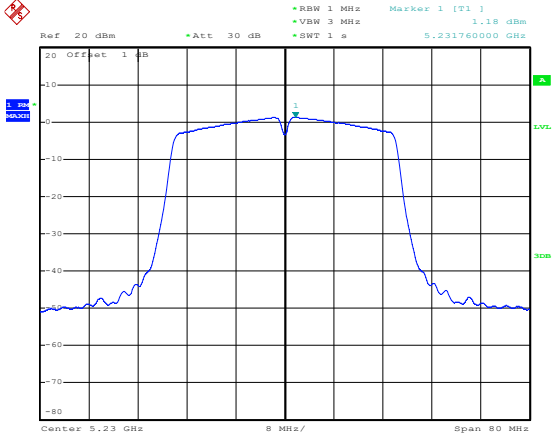
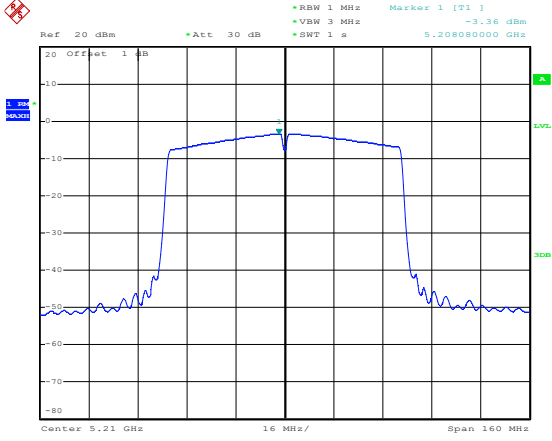
Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 3.79 dBm, 5.201250000 GHz

Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 4.34 dBm, 5.241040000 GHz




Date: 14.FEB.2023 09:41:22




Date: 14.FEB.2023 09:43:15




Date: 14.FEB.2023 09:44:16

802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 0.97 dBm *VSW 3 MHz *SWT 1 s 5.19160000 GHz 20 Offset 1 dB Center 5.19 GHz 8 MHz/ Span 80 MHz Date: 14.FEB.2023 09:45:03
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.18 dBm *VSW 3 MHz *SWT 1 s 5.23176000 GHz 20 Offset 1 dB Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 14.FEB.2023 09:46:22
802.11ac-HT80-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -3.36 dBm *VSW 3 MHz *SWT 1 s 5.20808000 GHz 20 Offset 1 dB Center 5.21 GHz 16 MHz/ Span 160 MHz Date: 14.FEB.2023 09:35:08

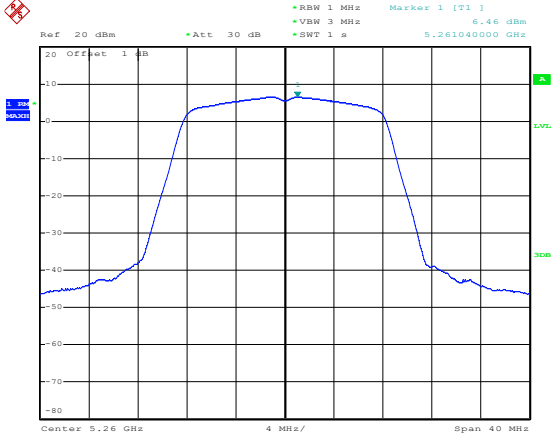
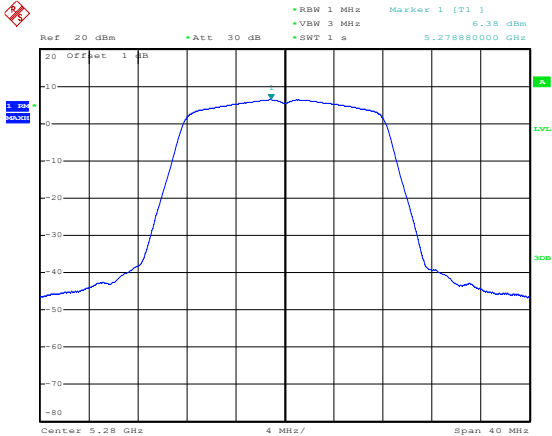
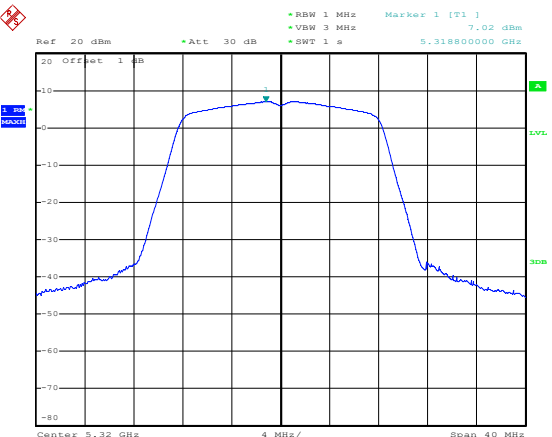
5250-5350MHz




802.11a-Low	 Date: 15.FEB.2023 16:27:42
802.11a-Middle	 Date: 15.FEB.2023 16:28:08
802.11a-High	 Date: 15.FEB.2023 16:49:23

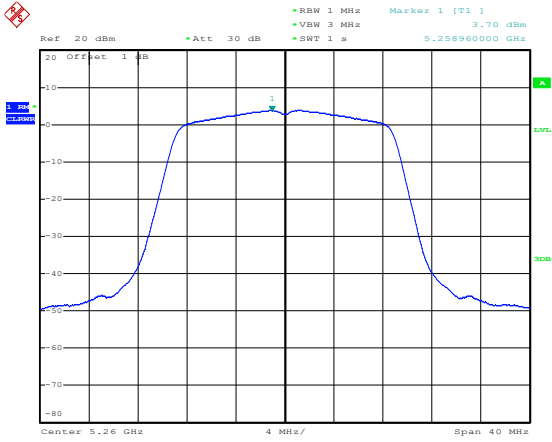
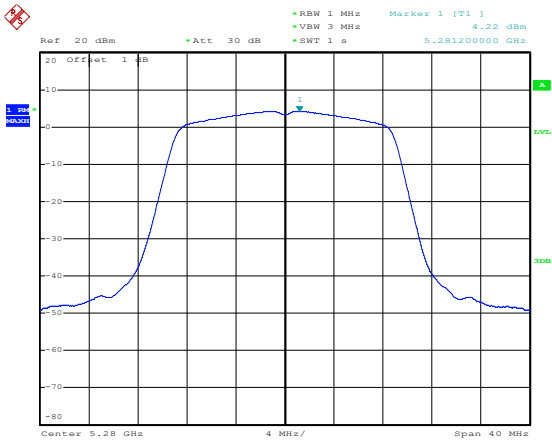
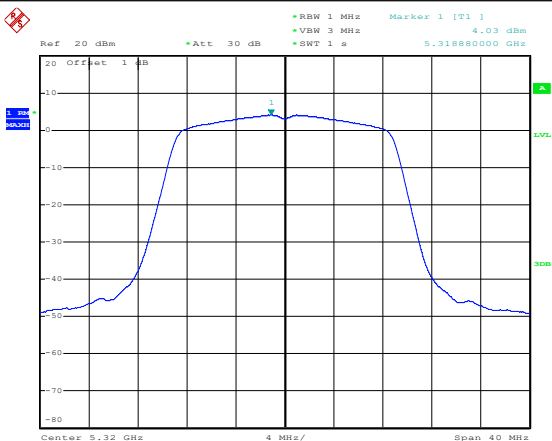
802.11n-HT20-Low	 Date: 15.FEB.2023 16:50:35
802.11n-HT20-Middle	 Date: 15.FEB.2023 16:51:30
802.11n-HT20-High	 Date: 15.FEB.2023 16:51:57

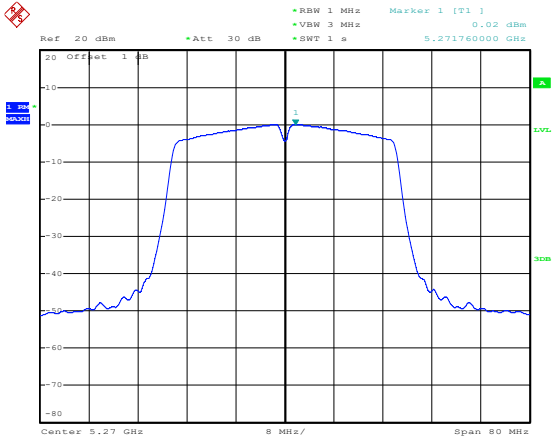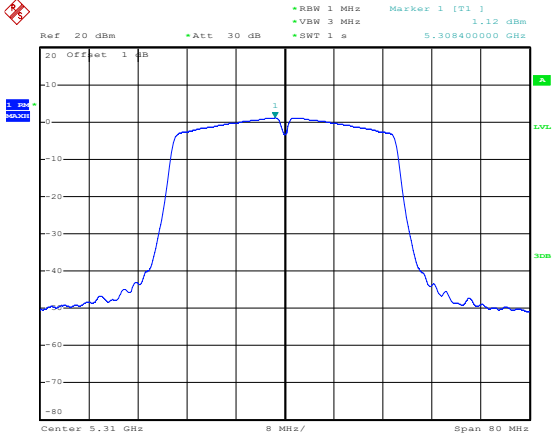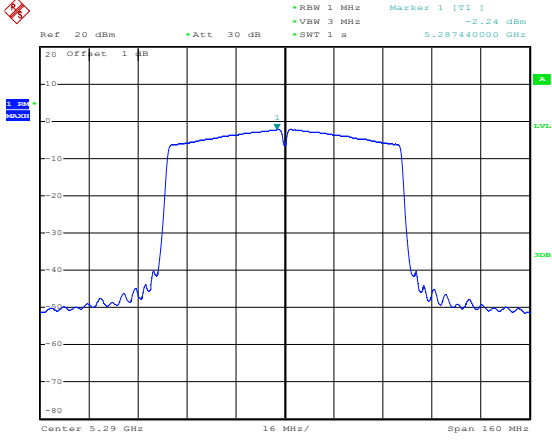802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 0.02 dBm *VSW 3 MHz *SWT 1 s 5.271760000 GHz 20 Offset 1 dB Center 5.27 GHz 8 MHz/ Span 80 MHz Date: 15.FEB.2023 16:53:06
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.12 dBm *VSW 3 MHz *SWT 1 s 5.308400000 GHz 20 Offset 1 dB Center 5.31 GHz 8 MHz/ Span 80 MHz Date: 15.FEB.2023 16:55:42
802.11ac-HT80-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -2.24 dBm *VSW 3 MHz *SWT 1 s 5.287440000 GHz 20 Offset 1 dB Center 5.29 GHz 16 MHz/ Span 160 MHz Date: 15.FEB.2023 16:26:49

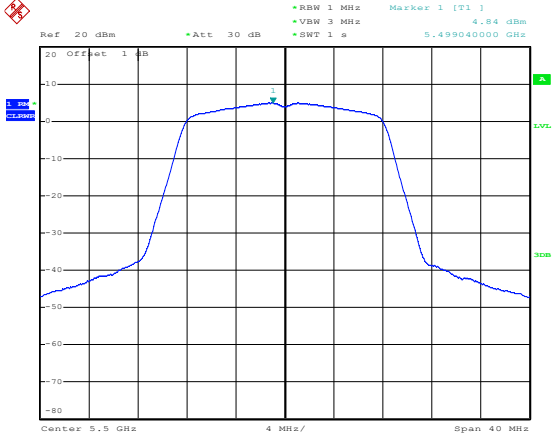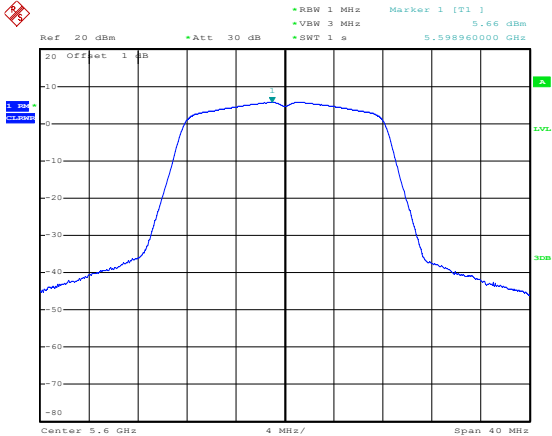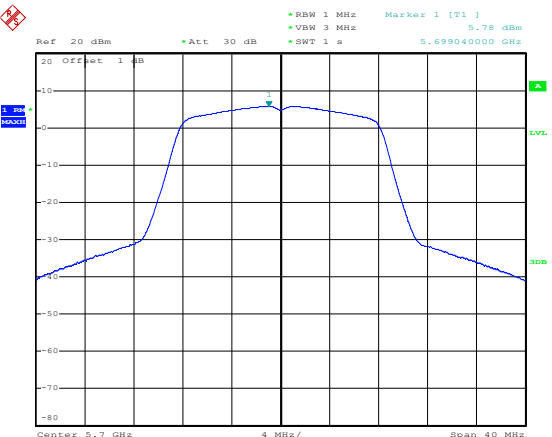
5470-5725MHz

802.11a-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz VSW 3 MHz Span 40 MHz Marker 1 [T1] 4.84 dBm 5.499040000 GHz Center 5.5 GHz 4 MHz/ Date: 23.FEB.2023 08:33:33
802.11a-Middle	 Ref 20 dBm Att 30 dB RBW 1 MHz VSW 3 MHz Span 40 MHz Marker 1 [T1] 5.66 dBm 5.558960000 GHz Center 5.6 GHz 4 MHz/ Date: 23.FEB.2023 08:34:37
802.11a-High	 Ref 20 dBm Att 30 dB RBW 1 MHz VSW 3 MHz Span 40 MHz Marker 1 [T1] 5.78 dBm 5.699040000 GHz Center 5.7 GHz 4 MHz/ Date: 23.FEB.2023 08:35:02

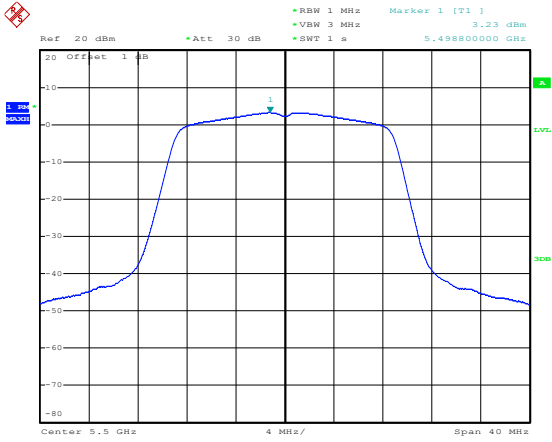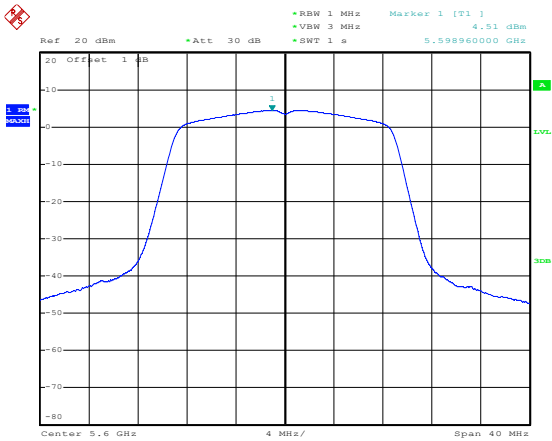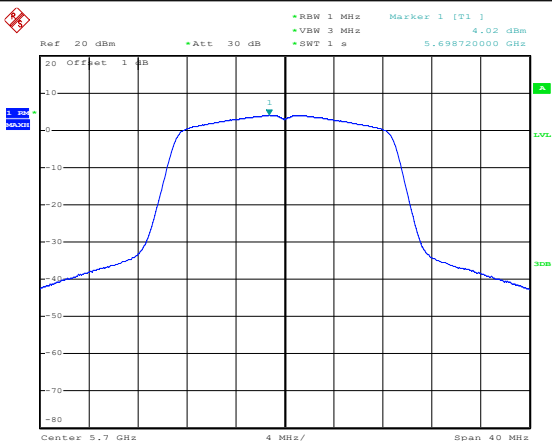
802.11n-HT20-Low	 Date: 23.FEB.2023 08:36:20
802.11n-HT20-Middle	 Date: 23.FEB.2023 08:37:07
802.11n-HT20-High	 Date: 23.FEB.2023 08:37:53

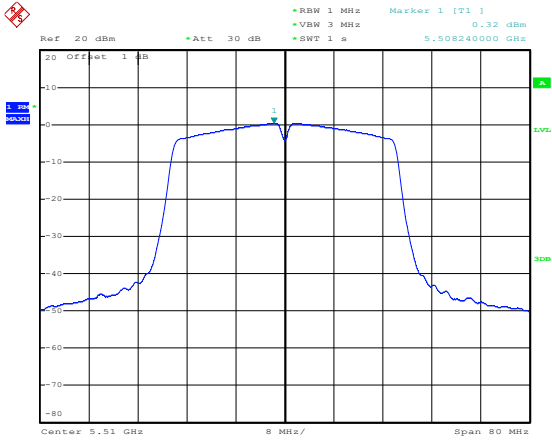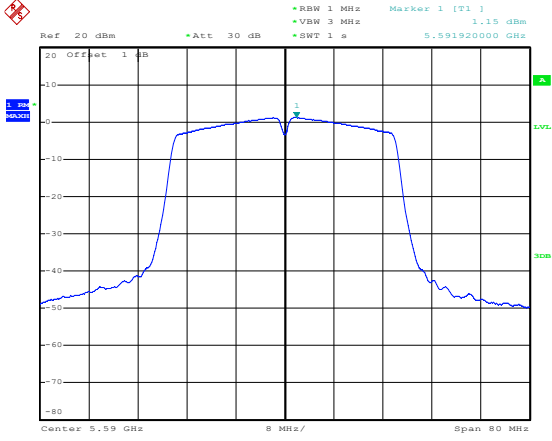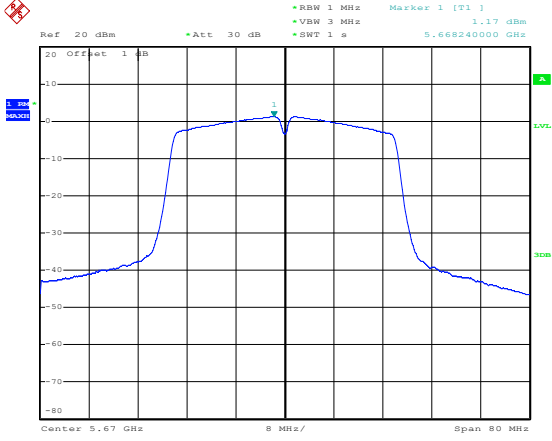802.11n-HT40-Low	 Date: 23.FEB.2023 08:38:57
802.11n-HT40- Middle	 Date: 23.FEB.2023 08:39:41
802.11n-HT40-High	 Date: 23.FEB.2023 08:40:49



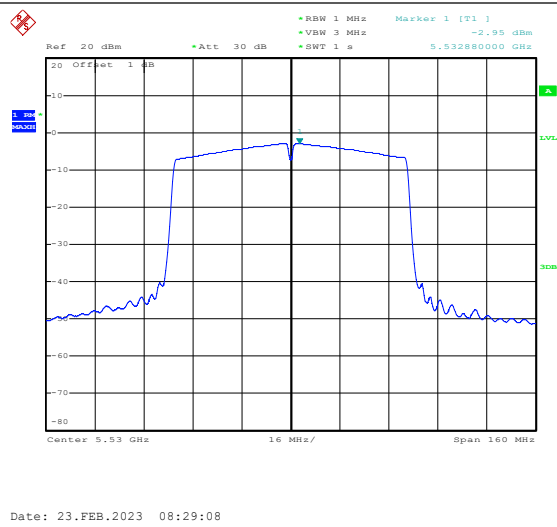
802.11ac-HT80-Low








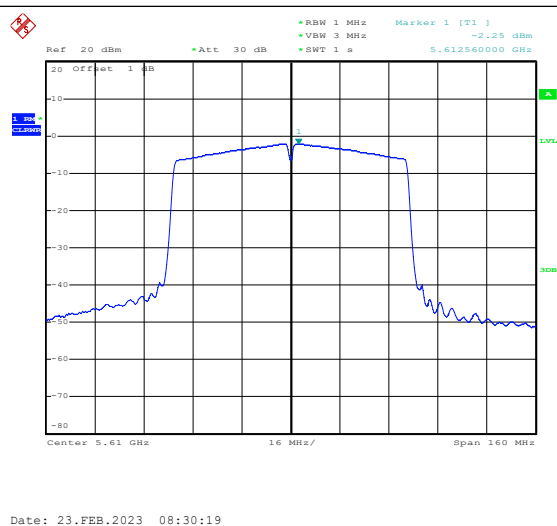
802.11ac-HT80-High



5725-5850MHz

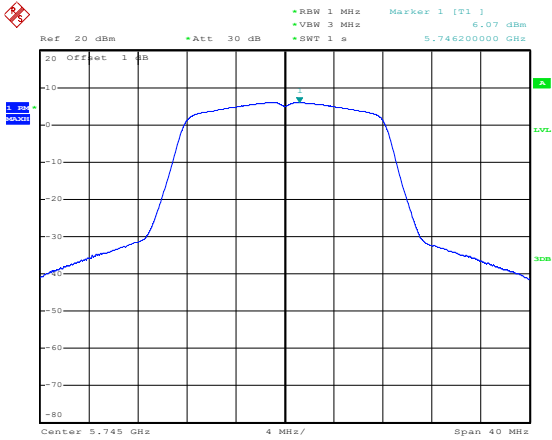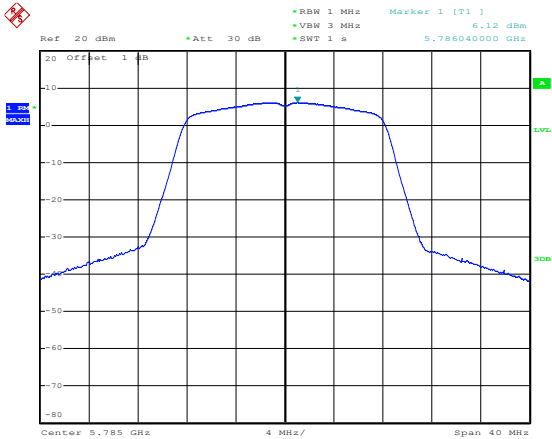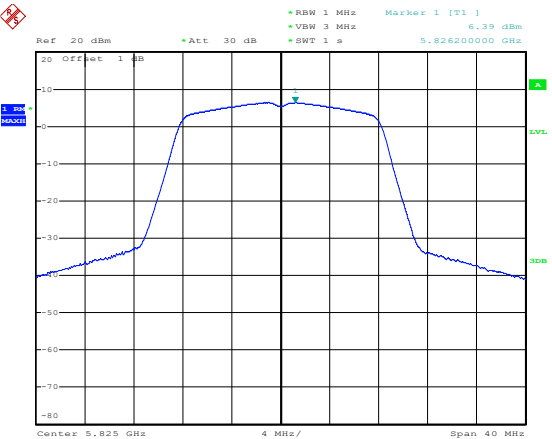802.11a-Low	 Date: 16.FEB.2023 08:23:59
802.11a-Middle	 Date: 16.FEB.2023 08:24:24
802.11a-High	 Date: 16.FEB.2023 08:24:56

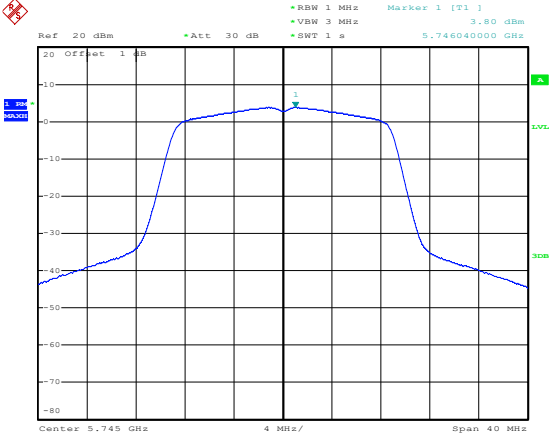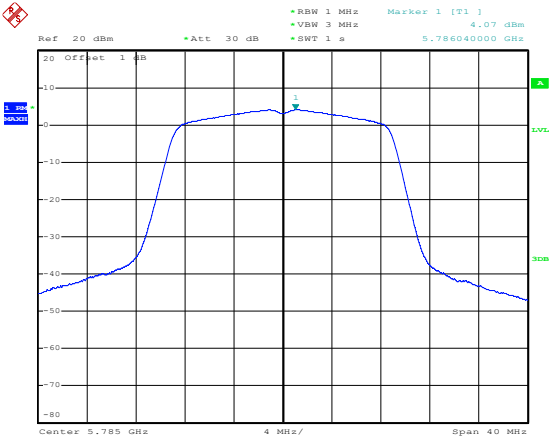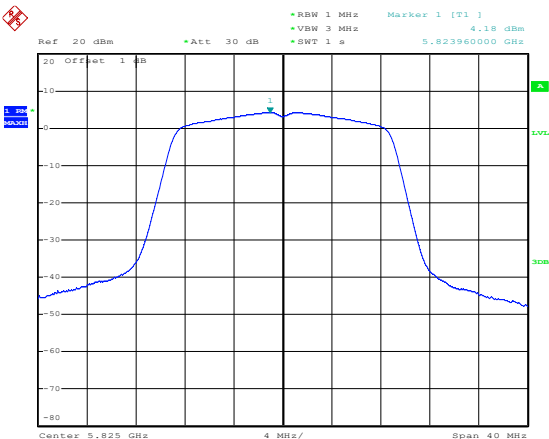802.11n-HT20-Low	 Date: 16.FEB.2023 08:25:38
802.11n-HT20-Middle	 Date: 16.FEB.2023 08:26:18
802.11n-HT20-High	 Date: 16.FEB.2023 08:26:44

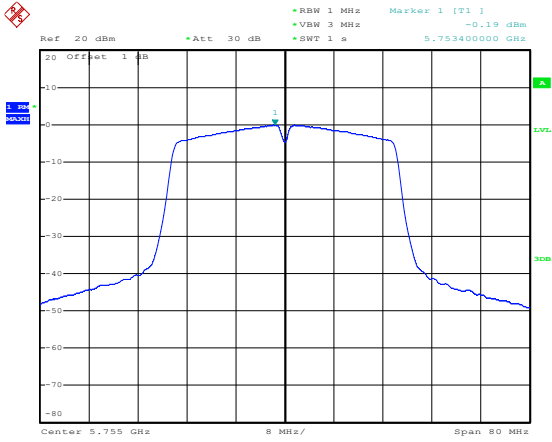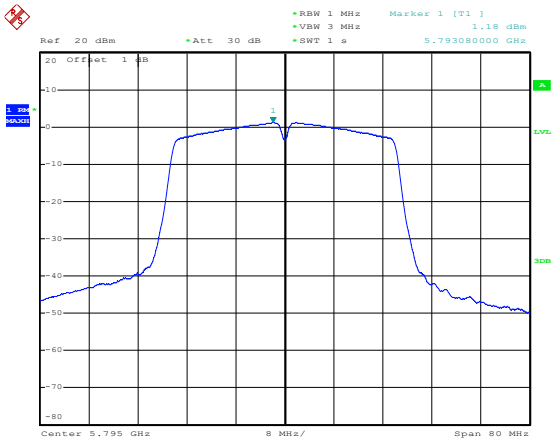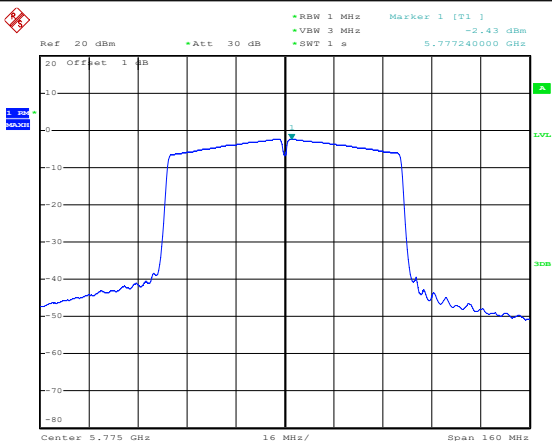802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -0.19 dBm *VSW 3 MHz *SWT 1 s 5.75340000 GHz 20 Offset 1 dB Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 16.FEB.2023 08:28:13
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.18 dBm *VSW 3 MHz *SWT 1 s 5.79308000 GHz 20 Offset 1 dB Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 16.FEB.2023 08:28:34
802.11ac-HT80-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -2.43 dBm *VSW 3 MHz *SWT 1 s 5.77724000 GHz 20 Offset 1 dB Center 5.775 GHz 16 MHz/ Span 160 MHz Date: 16.FEB.2023 08:23:23

APPENDIX B

Emission Bandwidth and Occupied Bandwidth



U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	20.50	16.90	Pass
	5200	20.50	16.90	Pass
	5240	20.40	16.90	Pass
802.11n-HT20	5180	20.80	17.80	Pass
	5200	20.80	17.80	Pass
	5240	20.70	17.80	Pass
802.11n-HT40	5190	40.40	36.80	Pass
	5230	40.60	36.60	Pass
802.11ac-HT80	5210	82.00	76.00	Pass

U-NII-2A: 5250-5350MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5260	20.40	16.90	Pass
	5280	20.40	16.90	Pass
	5320	20.50	16.90	Pass
802.11n-HT20	5260	20.80	17.90	Pass
	5280	20.60	17.80	Pass
	5320	20.60	18.00	Pass
802.11n-HT40	5270	42.00	36.80	Pass
	5310	42.00	36.60	Pass
802.11ac-HT80	5290	81.60	75.60	Pass



U-NII-2C: 5470-5725MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5500	20.30	16.90	Pass
	5580	20.30	17.00	Pass
	5700	20.50	16.90	Pass
802.11n-HT20	5500	20.60	17.80	Pass
	5580	20.60	17.80	Pass
	5700	20.60	17.90	Pass
802.11n-HT40	5510	42.20	36.60	Pass
	5550	42.00	36.60	Pass
	5670	42.40	36.60	Pass
802.11ac-HT80	5530	81.60	75.60	Pass
802.11ac-HT80	5610	82.00	75.60	Pass

U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.50	16.90	≥500
	5785	16.50	16.90	≥500
	5825	16.50	16.90	≥500
802.11n-HT20	5745	17.80	17.80	≥500
	5785	17.60	17.80	≥500
	5825	17.70	17.80	≥500
802.11n-HT40	5755	36.40	36.60	≥500
	5795	36.60	36.80	≥500
802.11ac VH80	5775	76.80	75.60	≥500

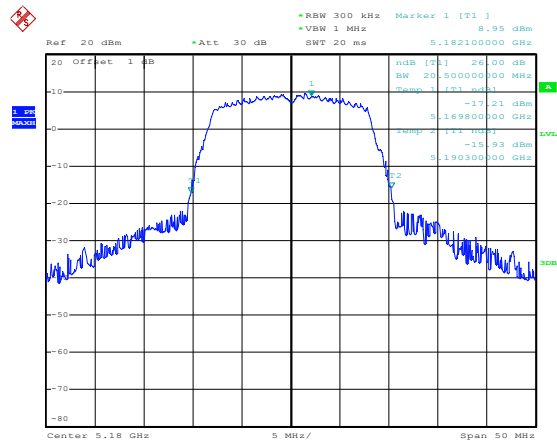

5150-5250MHz
26 dB Bandwidth




Date: 14.FEB.2023 10:20:14


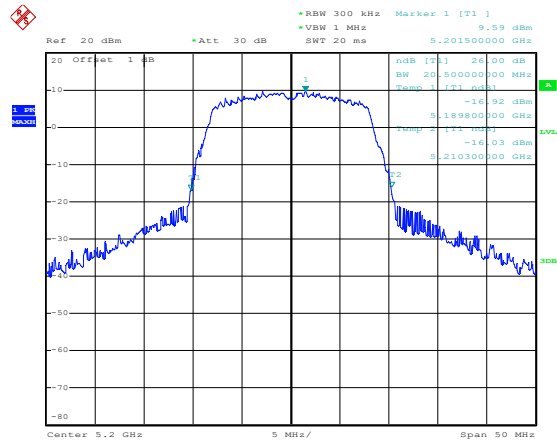



Date: 14.FEB.2023 10:21:47

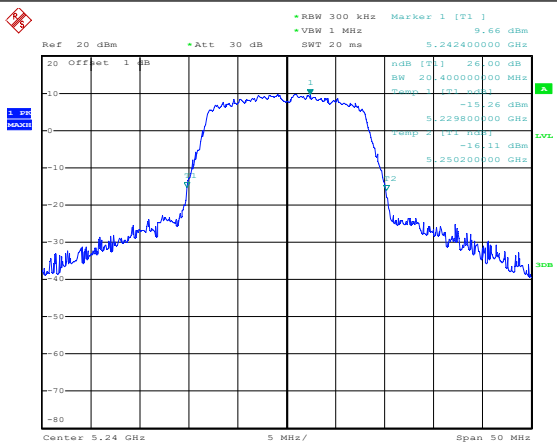


Date: 14.FEB.2023 10:22:26





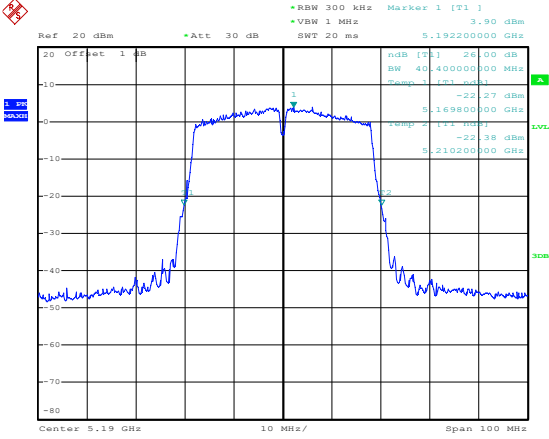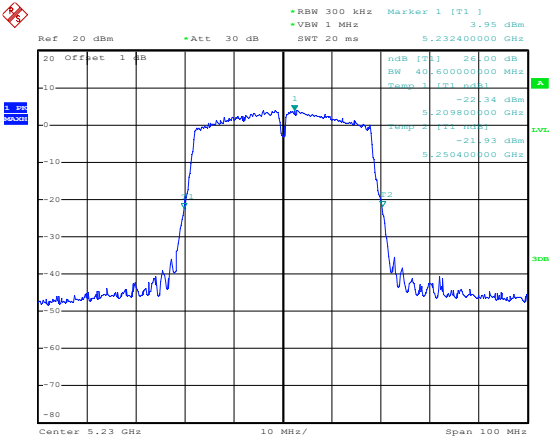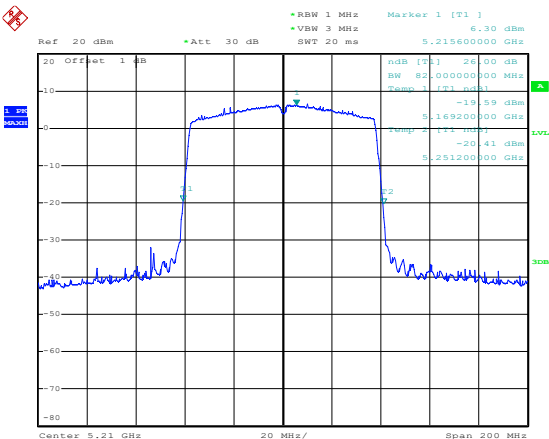802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 3.90 dBm VSW 1 MHz SWT 20 ms 5.192200000 GHz 20 Offset 1 dB dB [T1] 26.00 dB BW 40.40000000 MHz Temp 1 [T1] dBm -22.27 dBm 5.169800000 GHz -22.38 dBm 5.210200000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 14.FEB.2023 10:38:58
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 3.95 dBm VSW 1 MHz SWT 20 ms 5.232400000 GHz 20 Offset 1 dB dB [T1] 26.00 dB BW 40.60000000 MHz Temp 1 [T1] dBm -22.34 dBm 5.209800000 GHz -21.93 dBm 5.250400000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 14.FEB.2023 10:39:51
802.11ac-HT80-Low	 Ref 20 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 6.30 dBm VSW 3 MHz SWT 20 ms 5.215600000 GHz 20 Offset 1 dB dB [T1] 26.00 dB BW 82.00000000 MHz Temp 1 [T1] dBm -19.59 dBm 5.169200000 GHz -20.41 dBm 5.251200000 GHz Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 14.FEB.2023 10:17:57


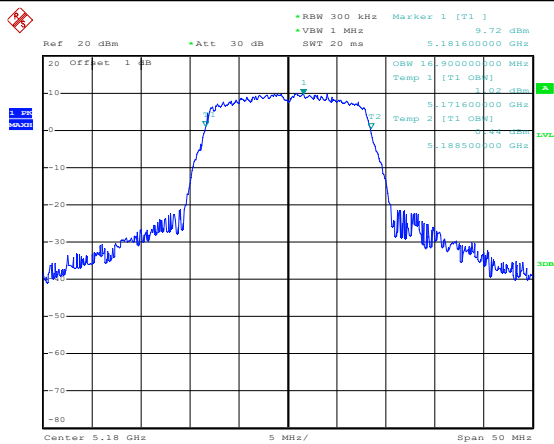
99% Bandwidth






Date: 15.FEB.2023 15:32:58


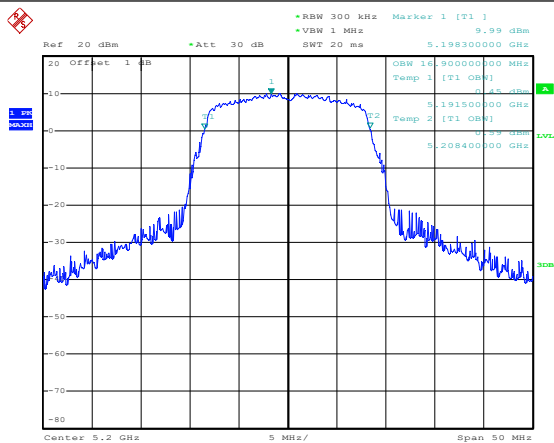




Date: 15.FEB.2023 15:33:23

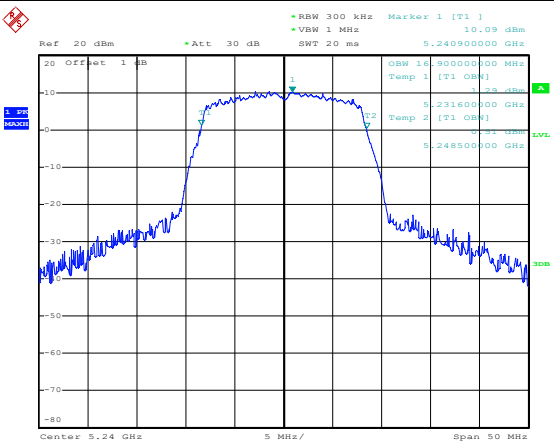


Date: 15.FEB.2023 15:34:15

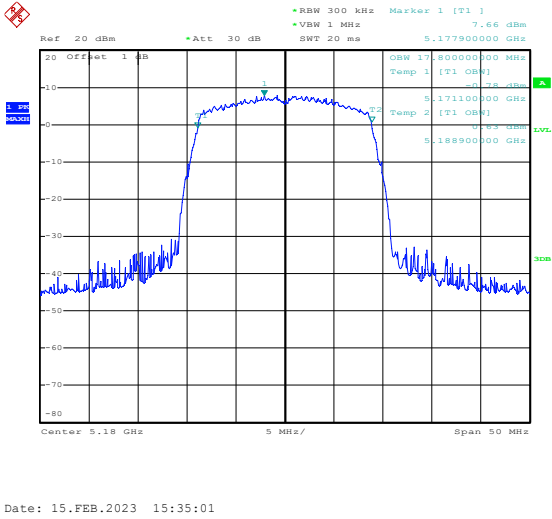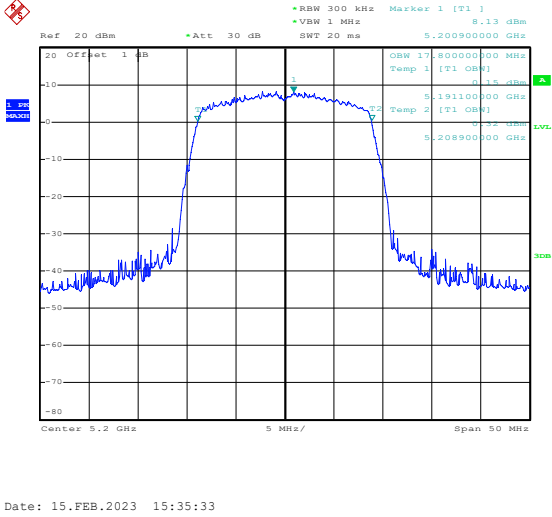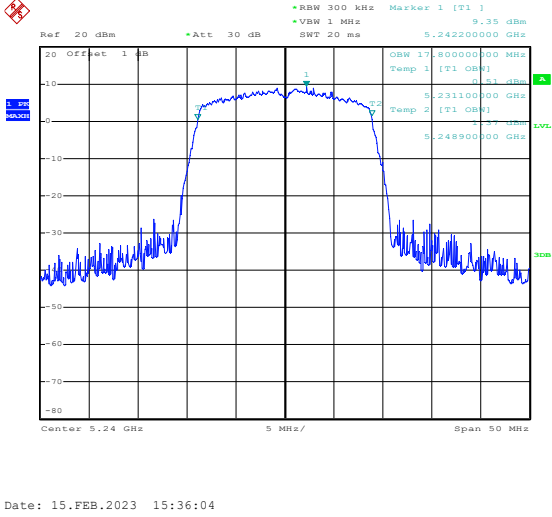802.11n-HT20-Low	 Date: 15.FEB.2023 15:35:01
802.11n-HT20-Middle	 Date: 15.FEB.2023 15:35:33
802.11n-HT20-High	 Date: 15.FEB.2023 15:36:04

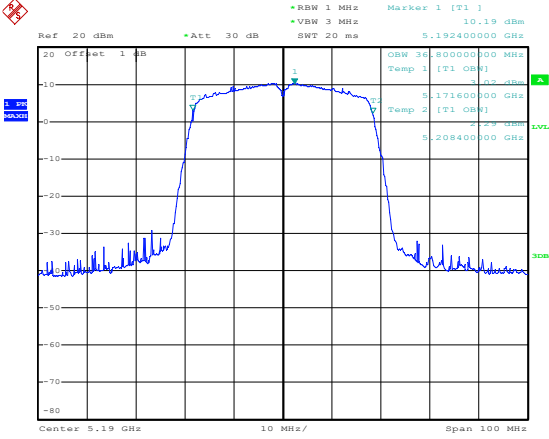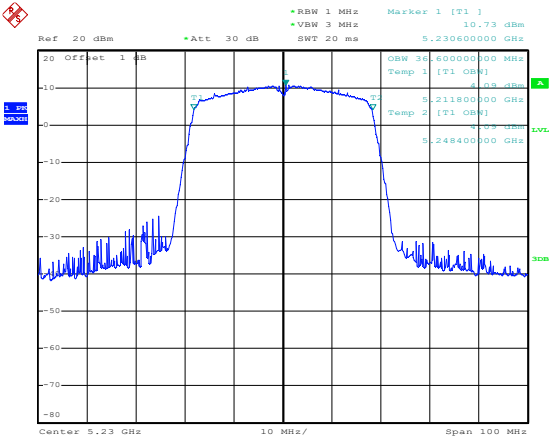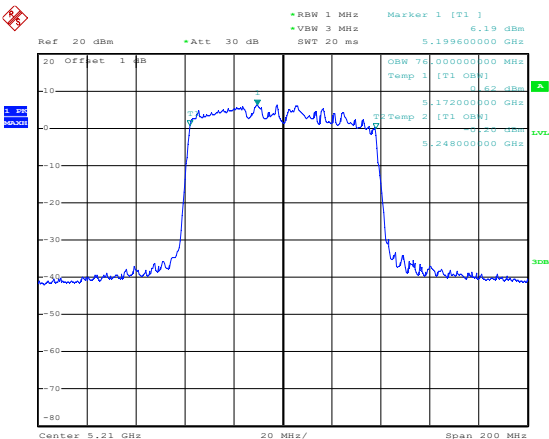
802.11n-HT40-Low	 Date: 15.FEB.2023 15:37:10
802.11n-HT40-High	 Date: 15.FEB.2023 15:37:54
802.11ac-HT80-Low	 Date: 15.FEB.2023 15:31:47

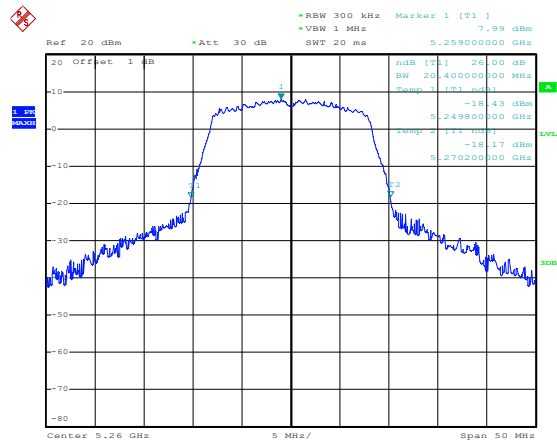

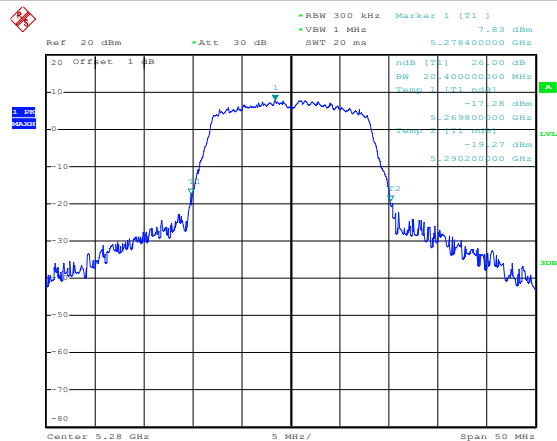802.11a-Middle



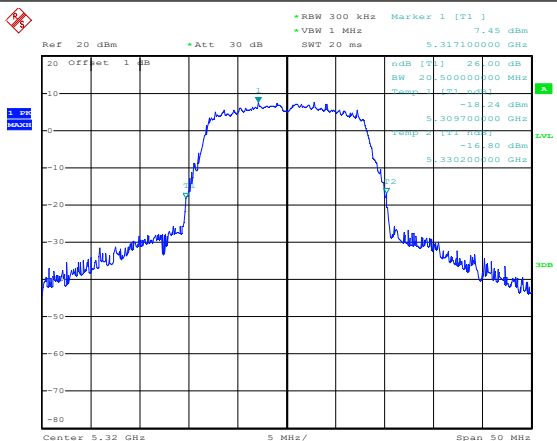802.11a-High





Date: 16.FEB.2023 07:59:25



[illegible]

802.11n-HT40-Low	Ref 20 dBm *Att 30 dB SWT 20 ms RBW 1 MHz VSW 3 MHz Marker 1 [T1] 7.35 dBm 5.272400000 GHz <table><thead><tr><th>ndB [T1]</th><th>26.00 dB</th></tr></thead><tbody><tr><td>SW</td><td>40.00000000 MHz</td></tr><tr><td>Temp 1 [T1 ndB]</td><td>-18.56 dBm</td></tr><tr><td></td><td>5.249000000 GHz</td></tr><tr><td>Temp 2 [T2 ndB]</td><td>-18.72 dBm</td></tr><tr><td></td><td>5.291000000 GHz</td></tr></tbody></table> Center 5.27 GHz 10 MHz/ Span 100 MHz Date: 16.FEB.2023 08:03:37	ndB [T1]	26.00 dB	SW	40.00000000 MHz	Temp 1 [T1 ndB]	-18.56 dBm		5.249000000 GHz	Temp 2 [T2 ndB]	-18.72 dBm		5.291000000 GHz
ndB [T1]	26.00 dB												
SW	40.00000000 MHz												
Temp 1 [T1 ndB]	-18.56 dBm												
	5.249000000 GHz												
Temp 2 [T2 ndB]	-18.72 dBm												
	5.291000000 GHz												
802.11n-HT40-High	Ref 20 dBm *Att 30 dB SWT 20 ms RBW 1 MHz VSW 3 MHz Marker 1 [T1] 7.04 dBm 5.308000000 GHz <table><thead><tr><th>ndB [T1]</th><th>26.00 dB</th></tr></thead><tbody><tr><td>SW</td><td>40.00000000 MHz</td></tr><tr><td>Temp 1 [T1 ndB]</td><td>-19.24 dBm</td></tr><tr><td></td><td>5.289000000 GHz</td></tr><tr><td>Temp 2 [T2 ndB]</td><td>-18.47 dBm</td></tr><tr><td></td><td>5.331000000 GHz</td></tr></tbody></table> Center 5.31 GHz 10 MHz/ Span 100 MHz Date: 16.FEB.2023 08:04:18	ndB [T1]	26.00 dB	SW	40.00000000 MHz	Temp 1 [T1 ndB]	-19.24 dBm		5.289000000 GHz	Temp 2 [T2 ndB]	-18.47 dBm		5.331000000 GHz
ndB [T1]	26.00 dB												
SW	40.00000000 MHz												
Temp 1 [T1 ndB]	-19.24 dBm												
	5.289000000 GHz												
Temp 2 [T2 ndB]	-18.47 dBm												
	5.331000000 GHz												
802.11ac-HT80-Low	Ref 20 dBm *Att 30 dB SWT 20 ms RBW 1 MHz VSW 3 MHz Marker 1 [T1] 4.21 dBm 5.284800000 GHz <table><thead><tr><th>ndB [T1]</th><th>26.00 dB</th></tr></thead><tbody><tr><td>SW</td><td>81.60000000 MHz</td></tr><tr><td>Temp 1 [T1 ndB]</td><td>-20.50 dBm</td></tr><tr><td></td><td>5.249200000 GHz</td></tr><tr><td>Temp 2 [T2 ndB]</td><td>-21.03 dBm</td></tr><tr><td></td><td>5.330800000 GHz</td></tr></tbody></table> Center 5.29 GHz 20 MHz/ Span 200 MHz Date: 16.FEB.2023 07:56:45	ndB [T1]	26.00 dB	SW	81.60000000 MHz	Temp 1 [T1 ndB]	-20.50 dBm		5.249200000 GHz	Temp 2 [T2 ndB]	-21.03 dBm		5.330800000 GHz
ndB [T1]	26.00 dB												
SW	81.60000000 MHz												
Temp 1 [T1 ndB]	-20.50 dBm												
	5.249200000 GHz												
Temp 2 [T2 ndB]	-21.03 dBm												
	5.330800000 GHz												

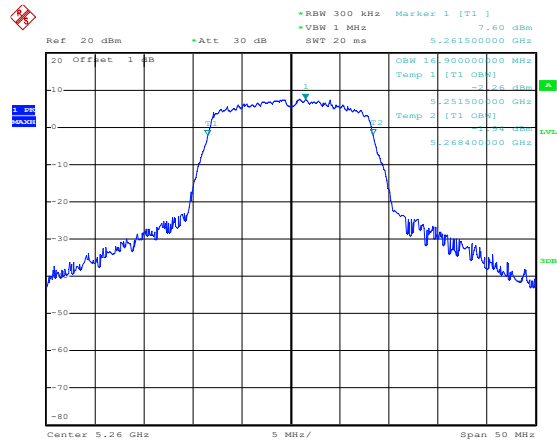

99% Bandwidth






Date: 16.FEB.2023 08:07:56


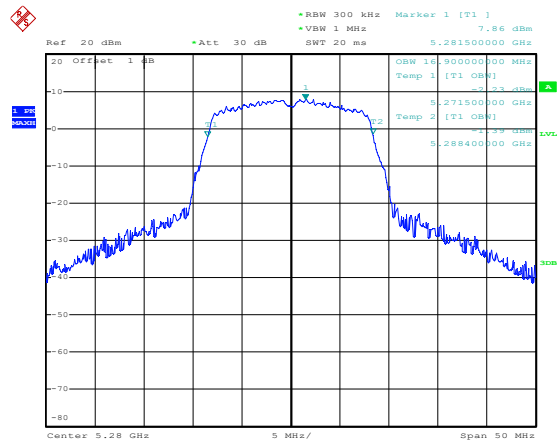



Date: 16.FEB.2023 08:08:39

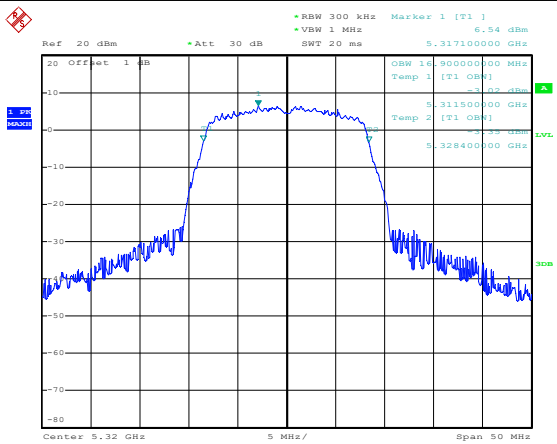



Date: 16.FEB.2023 08:09:21

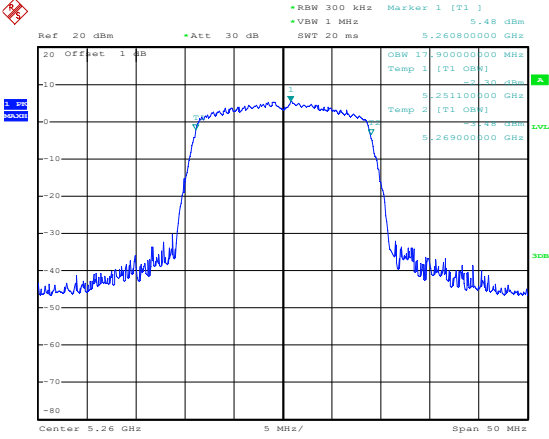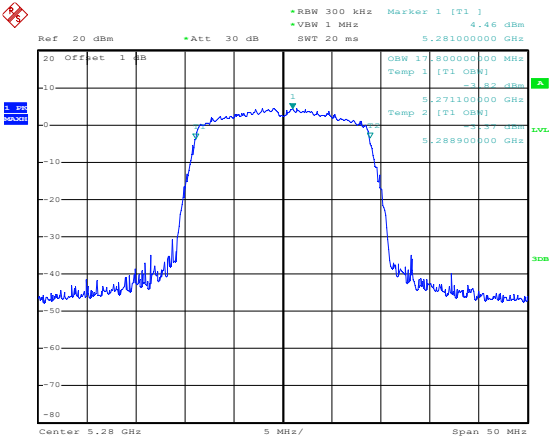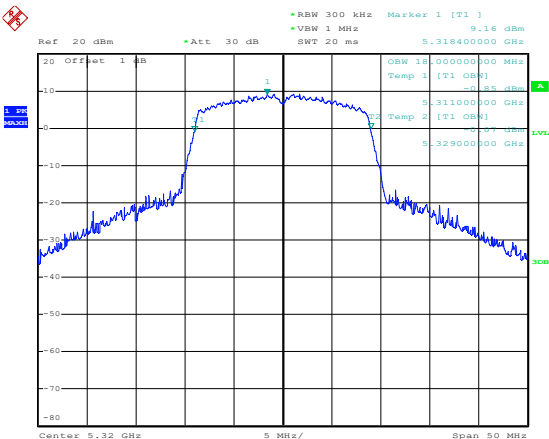802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.26080000 GHz OSW 17.00000000 MHz Temp 1 [T1 OSW] 5.25100000 GHz Temp 2 [T1 OSW] 5.26900000 GHz Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:10:16
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.28100000 GHz OSW 17.00000000 MHz Temp 1 [T1 OSW] 5.27100000 GHz Temp 2 [T1 OSW] 5.28900000 GHz Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:10:48
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 5.31840000 GHz OSW 18.00000000 MHz Temp 1 [T1 OSW] 5.31100000 GHz Temp 2 [T1 OSW] 5.32900000 GHz Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:11:32

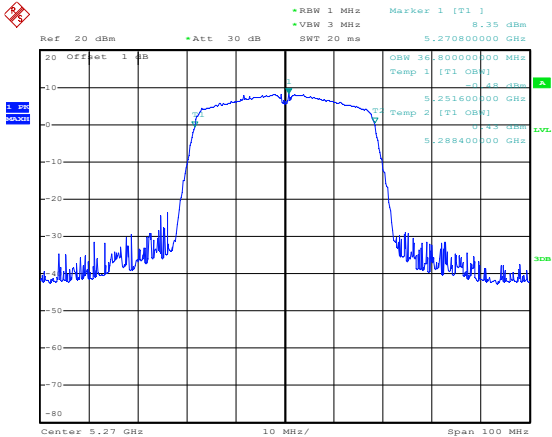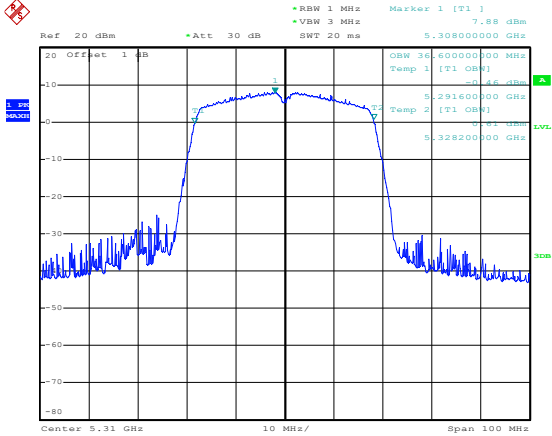
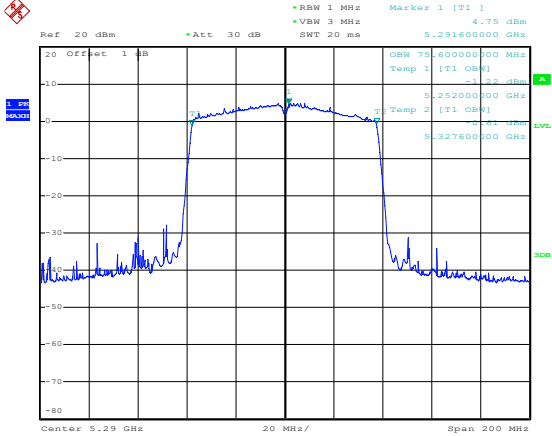
802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 8.35 dBm OSW 30.00000000 MHz Temp 1 [T1 OSW] -0.45 dBm 5.251600000 GHz Temp 2 [T1 OSW] -0.45 dBm 5.288400000 GHz Center 5.27 GHz 10 MHz/ Span 100 MHz Date: 16.FEB.2023 08:13:06
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 7.88 dBm OSW 30.00000000 MHz Temp 1 [T1 OSW] -0.45 dBm 5.291600000 GHz Temp 2 [T1 OSW] -0.45 dBm 5.328200000 GHz Center 5.31 GHz 10 MHz/ Span 100 MHz Date: 16.FEB.2023 08:13:52
802.11ac-HT80-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 4.75 dBm OSW 70.00000000 MHz Temp 1 [T1 OSW] -1.22 dBm 5.252000000 GHz Temp 2 [T1 OSW] -1.22 dBm 5.327600000 GHz Center 5.29 GHz 20 MHz/ Span 200 MHz Date: 16.FEB.2023 08:06:28

5470-5725MHz

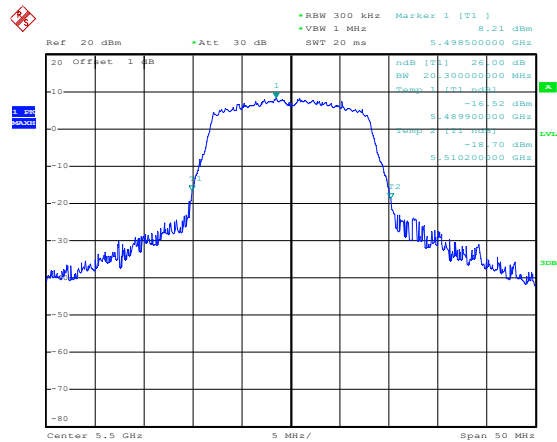

26 dB Bandwidth






Date: 23.FEB.2023 08:49:51


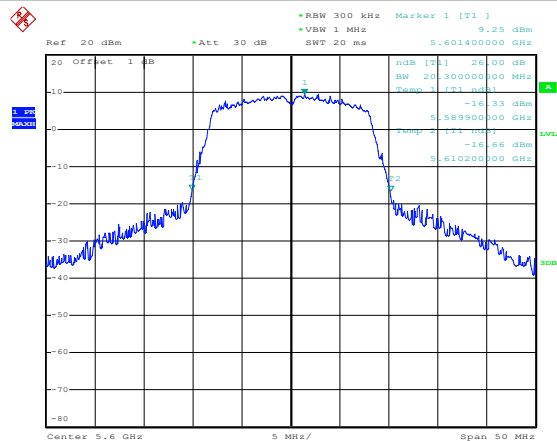





Date: 23.FEB.2023 08:50:18

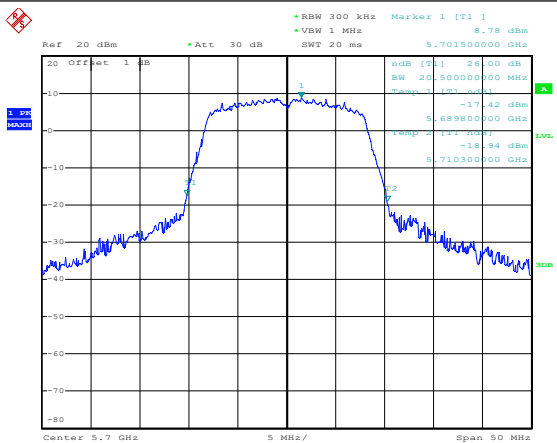


Date: 23.FEB.2023 08:50:41

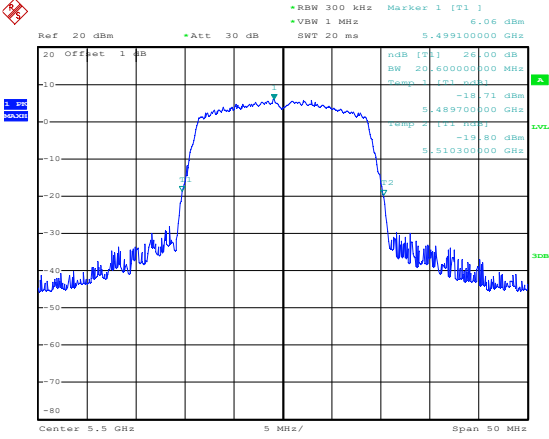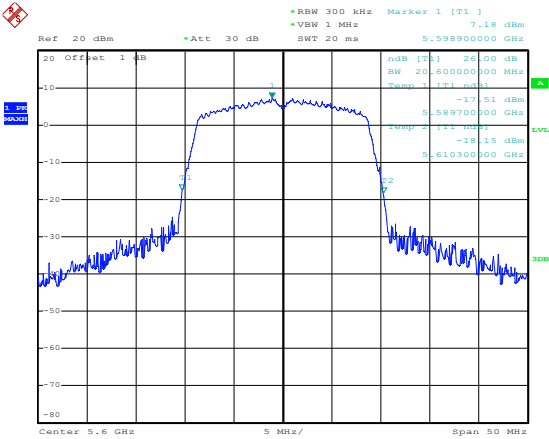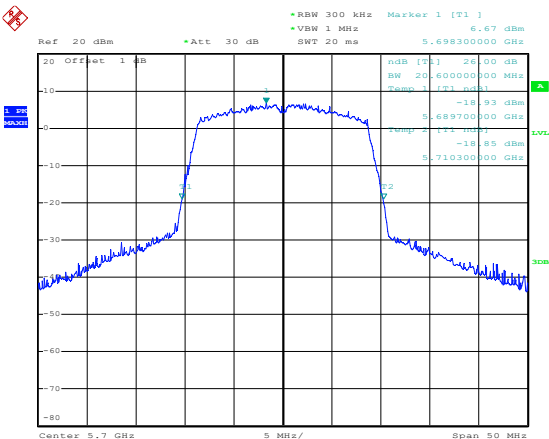802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 6.06 dBm 5.499100000 GHz 20 Offset 1 dB dB [T1] 20.00 dB SW 20.600000000 MHz Temp 1 [T1] dBm -18.71 dBm 5.489700000 GHz -19.80 dBm 5.510300000 GHz Center 5.5 GHz 5 MHz/ Span 50 MHz Date: 23.FEB.2023 08:51:30
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 7.18 dBm 5.598900000 GHz 20 Offset 1 dB dB [T1] 20.00 dB SW 20.600000000 MHz Temp 1 [T1] dBm -17.51 dBm 5.589700000 GHz -18.15 dBm 5.610300000 GHz Center 5.6 GHz 5 MHz/ Span 50 MHz Date: 23.FEB.2023 08:52:36
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 6.67 dBm 5.698300000 GHz 20 Offset 1 dB dB [T1] 20.00 dB SW 20.600000000 MHz Temp 1 [T1] dBm -18.93 dBm 5.689700000 GHz -18.85 dBm 5.710300000 GHz Center 5.7 GHz 5 MHz/ Span 50 MHz Date: 23.FEB.2023 08:53:03

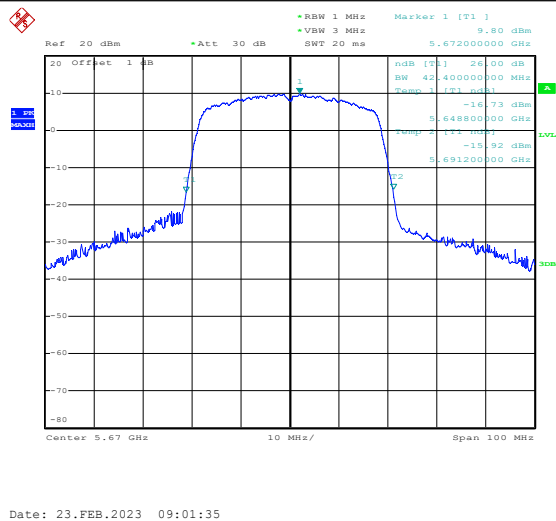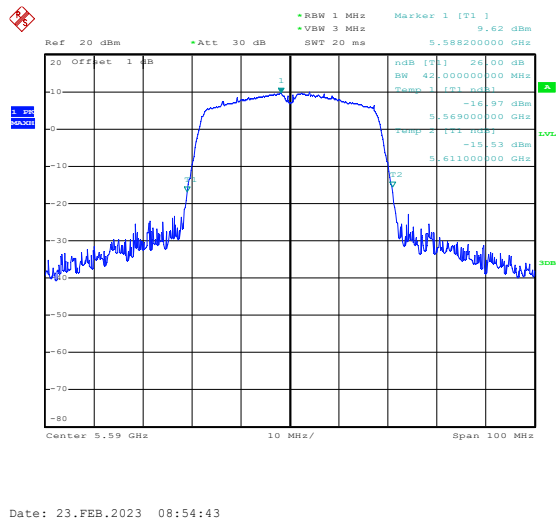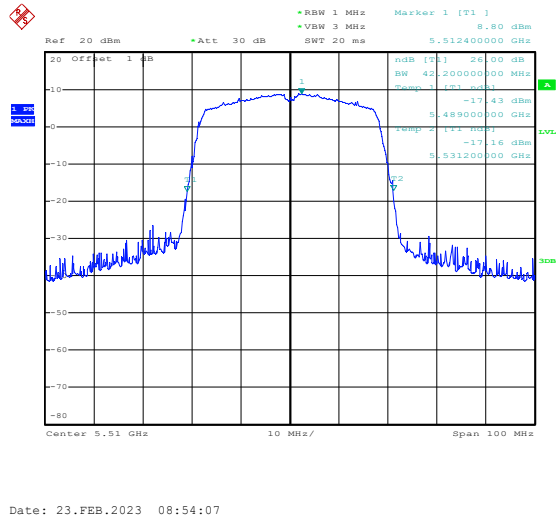


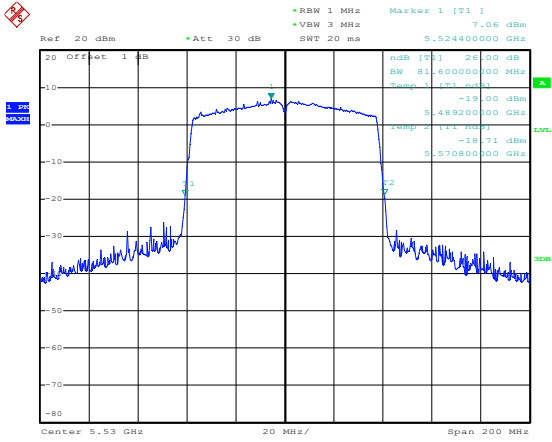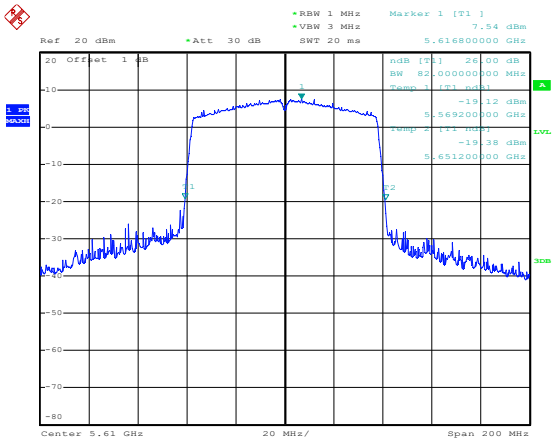802.11ac-HT80-Low	 Date: 23.FEB.2023 08:45:33
802.11ac-HT80-High	 Date: 23.FEB.2023 08:46:19

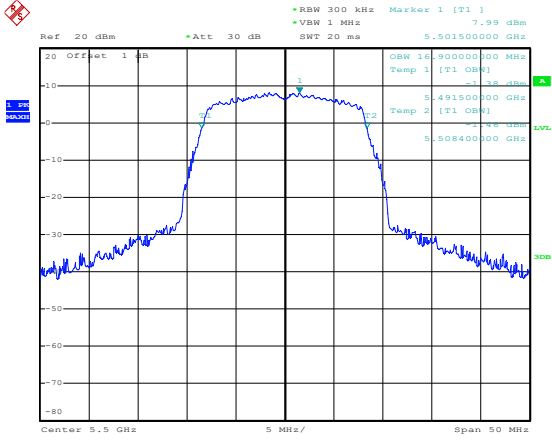
99% Bandwidth

802.11a-Low	 Date: 23.FEB.2023 09:06:30
-------------	--

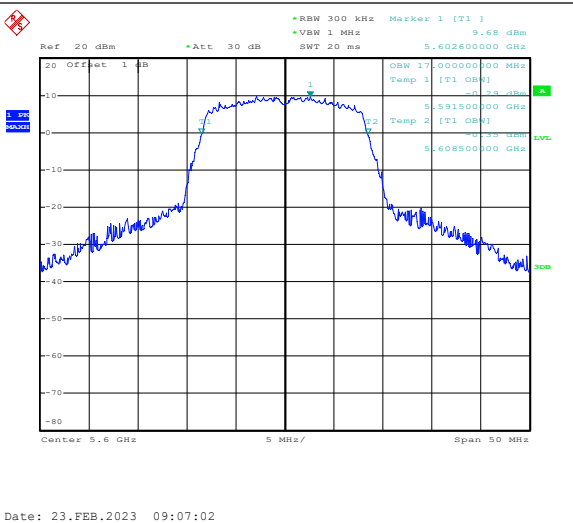
802.11a-Middle





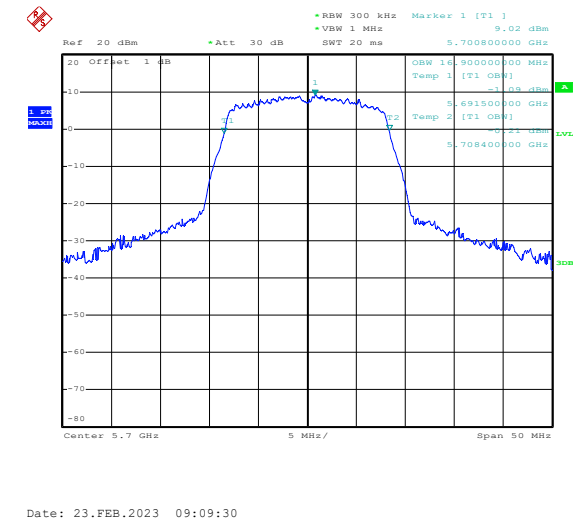
802.11a-High



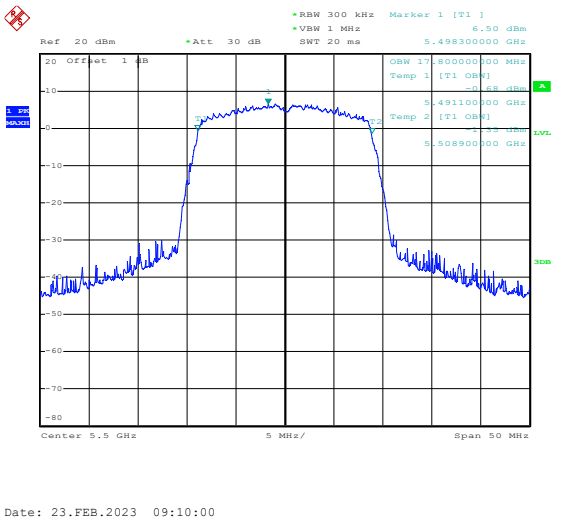
802.11n-HT20-Low






802.11n-HT20-Middle	Date: 23.FEB.2023 09:10:53
802.11n-HT20-High	Date: 23.FEB.2023 09:12:36
802.11n-HT40-Low	Date: 23.FEB.2023 09:13:38

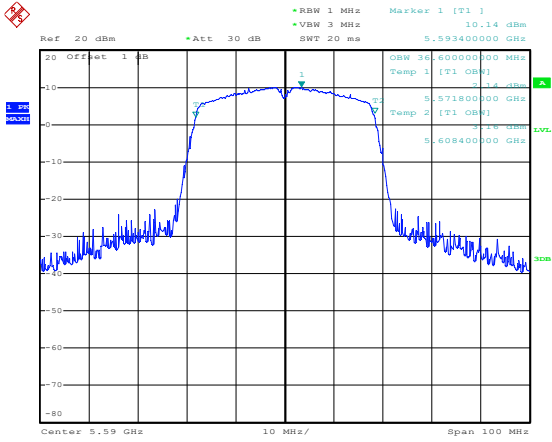
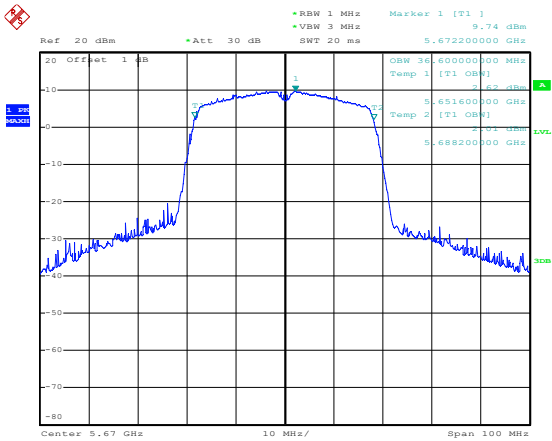
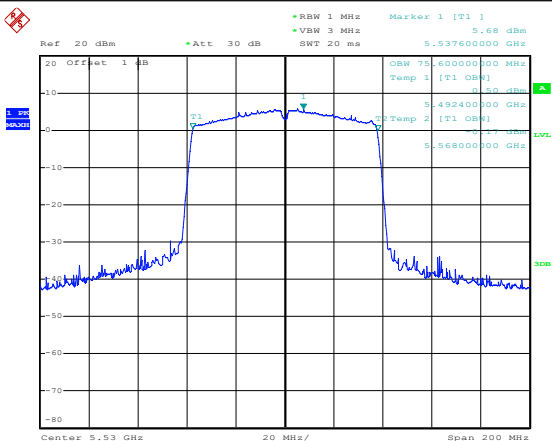
802.11n-HT40- Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 10.14 dBm 5.593400000 GHz OSW 30.00000000 MHz Temp 1 [T1] 0.14 dBm Temp 2 [T1] 0.14 dBm 5.571800000 GHz 5.608400000 GHz Center 5.59 GHz 10 MHz/ Span 100 MHz Date: 23.FEB.2023 09:14:02
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 9.74 dBm 5.672200000 GHz OSW 30.00000000 MHz Temp 1 [T1] 0.14 dBm Temp 2 [T1] 0.14 dBm 5.651600000 GHz 5.688200000 GHz Center 5.67 GHz 10 MHz/ Span 100 MHz Date: 23.FEB.2023 09:14:57
802.11ac-HT80-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms Marker 1 [T1] 5.68 dBm 5.537600000 GHz OSW 70.00000000 MHz Temp 1 [T1] 0.14 dBm Temp 2 [T1] 0.14 dBm 5.492400000 GHz 5.568000000 GHz Center 5.53 GHz 20 MHz/ Span 200 MHz Date: 23.FEB.2023 09:04:48



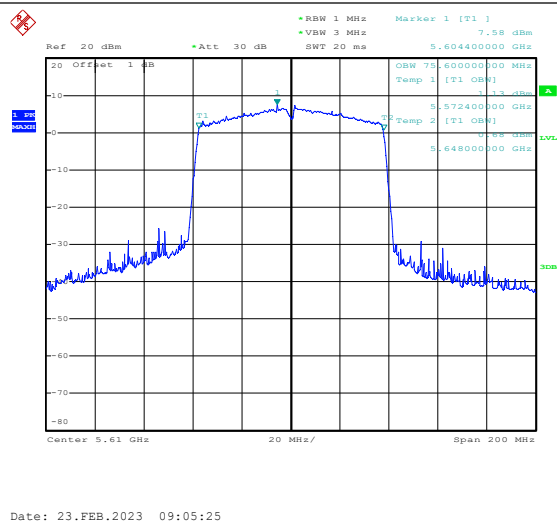
802.11ac-HT80-High



5725-5850MHz
6 dB Bandwidth

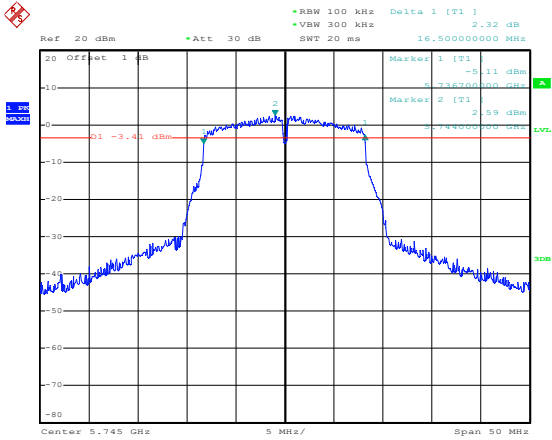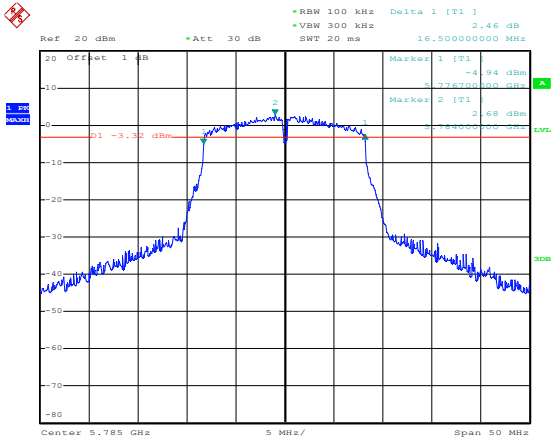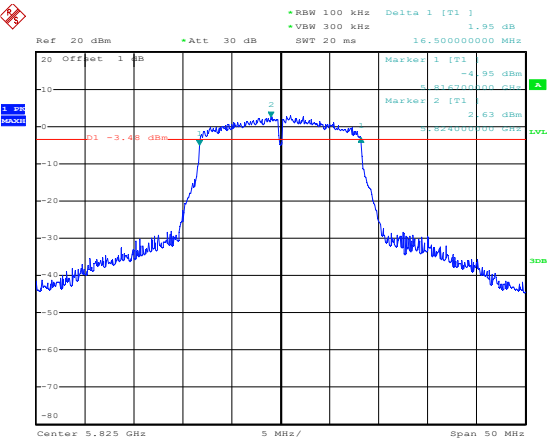802.11a-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz Delta 1 [T1] 2.32 dB VBW 300 kHz SWT 20 ms 16.500000000 MHz Marker 1 [T1] -3.11 dBm Marker 2 [T1] 2.59 dBm Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:52:42
802.11a-Middle	 Ref 20 dBm Att 30 dB RBW 100 kHz Delta 1 [T1] 2.46 dB VBW 300 kHz SWT 20 ms 16.500000000 MHz Marker 1 [T1] -4.94 dBm Marker 2 [T1] 2.68 dBm Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:53:34
802.11a-High	 Ref 20 dBm Att 30 dB RBW 100 kHz Delta 1 [T1] 1.95 dB VBW 300 kHz SWT 20 ms 16.500000000 MHz Marker 1 [T1] -4.95 dBm Marker 2 [T1] 2.63 dBm Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:54:23

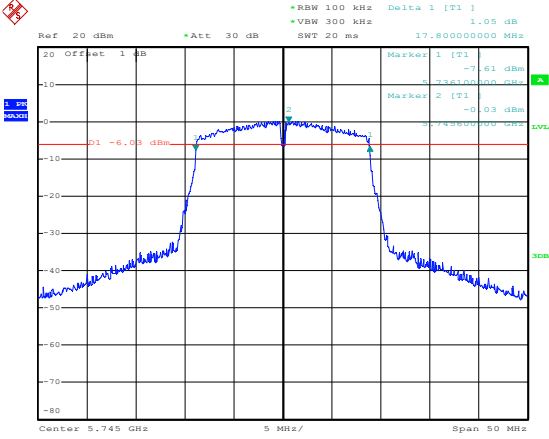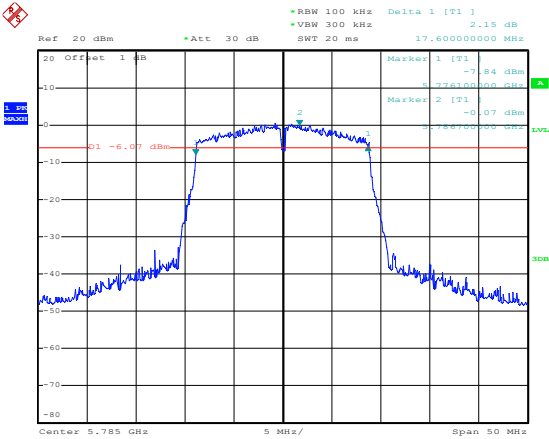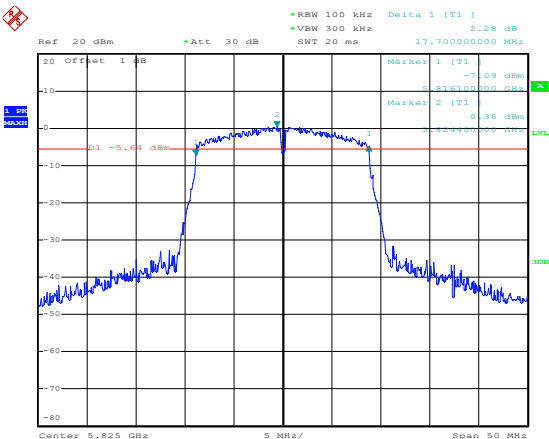802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.05 dB VBW 300 kHz SWT 20 ms 17.60000000 MHz Marker 1 [T1] -7.61 dBm Marker 2 [T1] -0.03 dBm D1 -6.03 dBm Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:55:20
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 2.15 dB VBW 300 kHz SWT 20 ms 17.60000000 MHz Marker 1 [T1] -7.84 dBm Marker 2 [T1] -0.07 dBm D1 -6.07 dBm Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:56:03
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 2.28 dB VBW 300 kHz SWT 20 ms 17.70000000 MHz Marker 1 [T1] -7.09 dBm Marker 2 [T1] -0.26 dBm D1 -5.64 dBm Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:57:19

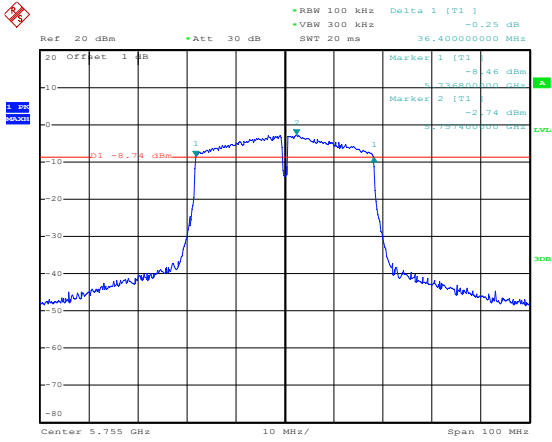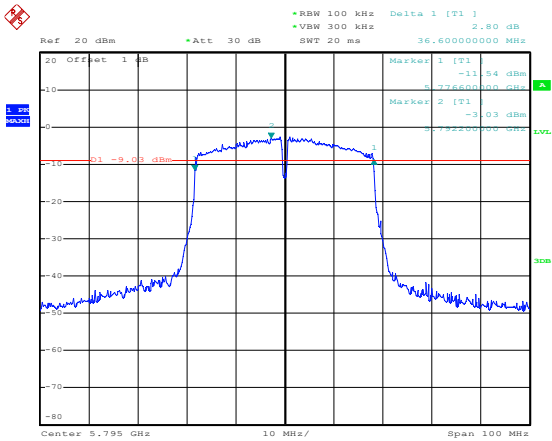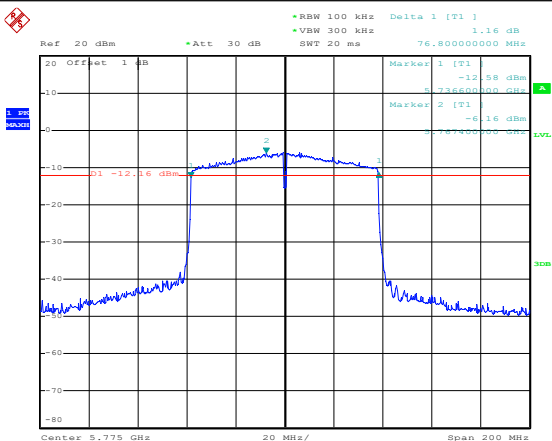802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms 36.40000000 MHz Marker 1 [T1] -9.46 dBm 5.79500000 GHz Marker 2 [T1] -2.74 dBm 5.79500000 GHz Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 16.FEB.2023 08:59:13
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB SWT 20 ms 36.60000000 MHz Marker 1 [T1] -11.54 dBm 5.79500000 GHz Marker 2 [T1] -3.03 dBm 5.79500000 GHz Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 16.FEB.2023 09:00:38
802.11ac-HT80-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms 76.80000000 MHz Marker 1 [T1] -12.58 dBm 5.77500000 GHz Marker 2 [T1] -6.16 dBm 5.77500000 GHz Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 16.FEB.2023 08:51:32

99 Bandwidth

802.11a-Low

Ref: 20 dBm Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 20 ms Marker 1 [T1] 9.19 dBm

OSW: 16.90000000 MHz Temp: 1 [T1] 0.00 dBm

5.73600000 GHz Temp: 2 [T1] 0.00 dBm

5.75350000 GHz

Center: 5.745 GHz 5 MHz/ Span: 50 MHz

802.11a-Middle

Ref: 20 dBm Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 20 ms Marker 1 [T1] 9.06 dBm

OSW: 16.90000000 MHz Temp: 1 [T1] 0.00 dBm

5.77600000 GHz Temp: 2 [T1] 0.00 dBm

5.79350000 GHz

Center: 5.785 GHz 5 MHz/ Span: 50 MHz

802.11a-High

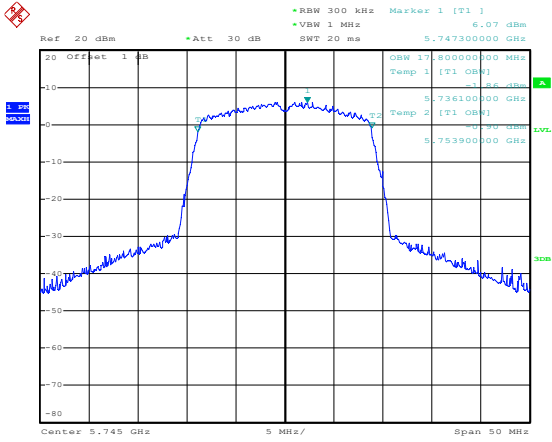
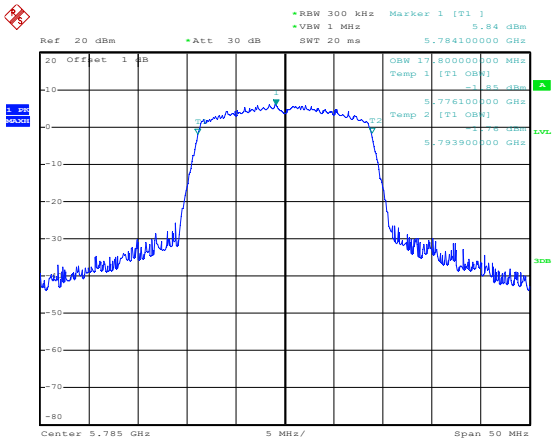
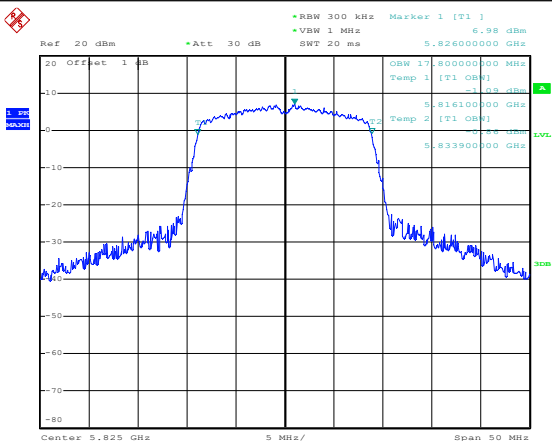
Ref: 20 dBm Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 20 ms Marker 1 [T1] 9.39 dBm




OSW: 16.90000000 MHz Temp: 1 [T1] 0.00 dBm

5.81600000 GHz Temp: 2 [T1] 0.00 dBm

5.83350000 GHz

Center: 5.825 GHz 5 MHz/ Span: 50 MHz

802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB SWT 20 ms OSW 17.80000000 MHz Temp 1 [T1 OSW] 5.736100000 GHz Temp 2 [T1 OSW] 5.753900000 GHz Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:34:15
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB SWT 20 ms OSW 17.80000000 MHz Temp 1 [T1 OSW] 5.776100000 GHz Temp 2 [T1 OSW] 5.793900000 GHz Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:45:25
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB SWT 20 ms OSW 17.80000000 MHz Temp 1 [T1 OSW] 5.816100000 GHz Temp 2 [T1 OSW] 5.833900000 GHz Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 16.FEB.2023 08:46:05

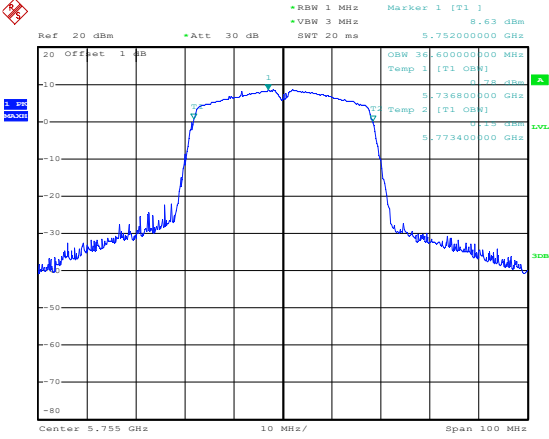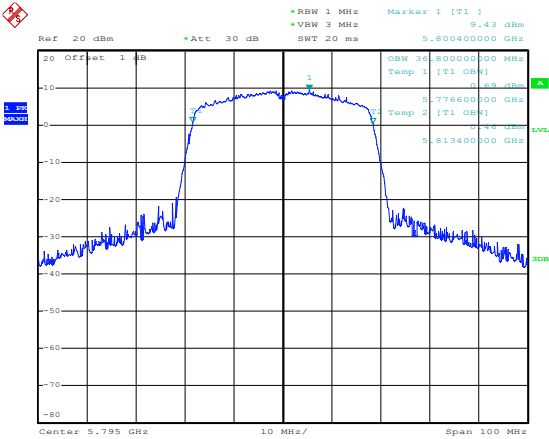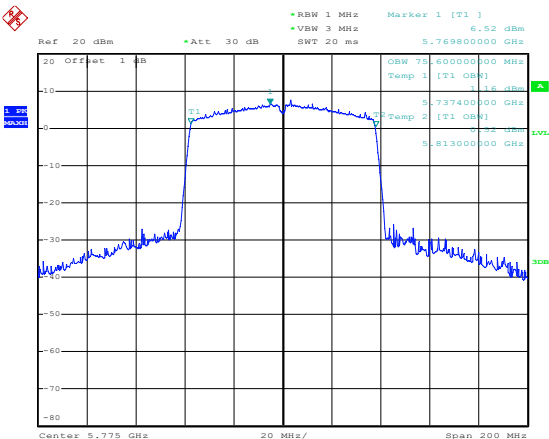802.11n-HT40-Low	 Ref 20 dBm Att 30 dB SWT 20 ms Marker 1 [T1] 5.752000000 GHz 9.43 dBm OSW 30.00000000 MHz Temp 1 [T1] 0.28 dBm 5.736800000 GHz Temp 2 [T1] 0.15 dBm 5.773400000 GHz Temp 2 [T1] 0.15 dBm Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 16.FEB.2023 08:48:11
802.11n-HT40-High	 Ref 20 dBm Att 30 dB SWT 20 ms Marker 1 [T1] 5.800400000 GHz 9.43 dBm OSW 30.00000000 MHz Temp 1 [T1] 0.28 dBm 5.776600000 GHz Temp 2 [T1] 0.15 dBm 5.813400000 GHz Temp 2 [T1] 0.15 dBm Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 16.FEB.2023 08:49:00
802.11ac-HT80-Low	 Ref 20 dBm Att 30 dB SWT 20 ms Marker 1 [T1] 5.769800000 GHz 6.52 dBm OSW 70.00000000 MHz Temp 1 [T1] 1.15 dBm 5.737400000 GHz Temp 2 [T1] 0.15 dBm 5.813000000 GHz Temp 2 [T1] 0.15 dBm Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 16.FEB.2023 08:30:35

APPENDIX C

Maximum Conducted Output Power




U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	15.87	23.98
	5200	16.91	23.98
	5240	17.32	23.98
802.11n-HT20	5180	14.62	23.98
	5200	14.71	23.98
	5240	15.18	23.98
802.11n-HT40	5190	13.70	23.98
	5230	14.89	23.98
802.11ac VH80	5210	13.64	23.98




U-NII-2A: 5250-5350MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5260	16.56	23.98
	5280	16.85	23.98
	5320	16.75	23.98
802.11n-HT20	5260	14.75	23.98
	5280	15.04	23.98
	5320	14.87	23.98
802.11n-HT40	5270	14.61	23.98
	5310	14.64	23.98
802.11ac VH80	5290	14.51	23.98




U-NII-2C: 5470-5725MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5500	16.73	23.98
	5580	17.12	23.98
	5700	16.48	23.98
802.11n-HT20	5500	14.29	23.98
	5580	15.28	23.98
	5700	14.64	23.98
802.11n-HT40	5510	14.27	23.98
	5550	14.92	23.98
	5670	14.72	23.98
802.11ac VH80	5530	13.92	23.98
802.11ac VH80	5610	15.11	23.98

U-NII-3: 5725-5850MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5745	15.82	30.00
	5785	16.93	30.00
	5825	17.37	30.00
802.11n-HT20	5745	14.53	30.00
	5785	14.87	30.00
	5825	15.11	30.00
802.11n-HT40	5755	14.54	30.00
	5795	14.76	30.00
802.11ac VH80	5775	13.87	30.00

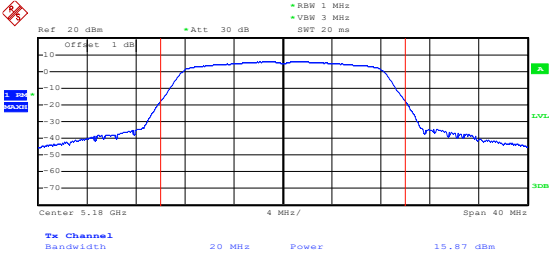
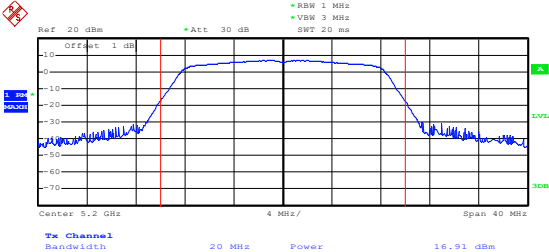
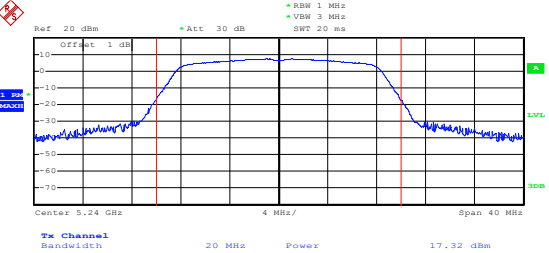
5150-5250MHz




802.11a-Low	 Date: 14.FEB.2023 08:58:34
802.11a-Middle	 Date: 14.FEB.2023 08:58:52
802.11a-High	 Date: 14.FEB.2023 08:59:39

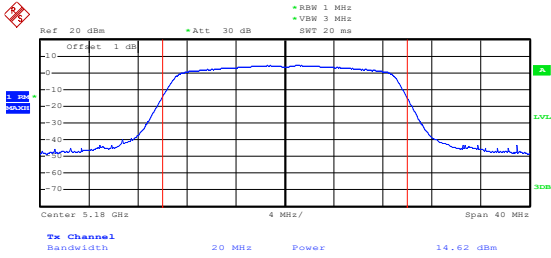
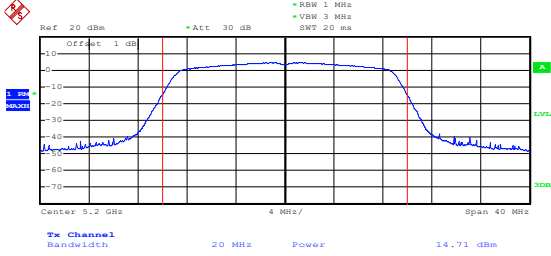
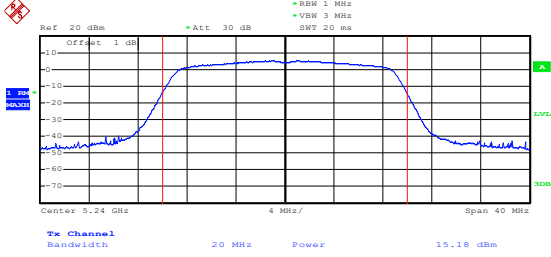
802.11n-HT20-Low	 Date: 14.FEB.2023 09:28:51
802.11n-HT20-Middle	 Date: 14.FEB.2023 09:29:54
802.11n-HT20-High	 Date: 14.FEB.2023 09:30:39

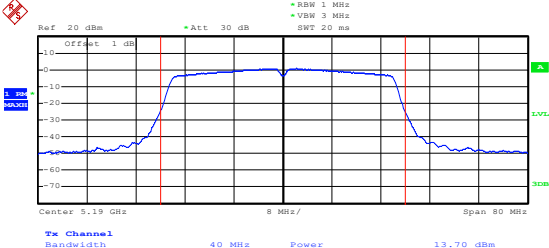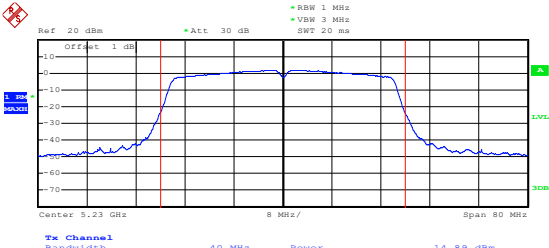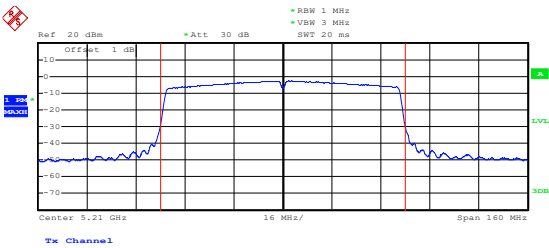802.11n-HT40-Low	 Date: 14.FEB.2023 09:31:38
802.11n-HT40-High	 Date: 14.FEB.2023 09:32:31
802.11ac-HT80-Low	 Date: 14.FEB.2023 09:33:50

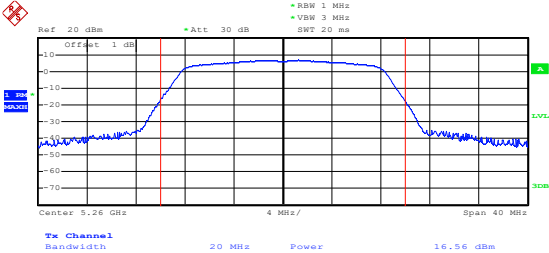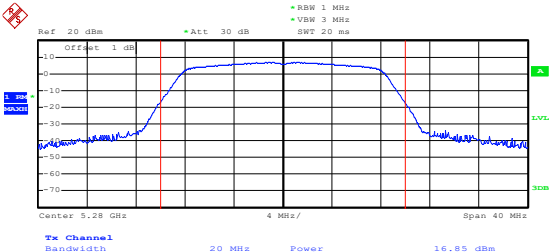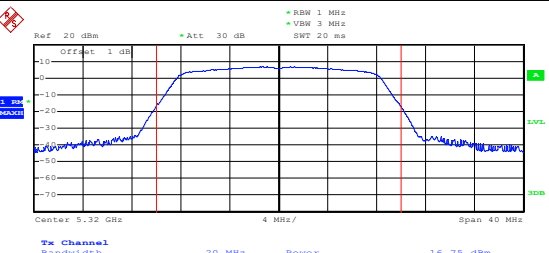5250-5350MHz




802.11a-Low	 Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, Span: 40 MHz, Center: 5.26 GHz, Tx Channel: Bandwidth 20 MHz, Power 16.56 dBm Date: 15.FEB.2023 15:43:29
802.11a-Middle	 Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, Span: 40 MHz, Center: 5.28 GHz, Tx Channel: Bandwidth 20 MHz, Power 16.85 dBm Date: 15.FEB.2023 15:44:53
802.11a-High	 Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, Span: 40 MHz, Center: 5.32 GHz, Tx Channel: Bandwidth 20 MHz, Power 16.75 dBm Date: 15.FEB.2023 15:45:36

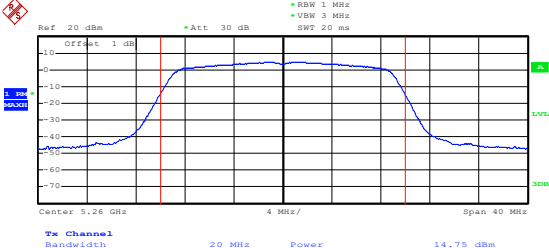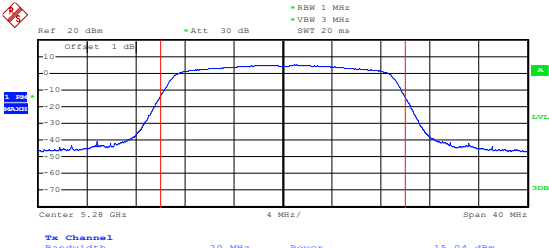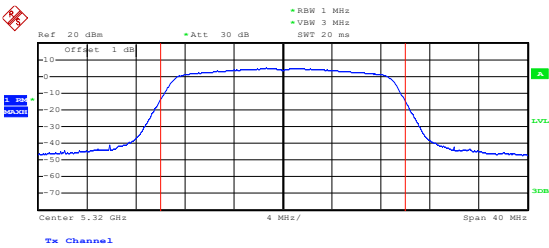802.11n-HT20-Low	 Date: 15.FEB.2023 15:49:00
802.11n-HT20-Middle	 Date: 15.FEB.2023 16:11:57
802.11n-HT20-High	 Date: 15.FEB.2023 16:12:23

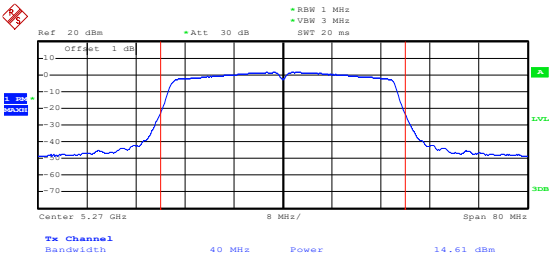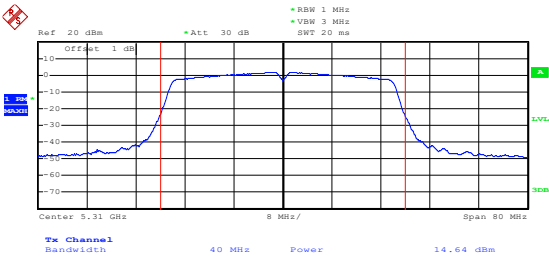
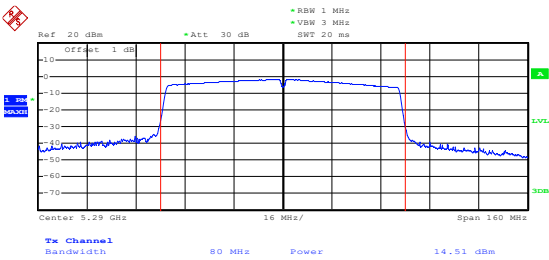
802.11n-HT40-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.27 GHz Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 14.61 dBm Date: 15.FEB.2023 16:23:45
802.11n-HT40-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.31 GHz Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 14.64 dBm Date: 15.FEB.2023 16:24:40
802.11ac-HT80-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.29 GHz Span: 160 MHz Tx Channel Bandwidth: 80 MHz Power: 14.51 dBm Date: 6.MAR.2023 15:55:42

5470-5725MHz

802.11a-Low	Date: 23.FEB.2023 08:09:52
802.11a-Middle	Date: 23.FEB.2023 08:10:28
802.11a-High	Date: 23.FEB.2023 08:10:50

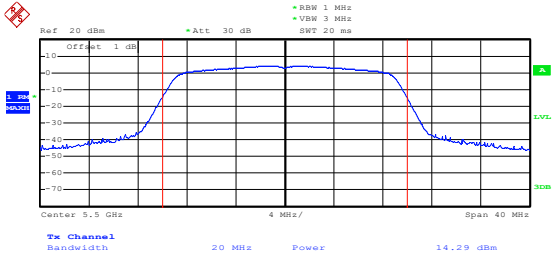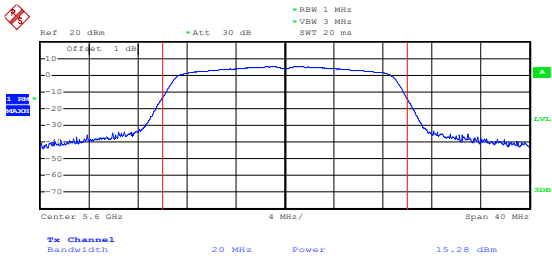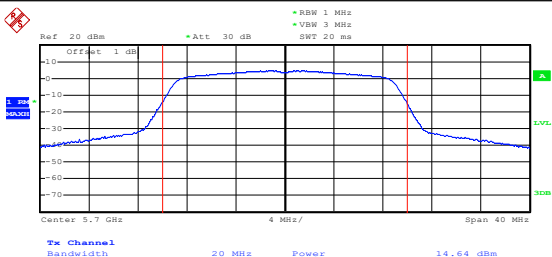
802.11n-HT20-Low	 Date: 23.FEB.2023 08:15:35
802.11n-HT20-Middle	 Date: 23.FEB.2023 08:16:26
802.11n-HT20-High	 Date: 23.FEB.2023 08:16:57

802.11n-HT40-Low	Date: 23.FEB.2023 08:19:02
802.11n-HT40- Middle	Date: 23.FEB.2023 08:19:52
802.11n-HT40-High	Date: 23.FEB.2023 08:20:29

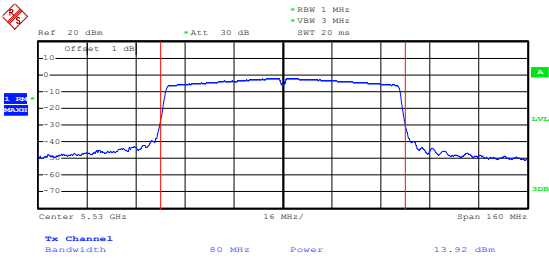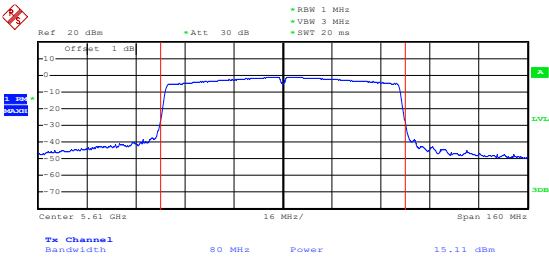802.11ac-HT80-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Offset 1 dB VSW 3 MHz SWT 20 ms Center 5.53 GHz 16 MHz/ Span 160 MHz Tx Channel Bandwidth 80 MHz Power 13.92 dBm Date: 23.FEB.2023 08:21:35
802.11ac-HT80-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Offset 1 dB VSW 3 MHz SWT 20 ms Center 5.61 GHz 16 MHz/ Span 160 MHz Tx Channel Bandwidth 80 MHz Power 15.11 dBm Date: 23.FEB.2023 08:24:24


5725-5850MHz

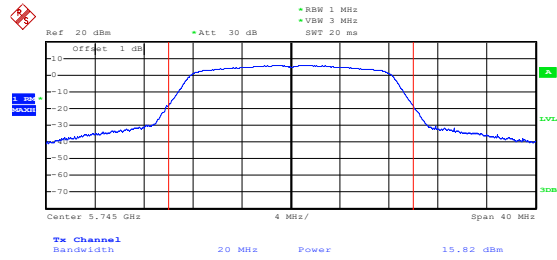802.11a-Low




Date: 16.FEB.2023 08:17:01

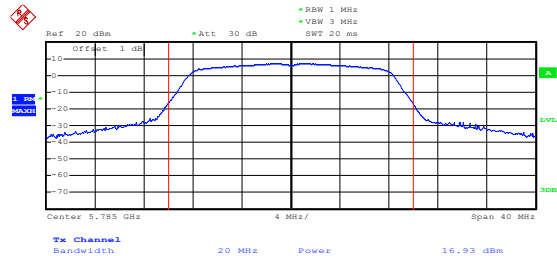802.11a-Middle






Date: 16.FEB.2023 08:17:45

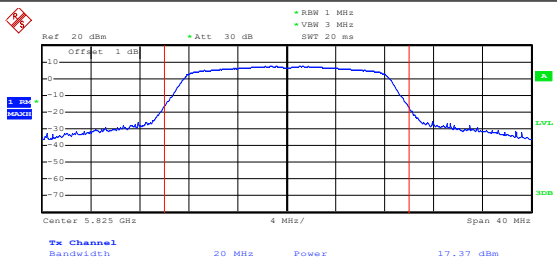
802.11a-High



Date: 16.FEB.2023 08:18:19

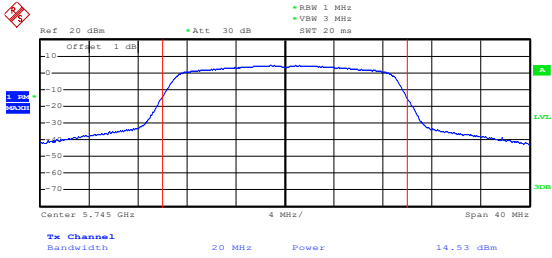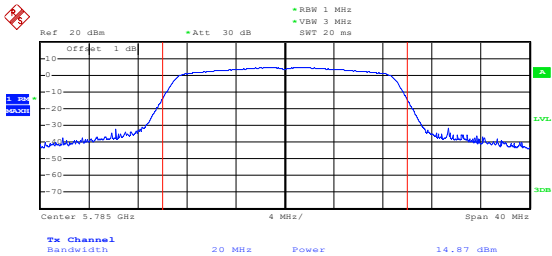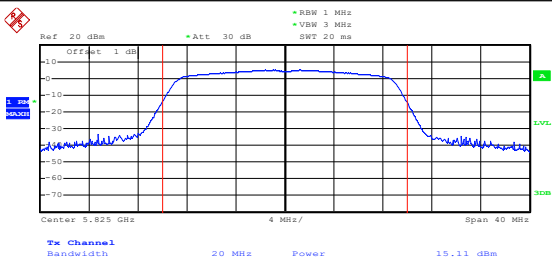
802.11n-HT20-Low	 Date: 16.FEB.2023 08:18:54
802.11n-HT20-Middle	 Date: 16.FEB.2023 08:19:30
802.11n-HT20-High	 Date: 16.FEB.2023 08:19:55

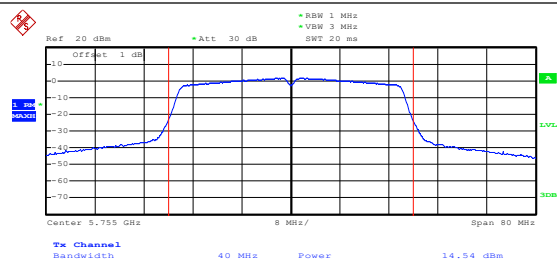802.11n-HT40-Low




Date: 16.FEB.2023 08:21:23

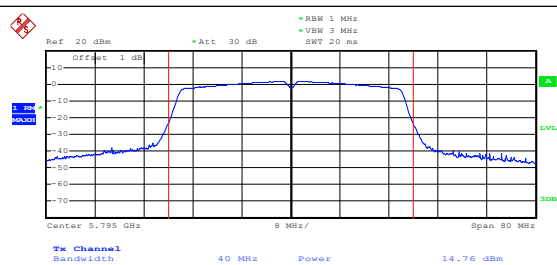802.11n-HT40-High



Date: 16.FEB.2023 08:21:46

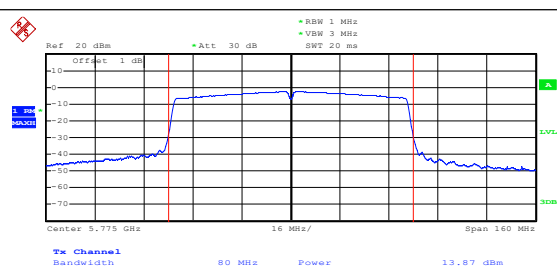802.11ac-HT80-Low



Date: 16.FEB.2023 08:16:04

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.85	-30	123	0.0237
100%		-20	178	0.0342
100%		-10	115	0.0221
100%		0	154	0.0296
100%		+10	129	0.0248
100%		+20	156	0.0300
100%		+30	105	0.0202
100%		+40	157	0.0302
100%		+50	159	0.0306
Low Battery power	3.5	+20	126	0.0242
High Battery power	4.4	+20	130	0.0250

U-NII-1: 5250-5350MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.85	-30	170	0.0321
100%		-20	114	0.0215
100%		-10	150	0.0283
100%		0	141	0.0266
100%		+10	141	0.0266
100%		+20	156	0.0294
100%		+30	155	0.0292
100%		+40	163	0.0308
100%		+50	115	0.0217
Low Battery power	3.5	+20	106	0.0200
High Battery power	4.4	+20	144	0.0272

U-NII-1: 5470-5725MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.85	-30	141	0.0253
100%		-20	113	0.0203
100%		-10	171	0.0306
100%		0	132	0.0237
100%		+10	178	0.0319
100%		+20	155	0.0278
100%		+30	139	0.0249
100%		+40	178	0.0319
100%		+50	108	0.0194
Low Battery power	3.5	+20	119	0.0213
High Battery power	4.4	+20	126	0.0226

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.85	-30	134	0.0232
100%		-20	112	0.0194
100%		-10	107	0.0185
100%		0	106	0.0183
100%		+10	105	0.0182
100%		+20	164	0.0283
100%		+30	103	0.0178
100%		+40	119	0.0206
100%		+50	125	0.0216
Low Battery power	3.5	+20	162	0.0280
High Battery power	4.4	+20	145	0.0251

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****