



Appendix B

RF Test Data for BT LE (Conducted Measurement)

Product Name: ROBOTIC POOL CLEANER

Test Model: OS7010MAX

Environmental Conditions

Temperature:	23.8 ° C
Relative Humidity:	52.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng





B.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.708	≥ 0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.702	≥ 0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.693	≥ 0.5	Pass







Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

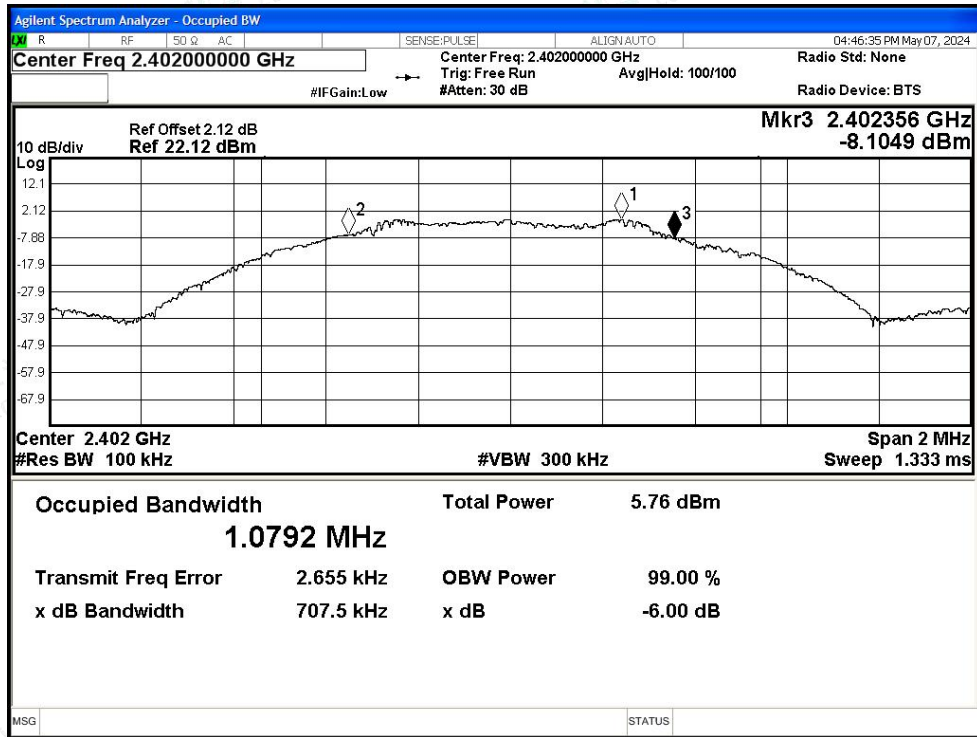

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

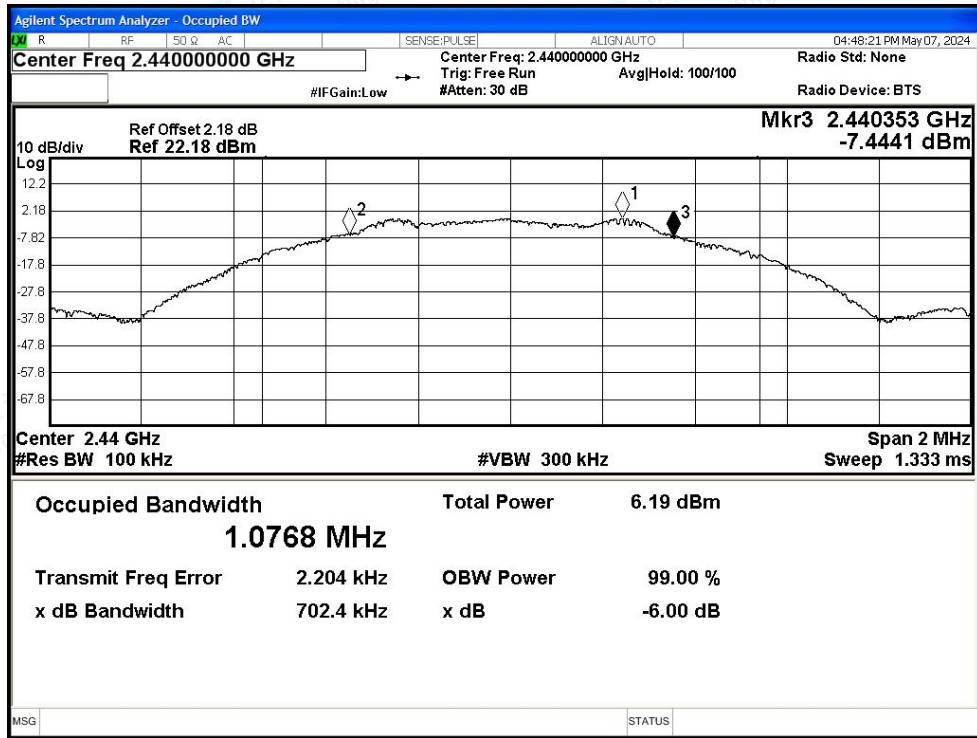

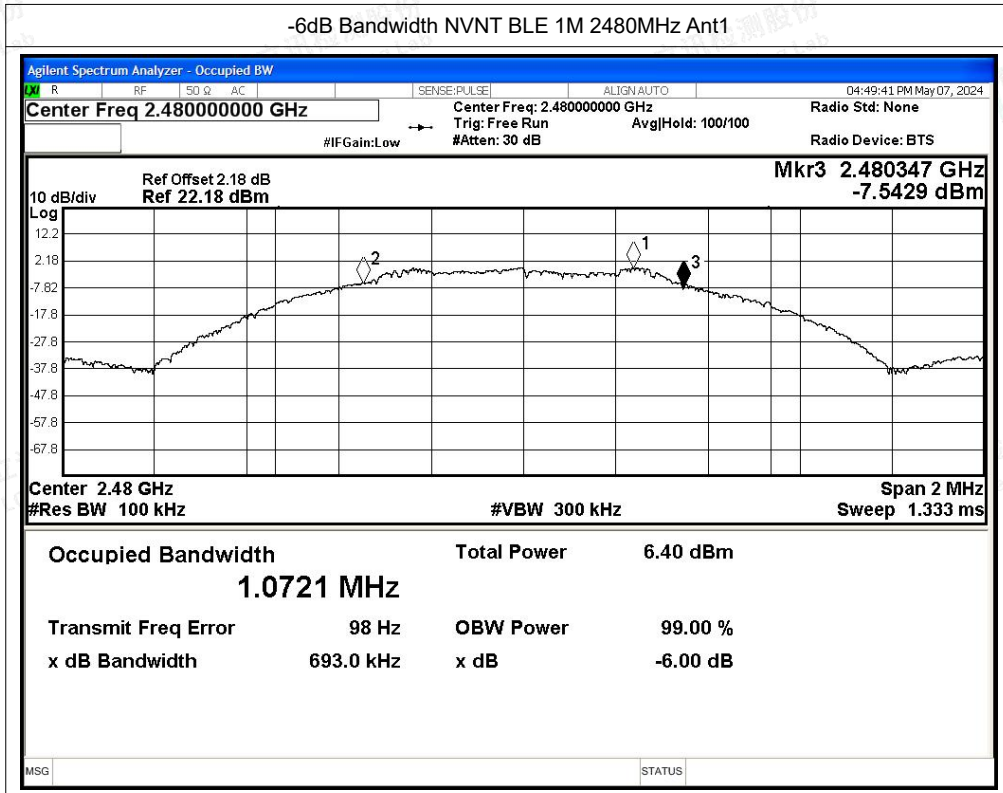



B.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	0.07	30	Pass
NVNT	BLE 1M	2440	Ant1	0.45	30	Pass
NVNT	BLE 1M	2480	Ant1	0.68	30	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

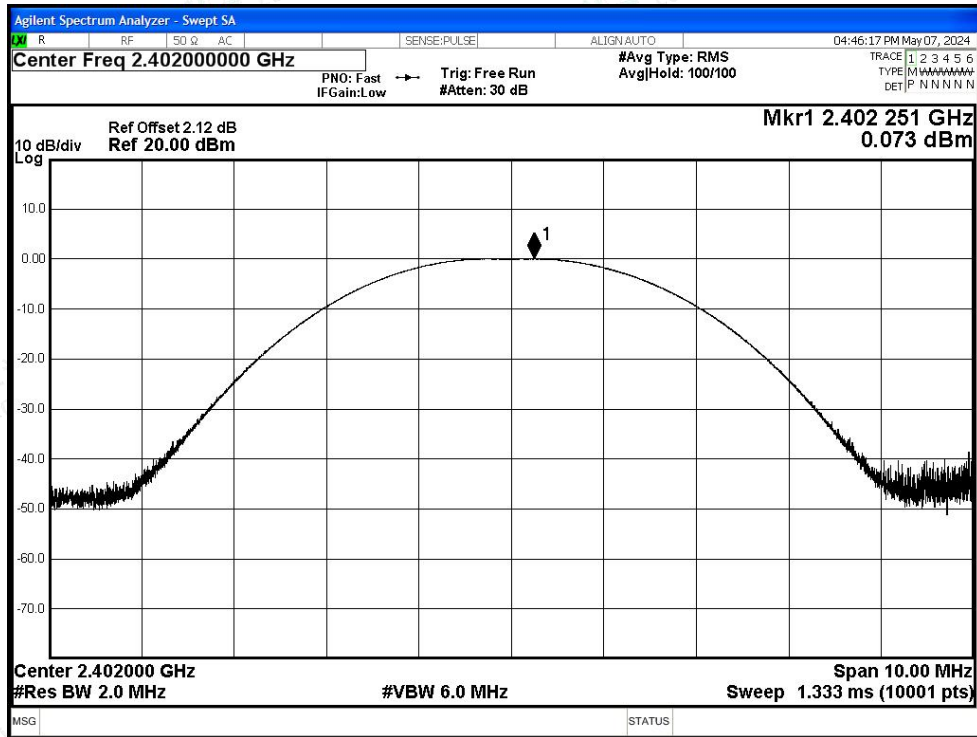

Power NVNT BLE 1M 2440MHz Ant1

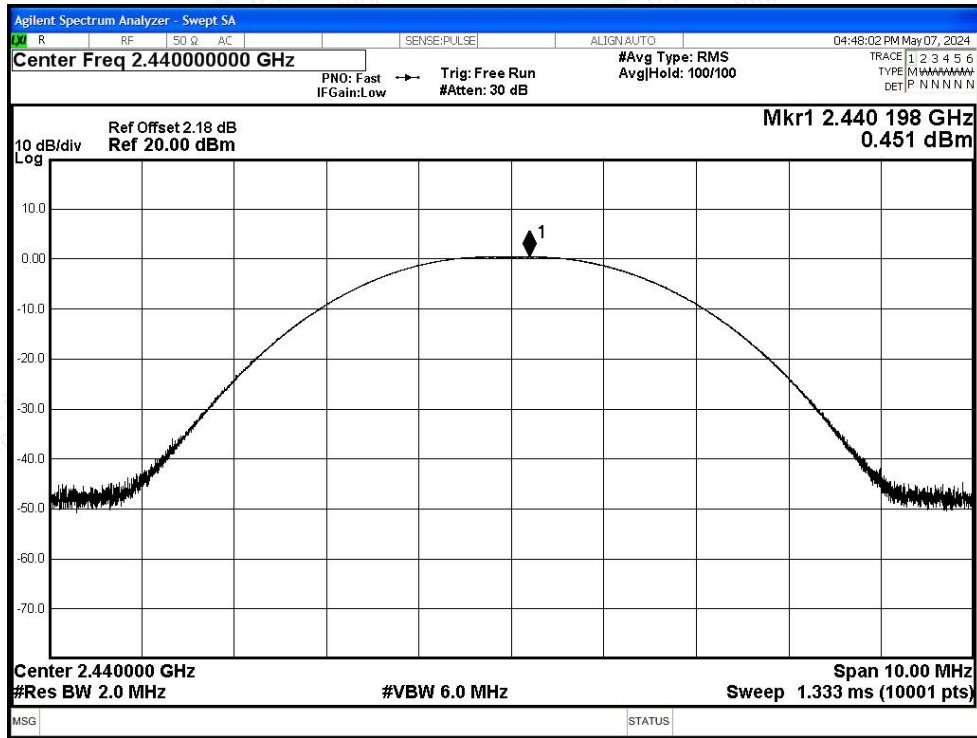

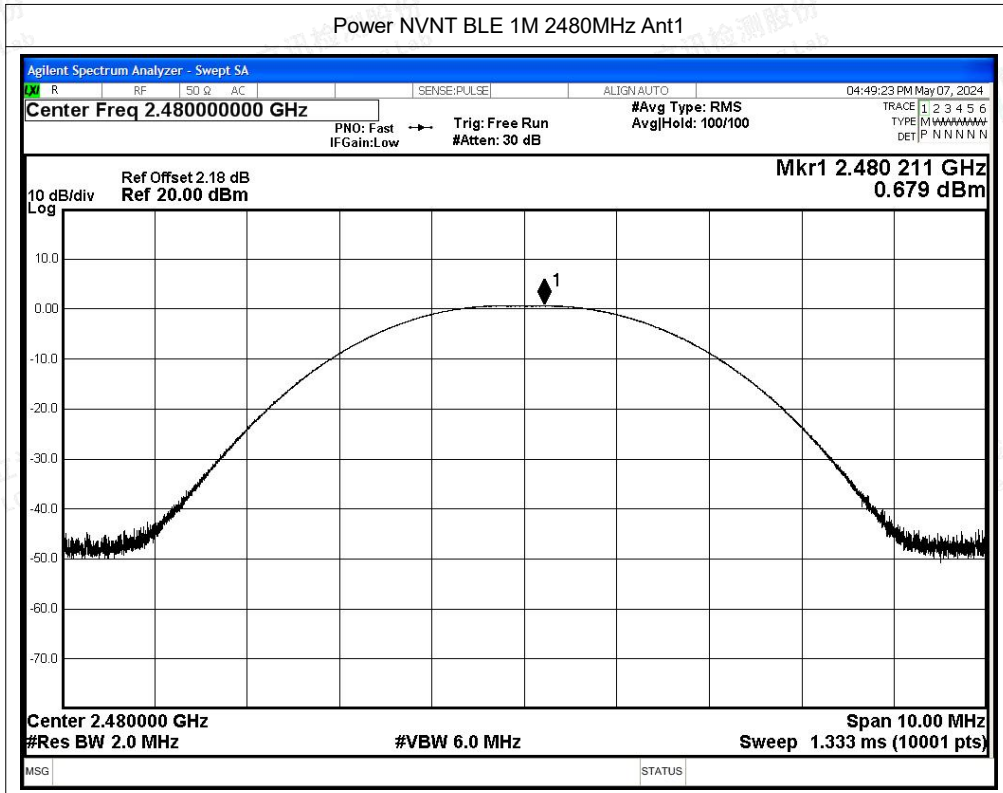



B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-16	8	Pass
NVNT	BLE 1M	2440	Ant1	-14.88	8	Pass
NVNT	BLE 1M	2480	Ant1	-14.51	8	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

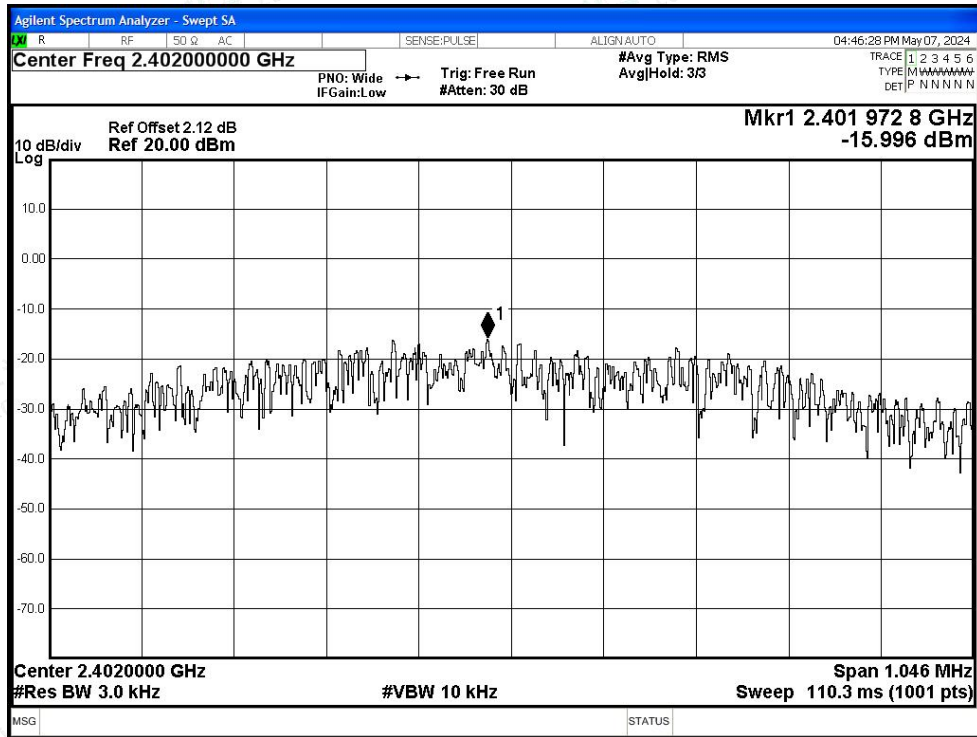


PSD NVNT BLE 1M 2440MHz Ant1

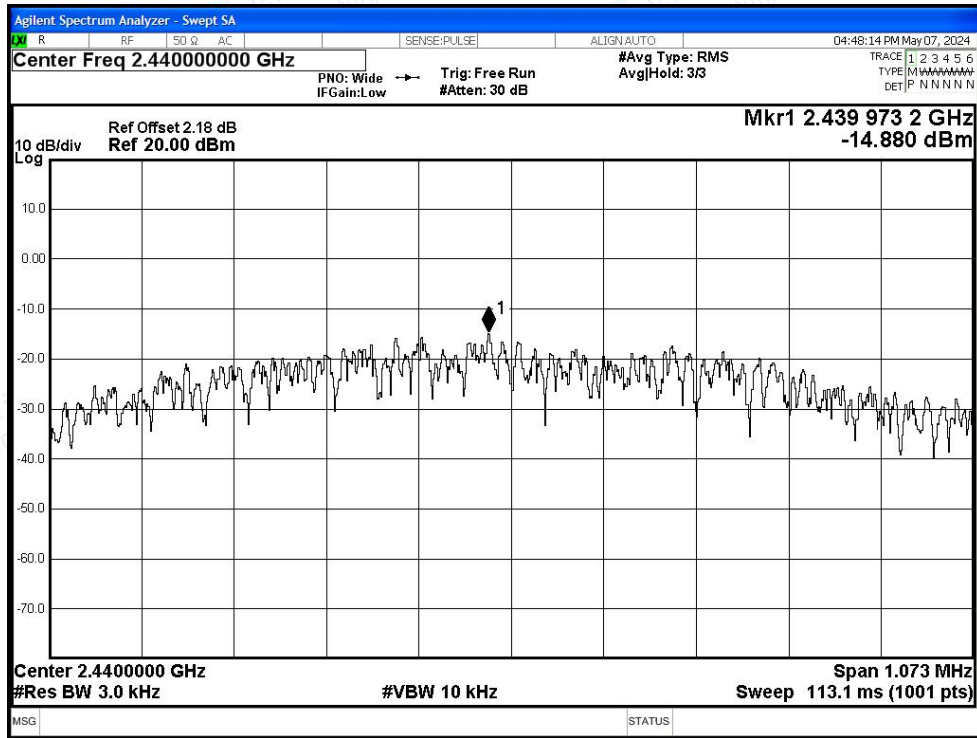



LC SA2024085EB

PSD NVNT BLE 1M 2480MHz Ant1


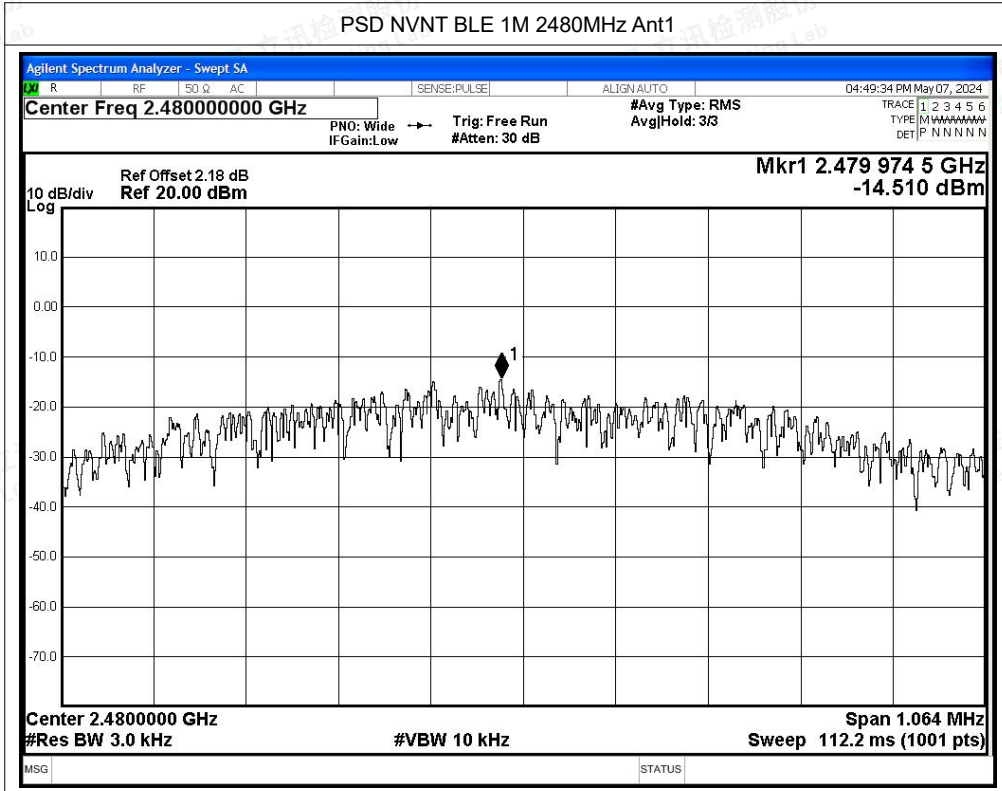






B.4 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.13	-20	Pass
NVNT	BLE 1M	2480	Ant1	-57.11	-20	Pass



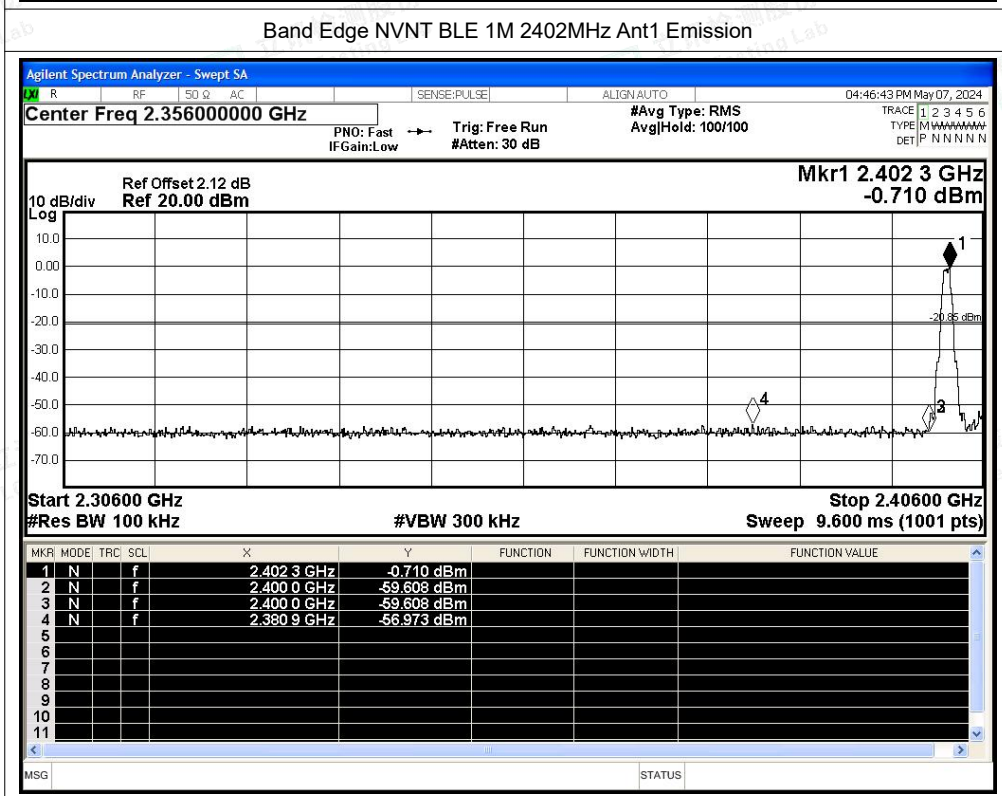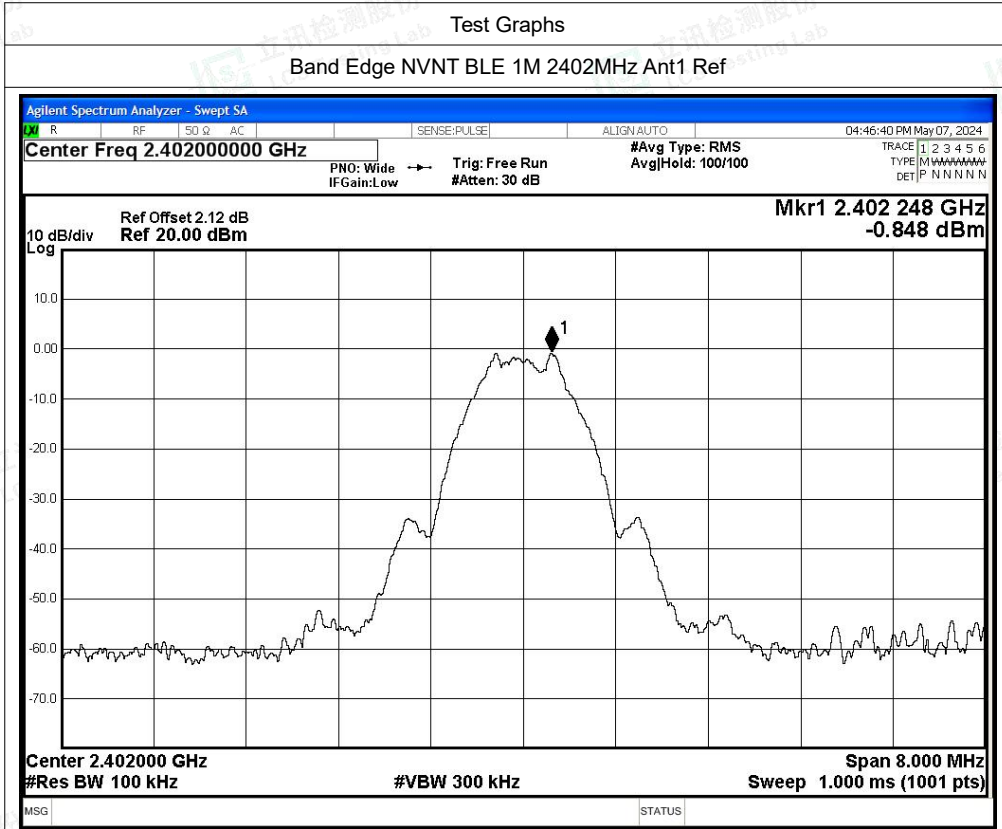

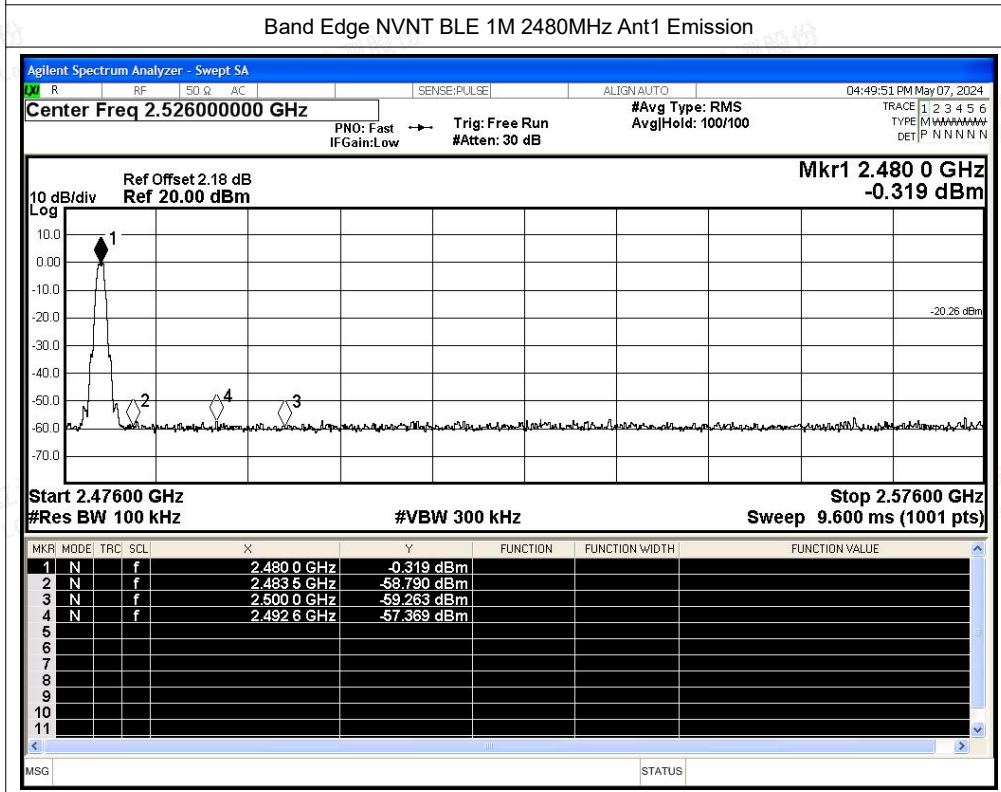
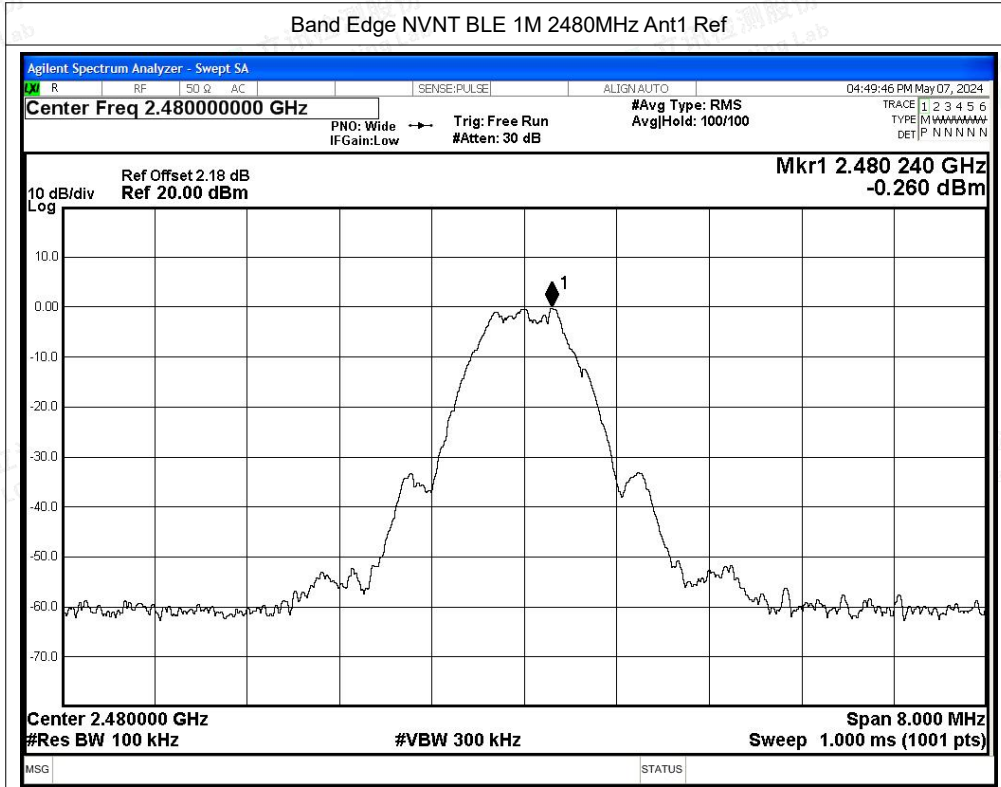






B.5 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.95	-20	Pass
NVNT	BLE 1M	2440	Ant1	-54.86	-20	Pass
NVNT	BLE 1M	2480	Ant1	-54.93	-20	Pass



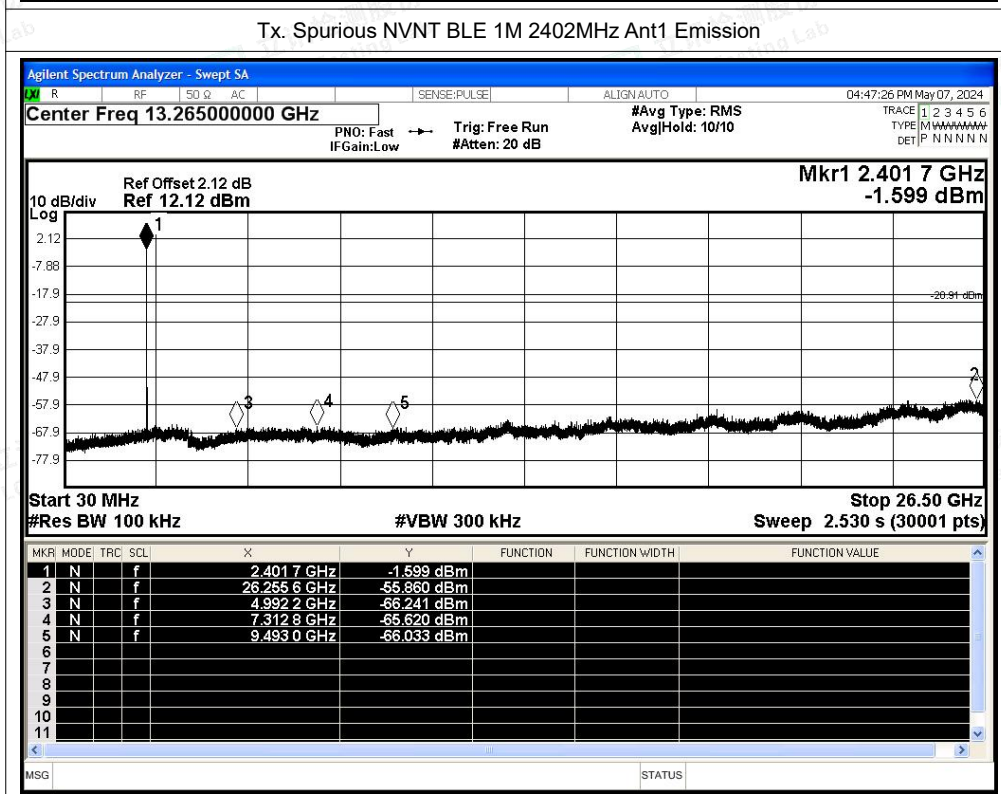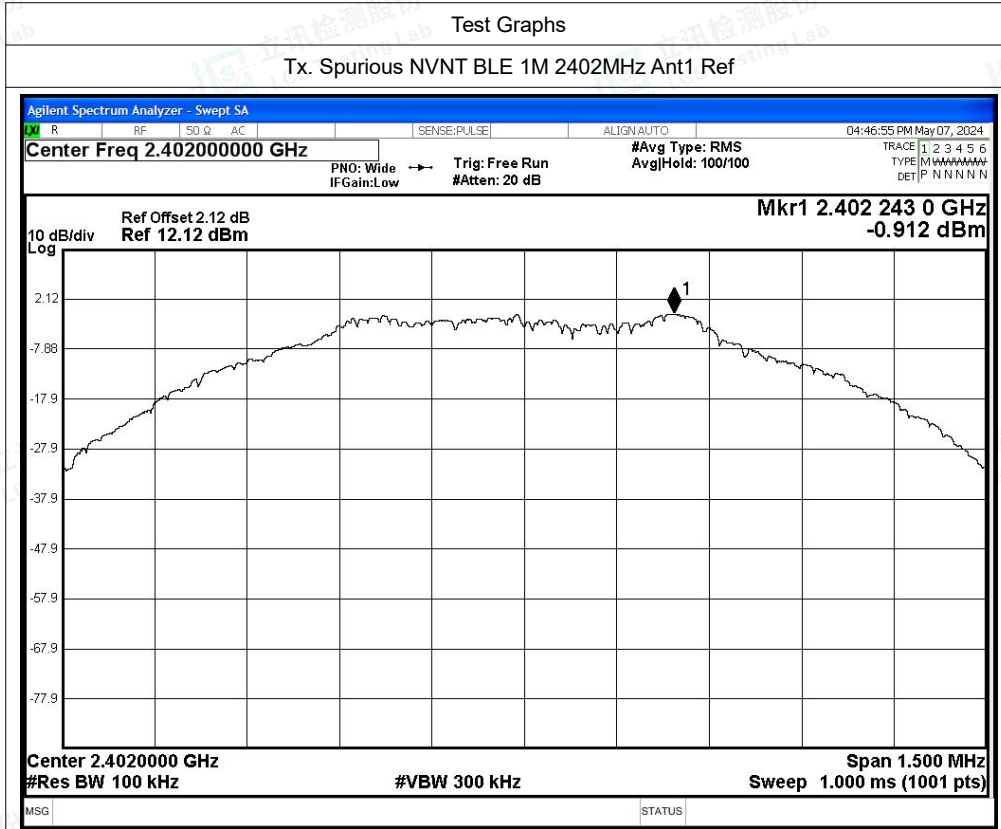


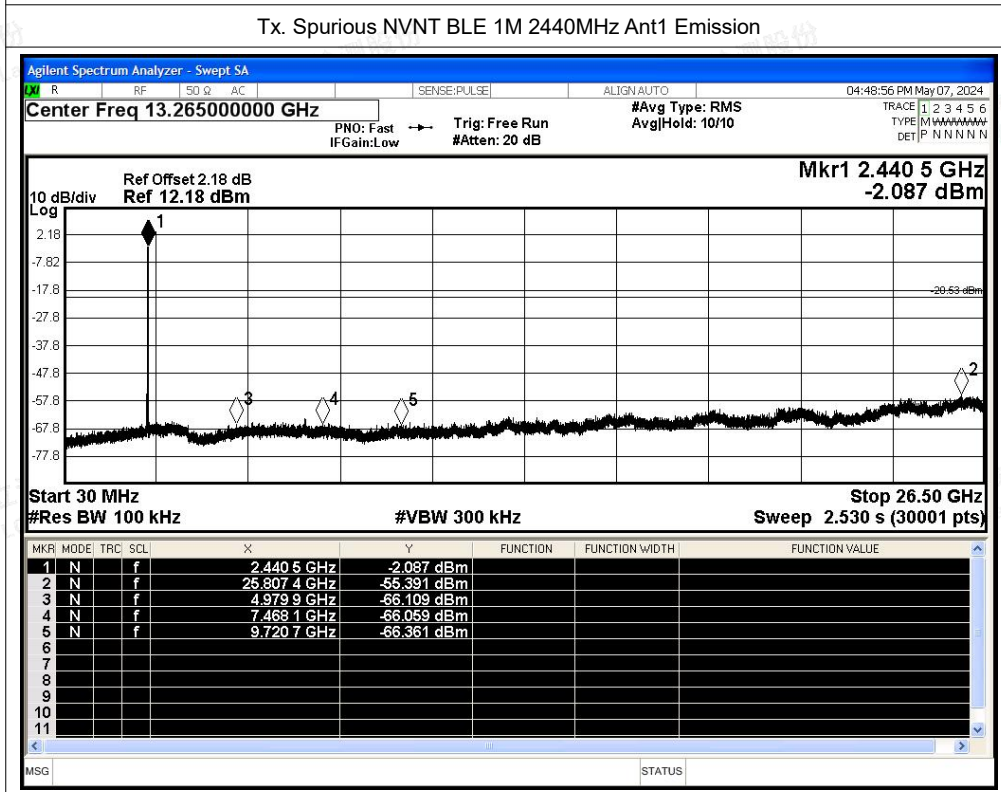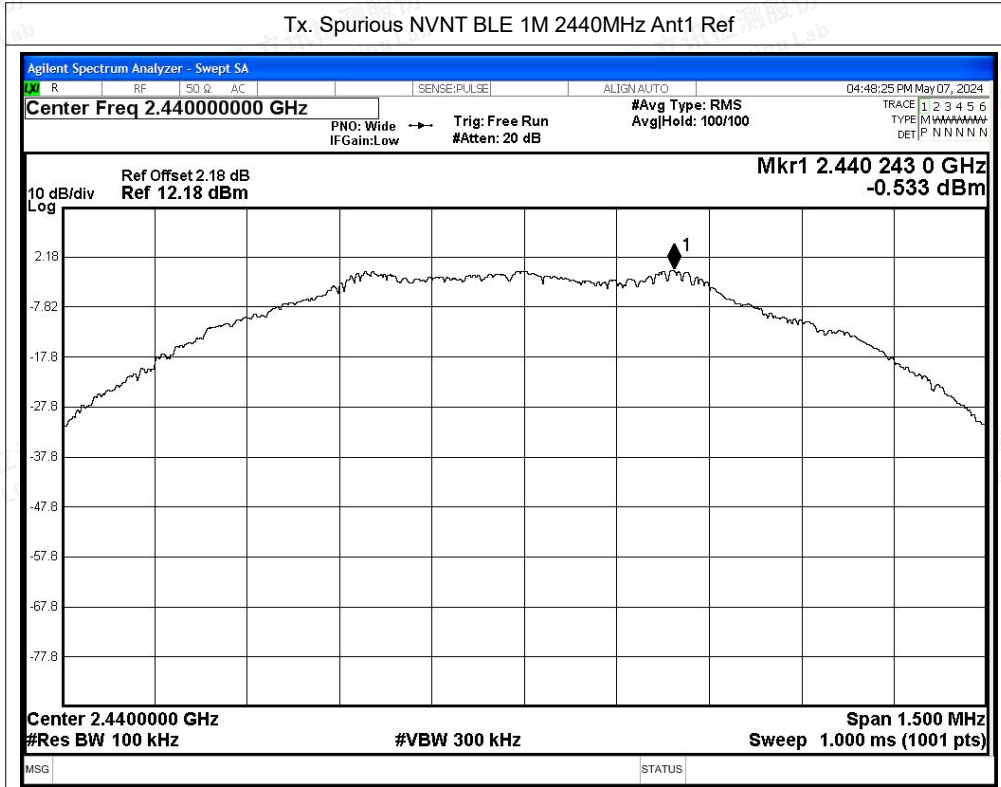

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

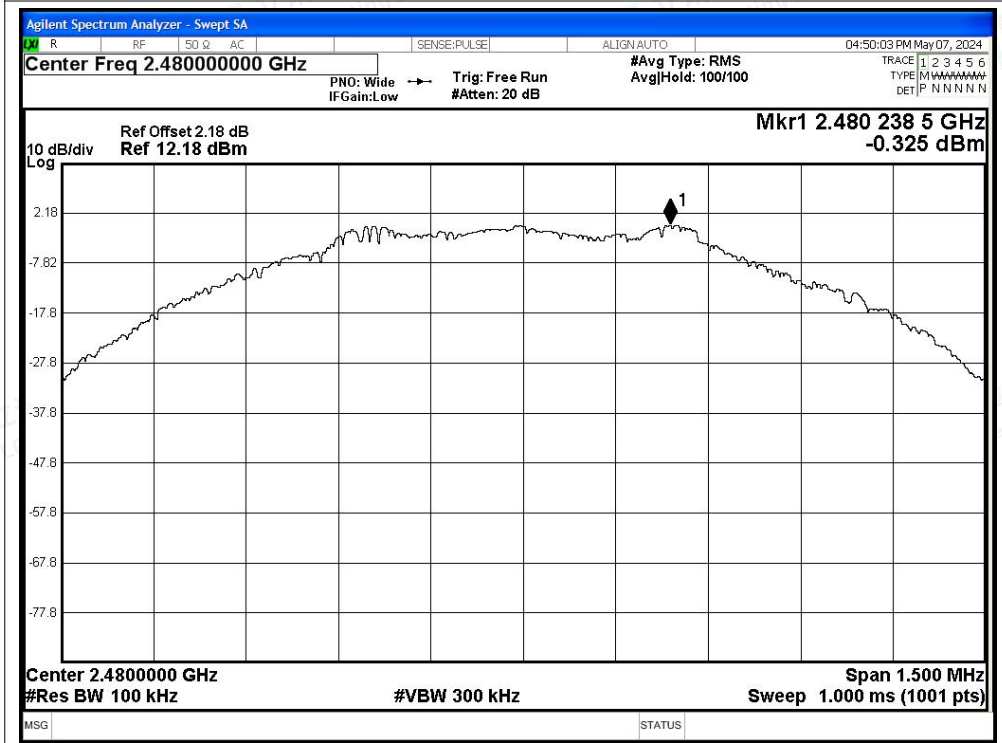

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission


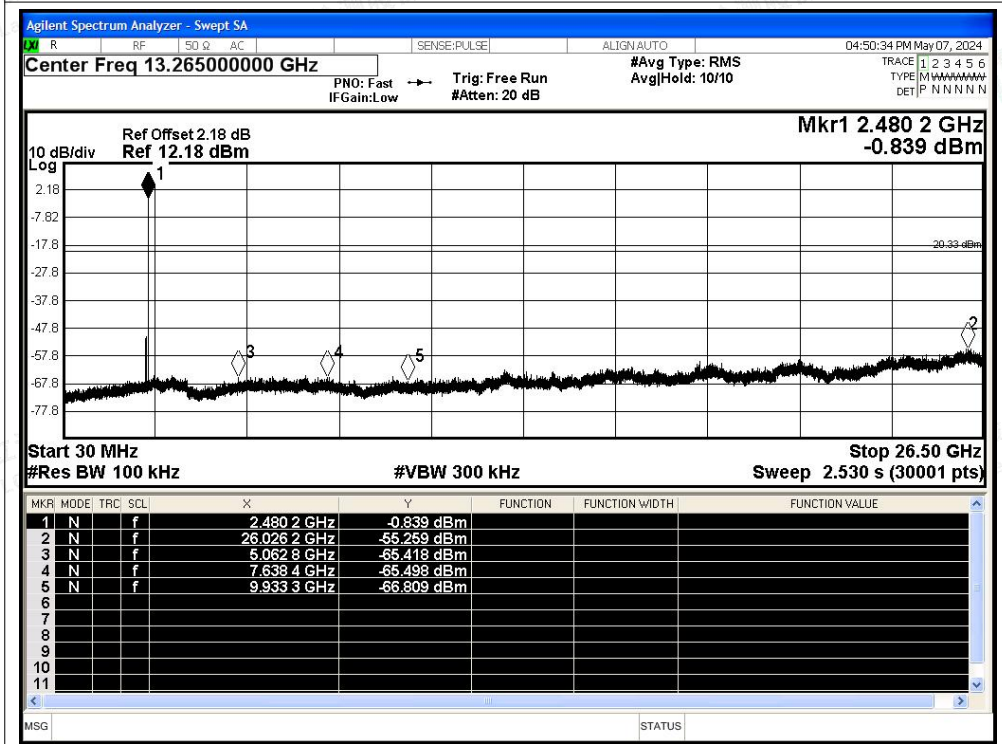




B.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	61.44	2.12	2.6
NVNT	BLE 1M	2440	Ant1	61.44	2.12	2.6
NVNT	BLE 1M	2480	Ant1	61.39	2.12	2.6




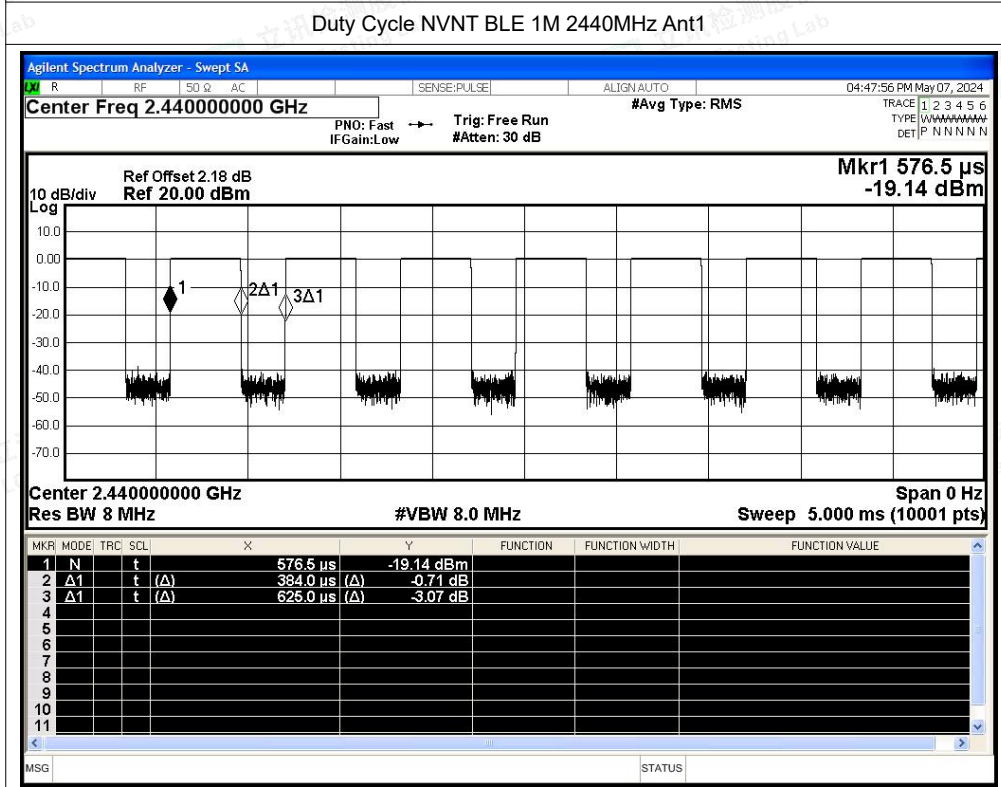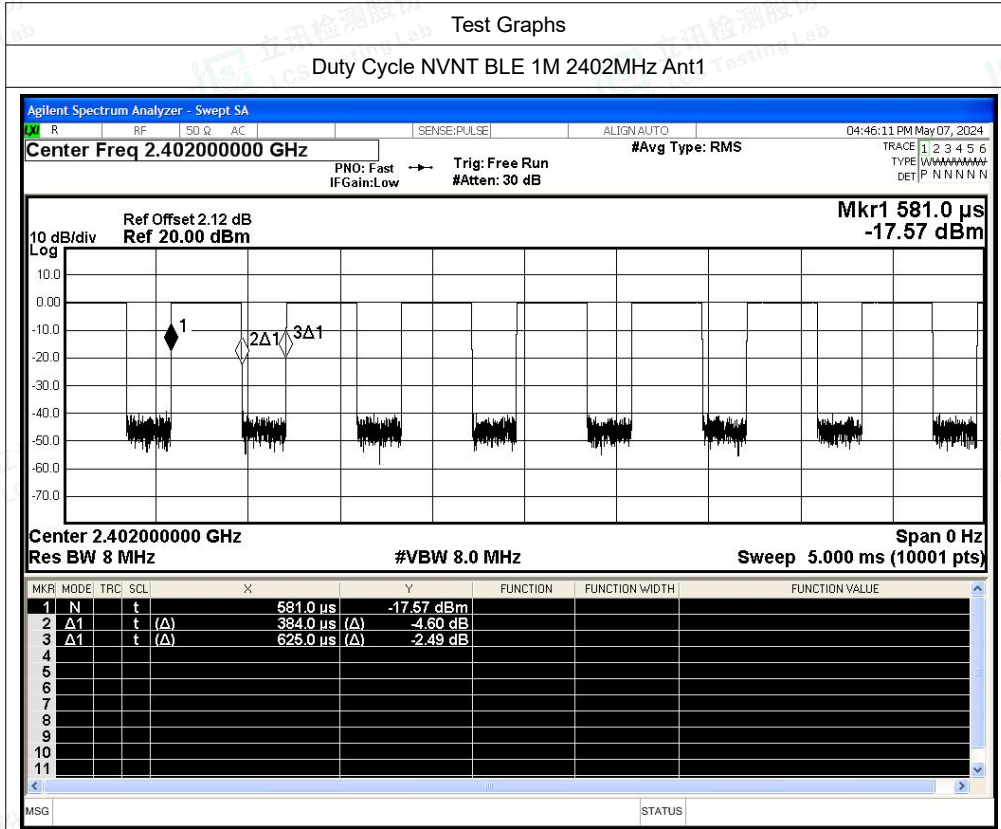



LCSA2024085EB

Duty Cycle NVNT BLE 1M 2480MHz Ant1

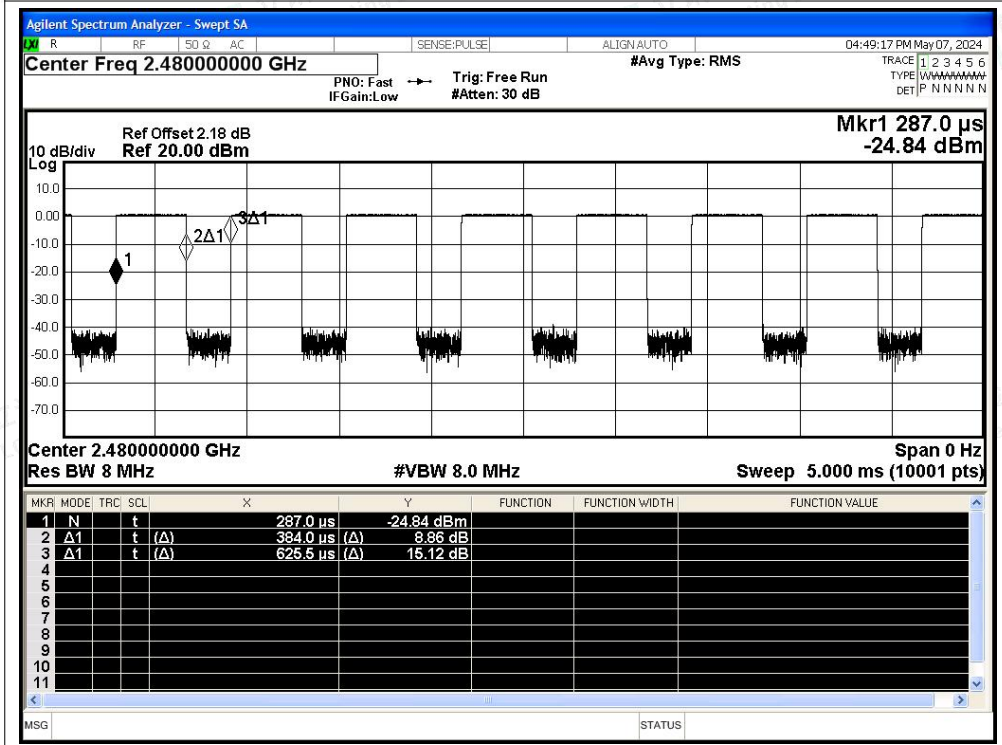



B.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-49.66	4.16	-	49.76	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-58.7	4.16	2.12	42.84	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2335.632	-46.56	4.16	-	52.86	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2365.968	-57.61	4.16	2.12	43.93	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-50.79	4.16	-	48.63	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-58.91	4.16	2.12	42.63	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-48.62	4.16	-	50.80	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-58.47	4.16	2.12	43.07	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2496.232	-47.11	4.16	-	52.31	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2489.32	-57.17	4.16	2.12	44.37	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-49.22	4.16	-	50.20	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-58.08	4.16	2.12	43.46	Average	54	Pass



