

FCC Test Report

Applicant : Huizhou Intelligent Energy Co., Ltd.

Address : 8-9/F, Bldg.E2, Qunyi Industrial Park, Sanhe
Avenue, Tonghu Town, Zhongkai High-tech
Zone, HuiZhou, China

Product Name : PORTABLE POWER STATION

Report Date : Jan. 31, 2024

Shenzhen Anbotech Compliance Laboratory Limited



Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com.cn



Contents

1. General Information	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxiliary Equipment Used During Test	6
1.4. Description of Test Modes	6
1.5. Measurement Uncertainty	6
1.6. Test Summary	7
1.7. Description of Test Facility	7
1.8. Disclaimer	7
1.9. Test Equipment List	8
2. Antenna requirement	9
2.1. Conclusion	9
3. Conducted Emission at AC power line	10
3.1. EUT Operation	10
3.2. Test Setup	10
3.3. Test Data	11
4. Emissions in frequency bands (below 30MHz)	13
4.1. EUT Operation	13
4.2. Test Setup	14
4.3. Test Data	15
5. Emissions in frequency bands (30MHz - 1GHz)	17
5.1. EUT Operation	17
5.2. Test Setup	18
5.3. Test Data	19
APPENDIX I -- TEST SETUP PHOTOGRAPH	21
APPENDIX II -- EXTERNAL PHOTOGRAPH	21
APPENDIX III -- INTERNAL PHOTOGRAPH	21



Report No.: 18360WC30017101 FCC ID: 2BASNG2400XMV1000

Page 3 of 21

TEST REPORT

Applicant : Huizhou Intelligent Energy Co., Ltd.

Manufacturer : Huizhou Intelligent Energy Co., Ltd.

Product Name : PORTABLE POWER STATION

Test Model No. : G2400X

Reference Model No. : G2400, G2400Pro, G2400PX

Trade Mark : N/A

Rating(s) : Please refer to Page 6

Test Standard(s) : **47 CFR Part 15.209**
ANSI C63.10-2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with above listed standard(s) requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt:

Jan. 19, 2024

Date of Test:

Jan. 23, 2024 to Jan. 30, 2024

Prepared By:

Stella zhu

(Stella Zhu)

Approved & Authorized Signer:

Edward pan

(Edward Pan)

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com.cn



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Jan. 31, 2024



1. General Information

1.1. Client Information

Applicant	:	Huizhou Intelligent Energy Co., Ltd.
Address	:	8-9/F, Bldg.E2, Qunyi Industrial Park, Sanhe Avenue, Tonghu Town, Zhongkai High-tech Zone, HuiZhou, China
Manufacturer	:	Huizhou Intelligent Energy Co., Ltd.
Address	:	8-9/F, Bldg.E2, Qunyi Industrial Park, Sanhe Avenue, Tonghu Town, Zhongkai High-tech Zone, HuiZhou, China
Factory	:	Huizhou Intelligent Energy Co., Ltd.
Address	:	8-9/F, Bldg.E2, Qunyi Industrial Park, Sanhe Avenue, Tonghu Town, Zhongkai High-tech Zone, HuiZhou, China

1.2. Description of Device (EUT)

Product Name	:	PORTABLE POWER STATION
Test Model No.	:	G2400X
Reference Model No.	:	G2400, G2400Pro, G2400PX (Note: All samples are the same except the model number, so we prepare "G2400X" for test only.)
Trade Mark	:	N/A
Test Power Supply	:	AC 120V/60Hz; DC 51.2V Battery inside; DC 12V
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A

RF Specification

Operation Frequency	:	110.1-205kHz
Modulation Type	:	ASK
Antenna Type	:	Inductive loop coil Antenna
Antenna Gain(Peak)	:	0 dBi

Remark:

- (1) All of the RF specification are provided by customer.
(2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



Rating(s):

PORTABLE POWER STATION

- Type: G2400X
- Battery Capacity: 51.2V, 36Ah/1843.2Wh
- AC Input: 100V-130V-10A, 60Hz, 1200W
- PV Input: DC 12V-75V-25A, 800W Max
- AC Output X6: Pure Sine Wave 120V-60Hz, 2400W
- Extra Battery: 51.2V-60A
- DC Output X2 + Cigarette Lighter Socket Output: Total 12V-10A
- USB-A Output X2: 5V-3A, 9V-2A, 12V-1.5A, 18W Max
- USB-C Output X2: 5V/9V/12V/15V/20V-3A, 20V-5A, 100W Max
- Wireless Charge: 10W
- Operating Temp: 14 to 104°F (-10 to 40°C)
- Charging Temp: 32 to 104°F (0 to 40°C)
- Manufacturer: Huizhou Intelligent Energy Co., Ltd.
- Date Code: 

⚠ WARNING!

- Do not short-circuit the unit. To avoid short-circuiting, keep the unit away from all metal objects (e.g. coins, hair-pins, keys, etc.).
- Do not heat the unit, or dispose of it in fire, water or other liquids. Keep away from high temperatures.
- Do not expose the unit to direct sunlight. Keep away from high humidity, dusty places.
- Do not disassemble or reassemble this unit.
- Do not drop and place heavy objects on, or allow strong impact to this unit.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- The unit may become hot when charging. This is normal. Be careful when handling.
- Use the unit properly to avoid electronic shock.
- The product is only used for emergency power station, it can not replace the standard DC or AC power of household appliances or digital products.
- Do not overcharge the internal battery. See Instruction Manual.

⚠ AVERTISSEMENT!

- Ne court-circuitez pas l'appareil. Pour éviter tout court-circuit, éloignez l'appareil de tout objet métallique (par exemple, pièces de monnaie, épingles à cheveux, clés, etc.).
- Ne chauffez pas l'appareil et ne le jetez pas dans le feu, l'eau ou d'autres liquides. Tenir à l'écart des températures élevées.
- N'exposez pas l'appareil à la lumière directe du soleil.
- Tenir à l'écart des endroits humides et poussiéreux.
- Ne démontez pas et ne réassemblez pas cet appareil.
- Ne laissez pas tomber, ne placez pas d'objets lourds dessus et ne laissez pas de chocs violents sur cet appareil.
- Cet appareil n'est pas destiné à être utilisé par des personnes (y compris des enfants) ayant des capacités physiques, sensorielles ou mentales réduites, ou un manque d'expérience et de connaissances, à moins qu'elles n'aient reçu une supervision ou des instructions concernant.
- L'utilisation de l'appareil par une personne responsable de leur sécurité.
- Les enfants doivent être surveillés pour s'assurer qu'ils ne jouent pas avec l'appareil.
- L'appareil peut devenir chaud pendant la charge. C'est normal. Soyez prudent lors de la manipulation.
- Utilisez l'appareil correctement pour éviter les chocs électroniques. Le produit n'est utilisé que pour la centrale électrique de secours, il ne peut pas remplacer l'alimentation DC ou CA standard des appareils ménagers ou des produits numériques.
- Ne pas surcharger la batterie interne. Consulter le manuel d'utilisation.



This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. FCC ID: 2BASNG2400XMV1000

G2400XMV1.0.00 / 3.06.04.0611

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
/	/	/	/

1.4. Description of Test Modes

Pretest Modes	Descriptions
TM1	AC charging+WPT (AC120V/60Hz)
TM2	DC charging+WPT(DC 12V)
TM3	WPT Mode(DC 51.2V Battery inside)

1.5. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.4dB
Radiated emissions (Below 30MHz)	3.53dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



1.6. Test Summary

Test Items	Test Modes	Status
Antenna requirement	/	P
Conducted Emission at AC power line	Mode1,2,3	P
Emissions in frequency bands (below 30MHz)	Mode1,2,3	P
Emissions in frequency bands (30MHz - 1GHz)	Mode1,2,3	P
Note: P: Pass N: N/A, not applicable		

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

1.8. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



1.9. Test Equipment List**Conducted Emission at AC power line**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	2023-10-12	2024-10-11
2	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040D T001	2023-07-05	2024-07-04
3	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	2023-10-12	2024-10-11
4	Software Name EZ-EMC	Farad Technology	ANB-03A	N/A	/	/

Emissions in frequency bands (below 30MHz)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	2023-10-12	2024-10-11
2	Pre-amplifier	Schwarzbeck	BBV-9745	9745-075	2023-10-12	2024-10-11
3	Software Name EZ-EMC	Farad Technology	EMEC-3A1	N/A	/	/
4	Loop Antenna (9K-30M)	Schwarzbeck	FMZB1519 B	00053	2023-10-12	2024-10-11

Emissions in frequency bands (30MHz - 1GHz)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	2022-10-16	2025-10-15
2	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	2023-10-12	2024-10-11
3	Pre-amplifier	SONOMA	310N	186860	2023-10-12	2024-10-11
4	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	2022-10-23	2025-10-22
5	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	/	/



2. Antenna requirement

Test Requirement:

Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1. Conclusion

The antenna is a Inductive loop coil antenna which permanently attached, and the best case gain of the antenna is 0 dBi . It complies with the standard requirement.




3. Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.10-2020 section 6.2		
Procedure:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

3.1. EUT Operation

Operating Environment:	
Test mode:	1: TM1: AC charging+WPT (AC120V/60Hz) 2: TM2: DC charging+WPT(DC 12V) 3: TM3: WPT Mode(DC 51.2V Battery inside)


3.2. Test Setup

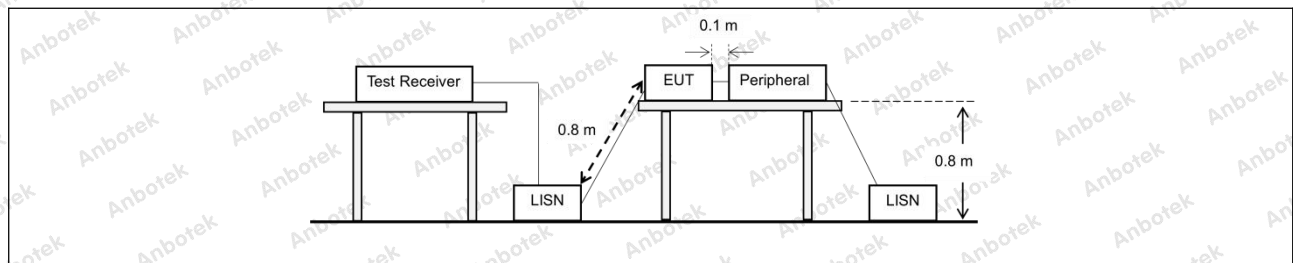

3.3. Test Data

Temperature:	23 °C	Humidity:	51.9 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	--------	-----------------------	---------

TM1 / Line: Line

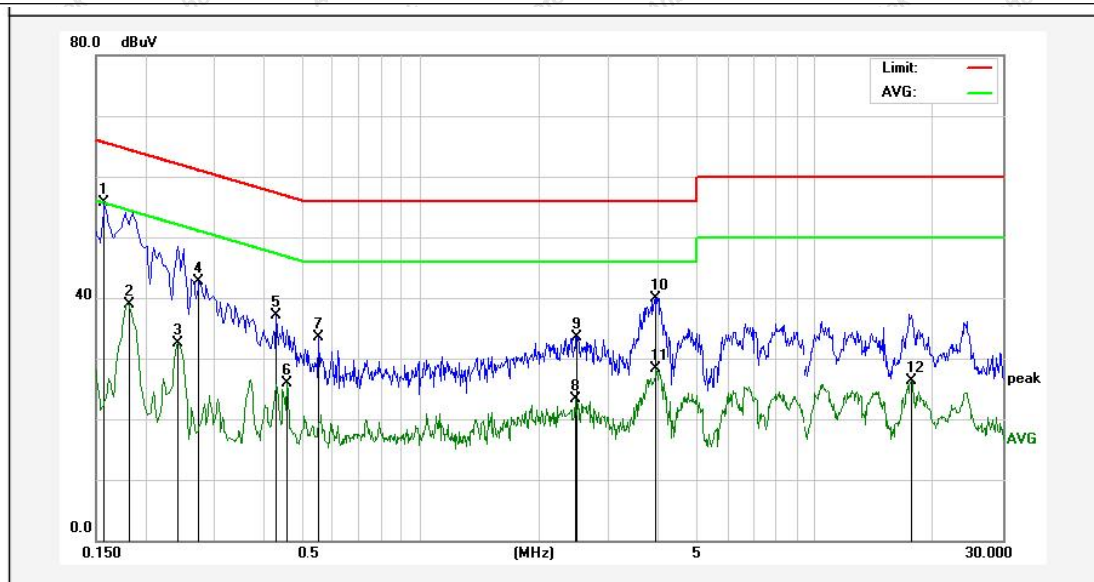


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	36.80	18.98	55.78	65.56	-9.78	QP	
2	0.1819	19.92	18.99	38.91	54.39	-15.48	AVG	
3	0.2420	13.59	19.00	32.59	52.02	-19.43	AVG	
4	0.2740	23.76	19.02	42.78	60.99	-18.21	QP	
5	0.4300	18.12	19.04	37.16	57.25	-20.09	QP	
6	0.4580	6.78	19.08	25.86	46.73	-20.87	AVG	
7	0.5540	14.44	19.11	33.55	56.00	-22.45	QP	
8	2.4660	4.36	18.88	23.24	46.00	-22.76	AVG	
9	2.4940	14.60	18.87	33.47	56.00	-22.53	QP	
10	3.9420	21.15	18.84	39.99	56.00	-16.01	QP	
11	3.9460	9.50	18.84	28.34	46.00	-17.66	AVG	
12	17.6380	7.51	18.85	26.36	50.00	-23.64	AVG	



Report No.: 18360WC30017101 FCC ID: 2BASNG2400XMV1000 Page 12 of 21

Temperature:	23 °C	Humidity:	51.9 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	--------	-----------------------	---------

TM1 / Line: Neutral

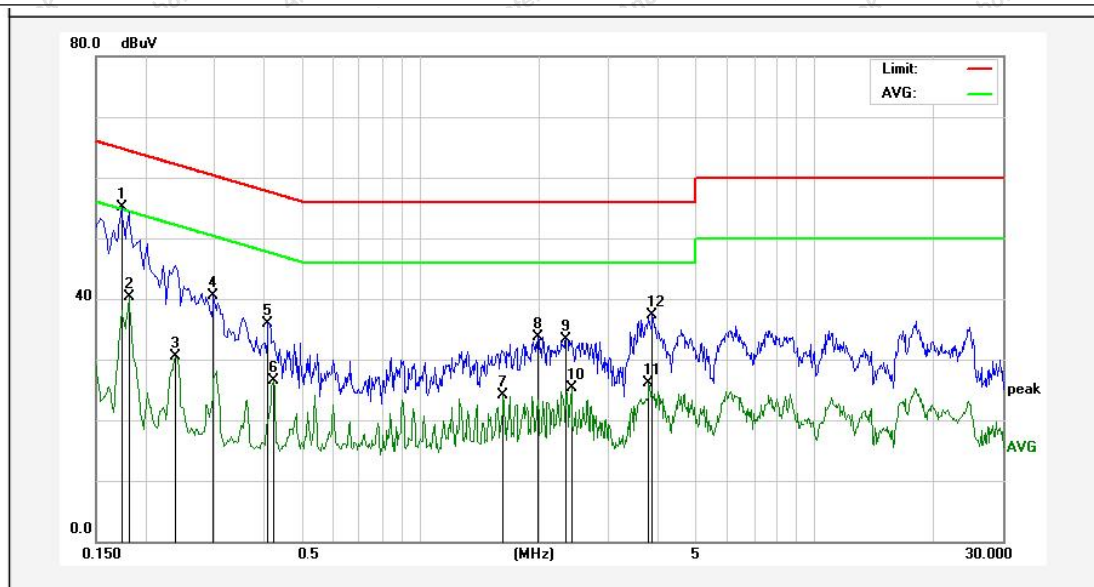

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	36.04	18.98	55.02	64.76	-9.74	QP	
2	0.1819	21.41	18.99	40.40	54.39	-13.99	AVG	
3	0.2380	11.44	19.00	30.44	52.16	-21.72	AVG	
4	0.2980	21.54	19.05	40.59	60.30	-19.71	QP	
5	0.4100	16.99	19.00	35.99	57.65	-21.66	QP	
6	0.4220	7.55	19.03	26.58	47.41	-20.83	AVG	
7	1.6260	5.30	18.90	24.20	46.00	-21.80	AVG	
8	1.9820	14.92	18.88	33.80	56.00	-22.20	QP	
9	2.3380	14.45	18.88	33.33	56.00	-22.67	QP	
10	2.4180	6.36	18.88	25.24	46.00	-20.76	AVG	
11	3.7860	7.35	18.84	26.19	46.00	-19.81	AVG	
12	3.8620	18.40	18.84	37.24	56.00	-18.76	QP	

Note: Only record the worst data in the report.



4. Emissions in frequency bands (below 30MHz)


Test Requirement:	47 CFR Part 15.209		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.			
Test Method:	ANSI C63.10-2020 section 6.4		
Procedure:	ANSI C63.10-2020 section 6.4		

4.1. EUT Operation

Operating Environment:	
Test mode:	1: TM1: AC charging+WPT (AC120V/60Hz) 2: TM2: DC charging+WPT(DC 12V) 3: TM3: WPT Mode(DC 51.2V Battery inside)



4.2. Test Setup

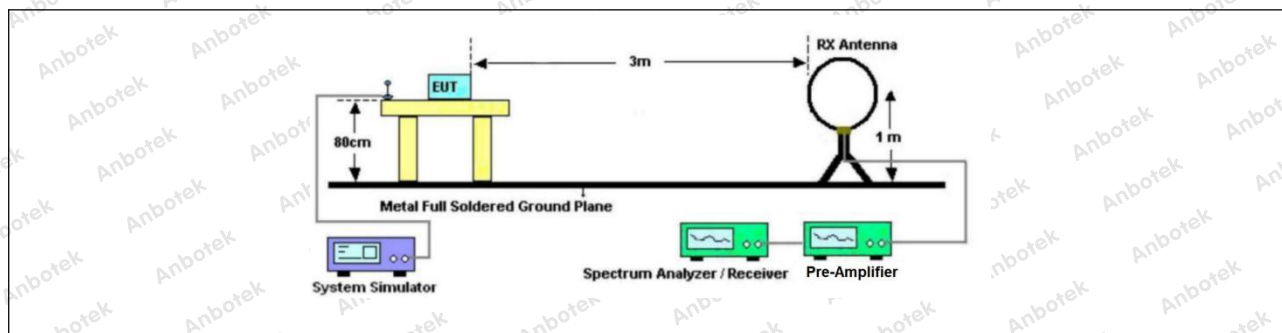


4.3. Test Data

Test Results (Between 9KHz – 150KHz)

Temperature:	21 °C	Humidity:	49 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	------	-----------------------	---------

TM2

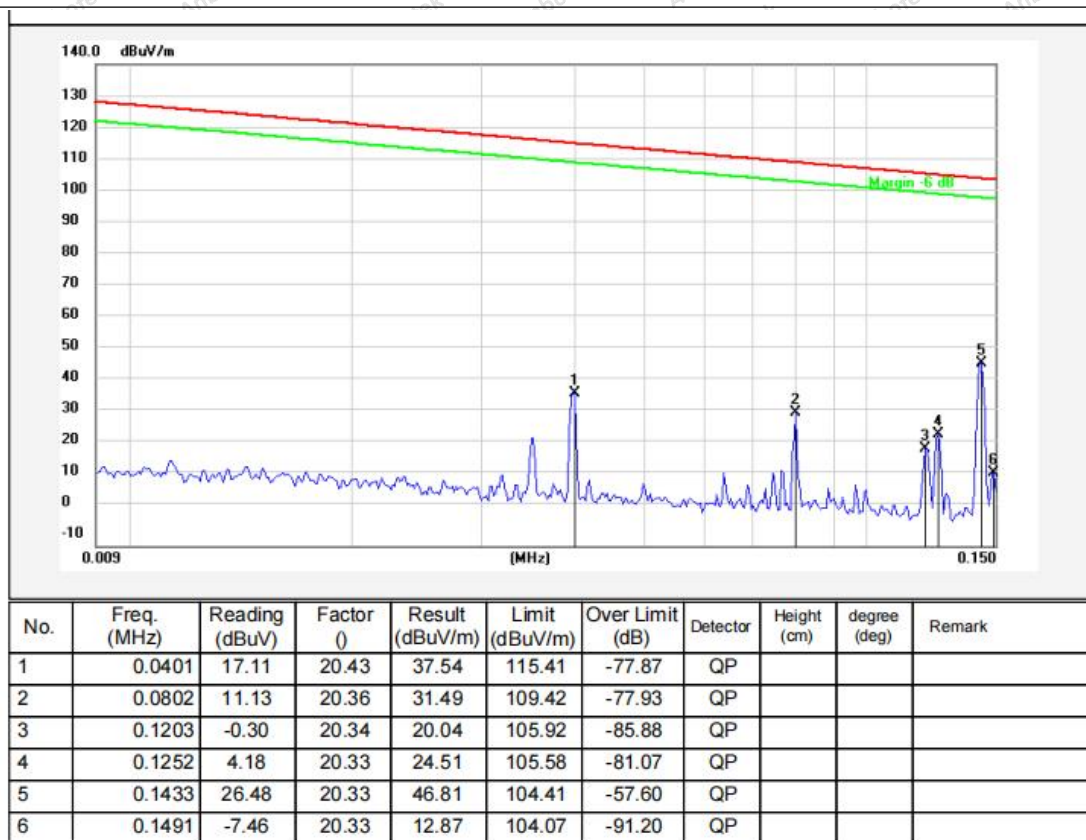

Note: Only record the worst data in the report.




Report No.: 18360WC30017101 FCC ID: 2BASNG2400XMV1000 Page 16 of 21

Test Results (Between 0.15MHz – 30MHz)

Temperature:	21 °C	Humidity:	49 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	------	-----------------------	---------

TM2

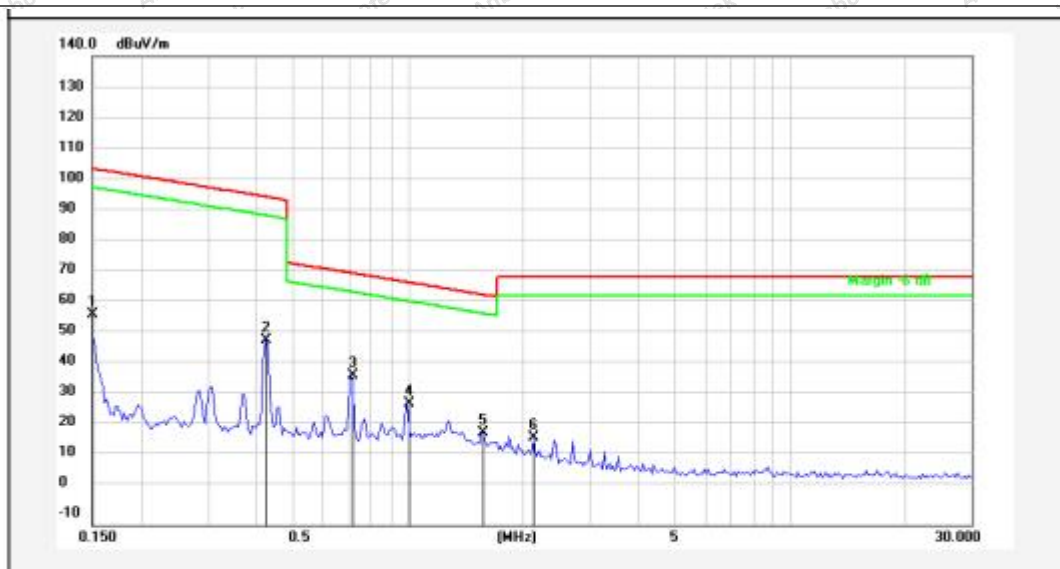

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.1500	37.09	20.33	57.42	104.02	-46.60	QP			
2	0.4282	28.88	20.27	49.15	94.96	-45.81	QP			
3	0.7122	17.41	20.25	37.66	70.56	-32.90	QP			
4	0.9997	8.67	20.25	28.92	67.62	-38.70	QP			
5	1.5601	-0.67	20.26	19.59	63.77	-44.18	QP			
6	2.1439	-2.20	20.28	18.08	69.50	-51.42	QP			

Note: Only record the worst data in the report.



5. Emissions in frequency bands (30MHz - 1GHz)


Test Requirement:	47 CFR Part 15.209		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.			
Test Method:	ANSI C63.10-2020 section 6.5		
Procedure:	ANSI C63.10-2020 section 6.5		

5.1. EUT Operation

Operating Environment:	
Test mode:	1: TM1: AC charging+WPT (AC120V/60Hz) 2: TM2: DC charging+WPT(DC 12V) 3: TM3: WPT Mode(DC 51.2V Battery inside)



5.2. Test Setup

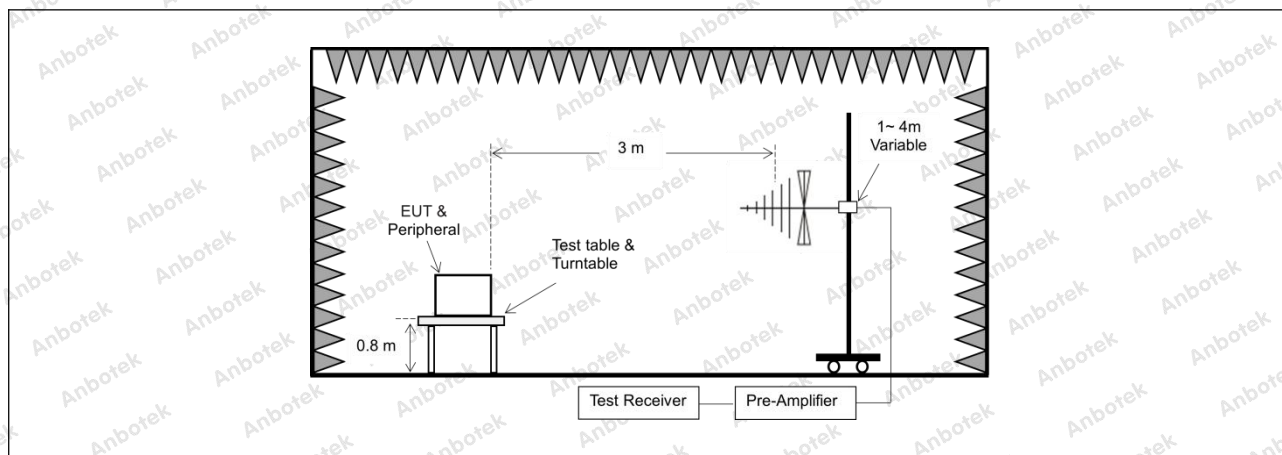

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com




Hotline
400-003-0500
www.anbotek.com.cn



5.3. Test Data

Temperature:	21 °C	Humidity:	49 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	------	-----------------------	---------

TM2 / Polarization: Horizontal

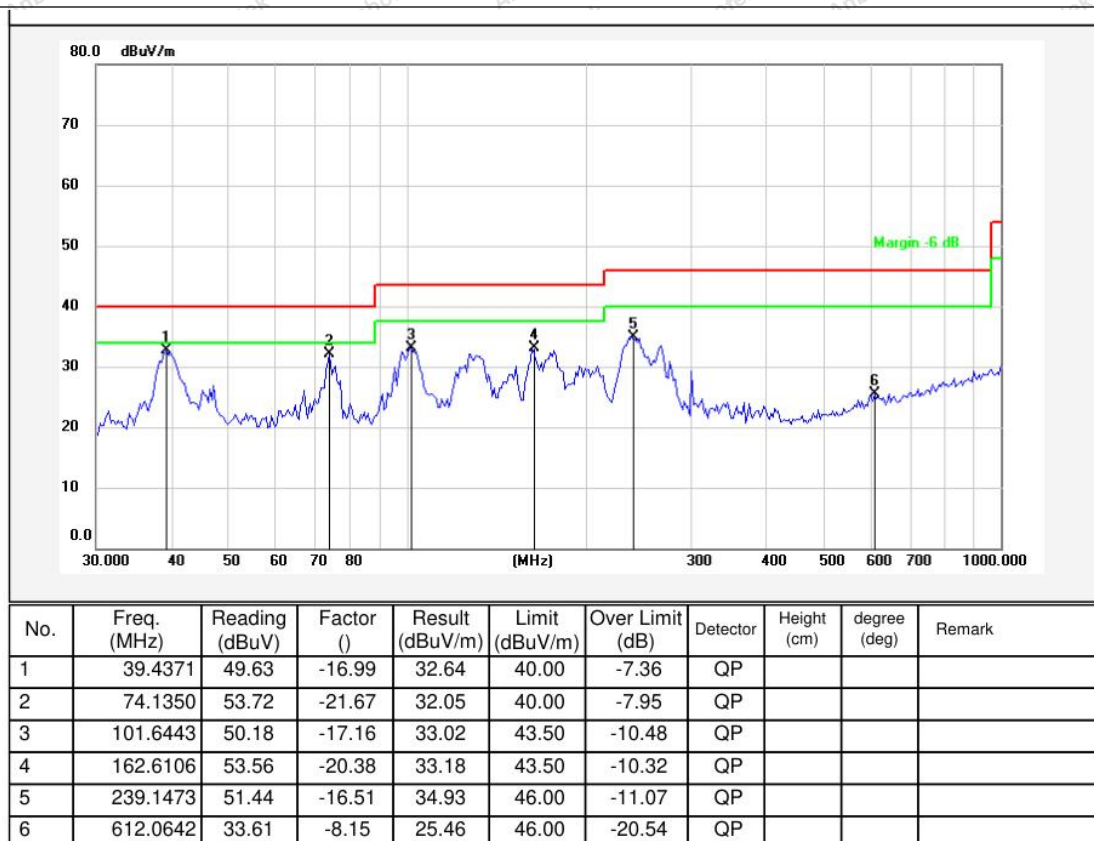

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com.cn



Report No.: 18360WC30017101 FCC ID: 2BASNG2400XMV1000 Page 20 of 21

Temperature:	21 °C	Humidity:	49 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	------	-----------------------	---------

TM2 / Polarization: Vertical



No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	33.0949	52.43	-18.04	34.39	40.00	-5.61	QP			
2	73.1025	53.13	-21.66	31.47	40.00	-8.53	QP			
3	126.3285	52.97	-20.35	32.62	43.50	-10.88	QP			
4	229.2931	45.62	-16.94	28.68	46.00	-17.32	QP			
5	379.9141	35.55	-12.90	22.65	46.00	-23.35	QP			
6	776.8777	34.15	-6.24	27.91	46.00	-18.09	QP			

Note: Only record the worst data in the report.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

