



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.231(e)

Report Reference No.....: GTS20230410018-1-1

FCC ID.....: 2BAU6M3J-2

Compiled by


(position+printed name+signature) .: File administrators Peter Xiao

Supervised by

(position+printed name+signature) .: Test Engineer Jenny Zeng

Approved by

(position+printed name+signature) .: Manager Jason Hu

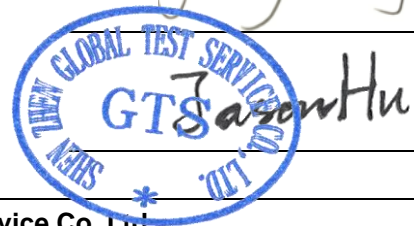

Date of issue: Apr.23, 2023

Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.

Address: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong,China

Applicant's name.....: Dongguan FutureX Limited

Address: Room 202, Building 6, No. 24, Gongye East Road, Songshanhu Park, Dongguan, Guangdong, China

Test specification

Standard.....: **FCC Part 15.231(e)**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description intelligent robot vacuum cleaner (Base Station)

Trade Mark.....: N/A

Manufacturer.....: Dongguan FutureX Limited

Model/Type reference.....: M3J-2

Listed Models.....: N/A

Modulation Type.....: GFSK

Operation Frequency.....: From 433.0-445.0MHz

Hardware Version.....: N/A

Software Version.....: N/A

Rating.....: AC 100-240V, 50-60Hz, 0.3A

Result.....: **PASS**

TEST REPORT

| | | |
|--------------------------|---------------------------|---------------|
| Test Report No. : | GTS20230410018-1-1 | Apr.23, 2023 |
| | | Date of issue |

Equipment under Test : intelligent robot vacuum cleaner (Base Station)

Model /Type : M3J-2

Listed model : N/A

Applicant : **Dongguan FutureX Limited**

Address : Room 202, Building 6, No. 24, Gongye East Road, Songshanhu Park, Dongguan, Guangdong, China

Manufacturer : **Dongguan FutureX Limited**

Address : Room 202, Building 6, No. 24, Gongye East Road, Songshanhu Park, Dongguan, Guangdong, China

| | |
|---------------------|-------------|
| Test Result: | PASS |
|---------------------|-------------|

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

| | |
|--|-----------|
| 1. TEST STANDARDS | 4 |
| 2. SUMMARY | 5 |
| 2.1. General Remarks | 5 |
| 2.2. Product Description | 5 |
| 2.3. Equipment Under Test | 6 |
| 2.4. Short description of the Equipment under Test (EUT) | 6 |
| 2.5. EUT operation mode | 6 |
| 2.6. Block Diagram of Test Setup | 7 |
| 2.7. EUT Exercise Software | 7 |
| 2.8. Special Accessories | 7 |
| 2.9. External I/O Cable | 7 |
| 2.10. Related Submittal(s) / Grant (s) | 7 |
| 2.11. Modifications | 7 |
| 3. TEST ENVIRONMENT | 8 |
| 3.1. Address of the test laboratory | 8 |
| 3.2. Test Facility | 8 |
| 3.3. Environmental conditions | 8 |
| 3.4. Statement of the measurement uncertainty | 8 |
| 3.5. Test Description | 9 |
| 3.6. Equipments Used during the Test..... | 10 |
| 4. TEST CONDITIONS AND RESULTS | 11 |
| 4.1. AC Power Conducted Emission | 11 |
| 4.2. Transmitter Field Strength of Emissions | 13 |
| 4.3. Duration of each Transmission and the silent period | 23 |
| 4.4. 20dB Bandwidth Emissions..... | 25 |
| 4.5. Duty cycle | 27 |
| 4.6. Antenna Requirement | 30 |
| 5. TEST SETUP PHOTOS OF THE EUT..... | 31 |
| 6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT | 33 |

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.231](#): Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

| | | |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Apr. 06, 2023 |
| | : | |
| Testing commenced on | : | Apr. 06, 2023 |
| | : | |
| Testing concluded on | : | Apr. 23, 2023 |

2.2. Product Description

| | |
|----------------------|--|
| Product Name | intelligent robot vacuum cleaner (Base Station) |
| Trade Mark | N/A |
| Model/Type reference | M3J-2 |
| List Models | N/A |
| Model Declaration | N/A |
| Power supply: | AC 100-240V, 50-60Hz, 0.3A |
| Sample ID | GTS20230410018-1-S0001-1#& GTS20230410018-1-S0001-2# |
| SRD | |
| Frequency Range | 433.0-445.0MHz |
| Channel Number | 16 Channels |
| Modulation Type | GFSK |
| Antenna Description | Internal Antenna, 0dBi(Max.) |

2.3. Equipment Under Test

Power supply system utilised

| | | | | | |
|----------------------|---|-----------------------|----------------------------------|----------------------------------|-------------|
| Power supply voltage | : | <input type="radio"/> | 230V / 50 Hz | <input checked="" type="radio"/> | 120V / 60Hz |
| | | <input type="radio"/> | 12 V DC | <input type="radio"/> | 24 V DC |
| | | <input type="radio"/> | Other (specified in blank below) | | |

AC 120.0V

2.4. Short description of the Equipment under Test (EUT)

This is a intelligent robot vacuum cleaner (Base Station)

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

| Mode of Operations | Frequency Range (MHz) | Data Rate (Mbps) |
|------------------------|-----------------------|------------------|
| SRD | 433.0 | 1 |
| | 439.4 | 1 |
| | 445.0 | 1 |
| For Conducted Emission | | |
| Test Mode | | TX Mode |
| For Radiated Emission | | |
| Test Mode | | TX Mode |


| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 1 | 433.0 | 9 | 439.4 |
| 2 | 433.8 | 10 | 440.2 |
| 3 | 434.6 | 11 | 441.0 |
| 4 | 435.4 | 12 | 441.8 |
| 5 | 436.2 | 13 | 442.6 |
| 6 | 437.0 | 14 | 443.4 |
| 7 | 437.8 | 15 | 444.2 |
| 8 | 438.6 | 16 | 445.0 |

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be SRD mode.

2.6. Block Diagram of Test Setup

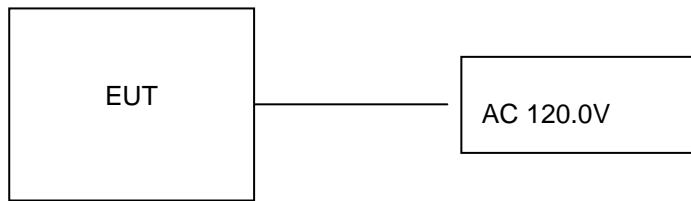

2.7. EUT Exercise Software

After the product is powered on, the signal is transmitted through the operation button.

2.8. Special Accessories

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
| -- | -- | -- | -- | -- |

2.9. External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|------------------------|
| AC IN Port | 1 | 1.0M, Unscreened Cable |

2.10. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2BAU6M3J-2** filing to comply with Section 15.231 of the FCC Part 15, Subpart C Rules.

2.11. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong,China.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is165725.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|-----------------------|--------------|
| Temperature: | 15-35 ° C |
| Humidity: | 30-60 % |
| Atmospheric pressure: | 950-1050mbar |

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

| Test | Range | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission | 30~1000MHz | 4.10 dB | (1) |
| Radiated Emission | 1~18GHz | 4.32 dB | (1) |
| Radiated Emission | 18-40GHz | 5.54 dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 3.12 dB | (1) |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Test Description

| Applied Standard: FCC Part 15 Subpart C | | | | |
|---|---|--|-----------|--------|
| ISED Rules | Description of Test | Test Sample | Result | Remark |
| §15.203 | Antenna Requirement | GTS20230410018-1-S0001-1# | / | / |
| §15.205 | Restricted Bands Of Operation | GTS20230410018-1-S0001-1# | Compliant | Note 1 |
| §15.209 | Radiated Emission Limits, General Requirements. | GTS20230410018-1-S0001-1# GTS20230410018-1-S0001-2# | Compliant | Note 1 |
| §15.231 (e) | Field Strength Of Fundamental and Harmonics | GTS20230410018-1-S0001-1# GTS20230410018-1-S0001-2# | Compliant | Note 1 |
| §15.231 (c) | 20dB Bandwidth | GTS20230410018-1-S0001-1# | Compliant | Note 1 |
| §15.231 (e) | Duration of each Transmission and the silent period | GTS20230410018-1-S0001-1# | Compliant | Note 1 |
| §15.231 | Duty cycle Factor | GTS20230410018-1-S0001-1# | Compliant | Note 1 |
| §15.207 | AC Conducted Emissions | GTS20230410018-1-S0001-2# | Compliant | Note 1 |

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. Note 1 – Test results inside test report;
4. Note 2 – Test results in other test report (MPE Report).
5. We tested all test mode and recorded worst case in report

3.6. Equipments Used during the Test


| Test Equipment | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|----------------------------|-----------------------------------|-----------------------|-----------------|------------------|----------------------|
| LISN | CYBERTEK | EM5040A | E1850400105 | 2022/07/13 | 2023/07/12 |
| LISN | R&S | ESH2-Z5 | 893606/008 | 2022/07/13 | 2023/07/12 |
| EMI Test Receiver | R&S | ESPI3 | 101841-cd | 2022/07/13 | 2023/07/12 |
| EMI Test Receiver | R&S | ESCI7 | 101102 | 2021/09/19 | 2022/09/18 |
| Spectrum Analyzer | Agilent | N9020A | MY48010425 | 2021/09/19 | 2022/09/18 |
| Spectrum Analyzer | R&S | FSV40 | 100019 | 2022/07/13 | 2023/07/12 |
| Vector Signal generator | Agilent | N5181A | MY49060502 | 2022/07/13 | 2023/07/12 |
| Signal generator | Agilent | N5182A | 3610AO1069 | 2021/09/19 | 2022/09/18 |
| Climate Chamber | ESPEC | EL-10KA | A20120523 | 2021/09/19 | 2022/09/18 |
| Controller | EM Electronics | Controller EM 1000 | N/A | N/A | N/A |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 01622 | 2021/09/19 | 2022/09/18 |
| Active Loop Antenna | Beijing Da Ze Technology Co.,Ltd. | ZN30900C | 15006 | 2021/09/19 | 2022/09/18 |
| Bilog Antenna | Schwarzbeck | VULB9163 | 000976 | 2021/08/08 | 2022/08/07 |
| Broadband Horn Antenna | SCHWARZBECK | BBHA 9170 | 791 | 2021/09/19 | 2022/09/18 |
| Amplifier | Schwarzbeck | BBV 9743 | #202 | 2022/07/13 | 2023/07/12 |
| Amplifier | Schwarzbeck | BBV9179 | 9719-025 | 2022/07/13 | 2023/07/12 |
| Amplifier | EMCI | EMC051845B | 980355 | 2022/07/13 | 2023/07/12 |
| Temperature/Humidity Meter | Gangxing | CTH-608 | 02 | 2022/07/13 | 2023/07/12 |
| High-Pass Filter | K&L | 9SH10-2700/X12750-O/O | KL142031 | 2022/07/13 | 2023/07/12 |
| High-Pass Filter | K&L | 41H10-1375/U12750-O/O | KL142032 | 2022/07/13 | 2023/07/12 |
| RF Cable(below 1GHz) | HUBER+SUHNER | RG214 | RE01 | 2022/07/13 | 2023/07/12 |
| RF Cable(above 1GHz) | HUBER+SUHNER | RG214 | RE02 | 2022/07/13 | 2023/07/12 |
| Data acquisition card | Agilent | U2531A | TW53323507 | 2022/07/13 | 2023/07/12 |
| Power Sensor | Agilent | U2021XA | MY5365004 | 2022/07/13 | 2023/07/12 |
| Test Control Unit | Tonscend | JS0806-1 | 178060067 | 2022/07/13 | 2023/07/12 |
| Automated filter bank | Tonscend | JS0806-F | 19F8060177 | 2022/07/13 | 2023/07/12 |
| EMI Test Software | Tonscend | JS1120-1 | Ver 2.6.8.0518 | / | / |
| EMI Test Software | Tonscend | JS1120-3 | Ver 2.5.77.0418 | / | / |
| EMI Test Software | Tonscend | JS32-CE | Ver 2.5 | / | / |
| EMI Test Software | Tonscend | JS32-RE | Ver 2.5.1.8 | / | / |

Note: 1. The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

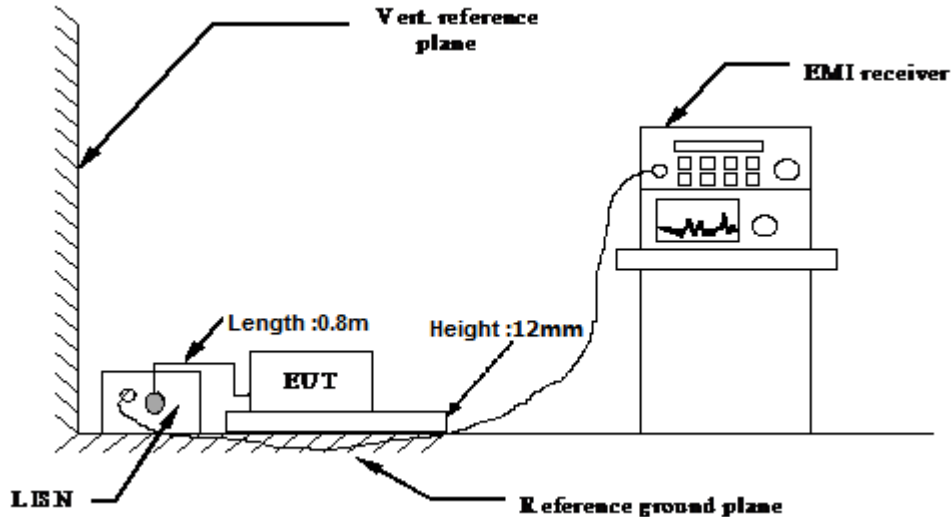

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a Floor-standing equipment, a wooden table with a height of 12mm is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received AC 120V power, the received AC120V/60Hz or AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 6 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 7 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.


TEST RESULTS

Remark: We measured Conducted Emission at GFSK mode from 150 KHz to 30MHz in AC120V and the worst case was recorded.

| | | | |
|---------------|------------|----------------|-------|
| Temperature | 24.2°C | Humidity | 54.2% |
| Test Engineer | Jenny Zeng | Configurations | SRD |

| | | | |
|---------------|--------------|--------------|---|
| Power supply: | AC 120V/60Hz | Polarization | L |
|---------------|--------------|--------------|---|

Test Graph

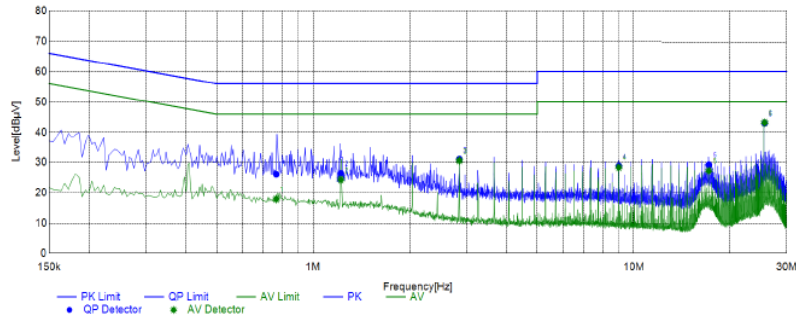

Final Data List


| NO. | Frequency | QP | AVG. | Factor | QP | AVG. | QP | AVG. | QP | AVG. | Line | Remark |
|-----|-----------|---------|---------|--------|--------|--------|-------|-------|--------|--------|------|--------|
| | | Reading | Reading | | Result | Result | Limit | Limit | Margin | Margin | | |
| 1 | 0.7673 | 16.73 | 8.53 | 9.40 | 26.13 | 17.93 | 56.00 | 46.00 | 29.87 | 28.07 | L1 | PASS |
| 2 | 1.2209 | 17.03 | 14.94 | 9.40 | 26.43 | 24.34 | 56.00 | 46.00 | 29.57 | 21.66 | L1 | PASS |
| 3 | 2.8600 | 21.65 | 21.26 | 9.35 | 31.00 | 30.61 | 56.00 | 46.00 | 25.00 | 15.39 | L1 | PASS |
| 4 | 8.9907 | 19.63 | 19.19 | 9.23 | 28.86 | 28.42 | 60.00 | 50.00 | 31.14 | 21.58 | L1 | PASS |
| 5 | 17.1621 | 20.10 | 18.13 | 9.17 | 29.27 | 27.30 | 60.00 | 50.00 | 30.73 | 22.70 | L1 | PASS |
| 6 | 25.6010 | 33.71 | 33.85 | 9.27 | 42.98 | 43.12 | 60.00 | 50.00 | 17.02 | 6.88 | L1 | PASS |

Note: 1. Result (dBµV) = Reading (dBµV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

| | | | |
|---------------|--------------|--------------|---|
| Power supply: | AC 120V/60Hz | Polarization | N |
|---------------|--------------|--------------|---|

Test Graph

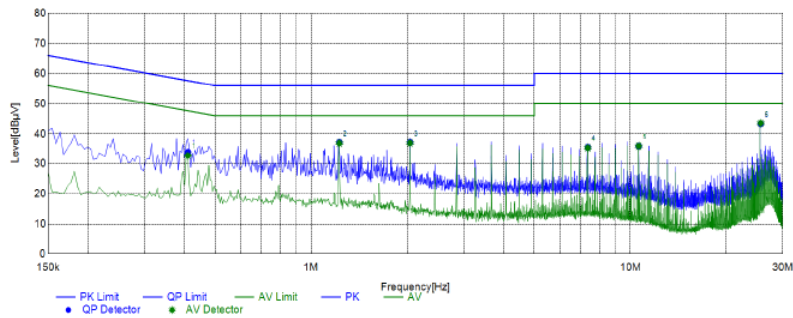

Final Data List

| NO. | Frequency | QP | AVG. | Factor | QP | AVG. | QP | AVG. | QP | AVG. | Line | Remark |
|-----|-----------|---------|---------|--------|--------|--------|-------|-------|--------|--------|------|--------|
| | | Reading | Reading | | Result | Result | Limit | Limit | Margin | Margin | | |
| 1 | 0.4117 | 24.37 | 23.23 | 9.47 | 33.84 | 32.70 | 57.61 | 47.61 | 23.77 | 14.91 | N | PASS |
| 2 | 1.2261 | 27.66 | 27.40 | 9.38 | 37.04 | 36.78 | 56.00 | 46.00 | 18.96 | 9.22 | N | PASS |
| 3 | 2.0434 | 27.72 | 27.50 | 9.35 | 37.07 | 36.85 | 56.00 | 46.00 | 18.93 | 9.15 | N | PASS |
| 4 | 7.3560 | 26.10 | 25.93 | 9.32 | 35.42 | 35.25 | 60.00 | 50.00 | 24.58 | 14.75 | N | PASS |
| 5 | 10.6251 | 26.57 | 26.58 | 9.27 | 35.84 | 35.85 | 60.00 | 50.00 | 24.16 | 14.15 | N | PASS |
| 6 | 25.6000 | 33.99 | 34.20 | 9.26 | 43.25 | 43.46 | 60.00 | 50.00 | 16.75 | 6.54 | N | PASS |


Note: 1. Result (dBµV) = Reading (dBµV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


4.2. Transmitter Field Strength of Emissions

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

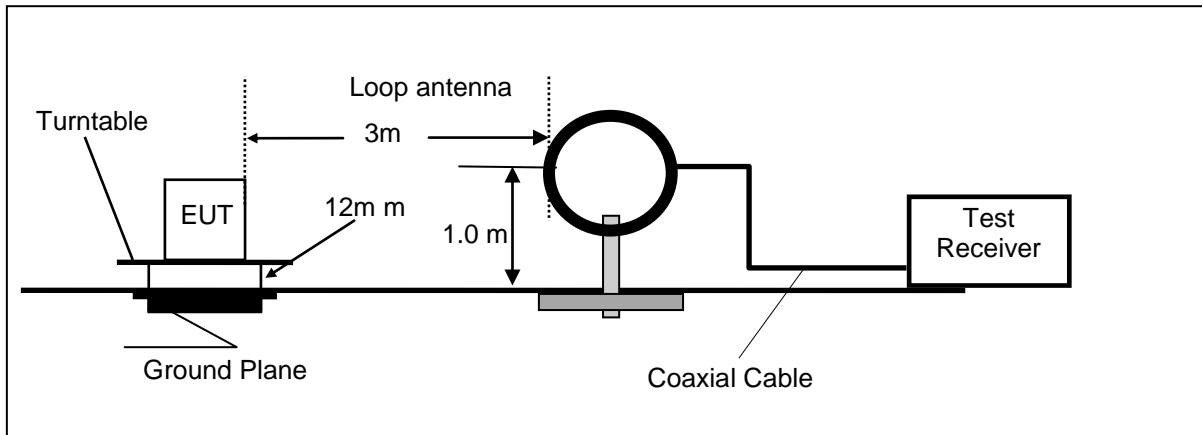

Frequency range 30MHz – 1000MHz

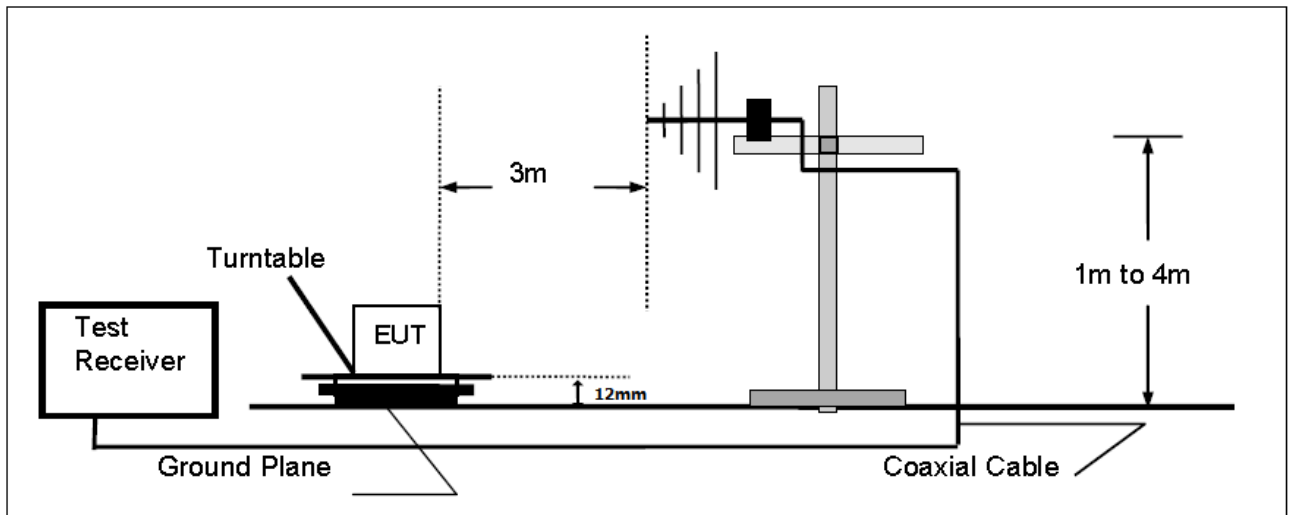

Frequency range above 1GHz-25GHz

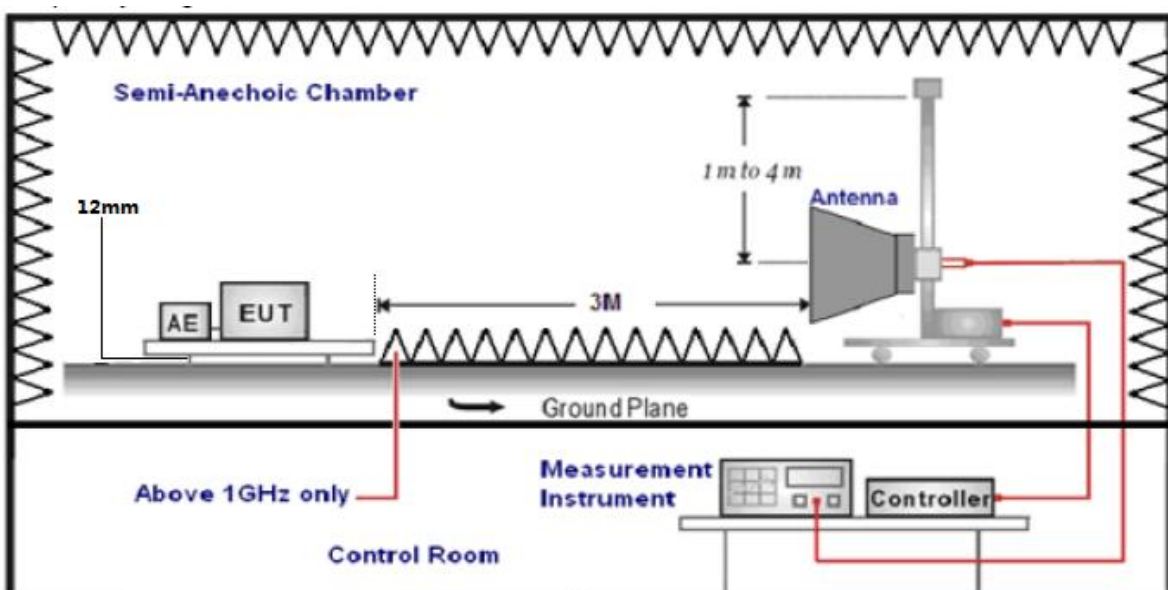

TEST PROCEDURE

1. The EUT was placed on a turn table which is 12mm above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 12mm above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 30MHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz | Active Loop Antenna | 3 |
| 30MHz-1GHz | Ultra-Broadband Antenna | 3 |
| 1GHz-18GHz | Double Ridged Horn Antenna | 3 |
| 18GHz-25GHz | Horn Antenna | 1 |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting | Detector |
|----------------------|---|----------|
| 9KHz-150KHz | RBW=200Hz/VBW=3KHz,Sweep time=Auto | QP |
| 150KHz-30MHz | RBW=9KHz/VBW=100KHz,Sweep time=Auto | QP |
| 30MHz-1GHz | RBW=120KHz/VBW=1000KHz,Sweep time=Auto | QP |
| 1GHz-40GHz | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto | Peak |

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

| | |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude | AG = Amplifier Gain |
| AF = Antenna Factor | |

Transd=AF +CL-AG

RADIATION LIMIT

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dBµV/m) | Radiated (µV/m) |
|-----------------|-------------------|----------------------------------|-----------------|
| 0.009-0.49 | 3 | 20log(2400/F(KHz))+40log(300/3) | 2400/F(KHz) |
| 0.49-1.705 | 3 | 20log(24000/F(KHz))+ 40log(30/3) | 24000/F(KHz) |
| 1.705-30 | 3 | 20log(30)+ 40log(30/3) | 30 |
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

According to §15.231 (e): In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

| Frequencies(MHz) | Field Strength (microvolts/meter) | Field Strength of spurious emissions(microvolts/meter) |
|------------------|-----------------------------------|--|
| 40.66-40.70 | 1,000 | 100 |
| 70-130 | 500 | 50 |
| 130-174 | 500 to 1,500 | 50 to 150 |
| 174-260 | 1,500 | 150 |
| 260-470 | 1,500 to 5,000 | 150 to 500 |
| Above 470 | 5,000 | 500 |

¹Linear interpolations.

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 260-470 MHz, $\mu\text{V}/\text{m}$ at 3 meters = $16.66667(F) - 2833.333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

(3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| \1\ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293. | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (\2) |
| 13.36-13.41 | | | |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009–0.490 | 2400/F(kHz) | 300 |
| 0.490–1.705 | 24000/F(kHz) | 30 |
| 1.705–30.0 | 30 | 30 |
| 30–88 | 100** | 3 |
| 88–216 | 150** | 3 |
| 216–960 | 200** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 72 MHz, 76 88 MHz, 174 216 MHz or 470 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST RESULTS

Remark: We measured Radiated Emission at OOK mode from 30 MHz to 25GHz in AC120V and the worst case was recorded.

| | | | |
|---------------|------------|----------------|-----|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Jenny Zeng | Configurations | SRD |

For 9 KHz~30MHz

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Over Limit (dBuV) | Remark |
|-------------|--------------|-----------------|-------------------|----------|
| - | - | - | - | See Note |

Note:

The low frequency, which started from 9 KHz to 30 MHz, was pre-scan and the result was 20dB lower than the limit line per 15.31(o) was not reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

For 30MHz to 1000MHz

| Fundamental and Harmonics Average Result | | | | | | |
|--|---------------------|-------------------------------------|------------------------|-------------------------|------------|------------|
| Frequency (MHz) | Peak Level (dBμV/m) | AV Factor(dBμV/m) (see Section 4.5) | Average Level (dBμV/m) | Limit(dBμV/m) (average) | Margin(dB) | Conclusion |
| 433.04 | 62.79 | -11.47 | 51.32 | 72.84 | 21.52 | PASS |
| 439.86 | 63.09 | -11.40 | 51.69 | 73.04 | 21.35 | PASS |
| 445.16 | 62.86 | -11.31 | 51.55 | 73.22 | 21.67 | PASS |

| Frequency (MHz) | Pol. | Measure Result(AV, dBuV/m) | ERP(dBm) | Limit (dBuV/m) | Result |
|-----------------|------|----------------------------|----------|----------------|--------|
| 433.04 | H | 51.32 | -43.84 | 72.84 | PASS |
| 439.86 | H | 51.69 | -43.47 | 73.04 | PASS |
| 445.16 | H | 51.55 | -43.61 | 73.22 | PASS |

Horizontal(433.0MHz)

Test Graph


| Suspected List | | | | | | | | | | | |
|----------------|-----------------|------------------|-------------|-----------------|----------------|-------------|-------------|-----------|----------|------------|--------|
| N.O. | Frequency [MHz] | Reading [dBuV/m] | Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity | Remark |
| 1 | 41.64 | 44.58 | -16.48 | 28.10 | 40.00 | 11.90 | 100 | 68 | PK | Horizontal | PASS |
| 2 | 50.855 | 43.60 | -15.49 | 28.11 | 40.00 | 11.89 | 100 | 255 | PK | Horizontal | PASS |
| 3 | 114.875 | 46.74 | -18.94 | 27.80 | 43.50 | 15.70 | 100 | 192 | PK | Horizontal | PASS |
| 4 | 242.43 | 44.69 | -17.83 | 26.86 | 46.00 | 19.14 | 100 | 124 | PK | Horizontal | PASS |
| 5 | 433.035 | 77.15 | -14.36 | 62.79 | 72.84 | 10.05 | 100 | 284 | PK | Horizontal | PASS |
| 6 | 908.82 | 44.00 | -7.56 | 36.44 | 46.00 | 9.56 | 100 | 212 | PK | Horizontal | PASS |

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Horizontal(439.4MHz)

Test Graph

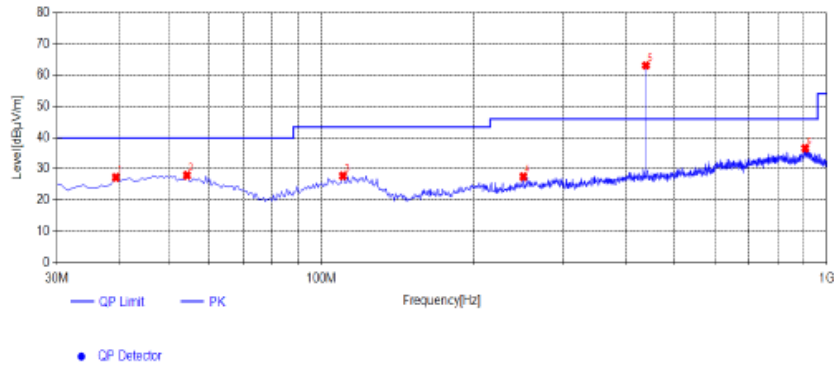


| Suspected List | | | | | | | | | | | |
|----------------|-----------------|------------------|-------------|-----------------|----------------|-------------|-------------|-----------|----------|------------|--------|
| N.O. | Frequency [MHz] | Reading [dBuV/m] | Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity | Remark |
| 1 | 39.215 | 44.37 | -17.11 | 27.26 | 40.00 | 12.74 | 100 | 236 | PK | Horizontal | PASS |
| 2 | 54.25 | 44.03 | -16.11 | 27.92 | 40.00 | 12.08 | 100 | 279 | PK | Horizontal | PASS |
| 3 | 110.51 | 45.60 | -17.84 | 27.76 | 43.50 | 15.74 | 100 | 206 | PK | Horizontal | PASS |
| 4 | 251.16 | 45.26 | -17.75 | 27.51 | 46.00 | 18.49 | 100 | 180 | PK | Horizontal | PASS |
| 5 | 439.855 | 77.05 | -13.96 | 63.09 | 73.04 | 9.95 | 100 | 187 | PK | Horizontal | PASS |
| 6 | 905.91 | 44.25 | -7.76 | 36.49 | 46.00 | 9.51 | 100 | 32 | PK | Horizontal | PASS |

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Horizontal(445.0MHz)

Test Graph

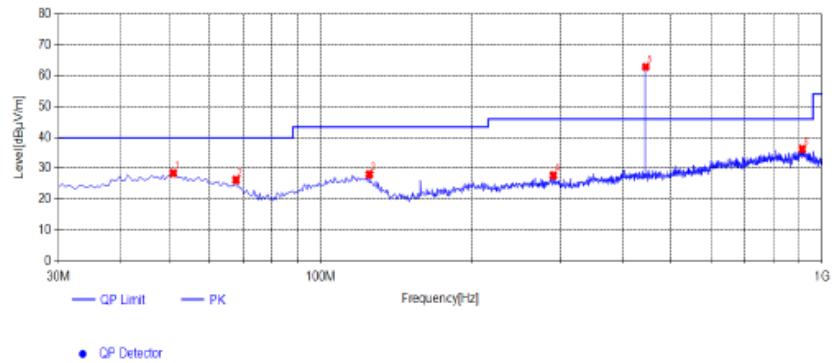


| Suspected List | | | | | | | | | | | |
|----------------|-----------------|------------------|-------------|-----------------|----------------|-------------|-------------|-----------|----------|------------|--------|
| N.O. | Frequency [MHz] | Reading [dBuV/m] | Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity | Remark |
| 1 | 50.855 | 43.91 | -15.49 | 28.42 | 40.00 | 11.58 | 100 | 341 | PK | Horizontal | PASS |
| 2 | 67.83 | 44.88 | -18.61 | 26.27 | 40.00 | 13.73 | 100 | 357 | PK | Horizontal | PASS |
| 3 | 125.06 | 48.81 | -20.76 | 28.05 | 43.50 | 15.45 | 100 | 358 | PK | Horizontal | PASS |
| 4 | 291.415 | 44.54 | -16.85 | 27.69 | 46.00 | 18.31 | 100 | 0 | PK | Horizontal | PASS |
| 5 | 445.16 | 77.08 | -14.22 | 62.86 | 73.22 | 10.36 | 100 | 8 | PK | Horizontal | PASS |
| 6 | 913.67 | 43.66 | -7.50 | 36.16 | 46.00 | 9.84 | 100 | 94 | PK | Horizontal | PASS |



Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

| Fundamental and Harmonics Average Result | | | | | | |
|--|---------------------------|---|------------------------------|-------------------------------|------------|------------|
| Frequency (MHz) | Peak Level (dB μ V/m) | AV Factor(dB μ V/m) (see Section 4.5) | Average Level (dB μ V/m) | Limit(dB μ V/m) (average) | Margin(dB) | Conclusion |
| 433.04 | 63.18 | -11.47 | 51.71 | 72.84 | 21.13 | PASS |
| 439.86 | 62.71 | -11.40 | 51.31 | 73.04 | 21.73 | PASS |
| 445.16 | 62.13 | -11.31 | 50.82 | 73.22 | 22.4 | PASS |

| Frequency (MHz) | Pol. | Measure Result(AV, dBuV/m) | ERP(dBm) | Limit (dBuV/m) | Result |
|-----------------|------|----------------------------|----------|----------------|--------|
| 433.04 | V | 51.71 | -43.45 | 72.84 | PASS |
| 439.86 | V | 51.31 | -43.85 | 73.04 | PASS |
| 445.16 | V | 50.82 | -44.34 | 73.22 | PASS |

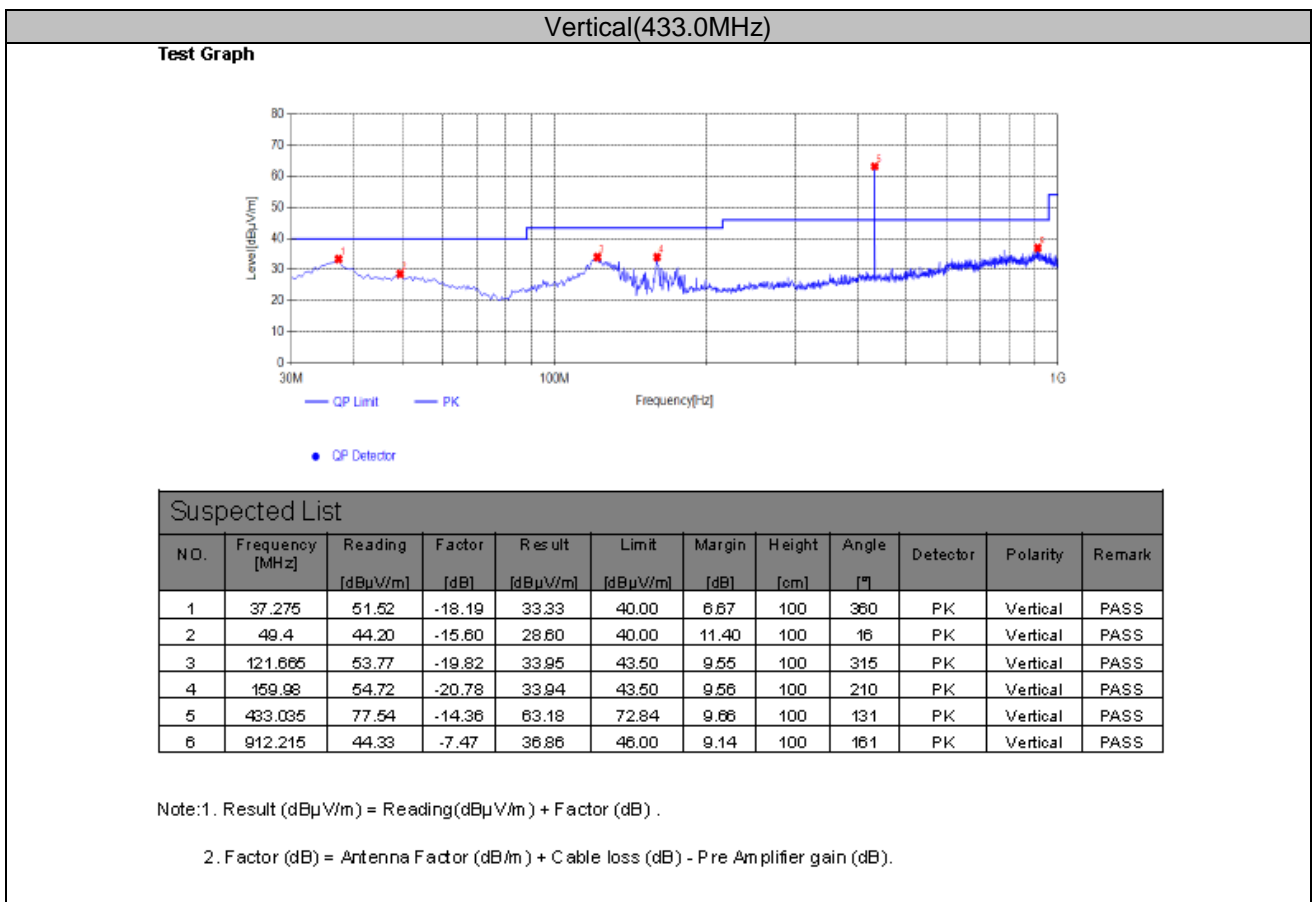

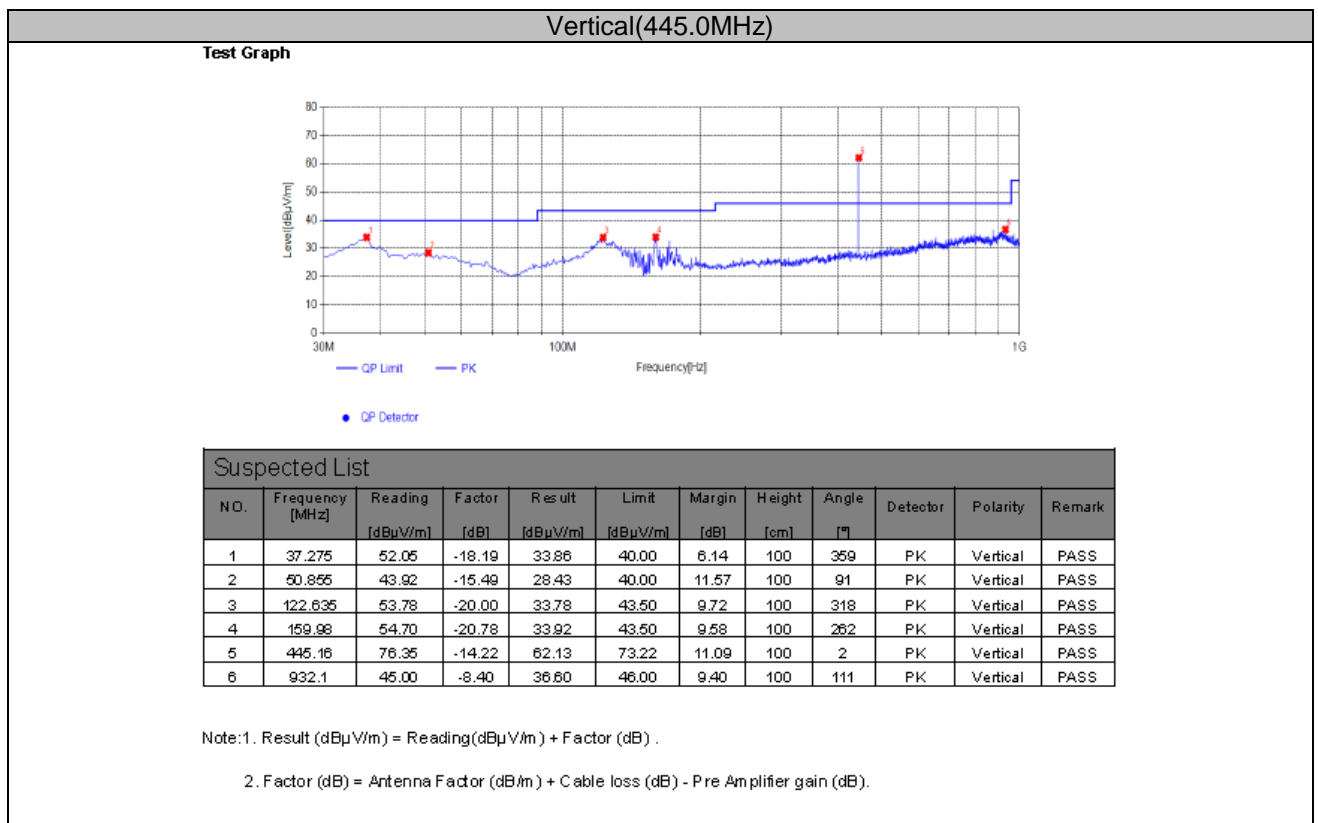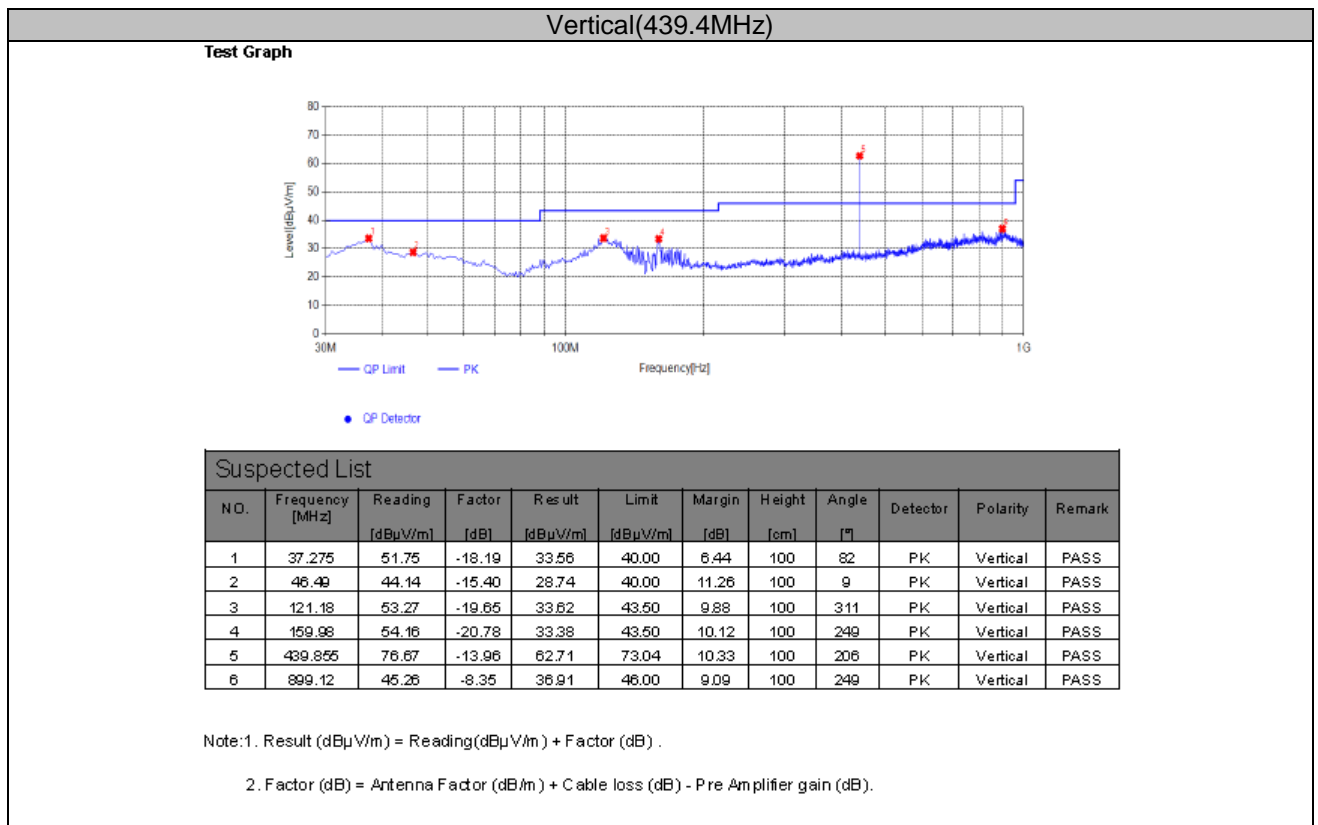

Notes:

- 1). Measured= Reading- Pre. Fac.+ Ant. Fac.+ Cab. Loss
- 2). Margin = Measured- Limit
- 3). Average values = Peak values + DC factor = Peak values – 0
- 4).point 4 is the fundamental, Limit is 100.80 dBµV/m, 6 is the second harmonic, Limit is 80.80 dBµV/m
- 5).ERP = EMeas + 20log (dMeas) –104.7
 ERP: is the equivalent isotropically radiated power, in dBm
 EMeas: is the field strength of the emission at the measurement distance, in dBµV/m
 dMeas: is the measurement distance, in m

For 1GHz to 5GHz

Channel 1 / 433.0 MHz

| Peak Value | | | | |
|-----------------|----------------|---------------------|-------------|--------------|
| Frequency (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Polarization |
| 1299.00 | 51.21 | 74.00 | -22.79 | Horizontal |
| 1732.00 | 51.79 | 74.00 | -22.21 | Horizontal |
| 1299.00 | 54.82 | 74.00 | -19.18 | Vertical |
| 1732.00 | 51.87 | 74.00 | -22.13 | Vertical |

| Average Value: | | | | | | |
|-----------------|----------------|-------------------|------------------------|---------------------|-------------|--------------|
| Frequency (MHz) | Level (dBuV/m) | Duty cycle factor | Average value (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Polarization |
| 1299.00 | 51.21 | -11.47 | 39.74 | 54.00 | 14.26 | Horizontal |
| 1732.00 | 51.79 | -11.47 | 40.32 | 54.00 | 13.68 | Horizontal |
| 1299.00 | 54.82 | -11.47 | 43.35 | 54.00 | 10.65 | Vertical |
| 1732.00 | 51.87 | -11.47 | 40.4 | 54.00 | 13.6 | Vertical |

Channel 9 / 439.4 MHz

| Peak Value | | | | |
|-----------------|----------------|---------------------|-------------|--------------|
| Frequency (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Polarization |
| 1318.20 | 51.36 | 74.00 | -22.64 | Horizontal |
| 1757.60 | 51.29 | 74.00 | -22.71 | Horizontal |
| 1318.20 | 54.86 | 74.00 | -19.14 | Vertical |
| 1757.60 | 52.08 | 74.00 | -21.92 | Vertical |

| Average Value: | | | | | | |
|-----------------|----------------|-------------------|------------------------|---------------------|-------------|--------------|
| Frequency (MHz) | Level (dBuV/m) | Duty cycle factor | Average value (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Polarization |
| 1318.20 | 51.36 | -11.40 | 39.96 | 54.00 | 14.04 | Horizontal |
| 1757.60 | 51.29 | -11.40 | 39.89 | 54.00 | 14.11 | Horizontal |
| 1318.20 | 54.86 | -11.40 | 43.46 | 54.00 | 10.54 | Vertical |
| 1757.60 | 52.08 | -11.40 | 40.68 | 54.00 | 13.32 | Vertical |

Channel 16 / 445.0 MHz

| Peak Value | | | | |
|-----------------|----------------|---------------------|-------------|--------------|
| Frequency (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Polarization |
| 1335.00 | 51.48 | 74.00 | -22.52 | Horizontal |
| 1780.00 | 53.05 | 74.00 | -20.95 | Horizontal |
| 1335.00 | 54.91 | 74.00 | -19.09 | Vertical |
| 1780.00 | 52.65 | 74.00 | -21.35 | Vertical |


| Average Value: | | | | | | |
|-----------------|----------------|-------------------|------------------------|---------------------|-------------|--------------|
| Frequency (MHz) | Level (dBuV/m) | Duty cycle factor | Average value (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Polarization |
| 1335.00 | 51.48 | -11.31 | 40.17 | 54.00 | 13.83 | Horizontal |
| 1780.00 | 53.05 | -11.31 | 41.74 | 54.00 | 12.26 | Horizontal |
| 1335.00 | 54.91 | -11.31 | 43.6 | 54.00 | 10.4 | Vertical |
| 1780.00 | 52.65 | -11.31 | 41.34 | 54.00 | 12.66 | Vertical |

Notes:

- 1). Measuring frequencies from 9 KHz~10th harmonic (ex. 5GHz), No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz~10th harmonic (ex. 5GHz) were made with an instrument using Peak detector mode.
- 3). Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

4.3. Duration of each Transmission and the silent period

TEST CONFIGURATION



TEST PROCEDURE

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. The antenna was all opened.

LIMIT

According to §15.231 (e)




devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

TEST RESULTS

| | | | |
|---------------|------------|----------------|-------|
| Temperature | 22.9°C | Humidity | 53.2% |
| Test Engineer | Jenny Zeng | Configurations | SRD |


| Frequency (MHz) | Duration of each Transmission Time (s) | Limit: not more than 1 seconds (s) | Conclusion |
|-----------------|--|------------------------------------|------------|
| 433.0 | 0.06 | 1 | PASS |
| 439.4 | 0.06 | 1 | PASS |
| 445.0 | 0.06 | 1 | PASS |

| Frequency (MHz) | the silent period (s) | Limit: At least 30 times the duration of the transmission but in no case less than 10s | Conclusion |
|-----------------|-----------------------|--|------------|
| 433.0 | >10s | >10s | PASS |
| 439.4 | >10s | >10s | PASS |
| 445.0 | >10s | >10s | PASS |

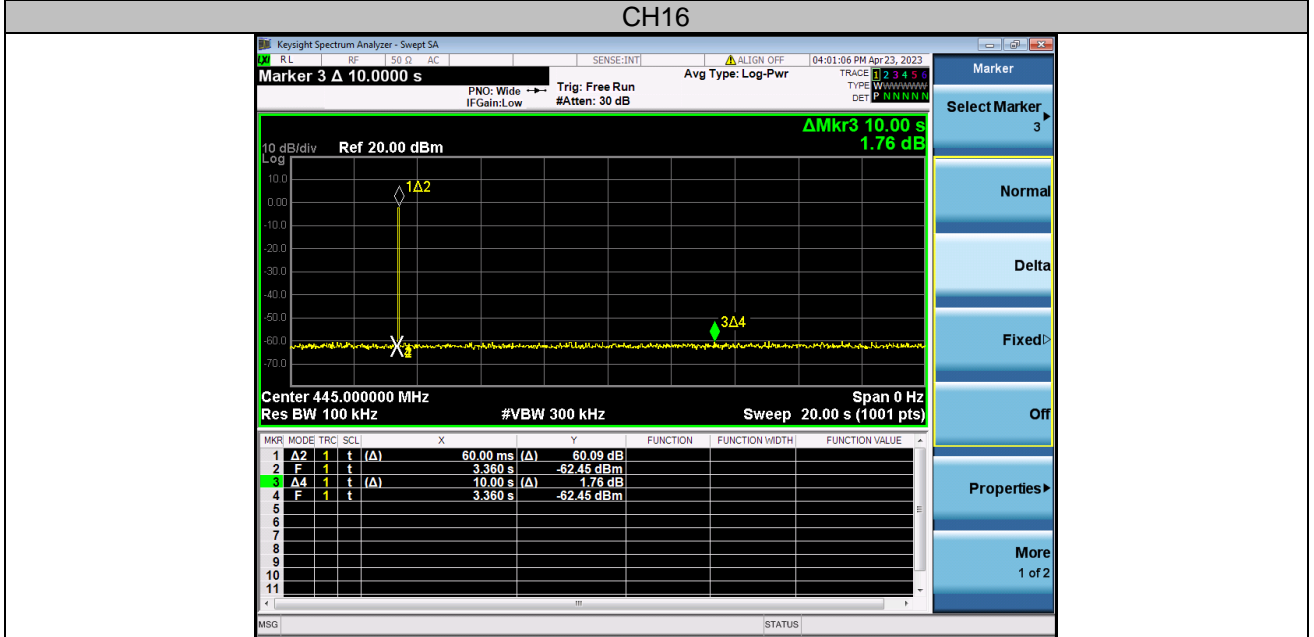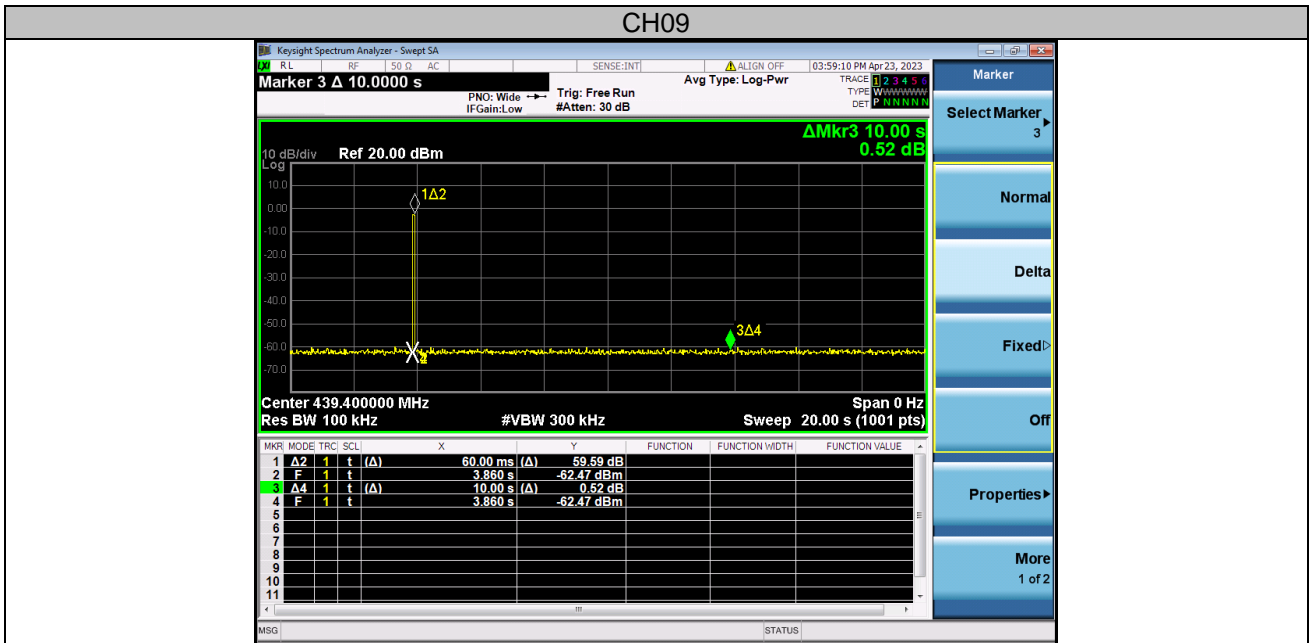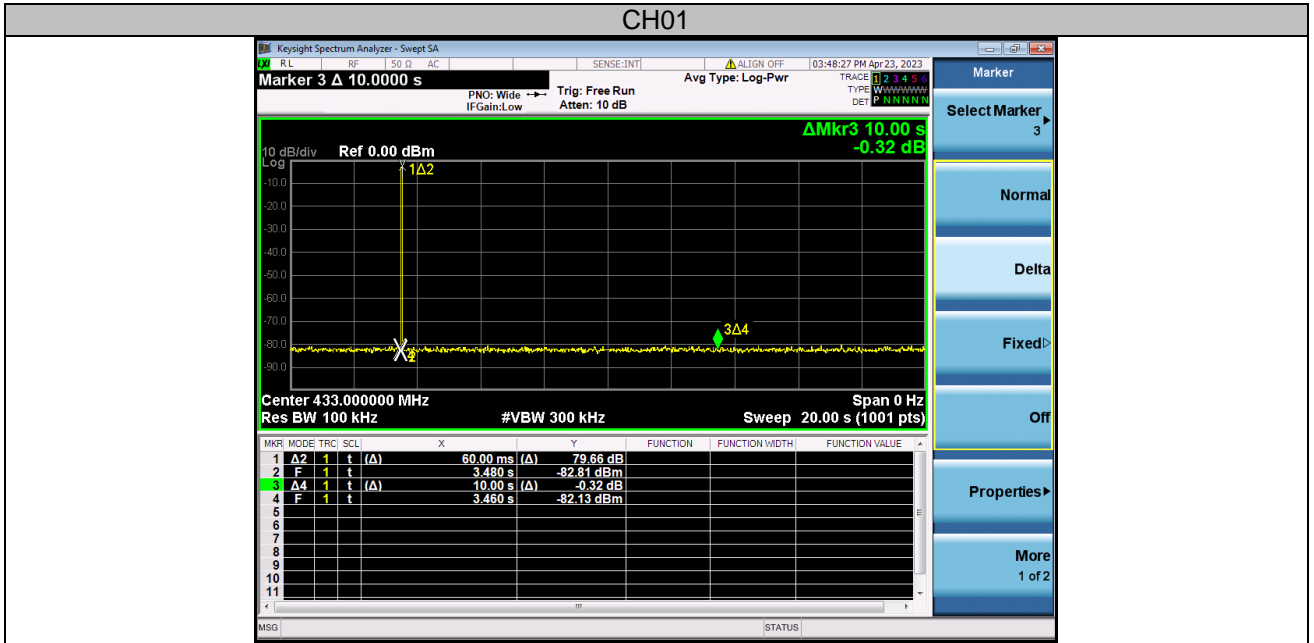

4.4. 20dB Bandwidth Emissions

TEST CONFIGURATION



TEST PROCEDURE

With the EUT’s antenna attached, the EUT’s 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT’s operation band.


LIMIT



The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

TEST RESULTS

| | | | |
|---------------|------------|----------------|-------|
| Temperature | 22.9 °C | Humidity | 53.2% |
| Test Engineer | Jenny Zeng | Configurations | SRD |

| Transmit Frequency (MHz) | Limit (kHz) | 20dB Bandwidth (kHz) | Result |
|----------------------------|--|----------------------|--------|
| 433.0 | 1082.5 | 91.56 | PASS |
| 439.4 | 1098.5 | 89.12 | PASS |
| 445.0 | 1112.5 | 91.81 | PASS |
| Maximum allowed bandwidth: | <input checked="" type="checkbox"/> 0.25% of the centre operating frequency <input type="checkbox"/> 0.5% of the centre operating frequency | | |
| RBW: | <input checked="" type="checkbox"/> 10kHz <input type="checkbox"/> 100kHz <input type="checkbox"/> other 30kHz | | |
| VBW: | <input checked="" type="checkbox"/> 30kHz <input type="checkbox"/> 300kHz <input type="checkbox"/> other 100kHz | | |

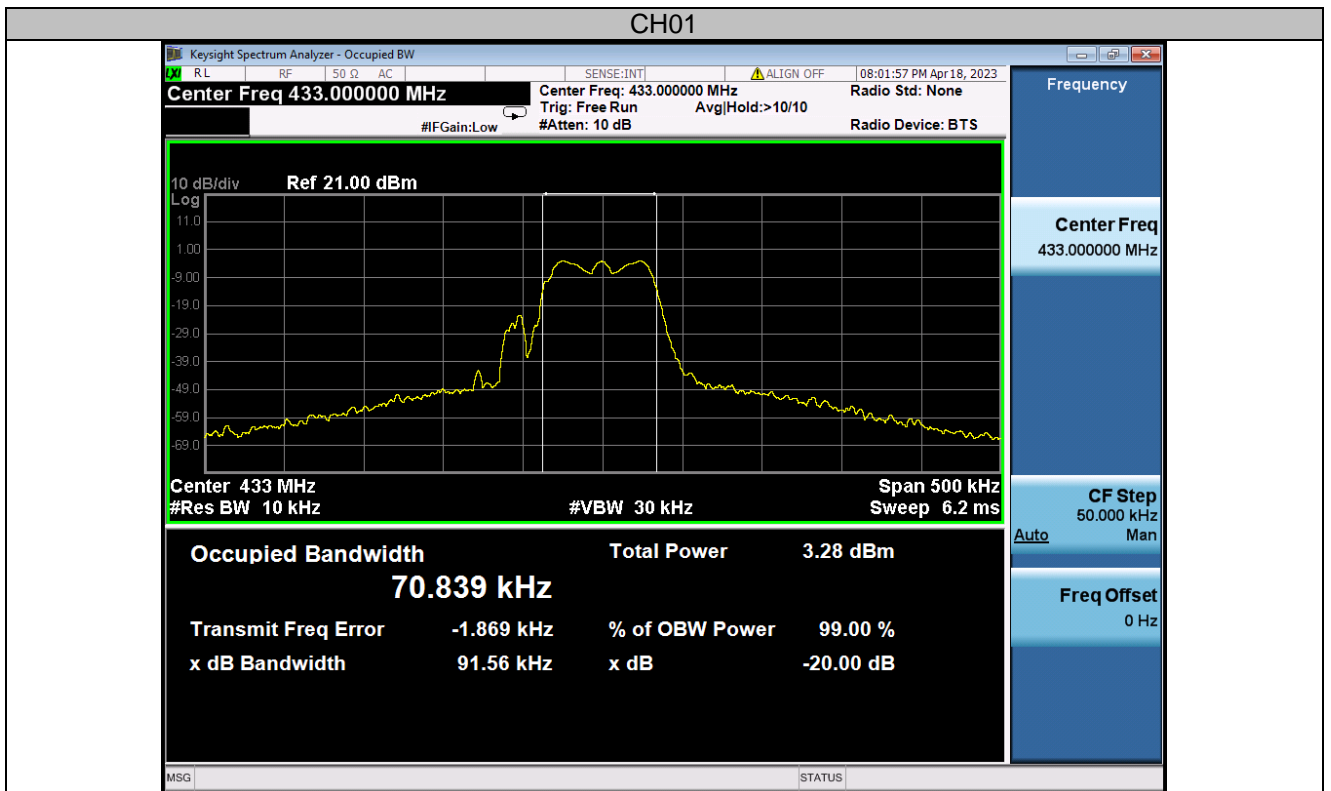

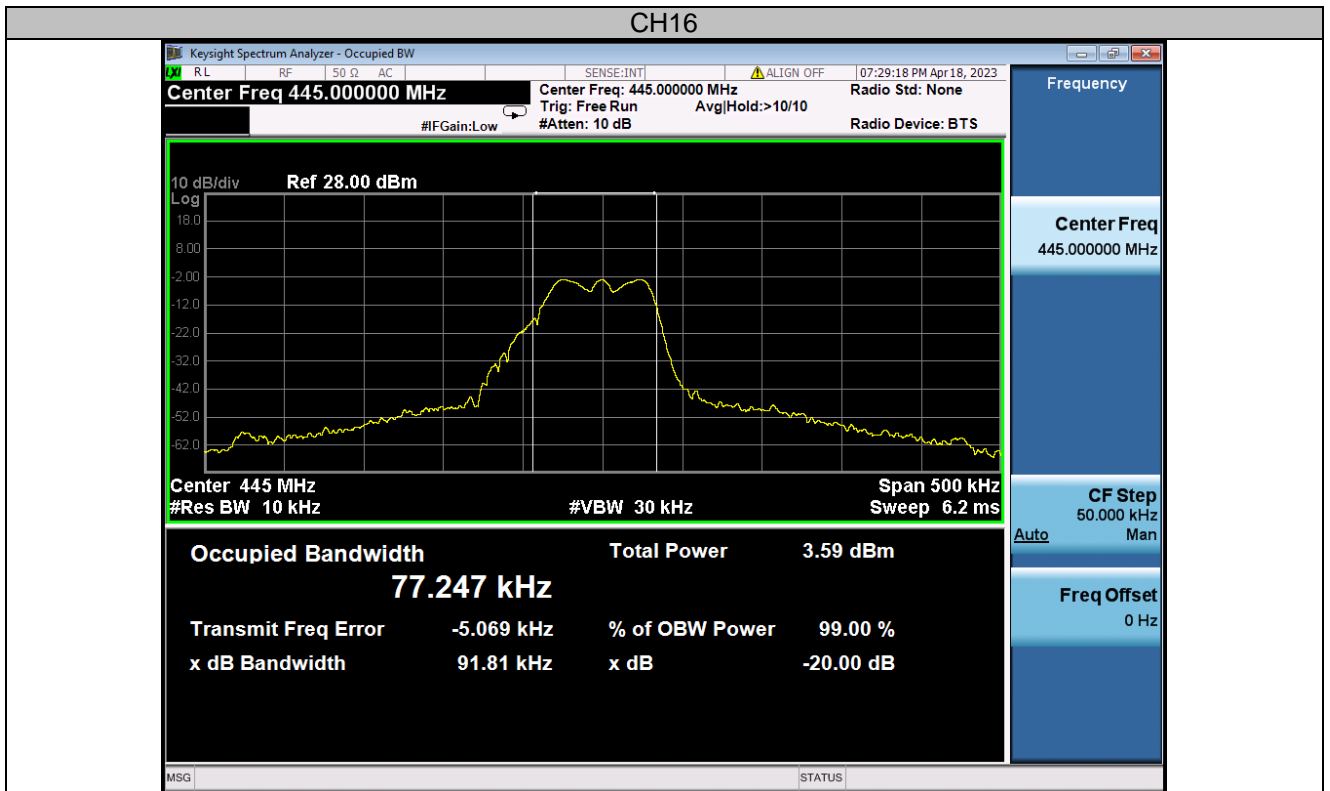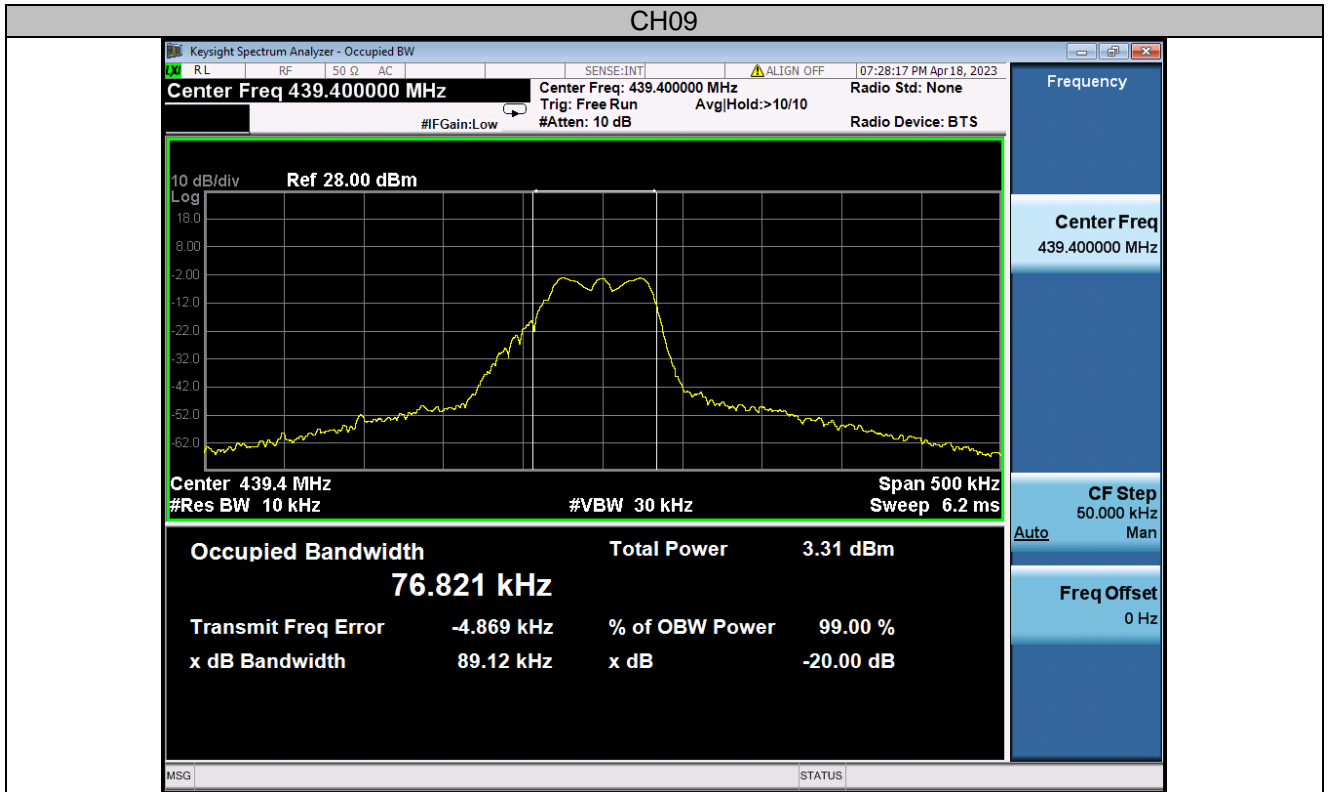


4.5. Duty cycle

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

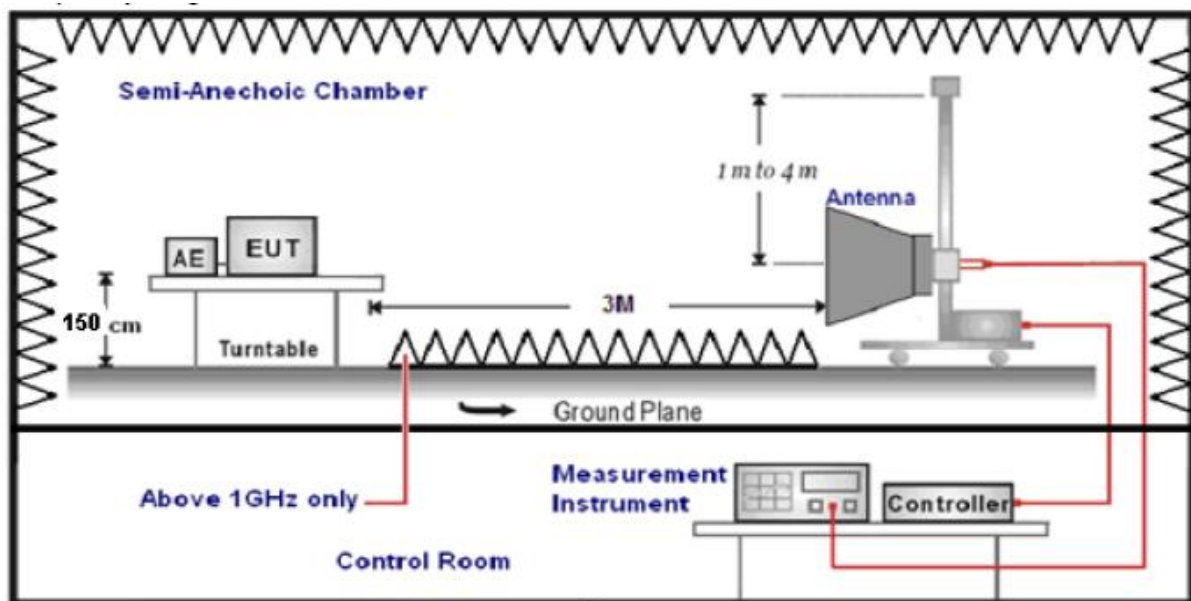

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyser.
3. Set centre frequency of spectrum analyser = operating frequency.
4. Set the spectrum analyser as RBW=1MHz, VBW=1MHz, Span=0Hz, Adjust Sweep=100ms to obtain the "worst-case" pulse on time
5. Repeat above procedures until all frequency measured was complete.

LIMIT

No dedicated limit specified in the Rules.

TEST RESULTS


| | | | |
|---------------|------------|----------------|-------|
| Temperature | 22.9°C | Humidity | 53.2% |
| Test Engineer | Jenny Zeng | Configurations | SRD |

Ton = 26.70 (ms)

Tp = 100 (ms)

The duty cycle = 26.70/100=26.70%

Average Correction Factory = 20*log (Ton/Tp) =20*log (0.267) = -11.47dB

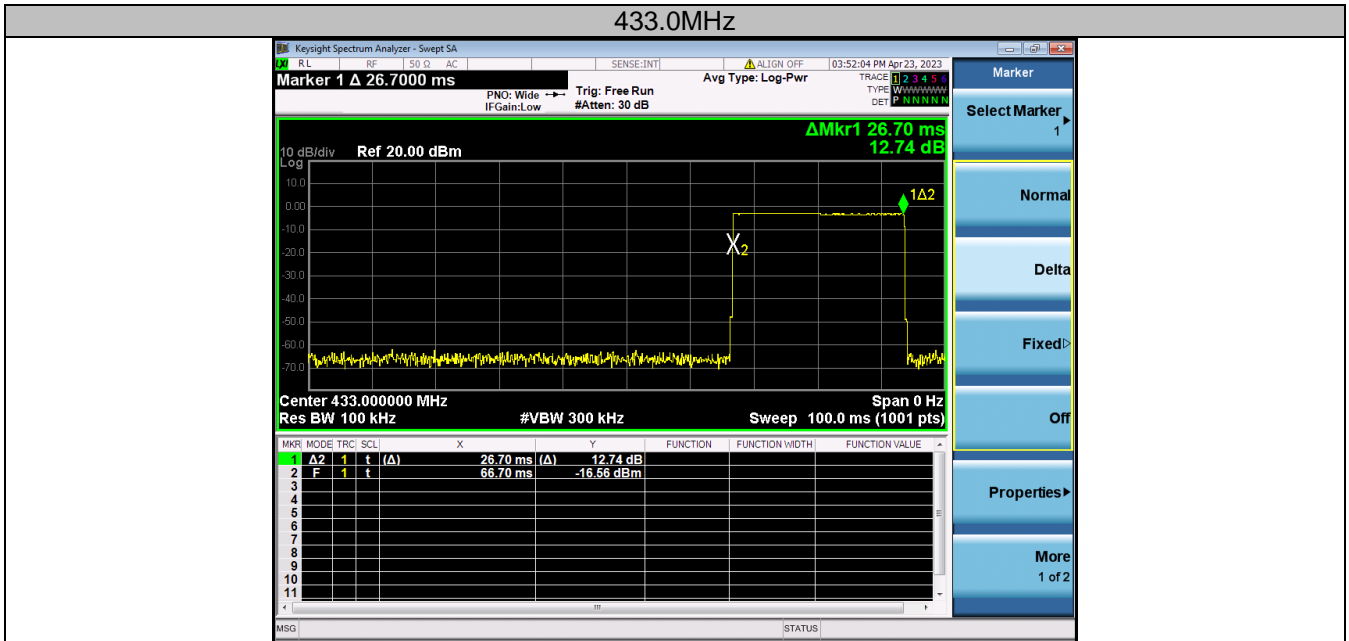


Ton = 26.90 (ms)

Tp = 100 (ms)

The duty cycle = 26.90/100=26.90%

Average Correction Factory = 20*log (Ton/Tp) =20*log (0.269) = -11.40dB

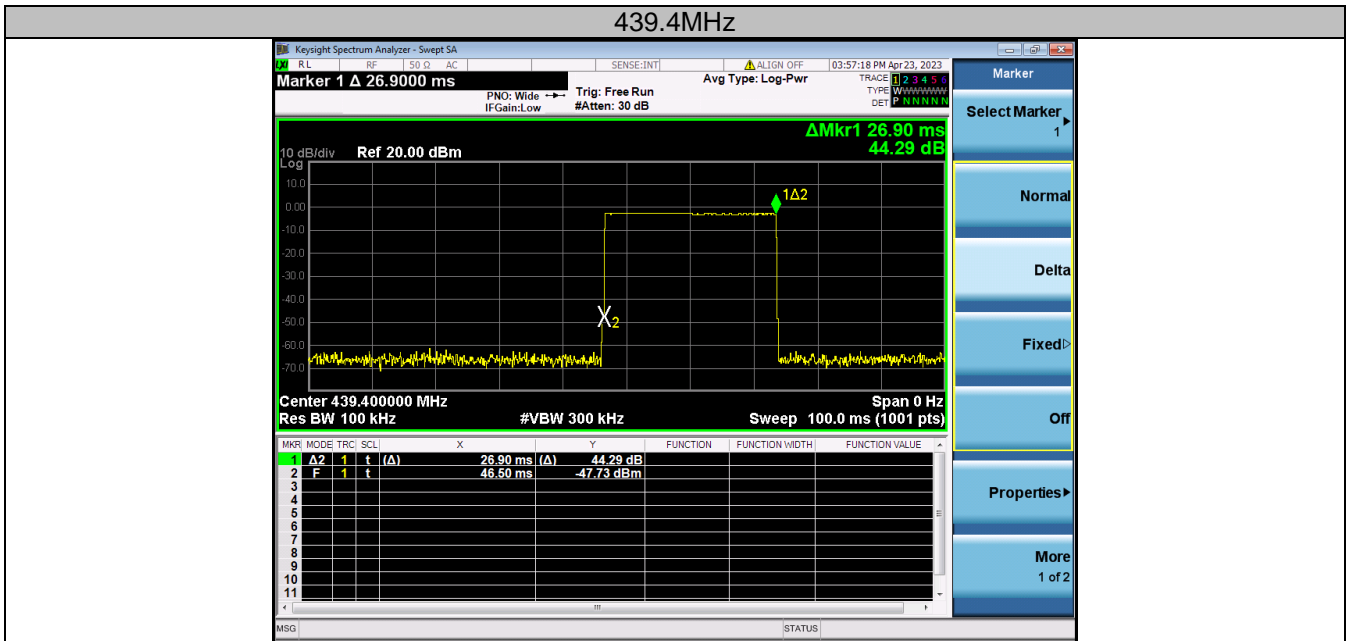

4.6. Antenna Requirement

Standard Applicable

According to § 15.203 & RSS-Gen, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Test Result

The antenna used for this product is Internal Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.

Reference to the **Internal photos**.

5. TEST SETUP PHOTOS OF THE EUT

Photo of Radiated Emissions Measurement

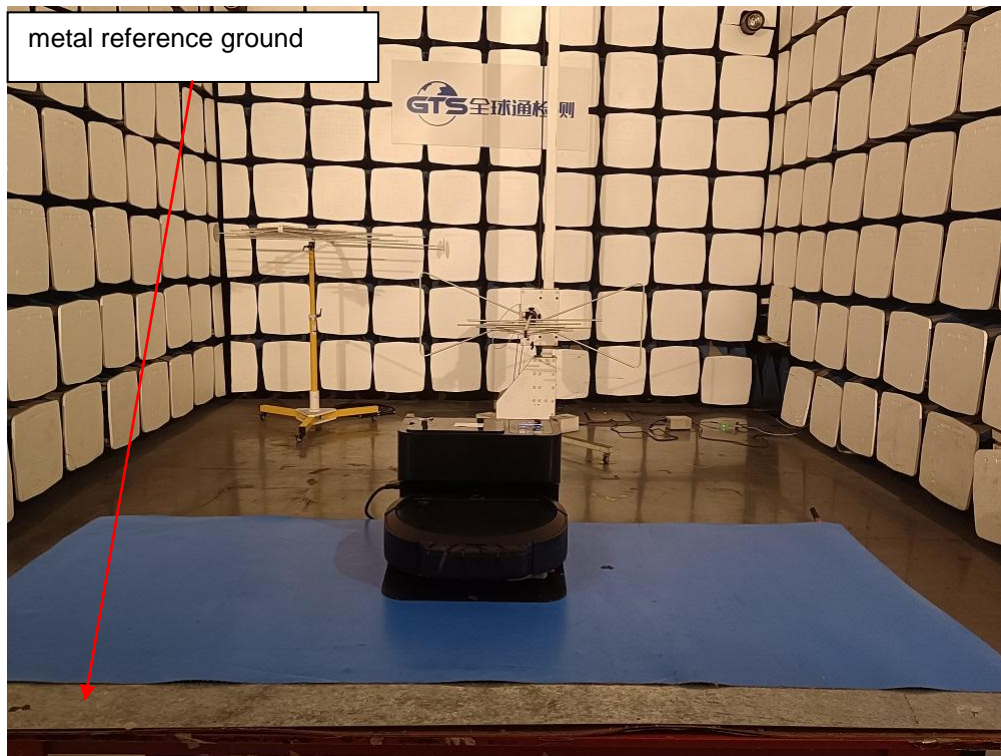


Fig. 1

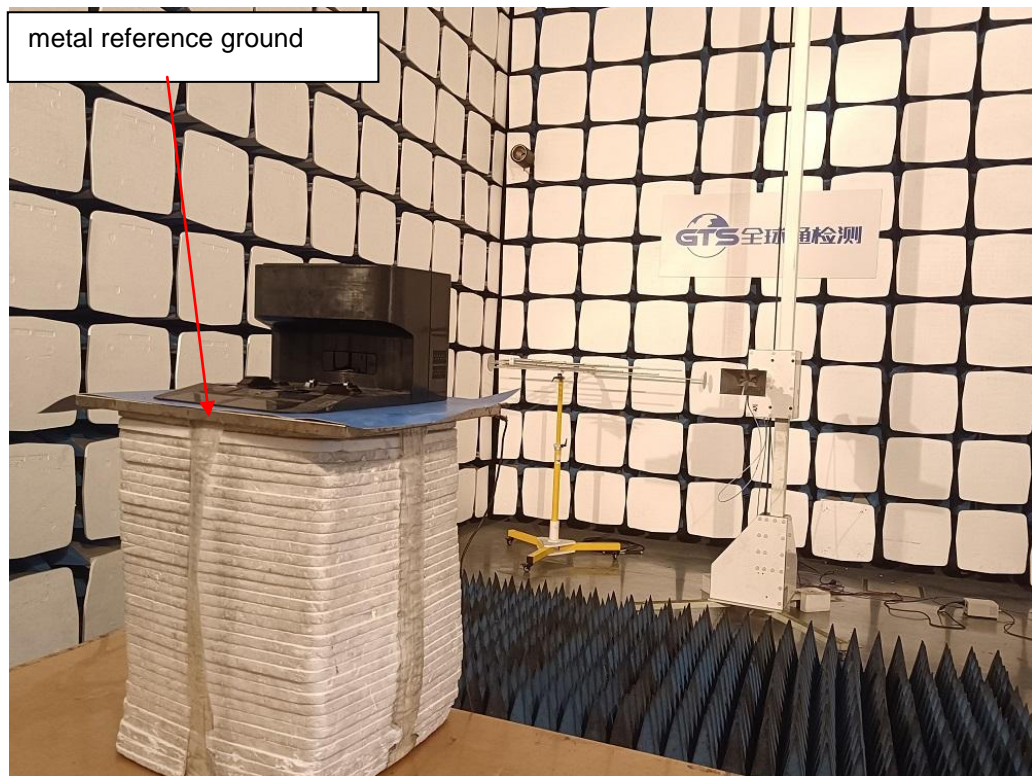


Fig. 2

Photo of Conducted Emission Measurement

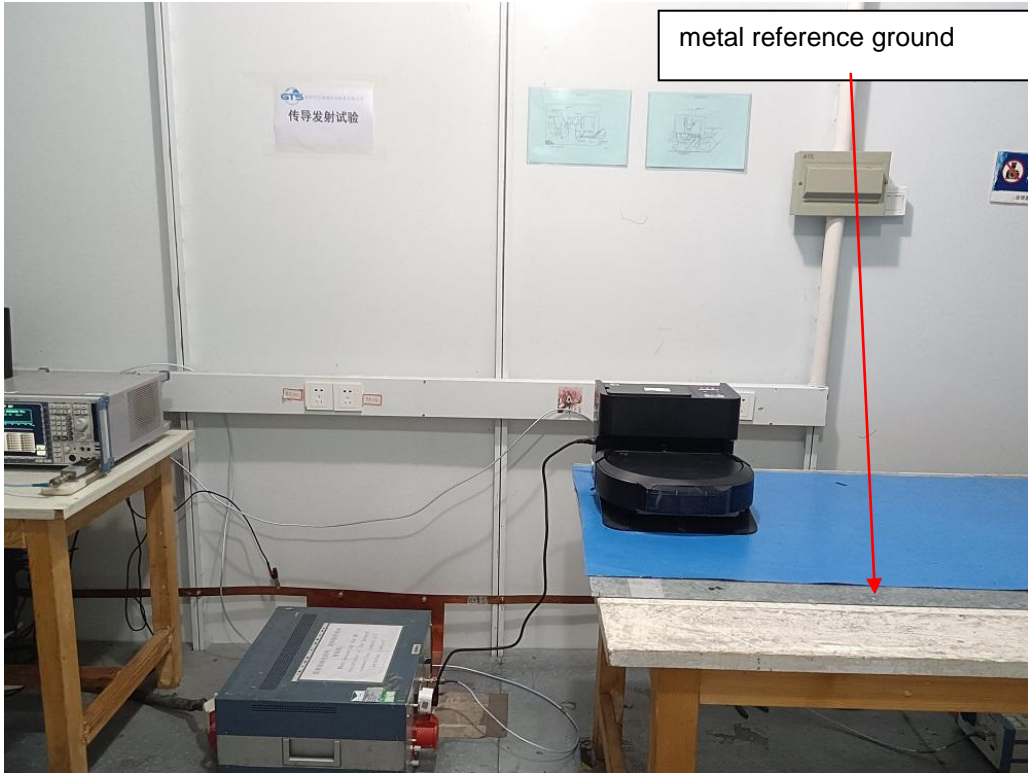


Fig. 3

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT



Fig. 1



Fig. 2



Fig. 3



Fig. 4

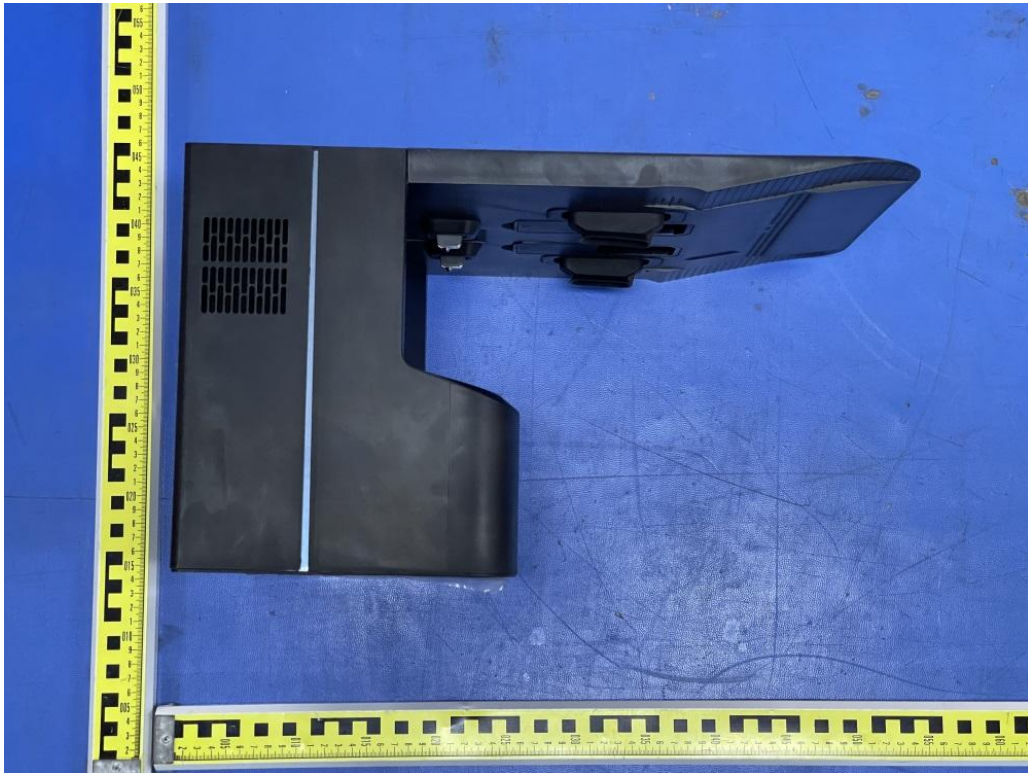


Fig. 5

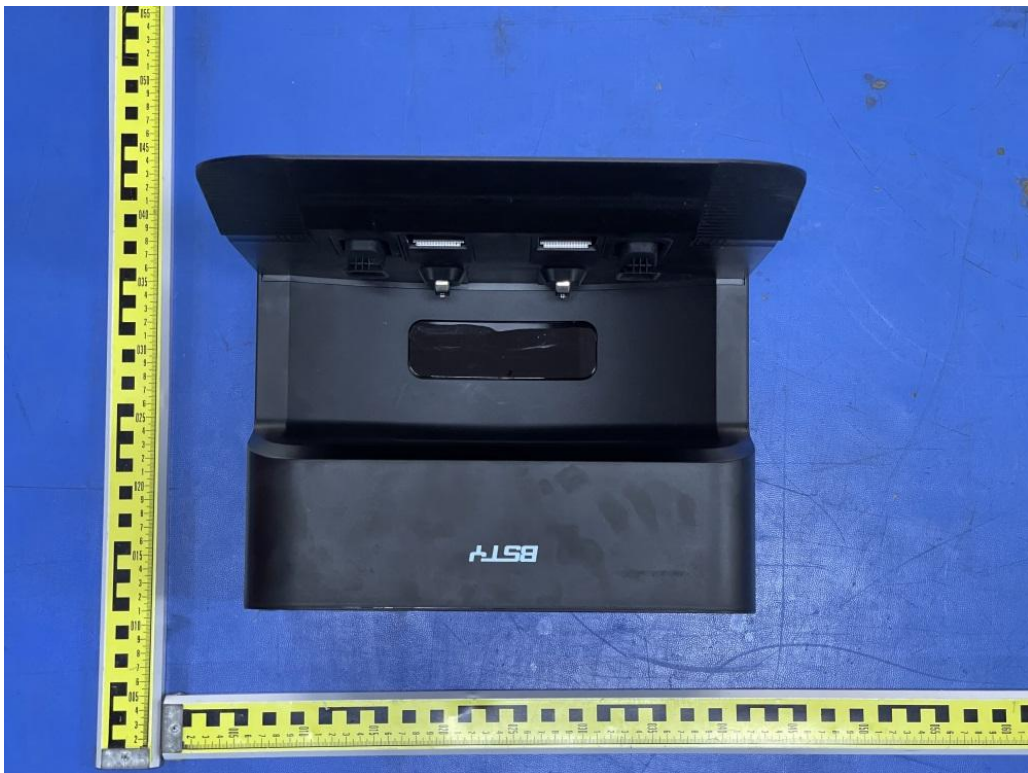


Fig. 6

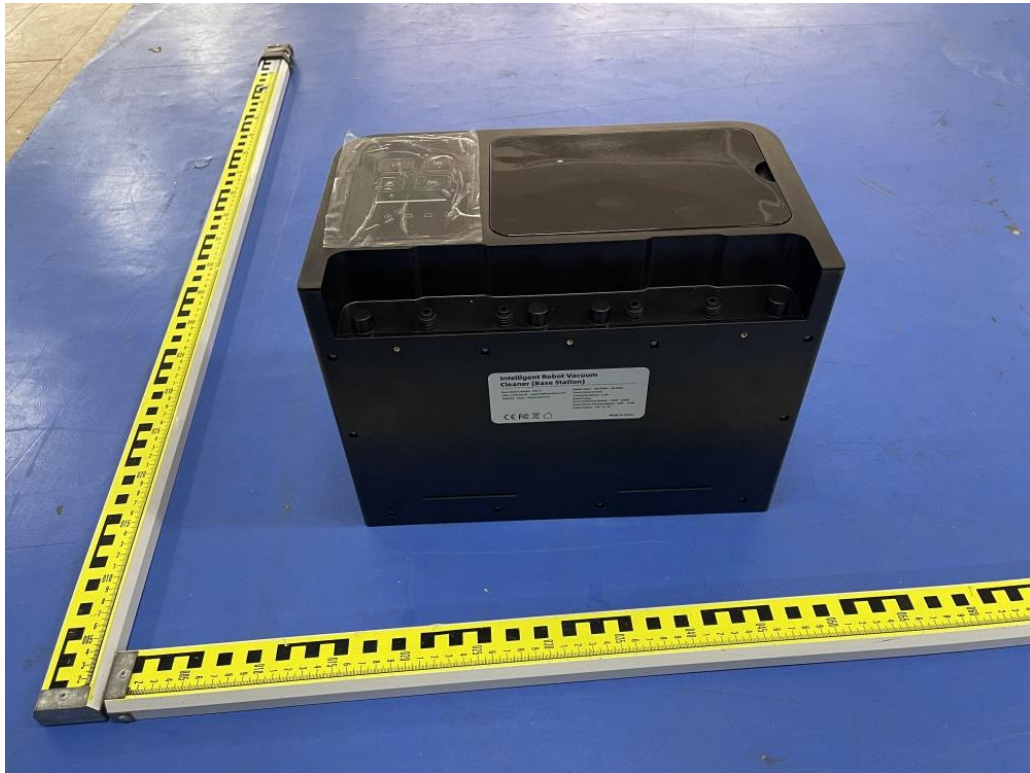


Fig. 7



Fig. 8

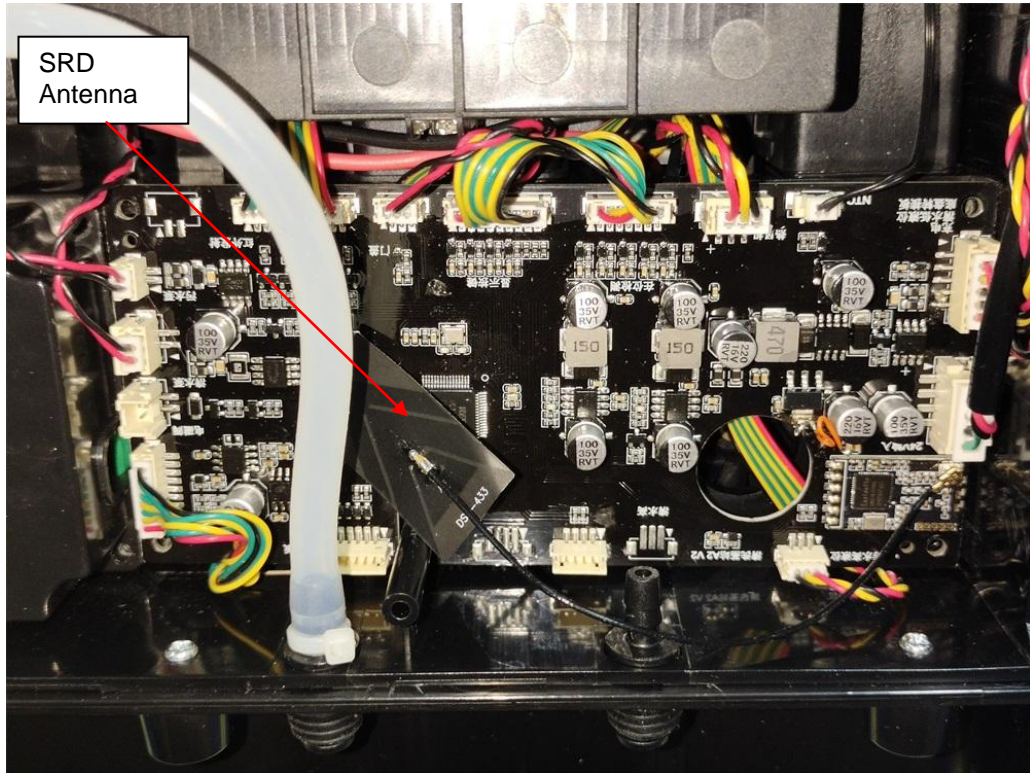


Fig. 9

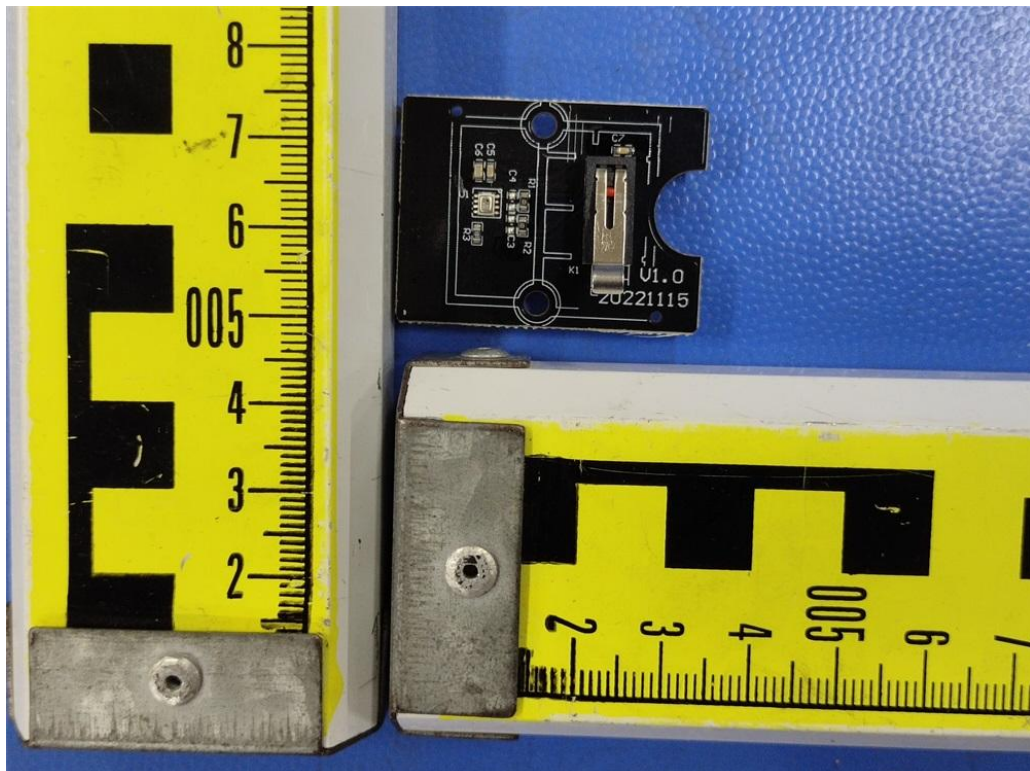


Fig. 10

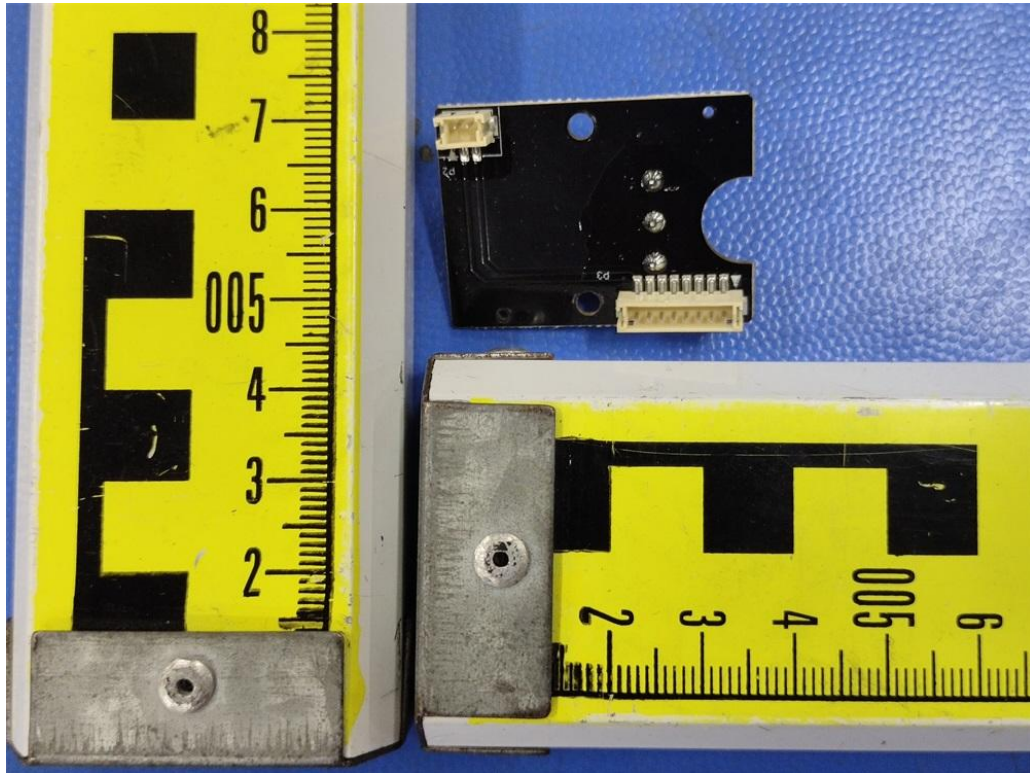


Fig. 11

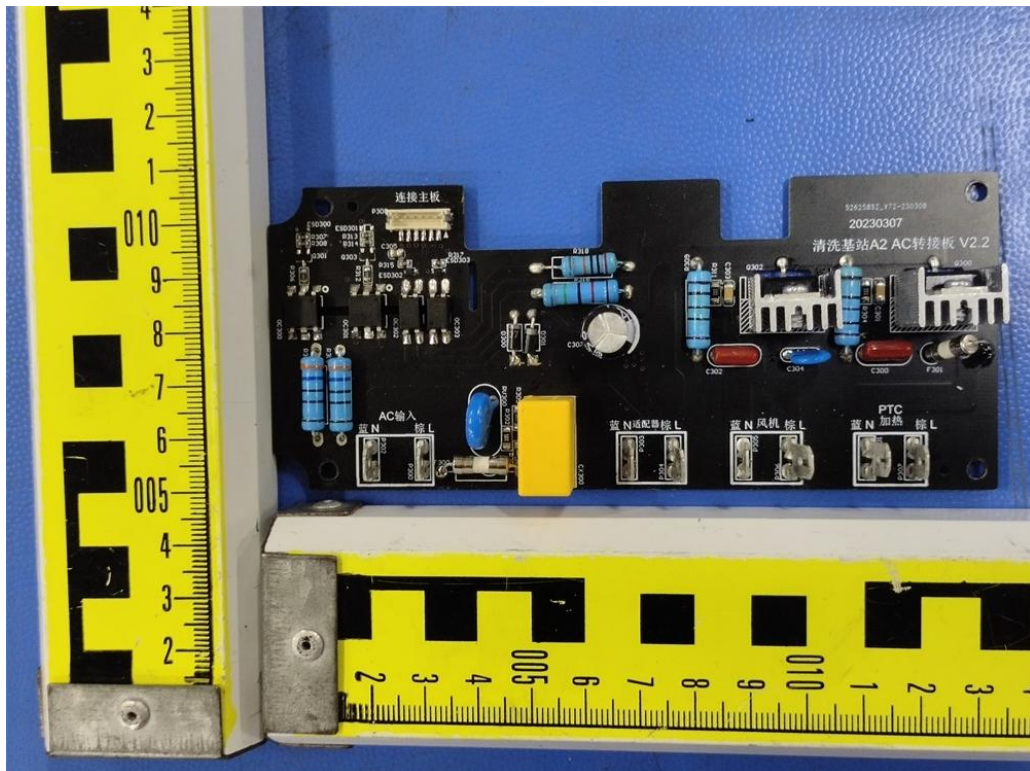


Fig. 12

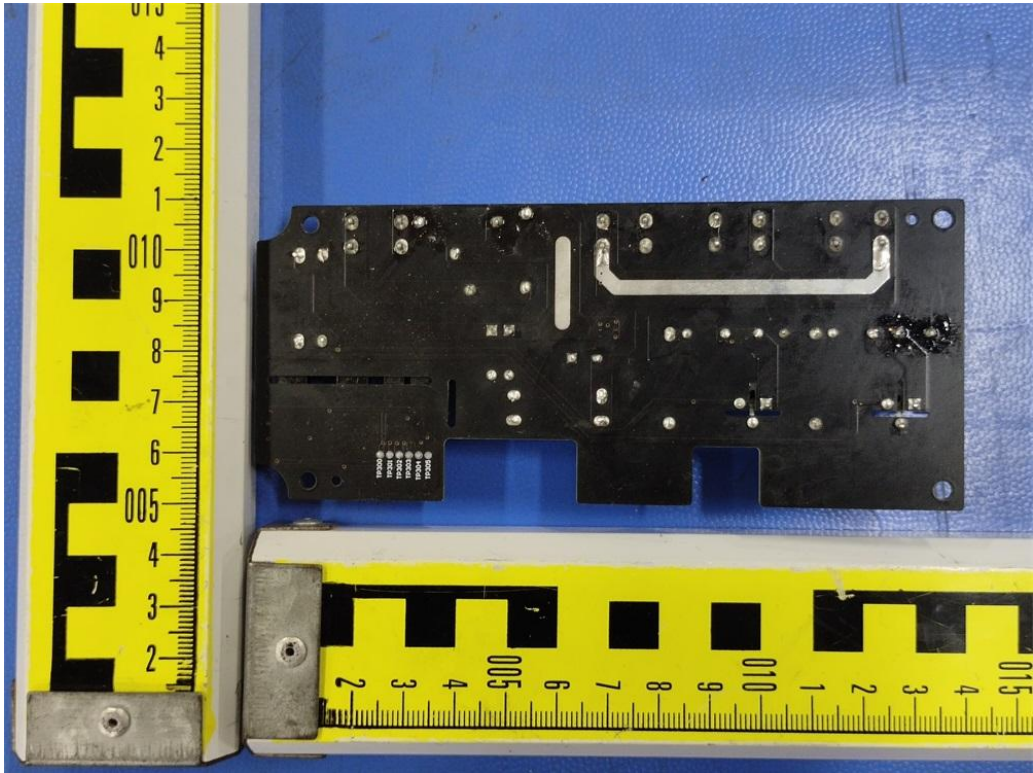


Fig. 13

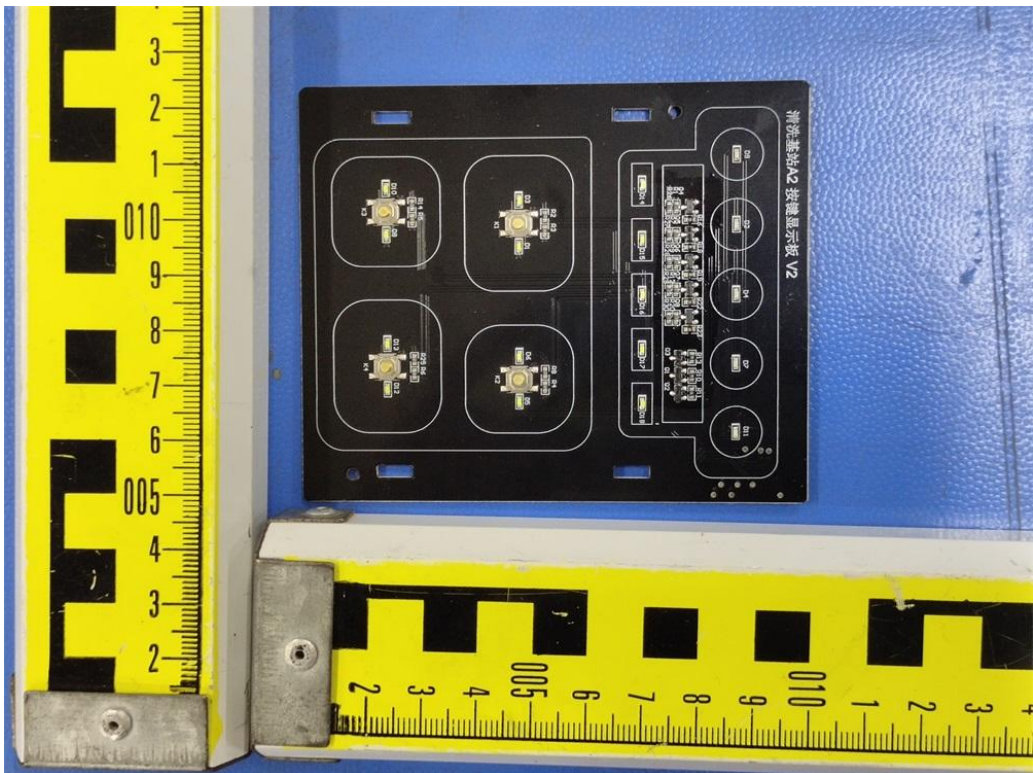


Fig. 14



Fig. 15

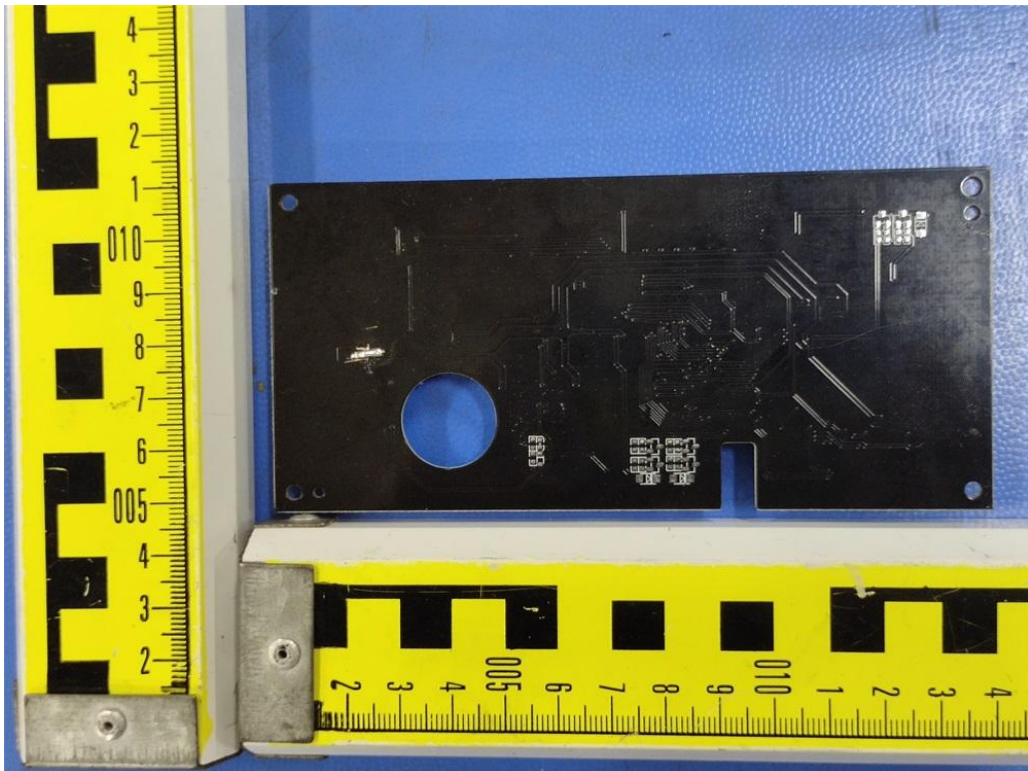


Fig. 16

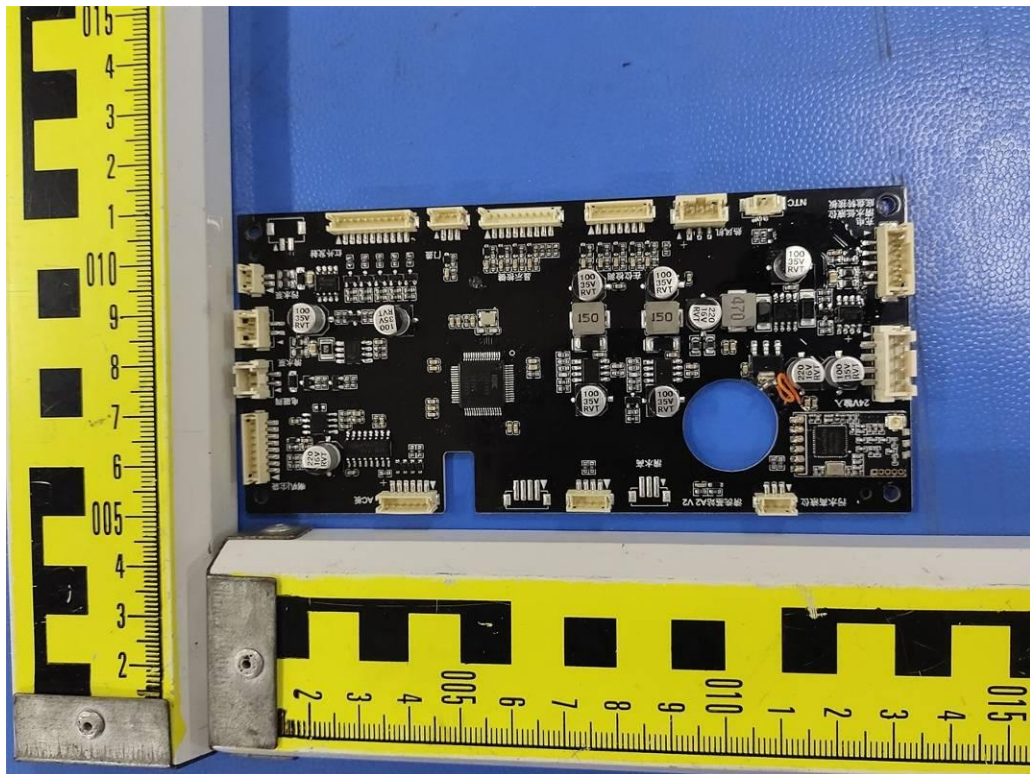


Fig. 17



Fig. 18

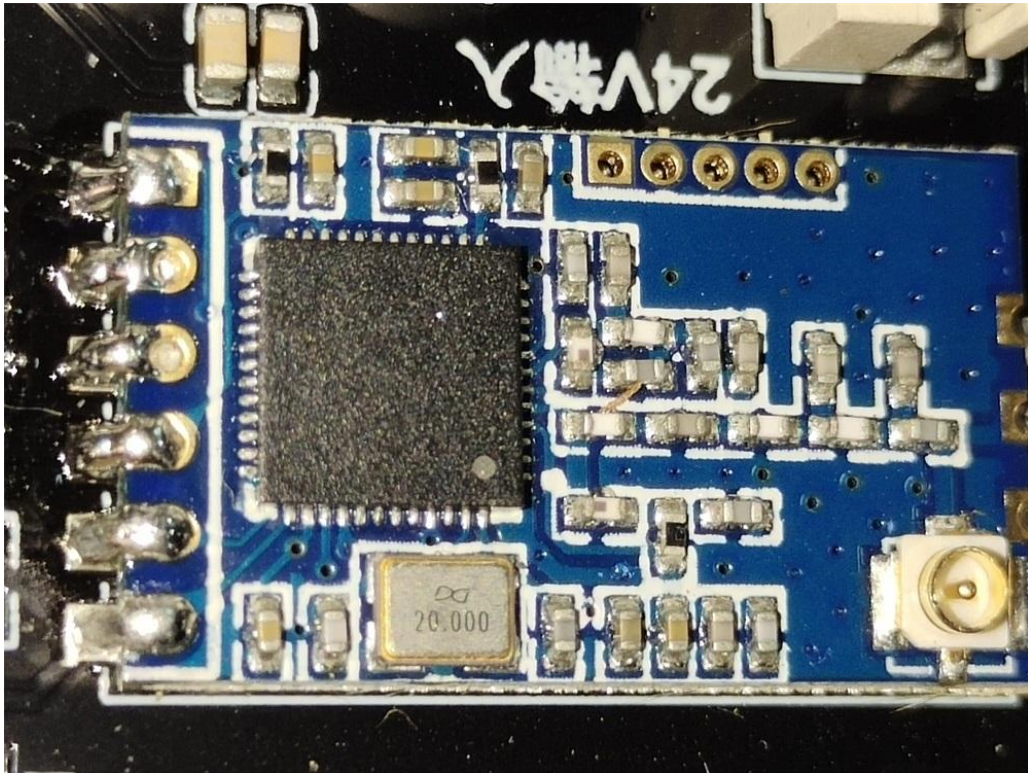


Fig. 19

.....End of Report.....