




Plot 66:

Test Date	2024-03-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1
Signal	IEEE 802.11 ax
Frequency	5240
SAR 10g (W/Kg)	0.077
SAR 1g (W/Kg)	0.158
ConvF	1.98
Relative permittivity	36.38
Conductivity (S/m)	4.65

Maximum location: X=0.00, Y=2.00 ; SAR Peak: 1.12 W/kg

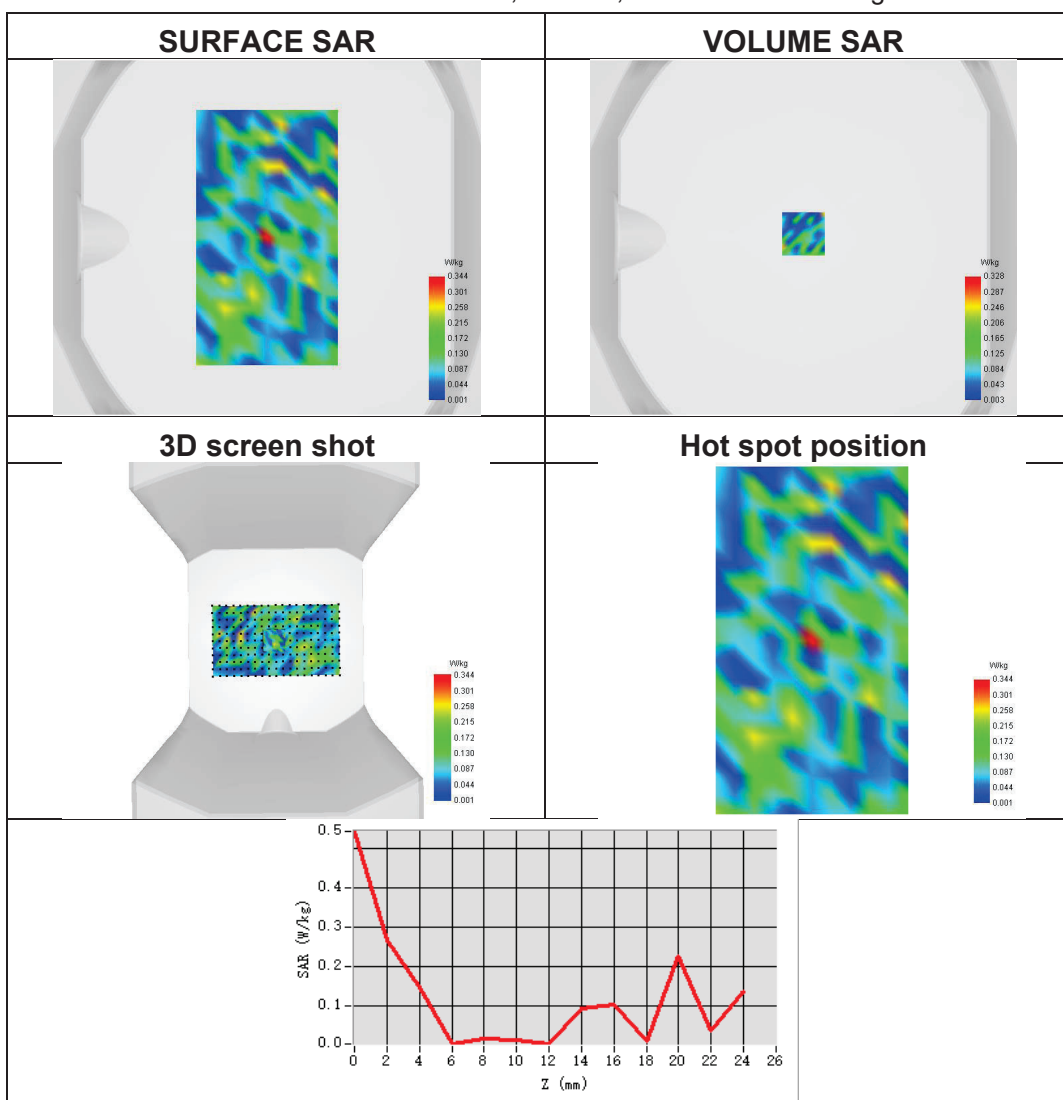




Plot 67:

Test Date	2024-03-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1
Signal	IEEE 802.11 n
Frequency	5200
SAR 10g (W/Kg)	0.159
SAR 1g (W/Kg)	0.337
ConvF	1.98
Relative permittivity	37.29
Conductivity (S/m)	4.68

Maximum location: X=-73.00, Y=-57.00 ; SAR Peak: 1.74 W/kg

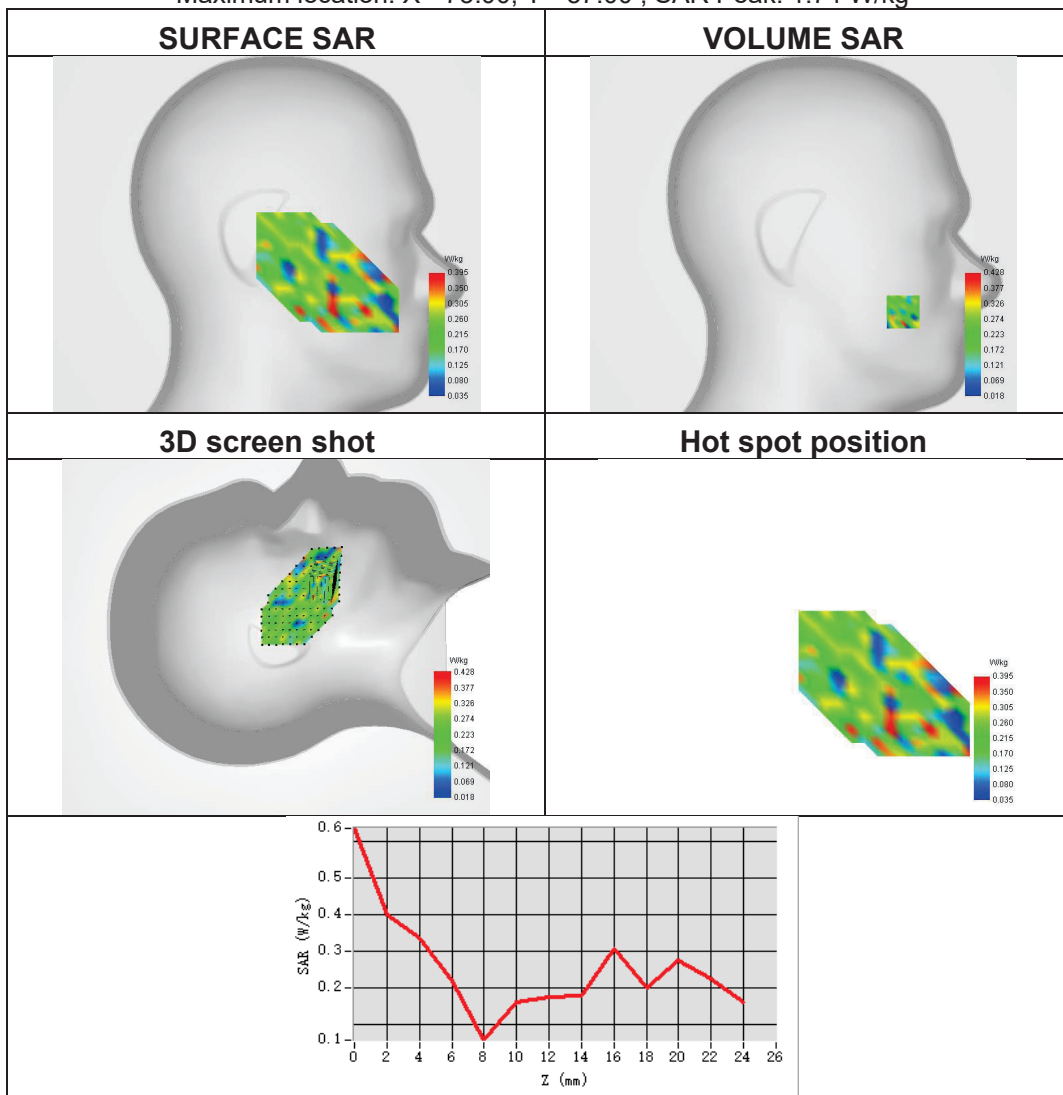




Plot 68:

Test Date	2024-03-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-1
Signal	IEEE 802.11 n
Frequency	5200
SAR 10g (W/Kg)	0.216
SAR 1g (W/Kg)	0.444
ConvF	1.98
Relative permittivity	37.29
Conductivity (S/m)	4.68

Maximum location: X=7.00, Y=17.00 ; SAR Peak: 2.07 W/kg

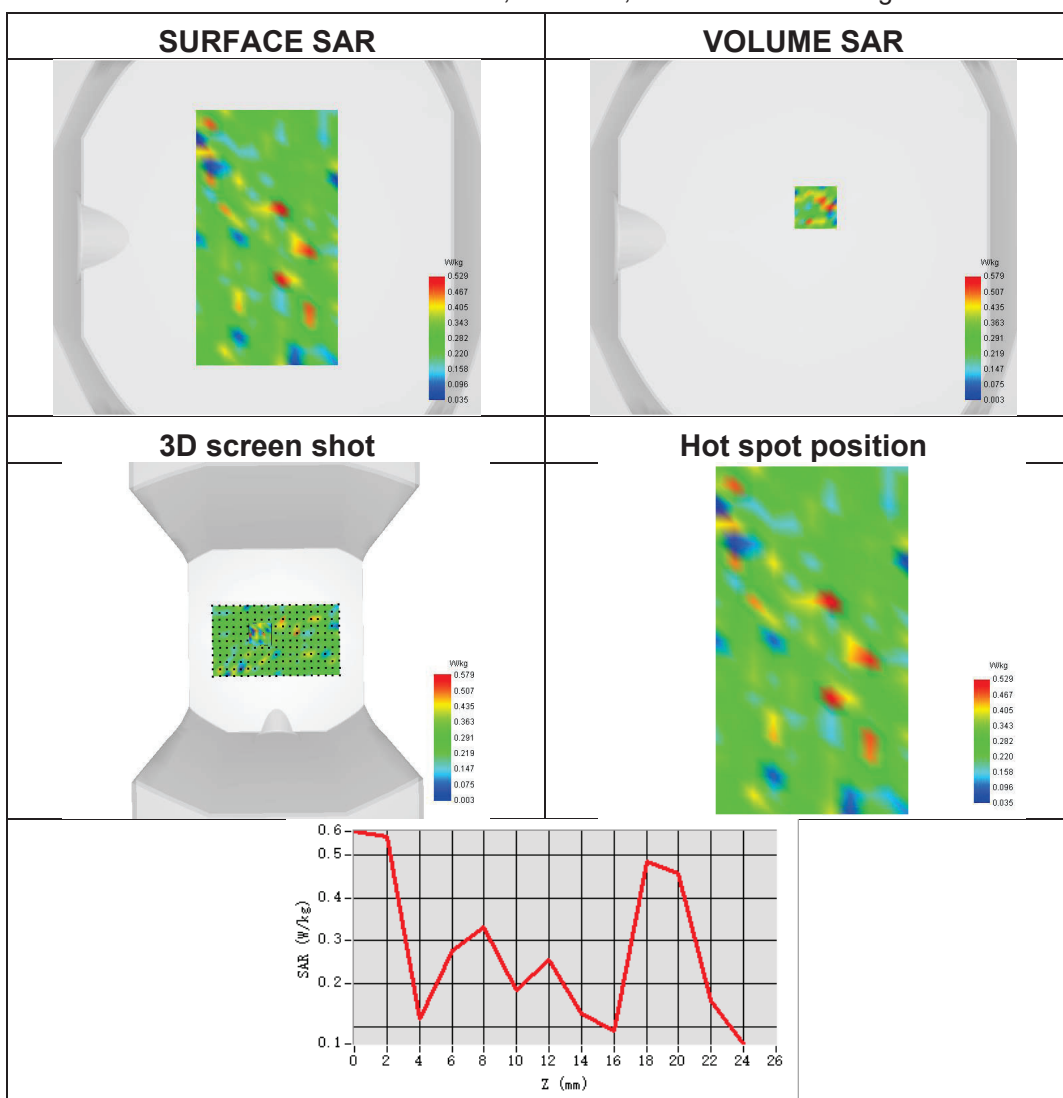




Plot 69:

Test Date	2024-03-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1
Signal	IEEE 802.11 n
Frequency	5200
SAR 10g (W/Kg)	0.150
SAR 1g (W/Kg)	0.319
ConvF	1.98
Relative permittivity	37.29
Conductivity (S/m)	4.68

Maximum location: X=-9.00, Y=-32.00 ; SAR Peak: 1.65 W/kg

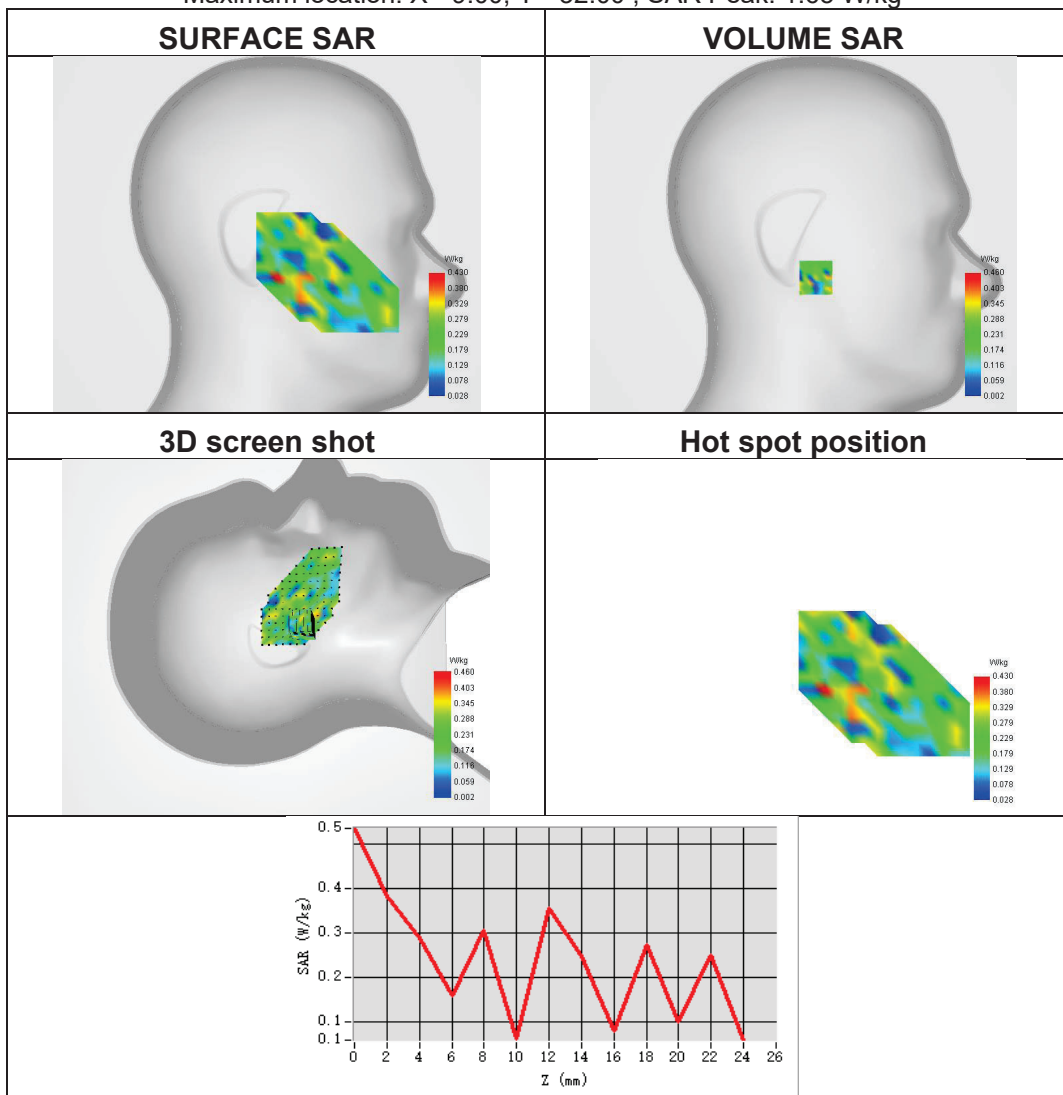




Plot 70:

Test Date	2024-03-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1
Signal	IEEE 802.11 n
Frequency	5200
SAR 10g (W/Kg)	0.143
SAR 1g (W/Kg)	0.286
ConvF	1.98
Relative permittivity	37.29
Conductivity (S/m)	4.68

Maximum location: X=8.00, Y=40.00 ; SAR Peak: 1.40 W/kg

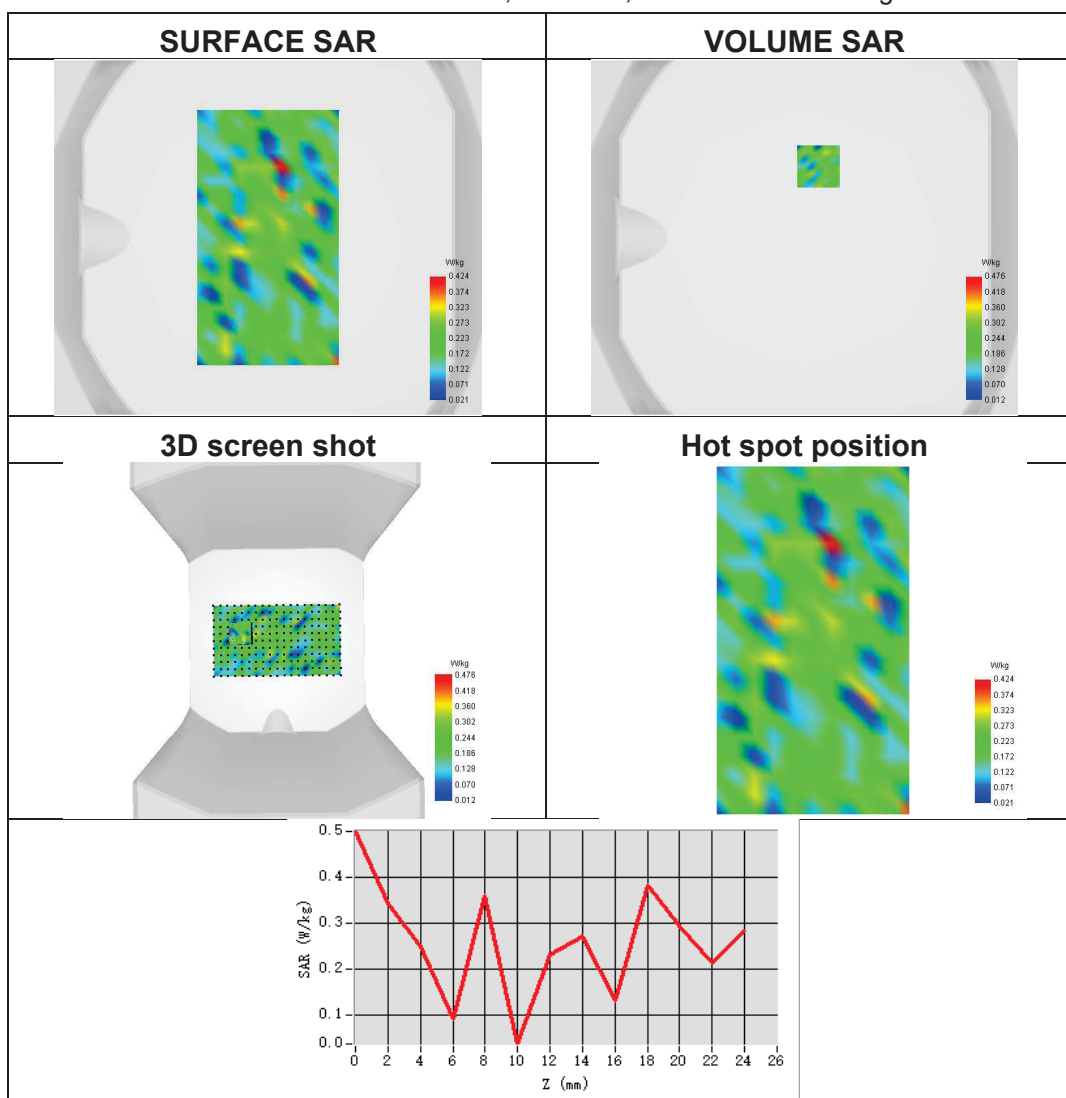




Plot 71:

Test Date	2024-03-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2a
Signal	IEEE 802.11 n
Frequency	5300
SAR 10g (W/Kg)	0.057
SAR 1g (W/Kg)	0.150
ConvF	1.83
Relative permittivity	37.02
Conductivity (S/m)	4.75

Maximum location: X=-56.00, Y=-33.00 ; SAR Peak: 1.48 W/kg

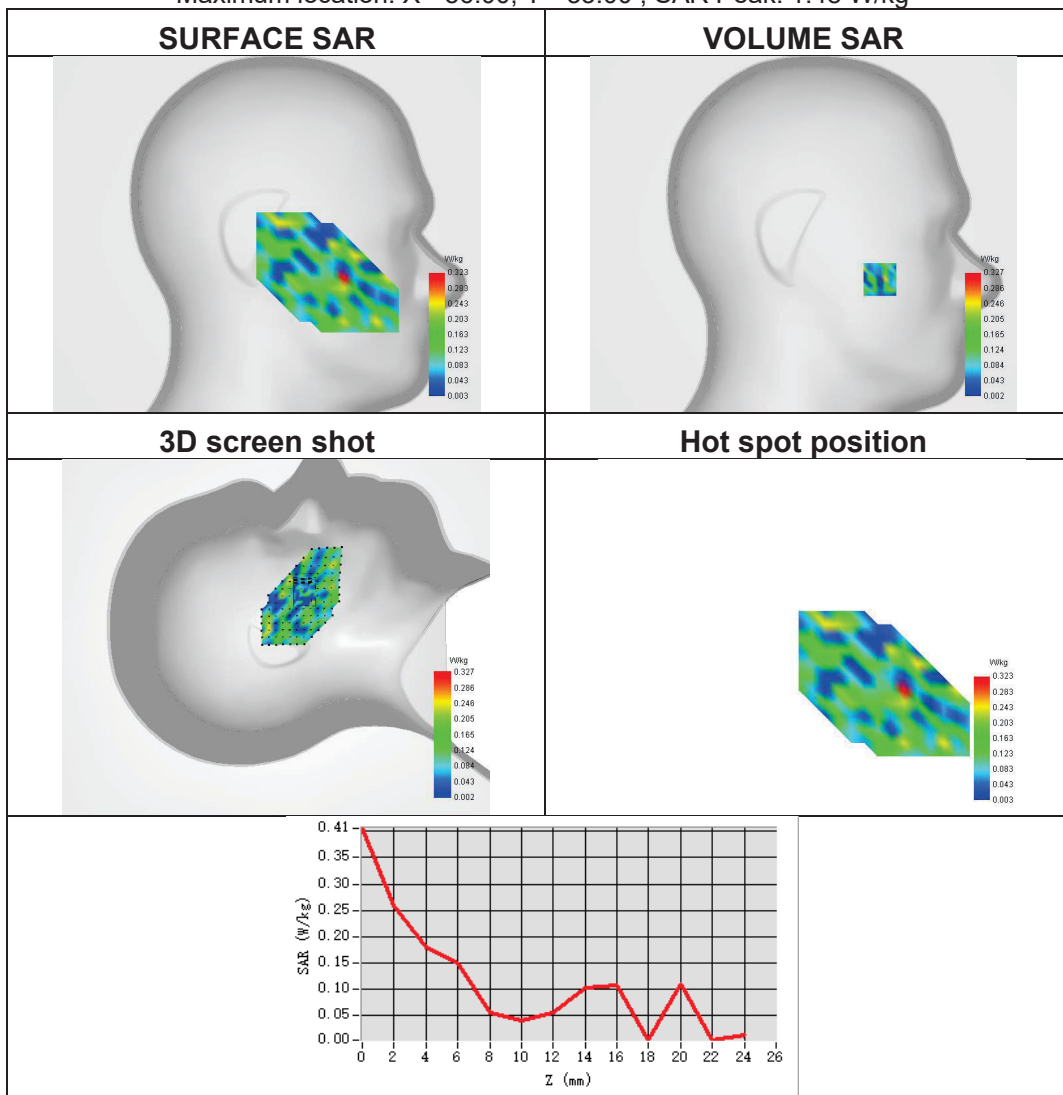




Plot 72:

Test Date	2024-03-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-2a
Signal	IEEE 802.11 n
Frequency	5300
SAR 10g (W/Kg)	0.077
SAR 1g (W/Kg)	0.160
ConvF	1.83
Relative permittivity	37.02
Conductivity (S/m)	4.75

Maximum location: X=-15.00, Y=-9.00 ; SAR Peak: 0.86 W/kg

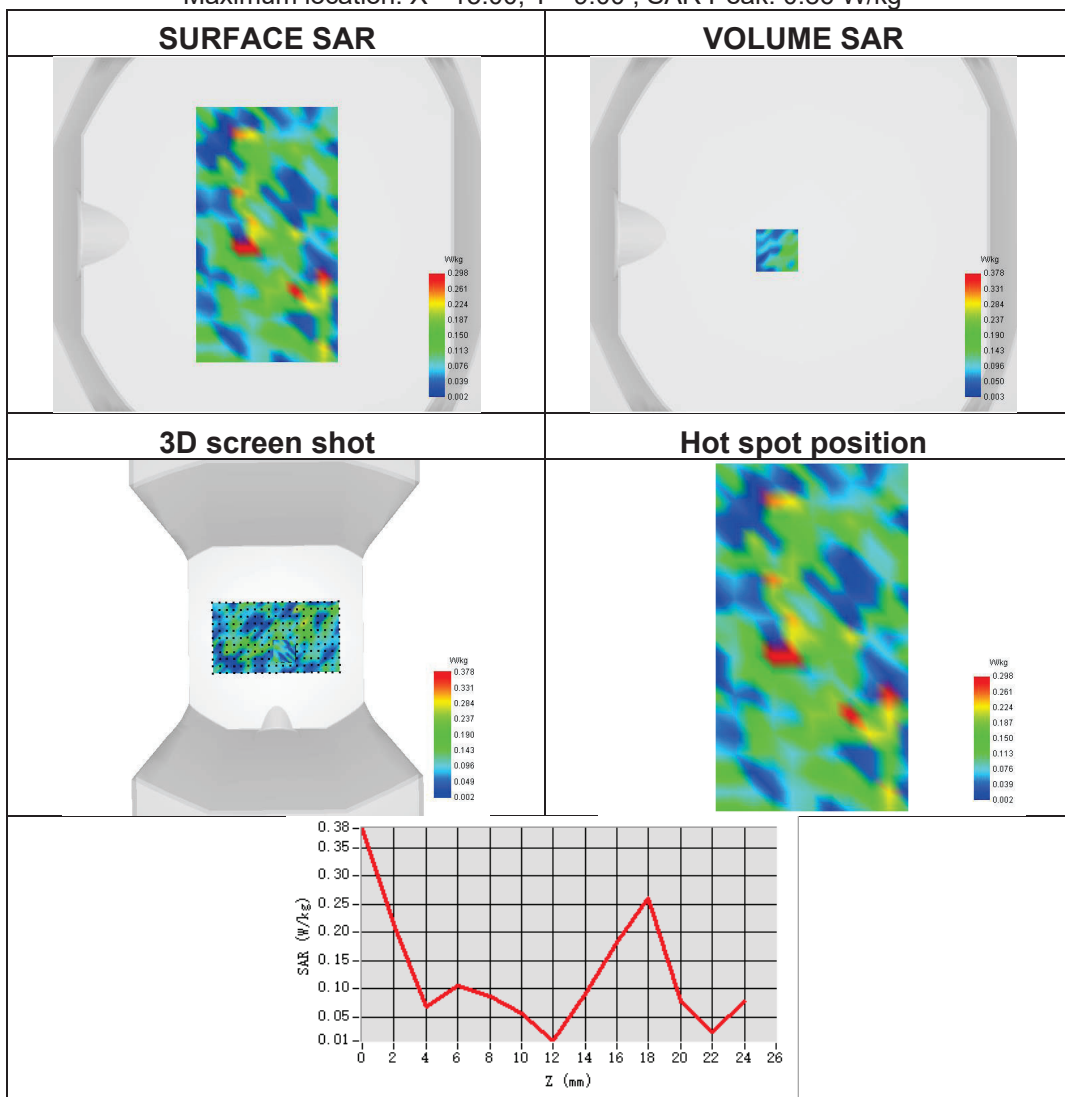




Plot 73:

Test Date	2024-03-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2a
Signal	IEEE 802.11 ax
Frequency	5320
SAR 10g (W/Kg)	0.153
SAR 1g (W/Kg)	0.509
ConvF	1.83
Relative permittivity	37.02
Conductivity (S/m)	4.75

Maximum location: X=-24.00, Y=9.00 ; SAR Peak: 2.50 W/kg

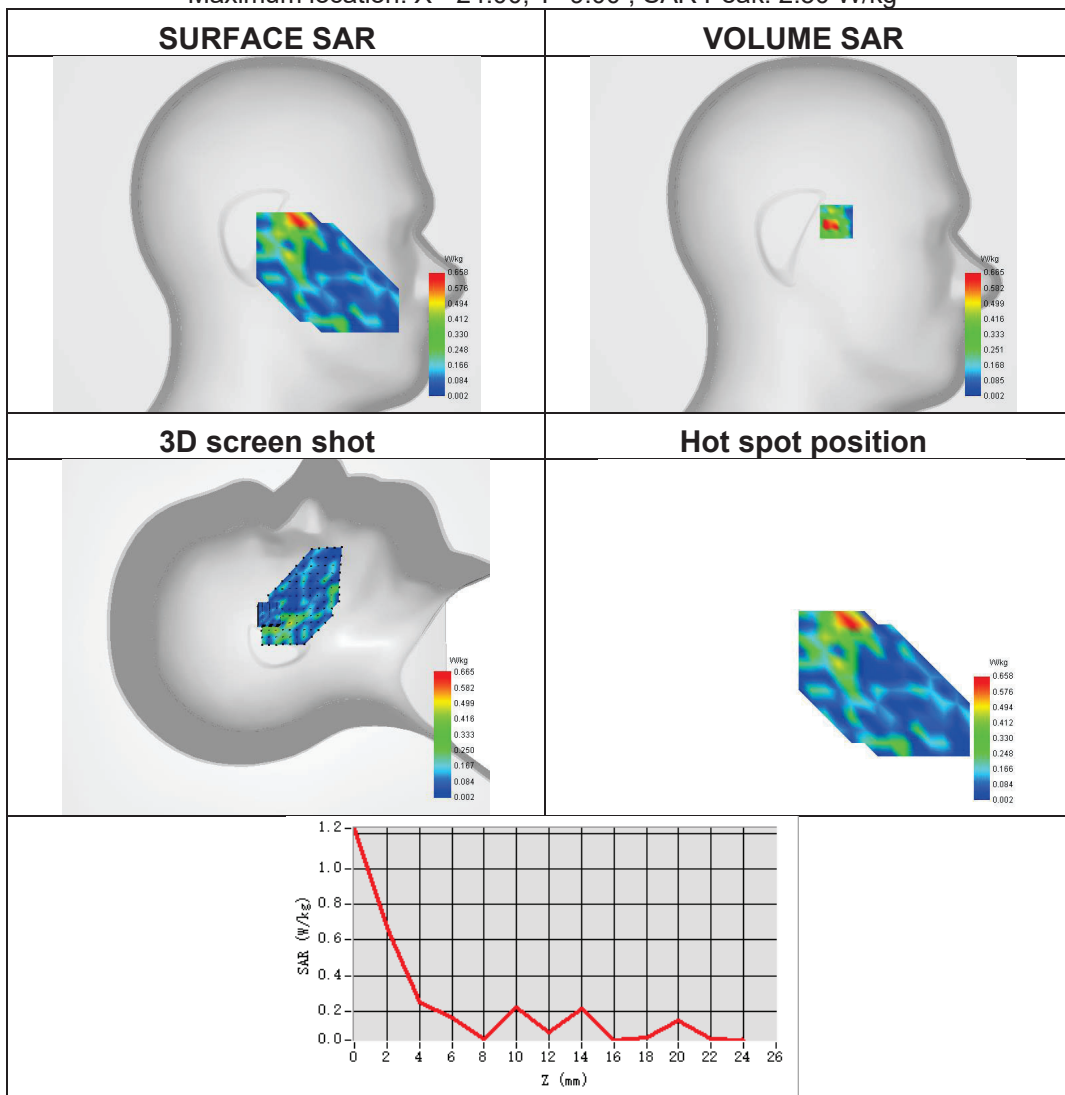




Plot 74:

Test Date	2024-03-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2a
Signal	IEEE 802.11 ax
Frequency	5320
SAR 10g (W/Kg)	0.058
SAR 1g (W/Kg)	0.111
ConvF	1.83
Relative permittivity	37.02
Conductivity (S/m)	4.75

Maximum location: X=0.00, Y=-48.00 ; SAR Peak: 0.96 W/kg

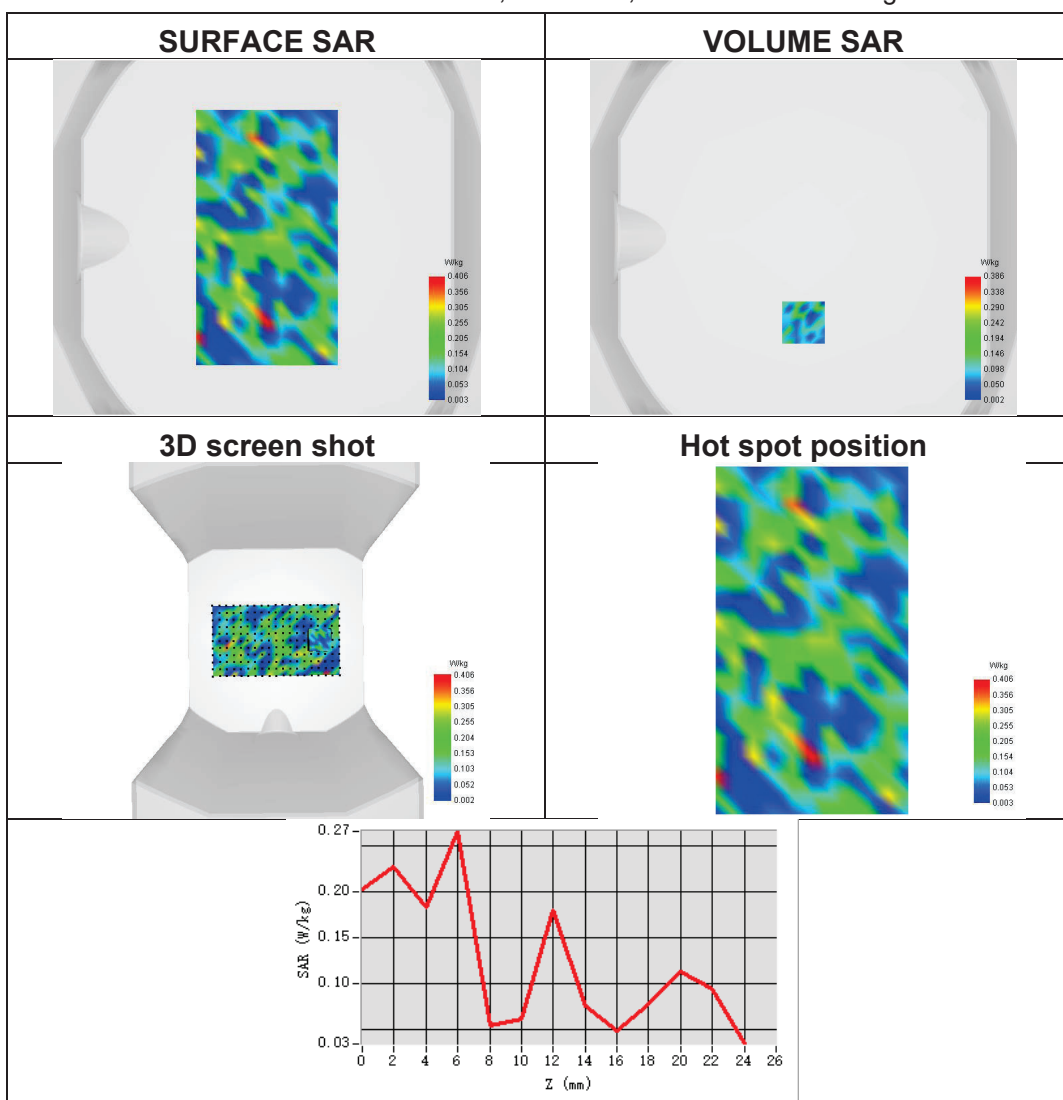




Plot 75:

Test Date	2024-03-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2a
Signal	IEEE 802.11 n
Frequency	5300
SAR 10g (W/Kg)	0.154
SAR 1g (W/Kg)	0.255
ConvF	1.83
Relative permittivity	36.43
Conductivity (S/m)	4.75

Maximum location: X=-51.00, Y=-58.00 ; SAR Peak: 1.66 W/kg

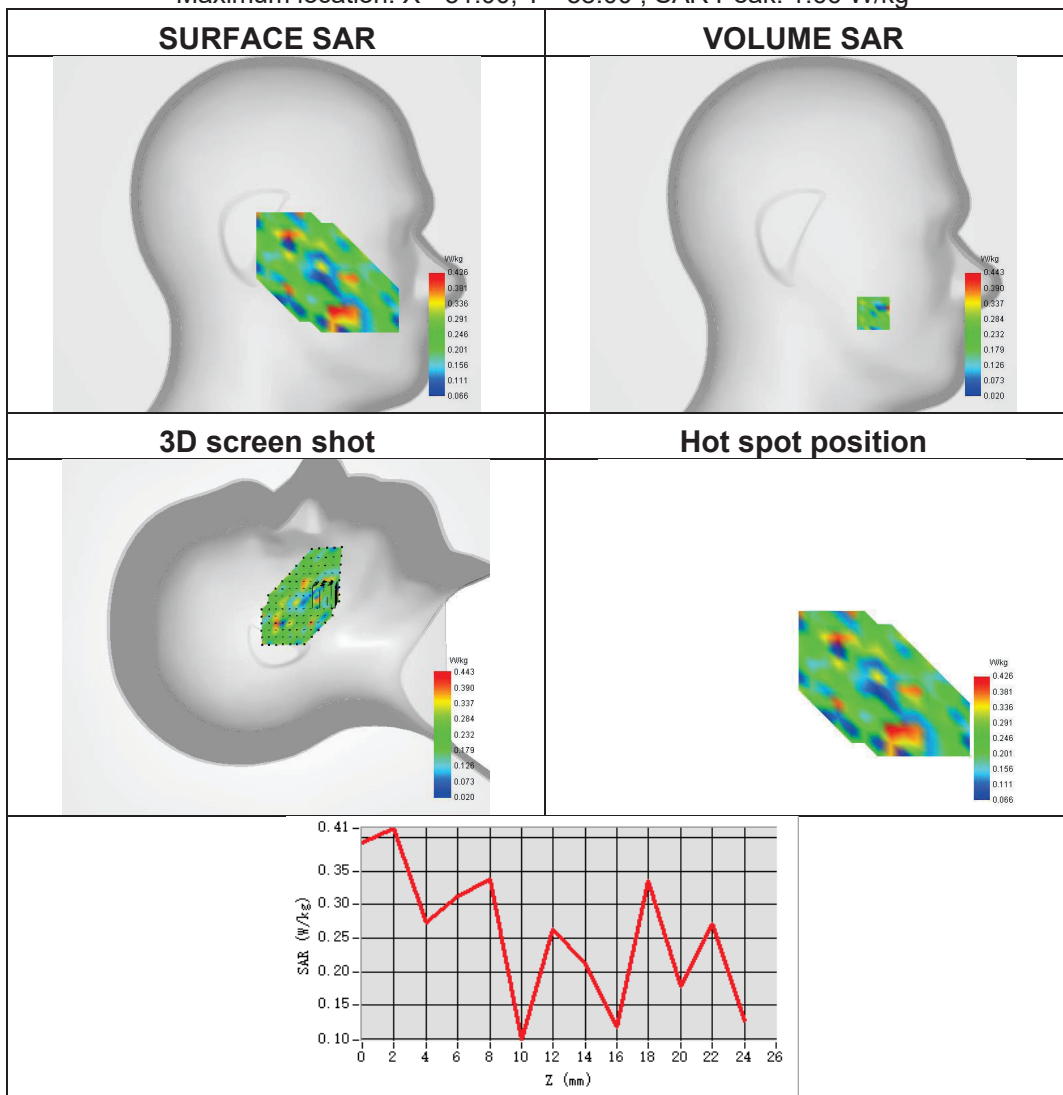




Plot 76:

Test Date	2024-03-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-2a
Signal	IEEE 802.11 n
Frequency	5300
SAR 10g (W/Kg)	0.188
SAR 1g (W/Kg)	0.304
ConvF	1.83
Relative permittivity	36.43
Conductivity (S/m)	4.75

Maximum location: X=8.00, Y=40.00 ; SAR Peak: 1.19 W/kg

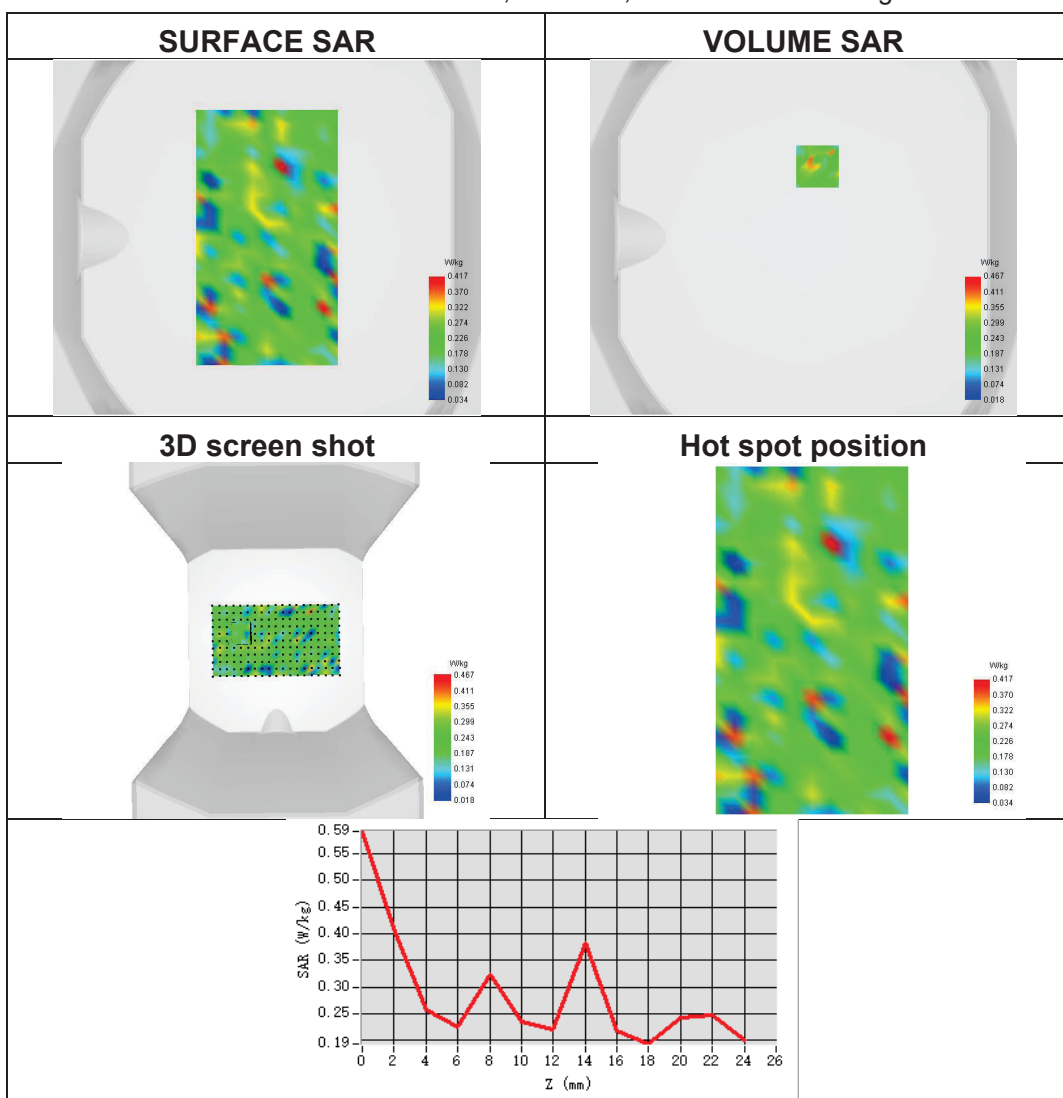




Plot 77:

Test Date	2024-03-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2a
Signal	IEEE 802.11 n
Frequency	5300
SAR 10g (W/Kg)	0.137
SAR 1g (W/Kg)	0.314
ConvF	1.83
Relative permittivity	36.43
Conductivity (S/m)	4.75

Maximum location: X=-64.00, Y=-24.00 ; SAR Peak: 3.23 W/kg

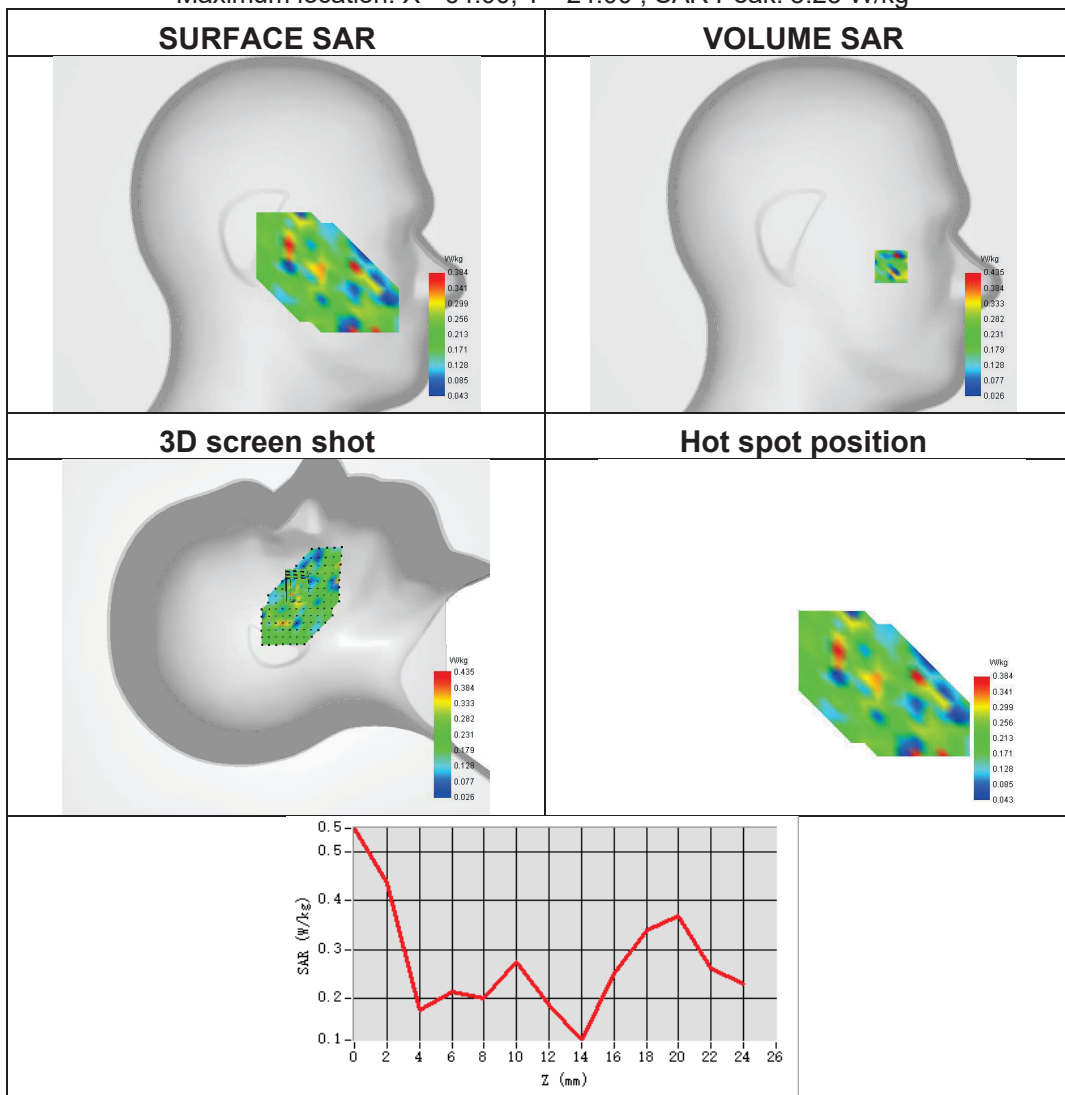




Plot 78:

Test Date	2024-03-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2a
Signal	IEEE 802.11 n
Frequency	5300
SAR 10g (W/Kg)	0.149
SAR 1g (W/Kg)	0.235
ConvF	1.83
Relative permittivity	36.43
Conductivity (S/m)	4.75

Maximum location: X=32.00, Y=-6.00 ; SAR Peak: 1.17 W/kg

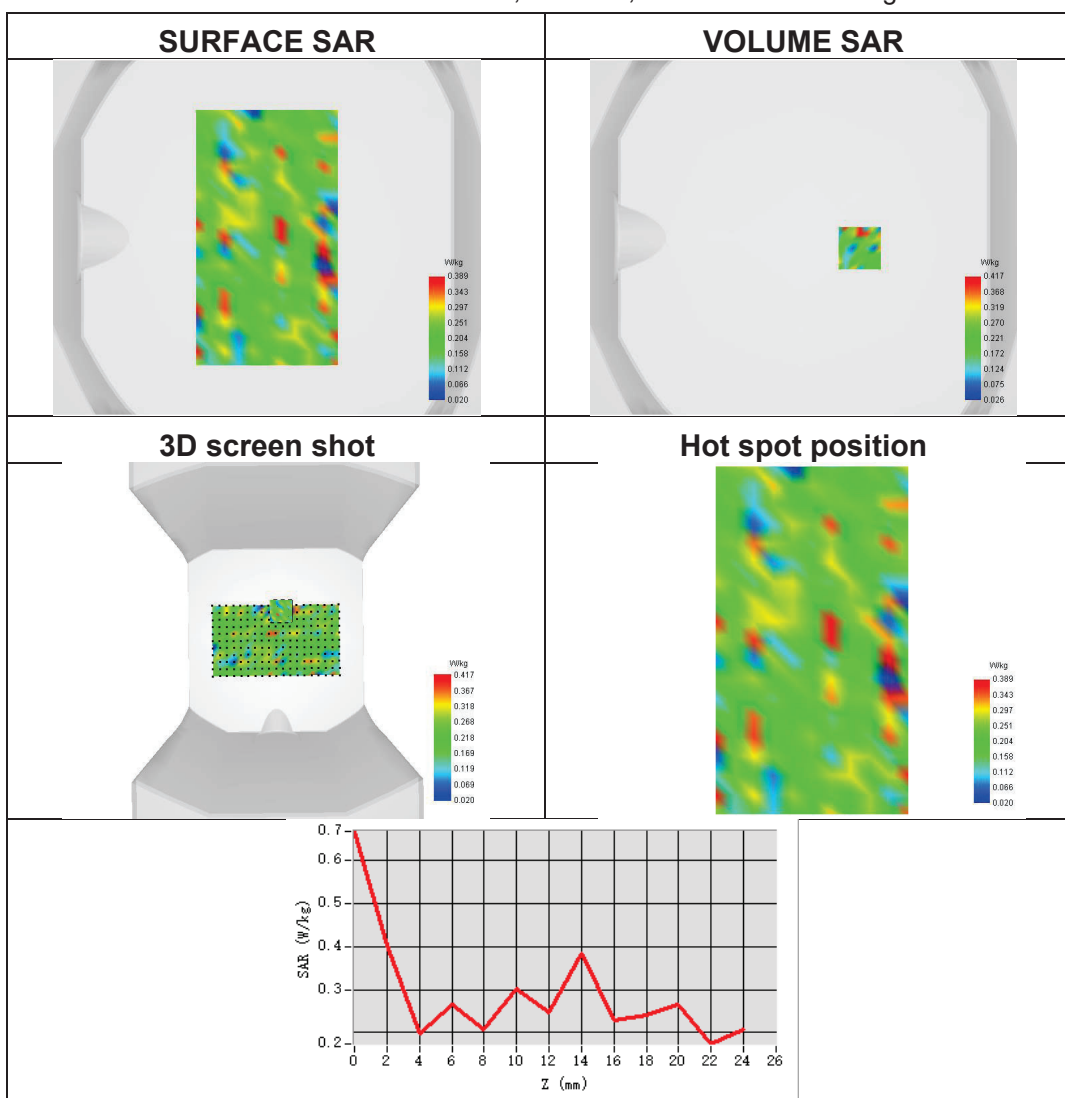




Plot 79:

Test Date	2024-03-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2c
Signal	IEEE 802.11ac
Frequency	5500
SAR 10g (W/Kg)	0.131
SAR 1g (W/Kg)	0.306
ConvF	1.86
Relative permittivity	36.24
Conductivity (S/m)	5.06

Maximum location: X=-9.00, Y=0.00 ; SAR Peak: 3.13 W/kg

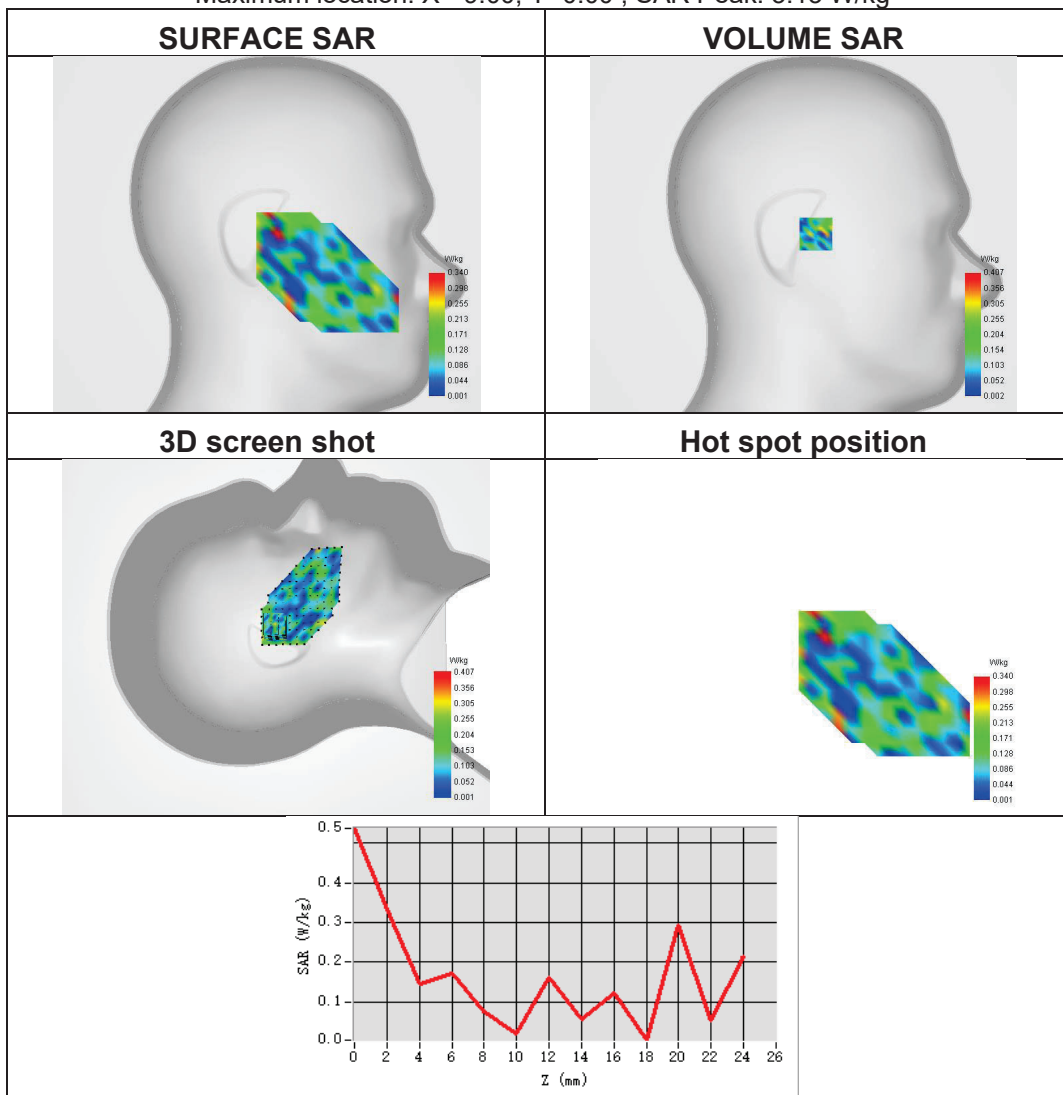




Plot 80:

Test Date	2024-03-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-2c
Signal	IEEE 802.11ac
Frequency	5500
SAR 10g (W/Kg)	0.100
SAR 1g (W/Kg)	0.154
ConvF	1.86
Relative permittivity	36.24
Conductivity (S/m)	5.06

Maximum location: X=-8.00, Y=39.00 ; SAR Peak: 1.82 W/kg

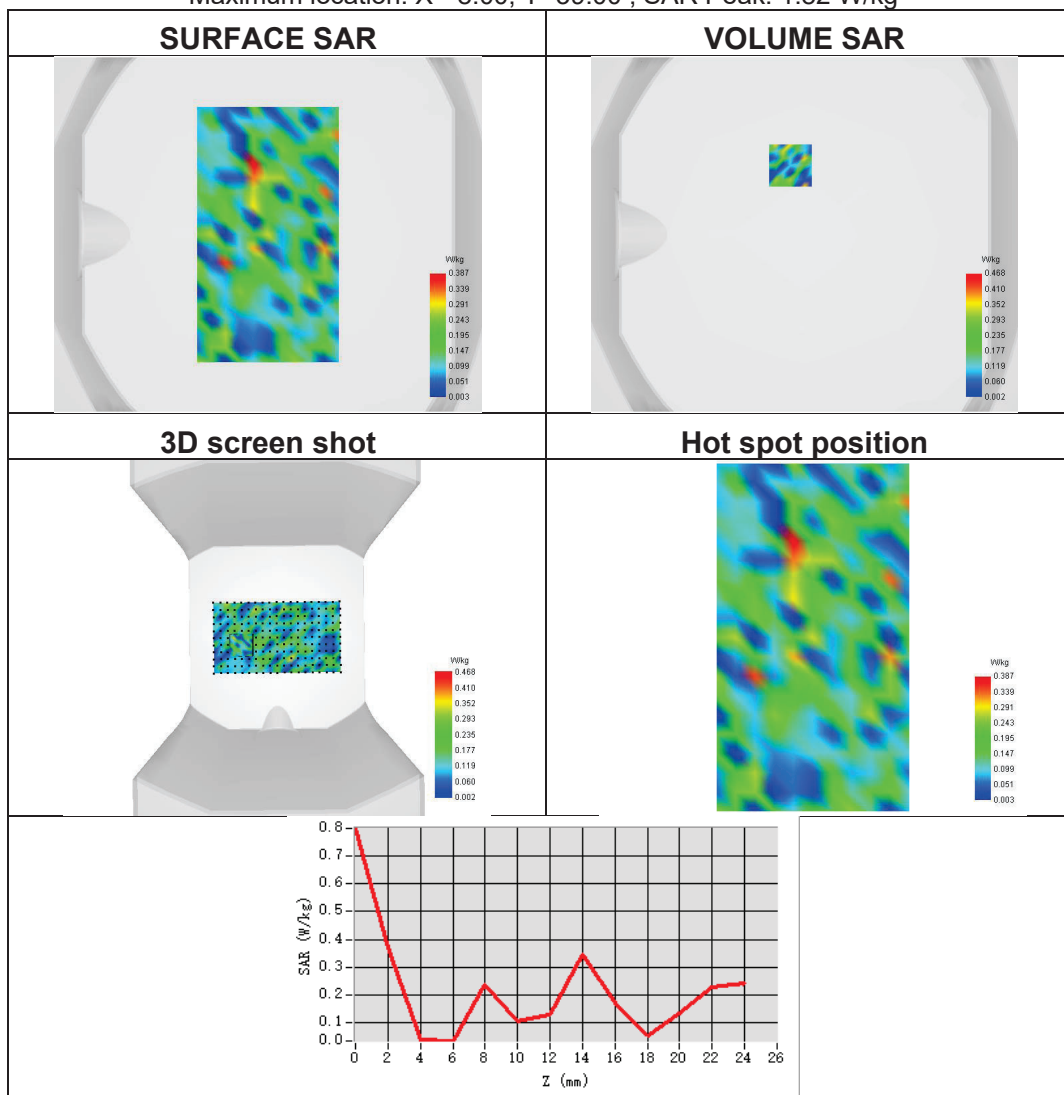




Plot 81:

Test Date	2024-03-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2c
Signal	IEEE 802.11ac
Frequency	5500
SAR 10g (W/Kg)	0.210
SAR 1g (W/Kg)	0.458
ConvF	1.86
Relative permittivity	36.24
Conductivity (S/m)	5.06

Maximum location: X=-22.00, Y=1.00 ; SAR Peak: 2.64 W/kg

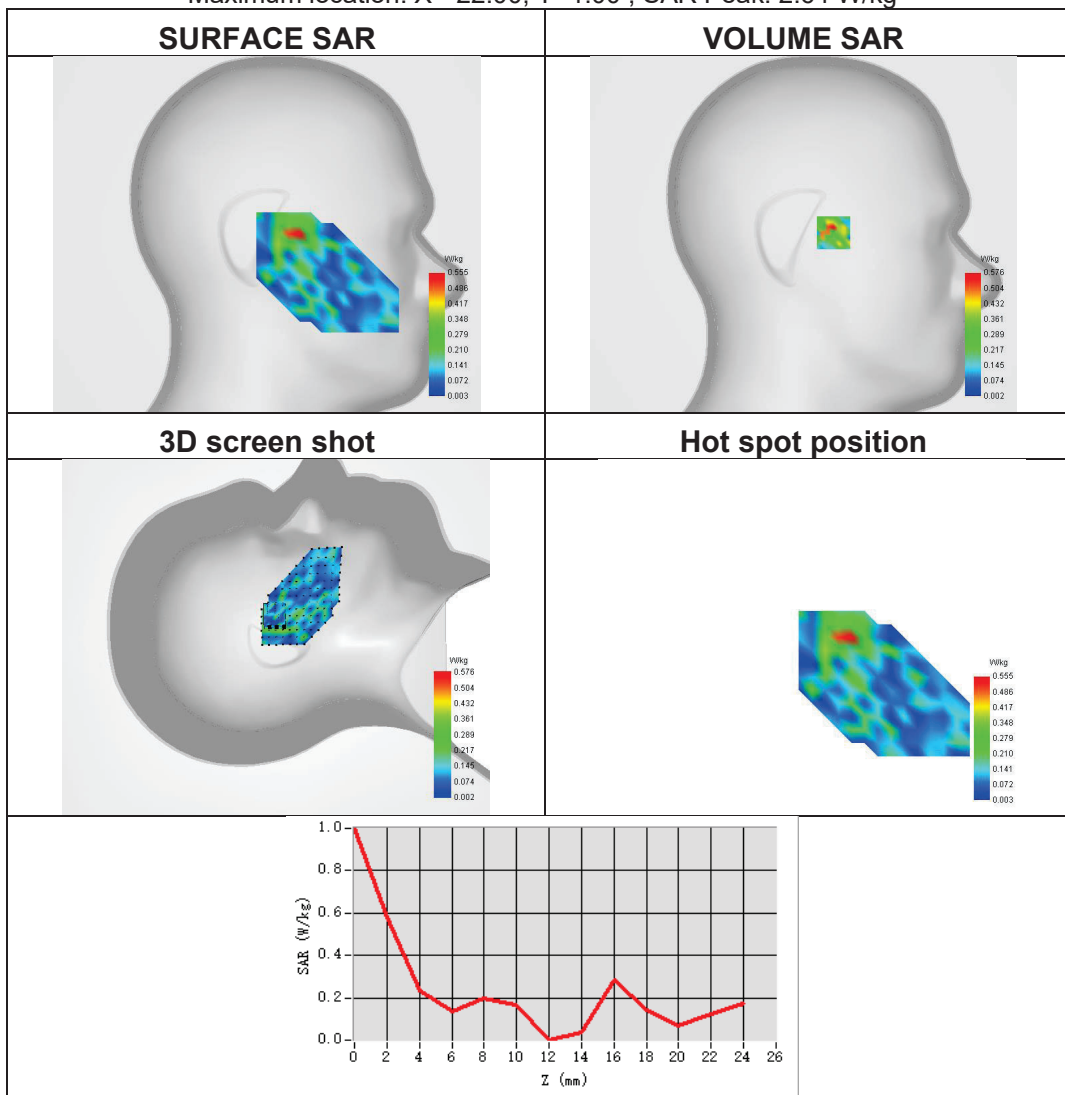




Plot 82:

Test Date	2024-03-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2c
Signal	IEEE 802.11ac
Frequency	5500
SAR 10g (W/Kg)	0.079
SAR 1g (W/Kg)	0.124
ConvF	1.86
Relative permittivity	36.24
Conductivity (S/m)	5.06

Maximum location: X=-16.00, Y=-16.00 ; SAR Peak: 1.47 W/kg

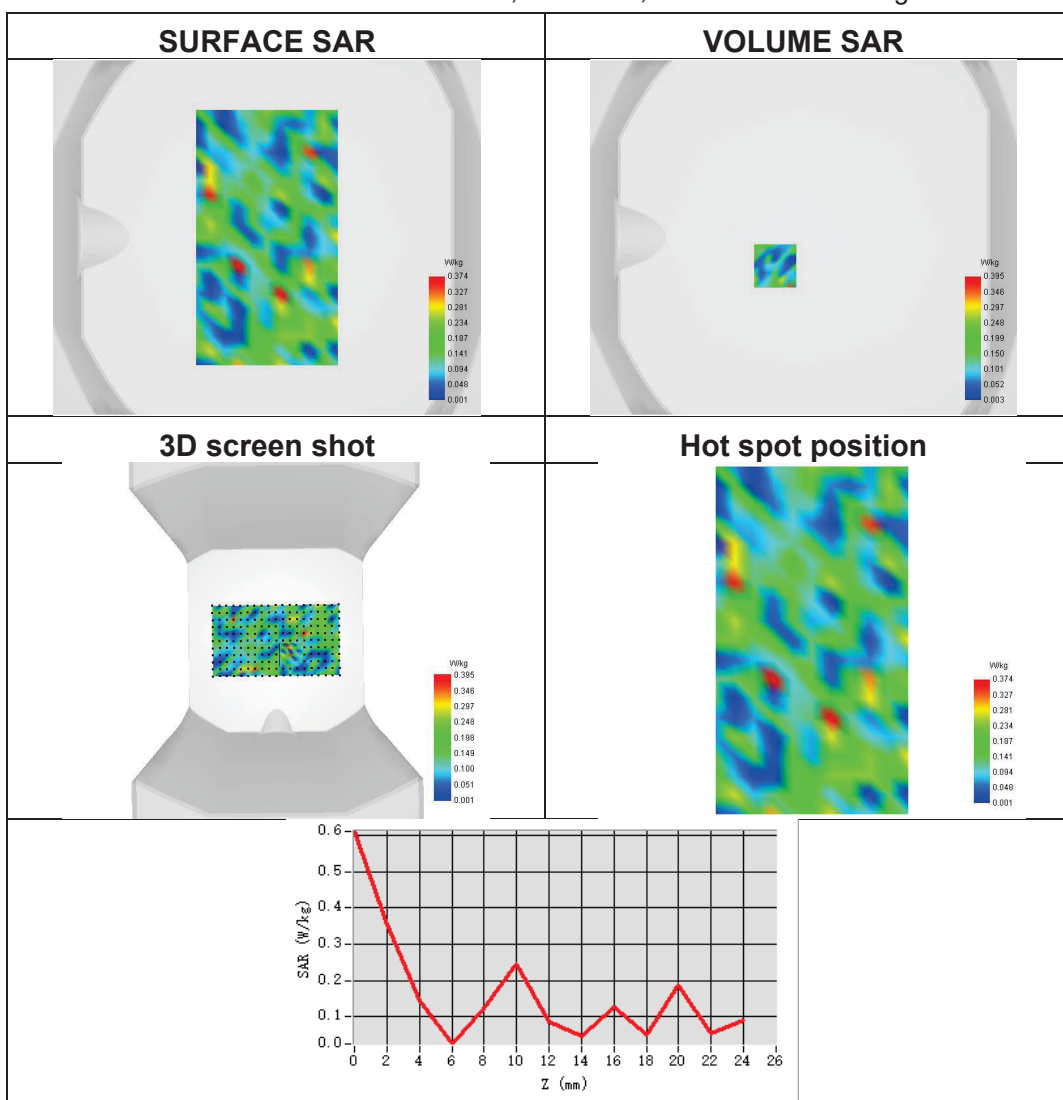




Plot 83:

Test Date	2024-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5500
SAR 10g (W/Kg)	0.187
SAR 1g (W/Kg)	0.343
ConvF	1.86
Relative permittivity	36.70
Conductivity (S/m)	5.10

Maximum location: X=-24.00, Y=-8.00 ; SAR Peak: 2.42 W/kg

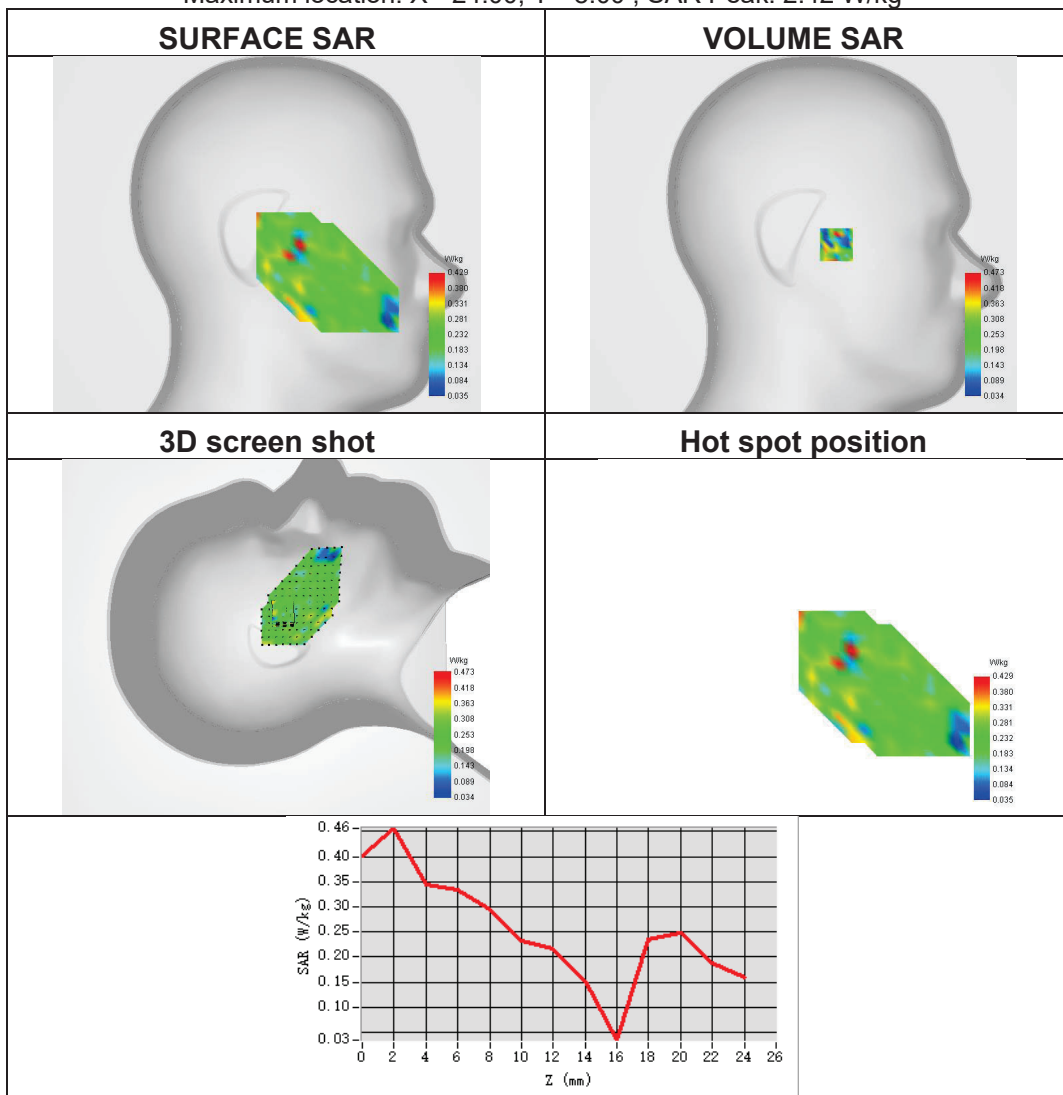




Plot 84:

Test Date	2024-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5500
SAR 10g (W/Kg)	0.153
SAR 1g (W/Kg)	0.240
ConvF	1.86
Relative permittivity	36.70
Conductivity (S/m)	5.10

Maximum location: X=-17.00, Y=33.00 ; SAR Peak: 1.55 W/kg

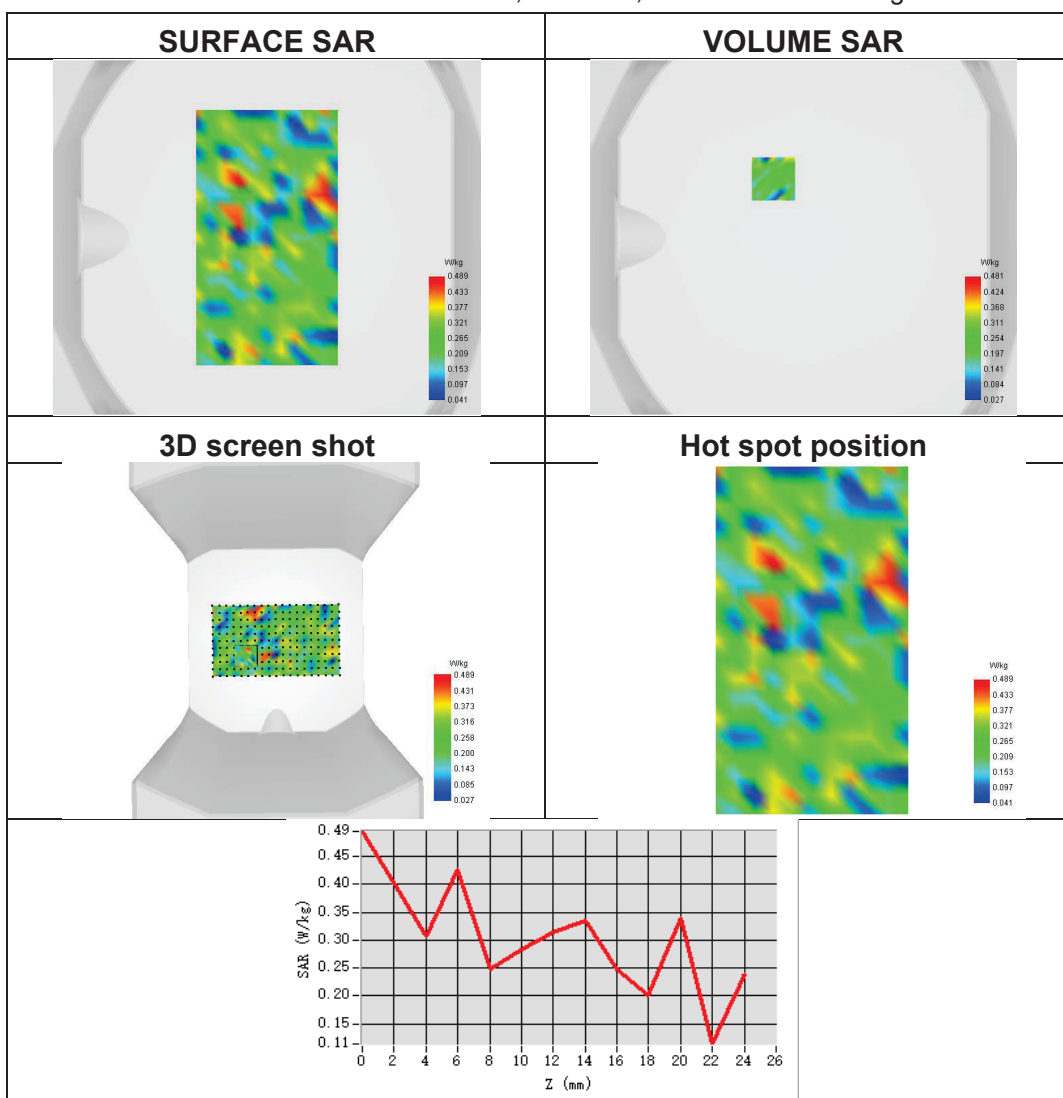




Plot 85:

Test Date	2024-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5500
SAR 10g (W/Kg)	0.215
SAR 1g (W/Kg)	0.397
ConvF	1.86
Relative permittivity	36.70
Conductivity (S/m)	5.10

Maximum location: X=-63.00, Y=-49.00 ; SAR Peak: 2.17 W/kg

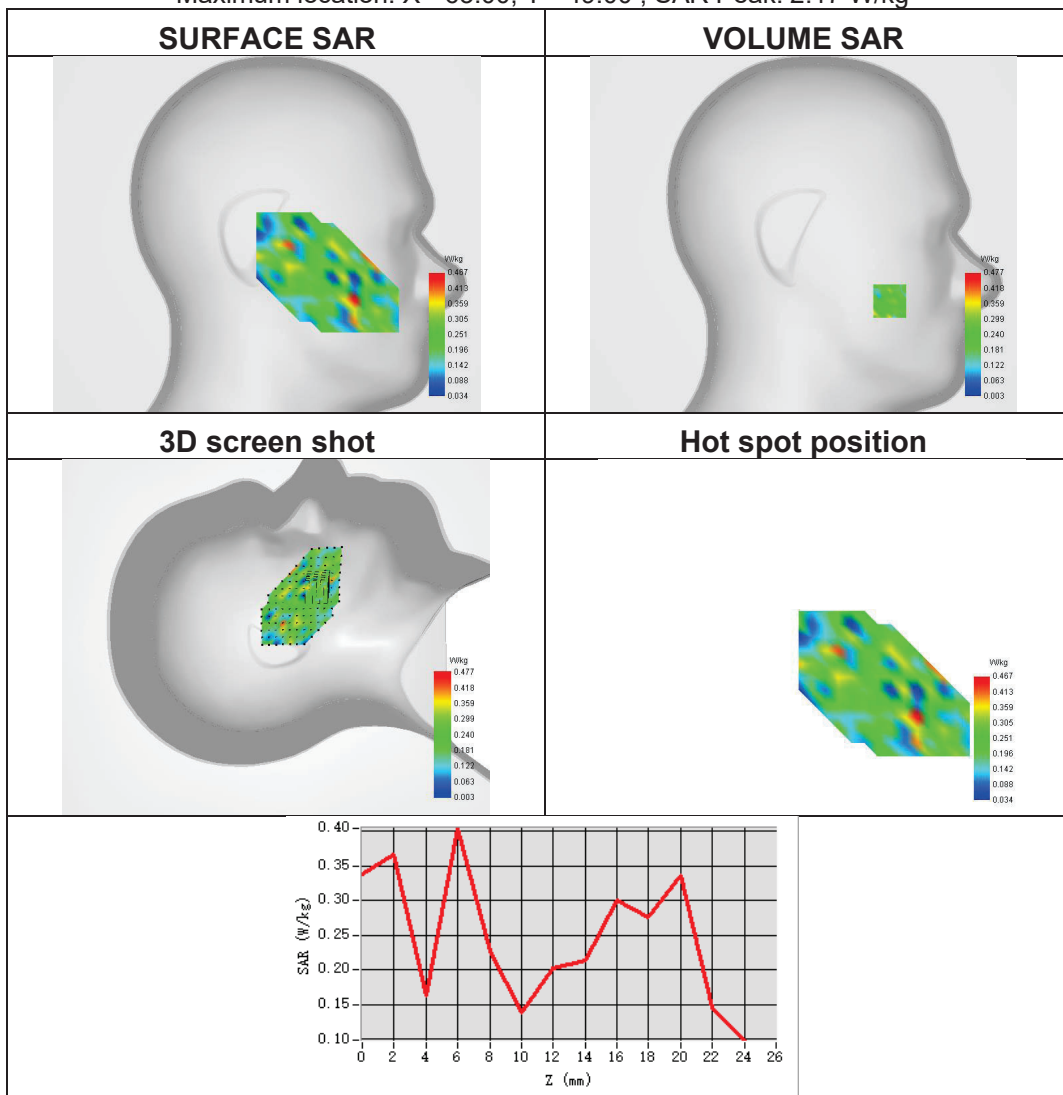




Plot 86:

Test Date	2024-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5500
SAR 10g (W/Kg)	0.164
SAR 1g (W/Kg)	0.239
ConvF	1.86
Relative permittivity	36.70
Conductivity (S/m)	5.10

Maximum location: X=-32.00, Y=-56.00 ; SAR Peak: 1.20 W/kg

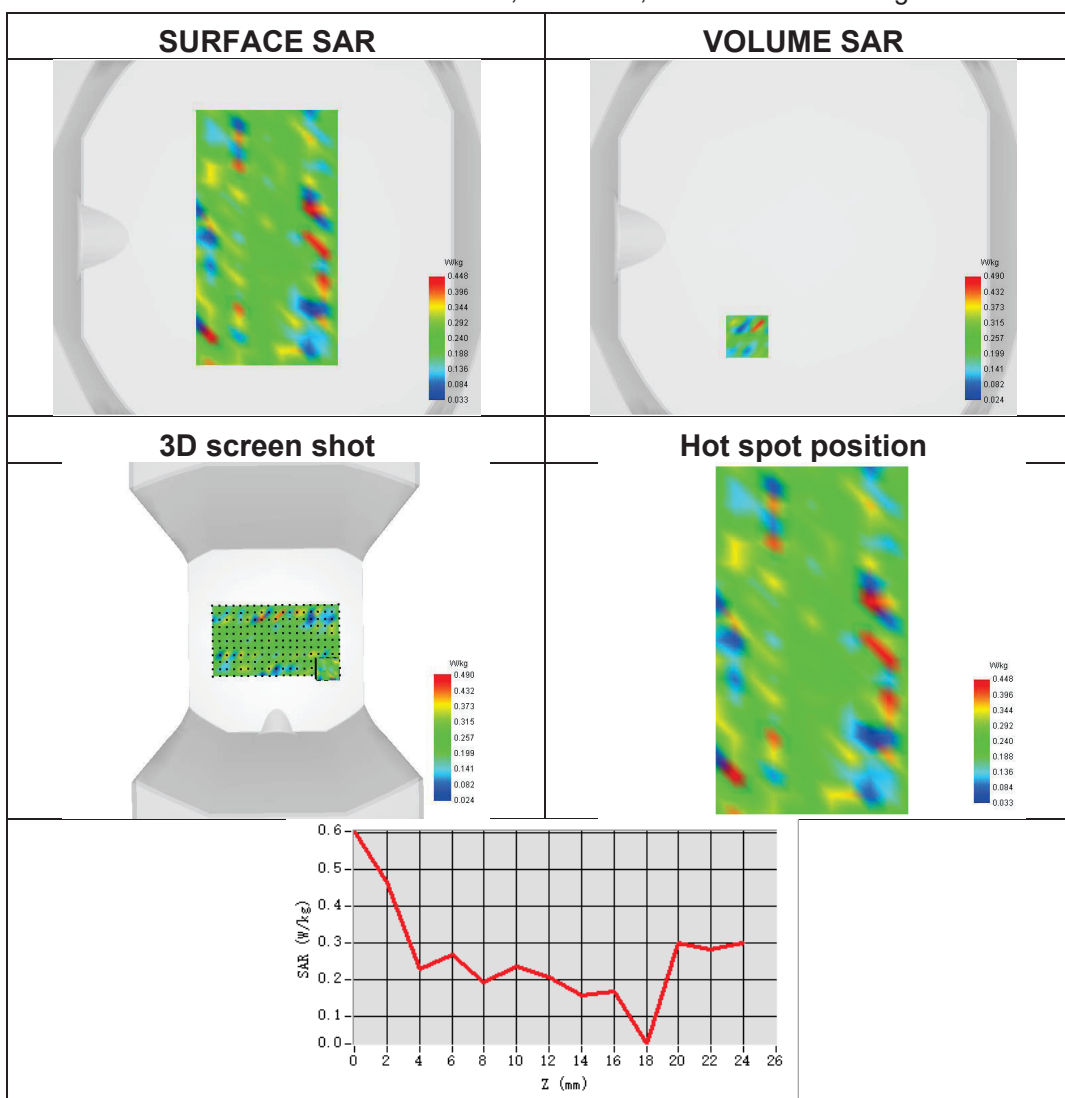




Plot 87:

Test Date	2024-03-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-3
Signal	IEEE 802.11ac
Frequency	5785
SAR 10g (W/Kg)	0.097
SAR 1g (W/Kg)	0.190
ConvF	1.71
Relative permittivity	36.27
Conductivity (S/m)	5.24

Maximum location: X=-8.00, Y=0.00 ; SAR Peak: 2.10 W/kg

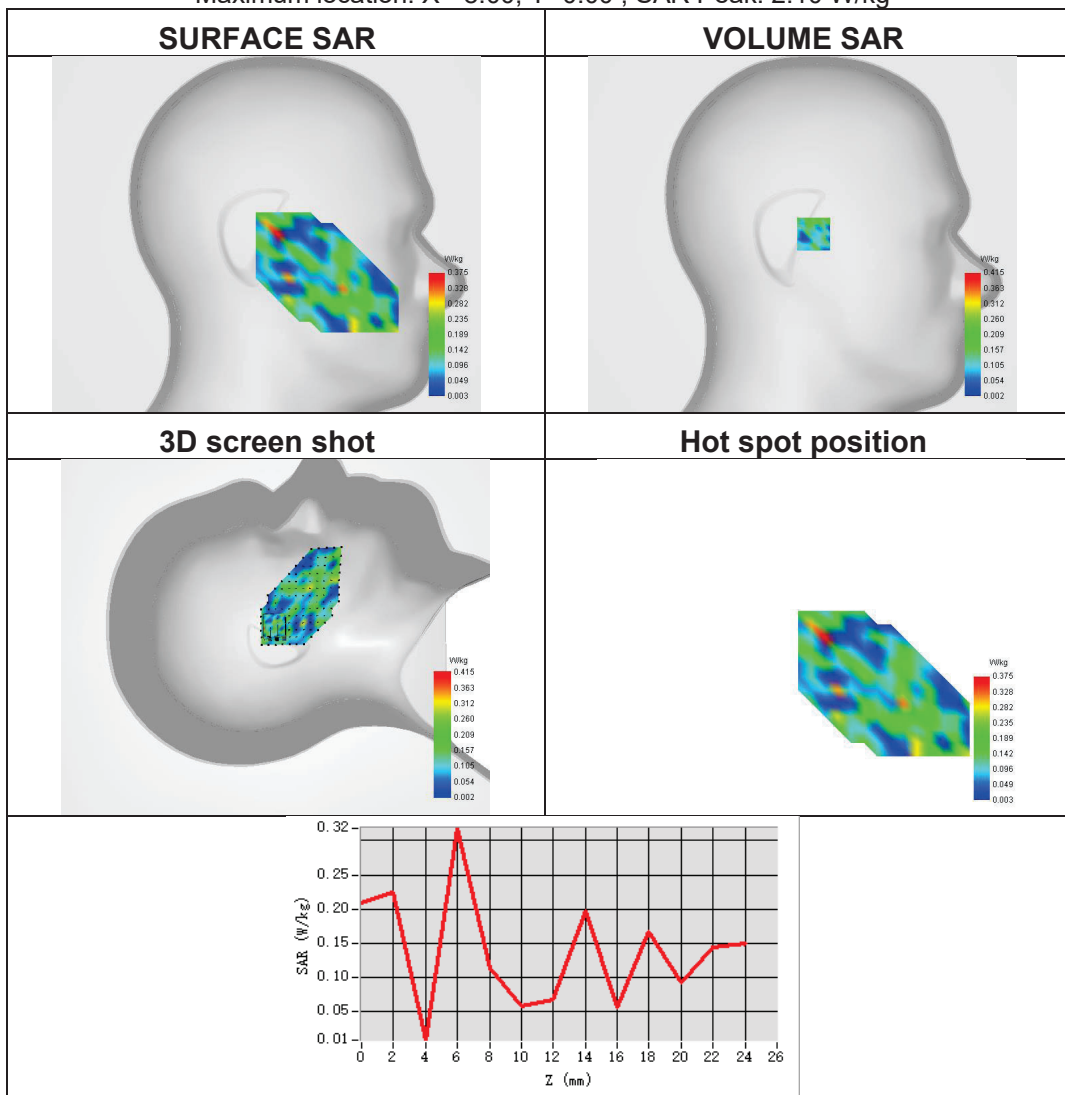




Plot 88:

Test Date	2024-03-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3
Signal	IEEE 802.11ac
Frequency	5785
SAR 10g (W/Kg)	0.119
SAR 1g (W/Kg)	0.224
ConvF	1.71
Relative permittivity	36.27
Conductivity (S/m)	5.24

Maximum location: X=16.00, Y=50.00 ; SAR Peak: 1.13 W/kg

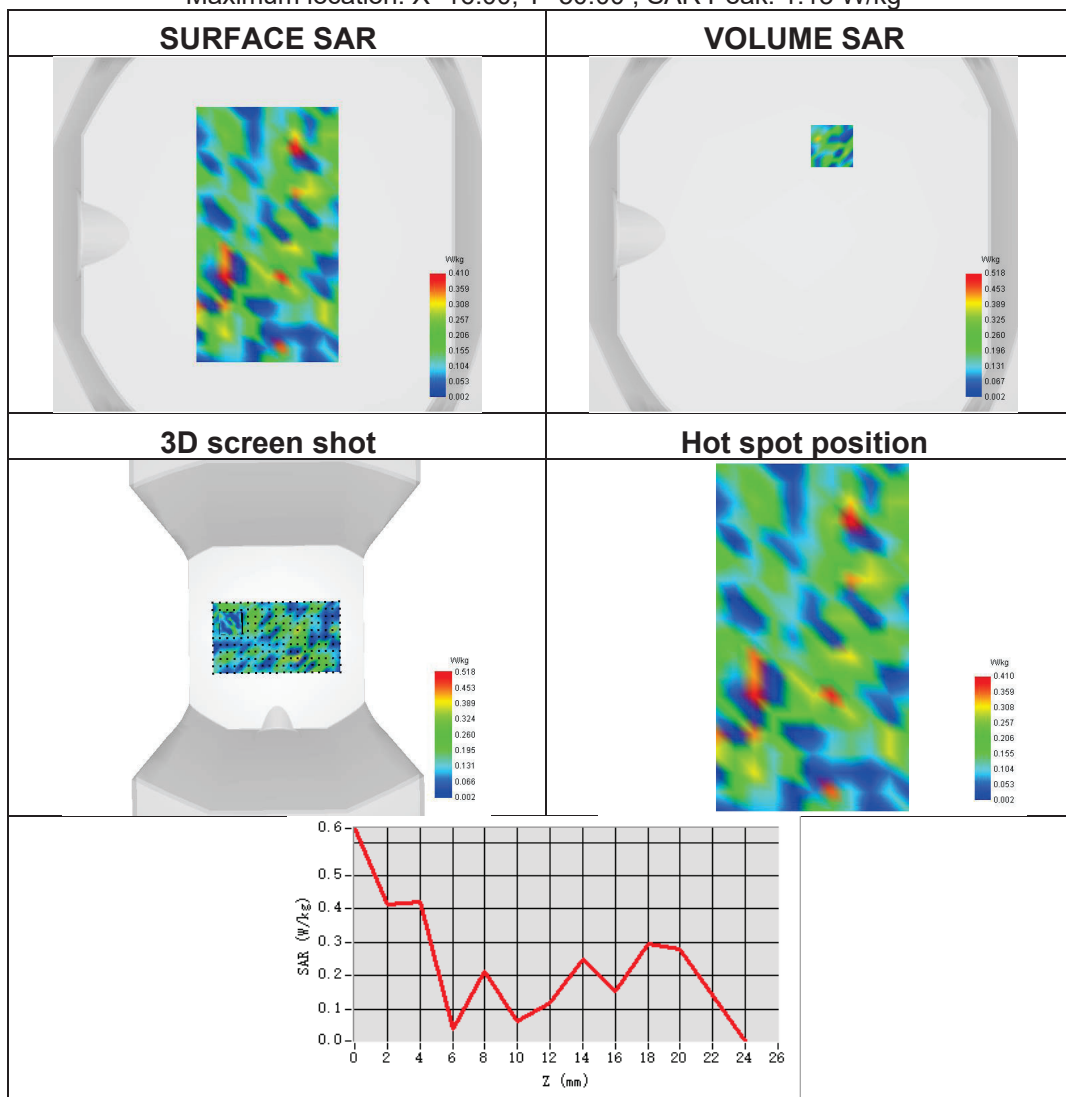




Plot 89:

Test Date	2024-03-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-3
Signal	IEEE 802.11ac
Frequency	5745
SAR 10g (W/Kg)	0.221
SAR 1g (W/Kg)	0.623
ConvF	1.71
Relative permittivity	36.27
Conductivity (S/m)	5.24

Maximum location: X=-16.00, Y=-5.00 ; SAR Peak: 2.90 W/kg

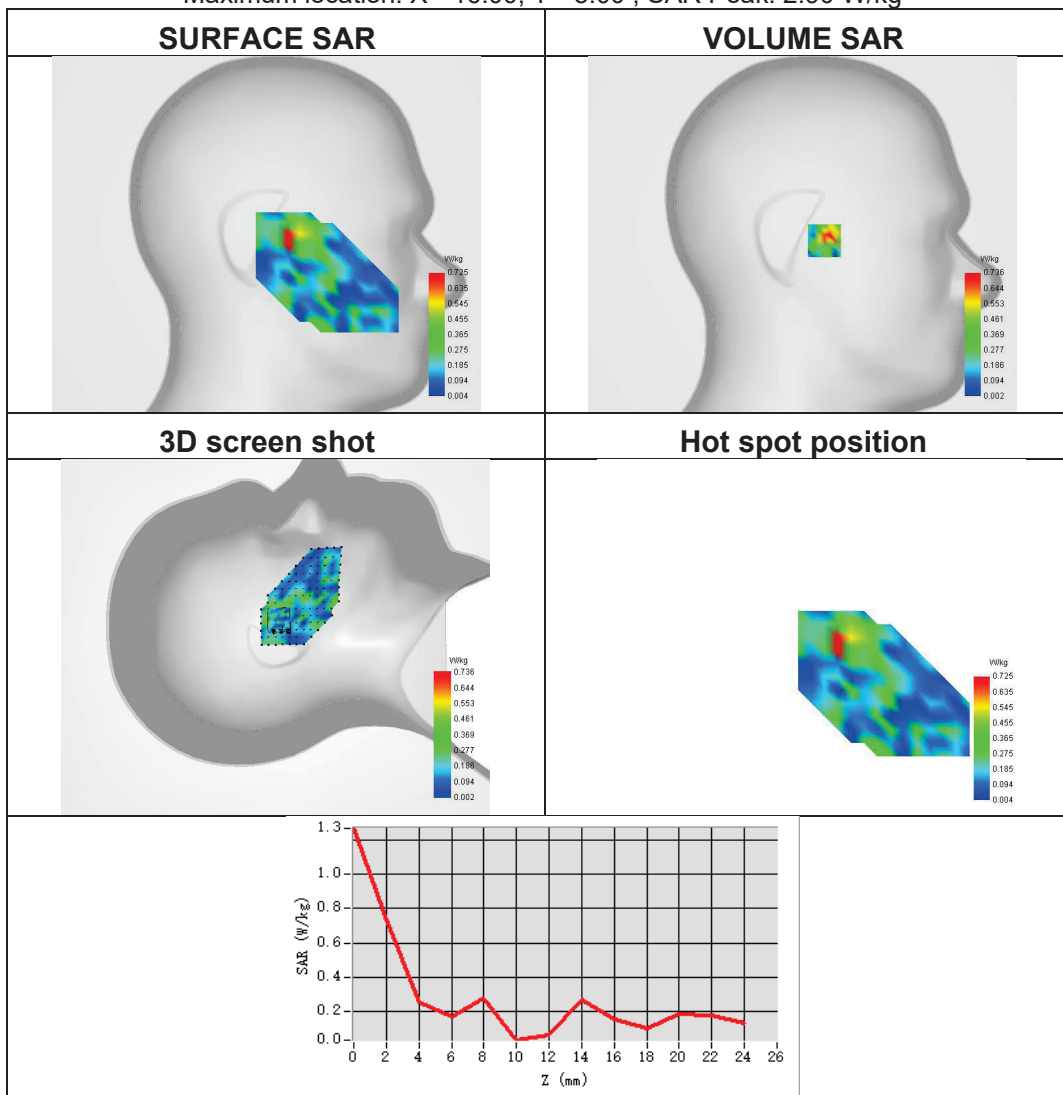




Plot 90:

Test Date	2024-03-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3
Signal	IEEE 802.11ac
Frequency	5745
SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.230
ConvF	1.71
Relative permittivity	36.27
Conductivity (S/m)	5.24

Maximum location: X=15.00, Y=-8.00 ; SAR Peak: 1.73 W/kg

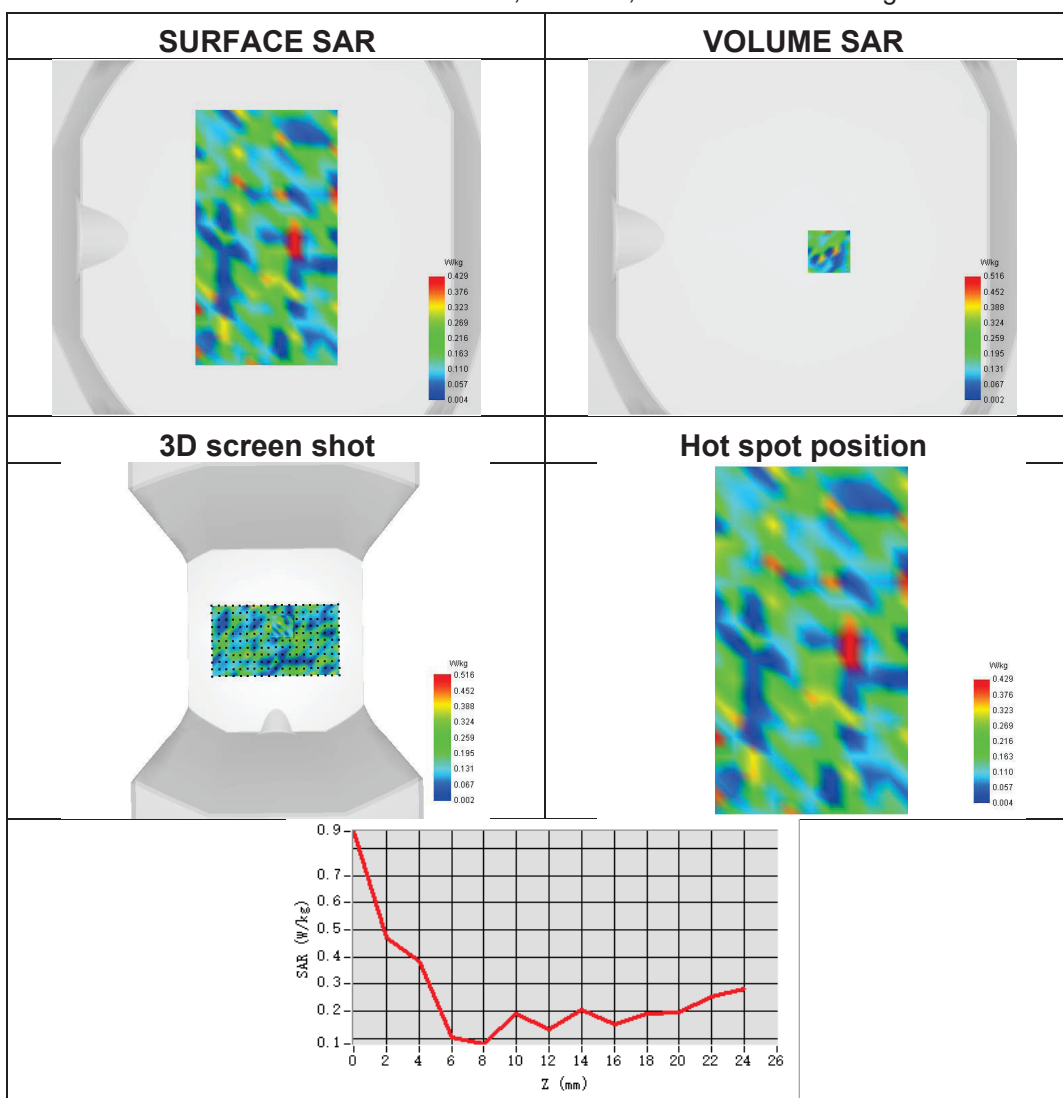




Plot 91:

Test Date	2024-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-3
Signal	IEEE 802.11n
Frequency	5785
SAR 10g (W/Kg)	0.178
SAR 1g (W/Kg)	0.341
ConvF	1.71
Relative permittivity	36.46
Conductivity (S/m)	5.32

Maximum location: X=-48.00, Y=-32.00 ; SAR Peak: 2.46 W/kg

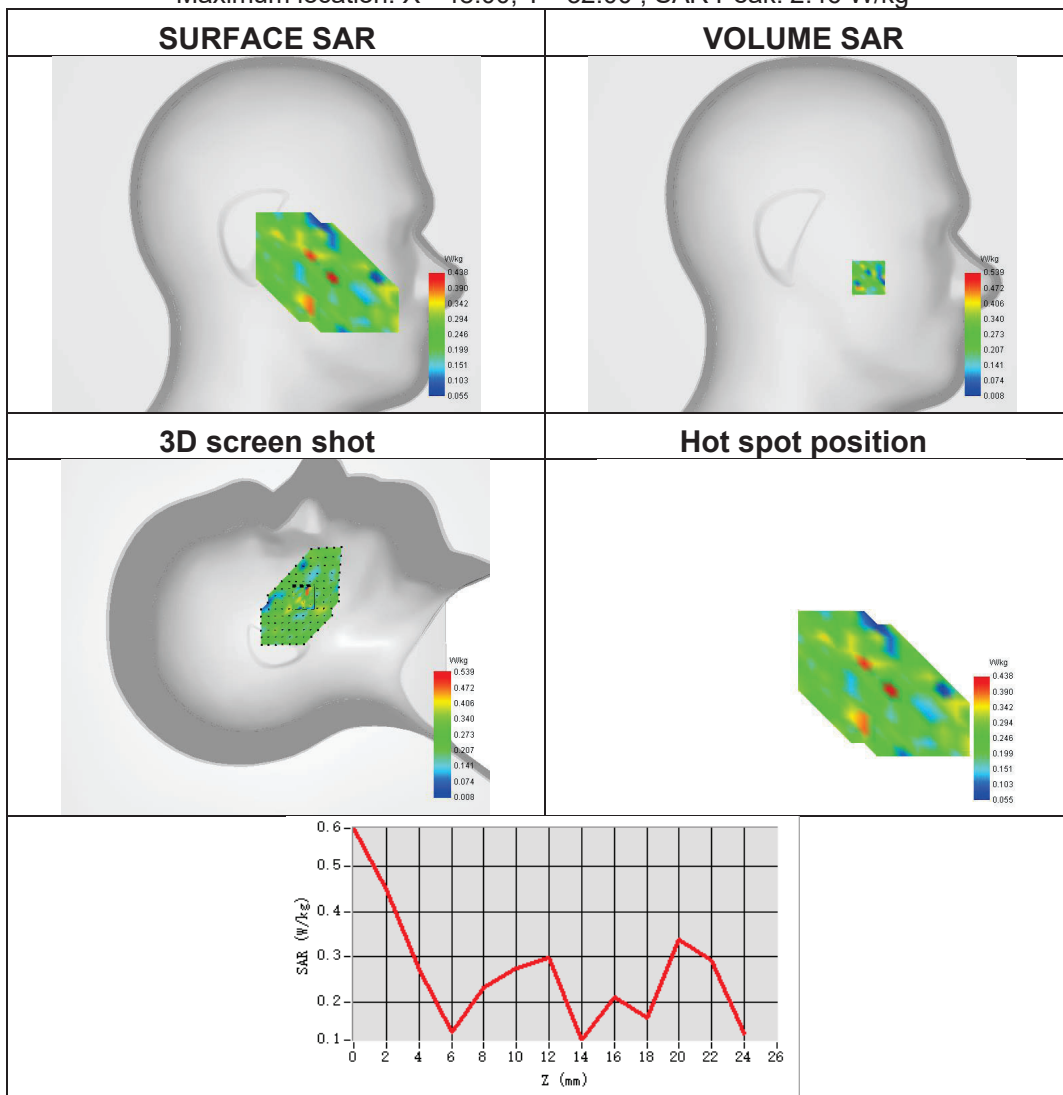




Plot 92:

Test Date	2024-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-3
Signal	IEEE 802.11n
Frequency	5785
SAR 10g (W/Kg)	0.119
SAR 1g (W/Kg)	0.264
ConvF	1.71
Relative permittivity	36.46
Conductivity (S/m)	5.32

Maximum location: X=15.00, Y=7.00 ; SAR Peak: 1.64 W/kg

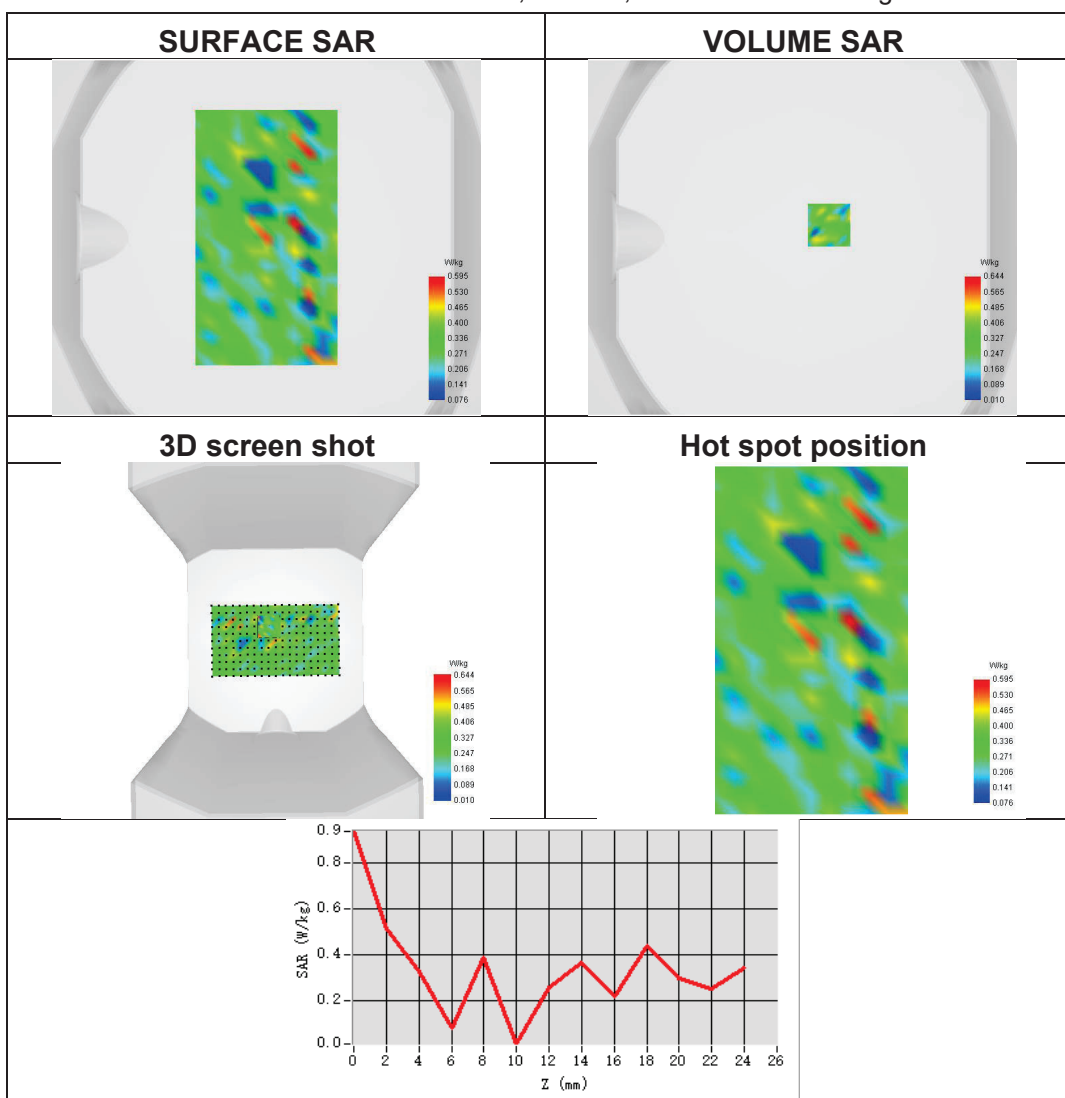




Plot 93:

Test Date	2024-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-3
Signal	IEEE 802.11n
Frequency	5785
SAR 10g (W/Kg)	0.201
SAR 1g (W/Kg)	0.486
ConvF	1.71
Relative permittivity	36.46
Conductivity (S/m)	5.32

Maximum location: X=-48.00, Y=-32.00 ; SAR Peak: 2.52 W/kg

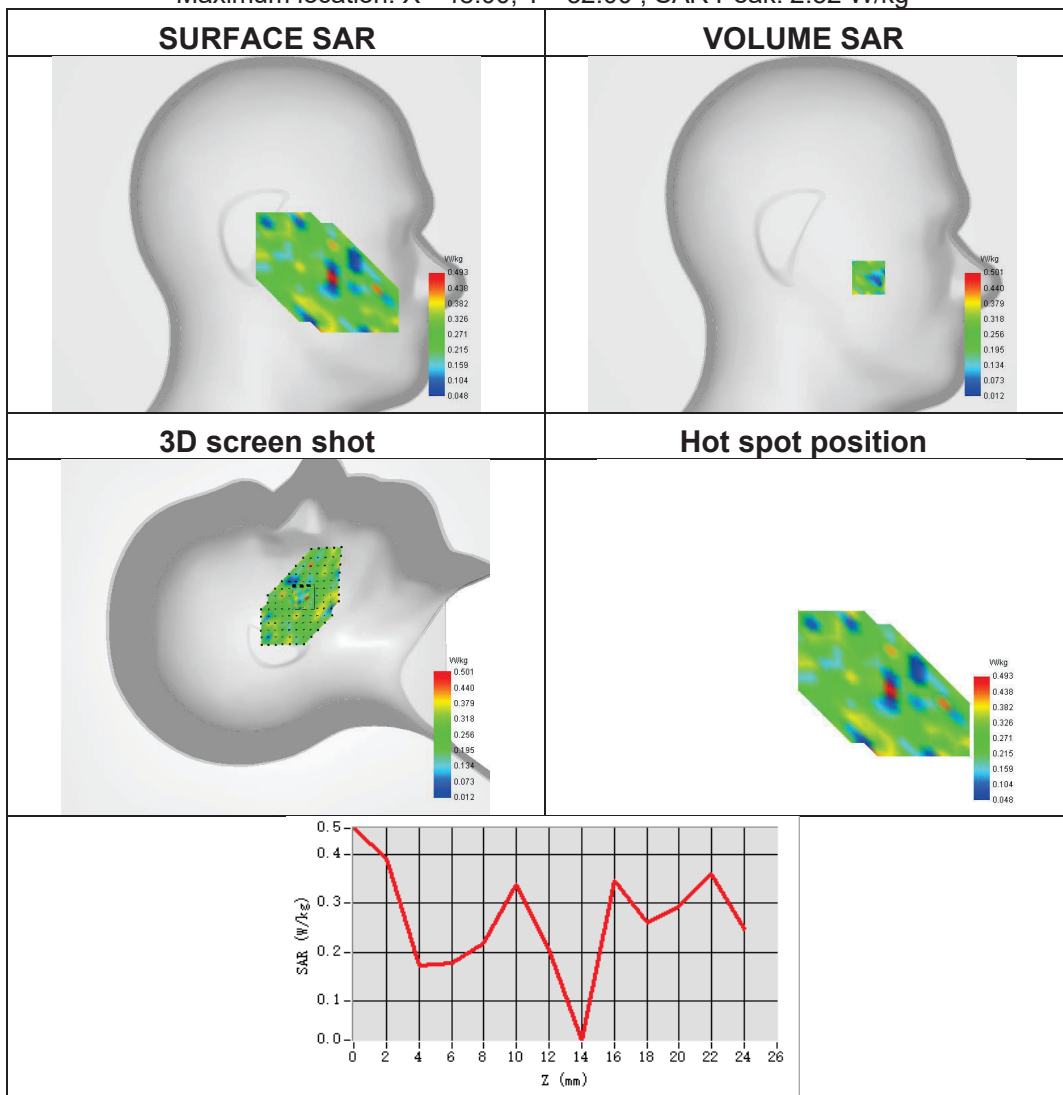




Plot 94:

Test Date	2024-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3
Signal	IEEE 802.11n
Frequency	5785
SAR 10g (W/Kg)	0.159
SAR 1g (W/Kg)	0.241
ConvF	1.71
Relative permittivity	36.46
Conductivity (S/m)	5.32

Maximum location: X=0.00, Y=41.00 ; SAR Peak: 1.65 W/kg

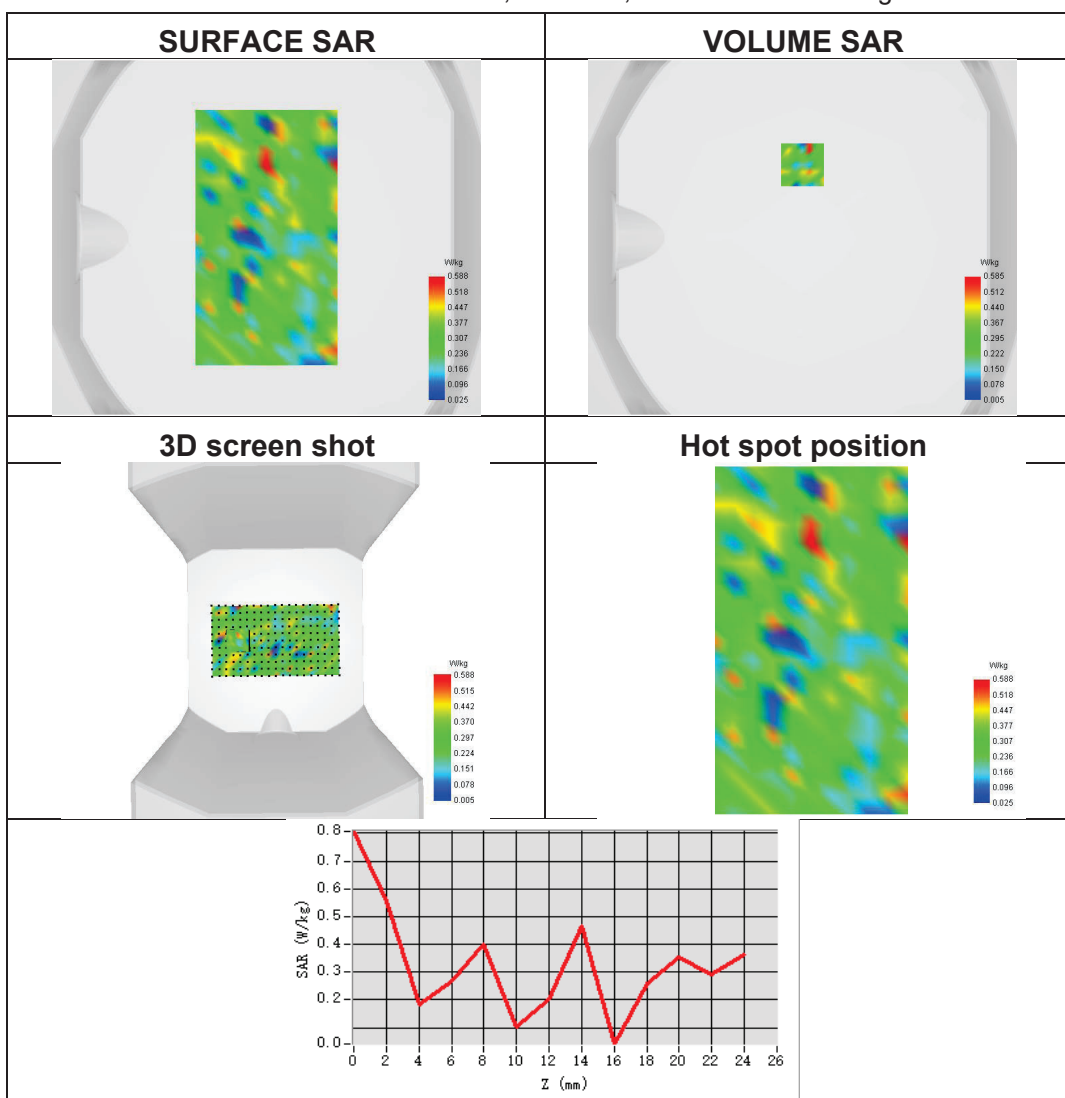



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※※