



RF TEST REPORT

Product Name: 5G Smart phone

Model Name: TANK 3s, SHARK

FCC ID: 2BAVY-TANK3PRO

Issued For : Shenzhen OBLUE Communication Technology Co., Ltd.

Room 702, Hepingdayou industrial and trade industrial park,
No. 41, Yonghe Road, Heping Community, Fuhai Street, Baoan
District, Shenzhen City, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT24E036RF17

Sample Received Date: Feb. 26, 2024

Date of Test: Feb. 26, 2024 – Jun. 17, 2024

Date of Issue: Jun. 17, 2024

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.

TEST REPORT CERTIFICATION

Applicant: Shenzhen OBLUE Communication Technology Co., Ltd.
Room 702, Hepingdayou industrial and trade industrial park, No. 41,
Address: Yonghe Road, Heping Community, Fuhai Street, Baoan District,
Shenzhen City, China

Manufacturer: Shenzhen OBLUE Communication Technology Co., Ltd.
Room 702, Hepingdayou industrial and trade industrial park, No. 41,
Address: Yonghe Road, Heping Community, Fuhai Street, Baoan District,
Shenzhen City, China

Product Name: 5G Smart phone

Trademark: 8849, Unihertz, iHunt

Model Name: TANK 3s, SHARK

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 22H and 24E, 27 KDB 971168 D01 v03r01, ANSI C63.26(2015)	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director



Table of Contents	Page
1 SUMMARY OF TEST RESULTS	5
2 INTRODUCTION	6
2.1 TEST FACTORY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. PRODUCT INFORMATION	7
4 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
5 MEASUREMENT INSTRUMENTS	9
6 TEST ITEMS	10
6.1 CONDUCTED OUTPUT POWER	10
6.2 TRANSMITTER RADIATED POWER (EIRP/ERP)	11
6.3 FREQUENCY STABILITY	12
6.4 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	13
APPENDIX I. TESTRESULT	15
2G	15
CONDUCTED OUTPUT POWER	15
FREQUENCY STABILITY	16
RADIATED SPURIOUS EMISSION	17
3G	19
CONDUCTED OUTPUT POWER	19
FREQUENCY STABILITY	22
RADIATED SPURIOUS EMISSION	23
CDMA	32
CONDUCTED OUTPUT POWER	32
FREQUENCY STABILITY	33
RADIATED SPURIOUS EMISSION	35
APPENDIX II- PHOTOS OF TEST SETUP	39
APPENDIX III - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	39

Revision History

Rev.	Issue Date	Report Number	Revisions
00	Apr. 08, 2024	LGT24B027RF19	Initial Issue
01	Jun. 17 2024	LGT24E036RF17	Please see below change information and Retest information in P5

Change information

1. Replace the battery 10500mAh (7.74V) Change to 7750mAh (7.7V) and 7500 mAh (7.74V) -----2 battery manufacturers)
2. Replace charger (120W Change to 66W)
3. The memory configuration is increased by 12GB+256GB
4. The antenna wiring has changed and the gain has been updated
5. Add warm camping lights
6. The main camera has been reduced in pixels and a wide-angle camera has been removed
7. Because of the replacement of a smaller battery capacity, the machine became thinner

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of KDB 971168 D01 v03r01 and ANSI C63.26-2015

FCC Rules	Test Description	Test Limit	Test Result	Reference
2.1046	Conducted Output Power	Reporting Only	PASS	
22.913d 24.232d	Peak-to-Average Ratio	< 13 dB	Not Test	
2.1046 22.913 24.232 27.50	Effective Radiated Power/Equivalent Isotropic Radiated Power	< 7 Watts max. ERP(Part 22) < 2 Watts max. EIRP(Part 24) <1 Watts max. EIRP(Part 27)	PASS	
2.1049 22.917 24.238 27.53	Occupied Bandwidth	Reporting Only	Not Test	
2.1055 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24) Emission must remain in band (Part 27)	PASS	
2.1051 22.917 24.238 27.53	Spurious Emission at Antenna Terminals	< 43+10log10(P[Watts])	Not Test	
2.1053 22.917 24.238 27.53	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	
2.1051 22.917 24.238 27.53	Band Edge	< 43+10log10(P[Watts])	Not Test	

Note: Not Test means after evaluation, test items are no need to test, the test results please refer to Original Report, the report number is LGT24B027RF19.

2 INTRODUCTION

2.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.26. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
6	All emissions, radiated >6G	$\pm 5.48\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$

Note: The measurement uncertainty is not included in the test result.

3. PRODUCT INFORMATION

Product Name:	5G Smart phone
Trademark:	8849, Unihertz, iHunt
Model Name:	TANK 3s
Series Model:	SHARK
Model Difference:	Models correspond to different trademarks
Tx Frequency:	GSM: 850: 824 MHz ~ 849MHz 1900: 1850 MHz ~ 1910MHz WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz Band IV: 1710 MHz ~ 1755 MHz CDMA&EVDO: BC0: 824 MHz~ 848 MHz BC1: 1850 MHz~ 1910 MHz
Rx Frequency:	GSM: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990MHz WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz Band IV: 2110 MHz ~ 2155 MHz CDMA&EVDO: BC0: 869 MHz~ 894 MHz BC1: 1930 MHz~ 1990 MHz
Modulation Characteristics:	GMSK for GSM WCDMA: QPSK; HSDPA: QPSK/16QAM; HSUPA: BPSK CDMA&EVDO: QPSK/8PSK
SIM Card:	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested.
Antenna:	FPC
Antenna gain:	2G 850: -2.0dBi, 2G 1900: -2.8dBi 3G WCDMA BAND 2: -2.8dBi 3G WCDMA BAND 4: -3dBi 3G WCDMA BAND 5: -2.0dBi BC0: -2.0dBi, BC1: -2.8dBi
Adapter:	Model: HJ-PD66W-US Input: 100-240V, 50/60Hz, 1.5A Output: 5V, 3A 15W, OR 9V, 3A 27W, OR 12V, 3A 36W, OR 15V, 3A 45W, OR 20V, 3.25A 65W, OR 11V, 6A 66W MAX
Battery:	Model: PBA97155B Capacity: 7750mAh Rated Voltage: 7.7V Model: PBA97155C Capacity: 7500mAh Rated Voltage: 7.74V
GPRS Class:	Multi-Class12
Extreme Vol. Limits:	6V to 8.8V (Nominal 7.7V)
Extreme Temp. Tolerance:	-0°C to +40°C
Hardware version:	G91_V3.3

Software version:	TANK3 PRO_20240216
-------------------	--------------------

*** Note: The High Voltage 8.9V and Low Voltage 6V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage, the antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.*

4 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 and ANSI C63.26 2015 Power Meas. License Digital Systems with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850/WCDMA Band V/CDMA BC0/EVDO BC0.
2. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II/ WCDMA Band IV/CDMA BC1/EVDO BC1.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst-case configuration below:

	TEST MODES	
	RADIATED TCS	CONDUCTED TCS
BAND		
GSM 850	GSM LINK	GSM LINK
GSM 1900	GSM LINK	GSM LINK
WCDMA BAND V	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
WCDMA BAND IV	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
WCDMA BAND II	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
CDMA BC0/BC1	QPSK	QPSK
EVDO BC0/BC1	8PSK	8PSK

5 MEASUREMENT INSTRUMENTS

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2024.03.09	2025.03.08
Active loop Antenna	ETS	6502	00049544	2023.10.13	2025.10.12
Spectrum Analyzer	Keysight	N9010B	MY60242508	2023.08.14	2024.08.13
Bilog Antenna(30M-1G)	SCHWARZBECK	VULB 9168	2705	2022.12.12	2025.12.11
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Horn Antenna(18-40G)	A-INFO	LB-180400-KF	J211060273	2022.06.08	2025.06.07
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2024.03.09	2025.03.08
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2024.03.09	2025.03.08
Pre-amplifier(18-40G)	com-mw	LNPA_18-40-01	18050003	2024.03.09	2025.03.08
Wireless Communications Test Set	R&S	CMW 500	137737	2024.03.09	2025.03.08
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2024.03.11	2025.03.10
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2023.08.14	2024.08.13
Signal Analyzer	Keysight	N9020A	MY50530994	2024.03.09	2025.03.08
RF Automatic Test system	MW	MW100-RFCB	MW220322LG-033	2024.03.09	2025.03.08
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2024.03.09	2025.03.08
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.03.09	2025.03.08
Attenuator	eastsheep	90db	N.A	2024.03.09	2025.03.08
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2024.03.11	2025.03.10
Digital multimeter	MASTECH	MS8261	MBGBC83053	2024.03.09	2025.03.08
Testing Software	MTS8310_V2.0.0.0_MW				

Equipment with a calibration date of “NCR” shown in this list was not used to make direct calibrated measurements.

6 TEST ITEMS

6.1 CONDUCTED OUTPUT POWER


TEST OVERVIEW

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

TEST PROCEDURES

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

TEST SETUP

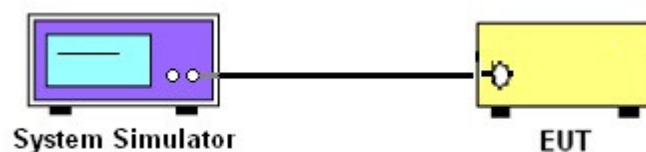

TEST RESULT

Note: Test data See APPENDIX I.

6.2 TRANSMITTER RADIATED POWER (EIRP/ERP)

TEST OVERVIEW

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26 2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

TEST PROCEDURE

1. The testing follows FCC KDB 971168 Section 5.8 and ANSI C63.26-2015 Section 5.2.
2. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
3. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
5. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a nonradiating cable. The absolute levels of the spurious emissions were measured by the substitution.
6. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to ANSI C63.26-2015. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.
 $EIRP = S.G \text{ Level} + \text{Gain} - \text{Cable loss}$; $ERP = S.G \text{ Level} + \text{Gain} - \text{Cable loss} - 2.15$.

TEST RESULT

Note: Test data See APPENDIX I.

6.3 FREQUENCY STABILITY

TEST OVERVIEW

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26 2015. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE


Temperature Variation

1. The testing follows FCC KDB 971168 D01 section 9.0
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at $25 \pm 5^\circ \text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

TEST SETUP

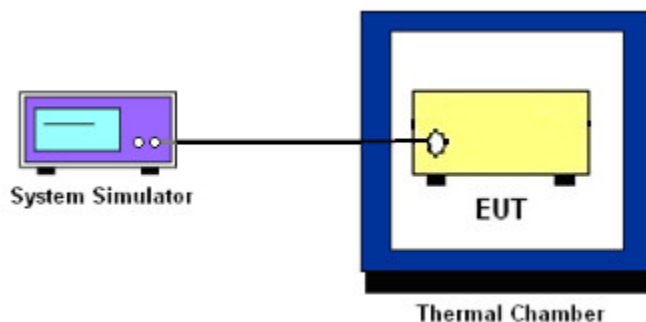

TEST RESULT

Note: Test data See APPENDIX I.

6.4 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

TEST OVERVIEW

Radiated spurious emissions measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.


It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

TEST PROCEDURE


1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI C63.26-2015-Section 5.5.
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.
 $P_{Mea} = S.G \text{ Level} + \text{Ant-Cable loss}$; $\text{Margin} = P_{Mea} - \text{Limit}$.

TEST SETUP

For radiated test from 30MHz to 1GHz

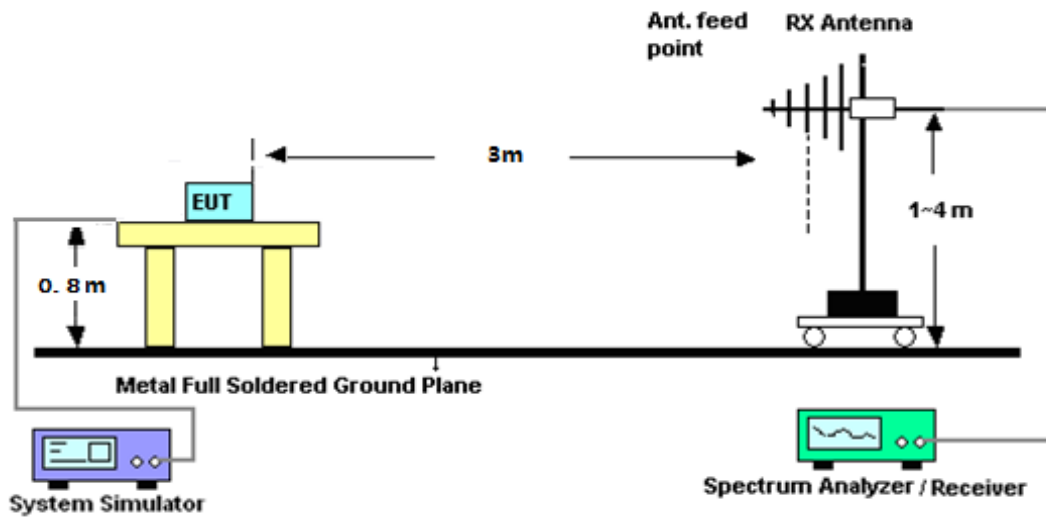

For radiated test from above 1GHz

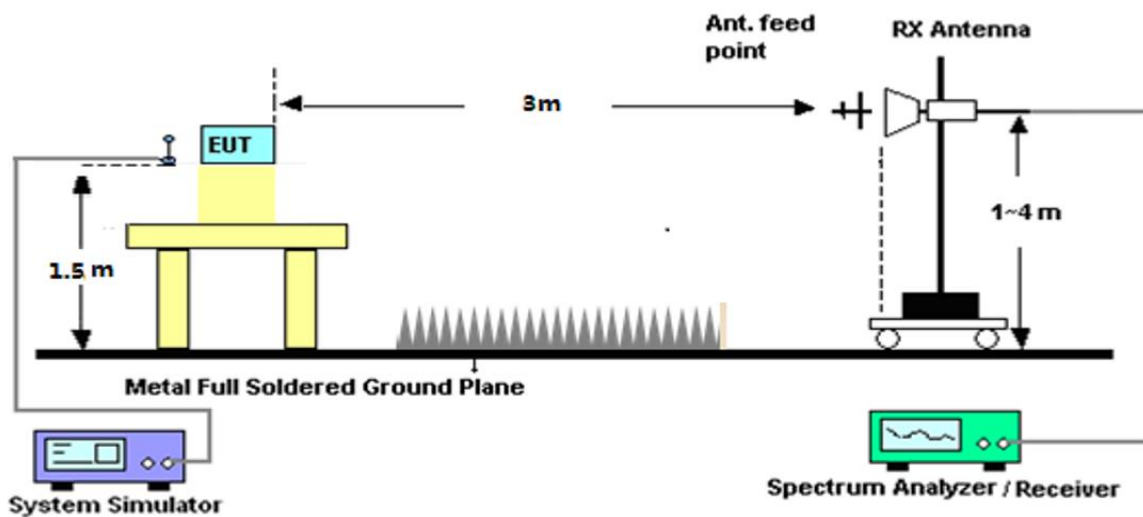

TEST RESULT

Note: Test data See APPENDIX I.

APPENDIX I. TESTRESULT

2G

Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Gain (dB)	ERP (dBm)	ERP Limit (dBm)	Verdict
GSM850	128	824.2	33.64	-2	29.49	38.45	PASS
GSM850	190	836.6	33.94	-2	29.79	38.45	PASS
GSM850	251	848.8	33.93	-2	29.78	38.45	PASS

Band	Channel	Frequency (MHz)	Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
GSM1900	512	1850.2	30.16	-2.8	27.36	33.01	PASS
GSM1900	661	1880	30.26	-2.8	27.46	33.01	PASS
GSM1900	810	1909.8	30.30	-2.8	27.50	33.01	PASS

Frequency stability

GSM 850 /836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	0.63	0.001	2.5ppm	PASS
40		0.68	0.001		
30		1.07	0.001		
20		-3.33	-0.004		
10		0.66	0.001		
0		0.63	0.001		
-10		-1.07	-0.001		
-20		-1.03	-0.001		
-30		-0.85	-0.001		
20	Maximum Voltage	0.84	0.001		
20	BEP	-0.65	-0.001		

GSM 1900 / 1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	1.44	0.001	Within Authorized Band	PASS
40		-1.17	-0.001		
30		1.33	0.001		
20		-4.36	-0.002		
10		1.12	0.001		
0		1.06	0.001		
-10		-1.21	-0.001		
-20		-1.36	-0.001		
-30		-1.52	-0.001		
20	Maximum Voltage	-1.22	-0.001		
20	BEP	1.06	0.001		

RADIATED SPURIOUS EMISSION

Note: (1) Spurious emissions which are attenuated by more than 20dB below the permissible value for frequency below 1000MHz.

(2) Test is divided into three directions, X/Y/Z. X pattern for the worst.

GSM 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.24	-35.41	7.40	4.75	-32.76	-13.00	-19.76	H
2472.45	-29.74	8.20	8.39	-29.93	-13.00	-16.93	H
3296.60	-27.88	7.20	11.79	-32.47	-13.00	-19.47	H
1648.26	-30.47	7.40	4.75	-27.82	-13.00	-14.82	V
2472.51	-29.75	8.20	8.39	-29.94	-13.00	-16.94	V
3296.80	-21.64	7.20	11.79	-26.23	-13.00	-13.23	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.12	-36.53	7.40	4.76	-33.89	-13.00	-20.89	H
2509.49	-29.54	8.20	8.40	-29.74	-13.00	-16.74	H
3346.10	-27.39	7.20	11.80	-31.99	-13.00	-18.99	H
1673.10	-30.05	7.40	4.75	-27.40	-13.00	-14.40	V
2509.86	-29.85	8.20	8.39	-30.04	-13.00	-17.04	V
3346.27	-25.41	7.20	11.82	-30.03	-13.00	-17.03	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1697.41	-35.22	7.40	4.77	-32.59	-13.00	-19.59	H
2546.43	-31.64	8.20	8.50	-31.94	-13.00	-18.94	H
3394.93	-26.81	7.20	11.90	-31.51	-13.00	-18.51	H
1697.27	-29.18	7.40	4.77	-26.55	-13.00	-13.55	V
2546.08	-29.53	8.20	8.50	-29.83	-13.00	-16.83	V
3395.24	-21.09	7.20	11.90	-25.79	-13.00	-12.79	V

PCS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.43	-25.47	7.00	12.93	-31.40	-13.00	-18.40	H
5550.65	-24.58	8.40	17.11	-33.29	-13.00	-20.29	H
7400.81	-25.90	8.30	22.20	-39.80	-13.00	-26.80	H
3700.42	-23.36	7.00	12.93	-29.29	-13.00	-16.29	V
5550.65	-23.42	8.40	17.11	-32.13	-13.00	-19.13	V
7400.61	-21.68	8.30	22.20	-35.58	-13.00	-22.58	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.06	-25.95	7.00	12.93	-31.88	-13.00	-18.88	H
5639.90	-26.12	8.40	17.11	-34.83	-13.00	-21.83	H
7520.19	-27.84	8.30	22.20	-41.74	-13.00	-28.74	H
3759.98	-25.01	7.00	12.93	-30.94	-13.00	-17.94	V
5640.28	-25.11	8.40	17.11	-33.82	-13.00	-20.82	V
7519.86	-21.68	8.30	22.20	-35.58	-13.00	-22.58	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.49	-25.47	7.00	12.93	-31.40	-13.00	-18.40	H
5729.44	-26.70	8.40	17.11	-35.41	-13.00	-22.41	H
7639.11	-28.63	8.30	22.20	-42.53	-13.00	-29.53	H
3819.45	-22.77	7.00	12.93	-28.70	-13.00	-15.70	V
5729.29	-25.85	8.40	17.11	-34.56	-13.00	-21.56	V
7639.09	-19.42	8.30	22.20	-33.32	-13.00	-20.32	V

3G

Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
WCDMA Band2	9262	1852.4	23.68	-2.8	20.88	33.01	PASS
WCDMA Band2	9400	1880	23.73	-2.8	20.93	33.01	PASS
WCDMA Band2	9538	1907.6	23.72	-2.8	20.92	33.01	PASS
HSDPA Band2 Subtest1	9262	1852.4	22.69	-2.8	19.89	33.01	PASS
HSDPA Band2 Subtest2	9262	1852.4	22.48	-2.8	19.68	33.01	PASS
HSDPA Band2 Subtest3	9262	1852.4	21.00	-2.8	18.20	33.01	PASS
HSDPA Band2 Subtest4	9262	1852.4	21.30	-2.8	18.50	33.01	PASS
HSDPA Band2 Subtest1	9400	1880	22.74	-2.8	19.94	33.01	PASS
HSDPA Band2 Subtest2	9400	1880	22.46	-2.8	19.66	33.01	PASS
HSDPA Band2 Subtest3	9400	1880	21.12	-2.8	18.32	33.01	PASS
HSDPA Band2 Subtest4	9400	1880	21.27	-2.8	18.47	33.01	PASS
HSDPA Band2 Subtest1	9538	1907.6	22.73	-2.8	19.93	33.01	PASS
HSDPA Band2 Subtest2	9538	1907.6	22.34	-2.8	19.54	33.01	PASS
HSDPA Band2 Subtest3	9538	1907.6	21.21	-2.8	18.41	33.01	PASS
HSDPA Band2 Subtest4	9538	1907.6	20.89	-2.8	18.09	33.01	PASS
HSUPA Band2 Subtest1	9262	1852.4	22.19	-2.8	19.39	33.01	PASS
HSUPA Band2 Subtest2	9262	1852.4	22.60	-2.8	19.80	33.01	PASS
HSUPA Band2 Subtest3	9262	1852.4	21.15	-2.8	18.35	33.01	PASS
HSUPA Band2 Subtest4	9262	1852.4	22.67	-2.8	19.87	33.01	PASS
HSUPA Band2 Subtest5	9262	1852.4	21.00	-2.8	18.20	33.01	PASS
HSUPA Band2 Subtest1	9400	1880	22.57	-2.8	19.77	33.01	PASS
HSUPA Band2 Subtest2	9400	1880	22.57	-2.8	19.77	33.01	PASS
HSUPA Band2 Subtest3	9400	1880	21.42	-2.8	18.62	33.01	PASS
HSUPA Band2 Subtest4	9400	1880	22.72	-2.8	19.92	33.01	PASS
HSUPA Band2 Subtest5	9400	1880	22.15	-2.8	19.35	33.01	PASS
HSUPA Band2 Subtest1	9538	1907.6	22.59	-2.8	19.79	33.01	PASS
HSUPA Band2 Subtest2	9538	1907.6	22.65	-2.8	19.85	33.01	PASS
HSUPA Band2 Subtest3	9538	1907.6	21.69	-2.8	18.89	33.01	PASS
HSUPA Band2 Subtest4	9538	1907.6	22.73	-2.8	19.93	33.01	PASS
HSUPA Band2 Subtest5	9538	1907.6	22.07	-2.8	19.27	33.01	PASS

Band	Channel	Frequency (MHz)	Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
WCDMA Band4	1312	1712.4	23.60	-3	20.60	30	PASS
WCDMA Band4	1450	1740	23.45	-3	20.45	30	PASS
WCDMA Band4	1513	1752.6	23.63	-3	20.63	30	PASS
HSDPA Band4 Subtest1	1312	1712.4	22.64	-3	19.64	30	PASS
HSDPA Band4 Subtest2	1312	1712.4	22.29	-3	19.29	30	PASS
HSDPA Band4 Subtest3	1312	1712.4	20.60	-3	17.60	30	PASS
HSDPA Band4 Subtest4	1312	1712.4	20.66	-3	17.66	30	PASS
HSDPA Band4 Subtest1	1450	1740	22.48	-3	19.48	30	PASS
HSDPA Band4 Subtest2	1450	1740	21.92	-3	18.92	30	PASS
HSDPA Band4 Subtest3	1450	1740	20.88	-3	17.88	30	PASS
HSDPA Band4 Subtest4	1450	1740	21.06	-3	18.06	30	PASS
HSDPA Band4 Subtest1	1513	1752.6	22.67	-3	19.67	30	PASS
HSDPA Band4 Subtest2	1513	1752.6	22.38	-3	19.38	30	PASS
HSDPA Band4 Subtest3	1513	1752.6	21.13	-3	18.13	30	PASS
HSDPA Band4 Subtest4	1513	1752.6	20.93	-3	17.93	30	PASS
HSUPA Band4 Subtest1	1312	1712.4	21.54	-3	18.54	30	PASS
HSUPA Band4 Subtest2	1312	1712.4	22.48	-3	19.48	30	PASS
HSUPA Band4 Subtest3	1312	1712.4	20.73	-3	17.73	30	PASS
HSUPA Band4 Subtest4	1312	1712.4	22.62	-3	19.62	30	PASS
HSUPA Band4 Subtest5	1312	1712.4	21.32	-3	18.32	30	PASS
HSUPA Band4 Subtest1	1450	1740	22.25	-3	19.25	30	PASS
HSUPA Band4 Subtest2	1450	1740	22.46	-3	19.46	30	PASS
HSUPA Band4 Subtest3	1450	1740	21.27	-3	18.27	30	PASS
HSUPA Band4 Subtest4	1450	1740	22.47	-3	19.47	30	PASS
HSUPA Band4 Subtest5	1450	1740	21.92	-3	18.92	30	PASS
HSUPA Band4 Subtest1	1513	1752.6	22.44	-3	19.44	30	PASS
HSUPA Band4 Subtest2	1513	1752.6	22.62	-3	19.62	30	PASS
HSUPA Band4 Subtest3	1513	1752.6	21.30	-3	18.30	30	PASS
HSUPA Band4 Subtest4	1513	1752.6	22.60	-3	19.60	30	PASS
HSUPA Band4 Subtest5	1513	1752.6	21.99	-3	18.99	30	PASS

Band	Channel	Frequency (MHz)	Power (dBm)	Gain (dB)	ERP (dBm)	ERP Limit (dBm)	Verdict
WCDMA Band5	4132	826.4	23.53	-2	19.38	38.45	PASS
WCDMA Band5	4182	836.4	23.43	-2	19.28	38.45	PASS
WCDMA Band5	4233	846.6	23.69	-2	19.54	38.45	PASS
HSDPA Band5 Subtest1	4132	826.4	22.52	-2	18.37	38.45	PASS
HSDPA Band5 Subtest2	4132	826.4	22.06	-2	17.91	38.45	PASS
HSDPA Band5 Subtest3	4132	826.4	20.89	-2	16.74	38.45	PASS
HSDPA Band5 Subtest4	4132	826.4	20.65	-2	16.50	38.45	PASS
HSDPA Band5 Subtest1	4182	836.4	22.42	-2	18.27	38.45	PASS
HSDPA Band5 Subtest2	4182	836.4	21.99	-2	17.84	38.45	PASS
HSDPA Band5 Subtest3	4182	836.4	20.98	-2	16.83	38.45	PASS
HSDPA Band5 Subtest4	4182	836.4	20.85	-2	16.70	38.45	PASS
HSDPA Band5 Subtest1	4233	846.6	22.67	-2	18.52	38.45	PASS
HSDPA Band5 Subtest2	4233	846.6	22.23	-2	18.08	38.45	PASS
HSDPA Band5 Subtest3	4233	846.6	21.35	-2	17.20	38.45	PASS
HSDPA Band5 Subtest4	4233	846.6	21.55	-2	17.40	38.45	PASS
HSUPA Band5 Subtest1	4132	826.4	21.88	-2	17.73	38.45	PASS
HSUPA Band5 Subtest2	4132	826.4	22.53	-2	18.38	38.45	PASS
HSUPA Band5 Subtest3	4132	826.4	20.56	-2	16.41	38.45	PASS
HSUPA Band5 Subtest4	4132	826.4	22.55	-2	18.40	38.45	PASS
HSUPA Band5 Subtest5	4132	826.4	20.84	-2	16.69	38.45	PASS
HSUPA Band5 Subtest1	4182	836.4	22.26	-2	18.11	38.45	PASS
HSUPA Band5 Subtest2	4182	836.4	22.42	-2	18.27	38.45	PASS
HSUPA Band5 Subtest3	4182	836.4	21.34	-2	17.19	38.45	PASS
HSUPA Band5 Subtest4	4182	836.4	22.44	-2	18.29	38.45	PASS
HSUPA Band5 Subtest5	4182	836.4	21.39	-2	17.24	38.45	PASS
HSUPA Band5 Subtest1	4233	846.6	22.46	-2	18.31	38.45	PASS
HSUPA Band5 Subtest2	4233	846.6	22.46	-2	18.31	38.45	PASS
HSUPA Band5 Subtest3	4233	846.6	21.36	-2	17.21	38.45	PASS
HSUPA Band5 Subtest4	4233	846.6	22.68	-2	18.53	38.45	PASS
HSUPA Band5 Subtest5	4233	846.6	22.03	-2	17.88	38.45	PASS

Frequency stability

UMTS Band 2 /1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	2.78	0.001	Within Authorized Band	PASS
40		-2.38	-0.001		
30		-2.95	-0.002		
20		3.70	0.002		
10		2.45	0.001		
0		2.42	0.001		
-10		2.58	0.001		
-20		-2.40	-0.001		
-30		2.75	0.001		
20	Maximum Voltage	-2.89	-0.002	Within Authorized Band	PASS
20	BEP	-2.83	-0.002		

UMTS Band 4 /1740MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	0.78	0.000	Within Authorized Band	PASS
40		-0.45	0.000		
30		0.72	0.000		
20		-0.45	0.000		
10		0.58	0.000		
0		-0.59	0.000		
-10		-0.34	0.000		
-20		-0.71	0.000		
-30		0.42	0.000		
20	Maximum Voltage	0.33	0.000	Within Authorized Band	PASS
20	BEP	-0.49	0.000		

UMTS Band 5 / 836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	-2.48	-0.003	2.5ppm	PASS
40		-2.50	-0.003		
30		-2.11	-0.003		
20		2.80	0.003		
10		2.38	0.003		
0		2.01	0.002		
-10		2.38	0.003		
-20		2.32	0.003		
-30		-2.22	-0.003		
20	Maximum Voltage	-2.32	-0.003	2.5ppm	PASS
20	BEP	2.49	0.003		

RADIATED SPURIOUS EMISSION

Note:

(1) Spurious emissions which are attenuated by more than 20dB below the permissible value for frequency below 1000MHz.

(2) Test is divided into three directions, X/Y/Z. X pattern for the worst.

WCDMA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3704.32	-26.88	7.00	12.93	-32.81	-13.00	-19.81	H
5557.61	-28.53	8.20	17.11	-37.44	-13.00	-24.44	H
7409.58	-27.05	8.10	22.20	-41.15	-13.00	-28.15	H
3704.48	-26.38	7.00	12.93	-32.31	-13.00	-19.31	V
5557.52	-26.68	8.20	17.11	-35.59	-13.00	-22.59	V
7409.74	-26.33	8.10	22.20	-40.43	-13.00	-27.43	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.07	-26.94	7.00	12.93	-32.87	-13.00	-19.87	H
5640.00	-29.61	8.20	17.11	-38.52	-13.00	-25.52	H
7520.12	-26.29	8.10	22.20	-40.39	-13.00	-27.39	H
3760.04	-26.55	7.00	12.93	-32.48	-13.00	-19.48	V
5639.96	-25.80	8.20	17.11	-34.71	-13.00	-21.71	V
7519.93	-25.21	8.10	22.20	-39.31	-13.00	-26.31	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3815.23	-25.41	7.00	12.93	-31.34	-13.00	-18.34	H
5722.05	-25.96	8.20	17.11	-34.87	-13.00	-21.87	H
7630.27	-24.27	8.10	22.20	-38.37	-13.00	-25.37	H
3815.57	-26.38	7.00	12.93	-32.31	-13.00	-19.31	V
5722.11	-29.65	8.20	17.11	-38.56	-13.00	-25.56	V
7630.27	-24.13	8.10	22.20	-38.23	-13.00	-25.23	V

HSUPA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3704.42	-29.48	7.00	12.93	-35.41	-13.00	-22.41	H
5557.26	-29.54	8.20	17.11	-38.45	-13.00	-25.45	H
7409.78	-26.56	8.10	22.20	-40.66	-13.00	-27.66	H
3704.48	-27.31	7.00	12.93	-33.24	-13.00	-20.24	V
5557.19	-25.66	8.20	17.11	-34.57	-13.00	-21.57	V
7409.59	-27.67	8.10	22.20	-41.77	-13.00	-28.77	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.22	-29.92	7.00	12.93	-35.85	-13.00	-22.85	H
5639.86	-27.09	8.20	17.11	-36.00	-13.00	-23.00	H
7520.09	-26.32	8.10	22.20	-40.42	-13.00	-27.42	H
3760.18	-26.34	7.00	12.93	-32.27	-13.00	-19.27	V
5639.94	-26.41	8.20	17.11	-35.32	-13.00	-22.32	V
7520.06	-27.88	8.10	22.20	-41.98	-13.00	-28.98	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3815.28	-26.20	7.00	12.93	-32.13	-13.00	-19.13	H
5722.13	-26.16	8.20	17.11	-35.07	-13.00	-22.07	H
7630.32	-24.10	8.10	22.20	-38.20	-13.00	-25.20	H
3815.69	-29.20	7.00	12.93	-35.13	-13.00	-22.13	V
5722.06	-29.99	8.20	17.11	-38.90	-13.00	-25.90	V
7629.89	-23.50	8.10	22.20	-37.60	-13.00	-24.60	V

HSDPA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3704.04	-27.15	7.00	12.93	-33.08	-13.00	-20.08	H
5557.52	-27.24	8.20	17.11	-36.15	-13.00	-23.15	H
7409.80	-26.92	8.10	22.20	-41.02	-13.00	-28.02	H
3704.42	-27.32	7.00	12.93	-33.25	-13.00	-20.25	V
5557.57	-26.58	8.20	17.11	-35.49	-13.00	-22.49	V
7409.83	-26.38	8.10	22.20	-40.48	-13.00	-27.48	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.78	-27.99	7.00	12.93	-33.92	-13.00	-20.92	H
5639.83	-26.70	8.20	17.11	-35.61	-13.00	-22.61	H
7519.94	-26.37	8.10	22.20	-40.47	-13.00	-27.47	H
3760.23	-28.91	7.00	12.93	-34.84	-13.00	-21.84	V
5640.21	-27.14	8.20	17.11	-36.05	-13.00	-23.05	V
7520.14	-26.78	8.10	22.20	-40.88	-13.00	-27.88	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3815.63	-29.41	7.00	12.93	-35.34	-13.00	-22.34	H
5722.03	-28.48	8.20	17.11	-37.39	-13.00	-24.39	H
7630.05	-26.79	8.10	22.20	-40.89	-13.00	-27.89	H
3815.47	-27.87	7.00	12.93	-33.80	-13.00	-20.80	V
5722.28	-26.45	8.20	17.11	-35.36	-13.00	-22.36	V
7630.17	-25.37	8.10	22.20	-39.47	-13.00	-26.47	V

WCDMA Band 4: (30-18000)MHz							
The Worst Test Results for Channel 1313/1712.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3425.08	-32.75	7.20	12.05	-37.60	-13.00	-24.60	H
5137.65	-35.32	7.90	16.27	-43.69	-13.00	-30.69	H
6850.13	-28.94	8.30	20.13	-40.77	-13.00	-27.77	H
3424.95	-33.50	7.20	12.05	-38.35	-13.00	-25.35	V
5137.46	-32.28	7.90	16.27	-40.65	-13.00	-27.65	V
6850.20	-30.45	8.30	20.13	-42.28	-13.00	-29.28	V
The Worst Test Results for Channel 1450/1740.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3479.73	-31.22	7.20	12.05	-36.07	-13.00	-23.07	H
5219.73	-33.77	7.90	16.27	-42.14	-13.00	-29.14	H
6959.93	-32.20	8.30	20.13	-44.03	-13.00	-31.03	H
3479.87	-34.83	7.20	12.05	-39.68	-13.00	-26.68	V
5219.95	-30.27	7.90	16.27	-38.64	-13.00	-25.64	V
6959.51	-28.68	8.30	20.13	-40.51	-13.00	-27.51	V
The Worst Test Results for Channel 1512/1752.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3504.60	-30.81	7.20	12.05	-35.66	-13.00	-22.66	H
5257.17	-32.27	7.90	16.27	-40.64	-13.00	-27.64	H
7009.41	-28.69	8.30	20.13	-40.52	-13.00	-27.52	H
3504.80	-31.22	7.20	12.05	-36.07	-13.00	-23.07	V
5257.04	-33.99	7.90	16.27	-42.36	-13.00	-29.36	V
7009.48	-29.68	8.30	20.13	-41.51	-13.00	-28.51	V

HSUPA Band 4: (30-18000)MHz							
The Worst Test Results for Channel 1313/1712.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3424.90	-32.94	7.20	12.05	-37.79	-13.00	-24.79	H
5137.54	-34.77	7.90	16.27	-43.14	-13.00	-30.14	H
6849.96	-30.70	8.30	20.13	-42.53	-13.00	-29.53	H
3425.11	-35.45	7.20	12.05	-40.30	-13.00	-27.30	V
5137.61	-34.28	7.90	16.27	-42.65	-13.00	-29.65	V
6850.29	-30.47	8.30	20.13	-42.30	-13.00	-29.30	V
The Worst Test Results for Channel 1450/1740.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3479.66	-33.59	7.20	12.05	-38.44	-13.00	-25.44	H
5219.78	-32.33	7.90	16.27	-40.70	-13.00	-27.70	H
6959.78	-29.90	8.30	20.13	-41.73	-13.00	-28.73	H
3479.79	-32.78	7.20	12.05	-37.63	-13.00	-24.63	V
5219.53	-33.54	7.90	16.27	-41.91	-13.00	-28.91	V
6959.79	-30.16	8.30	20.13	-41.99	-13.00	-28.99	V
The Worst Test Results for Channel 1512/1752.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3504.62	-31.17	7.20	12.05	-36.02	-13.00	-23.02	H
5256.78	-33.41	7.90	16.27	-41.78	-13.00	-28.78	H
7009.30	-32.04	8.30	20.13	-43.87	-13.00	-30.87	H
3504.73	-32.43	7.20	12.05	-37.28	-13.00	-24.28	V
5256.96	-30.36	7.90	16.27	-38.73	-13.00	-25.73	V
7009.37	-32.75	8.30	20.13	-44.58	-13.00	-31.58	V

HSDPA Band 4: (30-18000)MHz							
The Worst Test Results for Channel 1313/1712.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3425.01	-32.13	7.20	12.05	-36.98	-13.00	-23.98	H
5137.46	-31.03	7.90	16.27	-39.40	-13.00	-26.40	H
6850.05	-32.38	8.30	20.13	-44.21	-13.00	-31.21	H
3425.14	-34.27	7.20	12.05	-39.12	-13.00	-26.12	V
5137.65	-32.47	7.90	16.27	-40.84	-13.00	-27.84	V
6850.02	-29.45	8.30	20.13	-41.28	-13.00	-28.28	V
The Worst Test Results for Channel 1450/1740.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3479.58	-31.27	7.20	12.05	-36.12	-13.00	-23.12	H
5219.71	-34.74	7.90	16.27	-43.11	-13.00	-30.11	H
6959.85	-29.27	8.30	20.13	-41.10	-13.00	-28.10	H
3479.95	-32.61	7.20	12.05	-37.46	-13.00	-24.46	V
5219.68	-33.19	7.90	16.27	-41.56	-13.00	-28.56	V
6959.95	-29.53	8.30	20.13	-41.36	-13.00	-28.36	V
The Worst Test Results for Channel 1512/1752.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3504.73	-33.62	7.20	12.05	-38.47	-13.00	-25.47	H
5256.74	-35.31	7.90	16.27	-43.68	-13.00	-30.68	H
7009.24	-28.81	8.30	20.13	-40.64	-13.00	-27.64	H
3504.79	-31.46	7.20	12.05	-36.31	-13.00	-23.31	V
5256.76	-33.62	7.90	16.27	-41.99	-13.00	-28.99	V
7009.33	-33.01	8.30	20.13	-44.84	-13.00	-31.84	V

WCDMA Band 5: (30-9000)MHz							
The worst testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1652.15	-36.07	7.40	4.75	-33.42	-13.00	-20.42	H
2479.67	-32.56	8.30	8.39	-32.65	-13.00	-19.65	H
3305.64	-24.16	7.20	11.79	-28.75	-13.00	-15.75	H
1652.49	-36.05	7.40	4.75	-33.40	-13.00	-20.40	V
2479.52	-35.61	8.30	8.39	-35.70	-13.00	-22.70	V
3305.84	-33.34	7.20	11.79	-37.93	-13.00	-24.93	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.15	-33.72	7.40	4.75	-31.07	-13.00	-18.07	H
2509.87	-31.12	8.30	8.39	-31.21	-13.00	-18.21	H
3346.16	-25.44	7.20	11.79	-30.03	-13.00	-17.03	H
1672.95	-34.18	7.40	4.75	-31.53	-13.00	-18.53	V
2509.82	-35.10	8.30	8.39	-35.19	-13.00	-22.19	V
3346.32	-31.68	7.20	11.79	-36.27	-13.00	-23.27	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1693.54	-36.37	7.40	4.75	-33.72	-13.00	-20.72	H
2539.07	-32.98	8.30	8.39	-33.07	-13.00	-20.07	H
3385.85	-23.96	7.20	11.79	-28.55	-13.00	-15.55	H
1693.55	-37.29	7.40	4.75	-34.64	-13.00	-21.64	V
2539.35	-32.55	8.30	8.39	-32.64	-13.00	-19.64	V
3386.12	-33.62	7.20	11.79	-38.21	-13.00	-25.21	V

HSUPA Band 5: (30-9000)MHz							
The worst testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1652.15	-33.40	7.40	4.75	-30.75	-13.00	-17.75	H
2479.66	-30.12	8.30	8.39	-30.21	-13.00	-17.21	H
3305.85	-24.51	7.20	11.79	-29.10	-13.00	-16.10	H
1652.05	-34.90	7.40	4.75	-32.25	-13.00	-19.25	V
2479.51	-31.70	8.30	8.39	-31.79	-13.00	-18.79	V
3305.80	-32.38	7.20	11.79	-36.97	-13.00	-23.97	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.81	-36.07	7.40	4.75	-33.42	-13.00	-20.42	H
2509.71	-34.59	8.30	8.39	-34.68	-13.00	-21.68	H
3346.35	-25.48	7.20	11.79	-30.07	-13.00	-17.07	H
1672.98	-37.43	7.40	4.75	-34.78	-13.00	-21.78	V
2509.56	-33.47	8.30	8.39	-33.56	-13.00	-20.56	V
3346.03	-32.76	7.20	11.79	-37.35	-13.00	-24.35	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1693.33	-33.82	7.40	4.75	-31.17	-13.00	-18.17	H
2539.20	-31.20	8.30	8.39	-31.29	-13.00	-18.29	H
3386.00	-25.39	7.20	11.79	-29.98	-13.00	-16.98	H
1693.29	-34.66	7.40	4.75	-32.01	-13.00	-19.01	V
2539.24	-34.40	8.30	8.39	-34.49	-13.00	-21.49	V
3385.91	-30.77	7.20	11.79	-35.36	-13.00	-22.36	V

HSDPA Band 5: (30-9000)MHz							
The worst testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1652.35	-34.52	7.40	4.75	-31.87	-13.00	-18.87	H
2479.22	-32.61	8.30	8.39	-32.70	-13.00	-19.70	H
3305.53	-24.05	7.20	11.79	-28.64	-13.00	-15.64	H
1652.08	-34.05	7.40	4.75	-31.40	-13.00	-18.40	V
2479.46	-32.43	8.30	8.39	-32.52	-13.00	-19.52	V
3305.49	-31.04	7.20	11.79	-35.63	-13.00	-22.63	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.10	-33.92	7.40	4.75	-31.27	-13.00	-18.27	H
2509.87	-34.54	8.30	8.39	-34.63	-13.00	-21.63	H
3346.40	-26.74	7.20	11.79	-31.33	-13.00	-18.33	H
1673.24	-37.47	7.40	4.75	-34.82	-13.00	-21.82	V
2509.78	-35.57	8.30	8.39	-35.66	-13.00	-22.66	V
3346.06	-33.40	7.20	11.79	-37.99	-13.00	-24.99	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1693.52	-32.13	7.40	4.75	-29.48	-13.00	-16.48	H
2539.30	-30.69	8.30	8.39	-30.78	-13.00	-17.78	H
3386.14	-27.24	7.20	11.79	-31.83	-13.00	-18.83	H
1693.27	-33.84	7.40	4.75	-31.19	-13.00	-18.19	V
2539.48	-35.67	8.30	8.39	-35.76	-13.00	-22.76	V
3386.05	-30.45	7.20	11.79	-35.04	-13.00	-22.04	V

CDMA

Conducted output power

CDMA BC0							
Mode	Frequency (MHz)	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit (W)	ERP Limit (dBm)	Conclusion
CDMA BC0	824.70	22.31	-2.00	18.16	7.00	38.45	PASS
	836.52	22.29	-2.00	18.14	7.00	38.45	PASS
	848.31	22.33	-2.00	18.18	7.00	38.45	PASS
EVDO BC0	824.70	22.21	-2.00	18.06	7.00	38.45	PASS
	836.52	22.20	-2.00	18.05	7.00	38.45	PASS
	848.31	22.24	-2.00	18.09	7.00	38.45	PASS

CDMA BC1							
Mode	Frequency (MHz)	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Conclusion
CDMA BC1	1851.25	22.45	-2.80	19.65	2.00	33.01	PASS
	1880.00	22.51	-2.80	19.71	2.00	33.01	PASS
	1908.75	22.48	-2.80	19.68	2.00	33.01	PASS
EVDO BC1	1851.25	22.34	-2.80	19.54	2.00	33.01	PASS
	1880.00	22.36	-2.80	19.56	2.00	33.01	PASS
	1908.75	22.38	-2.80	19.58	2.00	33.01	PASS

Frequency stability

CDMA BC0					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	5.42	0.003	2.5ppm	PASS
40		5.39	0.003		
30		5.46	0.003		
20		-12.47	-0.007		
10		-5.50	-0.003		
0		5.23	0.003		
-10		-5.13	-0.003		
-20		5.63	0.003		
-30		-5.58	-0.003		
20	Maximum Voltage	5.16	0.003		
20	BEP	-5.44	-0.003		

CDMA BC1					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	2.56	0.001	Within Authorized Band	PASS
40		2.60	0.001		
30		-3.05	-0.002		
20		3.87	0.002		
10		2.81	0.001		
0		2.79	0.001		
-10		2.53	0.001		
-20		-2.88	-0.002		
-30		-2.48	-0.001		
20	Maximum Voltage	-2.85	-0.002		
20	BEP	-2.53	-0.001		

EVDO BC0					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	-4.04	-0.002	2.5ppm	PASS
40		-3.93	-0.002		
30		-3.94	-0.002		
20		5.83	0.003		
10		3.71	0.002		
0		3.71	0.002		
-10		-3.67	-0.002		
-20		-3.52	-0.002		
-30		3.71	0.002		
20	Maximum Voltage	3.91	0.002		
20	BEP	3.51	0.002		

EVDO BC1					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	1.92	0.001	Within Authorized Band	PASS
40		1.68	0.001		
30		1.86	0.001		
20		-5.14	-0.003		
10		-1.84	-0.001		
0		1.91	0.001		
-10		1.93	0.001		
-20		-1.79	-0.001		
-30		-1.50	-0.001		
20	Maximum Voltage	-2.03	-0.001		
20	BEP	1.58	0.001		

RADIATED SPURIOUS EMISSION

CDMA BC0: (30-9000)MHz							
The Worst Test Results for Channel 1013/824.7MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1649.47	-30.85	7.40	4.75	-28.20	-13.00	-15.20	H
2474.64	-27.83	8.30	8.39	-27.92	-13.00	-14.92	H
3298.03	-27.10	7.20	11.79	-31.69	-13.00	-18.69	H
1649.47	-31.46	7.40	4.75	-28.81	-13.00	-15.81	V
2474.64	-27.76	8.30	8.39	-27.85	-13.00	-14.85	V
3298.03	-26.67	7.20	11.79	-31.26	-13.00	-18.26	V
The Worst Test Results for Channel 384/836.52MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.67	-29.15	7.40	4.75	-26.50	-13.00	-13.50	H
2509.60	-32.04	8.30	8.39	-32.13	-13.00	-19.13	H
3346.12	-27.31	7.20	11.79	-31.90	-13.00	-18.90	H
1673.67	-32.64	7.40	4.75	-29.99	-13.00	-16.99	V
2509.60	-29.51	8.30	8.39	-29.60	-13.00	-16.60	V
3346.12	-28.71	7.20	11.79	-33.30	-13.00	-20.30	V
The Worst Test Results for Channel 1175/848.31MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1696.41	-27.69	7.40	4.75	-25.04	-13.00	-12.04	H
2544.21	-28.95	8.30	8.39	-29.04	-13.00	-16.04	H
3393.37	-30.12	7.20	11.79	-34.71	-13.00	-21.71	H
1696.41	-28.15	7.40	4.75	-25.50	-13.00	-12.50	V
2544.21	-27.89	8.30	8.39	-27.98	-13.00	-14.98	V
3393.37	-25.29	7.20	11.79	-29.88	-13.00	-16.88	V

EVDO BC0: (30-9000)MHz							
The Worst Test Results for Channel 1013/824.7MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1649.53	-30.83	7.40	4.75	-28.18	-13.00	-15.18	H
2474.49	-28.09	8.30	8.39	-28.18	-13.00	-15.18	H
3298.36	-27.80	7.20	11.79	-32.39	-13.00	-19.39	H
1649.53	-31.47	7.40	4.75	-28.82	-13.00	-15.82	V
2474.49	-31.18	8.30	8.39	-31.27	-13.00	-18.27	V
3298.36	-28.13	7.20	11.79	-32.72	-13.00	-19.72	V
The Worst Test Results for Channel 384/836.52MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.80	-30.67	7.40	4.75	-28.02	-13.00	-15.02	H
2509.47	-30.99	8.30	8.39	-31.08	-13.00	-18.08	H
3346.30	-28.31	7.20	11.79	-32.90	-13.00	-19.90	H
1673.80	-30.64	7.40	4.75	-27.99	-13.00	-14.99	V
2509.47	-30.37	8.30	8.39	-30.46	-13.00	-17.46	V
3346.30	-26.47	7.20	11.79	-31.06	-13.00	-18.06	V
The Worst Test Results for Channel 1175/848.31MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1696.31	-29.22	7.40	4.75	-26.57	-13.00	-13.57	H
2544.36	-29.19	8.30	8.39	-29.28	-13.00	-16.28	H
3393.76	-29.81	7.20	11.79	-34.40	-13.00	-21.40	H
1696.31	-29.64	7.40	4.75	-26.99	-13.00	-13.99	V
2544.36	-28.65	8.30	8.39	-28.74	-13.00	-15.74	V
3393.76	-27.10	7.20	11.79	-31.69	-13.00	-18.69	V

CDMA BC1: (30-20000)MHz							
The Worst Test Results for Channel 25/1851.25MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3702.38	-31.80	7.00	12.93	-37.73	-13.00	-24.73	H
5553.29	-31.99	8.20	17.11	-40.90	-13.00	-27.90	H
7405.84	-27.88	8.10	22.20	-41.98	-13.00	-28.98	H
3702.38	-31.56	7.00	12.93	-37.49	-13.00	-24.49	V
5553.29	-31.45	8.20	17.11	-40.36	-13.00	-27.36	V
7405.84	-25.55	8.10	22.20	-39.65	-13.00	-26.65	V
The Worst Test Results for Channel 600/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.92	-27.63	7.00	12.93	-33.56	-13.00	-20.56	H
5640.05	-30.48	8.20	17.11	-39.39	-13.00	-26.39	H
7520.09	-29.60	8.10	22.20	-43.70	-13.00	-30.70	H
3759.92	-32.04	7.00	12.93	-37.97	-13.00	-24.97	V
5640.05	-31.00	8.20	17.11	-39.91	-13.00	-26.91	V
7520.09	-28.36	8.10	22.20	-42.46	-13.00	-29.46	V
The Worst Test Results for Channel 1175/1908.75MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3817.64	-27.88	7.00	12.93	-33.81	-13.00	-20.81	H
5725.84	-29.80	8.20	17.11	-38.71	-13.00	-25.71	H
7635.30	-26.84	8.10	22.20	-40.94	-13.00	-27.94	H
3817.64	-29.08	7.00	12.93	-35.01	-13.00	-22.01	V
5725.84	-29.48	8.20	17.11	-38.39	-13.00	-25.39	V
7635.30	-28.64	8.10	22.20	-42.74	-13.00	-29.74	V

EVDO BC1: (30-20000)MHz							
The Worst Test Results for Channel 25/1851.25MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3702.10	-29.88	7.00	12.93	-35.81	-13.00	-22.81	H
5553.29	-29.74	8.20	17.11	-38.65	-13.00	-25.65	H
7405.67	-25.83	8.10	22.20	-39.93	-13.00	-26.93	H
3702.10	-29.86	7.00	12.93	-35.79	-13.00	-22.79	V
5553.29	-27.77	8.20	17.11	-36.68	-13.00	-23.68	V
7405.67	-27.16	8.10	22.20	-41.26	-13.00	-28.26	V
The Worst Test Results for Channel 600/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.92	-29.18	7.00	12.93	-35.11	-13.00	-22.11	H
5640.22	-30.25	8.20	17.11	-39.16	-13.00	-26.16	H
7520.27	-29.34	8.10	22.20	-43.44	-13.00	-30.44	H
3759.92	-32.45	7.00	12.93	-38.38	-13.00	-25.38	V
5640.22	-30.82	8.20	17.11	-39.73	-13.00	-26.73	V
7520.27	-27.78	8.10	22.20	-41.88	-13.00	-28.88	V
The Worst Test Results for Channel 1175/1908.75MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3817.66	-30.19	7.00	12.93	-36.12	-13.00	-23.12	H
5725.79	-28.36	8.20	17.11	-37.27	-13.00	-24.27	H
7635.32	-26.07	8.10	22.20	-40.17	-13.00	-27.17	H
3817.66	-31.40	7.00	12.93	-37.33	-13.00	-24.33	V
5725.79	-31.34	8.20	17.11	-40.25	-13.00	-27.25	V
7635.32	-27.51	8.10	22.20	-41.61	-13.00	-28.61	V

APPENDIX II- PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

APPENDIX III - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

Note: Please see the attached TANK 3s_External Photos and TANK 3s_Internal Photos.

※※※※※END OF THE REPORT※※※※※