




Plot 18:

Test Date	2024-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM ANT 2
Signal	IEEE 802.11b
Frequency	2462
SAR 10g (W/Kg)	0.111
SAR 1g (W/Kg)	0.217
ConvF	2.30
Relative permittivity	39.60
Conductivity (S/m)	1.83

Maximum location: X=0.00, Y=-8.00 ; SAR Peak: 0.51 W/kg

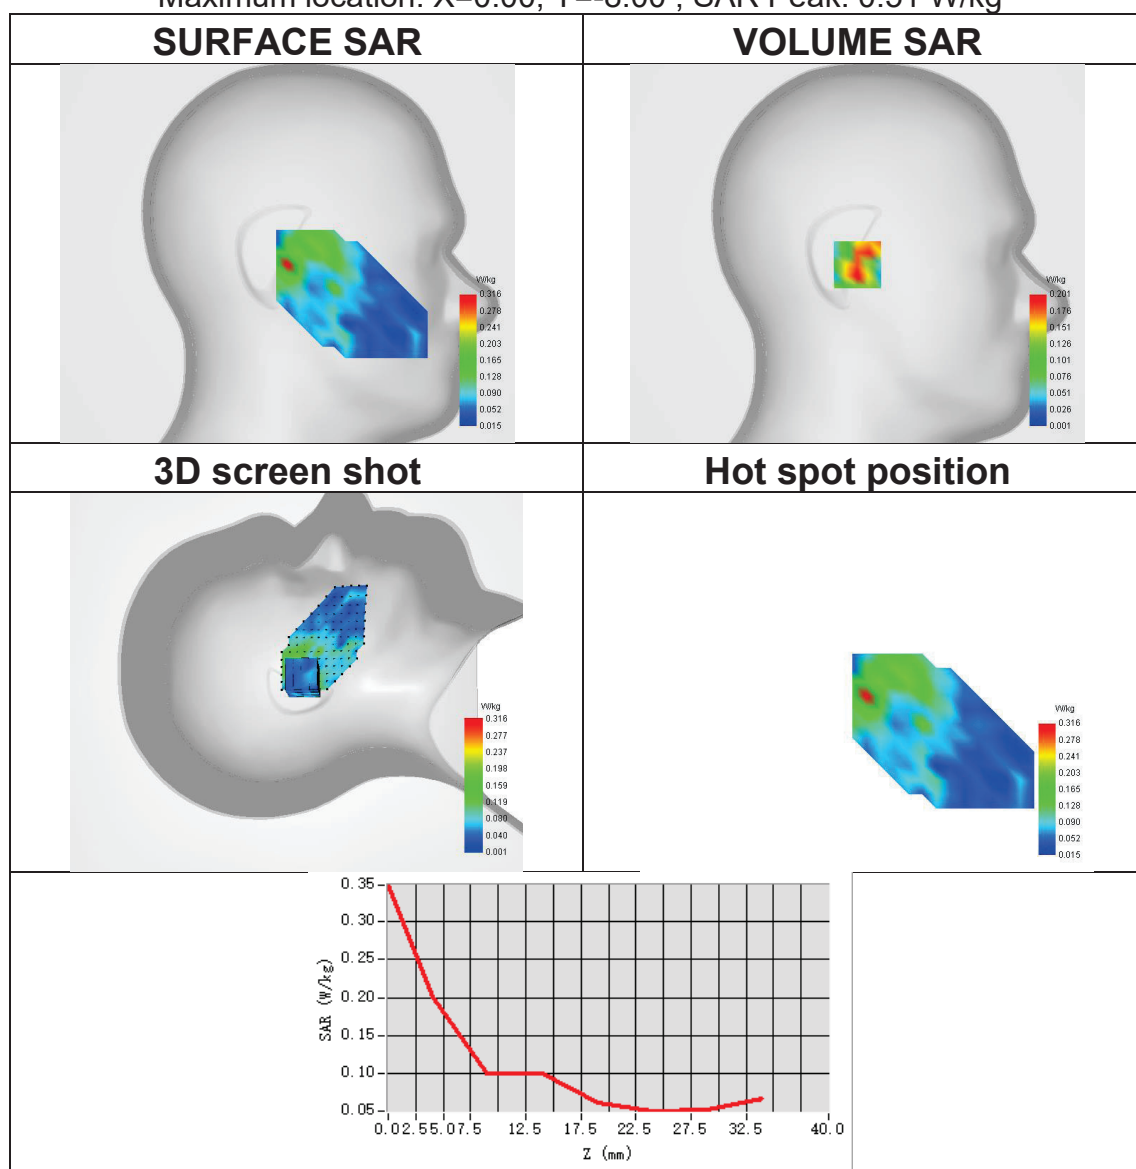




Plot 19:

Test Date	2024-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	ISM MIMO 1
Signal	IEEE 802.11ax
Frequency	2412
SAR 10g (W/Kg)	0.272
SAR 1g (W/Kg)	0.540
ConvF	2.30
Relative permittivity	39.60
Conductivity (S/m)	1.83

Maximum location: X=-8.00, Y=0.00 ; SAR Peak: 1.00 W/kg

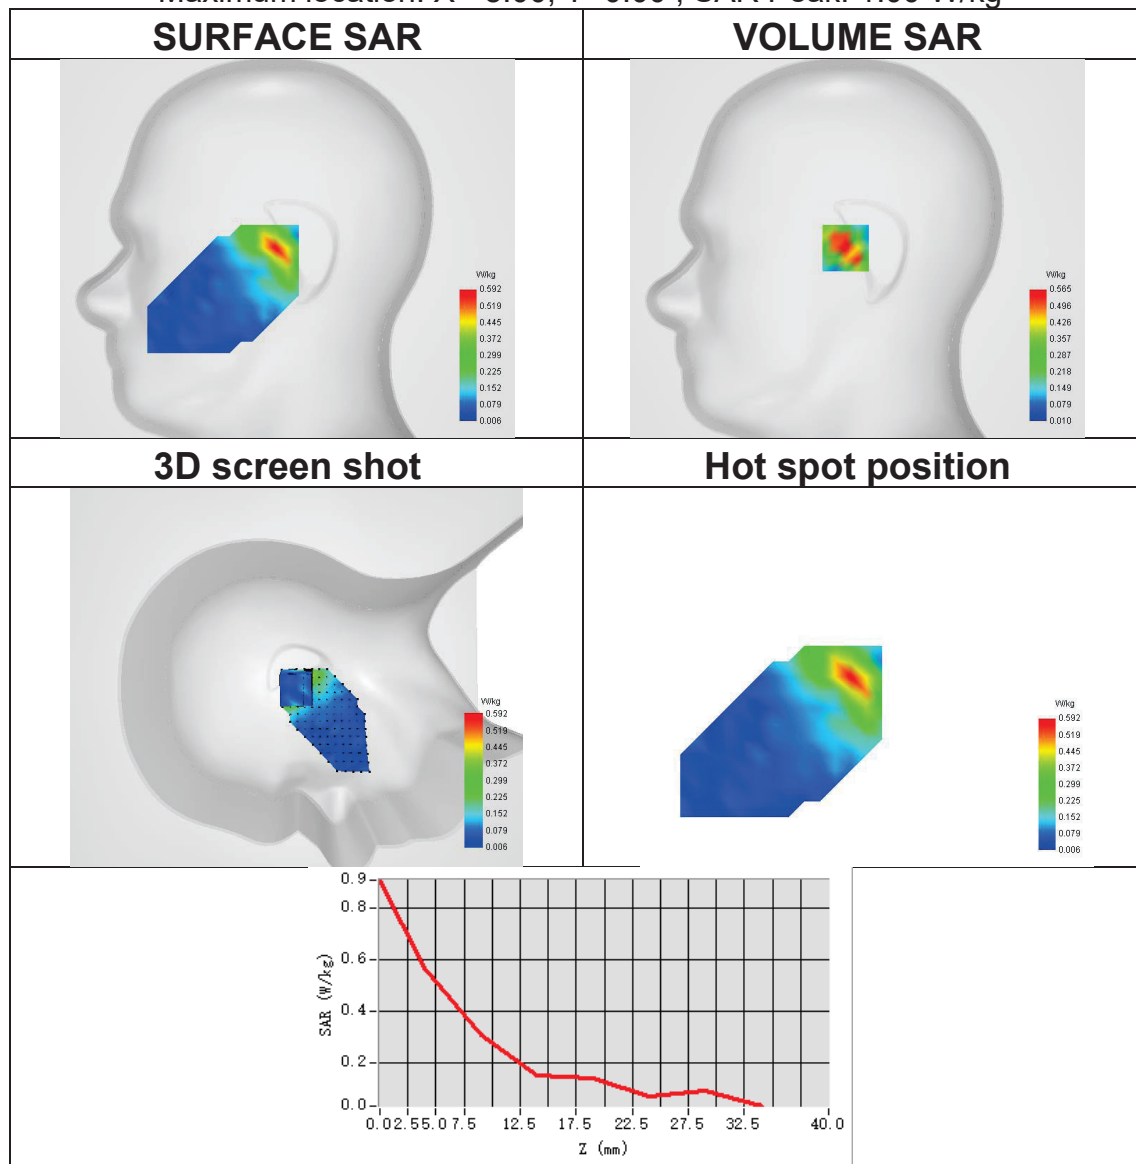




Plot 20:

Test Date	2024-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM MIMO 1
Signal	IEEE 802.11ax
Frequency	2412
SAR 10g (W/Kg)	0.152
SAR 1g (W/Kg)	0.313
ConvF	2.30
Relative permittivity	39.60
Conductivity (S/m)	1.83

Maximum location: X=0.00, Y=8.00 ; SAR Peak: 0.55 W/kg

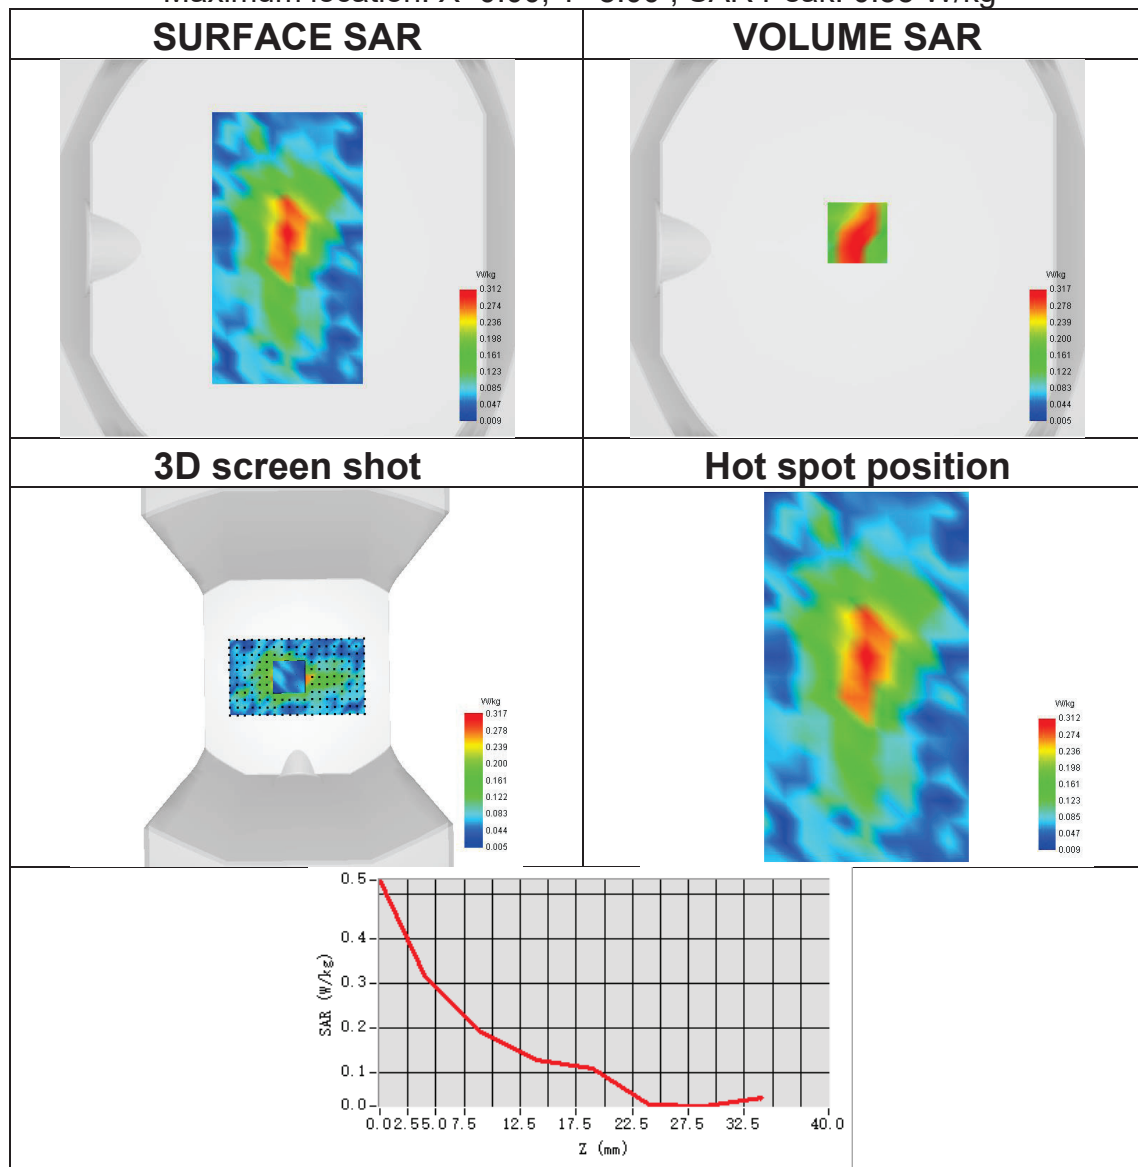




Plot 21:

Test Date	2024-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	ISM MIMO 2
Signal	IEEE 802.11ax
Frequency	2412
SAR 10g (W/Kg)	0.284
SAR 1g (W/Kg)	0.555
ConvF	2.30
Relative permittivity	39.60
Conductivity (S/m)	1.83

Maximum location: X=-9.00, Y=0.00 ; SAR Peak: 1.04 W/kg

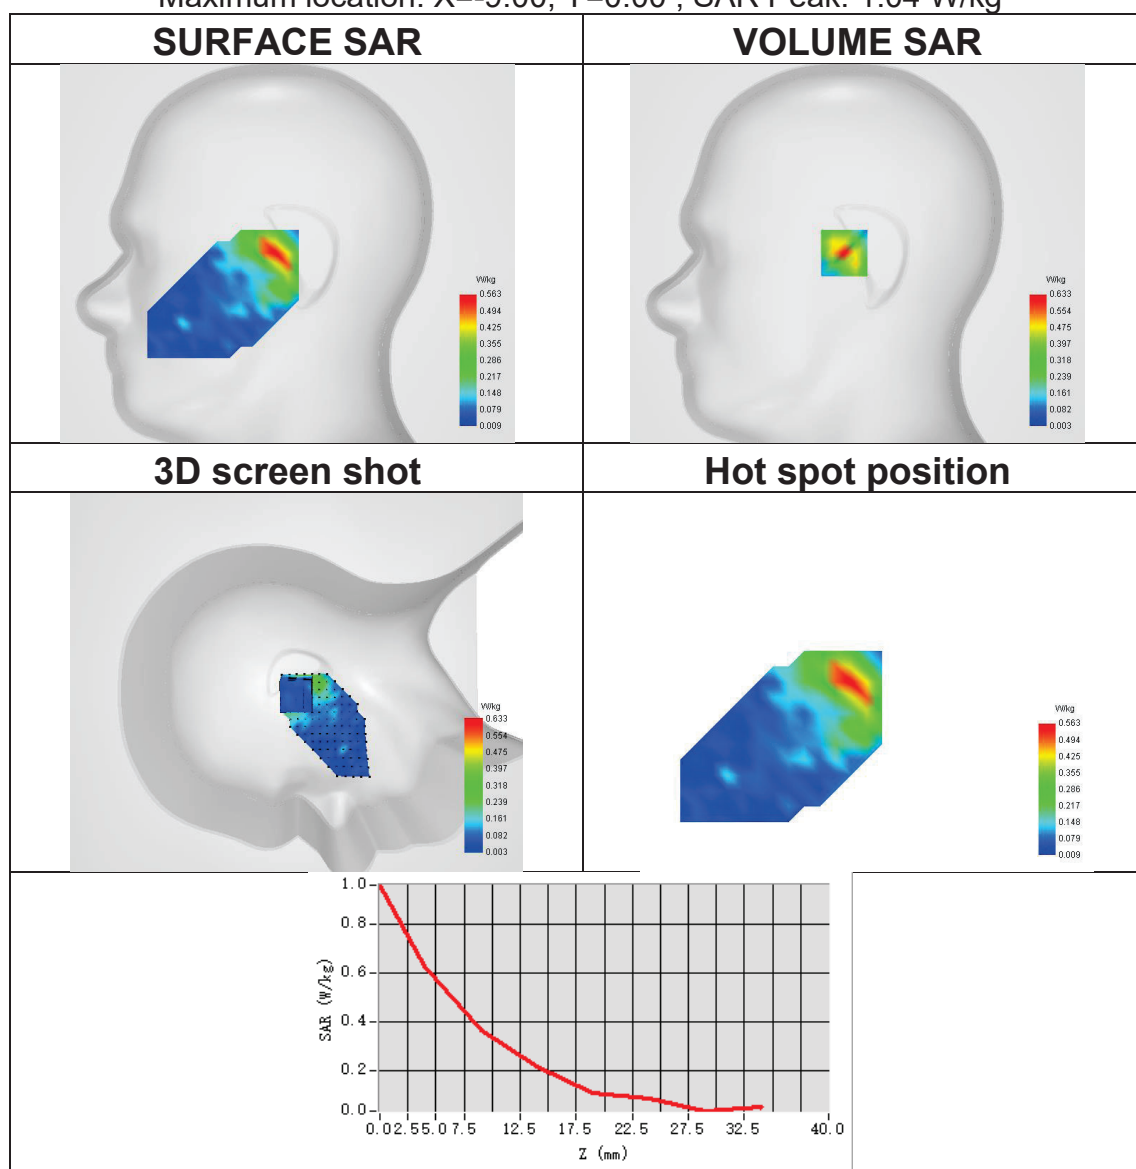




Plot 22:

Test Date	2024-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM MIMO2
Signal	IEEE 802.11ax
Frequency	2412
SAR 10g (W/Kg)	0.143
SAR 1g (W/Kg)	0.300
ConvF	2.30
Relative permittivity	39.60
Conductivity (S/m)	1.83


Maximum location: X=-7.00, Y=0.00 ; SAR Peak: 0.53 W/kg

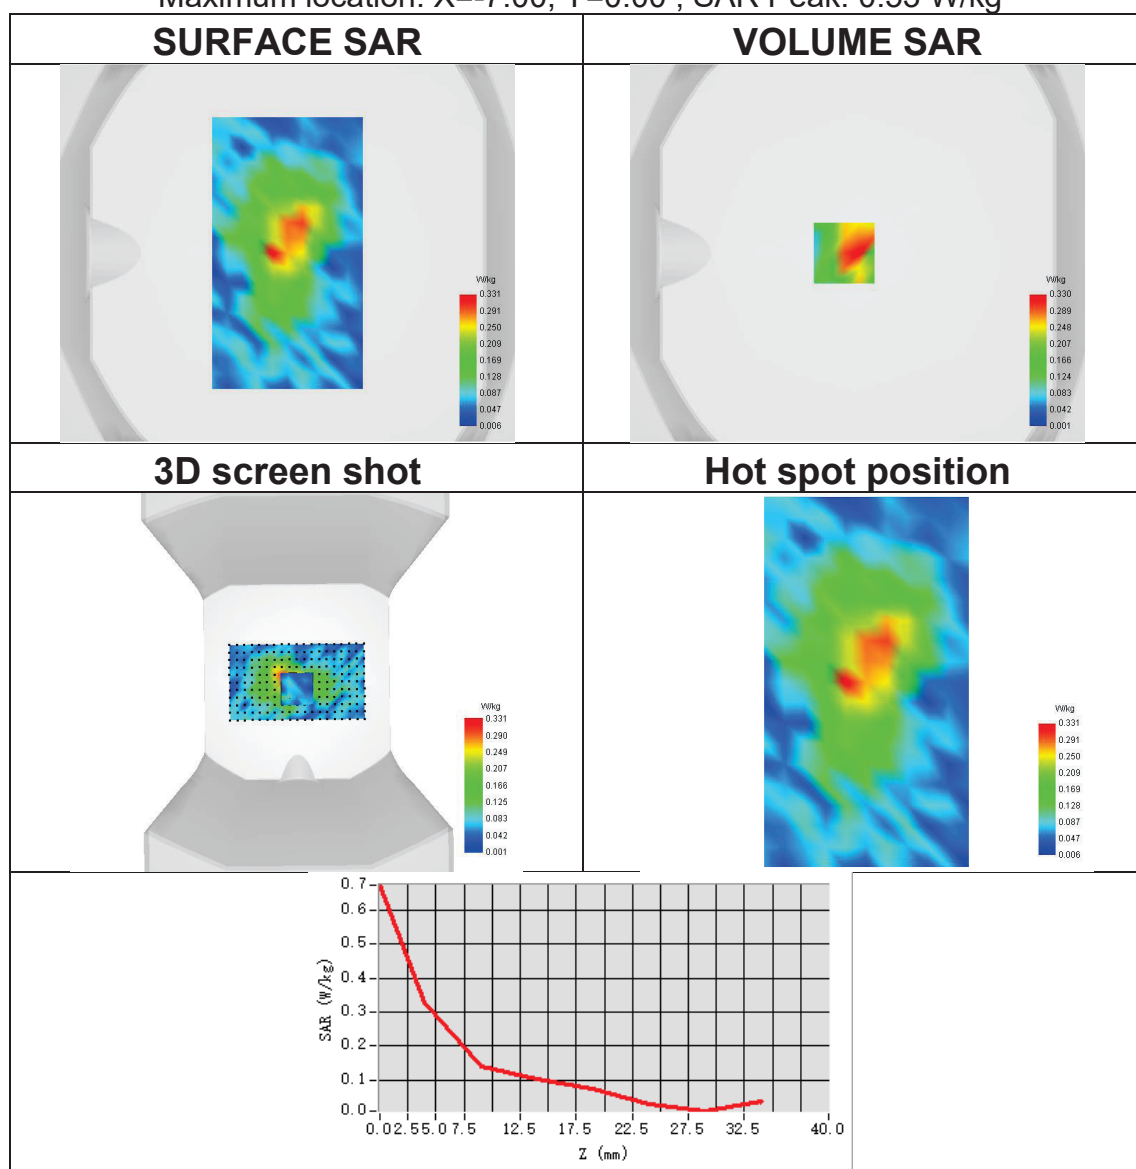

Plot 23:

Test Date	2024-05-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-1 ANT 1
Signal	IEEE 802.11ac
Frequency	5180
SAR 10g (W/Kg)	0.103
SAR 1g (W/Kg)	0.174
ConvF	1.81
Relative permittivity	36.47
Conductivity (S/m)	4.67

Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.53 W/kg

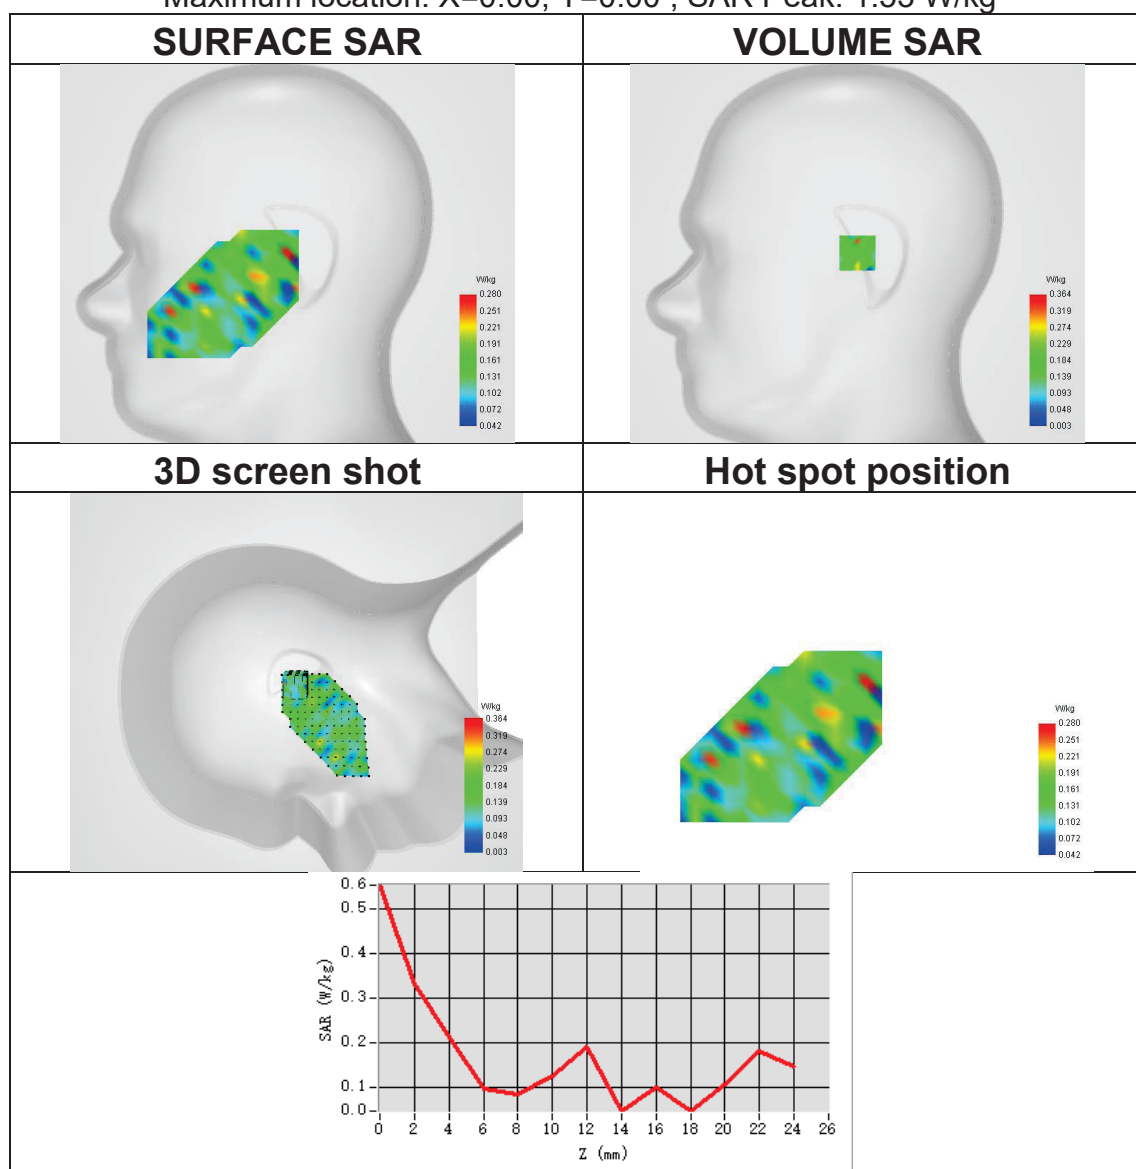




Plot 24:

Test Date	2024-05-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 ANT 1
Signal	IEEE 802.11ac
Frequency	5180
SAR 10g (W/Kg)	0.178
SAR 1g (W/Kg)	0.381
ConvF	1.81
Relative permittivity	36.47
Conductivity (S/m)	4.67

Maximum location: X=16.00, Y=53.00 ; SAR Peak: 1.78 W/kg

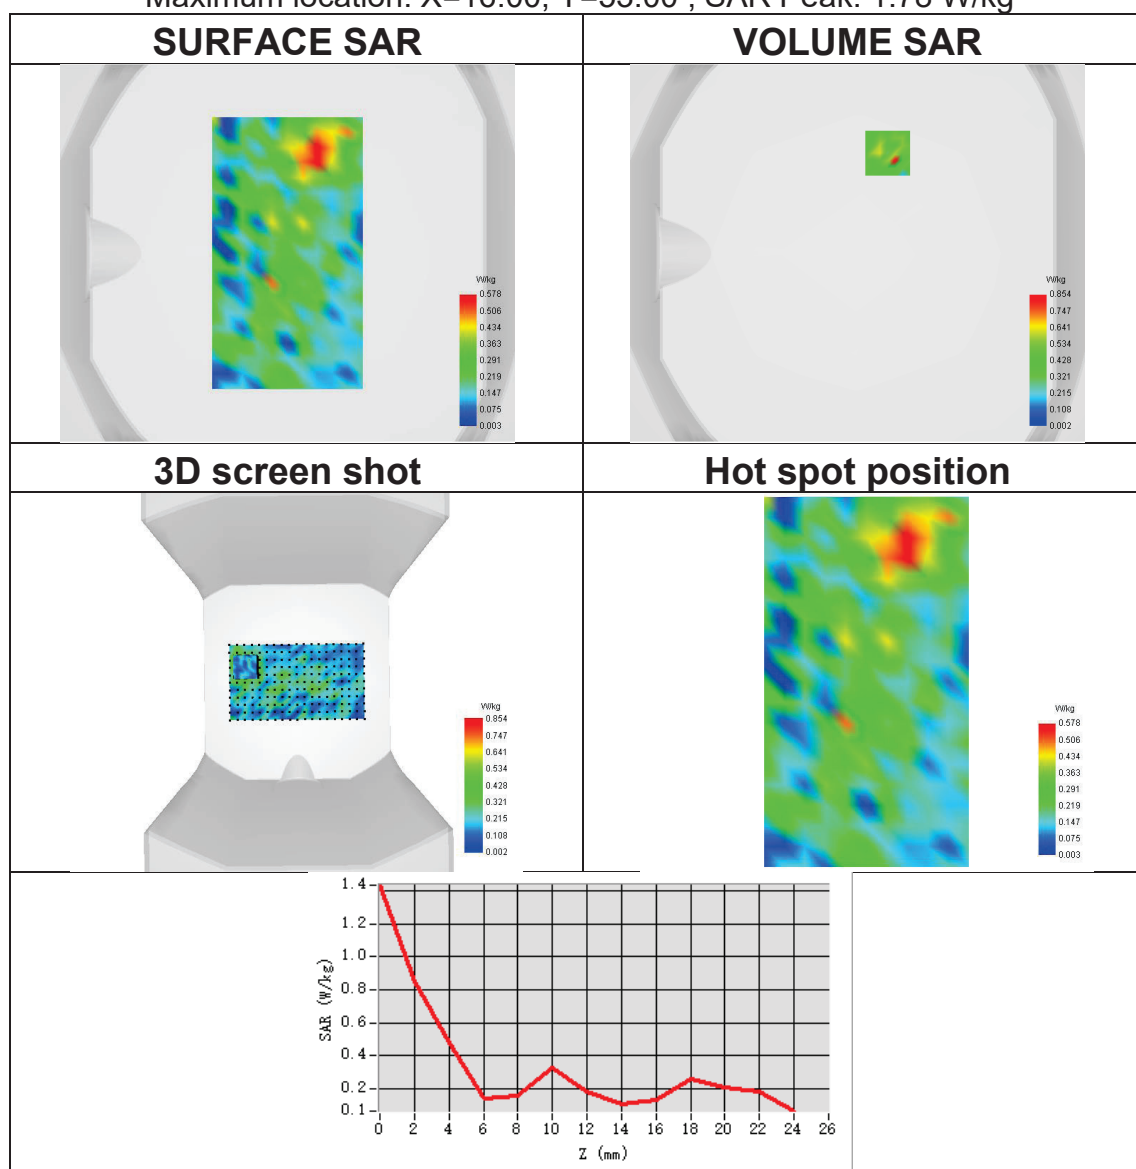




Plot 25:

Test Date	2024-05-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-1 ANT 2
Signal	IEEE 802.11ax
Frequency	5230
SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.255
ConvF	1.81
Relative permittivity	36.47
Conductivity (S/m)	4.67

Maximum location: X=-79.00, Y=-64.00 ; SAR Peak: 1.26 W/kg

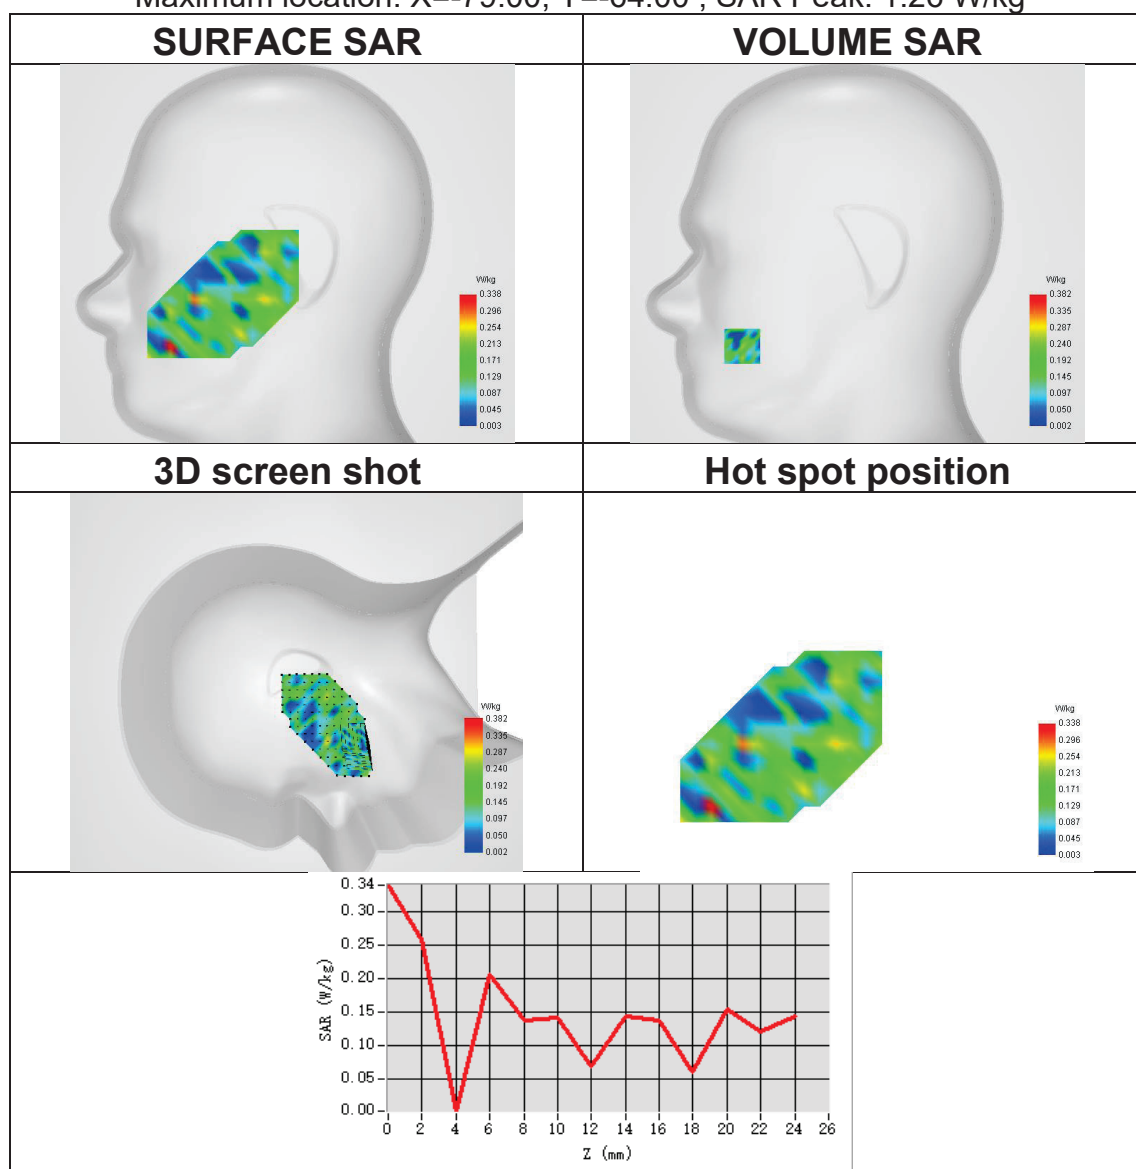




Plot 26:

Test Date	2024-05-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 ANT 2
Signal	IEEE 802.11ax
Frequency	5230
SAR 10g (W/Kg)	0.107
SAR 1g (W/Kg)	0.213
ConvF	1.81
Relative permittivity	36.47
Conductivity (S/m)	4.67

Maximum location: X=24.00, Y=16.00 ; SAR Peak: 1.28 W/kg

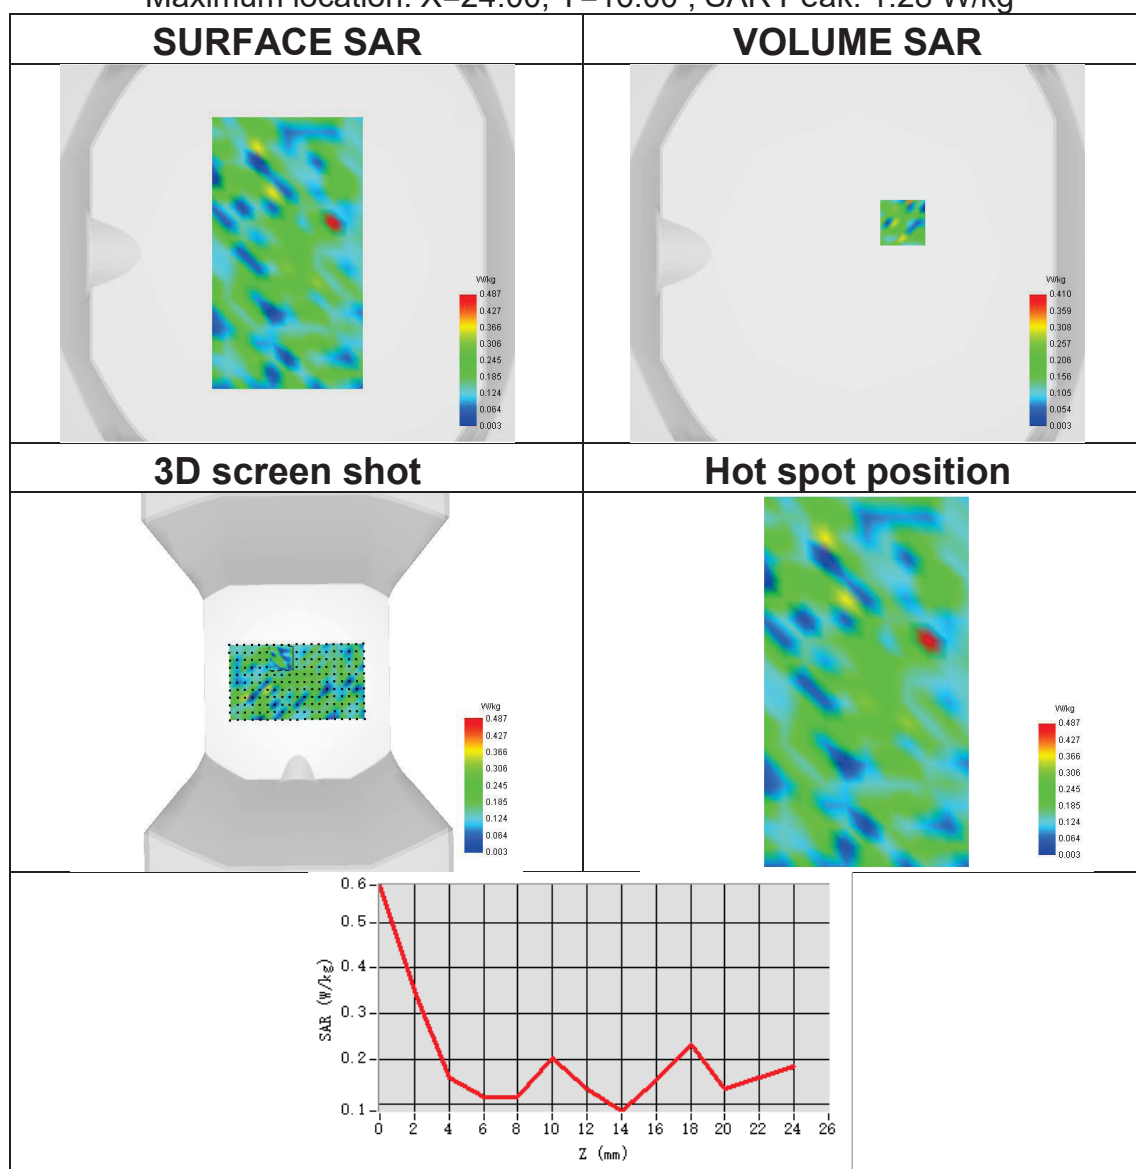




Plot 27:

Test Date	2024-05-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-1 MIMO 1
Signal	IEEE 802.11ac
Frequency	5230
SAR 10g (W/Kg)	0.188
SAR 1g (W/Kg)	0.508
ConvF	1.81
Relative permittivity	36.47
Conductivity (S/m)	4.67

Maximum location: X=2.00, Y=-2.00 ; SAR Peak: 2.11 W/kg

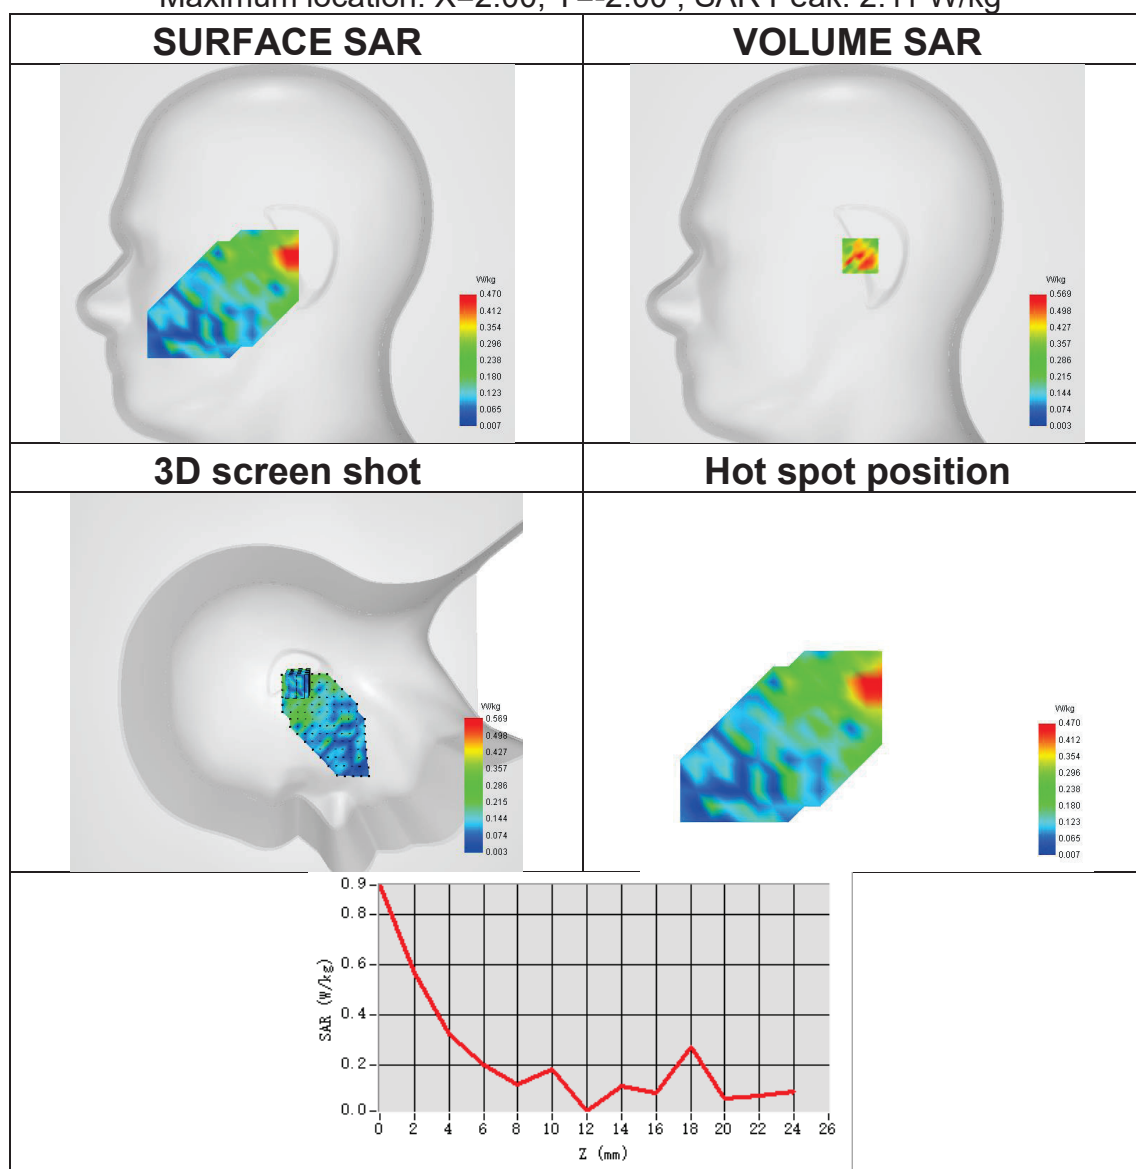




Plot 28:

Test Date	2024-05-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 MIMO 1
Signal	IEEE 802.11ac
Frequency	5230
SAR 10g (W/Kg)	0.166
SAR 1g (W/Kg)	0.285
ConvF	1.81
Relative permittivity	36.47
Conductivity (S/m)	4.67

Maximum location: X=6.00, Y=-32.00 ; SAR Peak: 1.28 W/kg

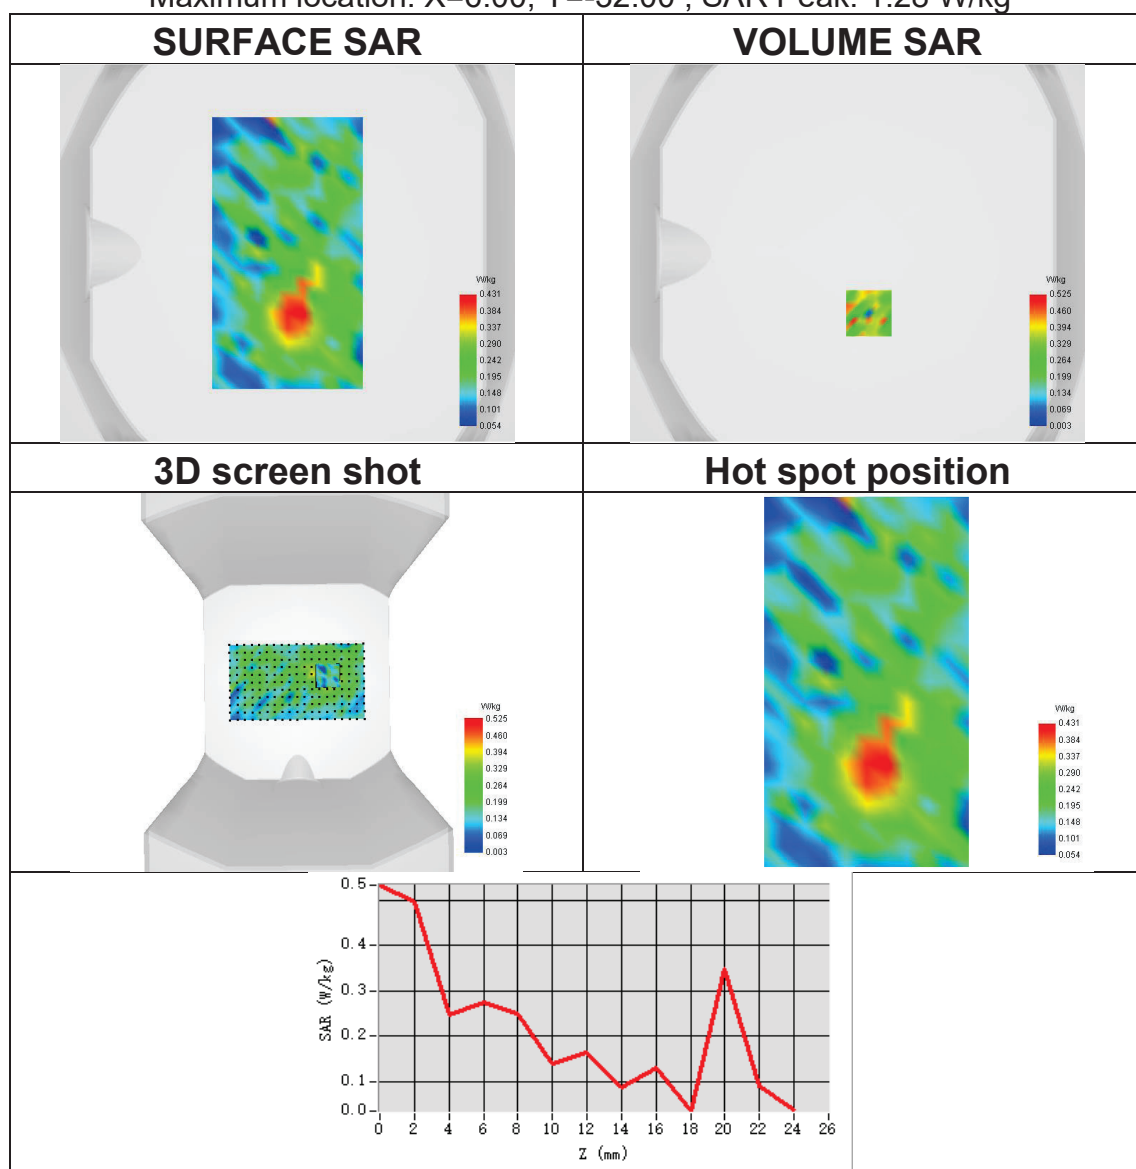




Plot 29:

Test Date	2024-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-1 MIMO 2
Signal	IEEE 802.11ac
Frequency	5230
SAR 10g (W/Kg)	0.139
SAR 1g (W/Kg)	0.386
ConvF	1.81
Relative permittivity	36.96
Conductivity (S/m)	4.63

Maximum location: X=-40.00, Y=0.00 ; SAR Peak: 1.90 W/kg

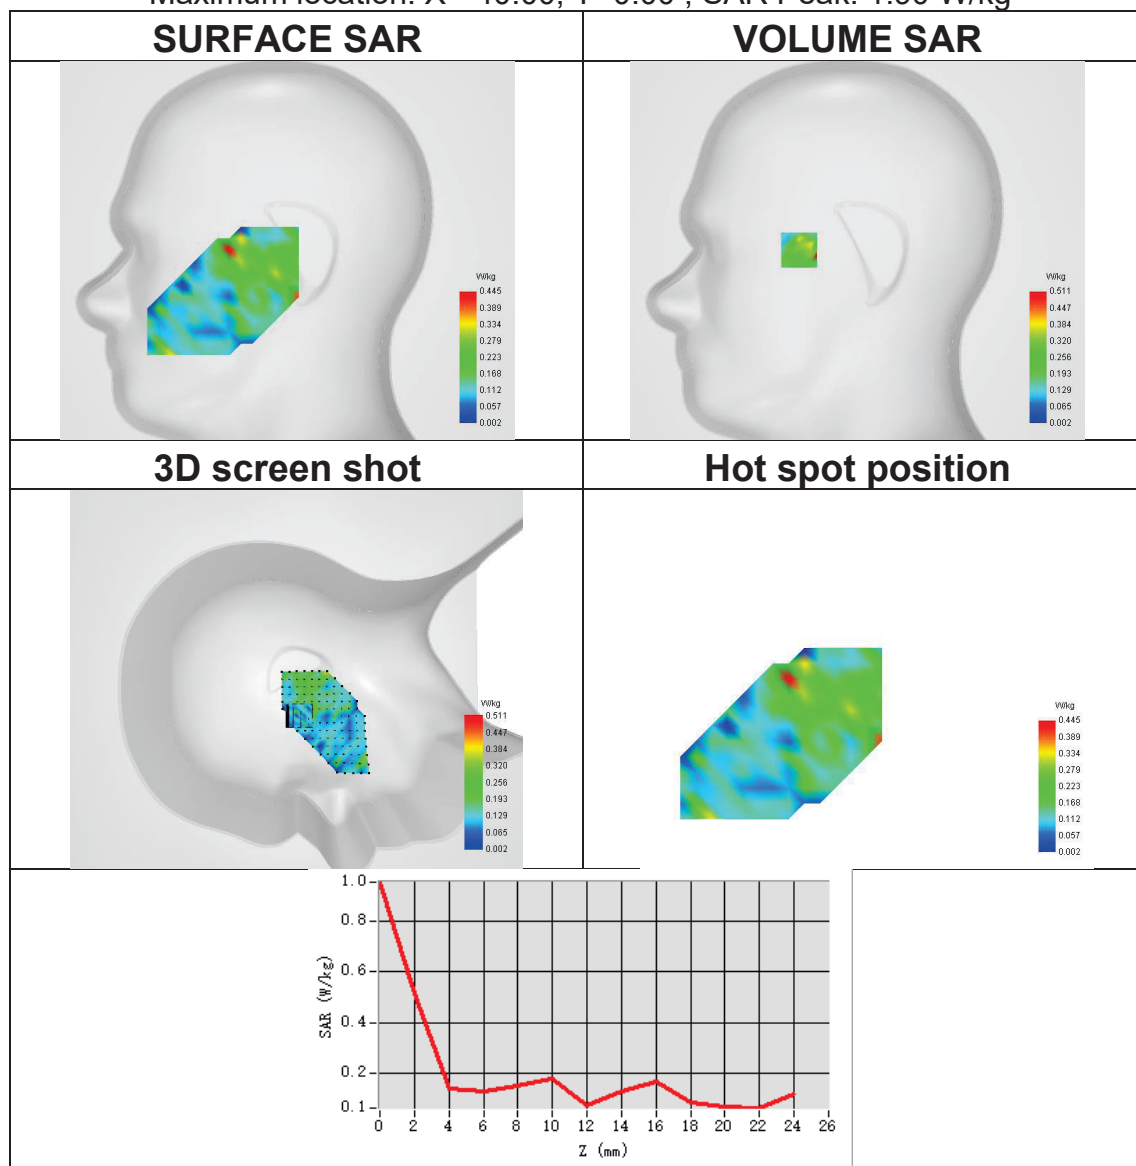




Plot 30:

Test Date	2024-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 MIMO 2
Signal	IEEE 802.11ac
Frequency	5230
SAR 10g (W/Kg)	0.166
SAR 1g (W/Kg)	0.285
ConvF	1.81
Relative permittivity	36.96
Conductivity (S/m)	4.63

Maximum location: X=6.00, Y=-32.00 ; SAR Peak: 1.28 W/kg

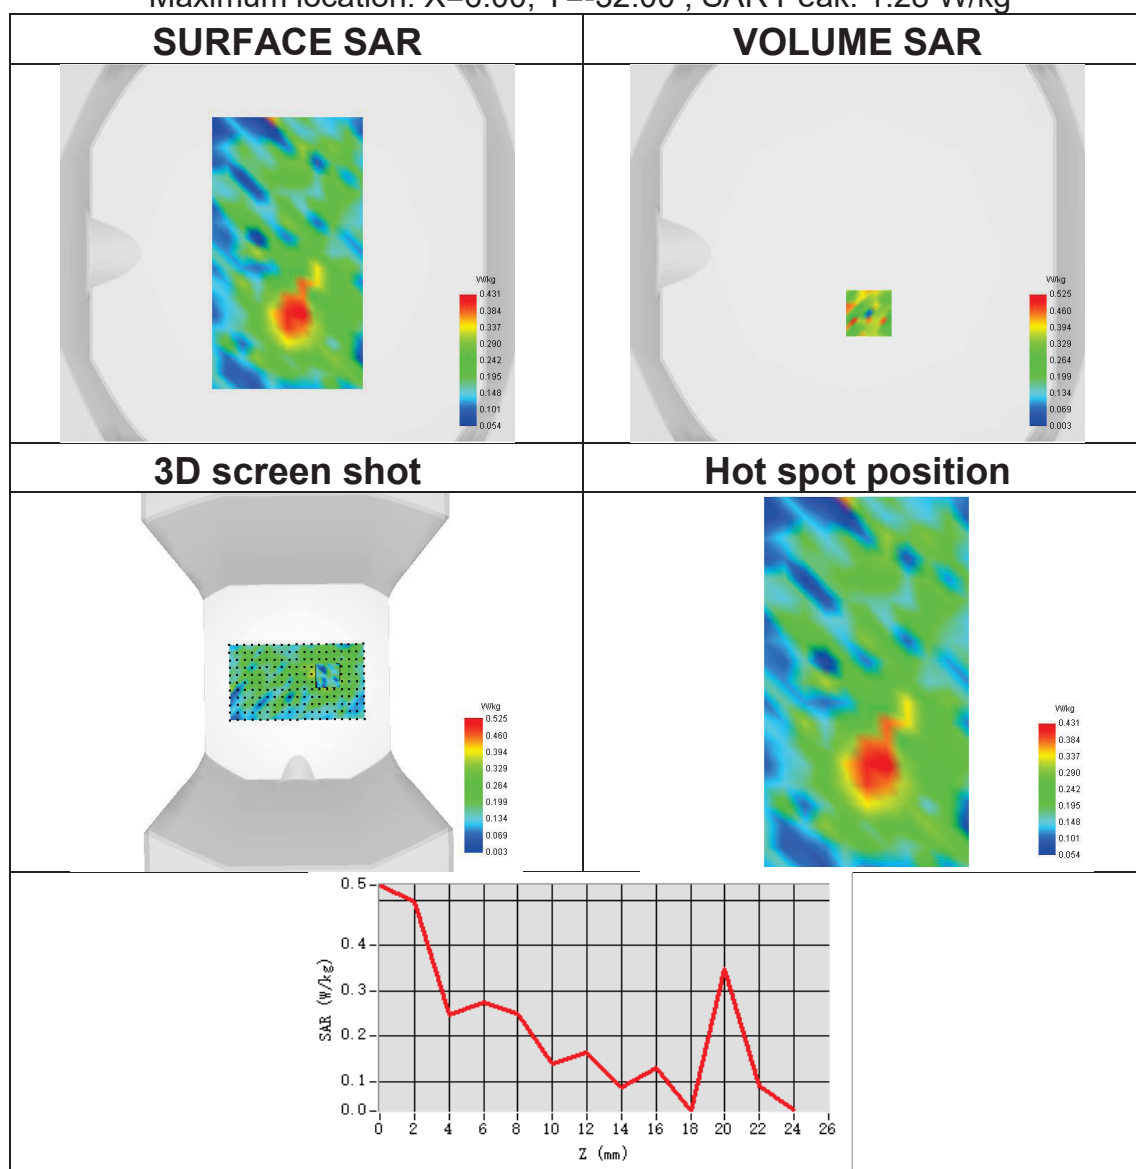




Plot 31:

Test Date	2024-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-2 ANT 1
Signal	IEEE 802.11ax
Frequency	5270
SAR 10g (W/Kg)	0.087
SAR 1g (W/Kg)	0.196
ConvF	1.83
Relative permittivity	36.66
Conductivity (S/m)	4.92

Maximum location: X=-48.00, Y=-27.00 ; SAR Peak: 1.15 W/kg

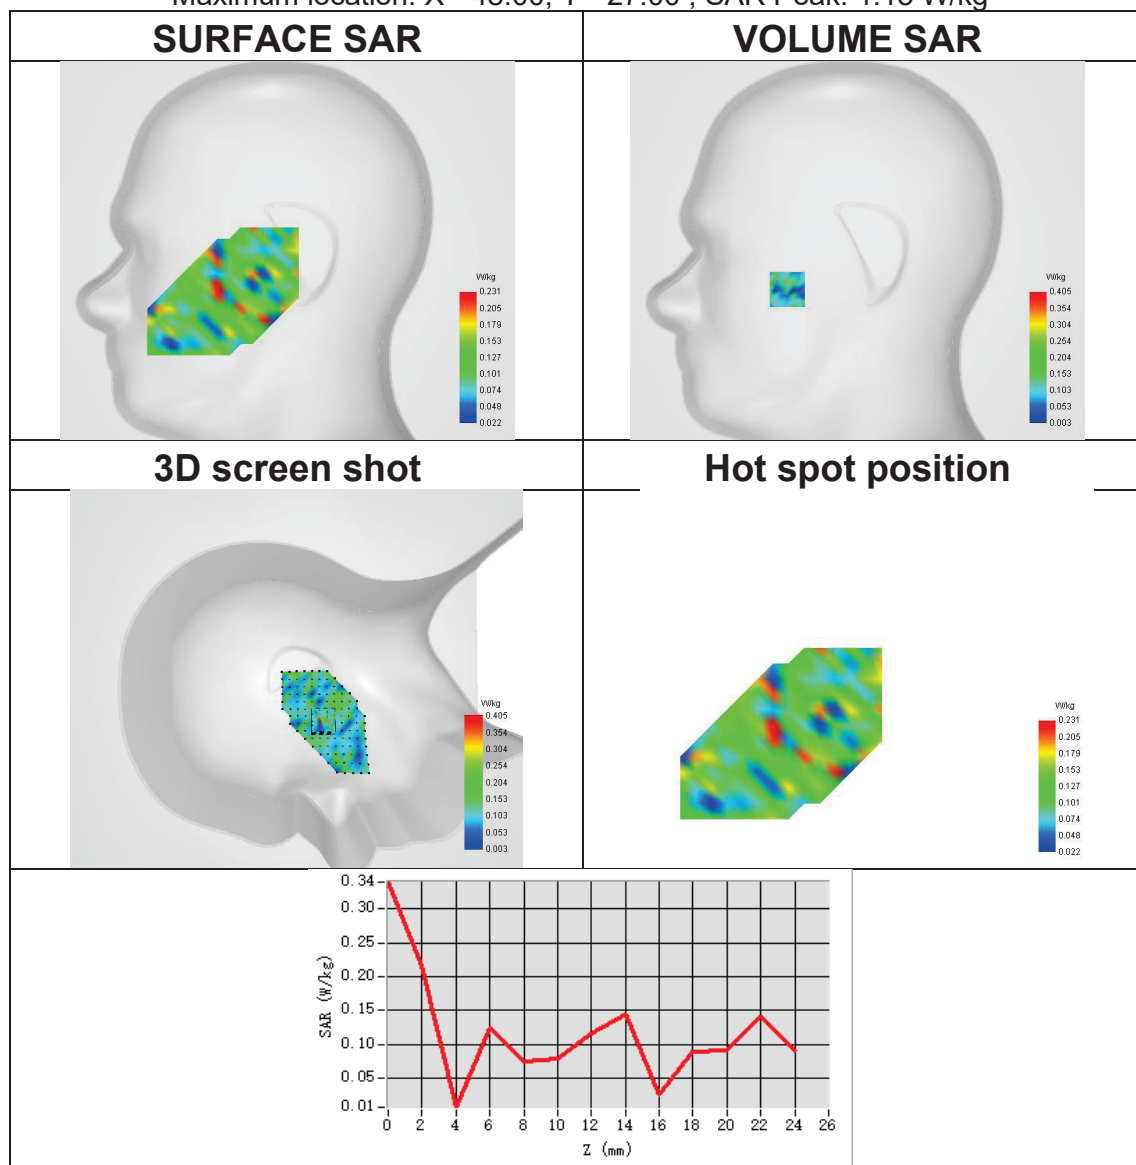




Plot 32:

Test Date	2024-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2 ANT 1
Signal	IEEE 802.11ax
Frequency	5270
SAR 10g (W/Kg)	0.170
SAR 1g (W/Kg)	0.406
ConvF	1.83
Relative permittivity	36.66
Conductivity (S/m)	4.92

Maximum location: X=-7.00, Y=23.00 ; SAR Peak: 1.36 W/kg

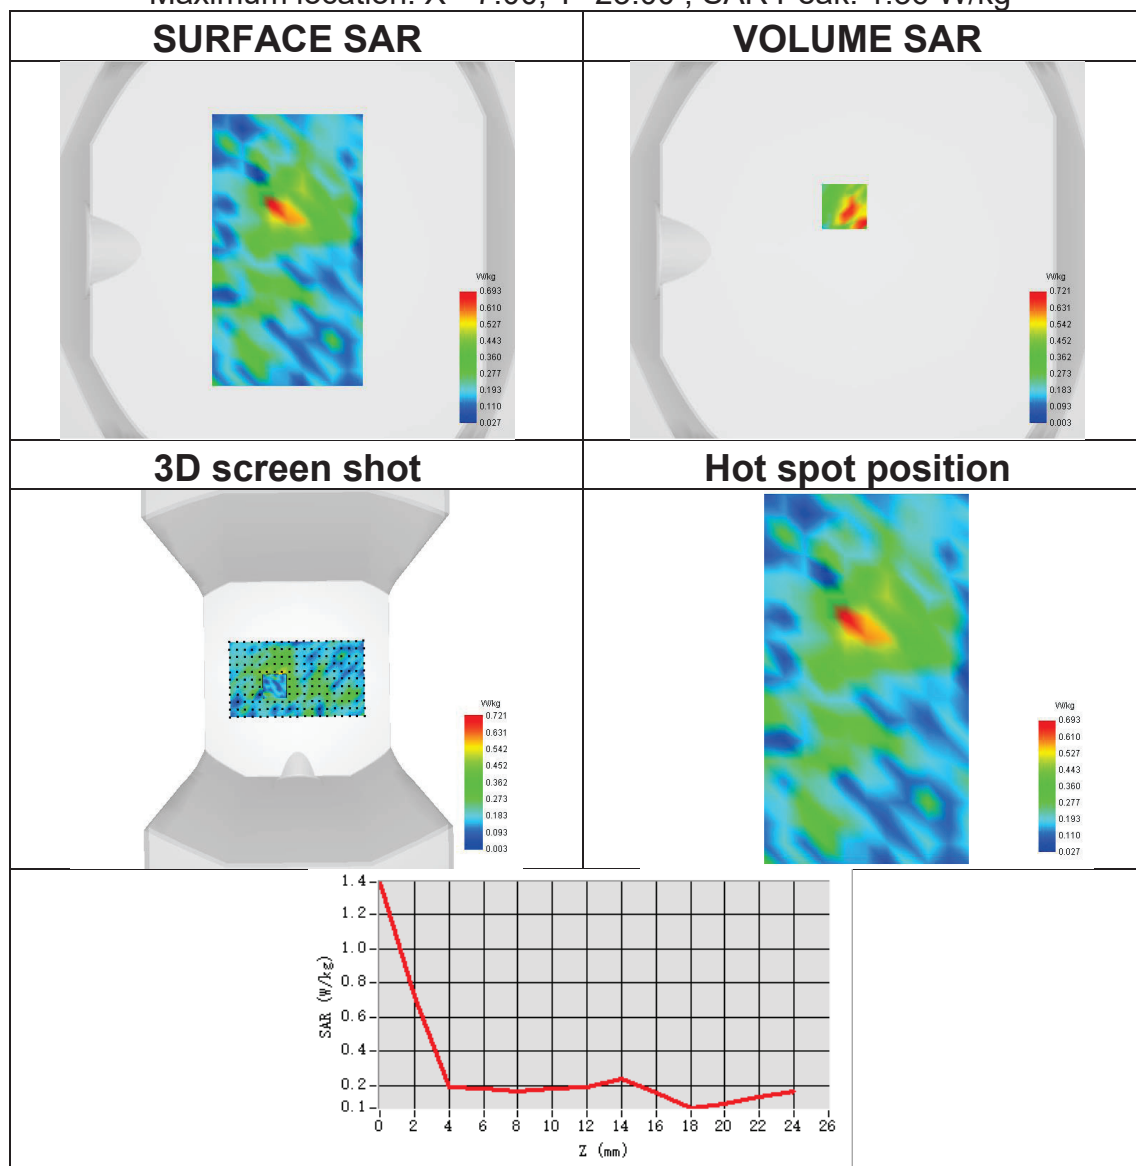




Plot 33:

Test Date	2024-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-2 ANT 2
Signal	IEEE 802.11ax
Frequency	5320
SAR 10g (W/Kg)	0.093
SAR 1g (W/Kg)	0.185
ConvF	1.83
Relative permittivity	36.66
Conductivity (S/m)	4.92

Maximum location: X=-32.00, Y=-24.00 ; SAR Peak: 1.71 W/kg

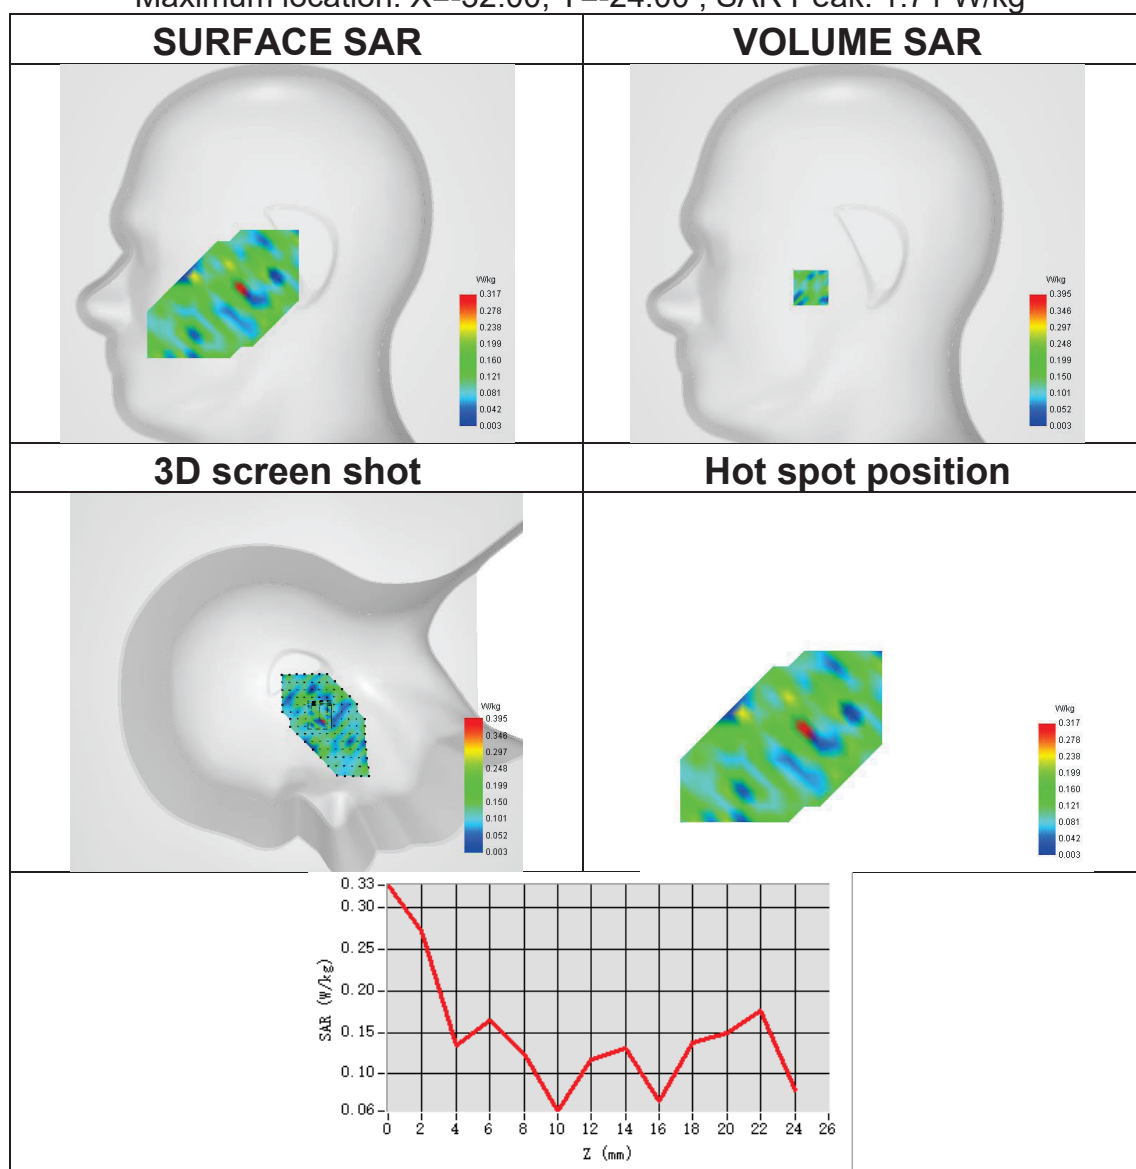




Plot 34:

Test Date	2024-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2 ANT 2
Signal	IEEE 802.11ax
Frequency	5320
SAR 10g (W/Kg)	0.108
SAR 1g (W/Kg)	0.151
ConvF	1.83
Relative permittivity	36.66
Conductivity (S/m)	4.92

Maximum location: X=16.00, Y=32.00 ; SAR Peak: 1.37 W/kg

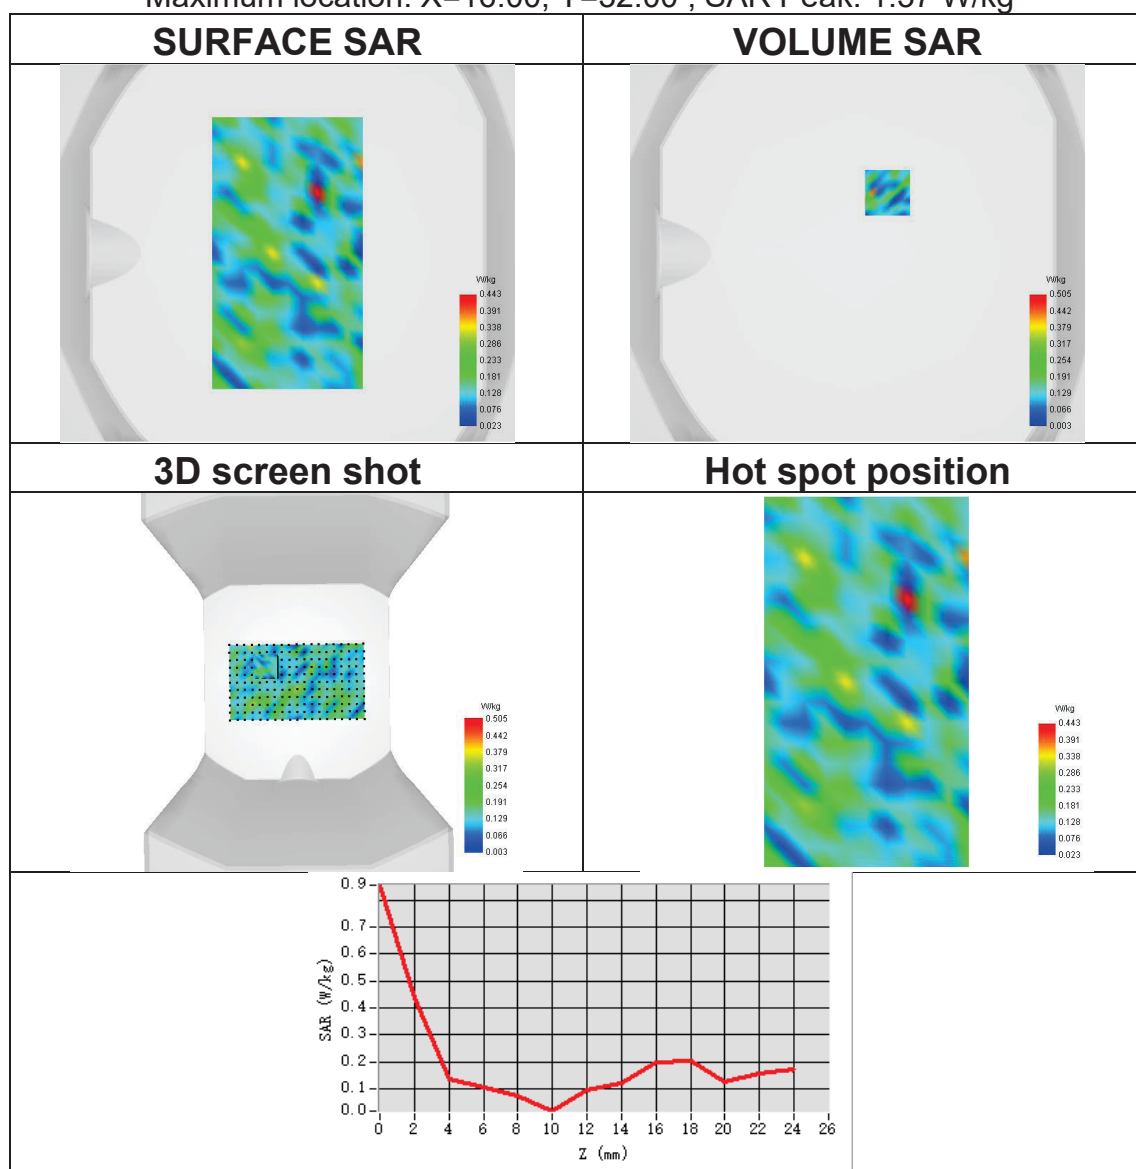




Plot 35:

Test Date	2024-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-2 MIMO 1
Signal	IEEE 802.11ax
Frequency	5320
SAR 10g (W/Kg)	0.222
SAR 1g (W/Kg)	0.715
ConvF	1.83
Relative permittivity	36.66
Conductivity (S/m)	4.92

Maximum location: X=-1.00, Y=-8.00 ; SAR Peak: 2.99 W/kg

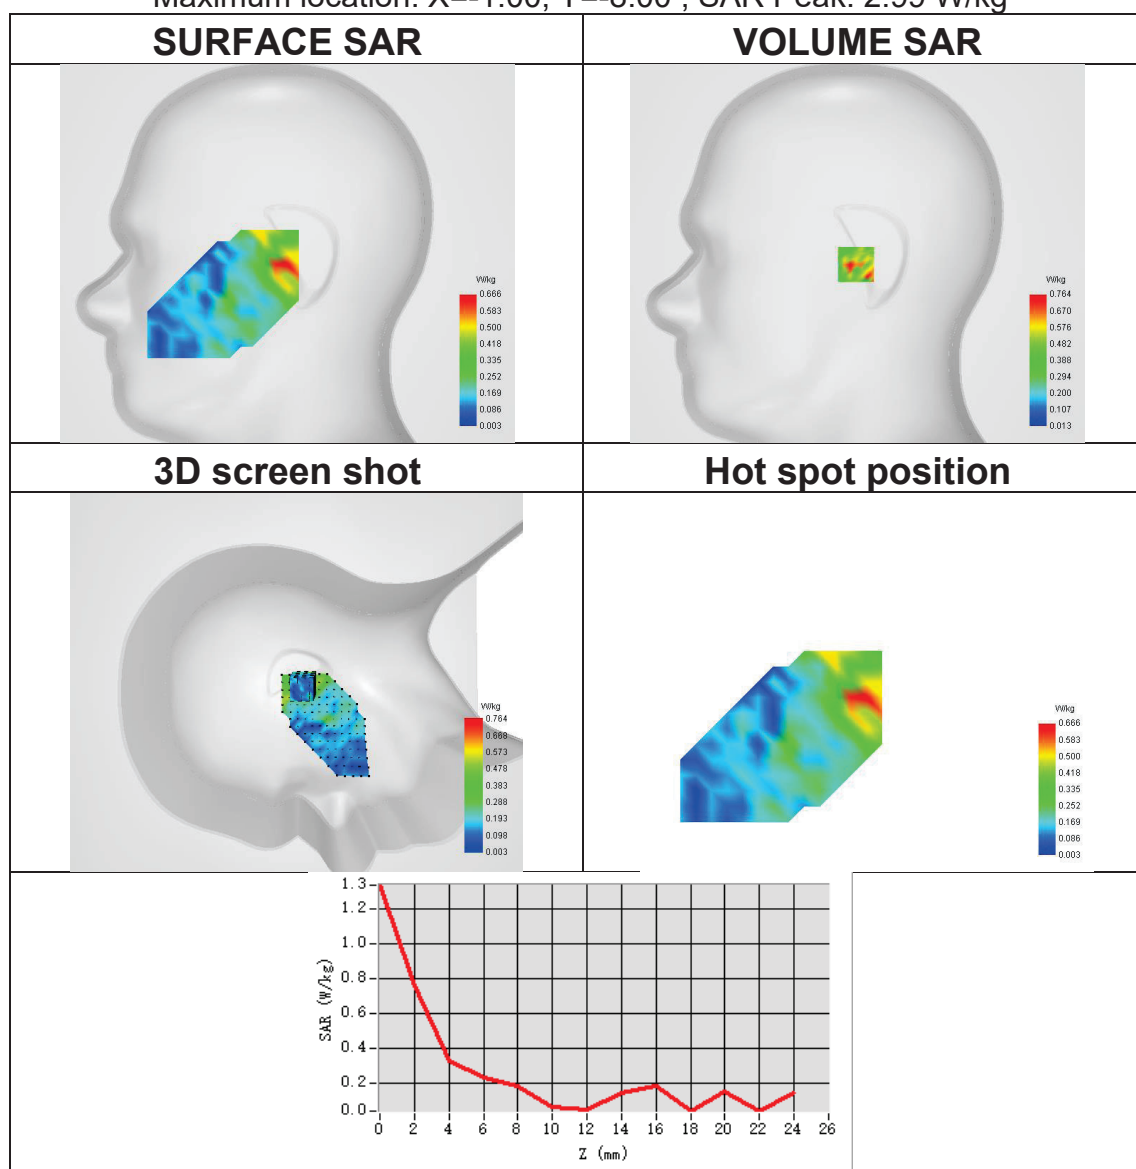




Plot 36:

Test Date	2024-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2 MIMO 1
Signal	IEEE 802.11ax
Frequency	5320
SAR 10g (W/Kg)	0.104
SAR 1g (W/Kg)	0.224
ConvF	1.83
Relative permittivity	36.66
Conductivity (S/m)	4.92

Maximum location: X=8.00, Y=32.00 ; SAR Peak: 0.91 W/kg

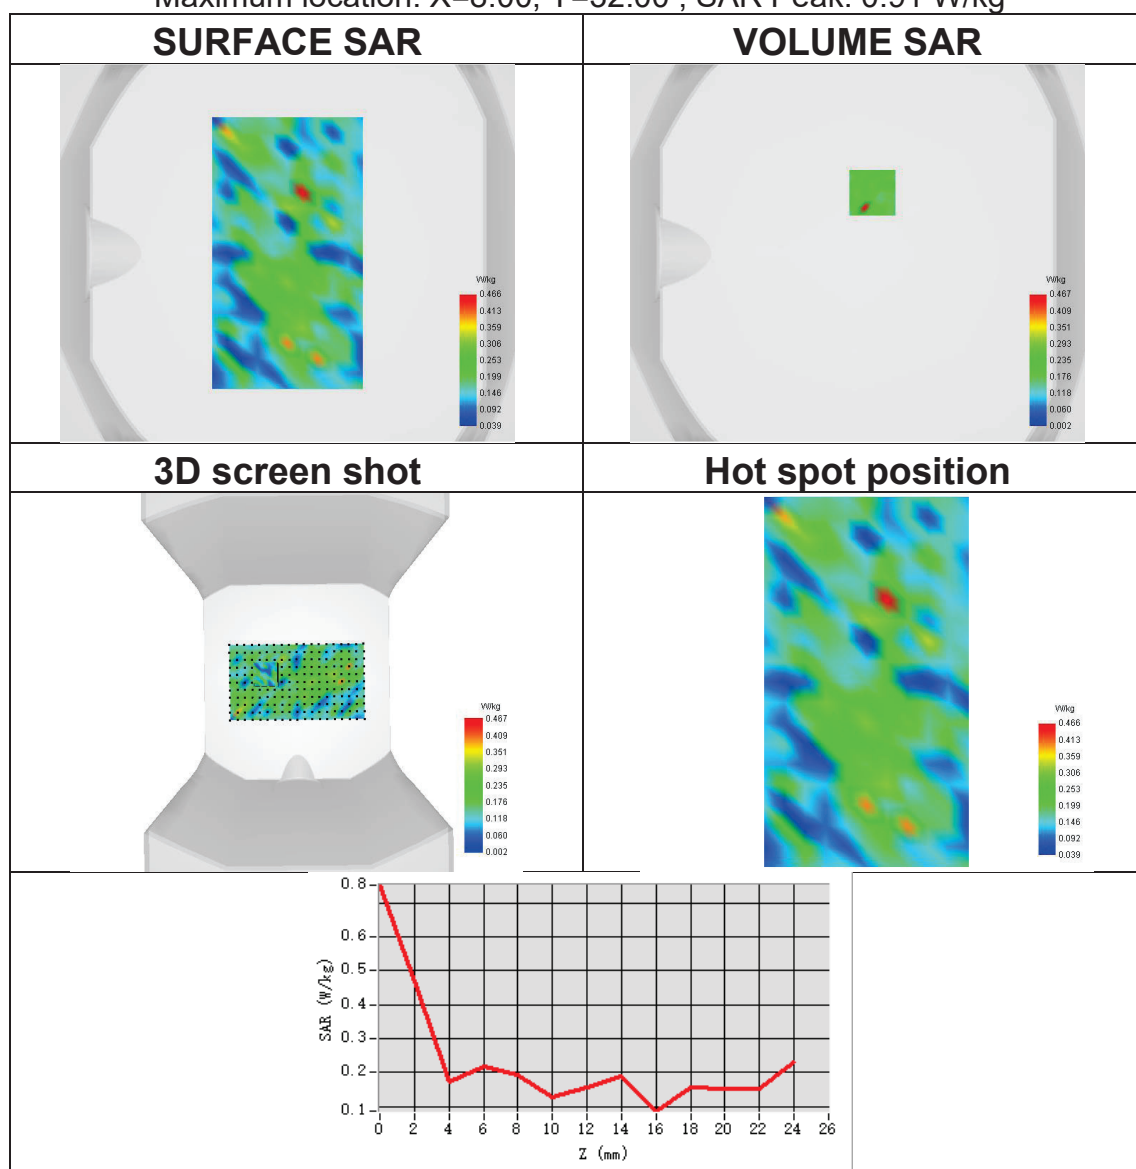




Plot 37:

Test Date	2024-05-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-2 MIMO 2
Signal	IEEE 802.11ax
Frequency	5320
SAR 10g (W/Kg)	0.079
SAR 1g (W/Kg)	0.238
ConvF	1.83
Relative permittivity	37.03
Conductivity (S/m)	4.88

Maximum location: X=-72.00, Y=-40.00 ; SAR Peak: 1.21 W/kg

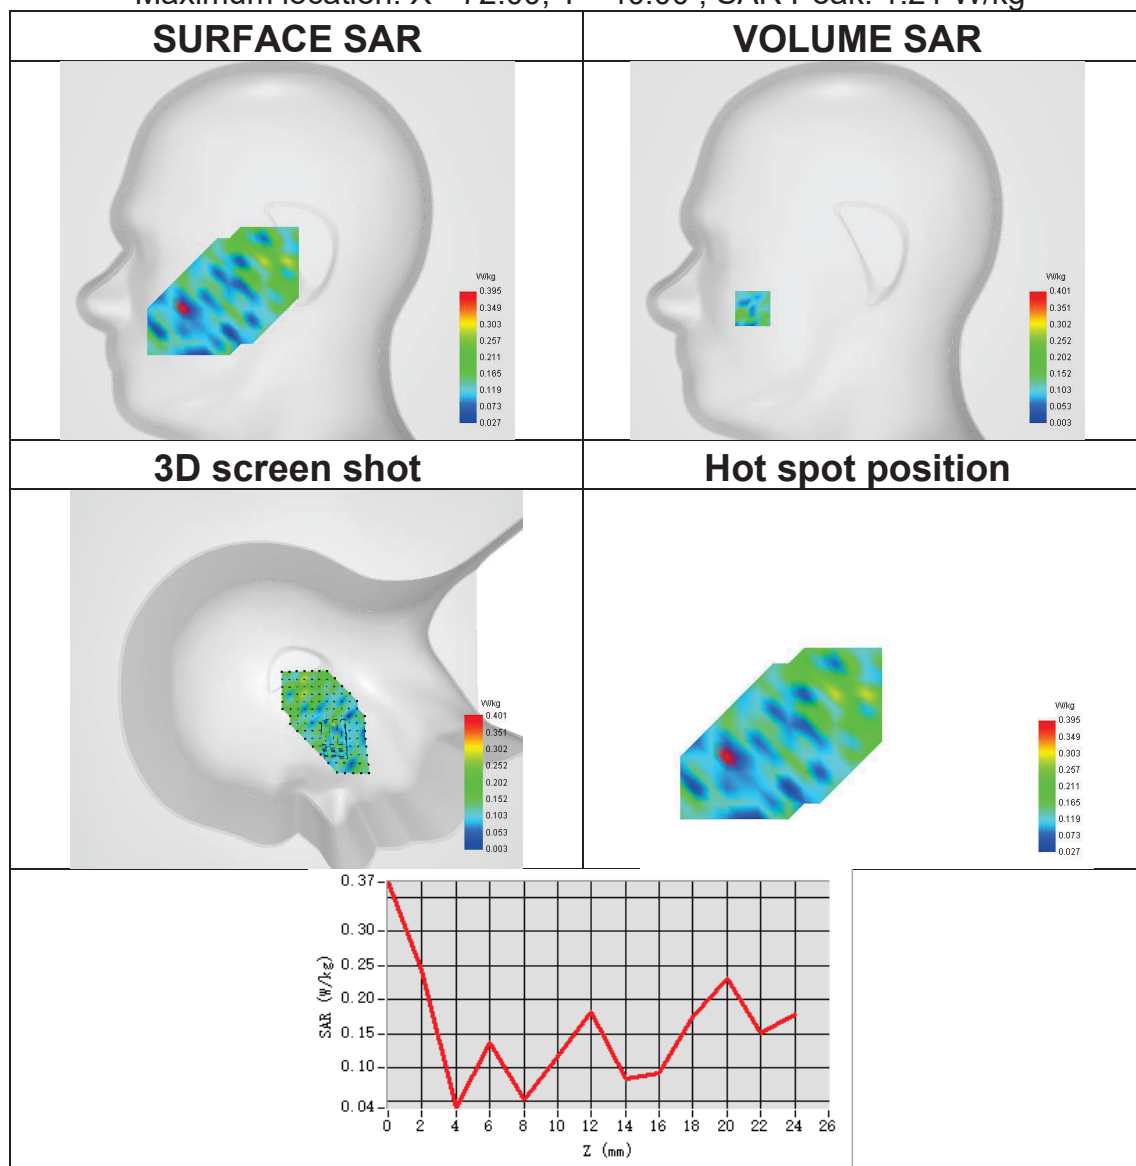




Plot 38:

Test Date	2024-05-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2 MIMO 2
Signal	IEEE 802.11ax
Frequency	5320
SAR 10g (W/Kg)	0.133
SAR 1g (W/Kg)	0.286
ConvF	1.83
Relative permittivity	37.03
Conductivity (S/m)	4.88

Maximum location: X=7.00, Y=-23.00 ; SAR Peak: 1.60 W/kg

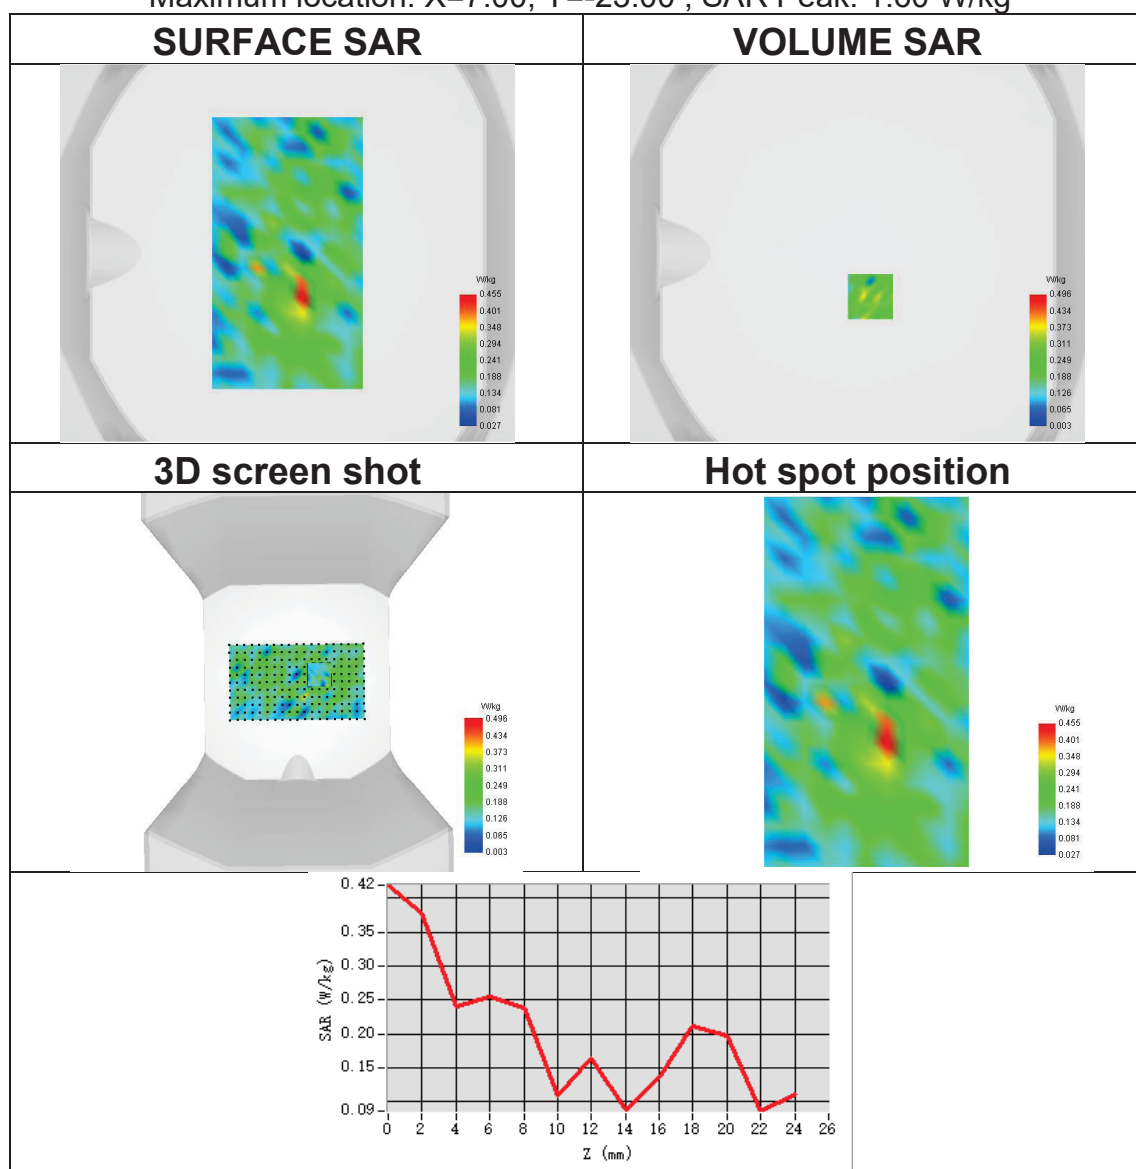




Plot 39:

Test Date	2024-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-3 ANT 1
Signal	IEEE 802.11ac
Frequency	5700
SAR 10g (W/Kg)	0.136
SAR 1g (W/Kg)	0.216
ConvF	1.86
Relative permittivity	36.32
Conductivity (S/m)	5.05

Maximum location: X=-32.00, Y=-8.00 ; SAR Peak: 1.66 W/kg

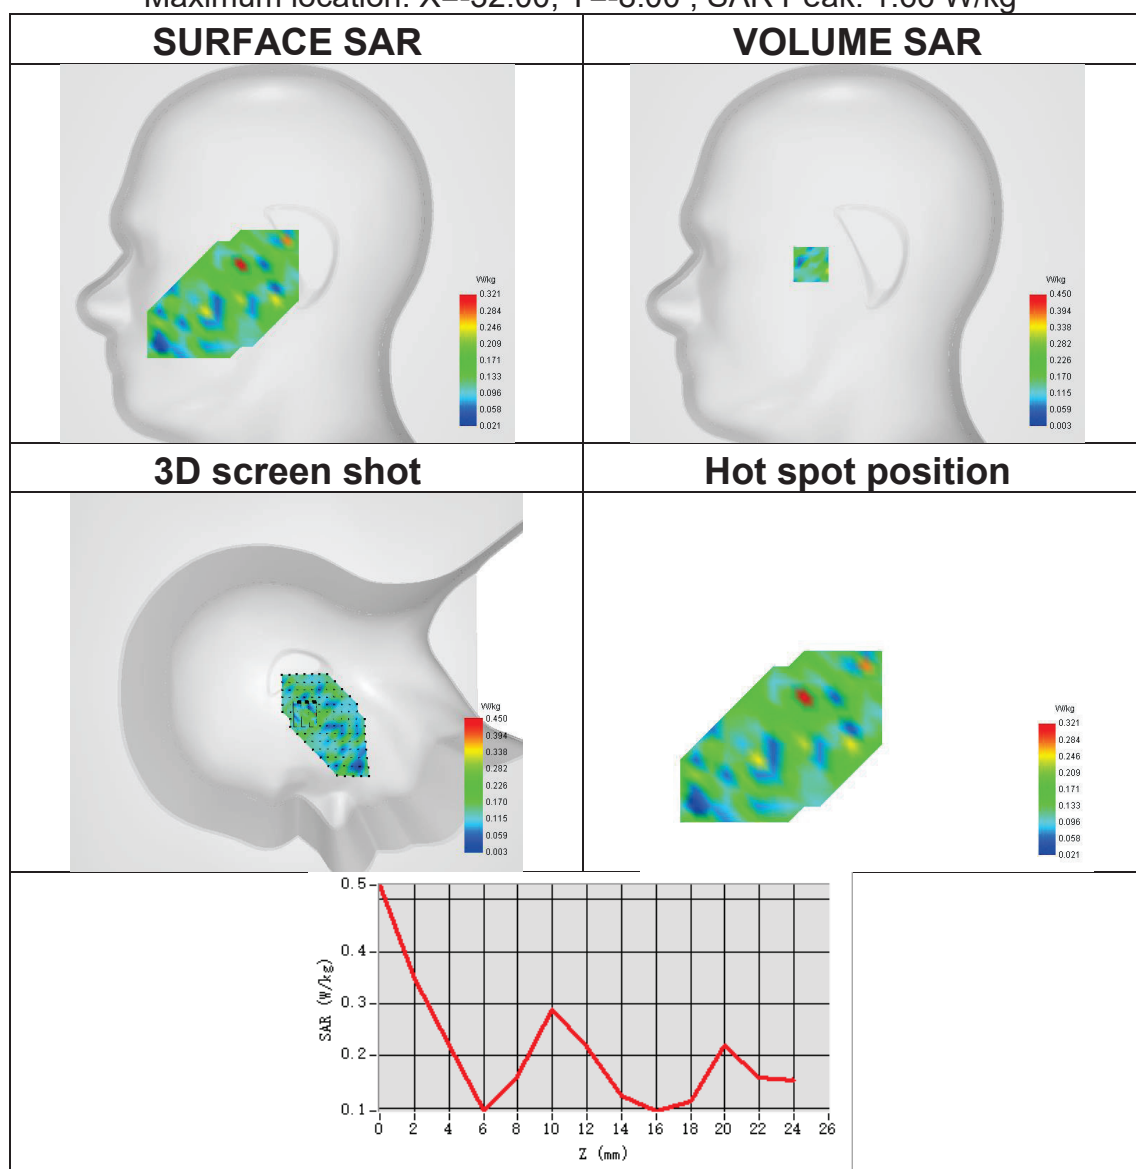




Plot 40:

Test Date	2024-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 ANT 1
Signal	IEEE 802.11ac
Frequency	5700
SAR 10g (W/Kg)	0.308
SAR 1g (W/Kg)	0.739
ConvF	1.86
Relative permittivity	36.32
Conductivity (S/m)	5.05

Maximum location: X=9.00, Y=34.00 ; SAR Peak: 2.18 W/kg

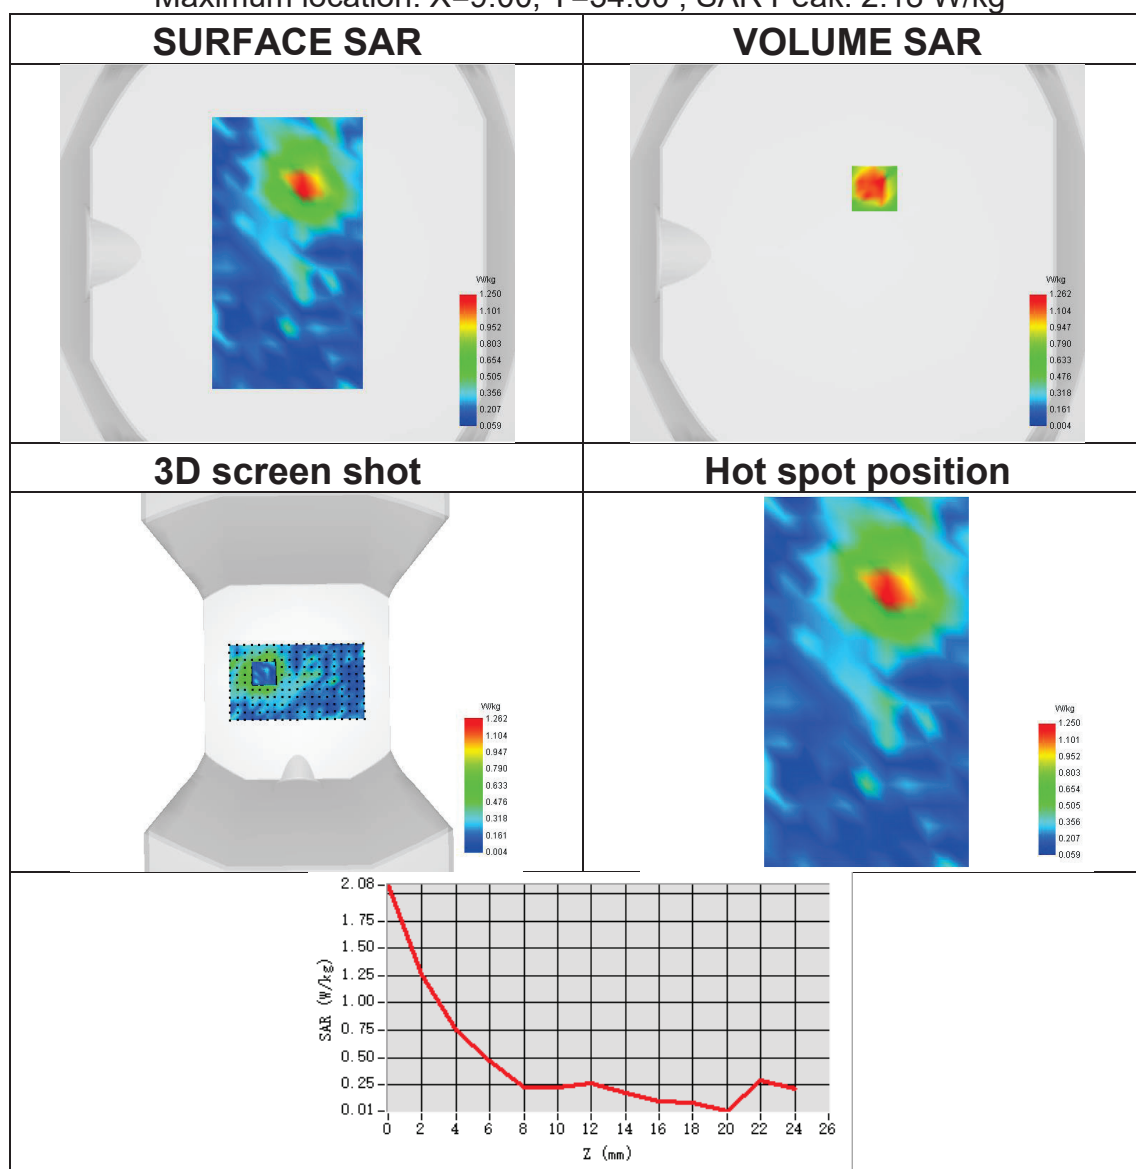




Plot 41:

Test Date	2024-05-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-3 ANT 2
Signal	IEEE 802.11ac
Frequency	5580
SAR 10g (W/Kg)	0.151
SAR 1g (W/Kg)	0.320
ConvF	1.86
Relative permittivity	35.94
Conductivity (S/m)	5.06

Maximum location: X=-16.00, Y=6.00 ; SAR Peak: 2.06 W/kg

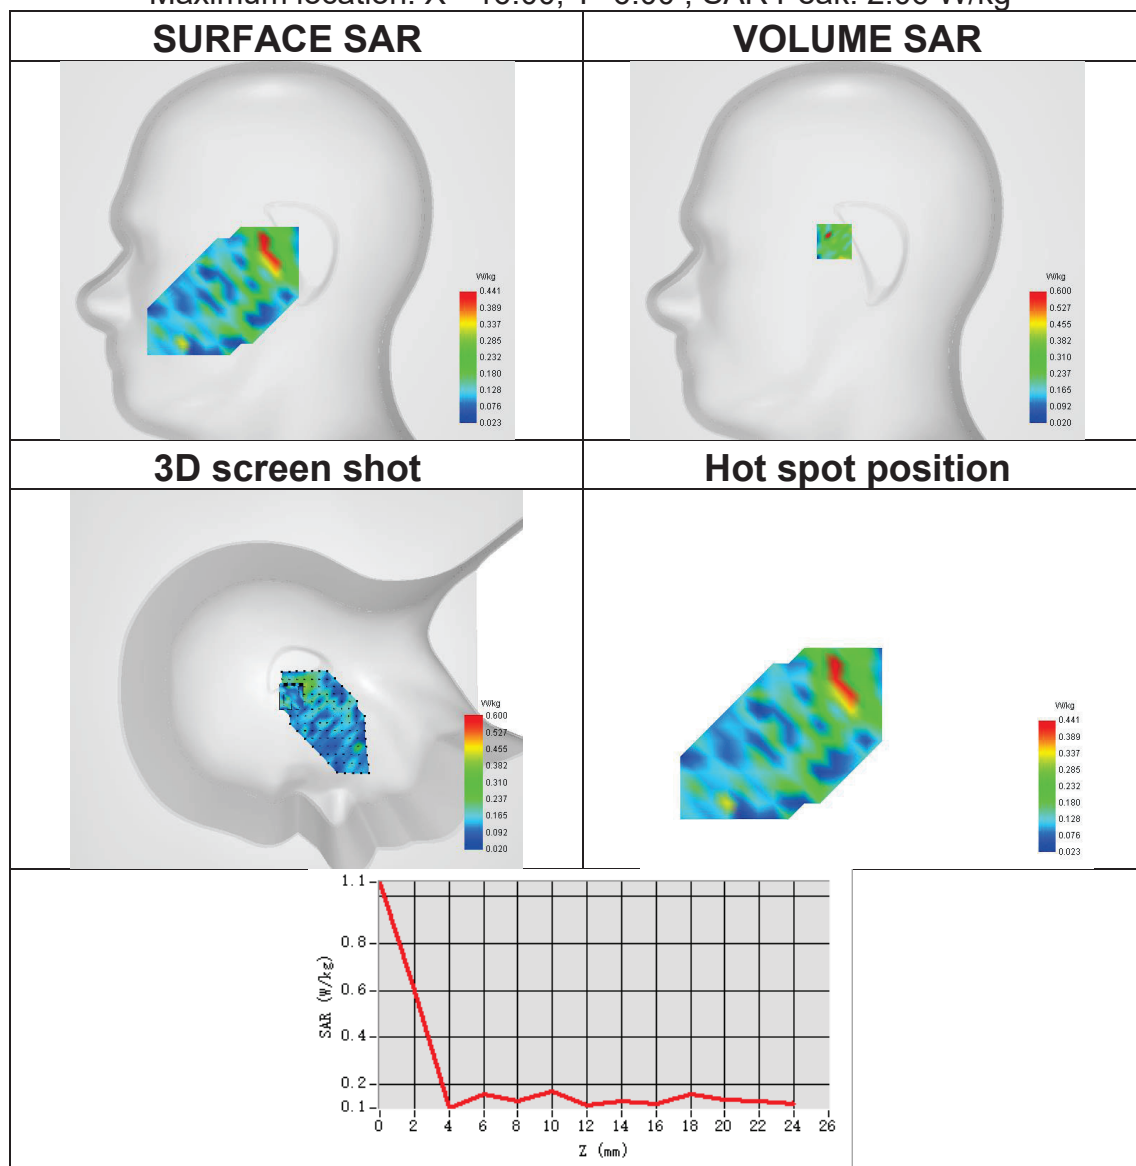




Plot 42:

Test Date	2024-05-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 ANT 2
Signal	IEEE 802.11ac
Frequency	5580
SAR 10g (W/Kg)	0.154
SAR 1g (W/Kg)	0.334
ConvF	1.86
Relative permittivity	35.94
Conductivity (S/m)	5.06


Maximum location: X=0.00, Y=-25.00 ; SAR Peak: 1.27 W/kg

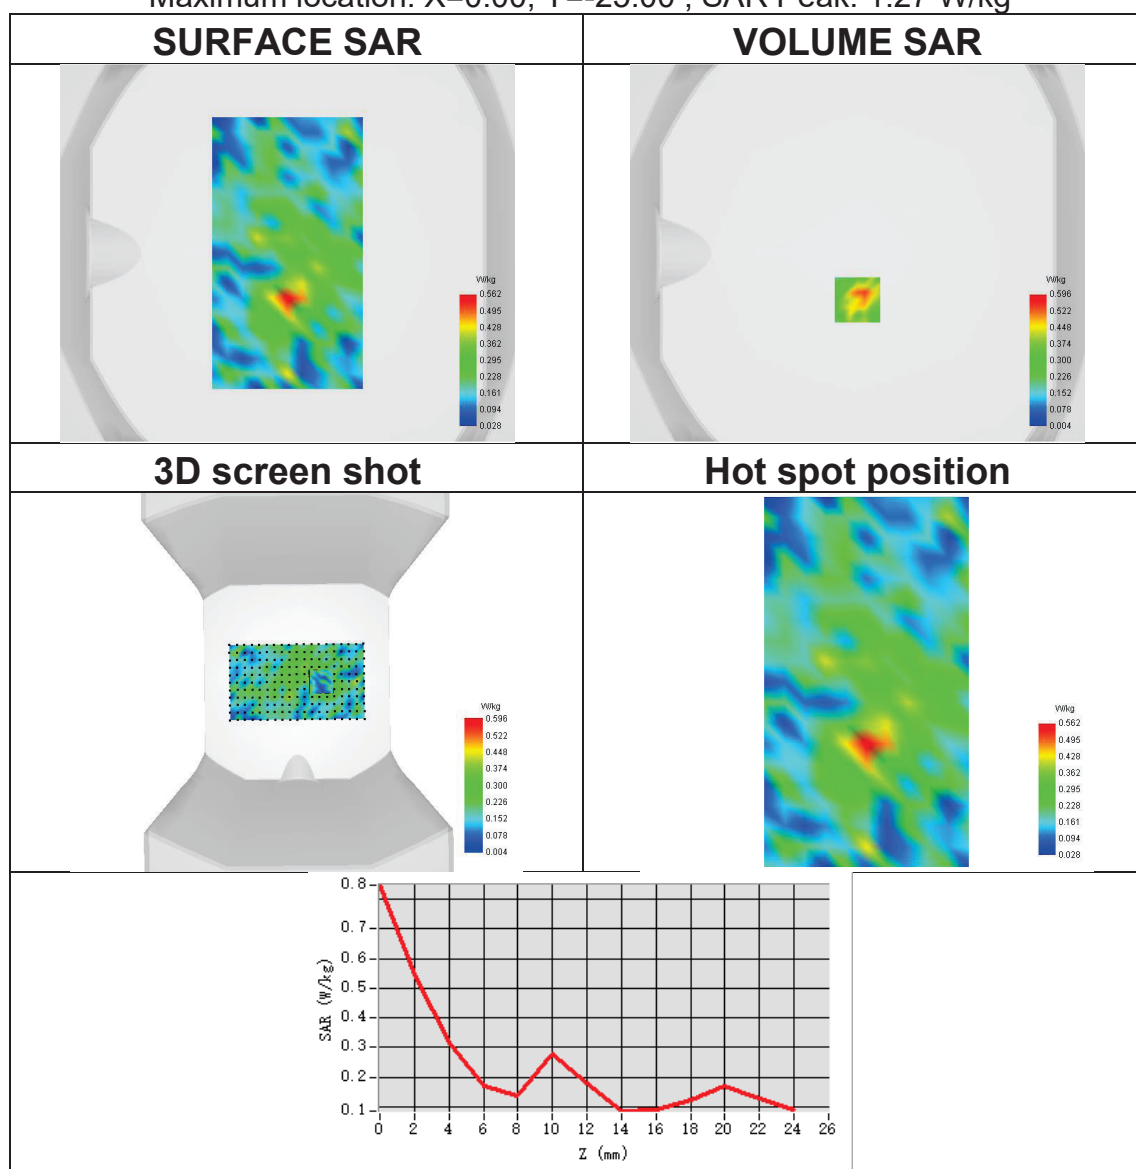

Plot 43:

Test Date	2024-05-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-3 MIMO 1
Signal	IEEE 802.11ax
Frequency	5510
SAR 10g (W/Kg)	0.142
SAR 1g (W/Kg)	0.270
ConvF	1.86
Relative permittivity	35.94
Conductivity (S/m)	5.06

Maximum location: X=-24.00, Y=8.00 ; SAR Peak: 1.69 W/kg

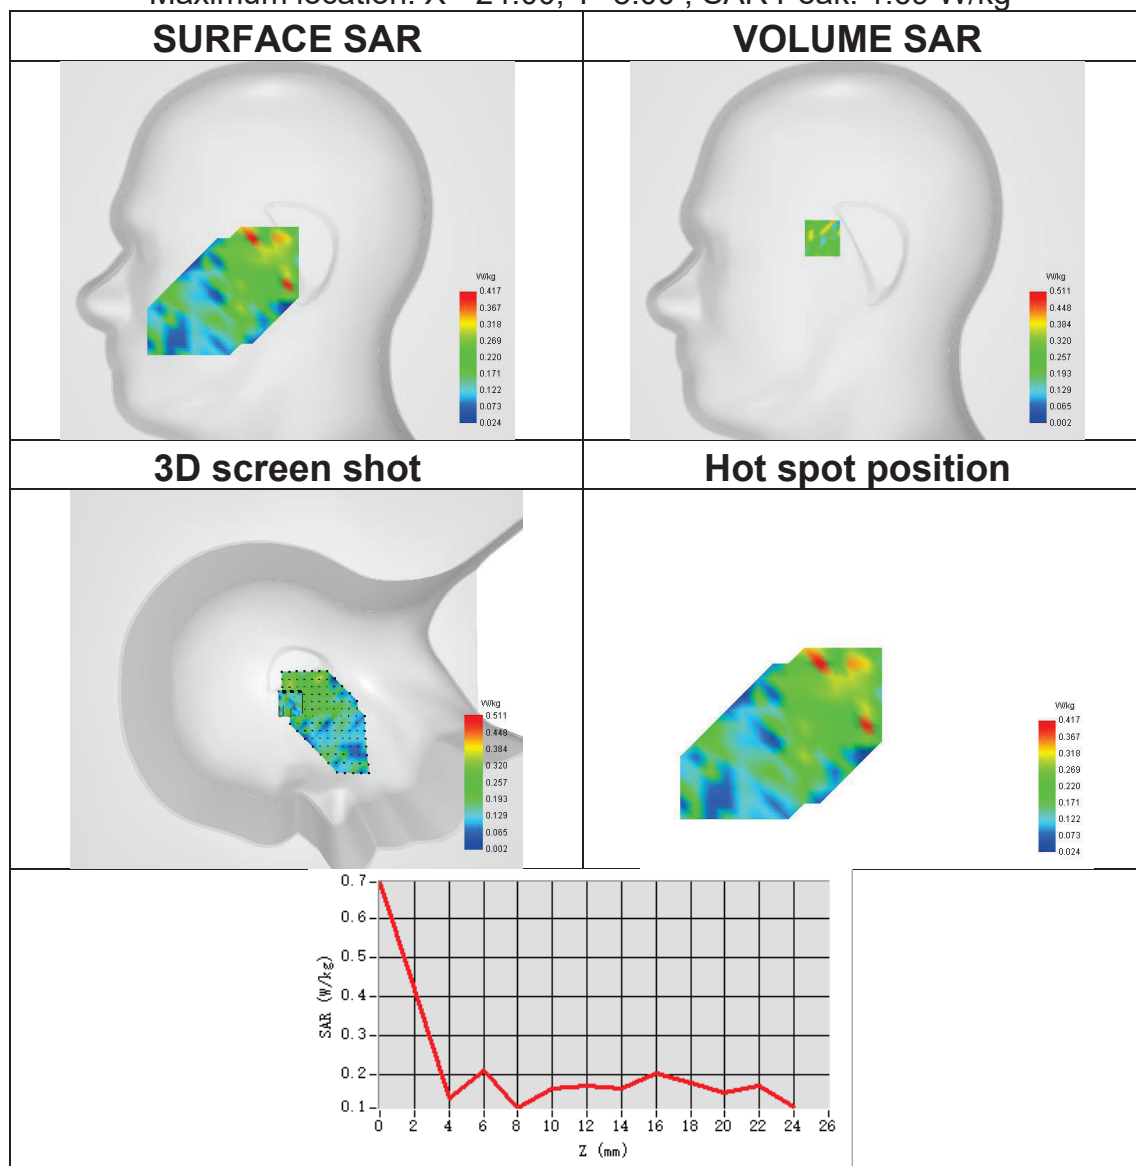




Plot 44:

Test Date	2024-05-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 MIMO 1
Signal	IEEE 802.11ax
Frequency	5510
SAR 10g (W/Kg)	0.140
SAR 1g (W/Kg)	0.251
ConvF	1.86
Relative permittivity	35.94
Conductivity (S/m)	5.06

Maximum location: X=0.00, Y=-31.00 ; SAR Peak: 1.31 W/kg

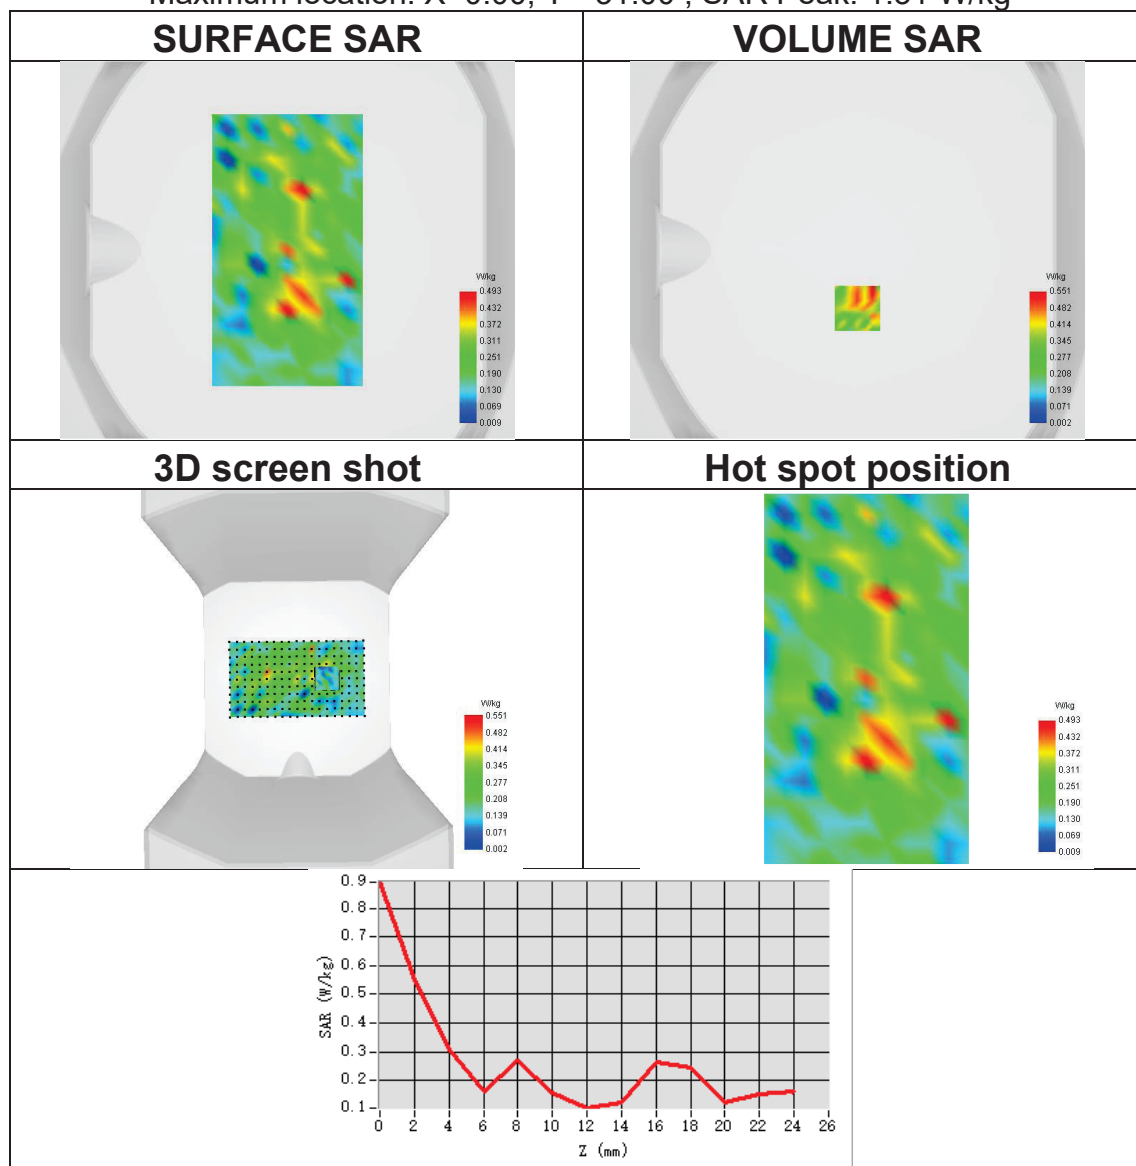




Plot 45:

Test Date	2024-05-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-3 MIMO 2
Signal	IEEE 802.11ax
Frequency	5510
SAR 10g (W/Kg)	0.134
SAR 1g (W/Kg)	0.252
ConvF	1.86
Relative permittivity	35.94
Conductivity (S/m)	5.06

Maximum location: X=-24.00, Y=0.00 ; SAR Peak: 1.88 W/kg

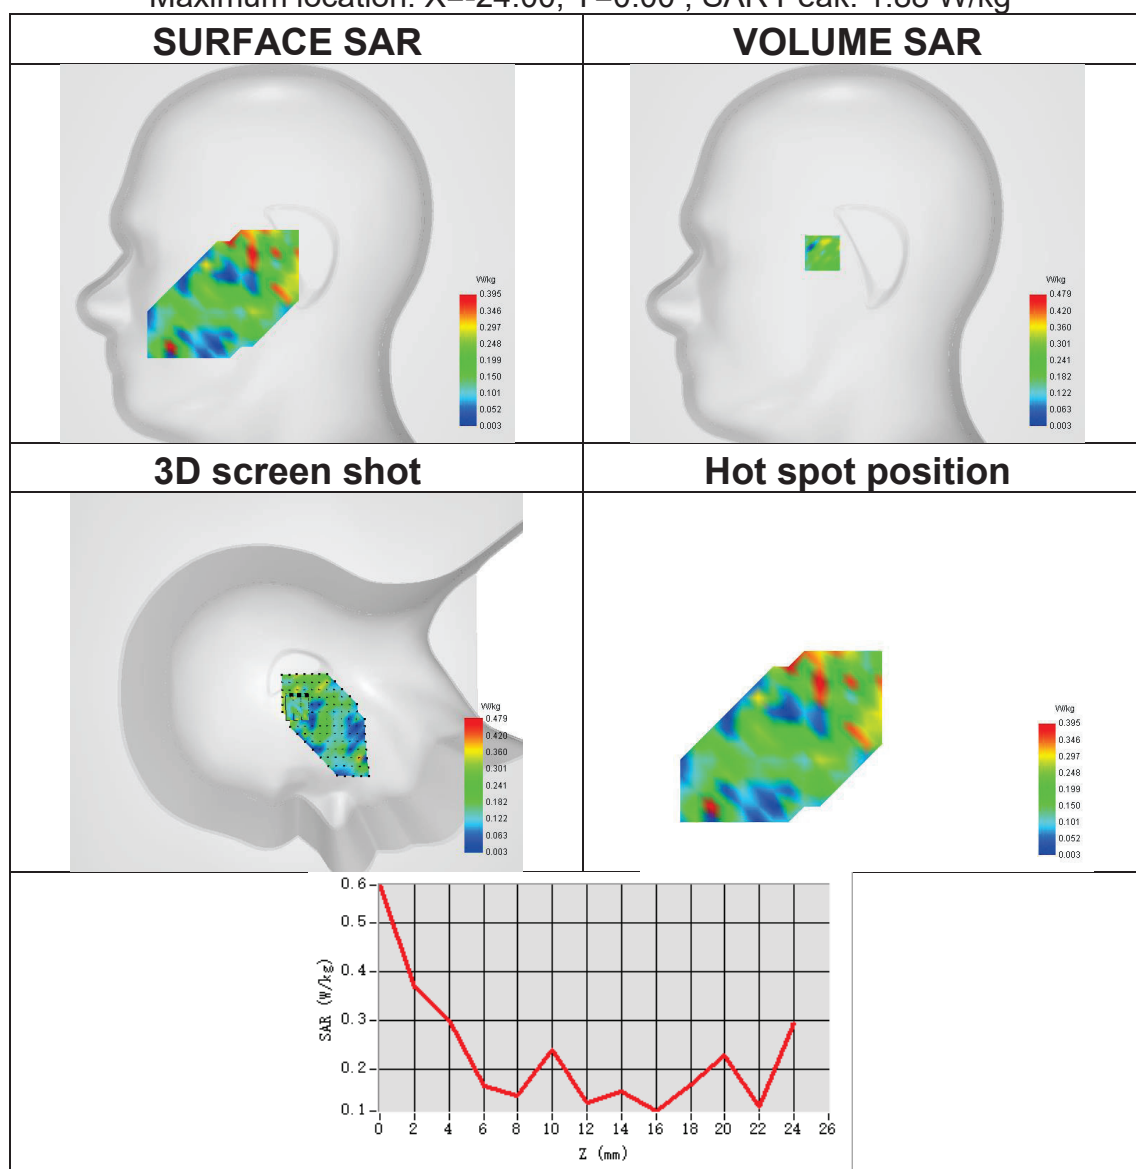



Plot 46:

Test Date	2024-05-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3 MIMO 2
Signal	IEEE 802.11ax
Frequency	5510
SAR 10g (W/Kg)	0.184
SAR 1g (W/Kg)	0.378
ConvF	1.86
Relative permittivity	35.94
Conductivity (S/m)	5.06

Maximum location: X=1.00, Y=-31.00 ; SAR Peak: 1.65 W/kg

