




Plot 38:

Test Date	2023-05-23
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.193
SAR 1g (W/Kg)	0.405

Maximum location: X=-9.00, Y=-24.00 ; SAR Peak: 0.79 W/kg

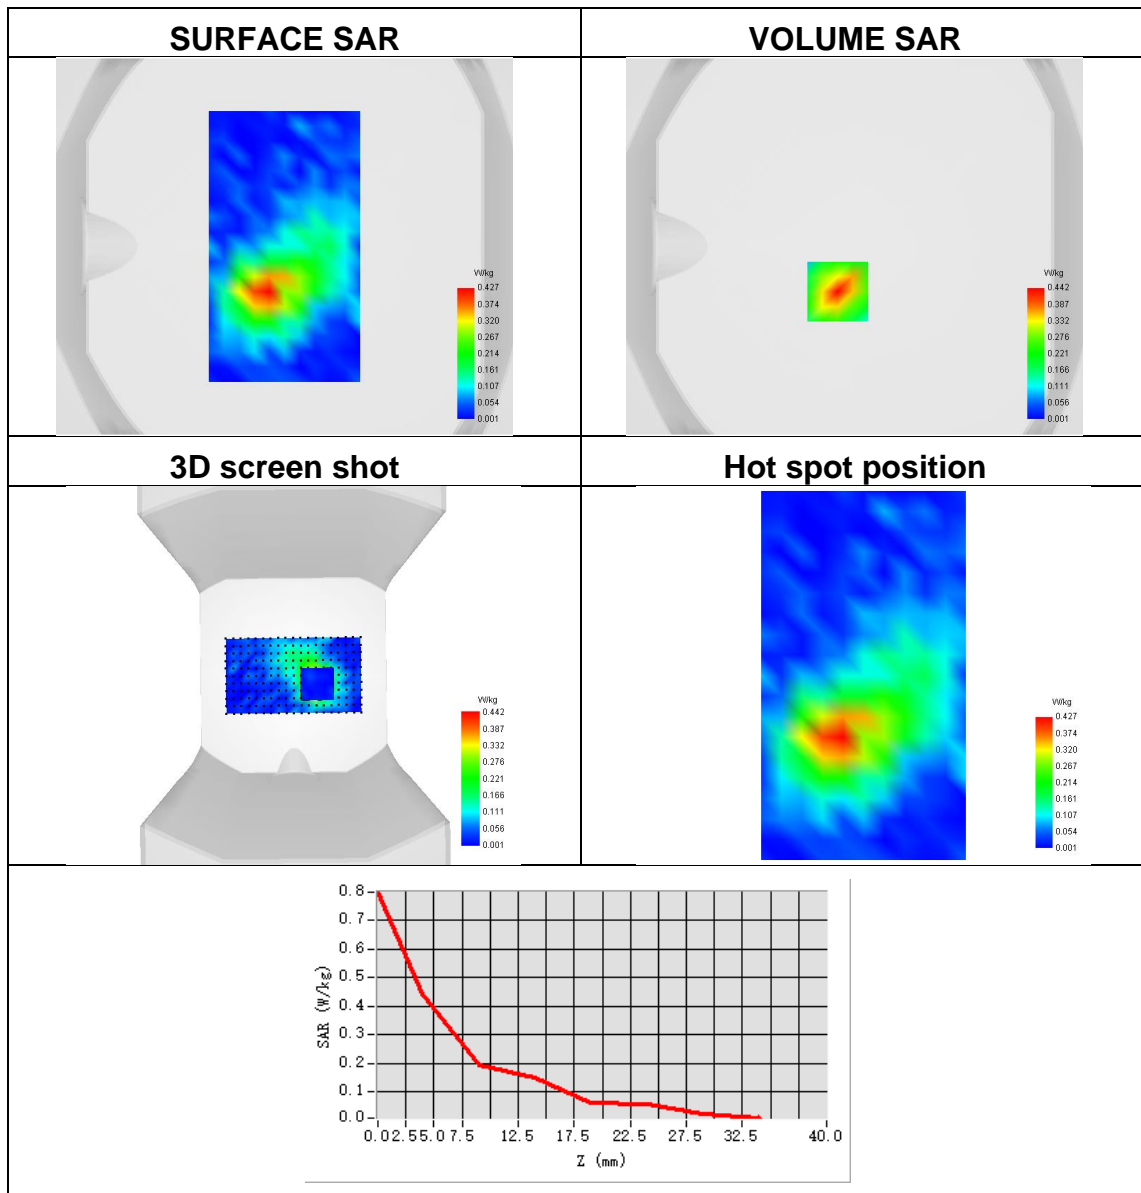




Plot 39:

Test Date	2023-05-19
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.023
SAR 1g (W/Kg)	0.060

Maximum location: X=-80.00, Y=-48.00 ; SAR Peak: 0.17 W/kg

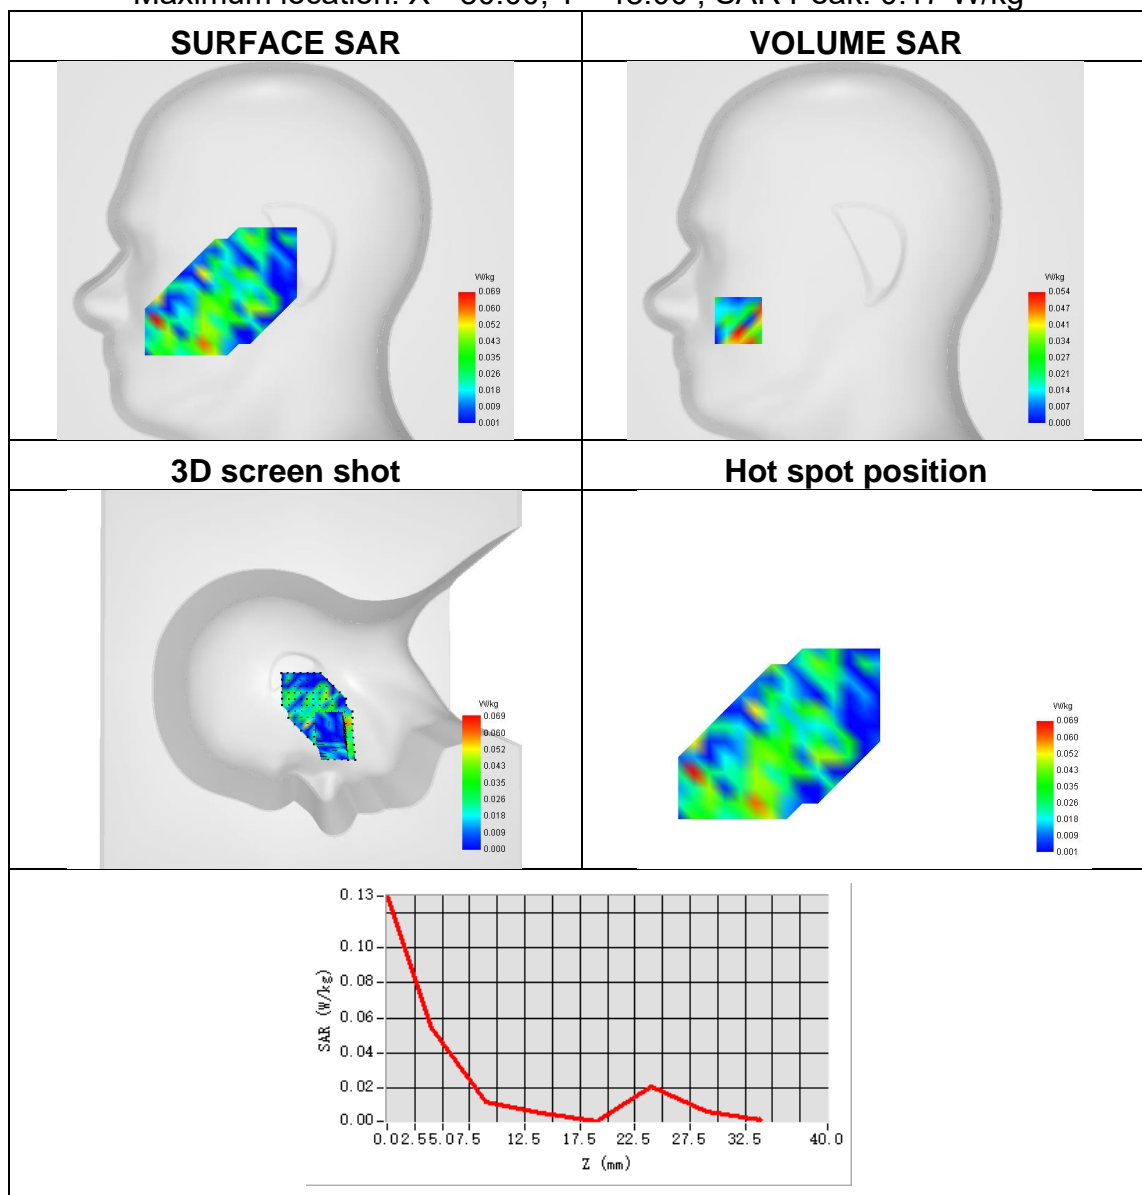




Plot 40:

Test Date	2023-05-19
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.224
SAR 1g (W/Kg)	0.412

Maximum location: X=7.00, Y=18.00 ; SAR Peak: 1.11 W/kg

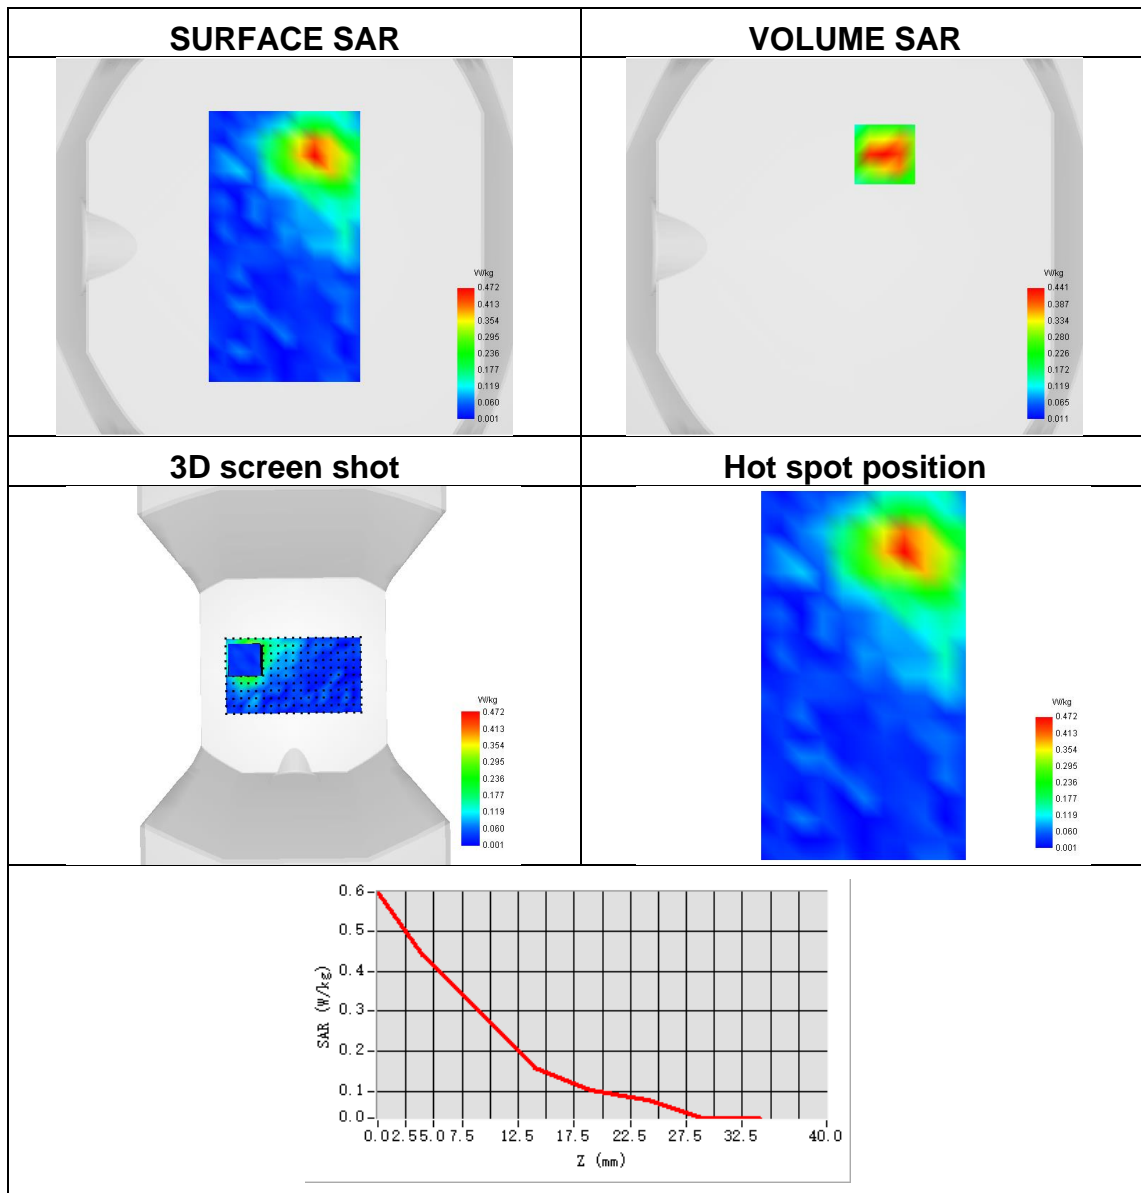




Plot 41:

Test Date	2023-05-22
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11b ISM
Signal	IEEE 802.11
Frequency	2441
SAR 10g (W/Kg)	0.129
SAR 1g (W/Kg)	0.256

Maximum location: X=-24.00, Y=-9.00 ; SAR Peak: 0.48 W/kg

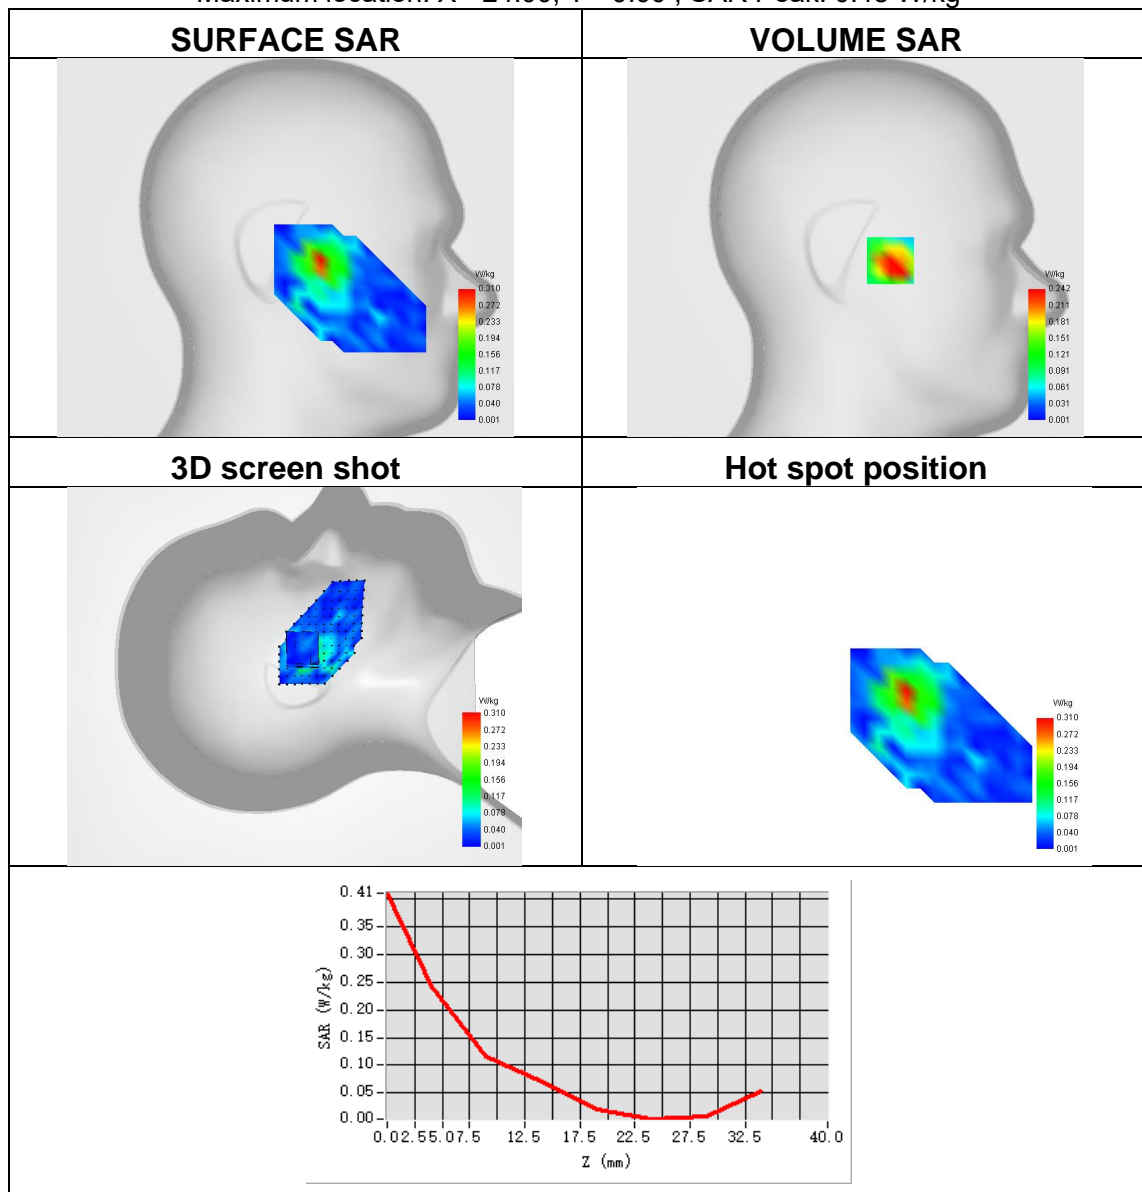




Plot 42:

Test Date	2023-05-22
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	IEEE 802.11b ISM
Signal	IEEE 802.11
Frequency	2441
SAR 10g (W/Kg)	0.050
SAR 1g (W/Kg)	0.118

Maximum location: X=9.00, Y=-2.00 ; SAR Peak: 0.32 W/kg

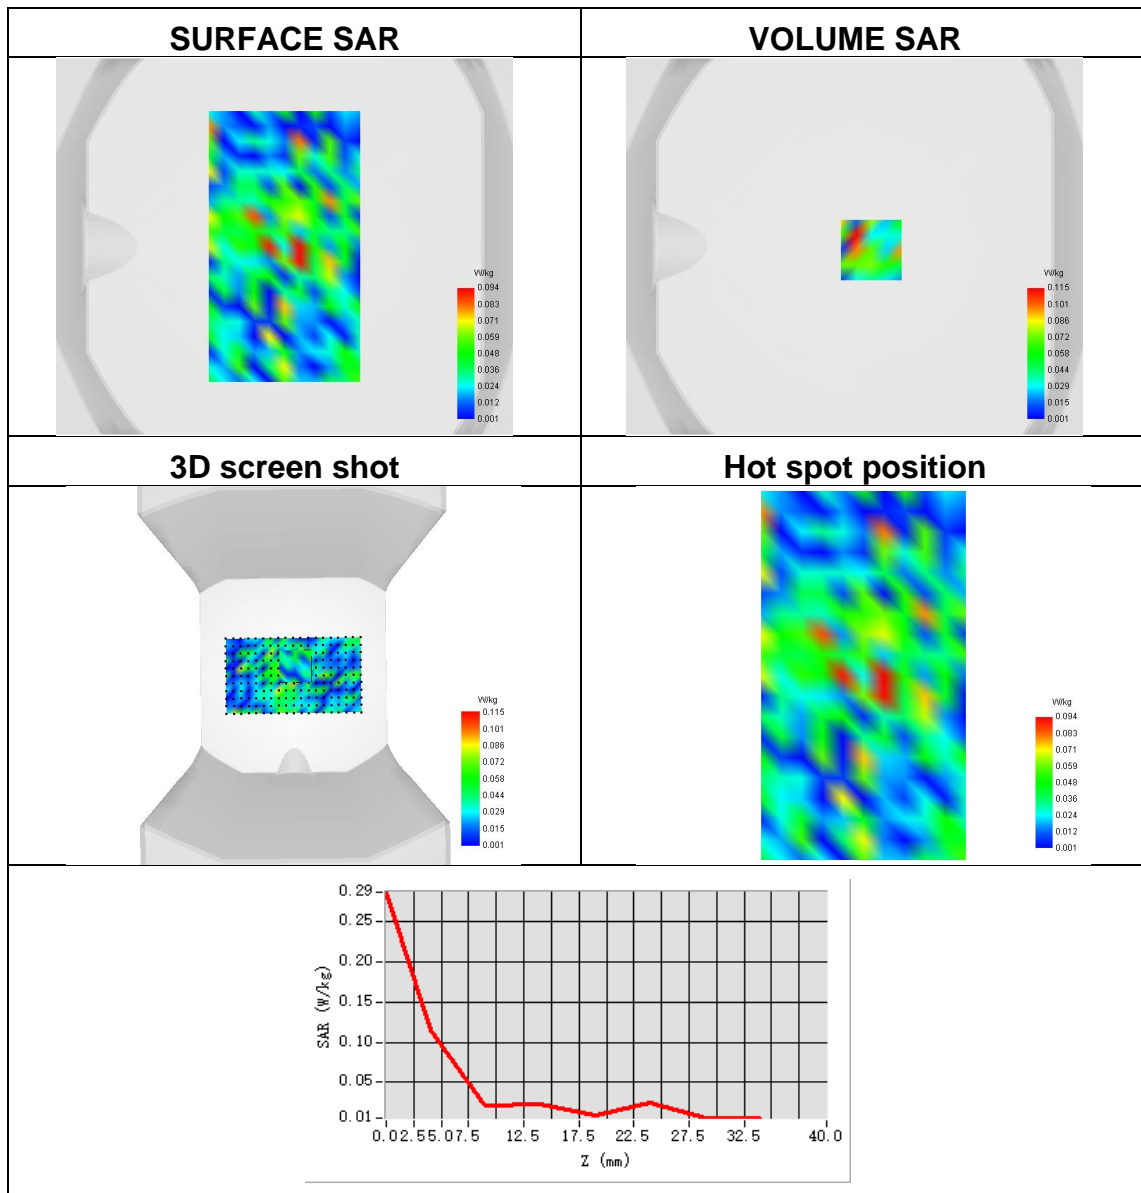




Plot 43:

Test Date	2023-05-22
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Bluetooth
Signal	GFSK
Frequency	2441
SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.235

Maximum location: X=-30.00, Y=-40.00 ; SAR Peak: 0.39 W/kg

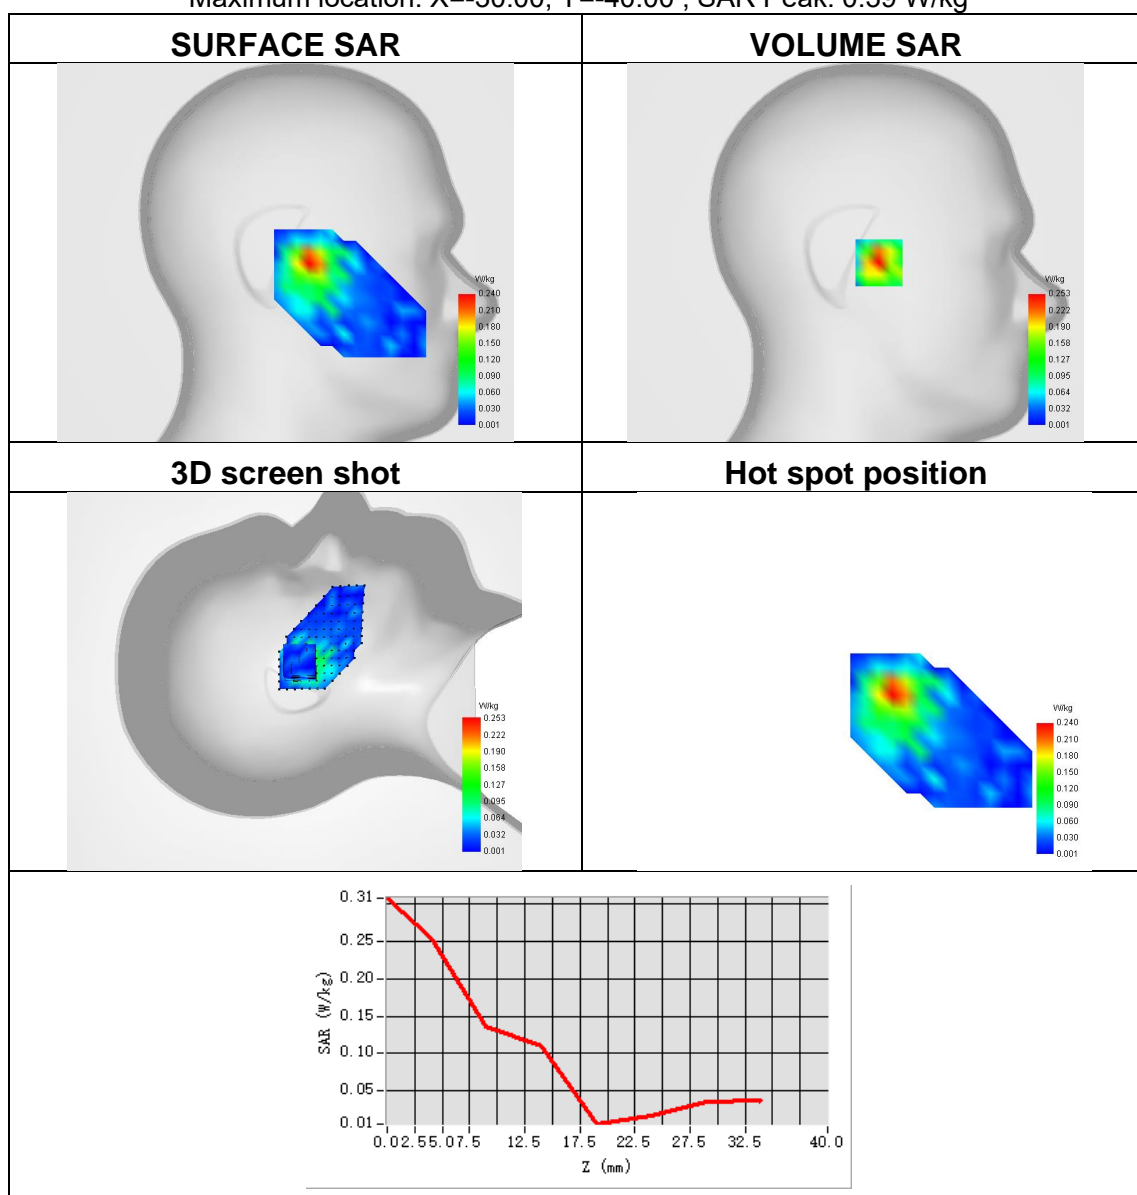




Plot 44:

Test Date	2023-05-22
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	Bluetooth
Signal	GFSK
Frequency	2441
SAR 10g (W/Kg)	0.044
SAR 1g (W/Kg)	0.111

Maximum location: X=-8.00, Y=17.00 ; SAR Peak: 0.35 W/kg

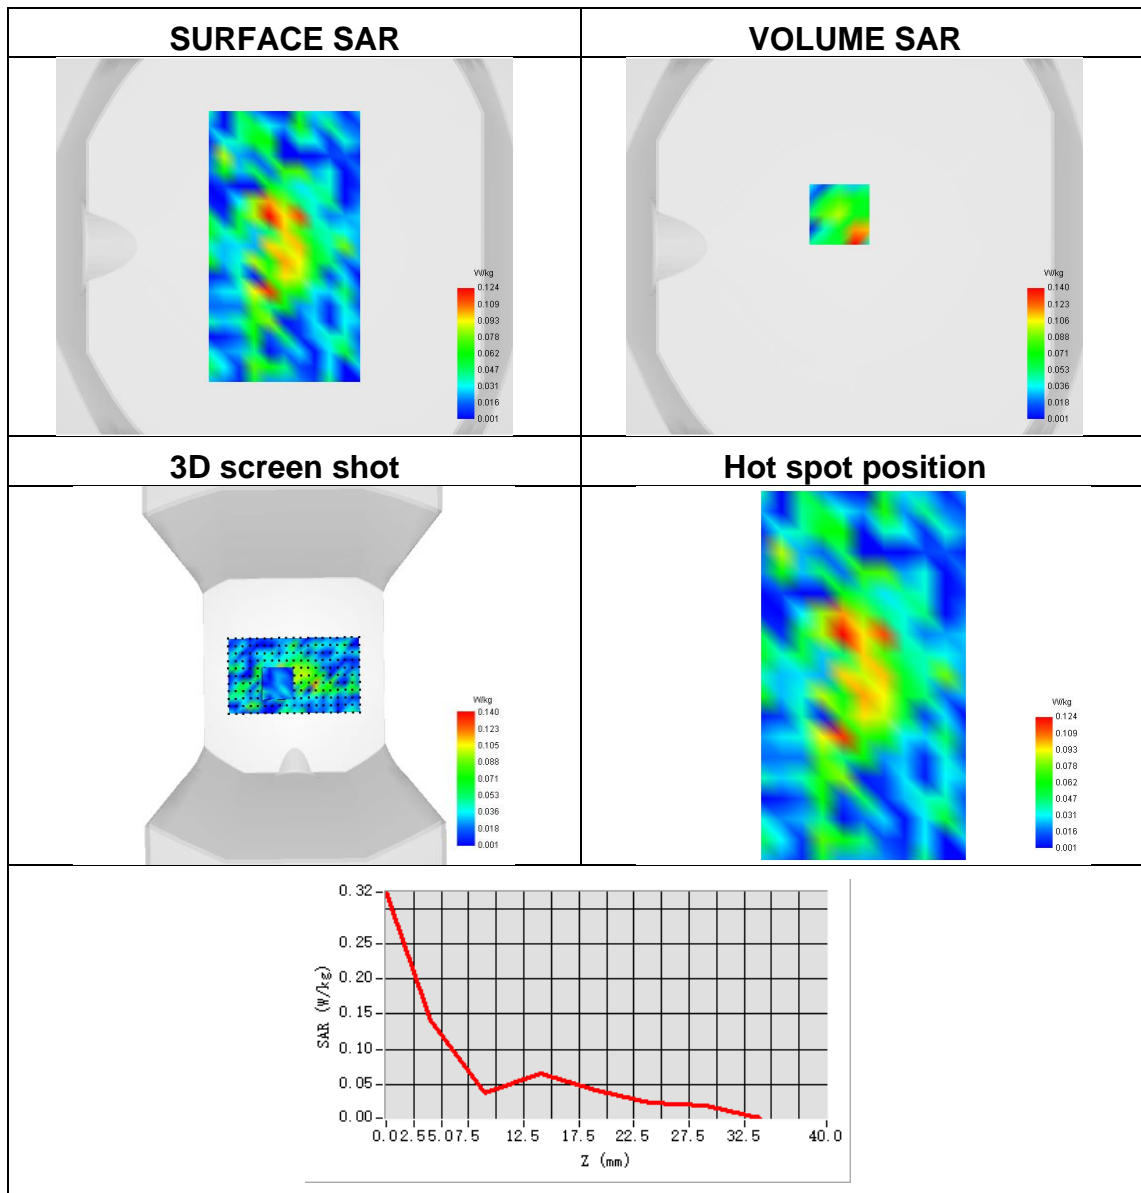




Plot 45:

Test Date	2023-05-24
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11n U-NII
Signal	IEEE 802.11
Frequency	5180
SAR 10g (W/Kg)	0.173
SAR 1g (W/Kg)	0.449

Maximum location: X=-25.00, Y=1.00 ; SAR Peak: 1.88 W/kg

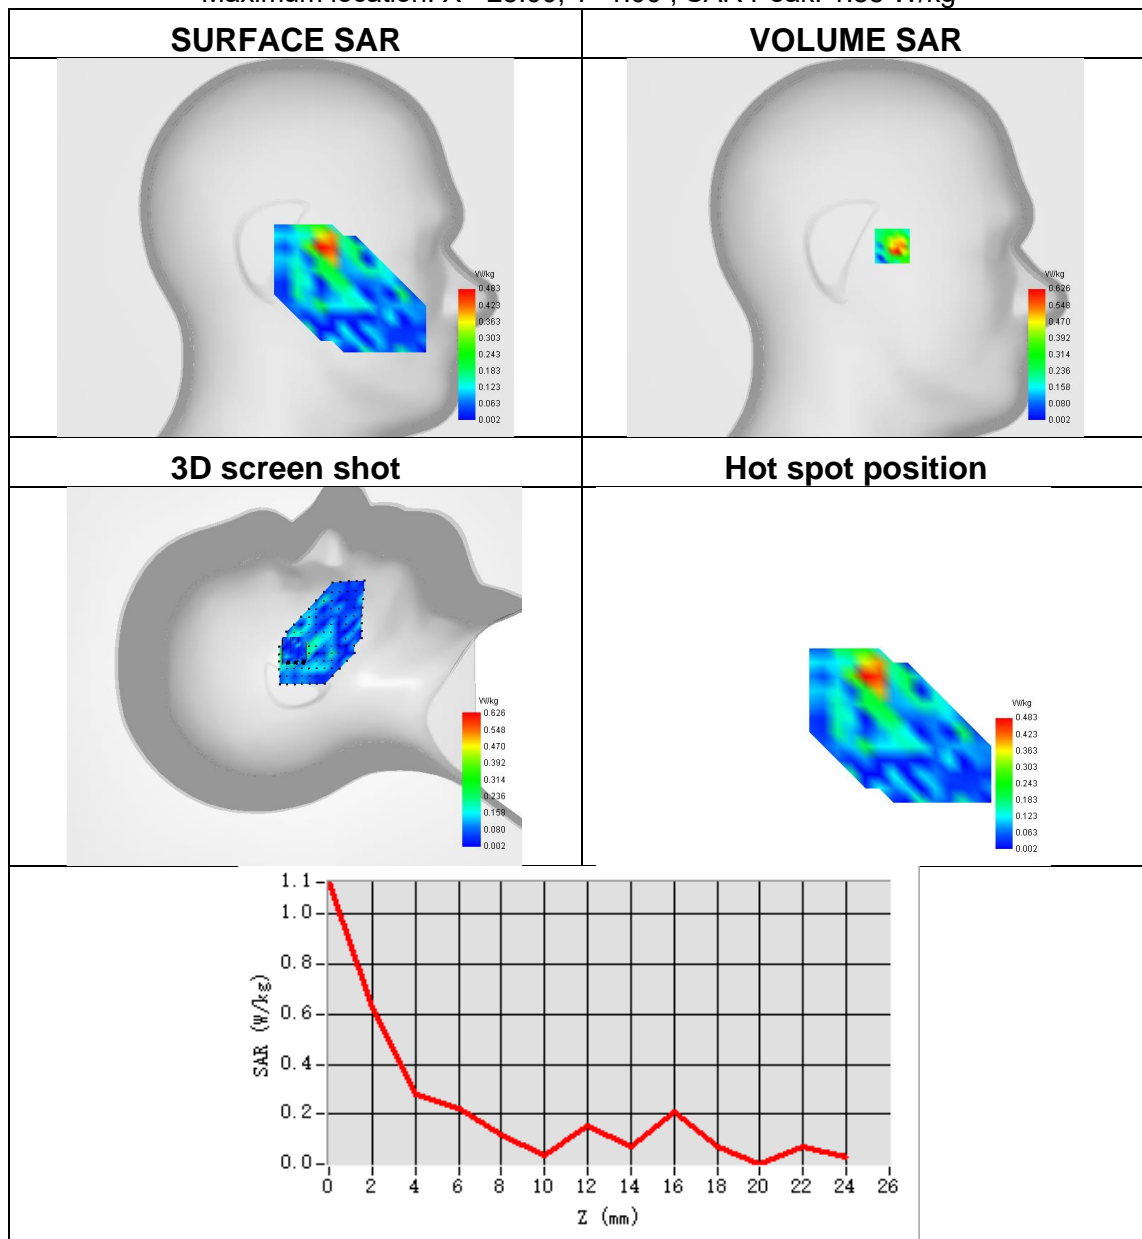




Plot 46:

Test Date	2023-05-24
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11n U-NII
Signal	IEEE 802.11
Frequency	5180
SAR 10g (W/Kg)	0.102
SAR 1g (W/Kg)	0.226

Maximum location: X=7.00, Y=-24.00 ; SAR Peak: 1.51 W/kg

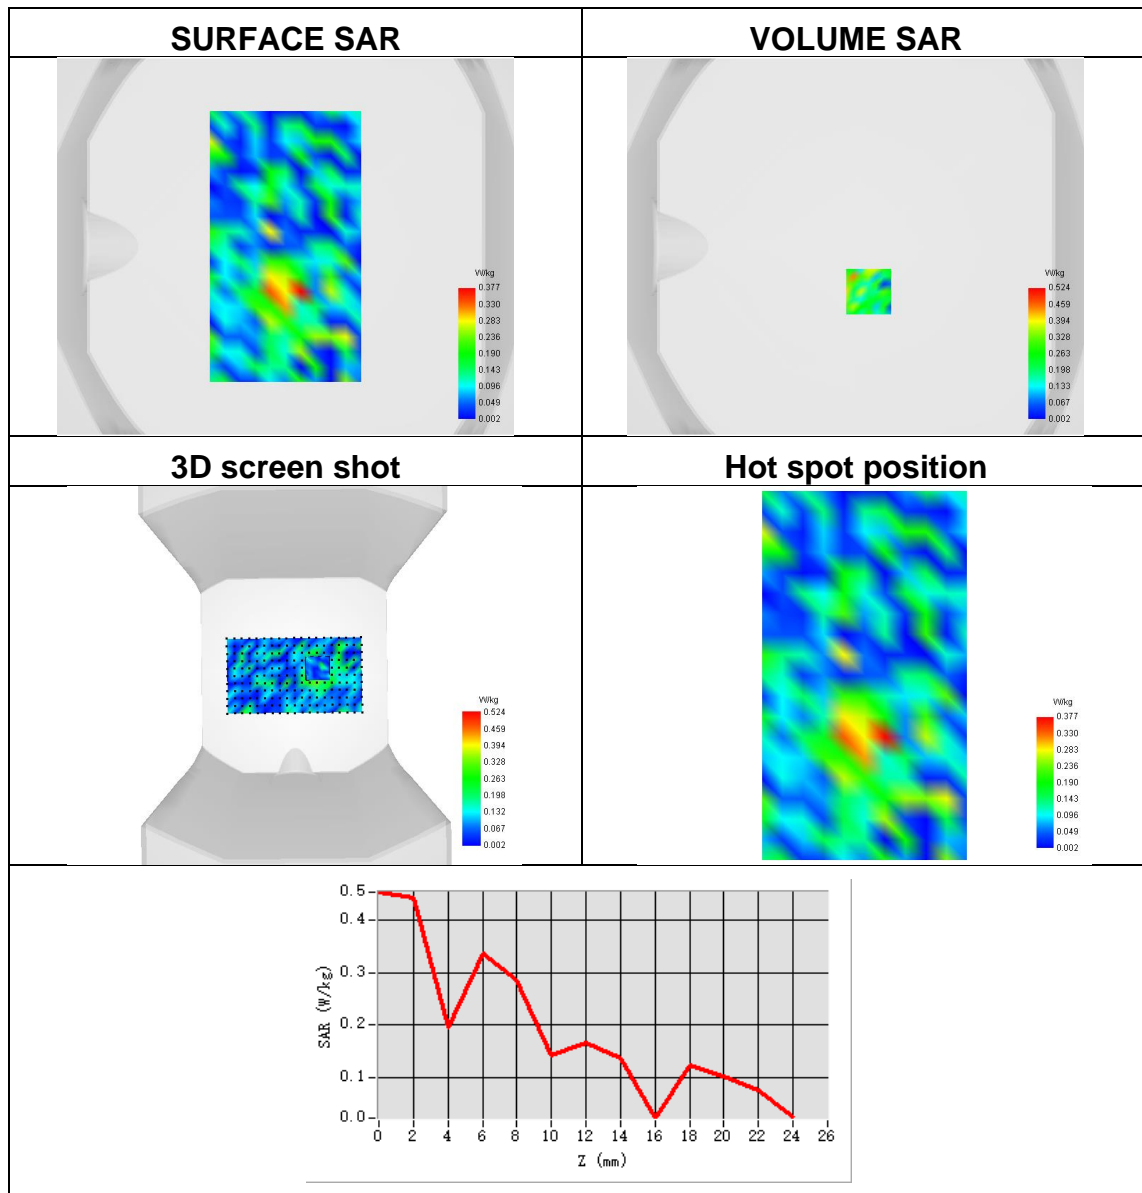




Plot 47:

Test Date	2023-05-24
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11a U-NII
Signal	IEEE 802.11
Frequency	5300
SAR 10g (W/Kg)	0.217
SAR 1g (W/Kg)	0.511

Maximum location: X=-32.00, Y=-7.00 ; SAR Peak: 2.55 W/kg

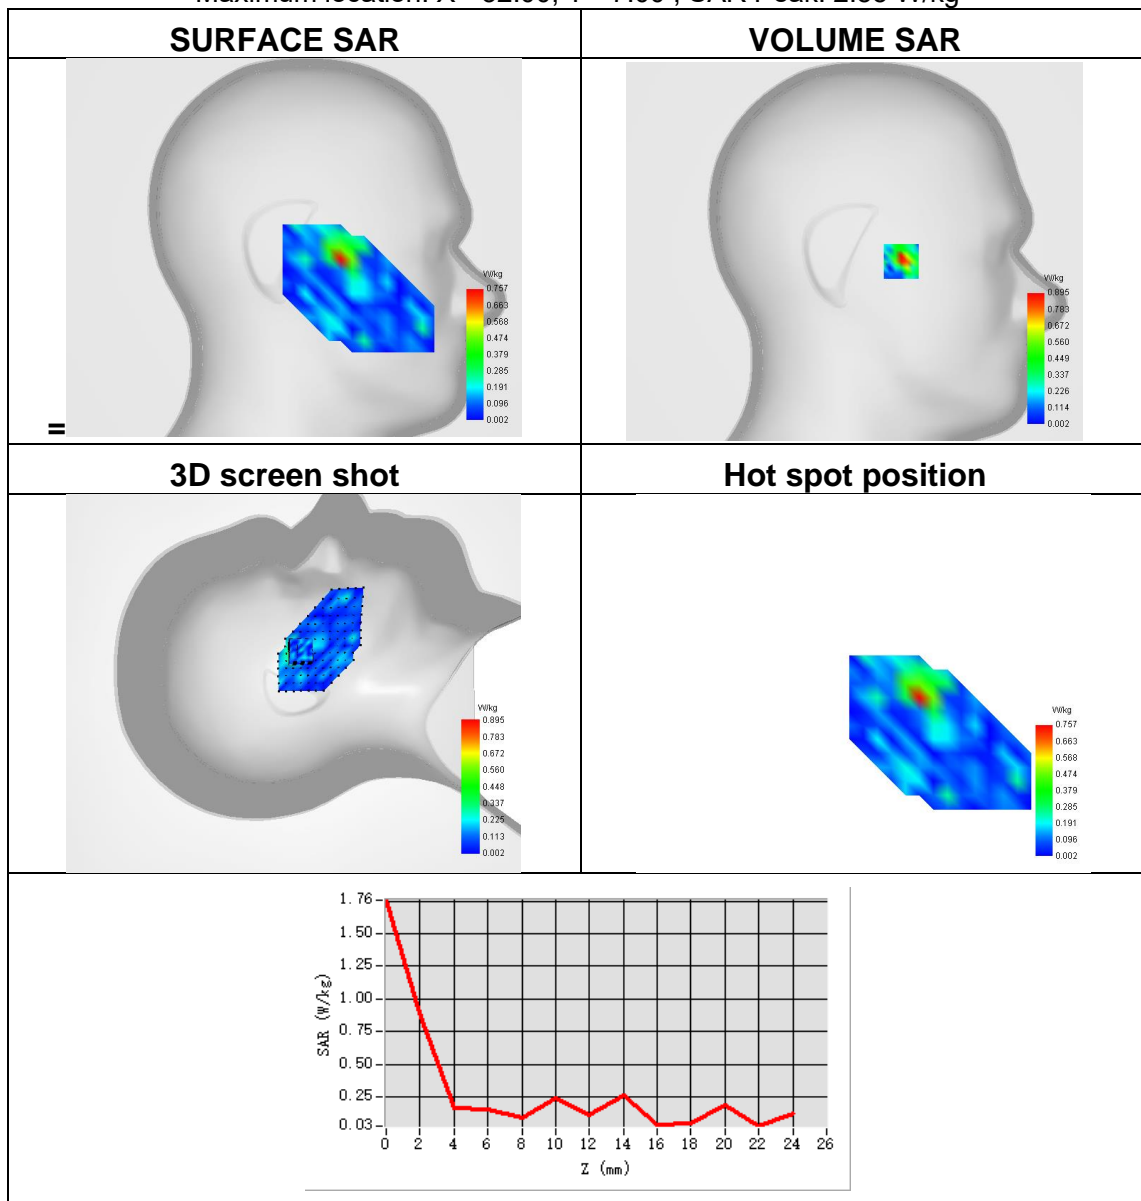




Plot 48:

Test Date	2023-05-24
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11a U-NII
Signal	IEEE 802.11
Frequency	5300
SAR 10g (W/Kg)	0.118
SAR 1g (W/Kg)	0.294

Maximum location: X=0.00, Y=-16.00 ; SAR Peak: 1.54 W/kg

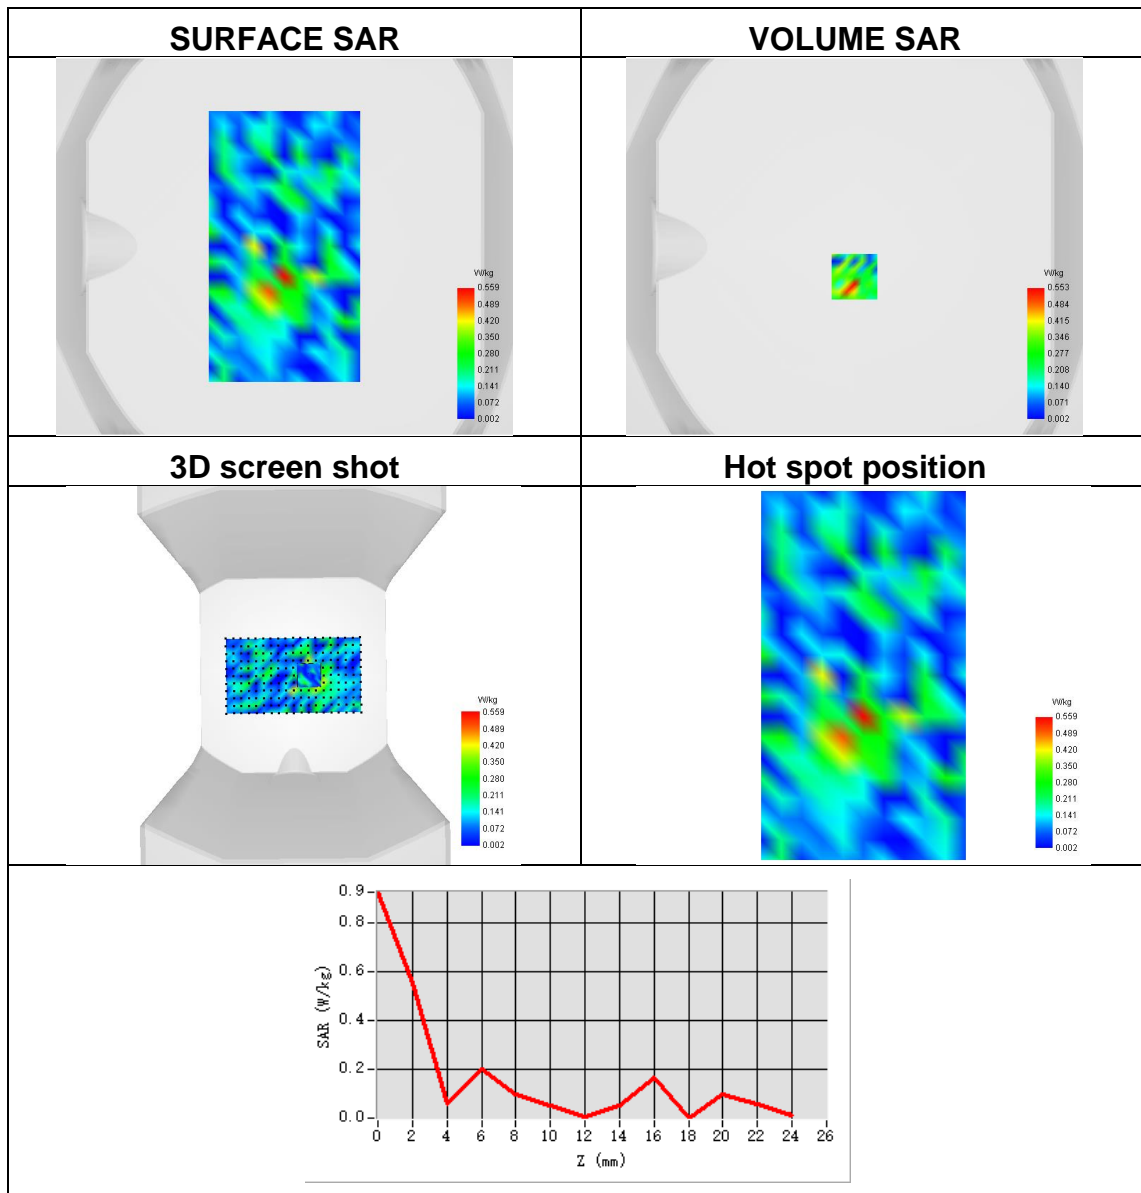




Plot 49:

Test Date	2023-05-25
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11n U-NII
Signal	IEEE 802.11
Frequency	5700
SAR 10g (W/Kg)	0.258
SAR 1g (W/Kg)	0.476

Maximum location: X=-32.00, Y=-2.00 ; SAR Peak: 3.94 W/kg

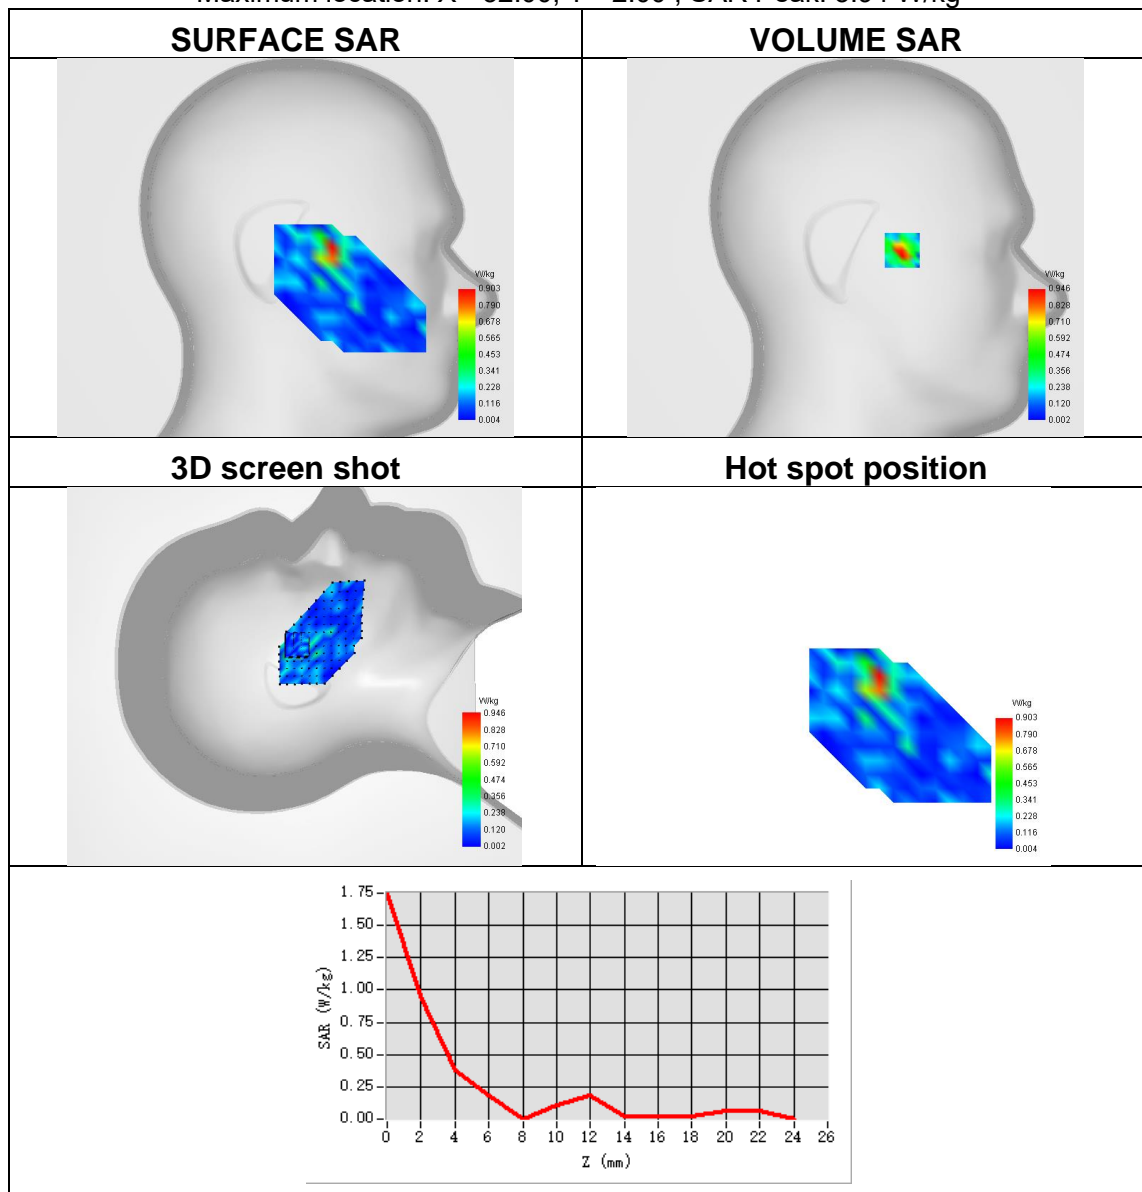




Plot 50:

Test Date	2023-05-25
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11n U-NII
Signal	IEEE 802.11
Frequency	5700
SAR 10g (W/Kg)	0.136
SAR 1g (W/Kg)	0.268

Maximum location: X=0.00, Y=-16.00 ; SAR Peak: 1.61 W/kg

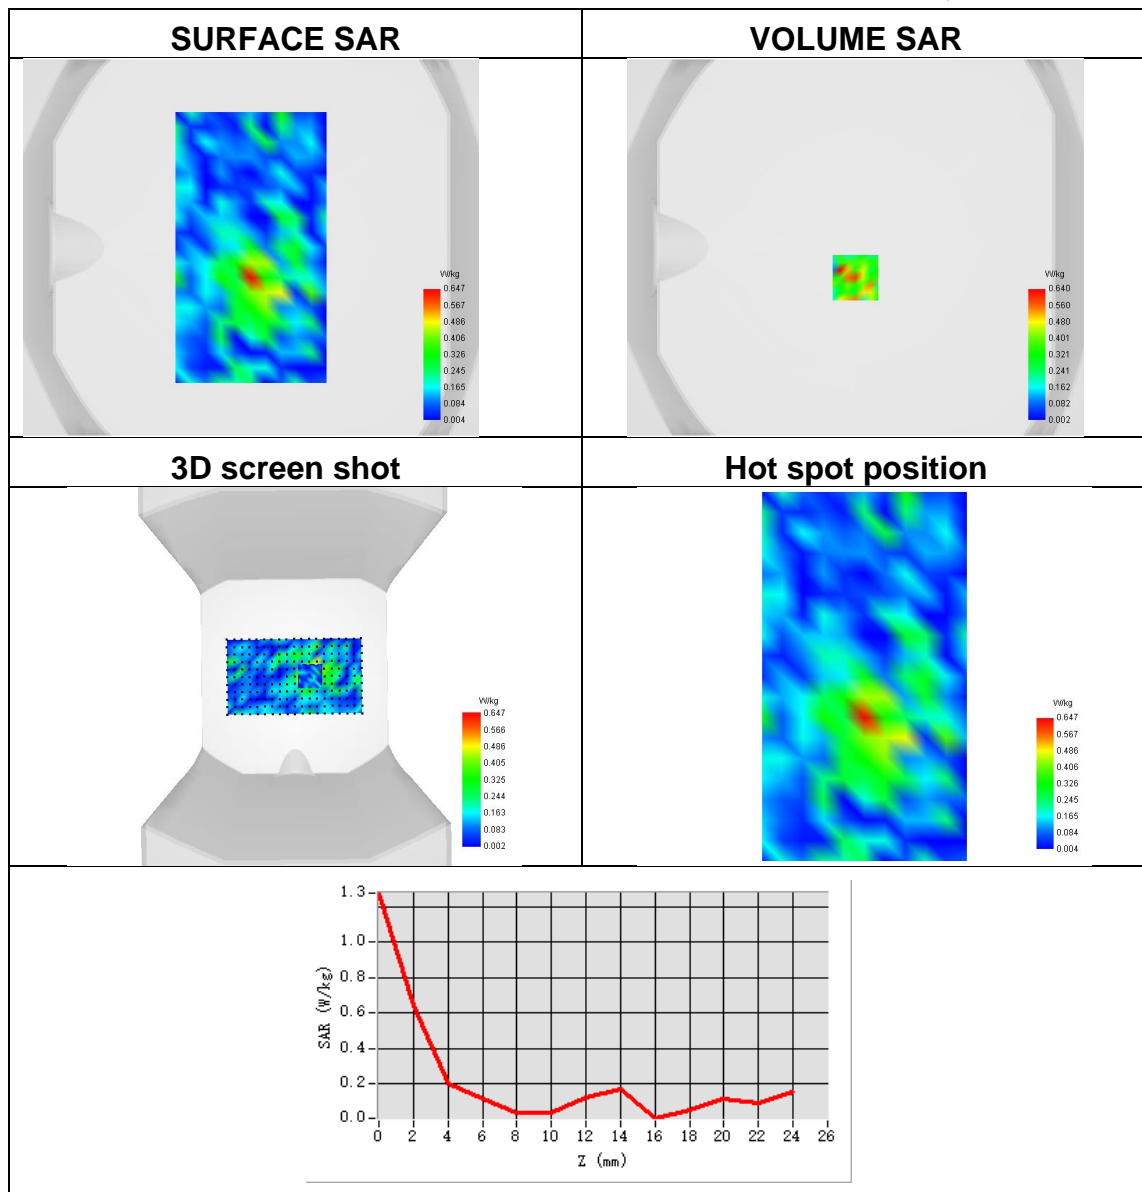




Plot 51:

Test Date	2023-05-25
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11n U-NII
Signal	IEEE 802.11
Frequency	5785
SAR 10g (W/Kg)	0.283
SAR 1g (W/Kg)	0.769

Maximum location: X=-24.00, Y=0.00 ; SAR Peak: 2.96 W/kg

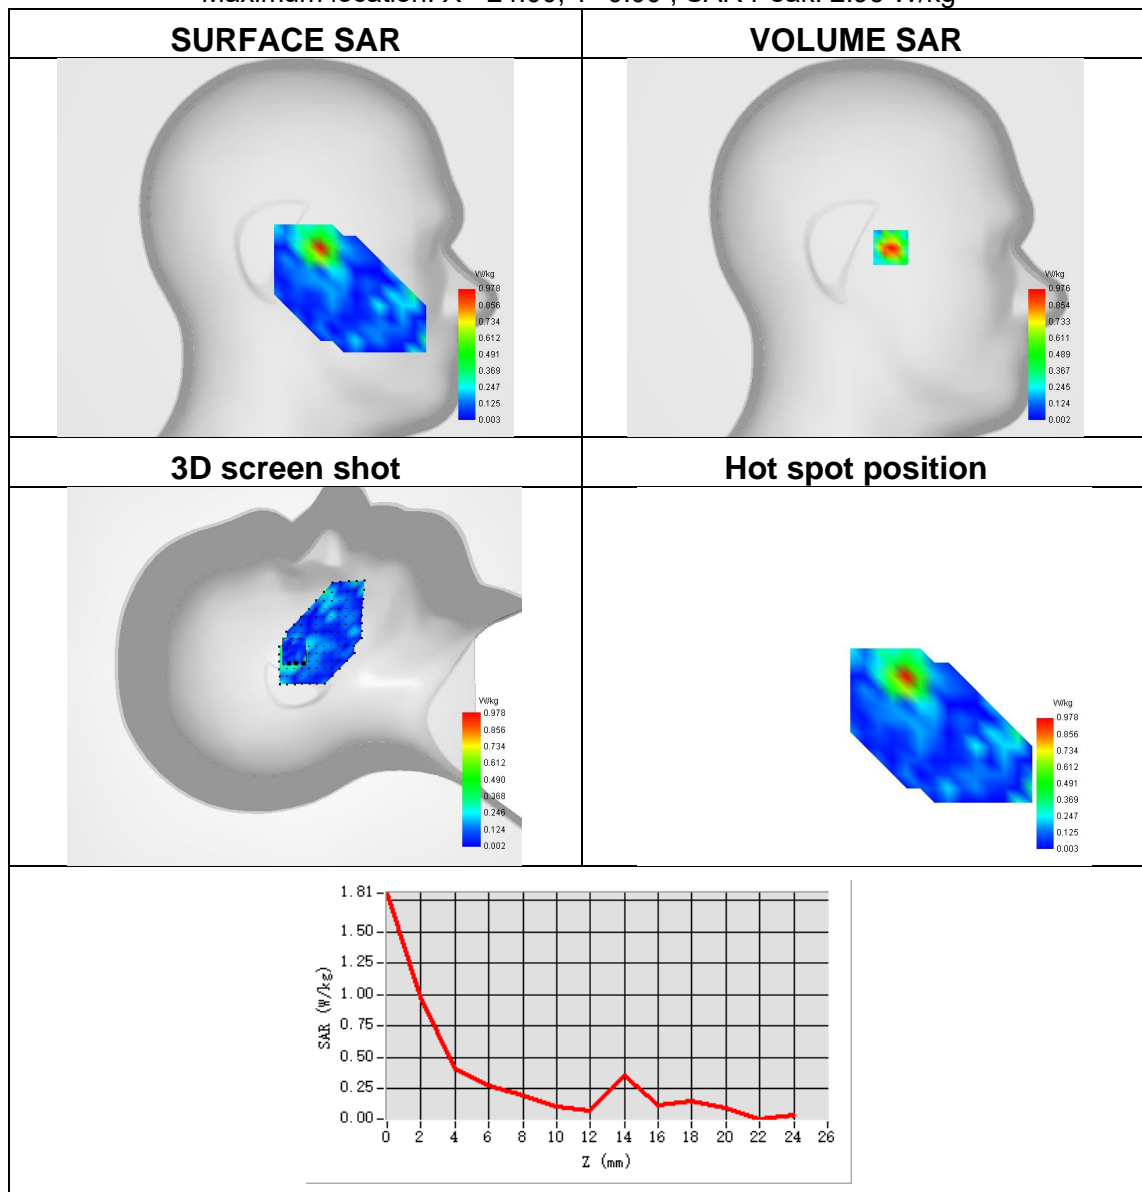




Plot 52:

Test Date	2023-05-25
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11n U-NII
Signal	IEEE 802.11
Frequency	5785
SAR 10g (W/Kg)	0.149
SAR 1g (W/Kg)	0.373

Maximum location: X=-2.00, Y=-16.00 ; SAR Peak: 1.89 W/kg

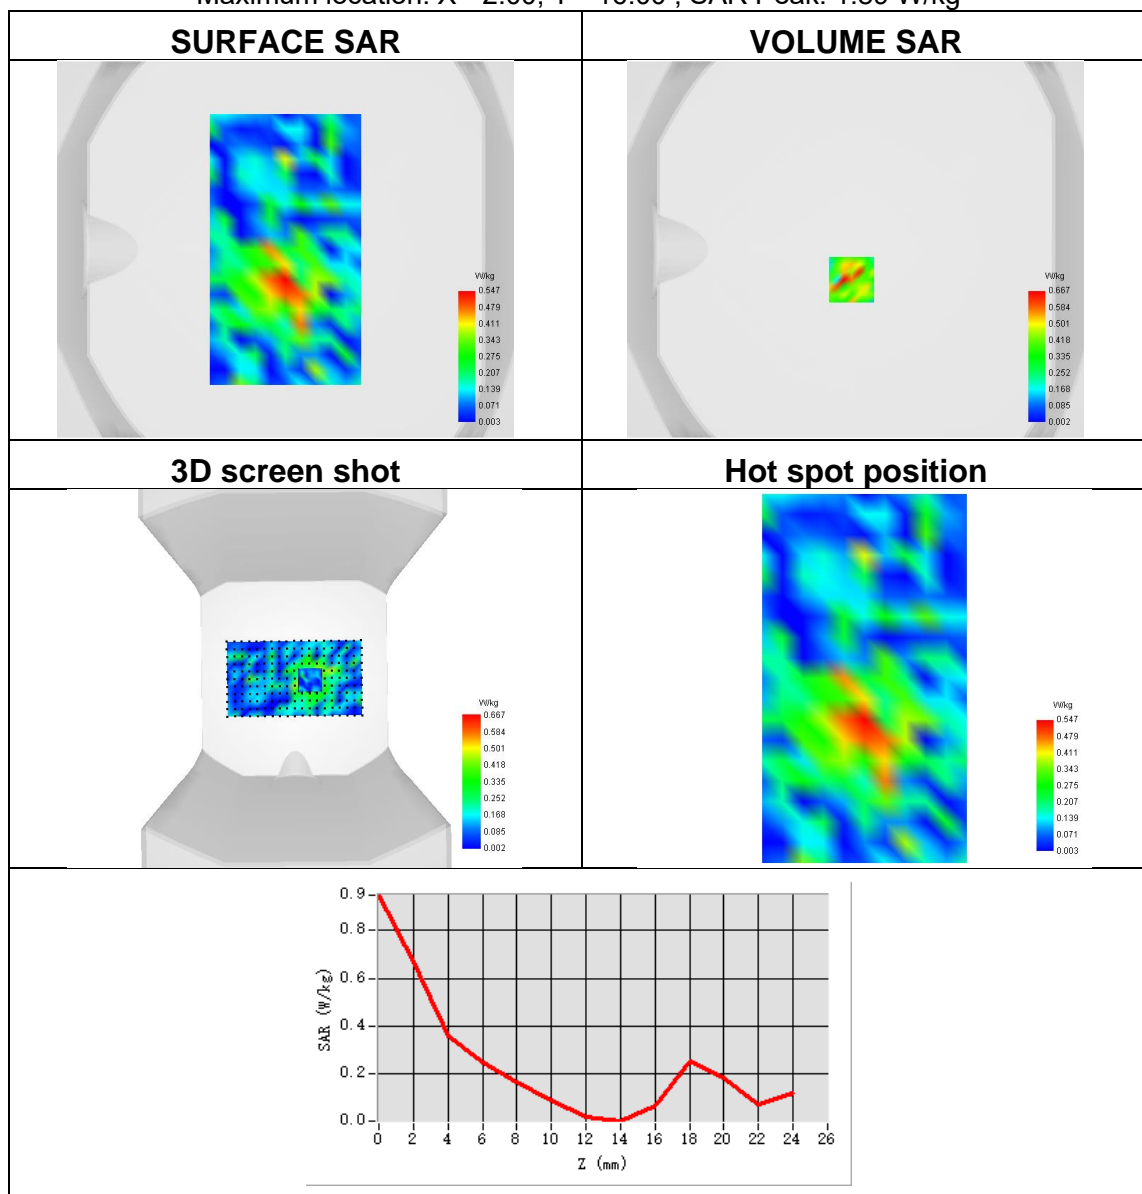



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※