

承 认 书

APPROVAL SHEET

客 户 名 称

CUSTOMER NAME:

产 品 名 称

PRODUCT NAME: 2.4G FPC 内置天线 L=150mm+端子

客 户 料 号

CUSTOMER P/N:

优比电子料号

Youbi P/N: UB01C150F2D2959A REV: A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:	Yongxin Lu 东莞市优比电子有限公司	
APPROVED BY:	工程专用章 Changxing. Liu	
DATE:	2022/5/11	

Modification History

Version	Content Revision	Issued by	Date
---------	------------------	-----------	------

A	Original version	Yongxin. Lu	2022-5-11

Content

<i>Item</i>	<i>Description</i>
1.-----	Electrical Specification
2.-----	Test Items and Equipment
3.-----	S Parameter
4.-----	Efficiency and Gain
5.-----	Radiation Pattern
6.-----	Antenna installation diagram
7.-----	Mechanical Specification
8.-----	Packaging

1. Electrical Specification

Characteristics	Specifications	Unit
Outline Dimensions	46x11.6,L150	mm
Frequency	2400-2500	MHz
Impedance	50	Ω
Return Loss	-10Max	dB
Polarization	Linear Polarization	
Gain	2.0	dBi
Efficiency	>50	%
Connector Type	MHF-1-Plug	
Operating temperature	-20℃~+85℃	
Storage Temp	-20℃~+50℃	

2.Test Items and Equipment



Dongguan Youbi Electronics Co.,LTD Hangzhou Youbige Electronics Co.,LTD Shenzhen Youbi Electronics Co.,LTD 3 / 9Room 101,Building

2,No.9, Room 106,Building 3,Letong Science Park, Room 106, Building A,Xinzheng Industrial Park,
 Xinfu Road,Lin Village,Tangxia Town No.500 Qiuyi Road,Binjiang District 57 Liuxian Road, Bao 'an District, Shenzhen
 Tel:+86-769-81777126 Website: www.ubuant.com

	Test items	Test equipment
S Parameter	1.Return Loss 2.VSWR	Network analyzer (Agilent E5071B)
The whole machine of Passive parameters	1.Frequency 2.Gain 3.Radiation Pattern	1.3D microwave darkroom (5m*5m*5m) 2.Network analyzer (Agilent E5071B)


Frequency (MHz)	Return Loss (dB)	VSWR
2400	-22.14	1.16
2450	-26.12	1.10
2500	-20.95	1.19

The whole machine of Active parameters	1.TRP 2.TIS	1.3D microwave darkroom (5m*5m*5m) 2.Comprehensive test instrument (CMW500)
---	----------------	--

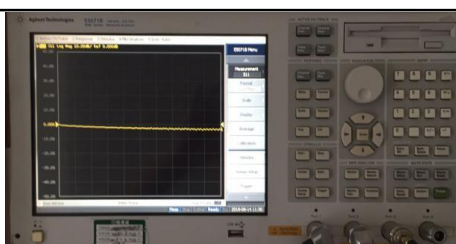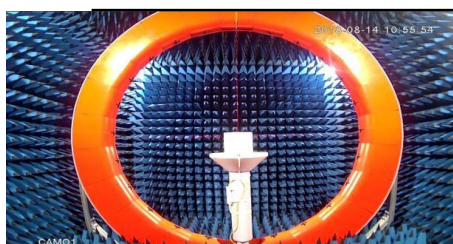


3. S Parameter

4. Efficiency and Gain

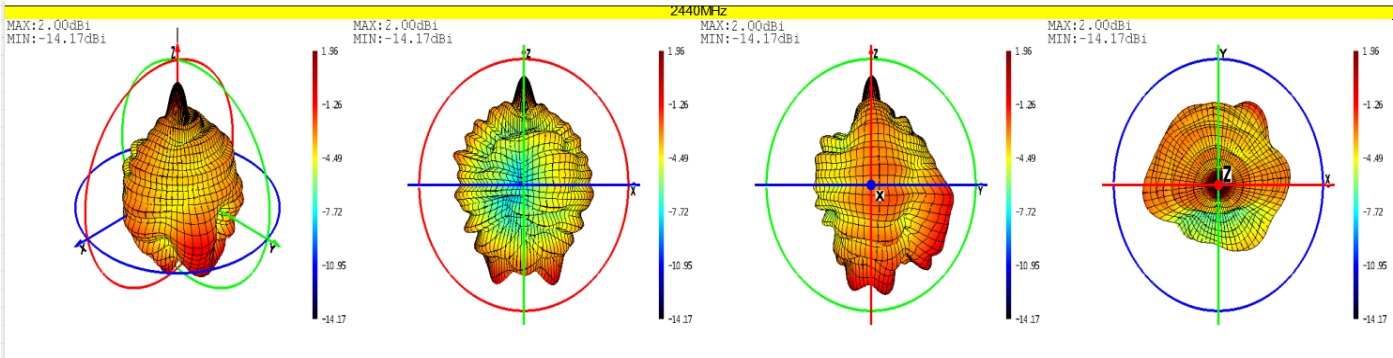

Frequency (MHz)	2440
Gain (dBi)	2.00
Efficiency (dB)	-3.44
Efficiency (%)	45.34
Directivity (dB)	5.40

6. Mechanical Specification

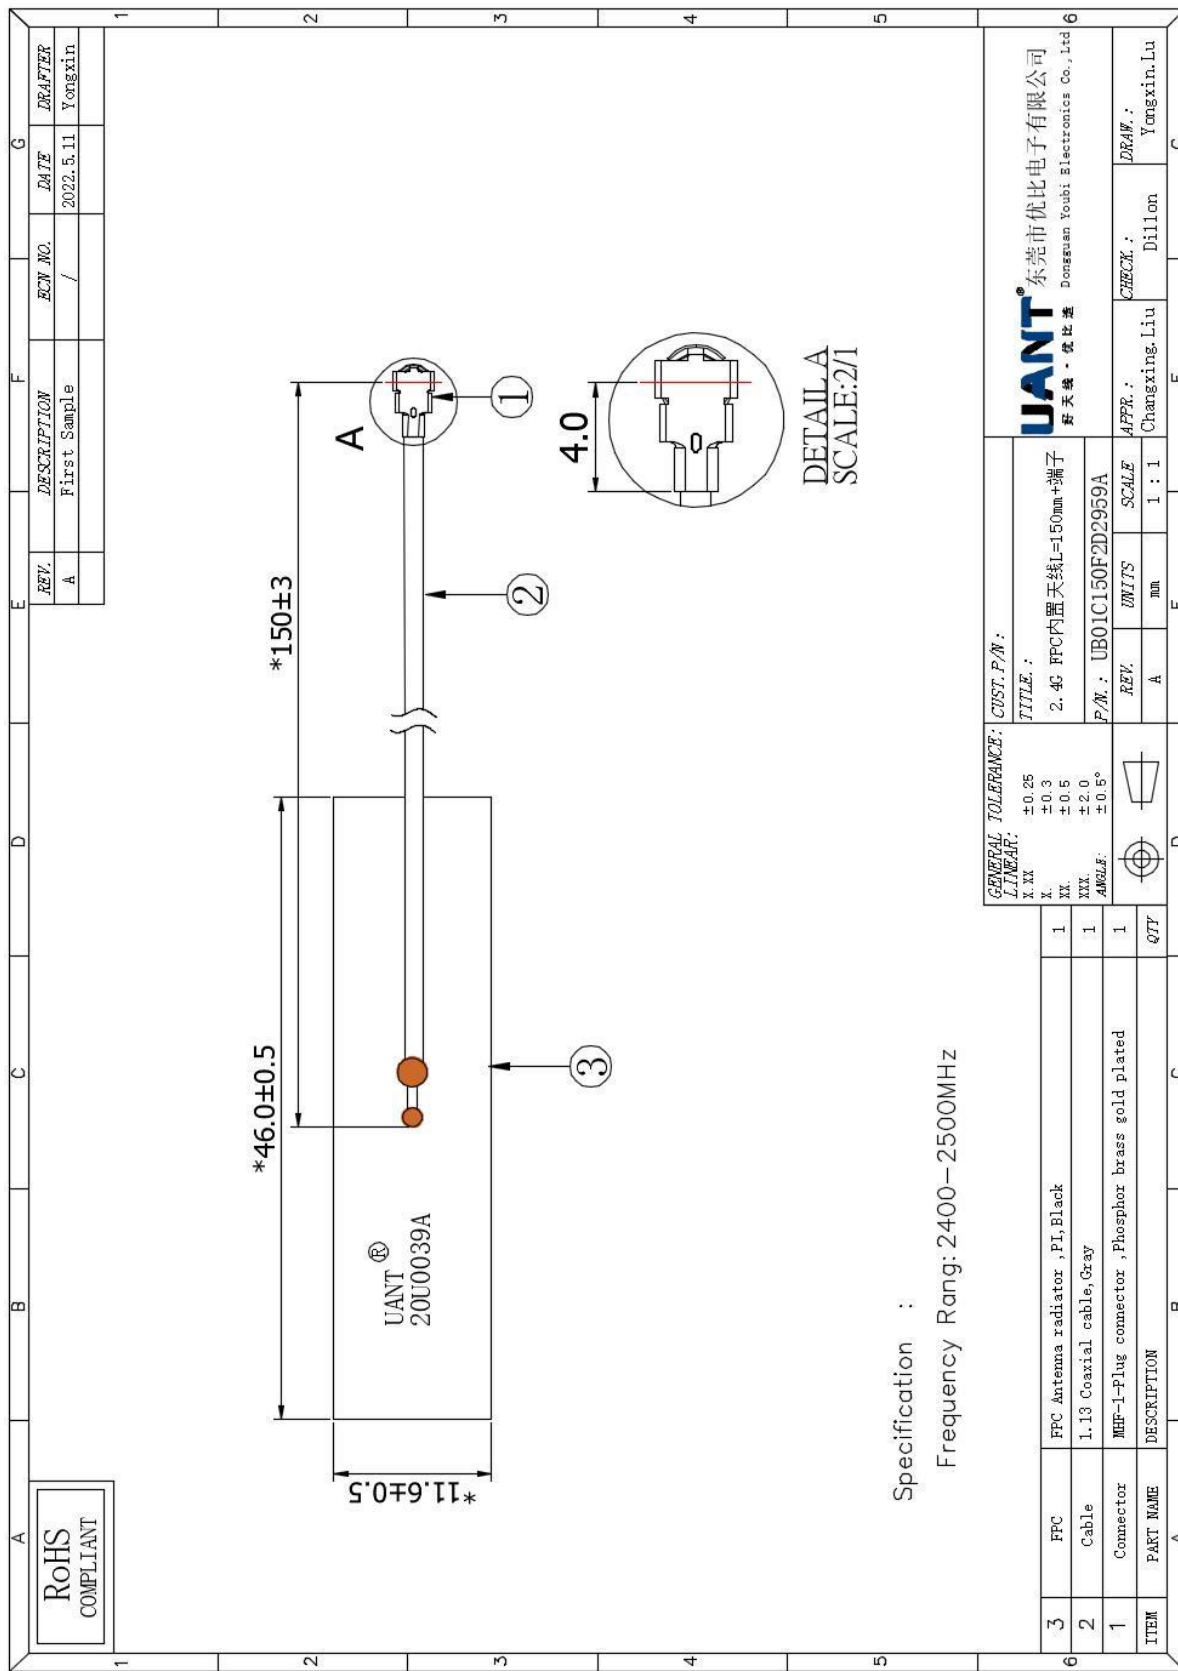

7. Packaging

