

SPECIFICATION FOR APPROVAL

SUPPLIER: Postek Electronics Co., Ltd

PRODUCT MODEL: FYT-02-4

PRODUCT NAME: 2.4&5.8G FPC Antenna

PRODUCT CODE: M01-0200960R0A

PREPARED BY : PengCheng.Gao	DATE : 2023.09.08
--------------------------------	----------------------

ADDRESS: Wisdom Plaza, Block B, Tower 2, 18th Floor, Nanshan District, Shen Zhen	TEL: 0755-83240988
--	-----------------------

PERFORMANCE PARAMETER**1. Electrical Characteristics**

1	Frequency Range	2400-2500MHz ; 5100-5900MHz
2	V. S. W. R	<2. 2
3	Gain	1. 47dBi@2. 4G 0. 36dBi@5G
4	Efficiency	34. 04%
5	Impedence	50 Ω
6	Polarization	Linear
7	Interface type	Ipex

2. Mechanical parameters

1	Measure	FPC:42*19.9mm/Cable: 550mm* Φ 1.13mm
2	Colour	Black


3. Environment Condition

1	Working Temp	-30 $^{\circ}$ C ~80 $^{\circ}$ C
---	--------------	-----------------------------------

TESTING CURVE

1. Performance test

1.1 V.S.W.R

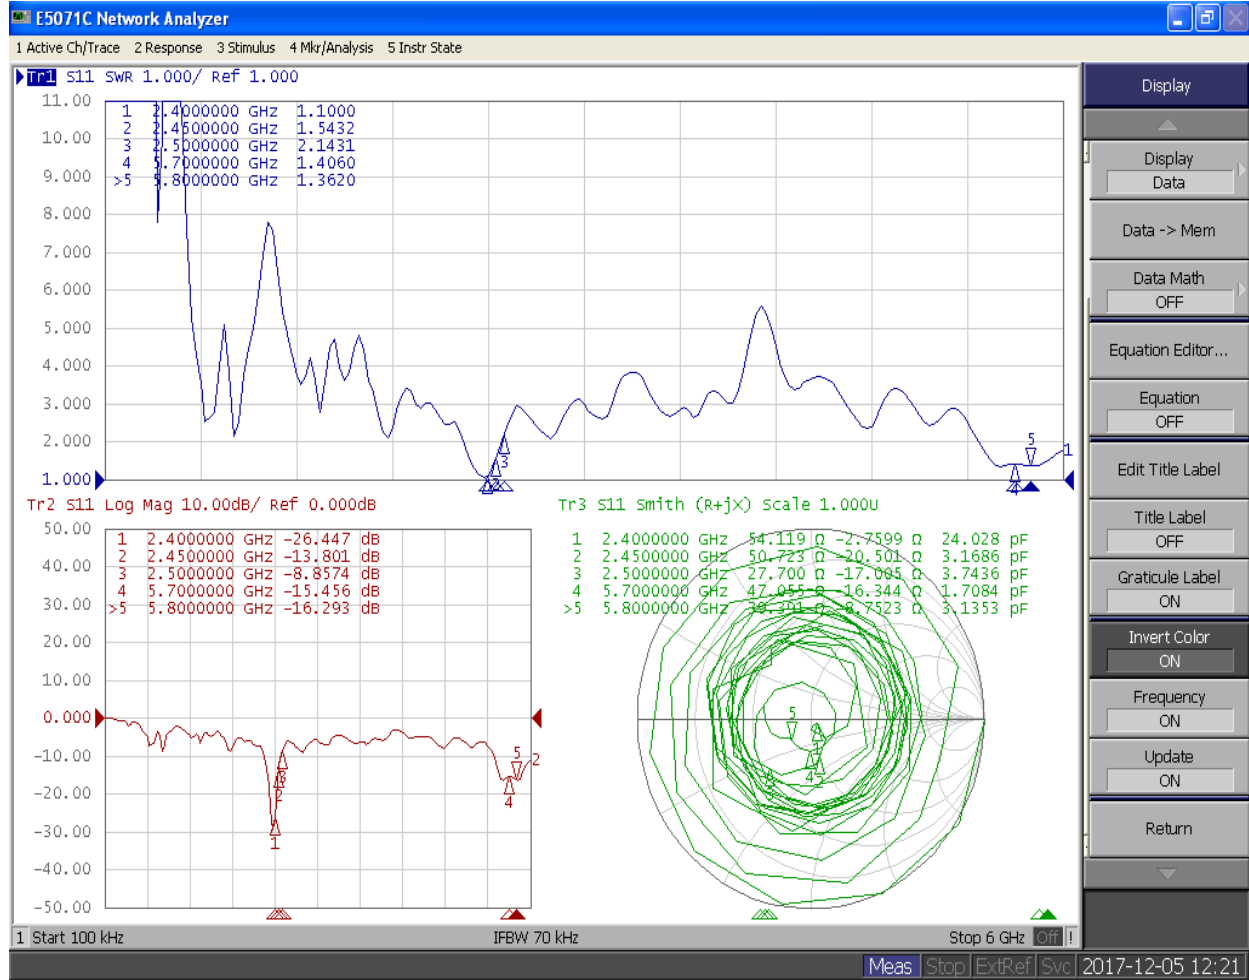



Data list

Freq	2.4	2.45	2.5	5.7	5.8
VSWR	1.1	1.5	2.1	1.4	1.4

TESTING CURVE

2. Passive testing

2.1 Efficiency and Gain

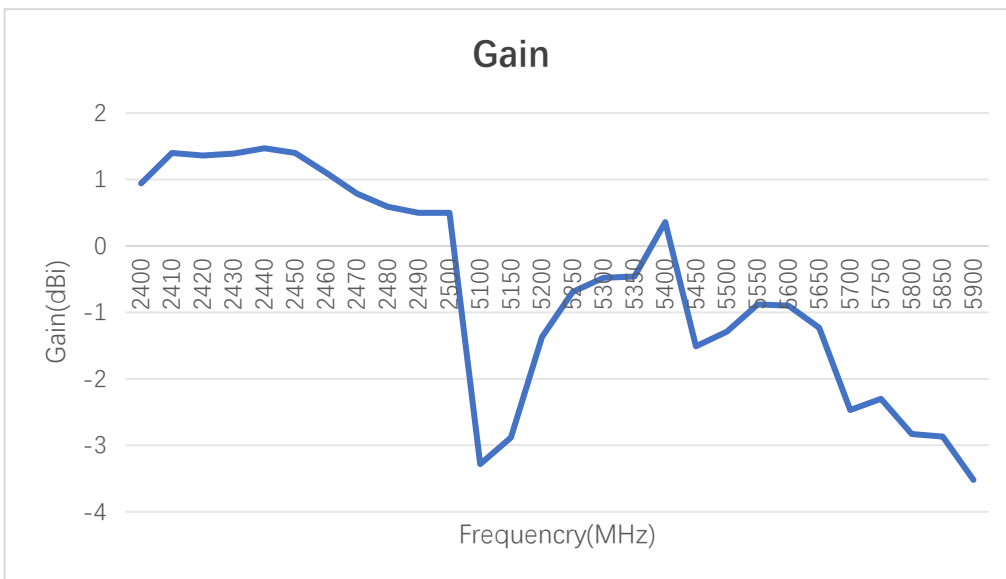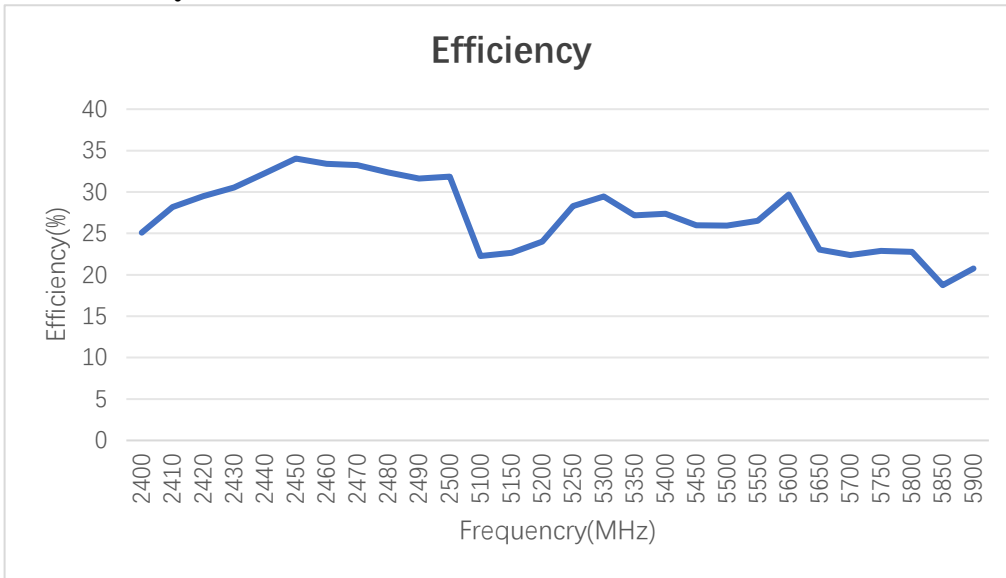


TESTING CURVE**Efficiency and Gain Data list**

Freq (MHz)	Efficiency (%)	Gain (dBi)	Freq (MHz)	Efficiency (%)	Gain (dBi)
2400	25.10	0.94	5250	28.31	-0.69
2410	28.20	1.40	5300	29.46	-0.48
2420	29.48	1.36	5350	27.19	-0.46
2430	30.53	1.39	5400	27.36	0.36
2440	32.30	1.47	5450	26.00	-1.51
2450	34.04	1.40	5500	25.94	-1.29
2460	33.40	1.10	5550	26.52	-0.88
2470	33.23	0.79	5600	29.71	-0.90
2480	32.36	0.59	5650	23.05	-1.23
2490	31.63	0.50	5700	22.40	-2.47
2500	31.87	0.50	5750	22.90	-2.30
5100	22.26	-3.28	5800	22.79	-2.83
5150	22.67	-2.88	5850	18.75	-2.87
5200	24.01	-1.37	5900	20.75	-3.52


TESTING CURVE

2.2 3D Map

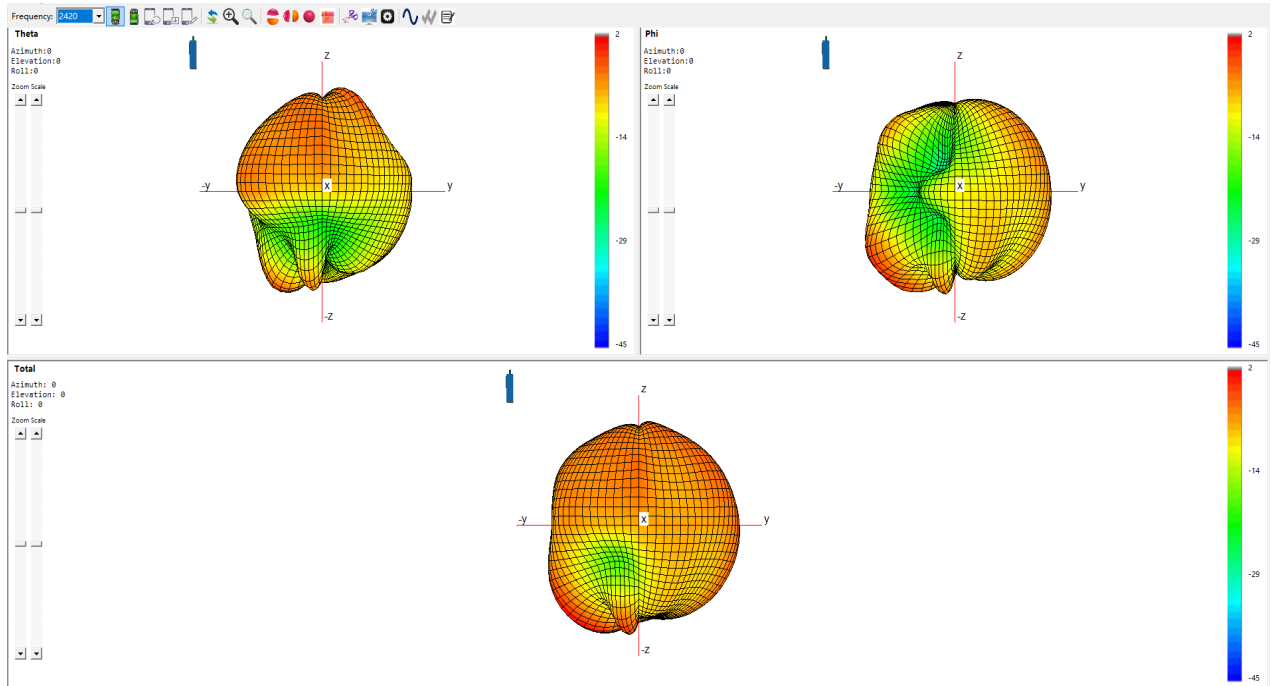


2420MHz

Gain=1.36dBi

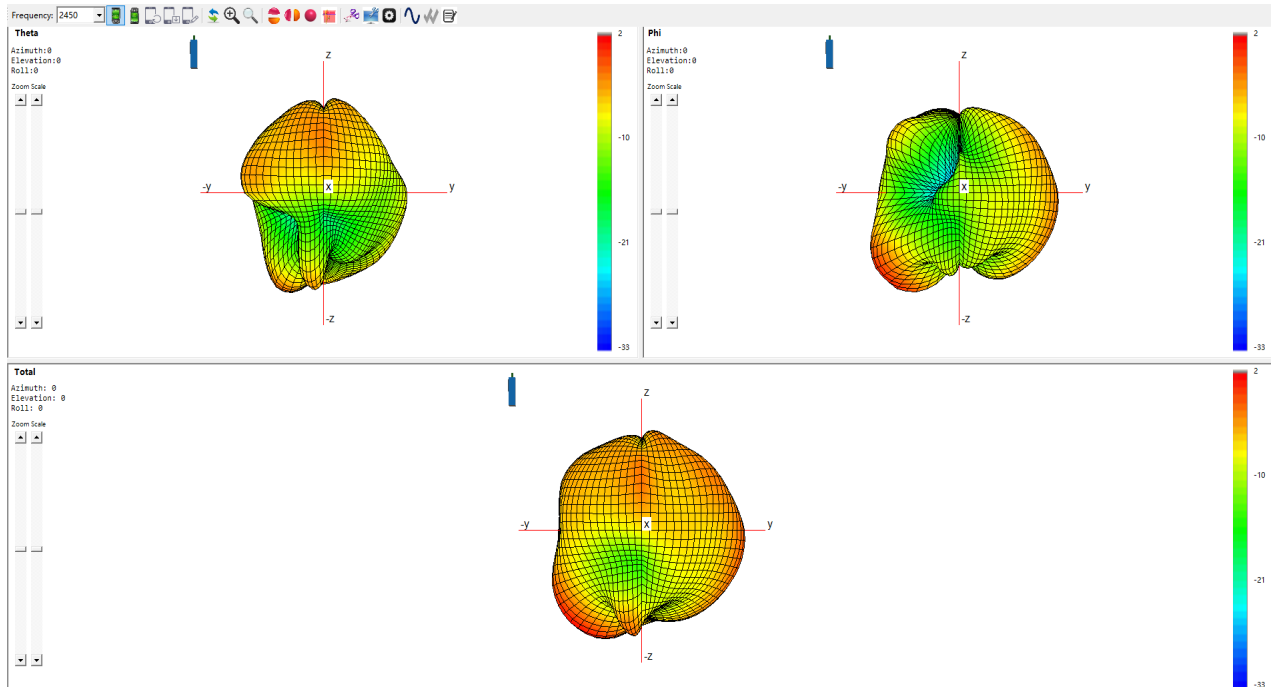


2450MHz

Gain=1.40dBi

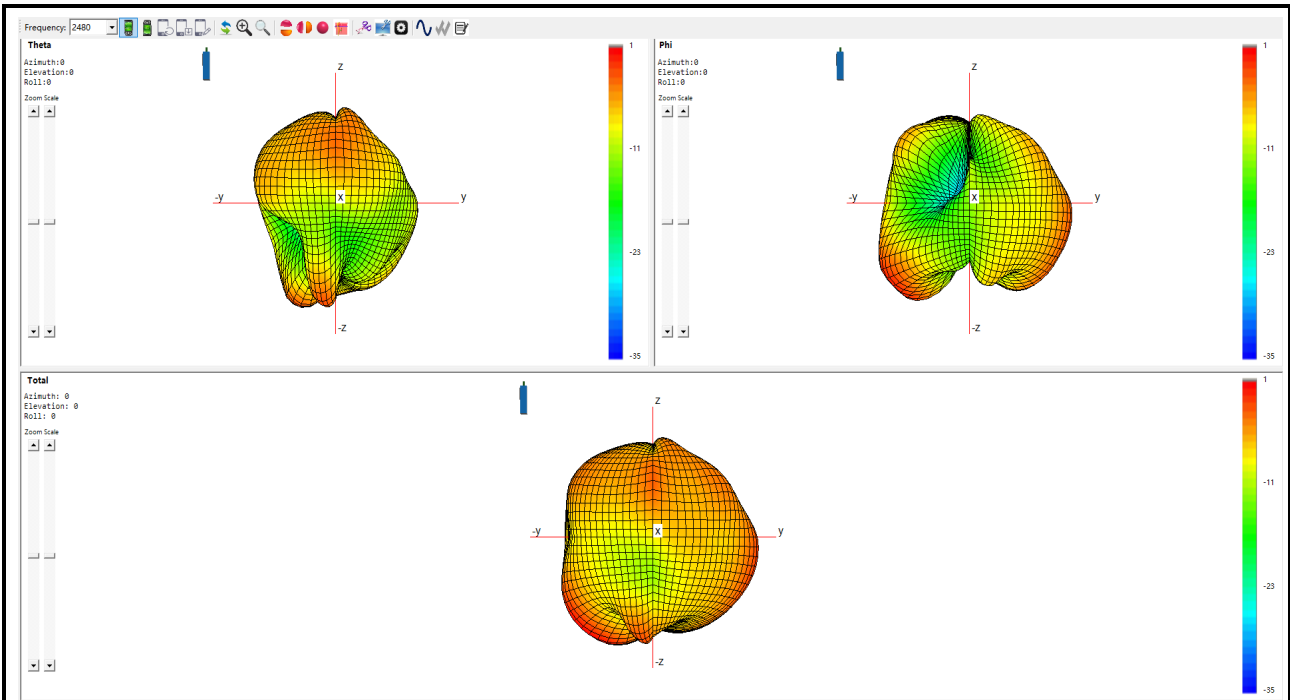


2480MHz

Gain=0.59dBi

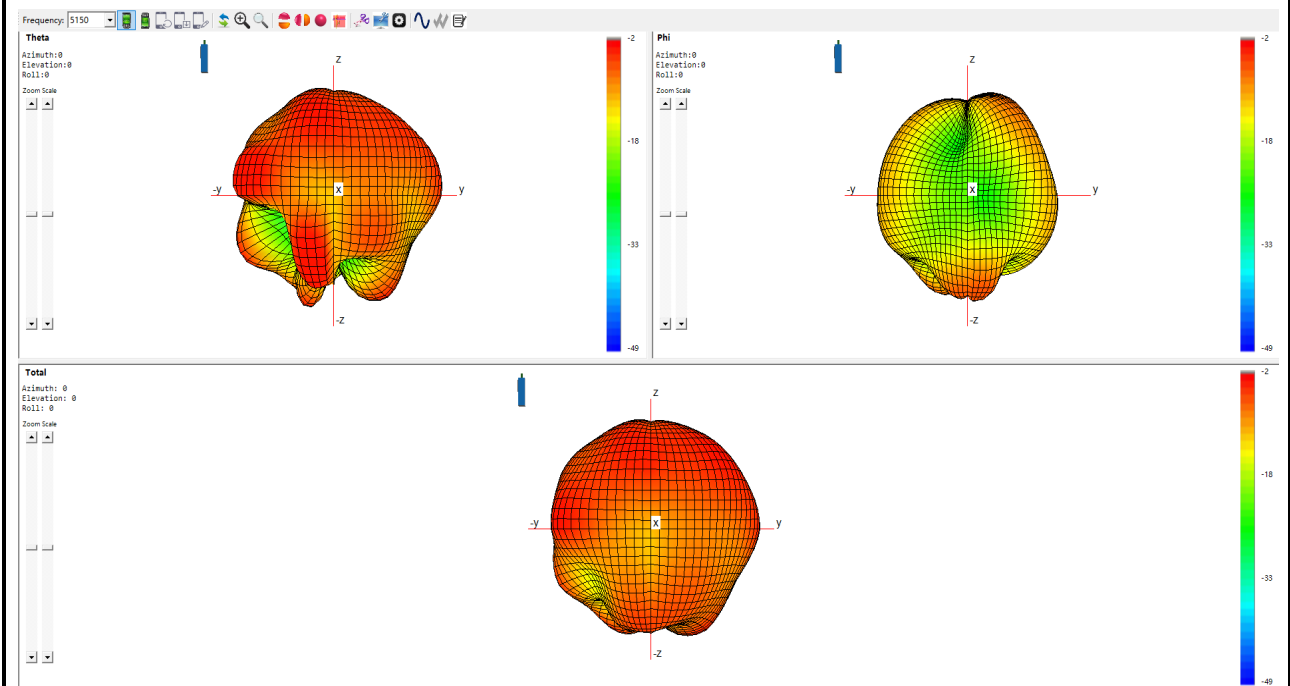


5150MHz

Gain=-2.88dBi

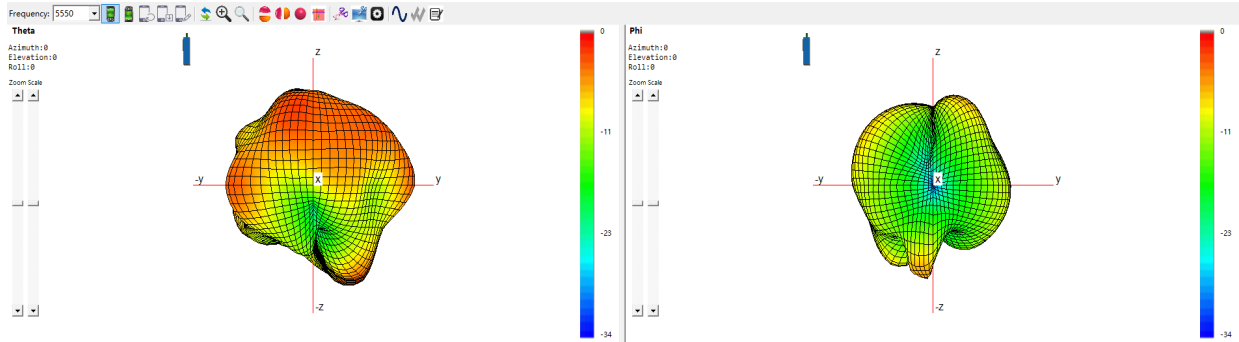

5550MHz




Gain=-0.88dBi

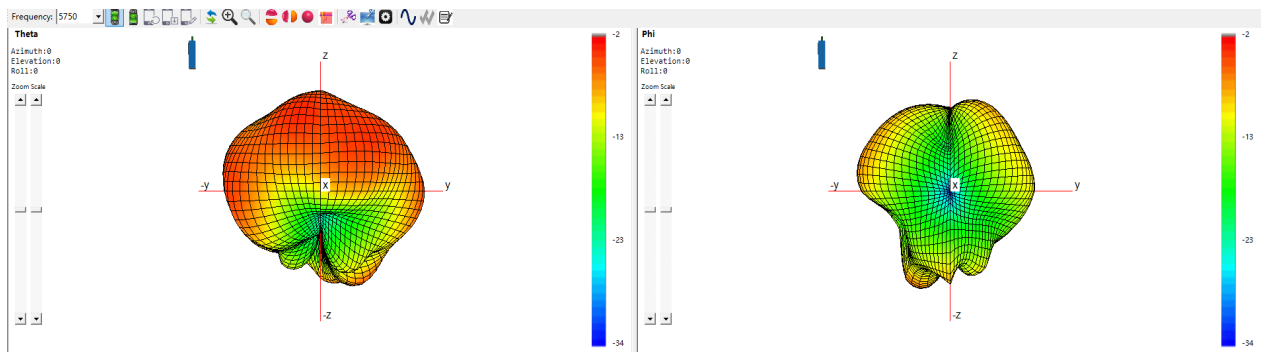

5750MHz




Gain=-2.30dBi

2.3 2D Figure

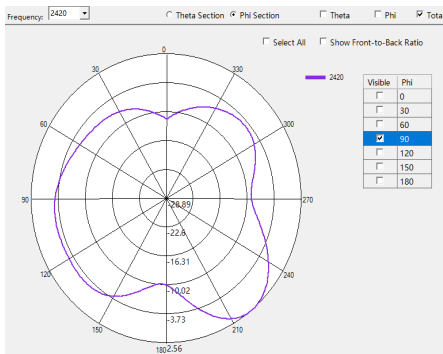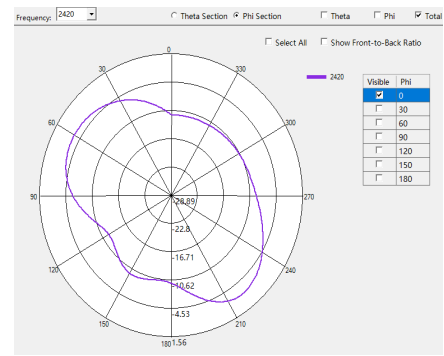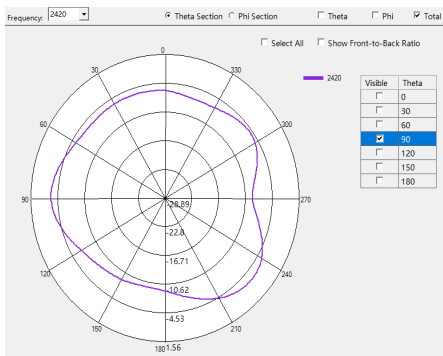




2420MHz

Gain=1.36dBi

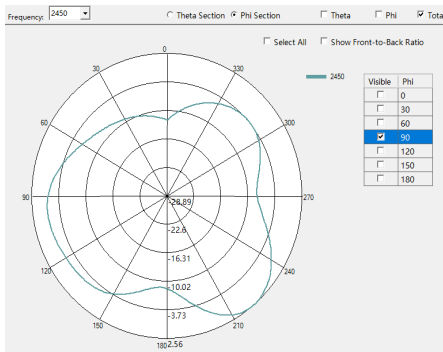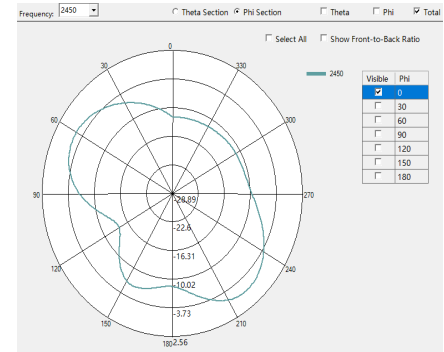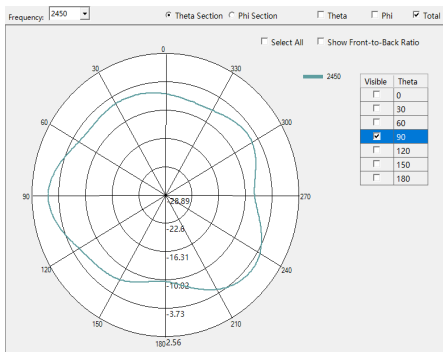




2450MHz

Gain=1.40dBi

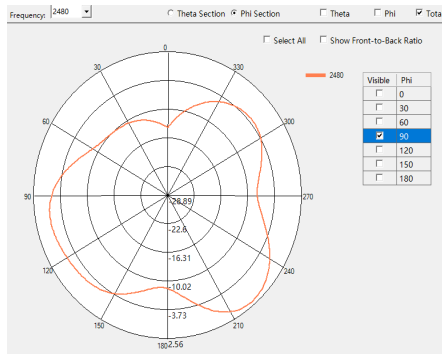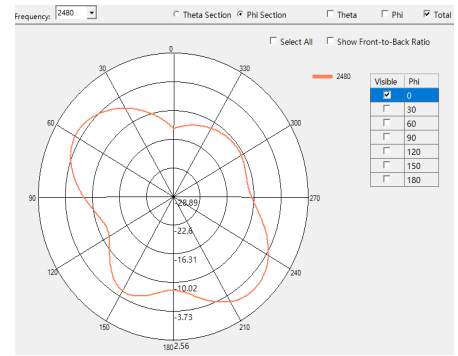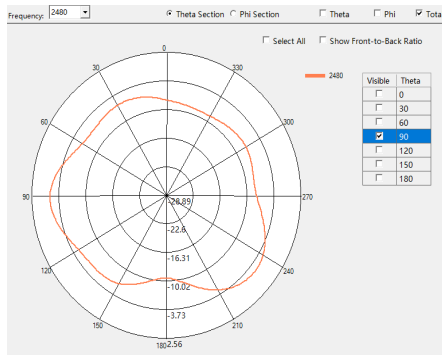



2480MHz

Gain=0.59dBi

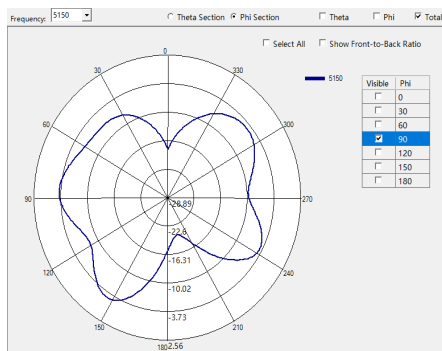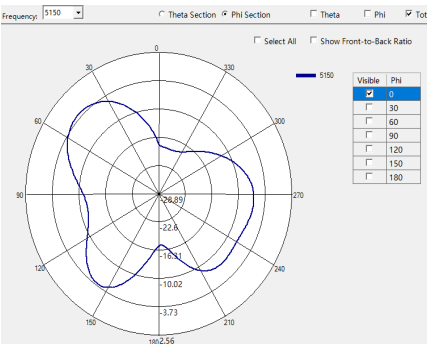
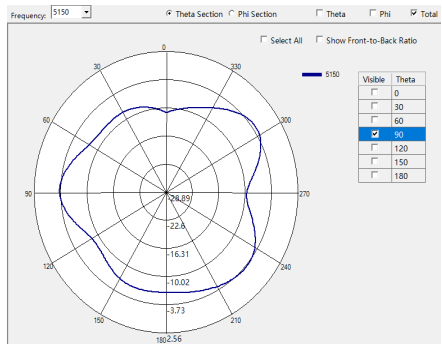


5150MHz

Gain=-2.88dBi

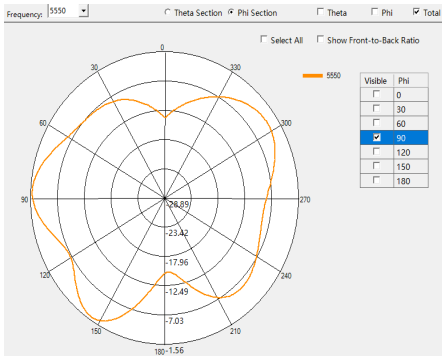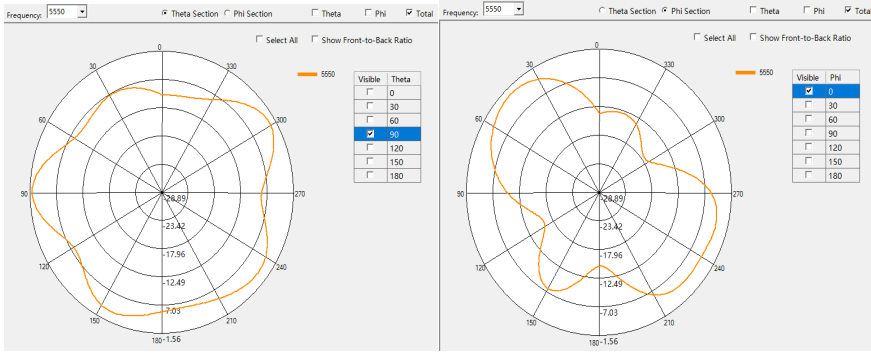

5550MHz
Gain=-0.88dBi

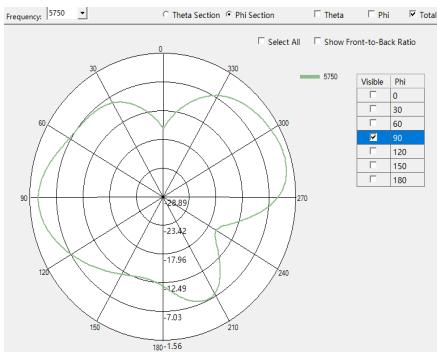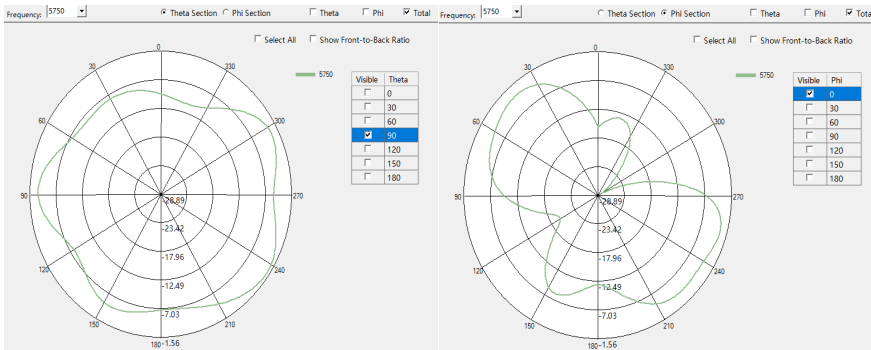

5750MHz
Gain=-2.30dBi

ANTENNA PHYSICAL DIAGRAM

