

# RF MEASUREMENT REPORT

---

**FCC ID:** 2BAXN-MR0004  
**Applicant:** Willand (Beijing) Technology Co., LTD.  
**Product:** Navimow Charging Station  
**Model No.:** i1C00G  
**Brand Name:** Segway  
**FCC Classification:** FCC Part 15 Spread Spectrum Transmitter (DSS)  
**FCC Rule Part(s):** Part15 Subpart C (Section 15.247)  
**Result:** Complies  
**Received Date:** 2023-09-08  
**Test Date:** 2023-10-25 ~ 2023-11-27

**Reviewed By:**

\_\_\_\_\_  
Vincent Yu

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

Report No.	Version	Description	Issue Date	Note
2309RSU023-U1	V01	Initial Report	2023-12-01	Valid

---

## CONTENTS

Description	Page
<b>1. General Information .....</b>	<b>6</b>
1.1. Applicant .....	6
1.2. Manufacturer .....	6
1.3. Testing Facility .....	6
1.4. Product Information.....	7
1.5. Radio Specification under Test .....	7
1.6. Working Frequencies .....	8
<b>2. Test Configuration .....</b>	<b>9</b>
2.1. Test Mode .....	9
2.2. Test System Connection Diagram .....	9
2.3. Test Software .....	10
2.4. Applied Standards.....	10
2.5. Test Environment Condition .....	10
<b>3. Antenna Requirement .....</b>	<b>11</b>
<b>4. Measuring Instrument .....</b>	<b>12</b>
<b>5. Decision Rules and Measurement Uncertainty .....</b>	<b>13</b>
5.1. Decision Rules .....	13
5.2. Measurement Uncertainty.....	13
<b>6. Test Result.....</b>	<b>14</b>
6.1. Summary .....	14
6.2. 20dB Bandwidth Measurement.....	15
6.2.1. Test Limit .....	15
6.2.2. Test Procedure.....	15
6.2.3. Test Setting .....	15
6.2.4. Test Setup .....	15
6.2.5. Test Result .....	15
6.3. Output Power Measurement.....	16
6.3.1. Test Limit .....	16
6.3.2. Test Procedure.....	16
6.3.3. Test Setting .....	16
6.3.4. Test Setup .....	16
6.3.5. Test Result .....	16
6.4. Carrier Frequency Separation Measurement .....	17
6.4.1. Test Limit .....	17
6.4.2. Test Procedure.....	17
6.4.3. Test Setting .....	17

---

6.4.4.	Test Setup .....	17
6.4.5.	Test Result .....	17
6.5.	Number of Hopping Channels Measurement .....	18
6.5.1.	Test Limit .....	18
6.5.2.	Test Procedure .....	18
6.5.3.	Test Settintg .....	18
6.5.4.	Test Setup .....	18
6.5.5.	Test Result .....	18
6.6.	Time of Occupancy Measurement .....	19
6.6.1.	Test Limit .....	19
6.6.2.	Test Procedure .....	19
6.6.3.	Test Settintg .....	19
6.6.4.	Test Setup .....	19
6.6.5.	Test Result .....	19
6.7.	Band-edge Compliance Measurement .....	20
6.7.1.	Test Limit .....	20
6.7.2.	Test Procedure .....	20
6.7.3.	Test Setting .....	20
6.7.4.	Test Setup .....	20
6.7.5.	Test Result .....	20
6.8.	Conducted Spurious Emissions Measurement .....	21
6.8.1.	Test Limit .....	21
6.8.2.	Test Procedure .....	21
6.8.3.	Test Setting .....	21
6.8.4.	Test Setup .....	21
6.8.5.	Test Result .....	22
6.9.	Radiated Spurious Emission Measurement .....	23
6.9.1.	Test Limit .....	23
6.9.2.	Test Procedure .....	23
6.9.3.	Test Setting .....	23
6.9.4.	Test Setup .....	25
6.9.5.	Test Result .....	26
6.10.	Radiated Restricted Band Edge Measurement .....	27
6.10.1.	Test Limit .....	27
6.10.2.	Test Procedure .....	28
6.10.3.	Test Setting .....	28
6.10.4.	Test Setup .....	29
6.10.5.	Test Result .....	29
6.11.	AC Conducted Emissions Measurement .....	30

---

---

6.11.1. Test Limit .....	30
6.11.2. Test Setup .....	30
6.11.3. Test Result .....	30
<b>Appendix A - Test Result.....</b>	<b>31</b>
A.1 Duty Cycle Test Result .....	31
A.2 20dB Bandwidth Test Result .....	32
A.3 Output Power Test Result .....	33
A.4 Carrier Frequency Separation Test Result.....	34
A.5 Number of Hopping Channels Test Result.....	35
A.6 Time of Occupancy Test Result .....	36
A.7 Band-edge Compliance Test Result.....	37
A.8 Conducted Spurious Emissions Test Result .....	38
A.9 Radiated Spurious Emission Test Result .....	39
A.10 Radiated Restricted Band Edge Test Result.....	42
A.11 AC Conducted Emissions Test Result .....	46
<b>Appendix B - Test Setup Photograph .....</b>	<b>50</b>
<b>Appendix C - EUT Photograph .....</b>	<b>51</b>



#### 1.4. Product Information

Product Name	Navimow Charging Station
Model No.	i1C00G
EUT Identification No.	20231017Sample#03
SRD Specification	915.05 ~ 917.9MHz
GNSS Specification	BDS, Galileo, GLONASS, GPS
Antenna Information	Refer to selection 1.5
Accessories	
Adapter	Model No.: NBW32D002D5N-US Input: 100 ~ 240V, 50/60Hz, 2.0A MAX Output: 32.0V = 2.5A, 80.0W
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

#### 1.5. Radio Specification under Test

Frequency Range	915.05 ~ 917.9 MHz
Channel Number	58
Type of modulation	FHSS
Antenna Type	PCB Antenna
Antenna Gain	2.36 dBi

### 1.6. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	915.05 MHz	02	915.10 MHz	03	915.15 MHz
04	915.20 MHz	05	915.25 MHz	06	915.30 MHz
07	915.35 MHz	08	915.40 MHz	09	915.45 MHz
10	915.50 MHz	11	915.55 MHz	12	915.60 MHz
13	915.65 MHz	14	915.70 MHz	15	915.75 MHz
16	915.80 MHz	17	915.85 MHz	18	915.90 MHz
19	915.95 MHz	20	916.00 MHz	21	916.05 MHz
22	916.10 MHz	23	916.15 MHz	24	916.20 MHz
25	916.25 MHz	26	916.30 MHz	27	916.35 MHz
28	916.40 MHz	29	916.45 MHz	30	916.50 MHz
31	916.55 MHz	32	916.60 MHz	33	916.65 MHz
34	916.70 MHz	35	916.75 MHz	36	916.80 MHz
37	916.85 MHz	38	916.90 MHz	39	916.95 MHz
40	917.00 MHz	41	917.05 MHz	42	917.10 MHz
43	917.15 MHz	44	917.20 MHz	45	917.25 MHz
46	917.30 MHz	47	917.35 MHz	48	917.40 MHz
49	917.45 MHz	50	917.50 MHz	51	917.55 MHz
52	917.60 MHz	53	917.65 MHz	54	917.70 MHz
55	917.75 MHz	56	917.80 MHz	57	917.85 MHz
58	917.90 MHz	--	--	--	--

Note: The CH01/CH30/CH58 were selected as Low/Mid/High test channels in this report.




## 2. Test Configuration

### 2.1. Test Mode

Mode 1: Transmit at CH01 (915.05MHz)
Mode 2: Transmit at CH30 (916.50MHz)
Mode 3: Transmit at CH58 (917.90MHz)
Mode 4: Transmit at frequency hopping mode

### 2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

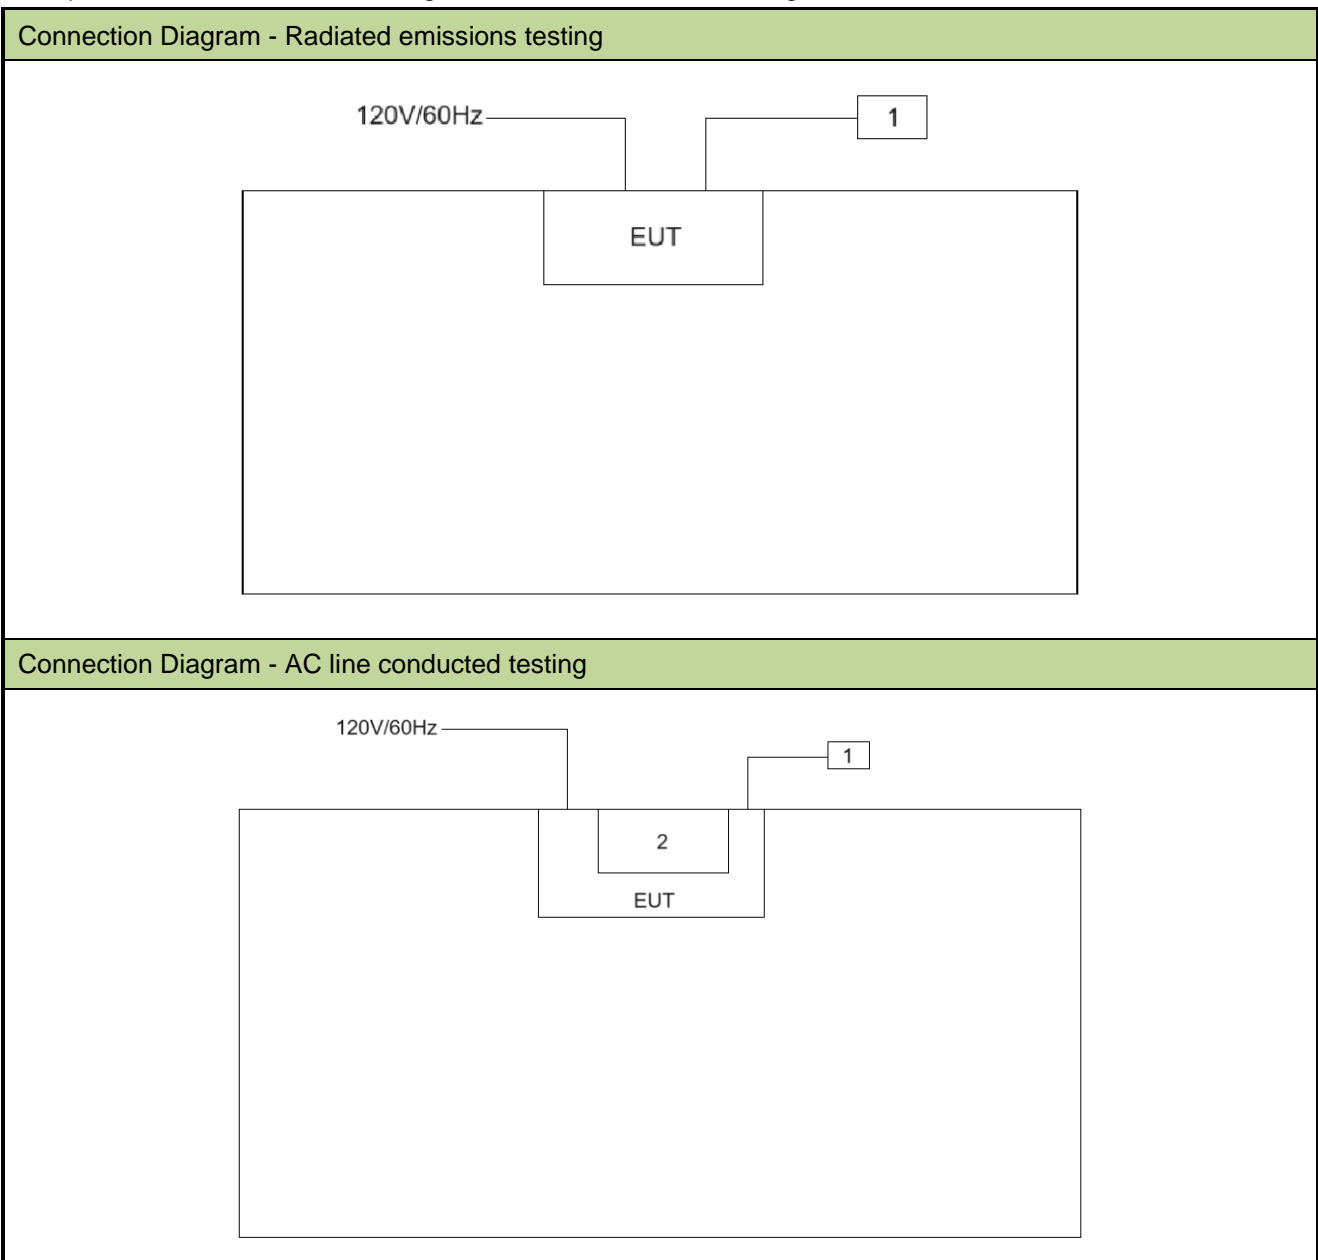

Product		Manufacturer	Model No.
1	Notebook	HP	445R G6
2	Navimow	Navimow B.V.	i110N

### 2.3. Test Software

The test utility software used during testing was “sscom5.13.1.exe”, and the version was 5.13.1.

### 2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

### 2.5. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75 %RH

### 3. Antenna Requirement

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The unit complies with the requirement of §15.203.

#### 4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2024-09-27	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2023-11-01	SIP-AC3
				1 year	2024-10-28	SIP-AC3
Preamplifier	EMCI	EMC001330	MRTSUE06643	1 year	2024-01-12	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2024-08-04	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2023-12-22	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE11255	1 year	2024-08-13	SIP-AC3
Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2024-06-29	SIP-TR1
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2023-11-01	SIP-TR1
				1 year	2024-10-28	SIP-TR1
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2023-12-28	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2024-08-09	WZ-AC1
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2024-09-17	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2024-06-09	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2024-04-20	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2024-05-31	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2024-10-23	WZ-AC1
Preamplifier	EMCI	EMC051845SE	MRTSUE06987	1 year	2024-09-07	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2023-11-01	WZ-AC1
				1 year	2024-10-25	WZ-AC1
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2024-05-23	SIP-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2024-05-23	SIP-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06614	1 year	2024-10-23	SIP-SR2
Thermohygrometer	testo	608-H1	MRTSUE06621	1 year	2023-11-27	SIP-SR2
				1 year	2024-11-03	SIP-SR2
Shielding Room	MIX-BEP	SIP-SR2	MRTSUE06949	5 years	2024-10-23	SIP-SR2

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable
Controller_MF 7802BS	1.02	RE Antenna & Turntable

## 5. Decision Rules and Measurement Uncertainty

### 5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
<b>Radiated Emission Measurement</b>
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
<b>Spurious Emissions, Conducted</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.2dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.4dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.7%

## 6. Test Result

### 6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(1)	20dB Bandwidth	Conducted	Pass
15.247(b)(2)	Peak Transmitter Output Power		Pass
15.247(a)(1)	Channel Separation		Pass
15.247(a)(1)(i)	Number of Channels		Pass
15.247(a)(1)(i)	Time of Occupancy		Pass
15.247(d)	Band Edge / Out- of-Band Emissions		Pass
15.205, 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

**Note:** The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

## 6.2. 20dB Bandwidth Measurement

### 6.2.1. Test Limit

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.


### 6.2.2. Test Procedure

ANSI C63.10-2013 - Section 6.9.2 (20dB Bandwidth)

### 6.2.3. Test Setting

1. Set RBW = 1% to 5% of the 20dB bandwidth
2. VBW = approximately three times RBW
3. Span = approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### 6.2.4. Test Setup

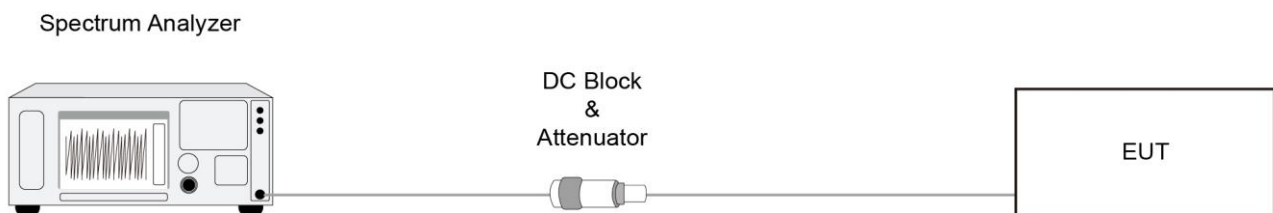

### 6.2.5. Test Result

Refer to Appendix A.2.

### 6.3. Output Power Measurement

#### 6.3.1. Test Limit

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels


#### 6.3.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.5

#### 6.3.3. Test Setting

1. Set RBW  $\geq$  the 20 dB bandwidth of the emission being measured.
2. VBW  $\geq$  RBW
3. Span = approximately five times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize, Use the marker-to-peak function to set the marker to the peak of the emission.  
The indicated level is the peak output power (don't forget added the external attenuation and cable loss)

#### 6.3.4. Test Setup

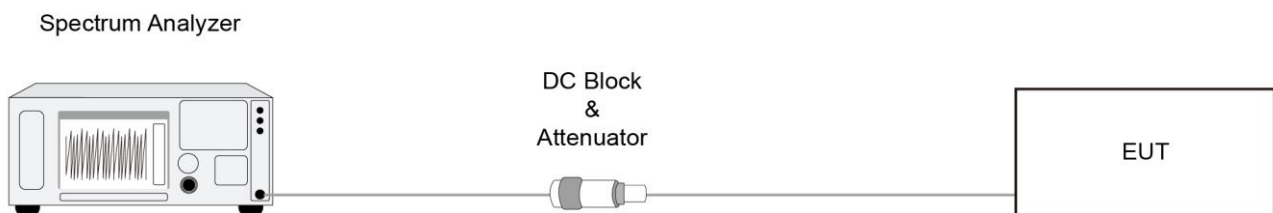

#### 6.3.5. Test Result

Refer to Appendix A.3.



## 6.4. Carrier Frequency Separation Measurement

### 6.4.1. Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


### 6.4.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.2.

#### 6.4.3. Test Setting

1. Span = wide enough to capture the peaks of two adjacent channels.
2. Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
3. VBW  $\geq$  RBW
4. Sweep time = Auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. Allowed the trace to stabilize
8. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 6.4.4. Test Setup

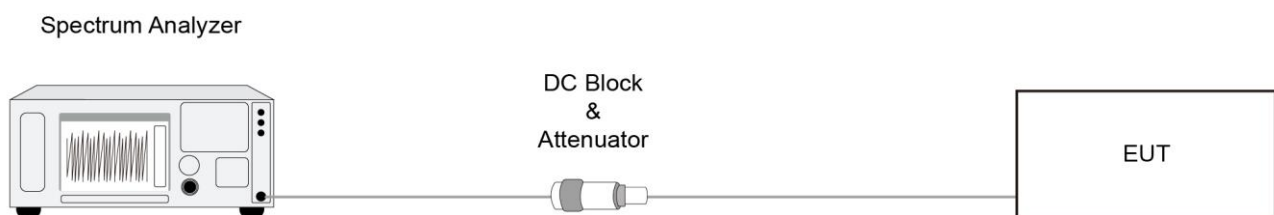

#### 6.4.5. Test Result

Refer to Appendix A.4.

## 6.5. Number of Hopping Channels Measurement

### 6.5.1. Test Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.


### 6.5.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.3.

### 6.5.3. Test Setting

1. Span = the frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
2. To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. VBW  $\geq$  RBW
4. Sweep time = Auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. Allow the trace to stabilize

### 6.5.4. Test Setup

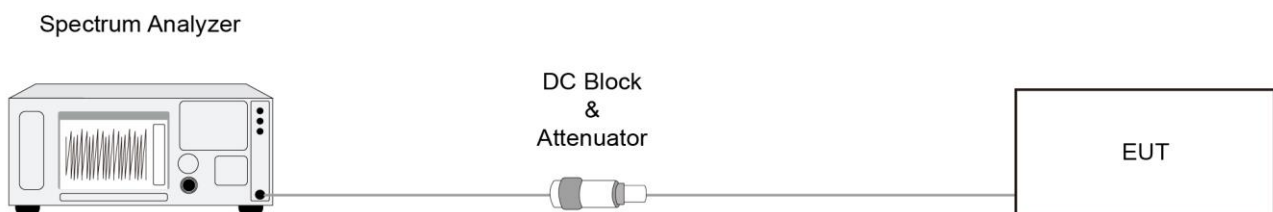

### 6.5.5. Test Result

Refer to Appendix A.5.

## 6.6. Time of Occupancy Measurement

### 6.6.1. Test Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.


### 6.6.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.4.

### 6.6.3. Test Setting

1. Span = zero span, centered on a hopping channel.
2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
3. VBW  $\geq$  RBW
4. Sweep time = as necessary to capture the entire dwell time per hopping channel
5. Detector = Peak
6. Trace mode = max hold
7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

### 6.6.4. Test Setup

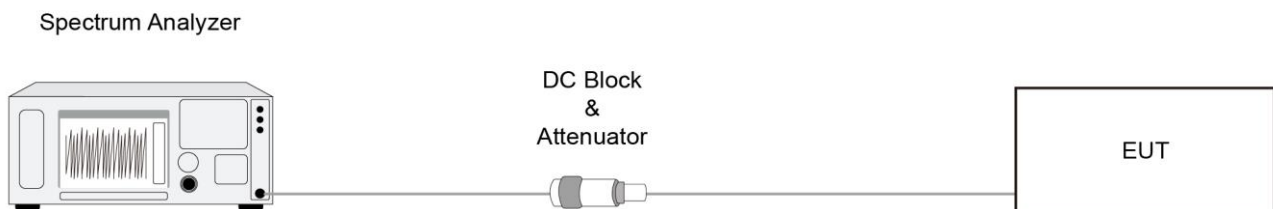

### 6.6.5. Test Result

Refer to Appendix A.6.

## 6.7. Band-edge Compliance Measurement

### 6.7.1. Test Limit

The maximum permissible emission level is 20dBc. Any emissions were lying outside of the emission bandwidth and in authorized band edges to a field strength limit specified in Section 15.209 of the Title 47 CFR.


### 6.7.2. Test Procedure

ANSI C63.10-2013 - Section 6.10.4.

### 6.7.3. Test Setting

1. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

### 6.7.4. Test Setup

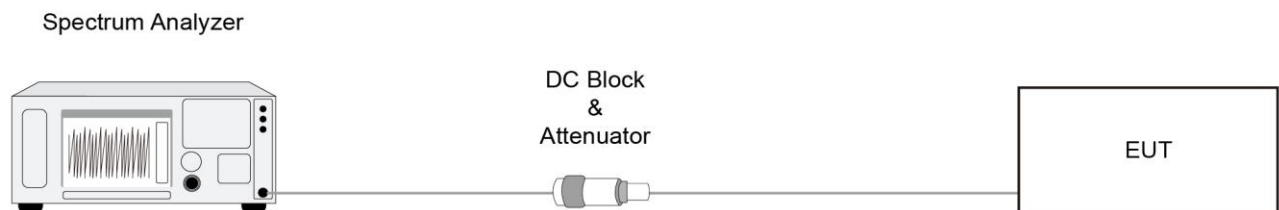

### 6.7.5. Test Result

Refer to Appendix A.7.

## 6.8. Conducted Spurious Emissions Measurement

### 6.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### 6.8.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.8.

### 6.8.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

### 6.8.4. Test Setup

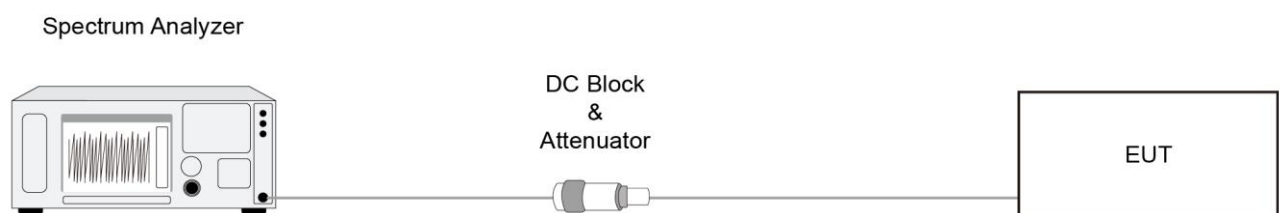

### **6.8.5. Test Result**

Refer to Appendix A.8.

## 6.9. Radiated Spurious Emission Measurement

### 6.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.9.2. Test Procedure

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 6.9.3. Test Setting

**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


**Average Measurements above 1GHz (Method VB)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize




### 6.9.4. Test Setup


Below 30MHz Test Setup:

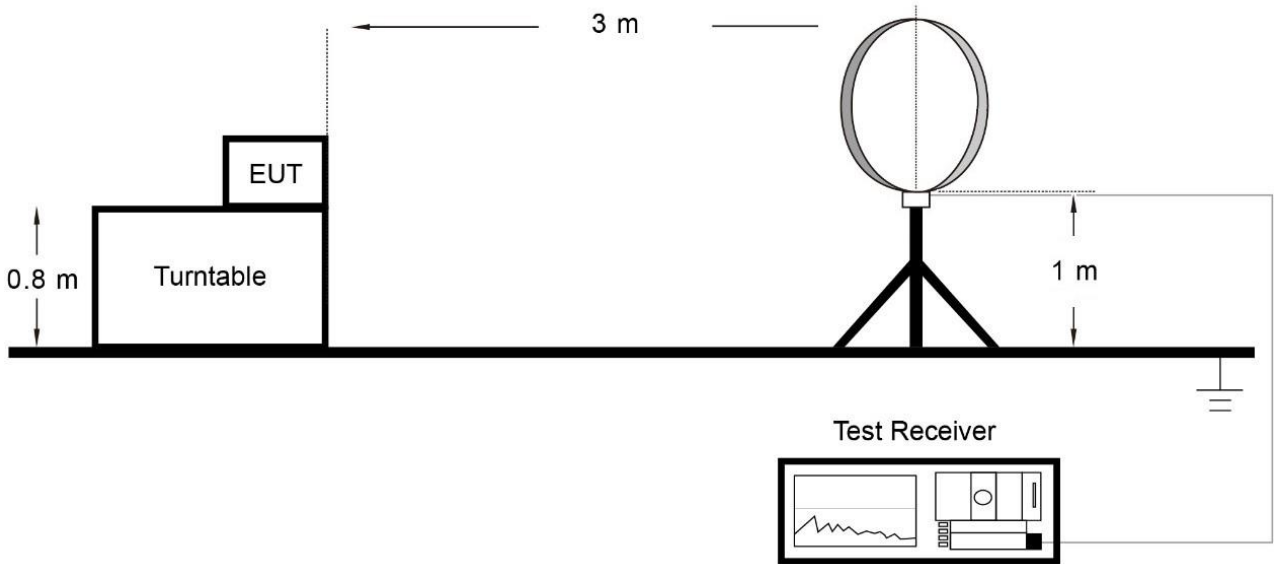

Below 1GHz Test Setup:

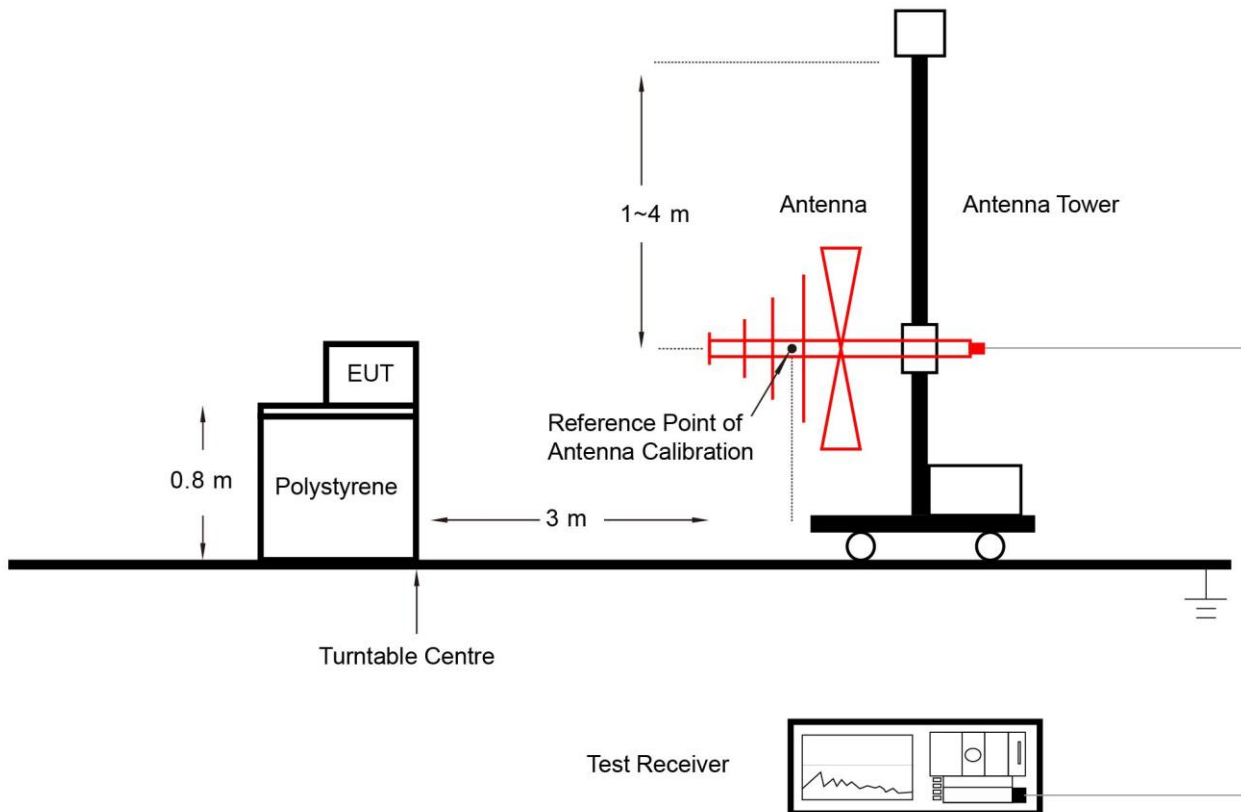

Above 1GHz Test Setup:

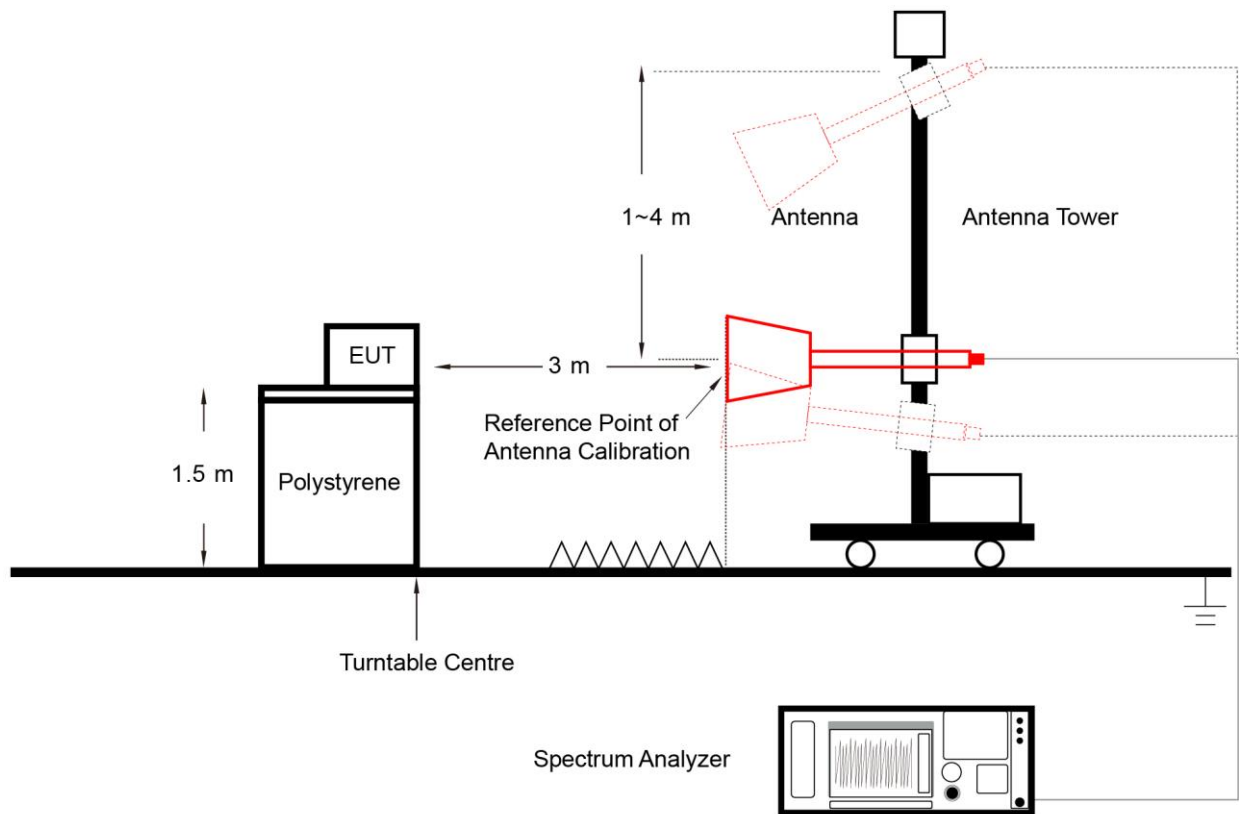

**6.9.5. Test Result**

Refer to Appendix A.9.

## 6.10. Radiated Restricted Band Edge Measurement

### 6.10.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.10.2. Test Procedure

ANSI C63.10 Section 6.3 (General Requirements)


ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

### 6.10.3. Test Setting

#### Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

### 6.10.4. Test Setup

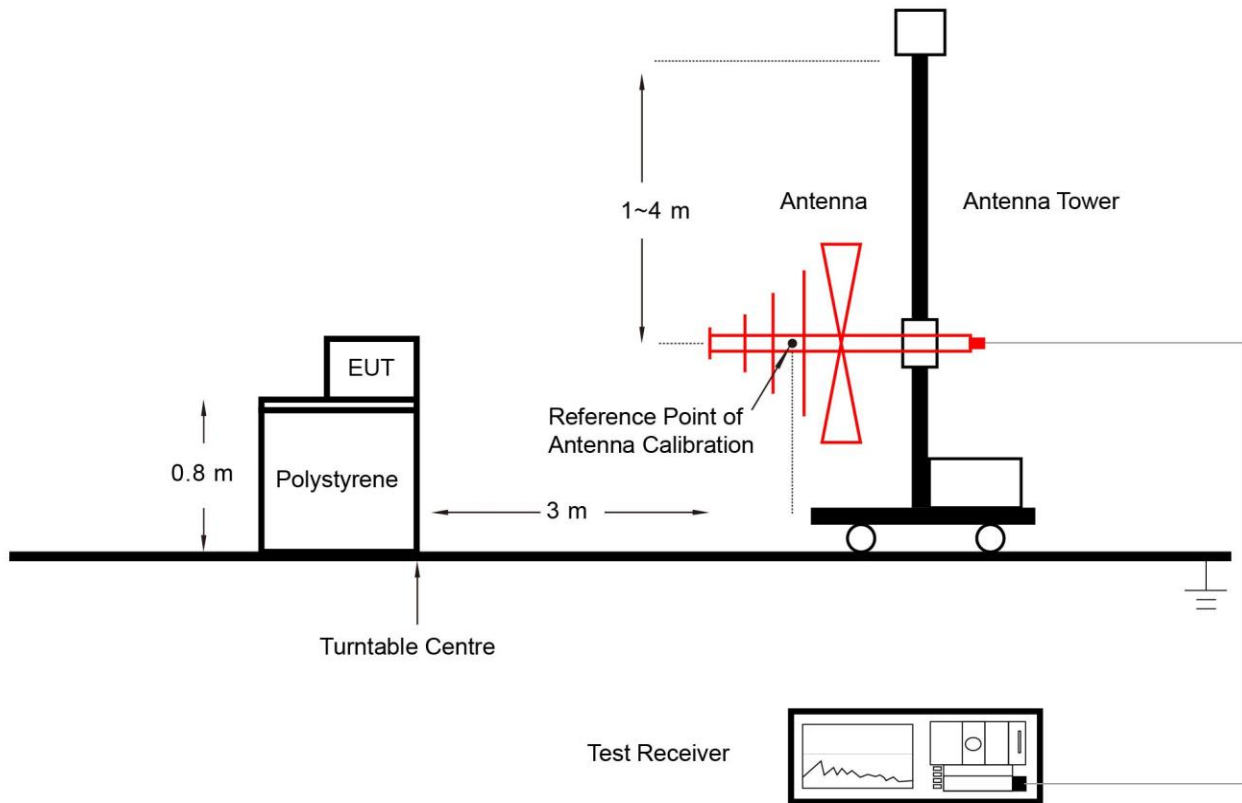

### 6.10.5. Test Result

Refer to Appendix A.10.

## 6.11. AC Conducted Emissions Measurement


### 6.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.11.2. Test Setup

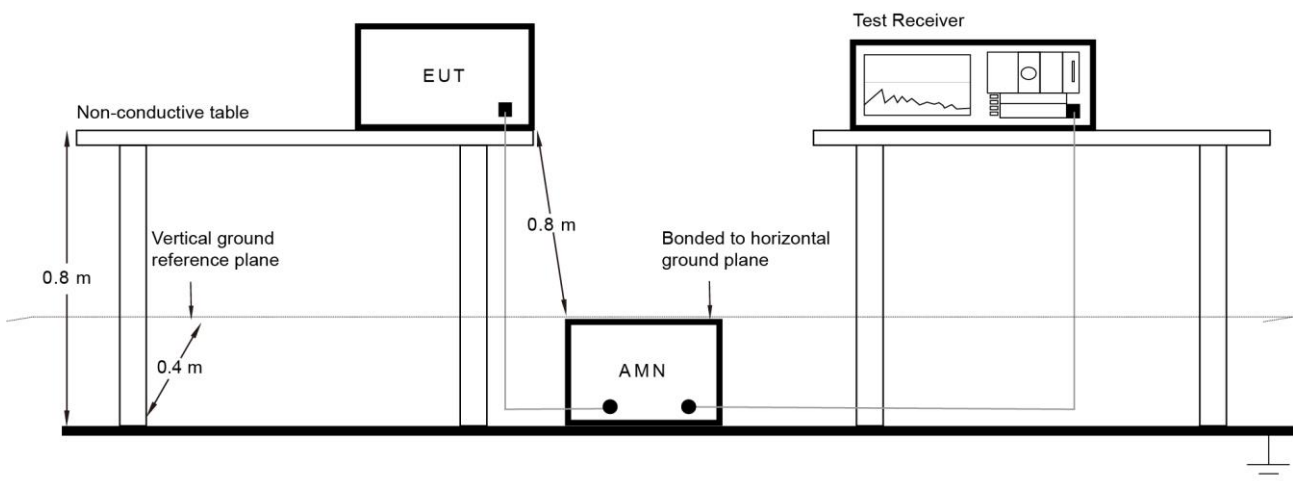

### 6.11.3. Test Result

Refer to Appendix A.11.

## Appendix A - Test Result

### A.1 Duty Cycle Test Result


Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-11-20		

Test Mode	Duty Cycle
CH01 (915.05MHz)	0.54%
Duty Cycle (T = Transmission Duration)	
CH01 (T = 6.00ms)	

### A.2 20dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-11-20		

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
01	915.05	47.26	≤ 500
30	916.50	47.23	≤ 500
58	917.90	47.19	≤ 500

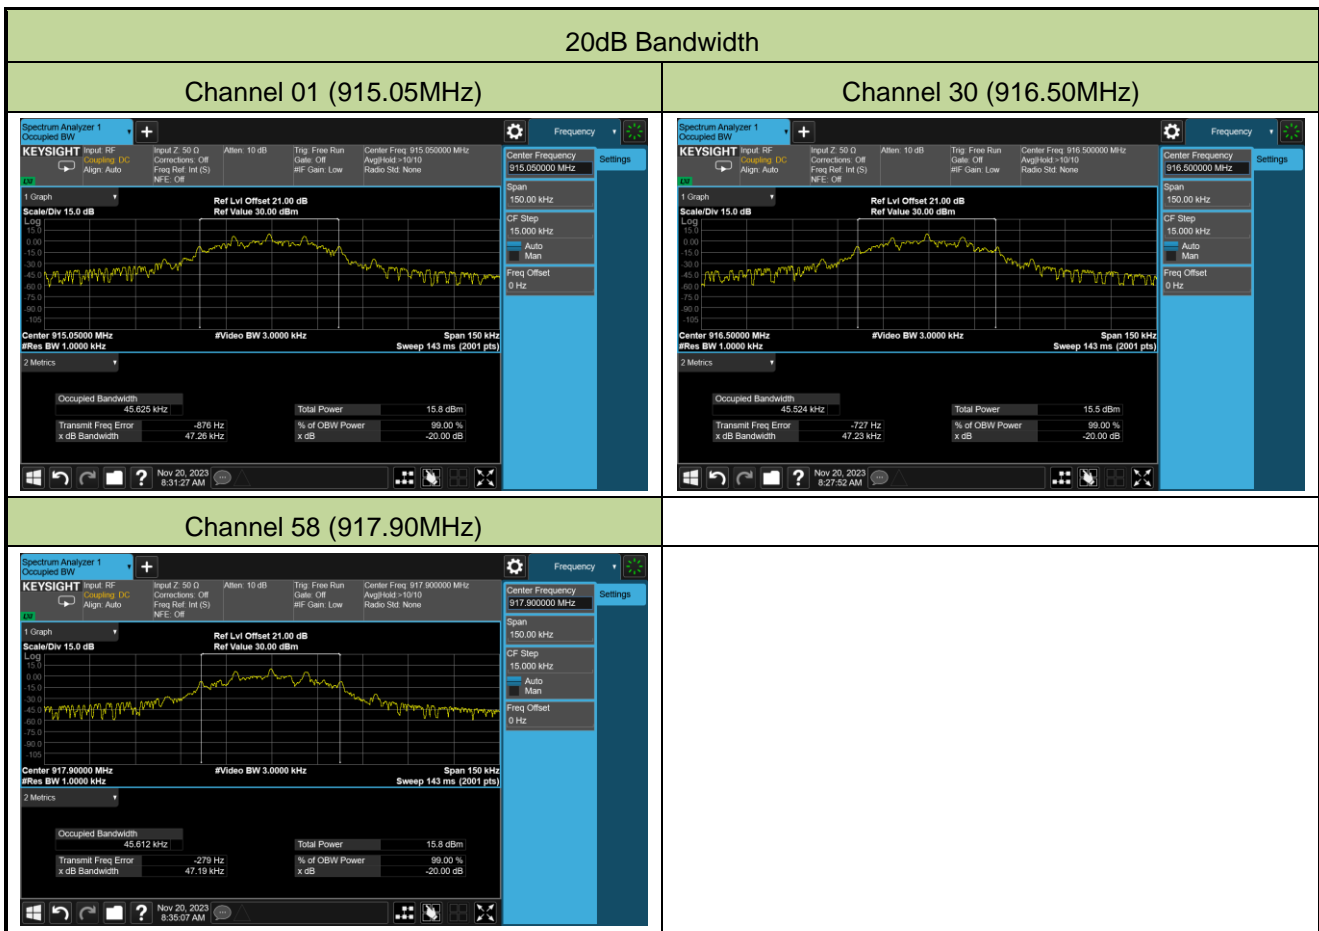




### A.3 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-11-20		

Channel No.	Frequency (MHz)	Output Power (dBm)	Power Limit (dBm)
01	915.05	12.28	≤ 30.00
30	916.50	12.26	≤ 30.00
58	917.90	12.44	≤ 30.00

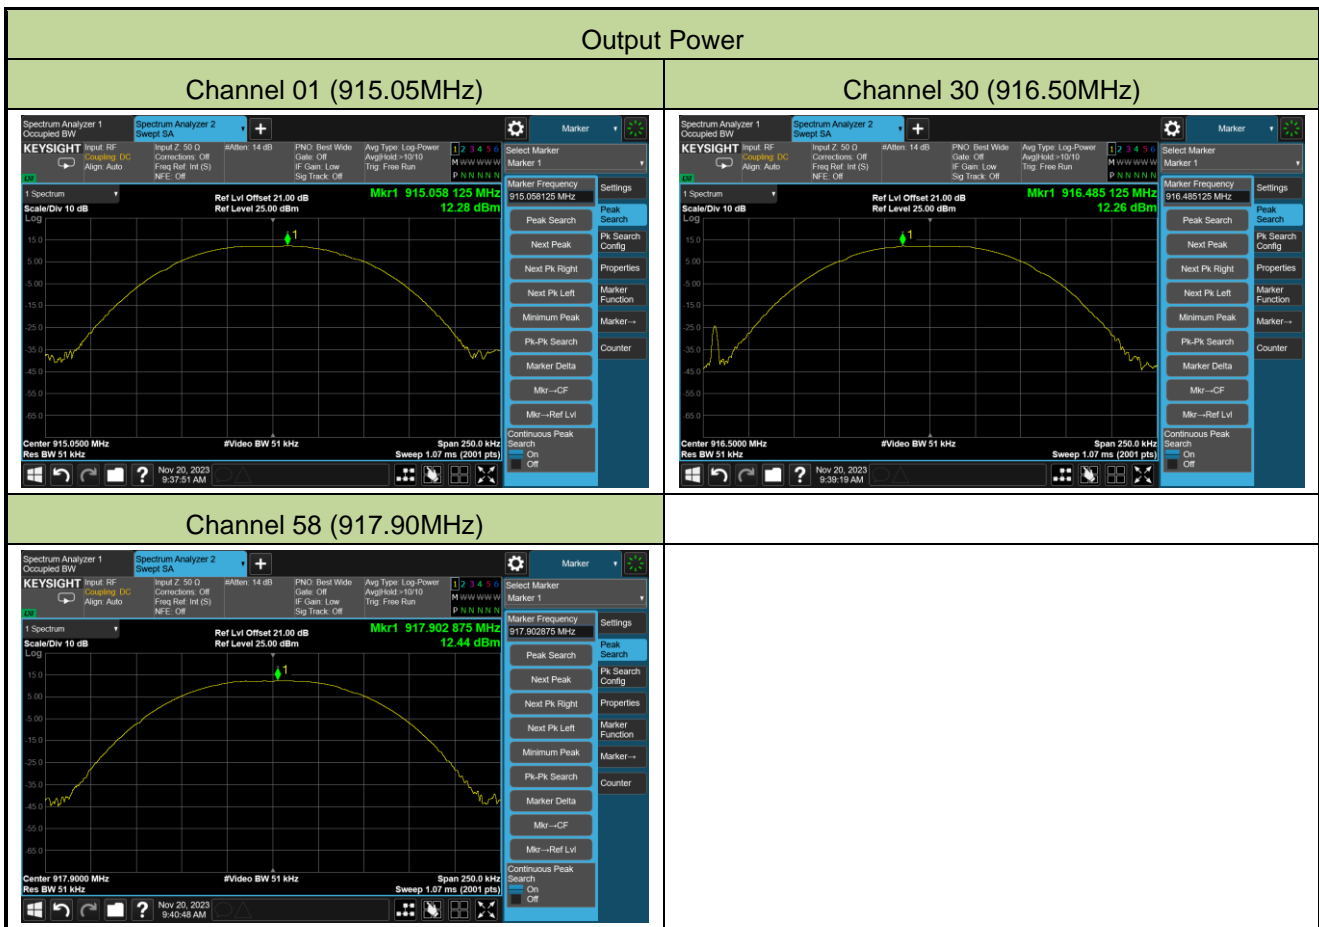


### A.4 Carrier Frequency Separation Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-11-20		

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
01	915.05	50	≥ 47.26	Pass
30	916.50	50	≥ 47.23	Pass
58	917.90	50	≥ 47.19	Pass

Note: The Limit is the value of the 20dB BW.

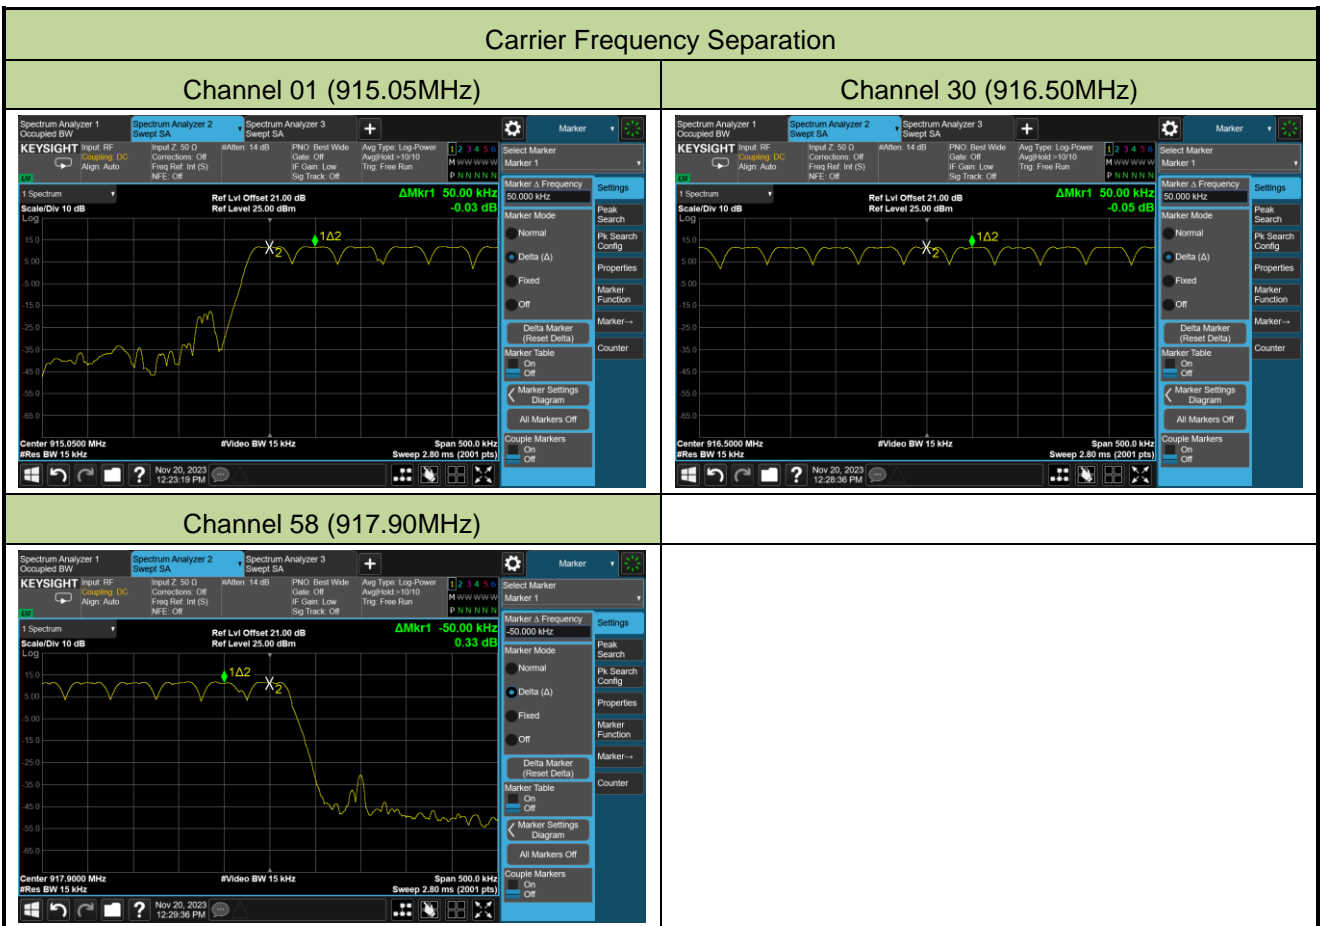

### A.5 Number of Hopping Channels Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-11-17		

Channel Numbers	Frequency (MHz)	Limit (Hopping Channels)	Result
58	915.05~917.90	≥ 50	Pass




### A.6 Time of Occupancy Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-11-22		

Channel No.	Frequency (MHz)	Transmit Time Per Hop (ms)	Observation Period (s)	Number of Hops in Observation Period	Time of Occupancy (ms)	Limit (ms)	Result
01 ~ 58	915.05~917.90	25.88	20	5	129.4	≤ 400	Pass



Note: Time of Occupancy (ms) = Transmit Time Per Hop (ms) \* Number of Hops in Observation Period

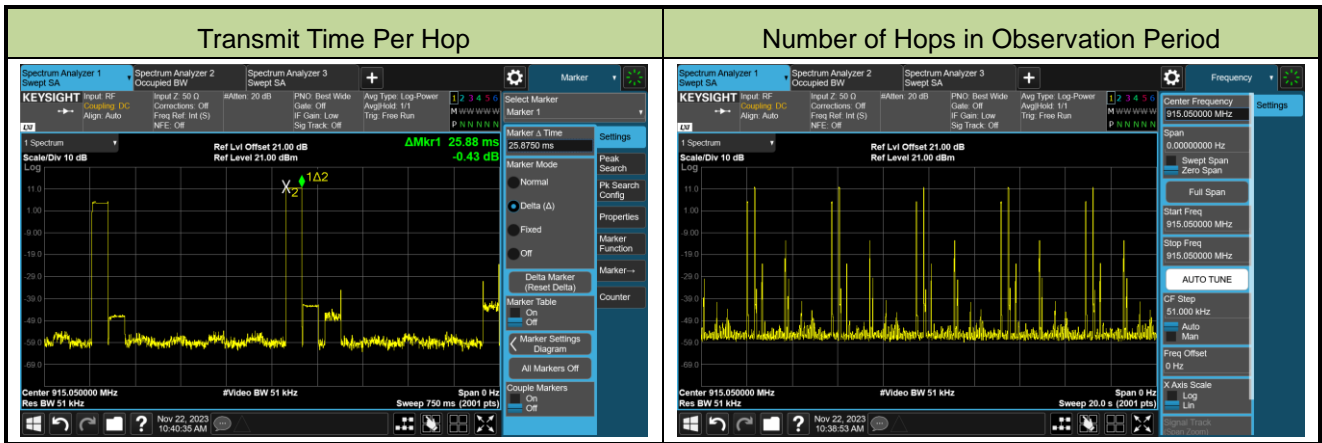

**A.7 Band-edge Compliance Test Result**

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-11-20		


Channel No.	Frequency (MHz)	Limit	Result
01	915.05	20dBc	Pass
58	917.90	20dBc	Pass

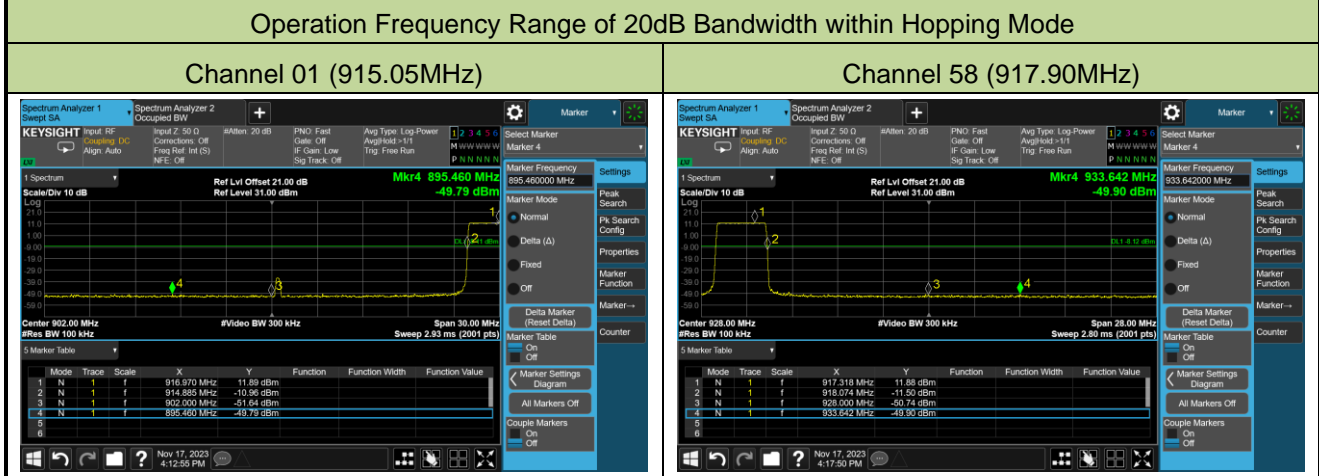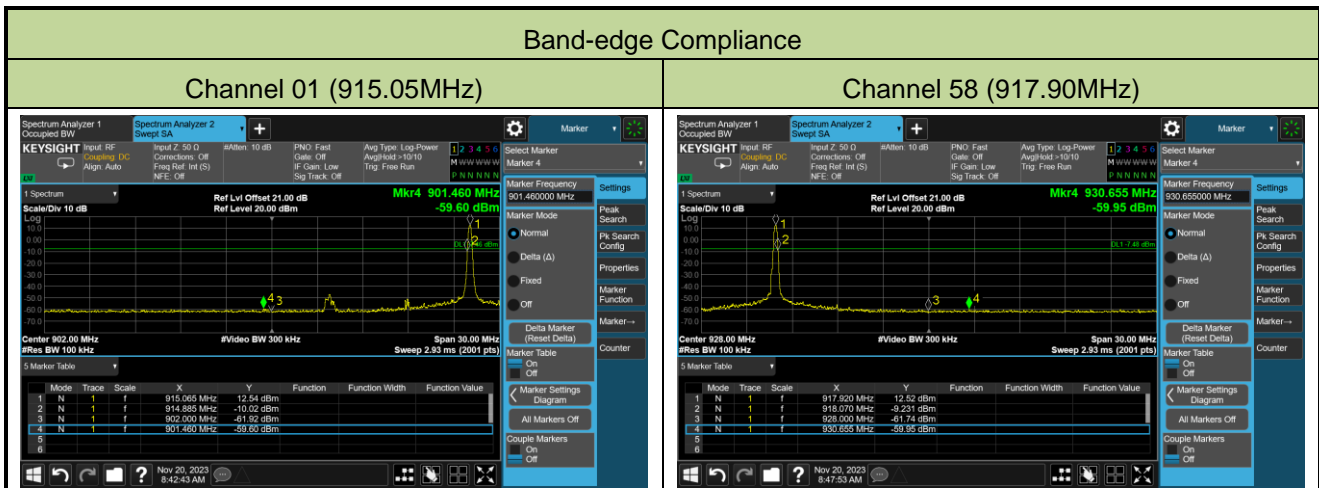

### A.8 Conducted Spurious Emissions Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-11-13		

Channel No.	Frequency (MHz)	Limit (MHz)	Result
01	915.05	20dBc	Pass
30	916.50	20dBc	Pass
58	917.90	20dBc	Pass

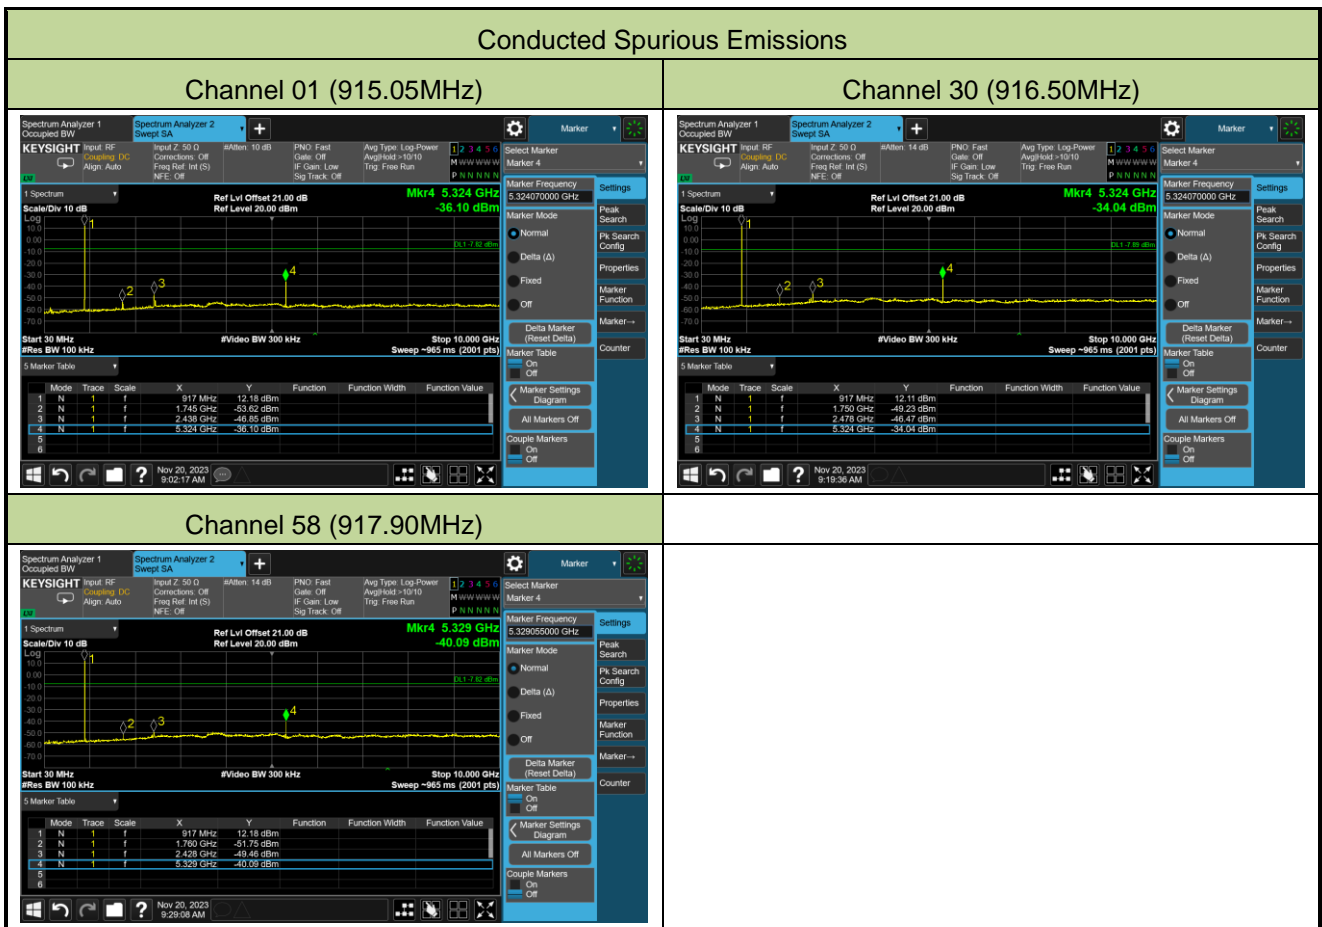

**A.9 Radiated Spurious Emission Test Result**

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-26		
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-10GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
01	2228.5	40.0	-2.8	37.2	74.0	-36.8	Peak	Horizontal
	3781.0	37.4	0.4	37.8	74.0	-36.2	Peak	Horizontal
	7556.5	37.1	8.5	45.6	74.0	-28.4	Peak	Horizontal
	4172.5	36.4	1.0	37.4	74.0	-36.6	Peak	Vertical
	4888.0	36.7	3.2	39.9	74.0	-34.1	Peak	Vertical
	7570.0	37.2	8.4	45.6	74.0	-28.4	Peak	Vertical
30	4082.5	38.1	0.9	39.0	74.0	-35.0	Peak	Horizontal
	4856.5	36.6	3.0	39.6	74.0	-34.4	Peak	Horizontal
	7642.0	37.7	8.3	46.0	74.0	-28.0	Peak	Horizontal
	4150.0	37.7	1.1	38.8	74.0	-35.2	Peak	Vertical
	4978.0	35.7	3.6	39.3	74.0	-34.7	Peak	Vertical
	7372.0	36.9	8.6	45.5	74.0	-28.5	Peak	Vertical
58	4024.0	37.3	1.0	38.3	74.0	-35.7	Peak	Horizontal
	4901.5	36.8	3.2	40.0	74.0	-34.0	Peak	Horizontal
	7408.0	36.7	8.5	45.2	74.0	-28.8	Peak	Horizontal
	3947.5	37.4	0.7	38.1	74.0	-35.9	Peak	Vertical
	4807.0	36.4	3.0	39.4	74.0	-34.6	Peak	Vertical
	7376.5	37.3	8.6	45.9	74.0	-28.1	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

Site: WZ-AC1	Test Date: 2023-10-25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: Navimow Charging Station	Power: AC 120V/60Hz
Test Mode: Transmit at CH58, 917.9MHz	

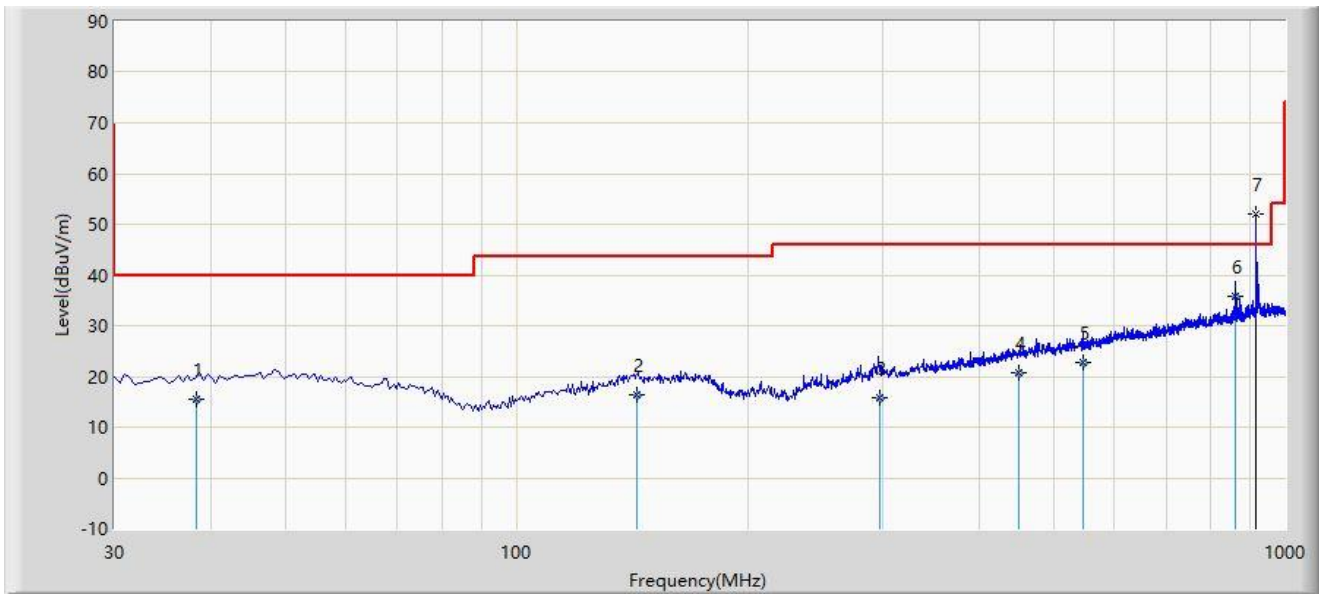

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		38.270	15.515	-2.320	-24.485	40.000	17.836	QP
2		143.210	16.370	-1.560	-27.130	43.500	17.930	QP
3		296.320	15.676	-2.740	-30.324	46.000	18.416	QP
4		451.230	20.852	-1.590	-25.148	46.000	22.443	QP
5		547.210	22.625	-1.470	-23.375	46.000	24.095	QP
6		863.230	35.772	6.580	-10.228	46.000	29.192	QP
7	*	918.035	52.053	22.433	N/A	N/A	29.620	PK

Note 1: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 2: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


Note 3: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 4: The No.7 is fundamental frequency.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.



Site: WZ-AC1	Test Date: 2023-10-25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Vertical
EUT: Navimow Charging Station	Power: AC 120V/60Hz
Test Mode: Transmit at CH58, 917.9MHz	

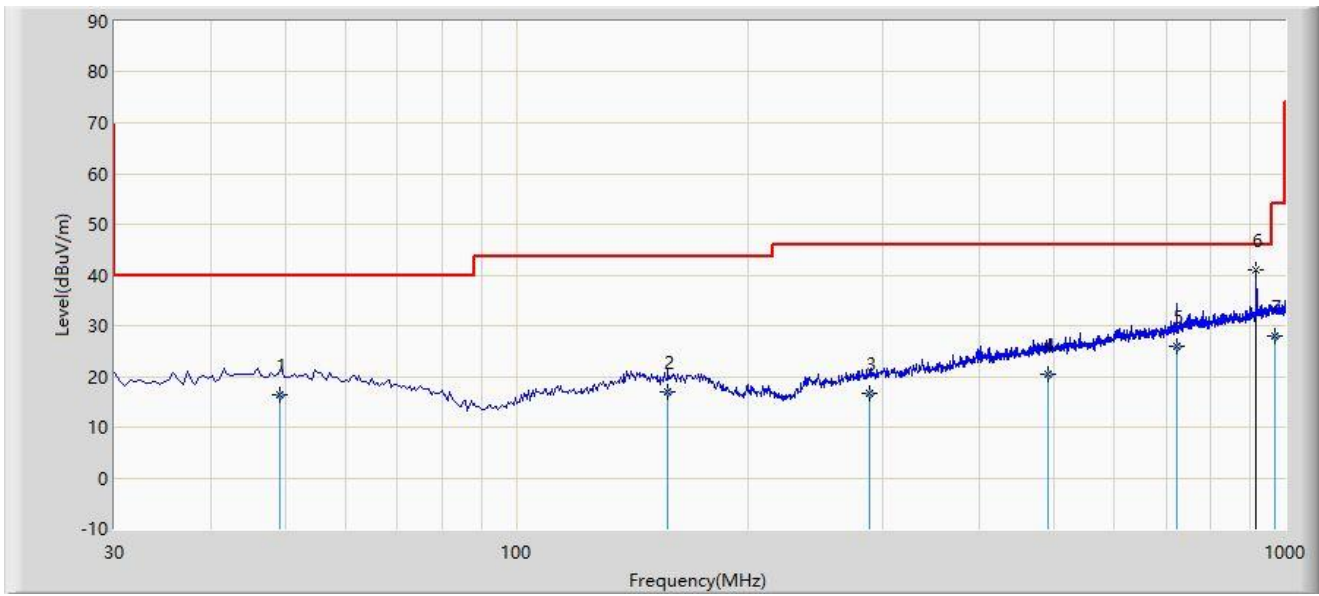

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		49.250	16.448	-2.130	-23.552	40.000	18.577	QP
2		157.210	16.869	-1.420	-26.631	43.500	18.288	QP
3		288.230	16.587	-1.690	-29.413	46.000	18.278	QP
4		492.140	20.315	-2.780	-25.685	46.000	23.095	QP
5		722.360	25.875	-1.210	-20.125	46.000	27.084	QP
6	*	918.035	40.915	11.295	N/A	N/A	29.620	PK
7		970.230	27.921	-2.330	-26.079	54.000	30.252	QP

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 2: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


Note 3: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 4: The No.6 is fundamental frequency.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

**A.10 Radiated Restricted Band Edge Test Result**

Site: SIP-AC3	Test Date: 2023-11-13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Justin Guo
Probe: VULB 9168_00997_25-2000MHz	Polarity: Horizontal
EUT: Navimow Charging Station	Power: AC 120V/60Hz
Test Mode: Transmit by SRD at CH01, 915.05MHz	

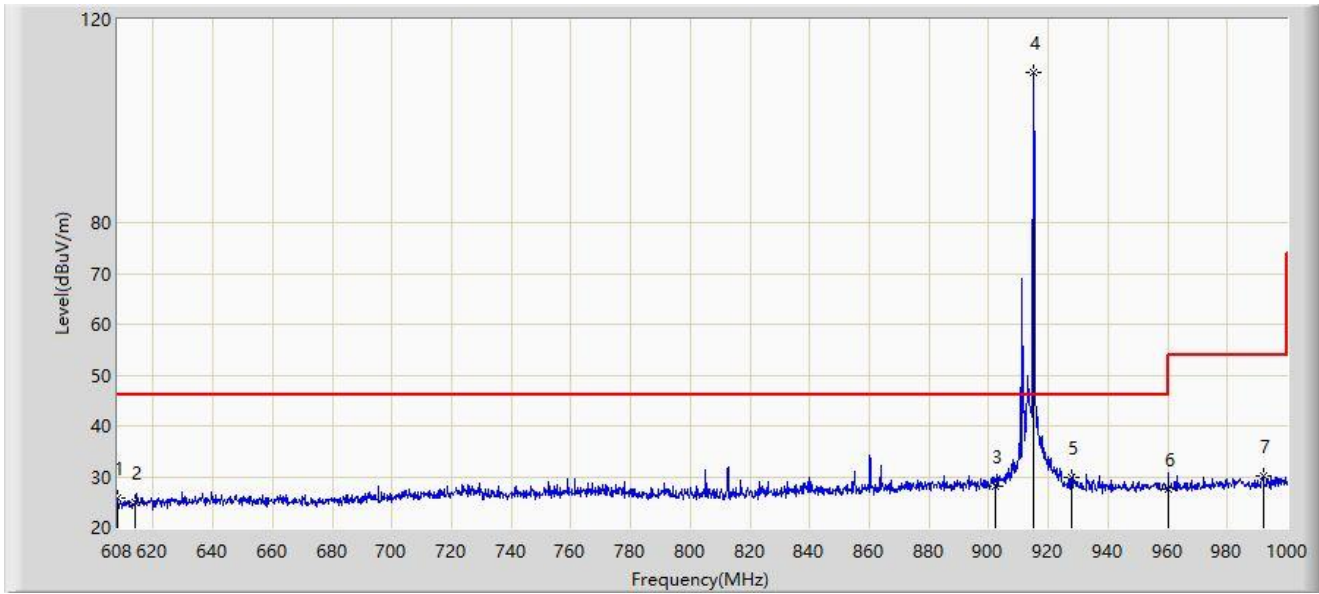


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		608.000	25.937	0.158	-20.063	46.000	25.779	PK
2		614.000	24.844	-1.081	-21.156	46.000	25.925	PK
3		902.000	28.116	-1.605	-17.884	46.000	29.721	PK
4		915.132	109.665	80.083	N/A	N/A	29.582	PK
5	*	928.000	29.819	0.354	-16.181	46.000	29.465	PK
6		960.000	27.595	-1.924	-18.405	46.000	29.519	PK
7		991.964	30.207	0.216	-23.793	54.000	29.991	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-11-13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Justin Guo
Probe: VULB 9168_00997_25-2000MHz	Polarity: Vertical
EUT: Navimow Charging Station	Power: AC 120V/60Hz
Test Mode: Transmit by SRD at CH01, 915.05MHz	

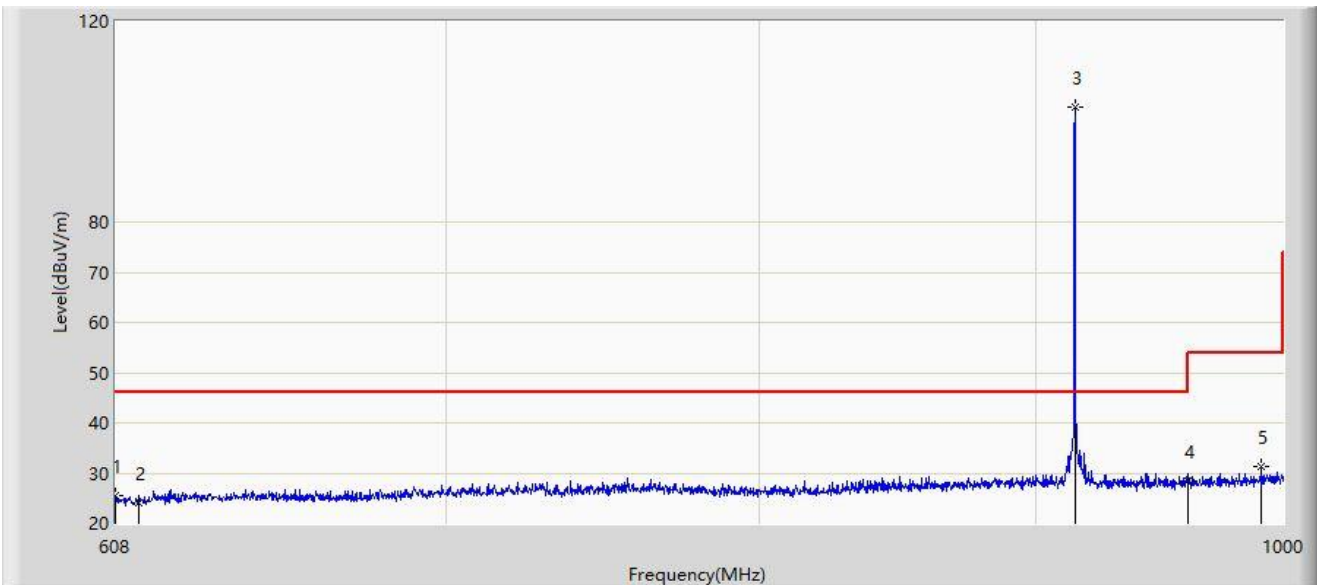


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		608.000	25.632	-0.147	-20.368	46.000	25.779	PK
2		614.000	24.018	-1.907	-21.982	46.000	25.925	PK
3		915.132	102.893	73.311	N/A	N/A	29.582	PK
4	*	960.000	28.307	-1.212	-17.693	46.000	29.519	PK
5		990.592	31.420	31.420	-22.580	54.000	0.000	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-11-13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Justin Guo
Probe: VULB 9168_00997_25-2000MHz	Polarity: Horizontal
EUT: Navimow Charging Station	Power: AC 120V/60Hz
Test Mode: Transmit by SRD at CH58, 917.9MHz	

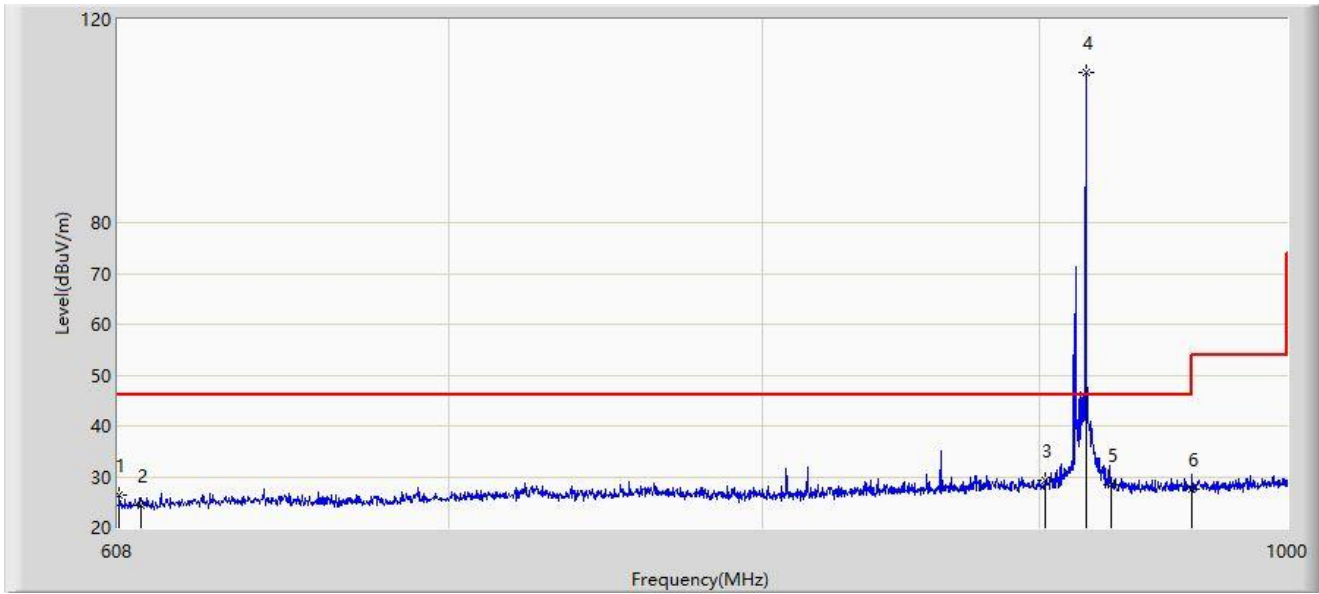


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		608.392	26.470	0.684	-19.530	46.000	25.786	PK
2		614.000	24.287	-1.638	-21.713	46.000	25.925	PK
3	*	902.000	29.205	-0.516	-16.795	46.000	29.721	PK
4		917.876	109.634	80.051	N/A	N/A	29.583	PK
5		928.000	28.485	-0.980	-17.515	46.000	29.465	PK
6		960.000	27.674	-1.845	-18.326	46.000	29.519	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-11-13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Justin Guo
Probe: VULB 9168_00997_25-2000MHz	Polarity: Vertical
EUT: Navimow Charging Station	Power: AC 120V/60Hz
Test Mode: Transmit by SRD at CH58, 917.9MHz	

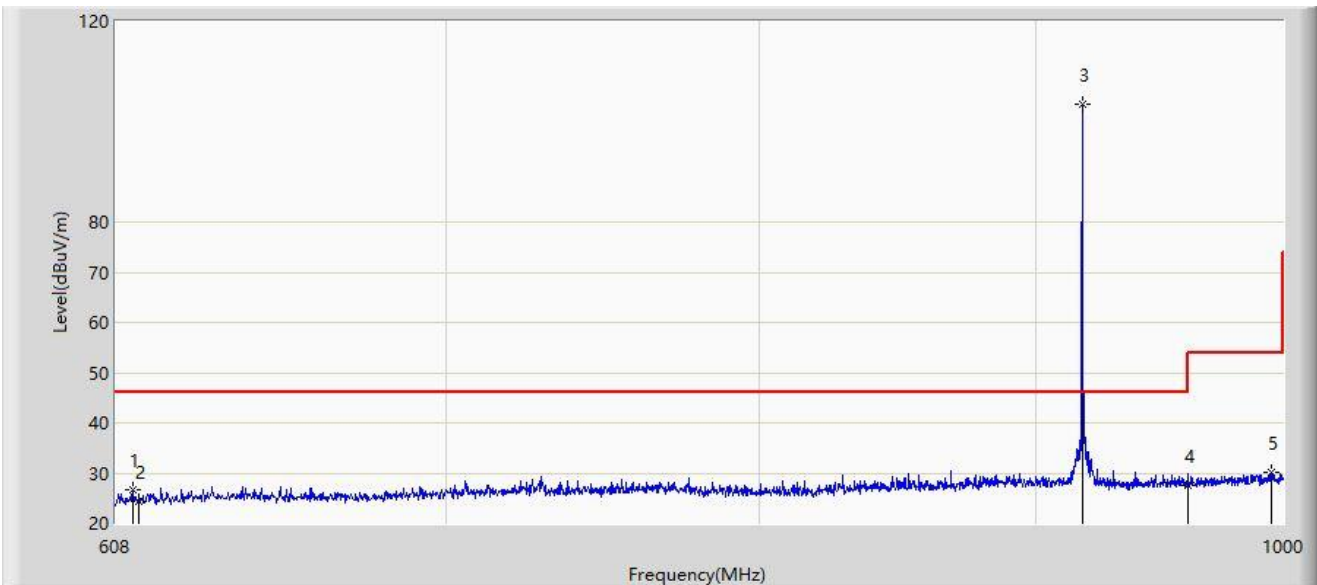

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		612.508	26.674	0.796	-19.326	46.000	25.878	PK
2		614.000	24.481	-1.444	-21.519	46.000	25.925	PK
3		917.876	103.434	73.851	N/A	N/A	29.583	PK
4	*	960.000	27.632	-1.887	-18.368	46.000	29.519	PK
5		994.904	30.089	30.089	-23.911	54.000	0.000	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

**A.11 AC Conducted Emissions Test Result**

Site: SIP-SR2	Test Date: 2023-11-27
Temperature: 18.7°C	Humidity: 52.8%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Mark Long
Probe: SIP-SR2-ENV216_101684_C	Polarity: Line
EUT: Navimow Charging Station	Power: AC 120V/60Hz
Test Mode: Transmit at CH58, 917.90MHz	

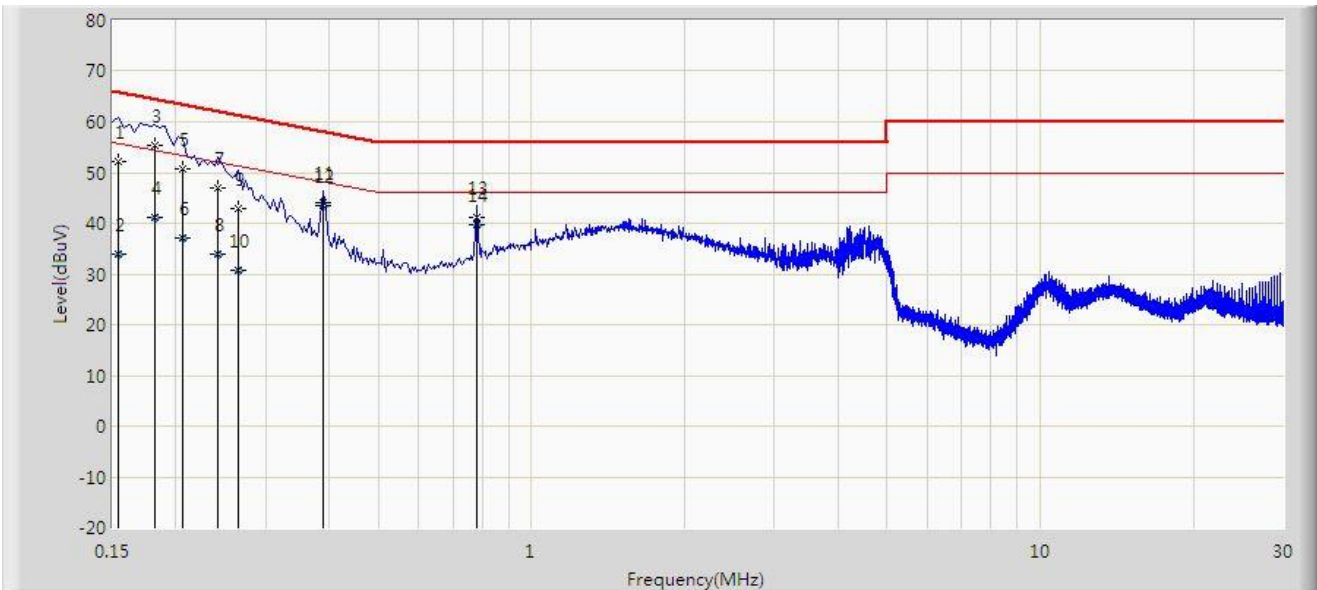


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.154	52.315	42.400	-13.467	65.781	9.915	QP
2		0.154	33.915	24.000	-21.867	55.781	9.915	AV
3		0.182	55.223	45.200	-9.171	64.394	10.023	QP
4		0.182	41.123	31.100	-13.271	54.394	10.023	AV
5		0.206	50.842	40.803	-12.523	63.365	10.039	QP
6		0.206	37.189	27.151	-16.176	53.365	10.039	AV
7		0.242	46.981	37.100	-15.046	62.027	9.881	QP
8		0.242	33.881	24.000	-18.146	52.027	9.881	AV
9		0.266	42.851	33.047	-18.391	61.242	9.803	QP
10		0.266	30.723	20.919	-20.519	51.242	9.803	AV
11		0.390	44.200	34.468	-13.864	58.064	9.732	QP
12	*	0.390	43.391	33.659	-4.673	48.064	9.732	AV
13		0.778	41.254	31.504	-14.746	56.000	9.750	QP
14		0.778	39.773	30.023	-6.227	46.000	9.750	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V) = Reading Level (dB $\mu$ V) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Test Date: 2023-11-27
Temperature: 18.7°C	Humidity: 52.8%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Mark Long
Probe: SIP-SR2-ENV216_101684_C	Polarity: Neutral
EUT: Navimow Charging Station	Power: AC 120V/60Hz
Test Mode: Transmit at CH58, 917.90MHz	

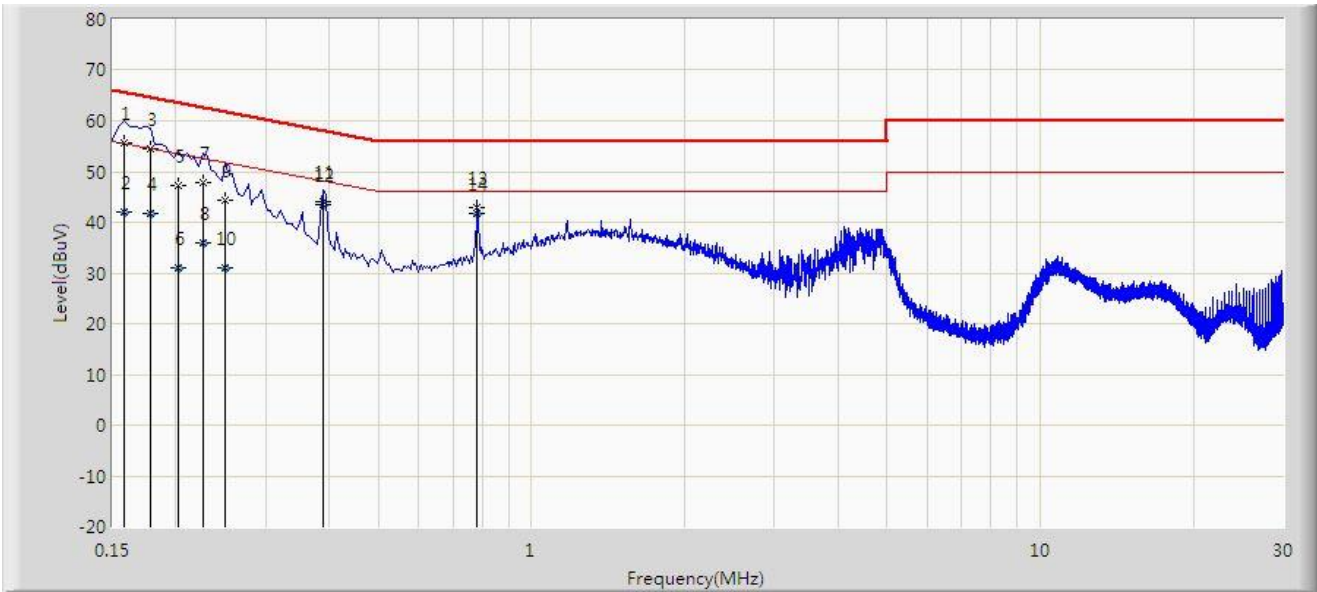

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.158	55.740	46.100	-9.828	65.568	9.640	QP
2		0.158	41.940	32.300	-13.628	55.568	9.640	AV
3		0.178	54.564	44.924	-10.015	64.578	9.640	QP
4		0.178	41.868	32.228	-12.710	54.578	9.640	AV
5		0.202	47.327	37.659	-16.201	63.528	9.668	QP
6		0.202	30.885	21.217	-22.643	53.528	9.668	AV
7		0.226	47.785	38.100	-14.810	62.595	9.686	QP
8		0.226	35.998	26.312	-16.598	52.595	9.686	AV
9		0.250	44.237	34.547	-17.520	61.757	9.690	QP
10		0.250	30.976	21.286	-20.781	51.757	9.690	AV
11		0.390	44.116	34.406	-13.947	58.064	9.710	QP
12		0.390	43.420	33.710	-4.643	48.064	9.710	AV
13		0.782	42.836	33.126	-13.164	56.000	9.710	QP
14	*	0.782	41.713	32.003	-4.287	46.000	9.710	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).



Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## **Appendix B - Test Setup Photograph**

Refer to "2309RSU023-UT" file.

## Appendix C - EUT Photograph

Refer to "2309RSU023-UE" file.

\_\_\_\_\_ The End \_\_\_\_\_