



# Owner's/ Installation Manual

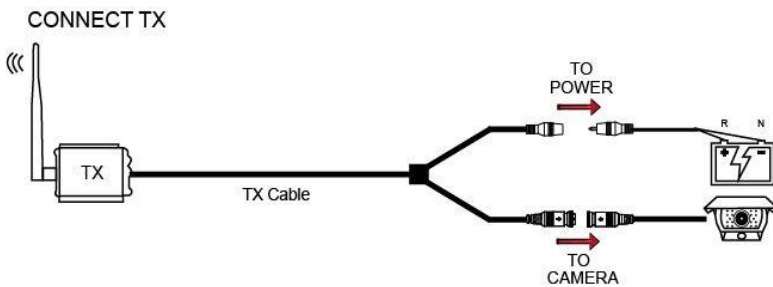

2.4G Wireless box

## Connect the Wireless box

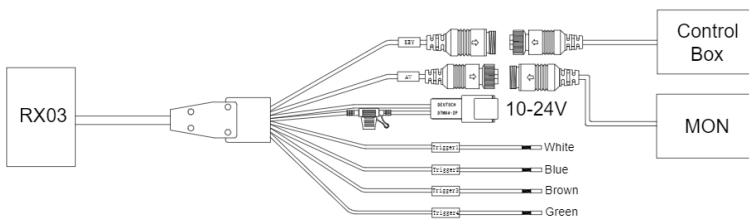

## Maintenance

- \* Although this Rear View Camera requires little care, you can still maintain its condition and performance by following these step
- \* Occasionally clean the camera lens with damp soft cloth.
- \* Should you experience any problem with the camera please refer to the troubleshooting guide below prior to returning your camera for repair.
- \* Note: The user should not attempt to service the unit beyond that described in the operating instructions. All other servicing should be referred to qualified personnel

Specifications	
Start Time :	3S
Latency:	120ms
Resolution:	720P
Video Frame Rate:	NTSC: 30f/SPAL: 25f/S
Video Codec:	H.264
Input Formats:	PAL/NTSC
Operation Frequency:	2410~2474MHz
Antenna Input /Output Impedance:	50Ω,Typ
Receiving Sensitivity:	-89dBm
Out Power:	18dBm
RF Bit Rate.:	12Mbps
Modulation/Demodulation:	FSK/GFSK
Spread Spectrum:	FHSS
Hop Rate:	1200/S
Line of Sight Range:	120M
Video Input/Output Impedance:	75Ω,Typ
Video Input/Output level:	1Vp-p,TyP
Video Signal-noise Ratio:	50dB,Min
Audio Input/Output Level:	5mv~0.5Vp-p,Typ
Audio Signal-noise Ratio:	63dB,Min
Power Voltage:	DC12-24V/200mA
Operation Temp:	-20°C~70°C
Storing Temp:	-30°C~80°C
Operation Humidity:	90%

## Accessories

RX03	TX03
------	------



Manual control box



Antenna



Antenna

**Kindly noted:**

- \*The system operating at 2410-2474MHZ frequency.
- \*The system will have disturbance, if you connecting several RX03, TX03 in one zone and distance within 5M.
- \*When you connecting several RX03, TX03 in one zone and distance beyond 5M, the system will not have disturbance.

**Warranty and Support Information**

Thanks for selecting our product.  
Please retain proof of purchases and warranty information.

Product		
Serial No./Ex-fty date		

**Hardware Warranty**

- \* Subject to the provisions described below, our product is protected for One year against defects in material and workmanship.
- \* Should a product fail to perform as described above within the warranted period, it will be repaired or replaced with the same or functionally equivalent product by us.
- \* This warranty does not apply if, in the judgement of us, the product fails due to damage from shipment, handling, storage, accident, abuse or misuse, or if it has been used or maintained in a manner not conforming to product manual instructions, has been modified in any way  
Repair by anyone other than us or an approved agent will void this warranty.  
The maximum liability of our company under this warranty is limited to the purchase price of the product covered by the warranty.
- \* All defective products should be returned to our company with shipping charges prepaid. we will not accept collect shipments.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**RF Exposure Warning Statements:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.