



Fenghang- H720 WIFI2.4G antenna acknowledgment Product Specifications for Approval

The Part number: WF1084B-A70L-A

The customer name:Fenghang Models: H720

Antenna band: WIFI2.4G

Version: R-A


Date: 2023-7-11

Shenzhen ShunDaCheng Technology Co.,Ltd.			
MD:	Huang Zongbao	RF:	Fu Xuerong
Audit:	Xia Chenglei	Approval:	Huaming Chen
Customer Confirmation			
Customer audit:		Customer approval:	

Company address:Floor 4, building B5, xinfu industrial park, chongqing road, fuyong town, baoan district, shenzhen

The phone:0755-27211658

Fax:0755-29485750

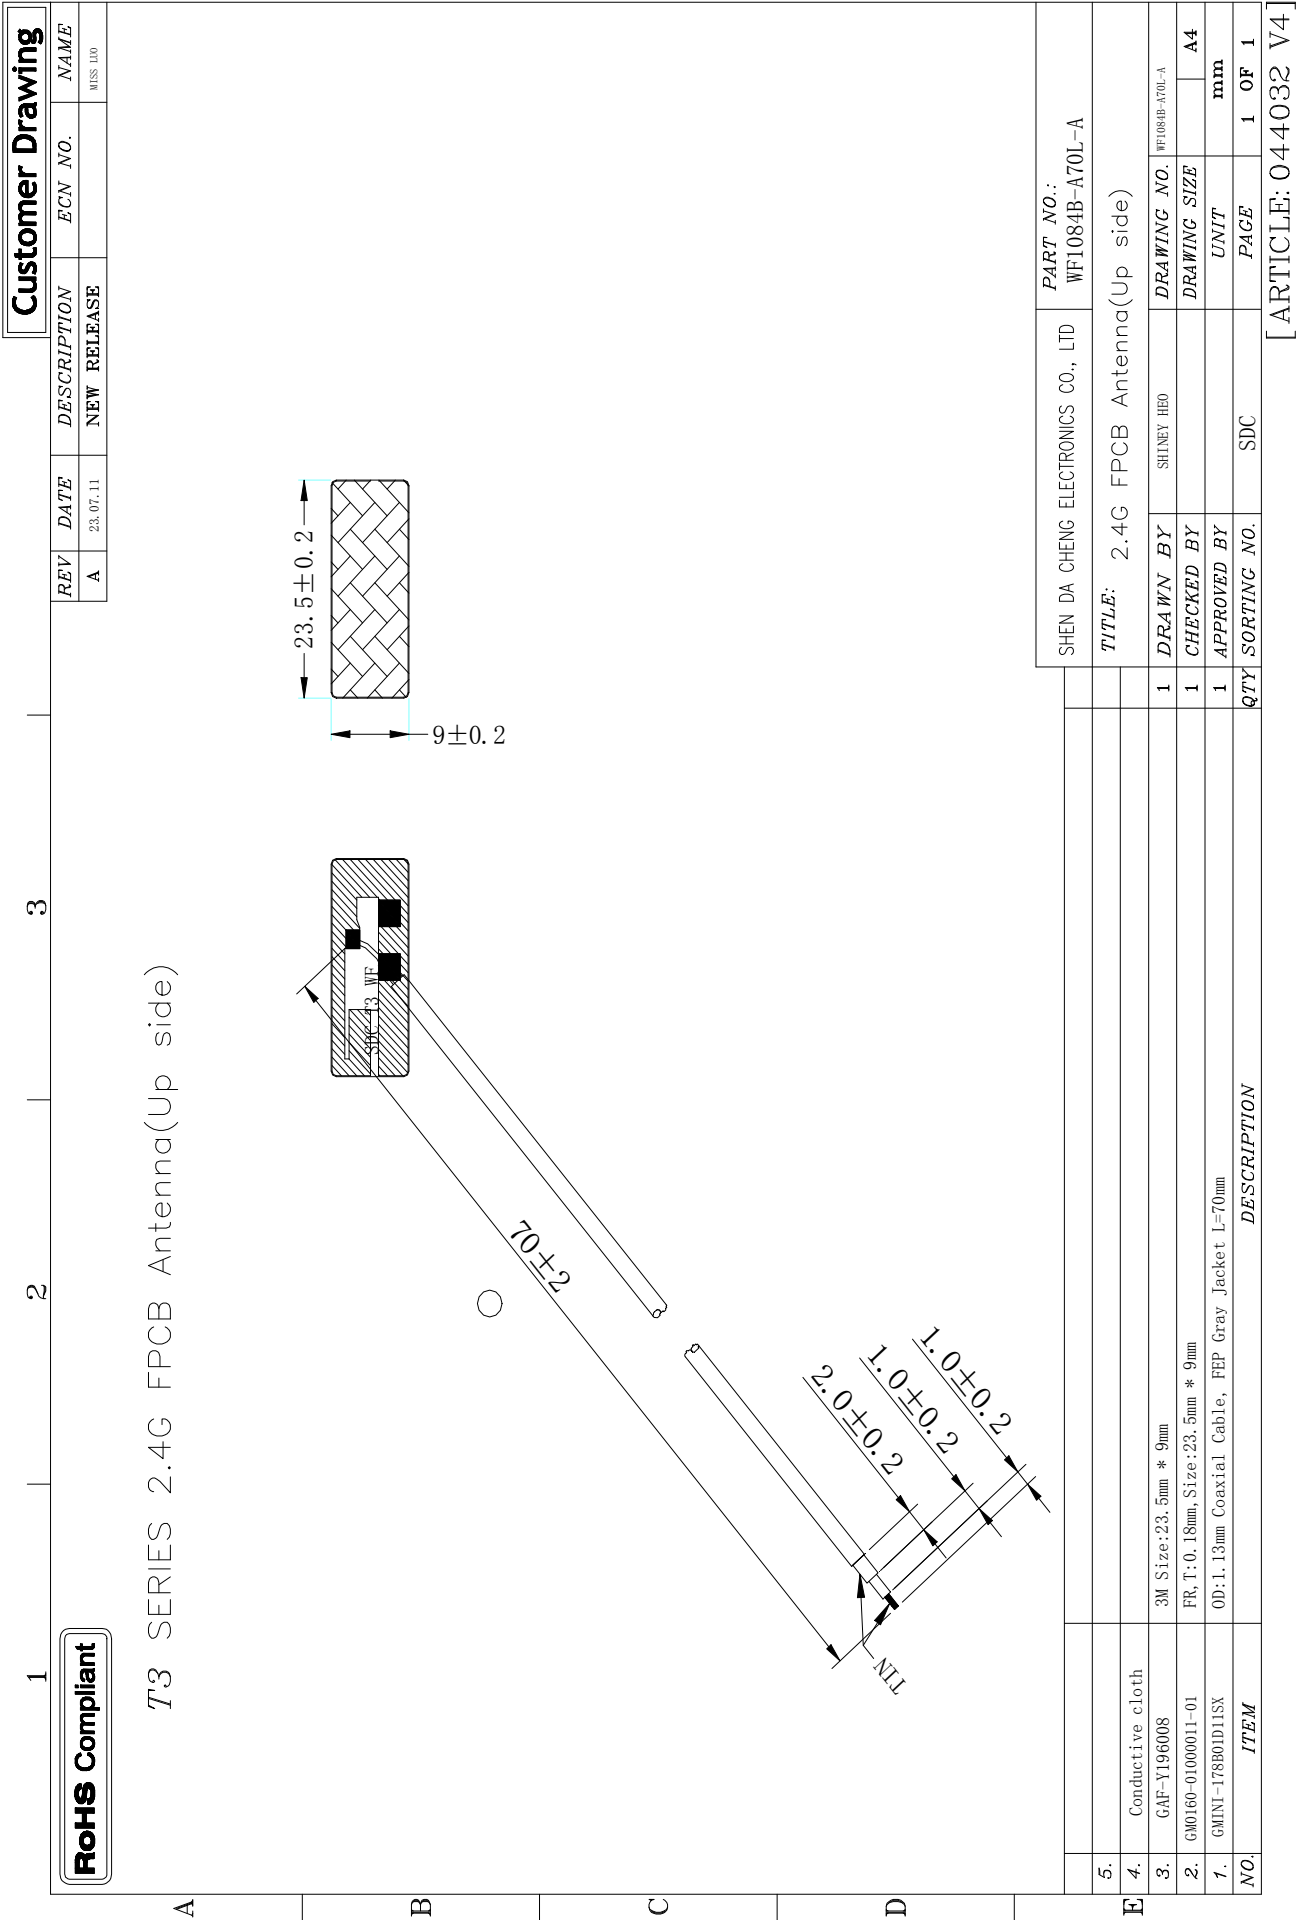

1. Project information and Electrical Specification


Those specifications were specially defined for *Fenghang*-H720 , *WIFI2.4G*, and all characteristics were measured under the model's handset testing jig .

1-1 Antenna picture

1-2 Frequency Band:

Frequency Band	MHz
WIFI2.4G	2400-2500 (MHz)

1-3 Impedance matching

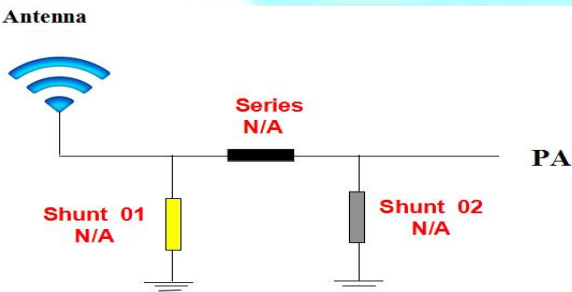

Antenna original match without change

2.VSWR
Measuring Method:

1. A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR,
2. Keeping this jig away from metal at least 20cm.

VSWR parameter values

frequency (MHZ)	2400	2450	2500
Standing wave	1.24	1.33	1.47



3. Efficiency and Gain*measuring and test instruments:


Microwave Darkroom, Agilent Network Analyzer, Agilent Spectrum Analyzer, 8960 Integrated Tester, Standard Antenna

* Test method:

The equipment is fixed at the center of the turntable in the center of the turntable, with the center of the horn antenna on the same horizontal line.

o

Passive Test For 2.4G												
Freq (MHz)	Effi (%)	Effi (dBi)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	irectivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
2400	37.32	-4.28	1.29	-0.86	0	0	1.29	-19.52	4.28	15	48.23	48.39
2425	44.49	-3.52	1.96	-0.19	0	0	1.96	-19.01	3.52	15	48.32	48.45
2450	43.36	-3.63	1.8	-0.35	0	0	1.8	-17.47	3.63	15	48.74	48.76
2475	43.96	-3.57	1.65	-0.5	0	0	1.65	-18.06	3.57	30	49.07	49
2500	51.44	-2.89	2.24	0.09	0	0	2.24	-16.81	2.89	30	49.2	49.11

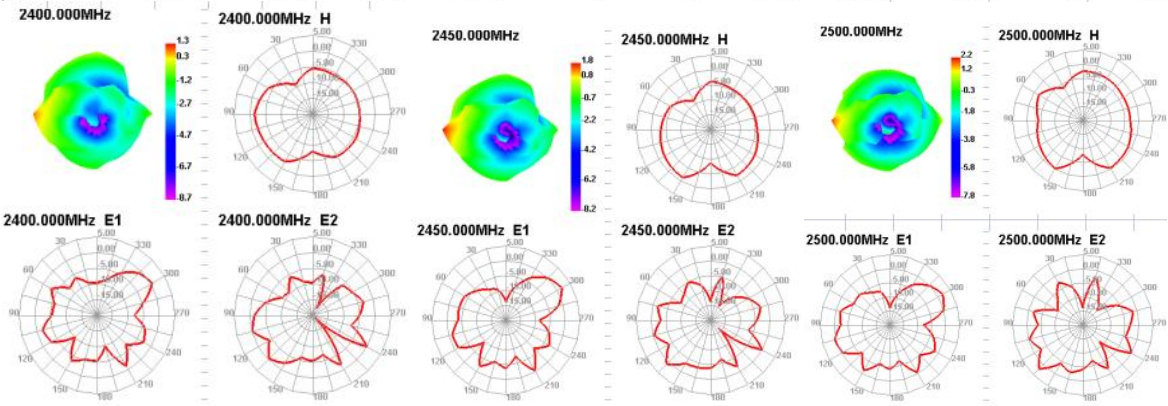

4.The production index

Antenna production, the standing wave ratio as a production test standards.
According to the difference between the project itself, given the following criteria:

frequency	Production standards
WIFI2.4G	VSWR (Production products) <VSWR(Design samples)+/-0.5