

ANNEX D TEST DATA

For

Project No.:	8227EU010102W
Client:	Dongguan Youshifa Electronic Technology Co., Ltd.
Product Description:	BT Portable Amplifier Speaker
Model No.:	SC-1443BT
FCC ID:	2BB2T-SC-1443BT
Technology:	Bluetooth BDR&EDR
Test Engineer:	<i>Mikoy zhu</i>
Test Date:	2024-03-07

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Carrier Frequency Separation	Pass
Number of Hopping Frequencies	Pass
Time of Occupancy (Dwell Time)	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass


1. Duty Cycle


1.1 Ant1


1.1.1 Test Result

Ant1								
Mode	TX Type	Frequency (MHz)	Packet Type	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
GFSK	SISO	2402	DH5	2.880	3.750	76.80	1.15	0.03
		2441	DH5	2.880	3.749	76.82	1.15	0.04
		2480	DH5	2.880	3.749	76.82	1.15	0.01
π/4QPSK	SISO	2402	2DH5	2.887	3.751	76.97	1.14	0.04
		2441	2DH5	2.887	3.751	76.97	1.14	0.03
		2480	2DH5	2.887	3.751	76.97	1.14	0.03

1.1.2 Test Graph

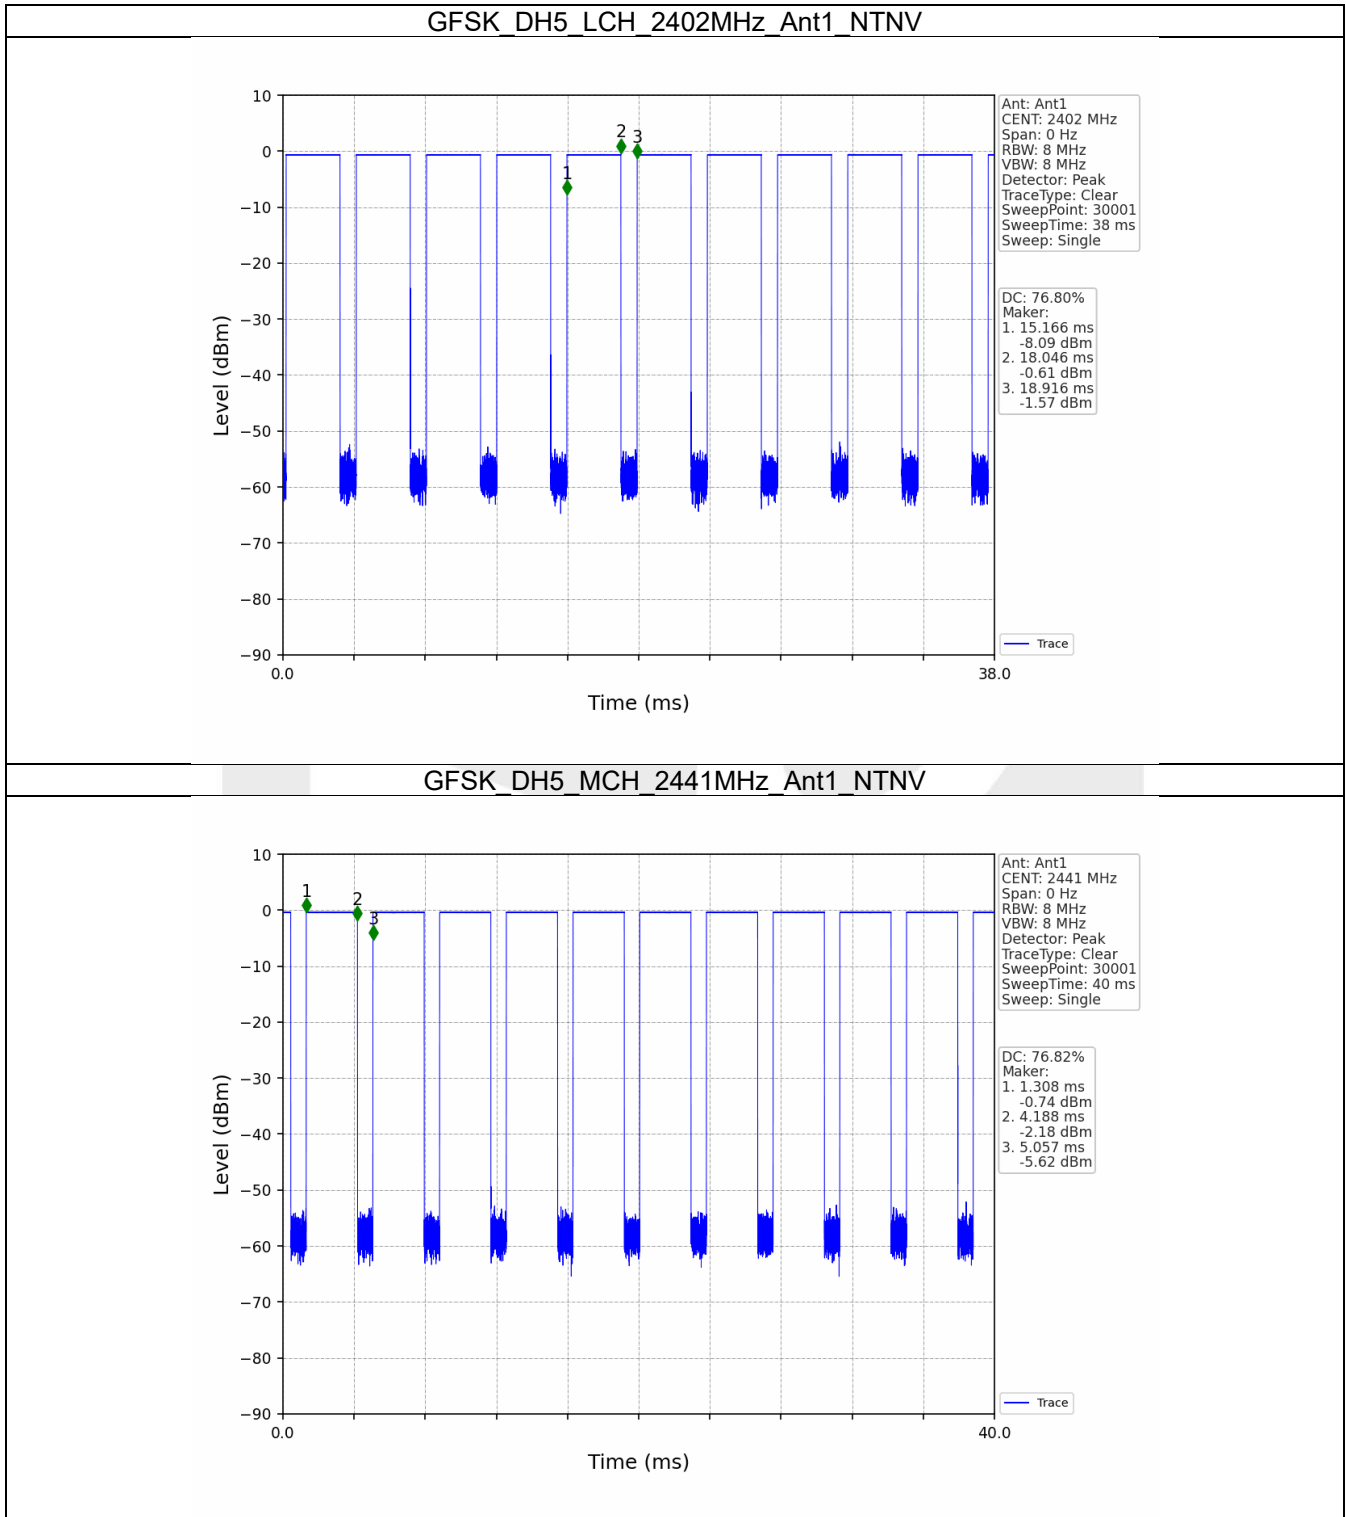

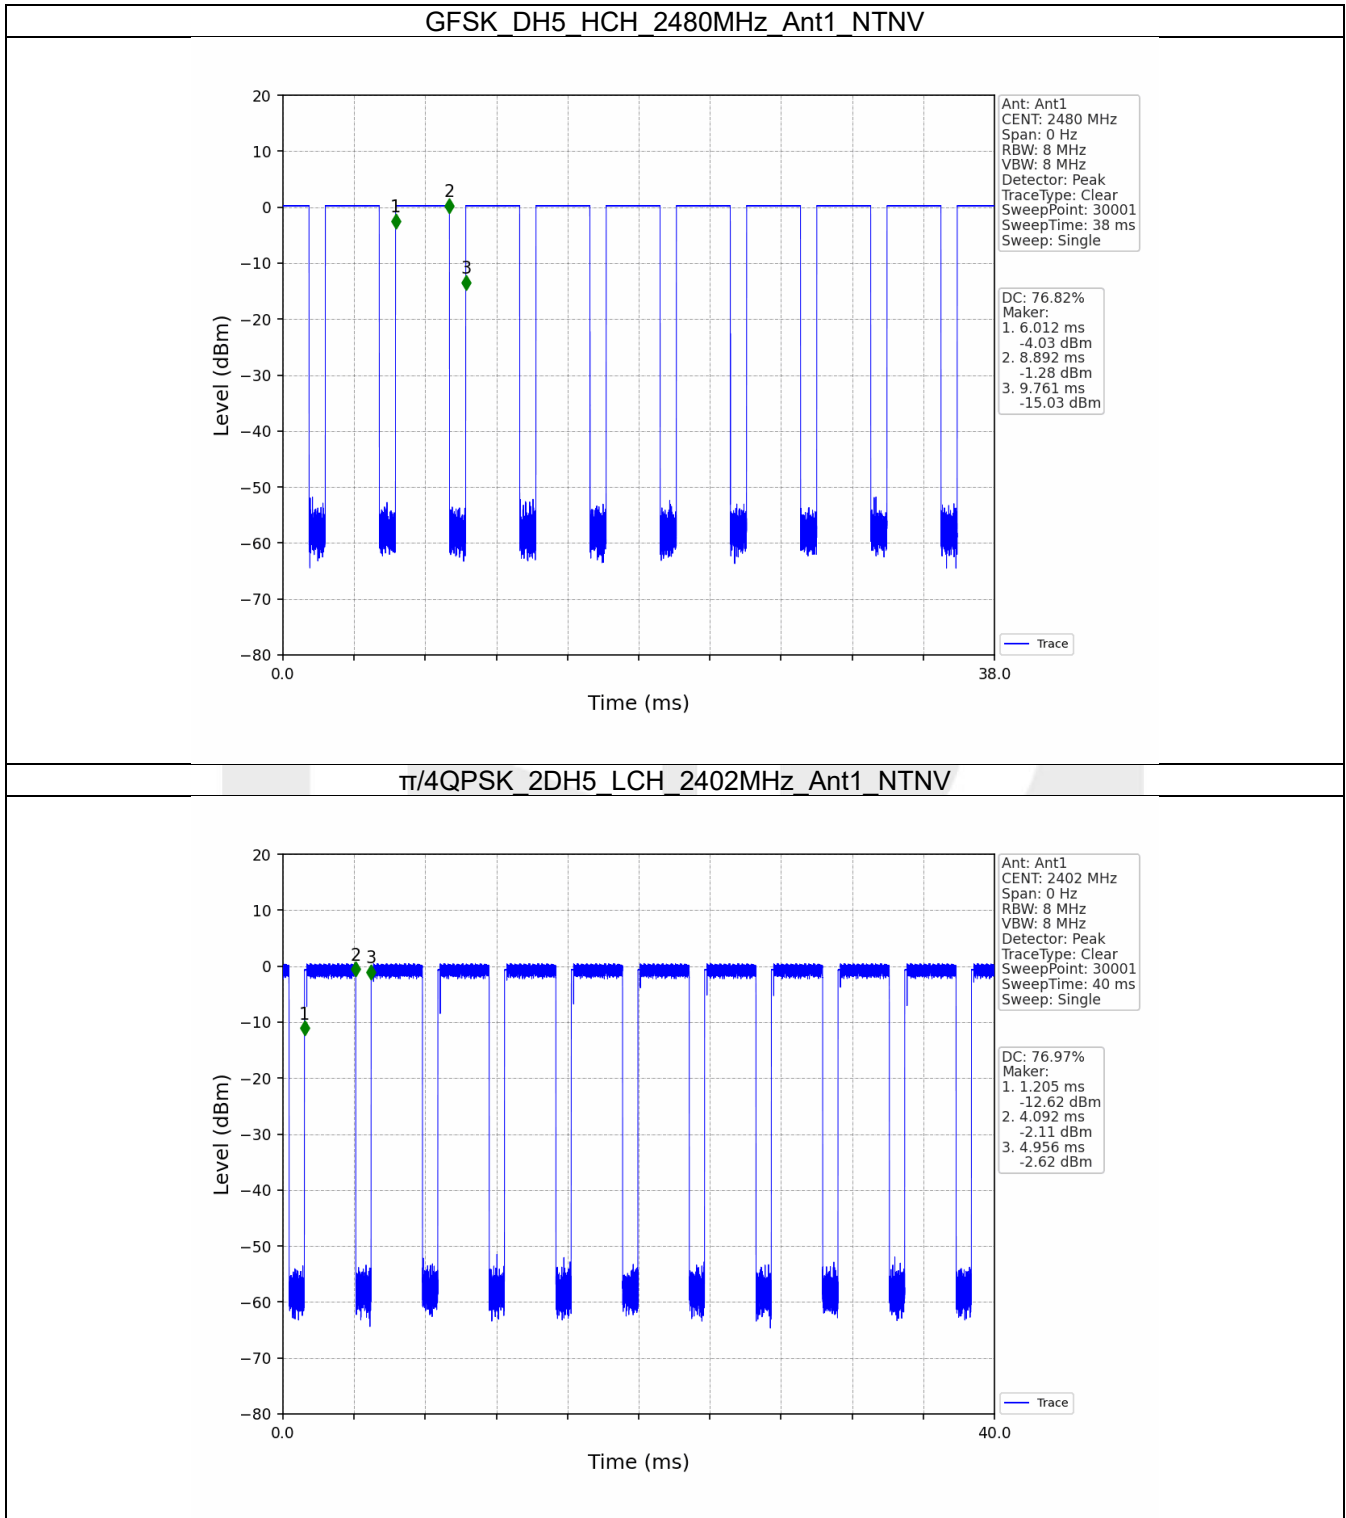

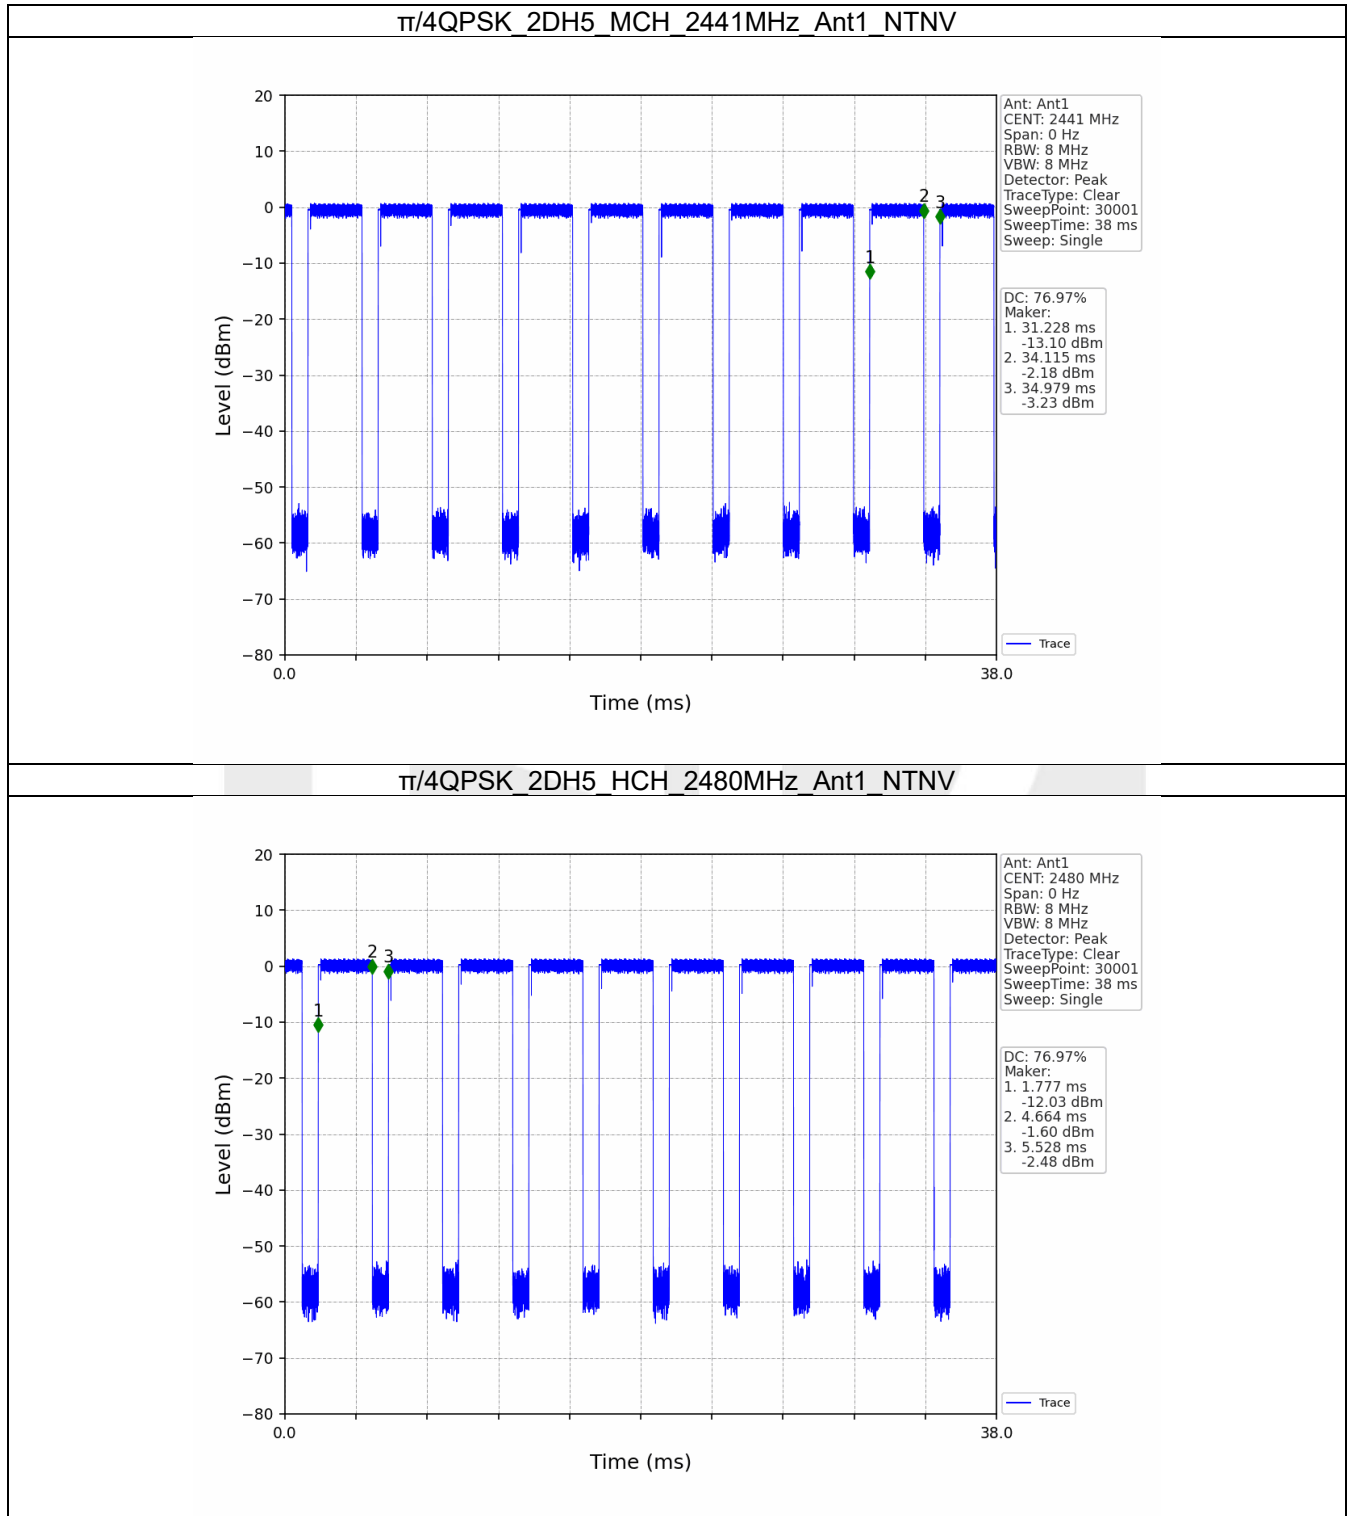


2. Bandwidth


2.1 OBW


2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.852	Pass
		2441	DH5	1	0.847	Pass
		2480	DH5	1	0.847	Pass
$\pi/4$ QPSK	SISO	2402	2DH5	1	1.165	Pass
		2441	2DH5	1	1.165	Pass
		2480	2DH5	1	1.165	Pass

2.1.2 Test Graph

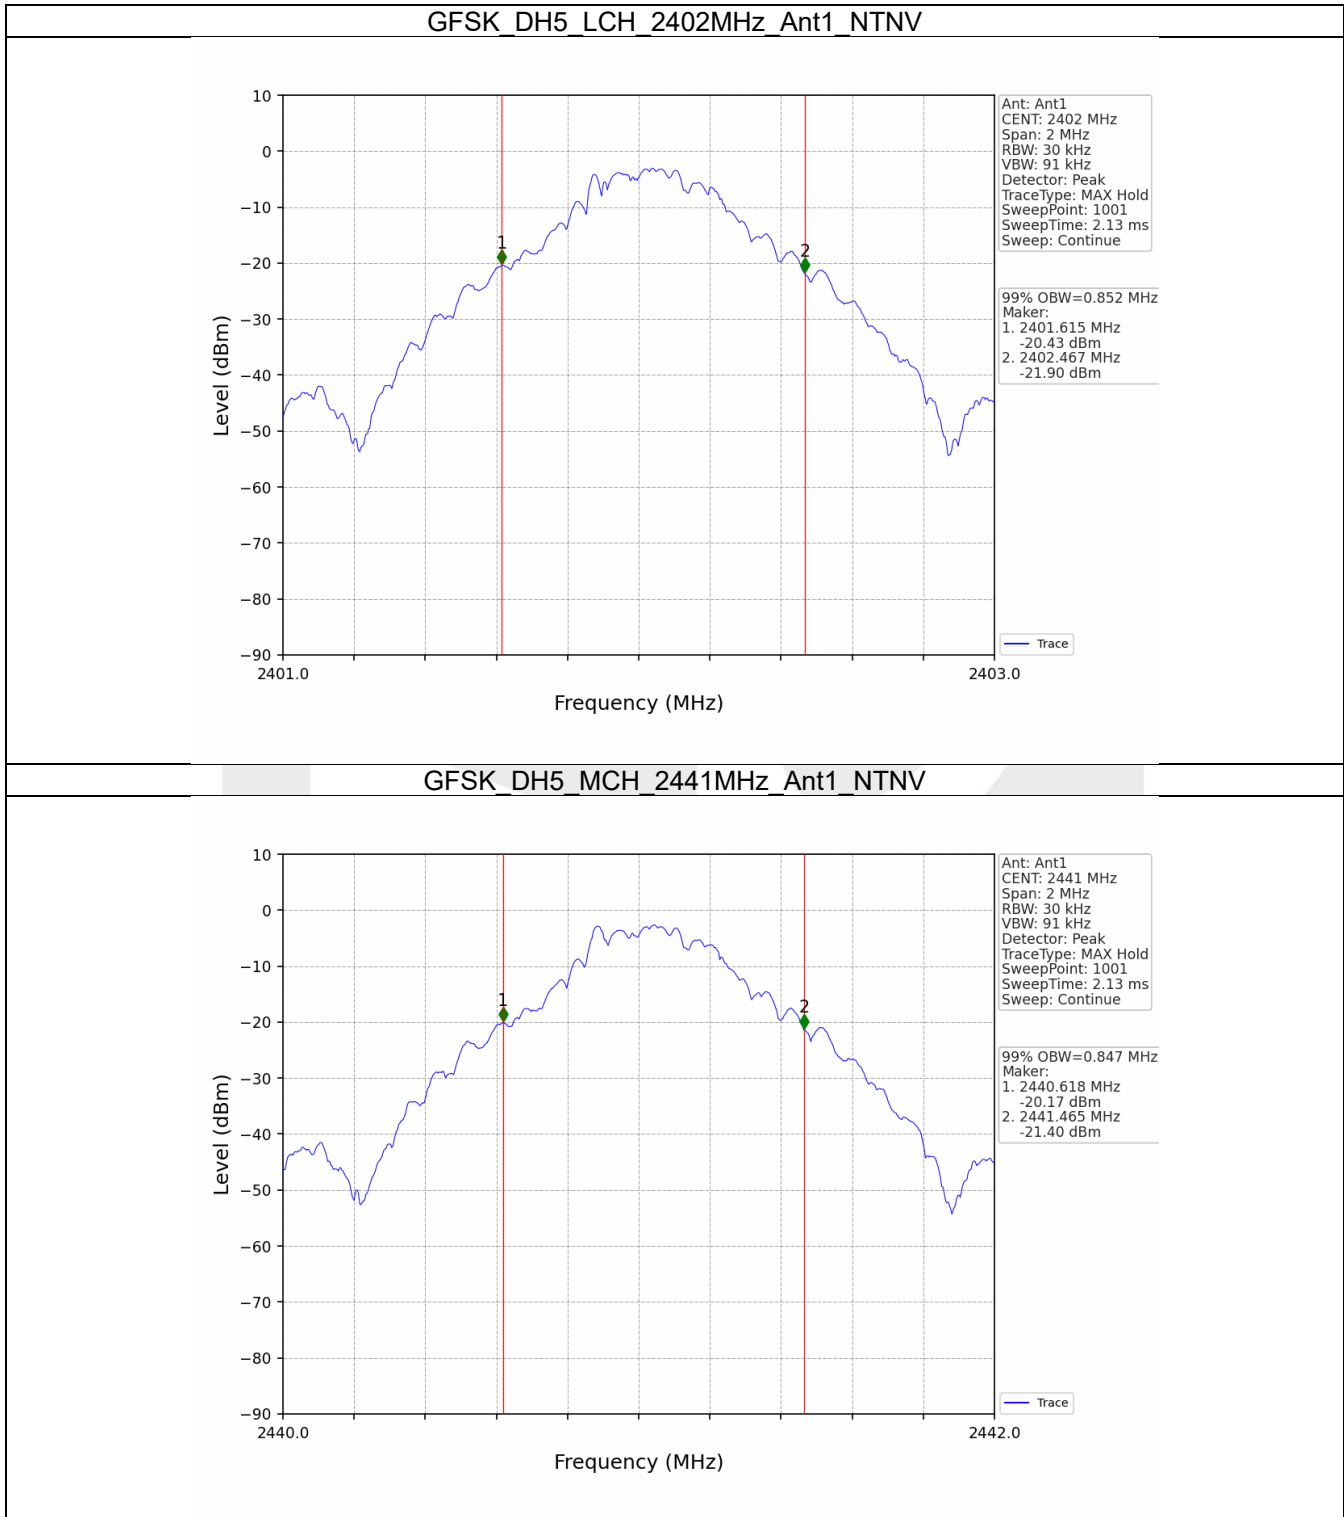

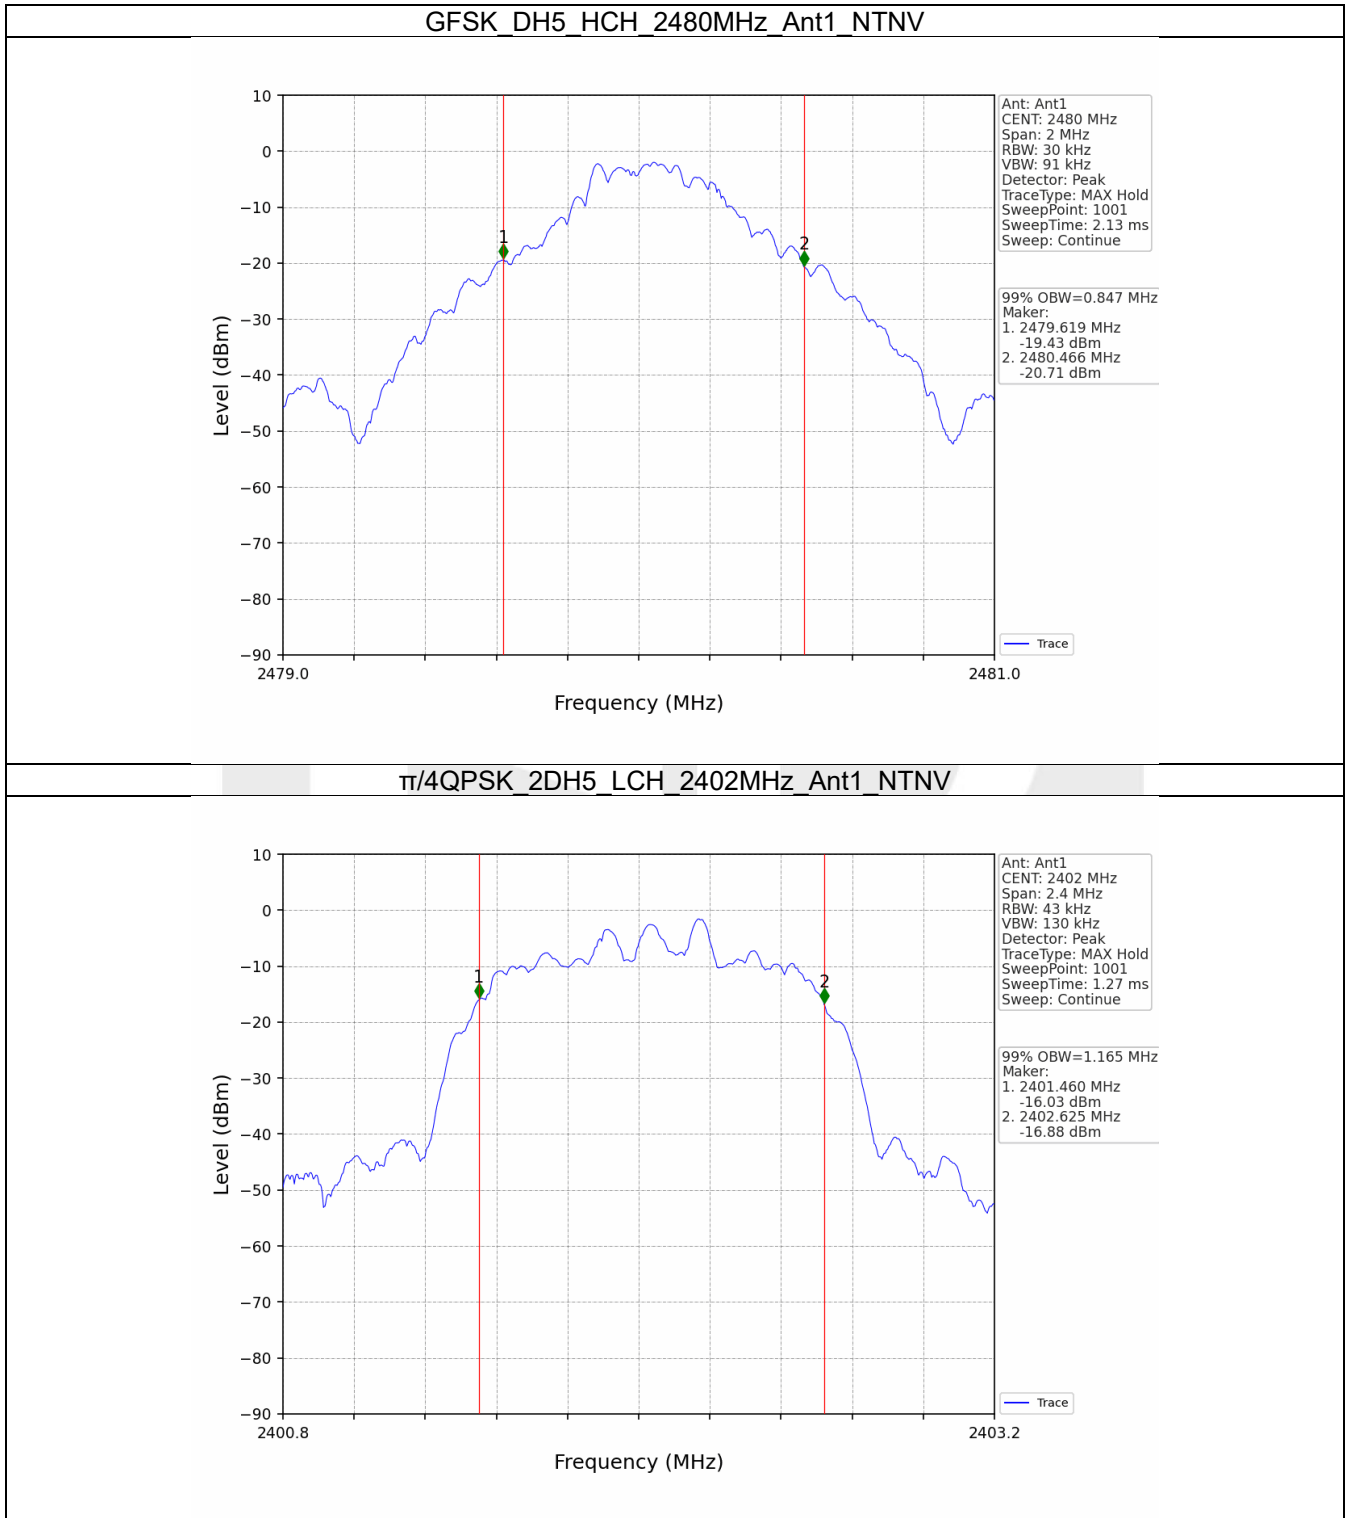

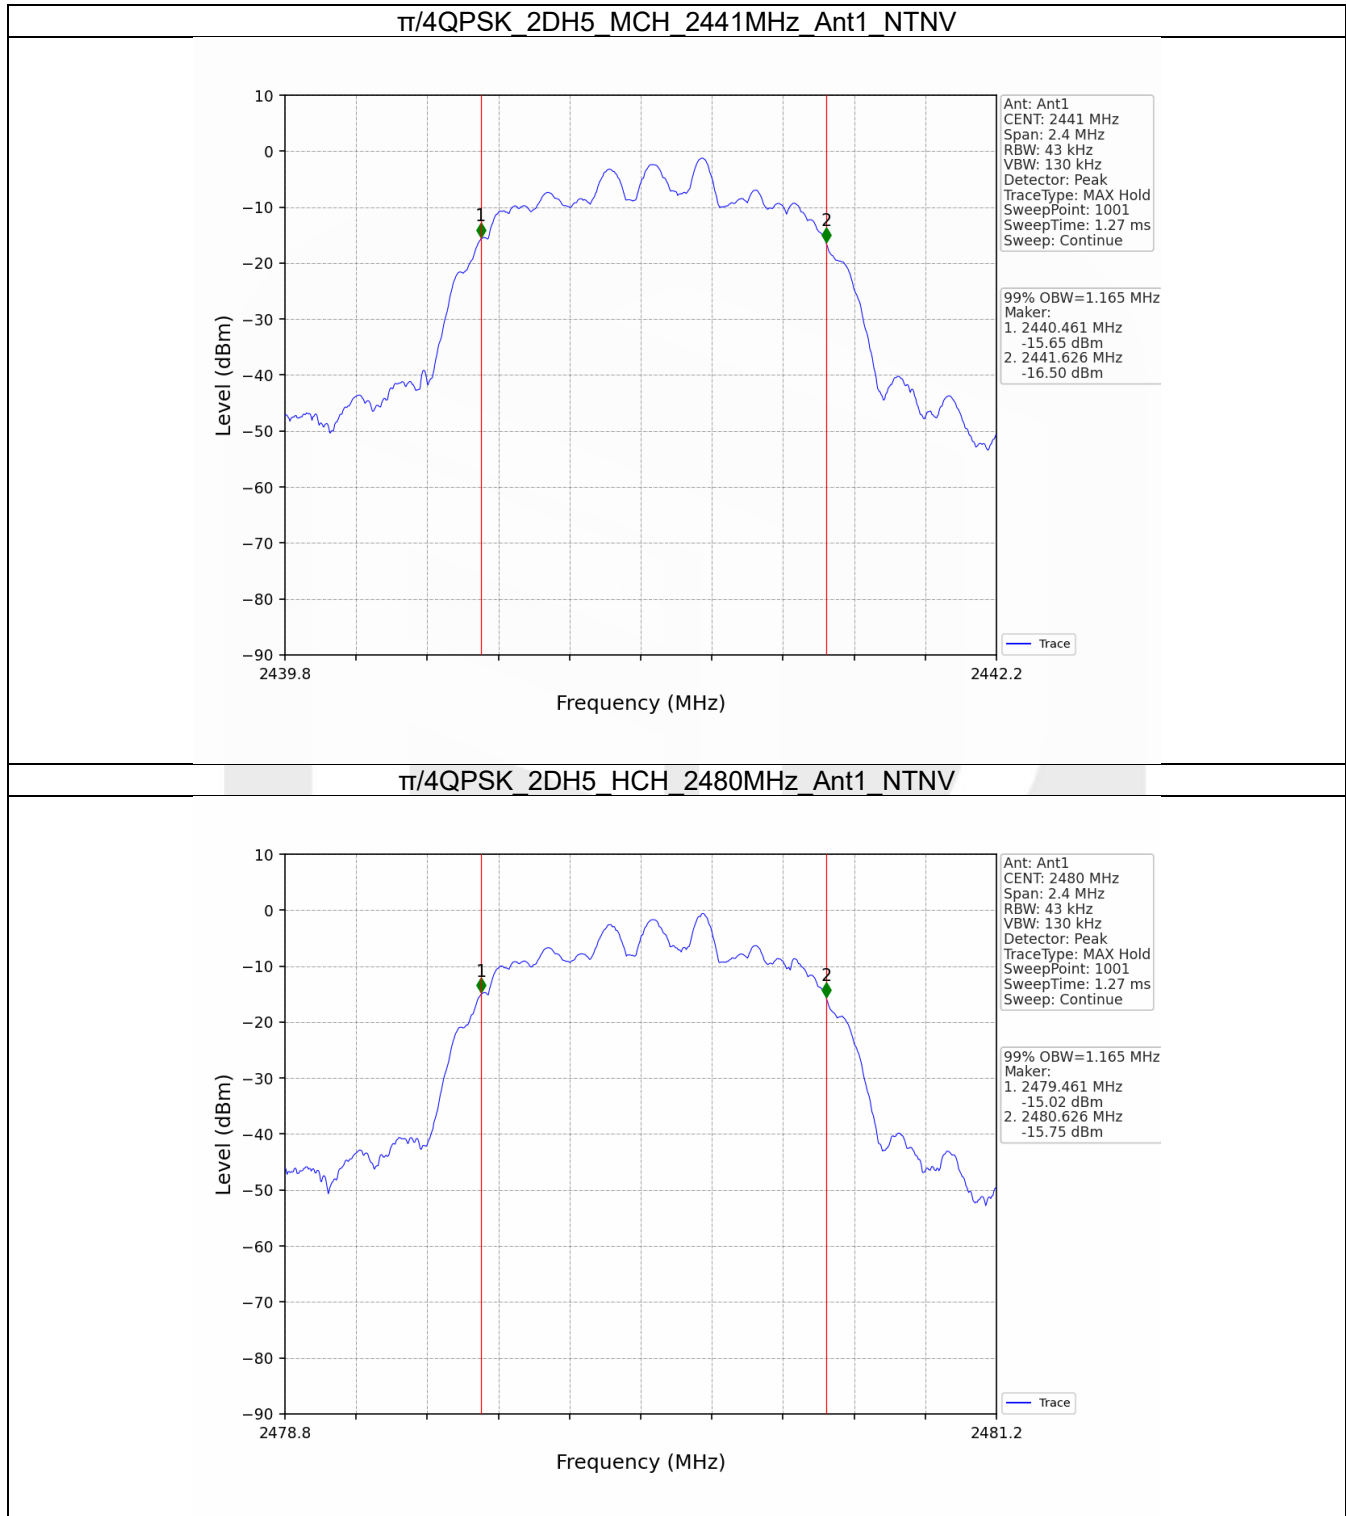



2.2 20dB BW


2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.955	Pass
		2441	DH5	1	0.957	Pass
		2480	DH5	1	0.953	Pass
$\pi/4$ QPSK	SISO	2402	2DH5	1	1.285	Pass
		2441	2DH5	1	1.292	Pass
		2480	2DH5	1	1.292	Pass

2.2.2 Test Graph

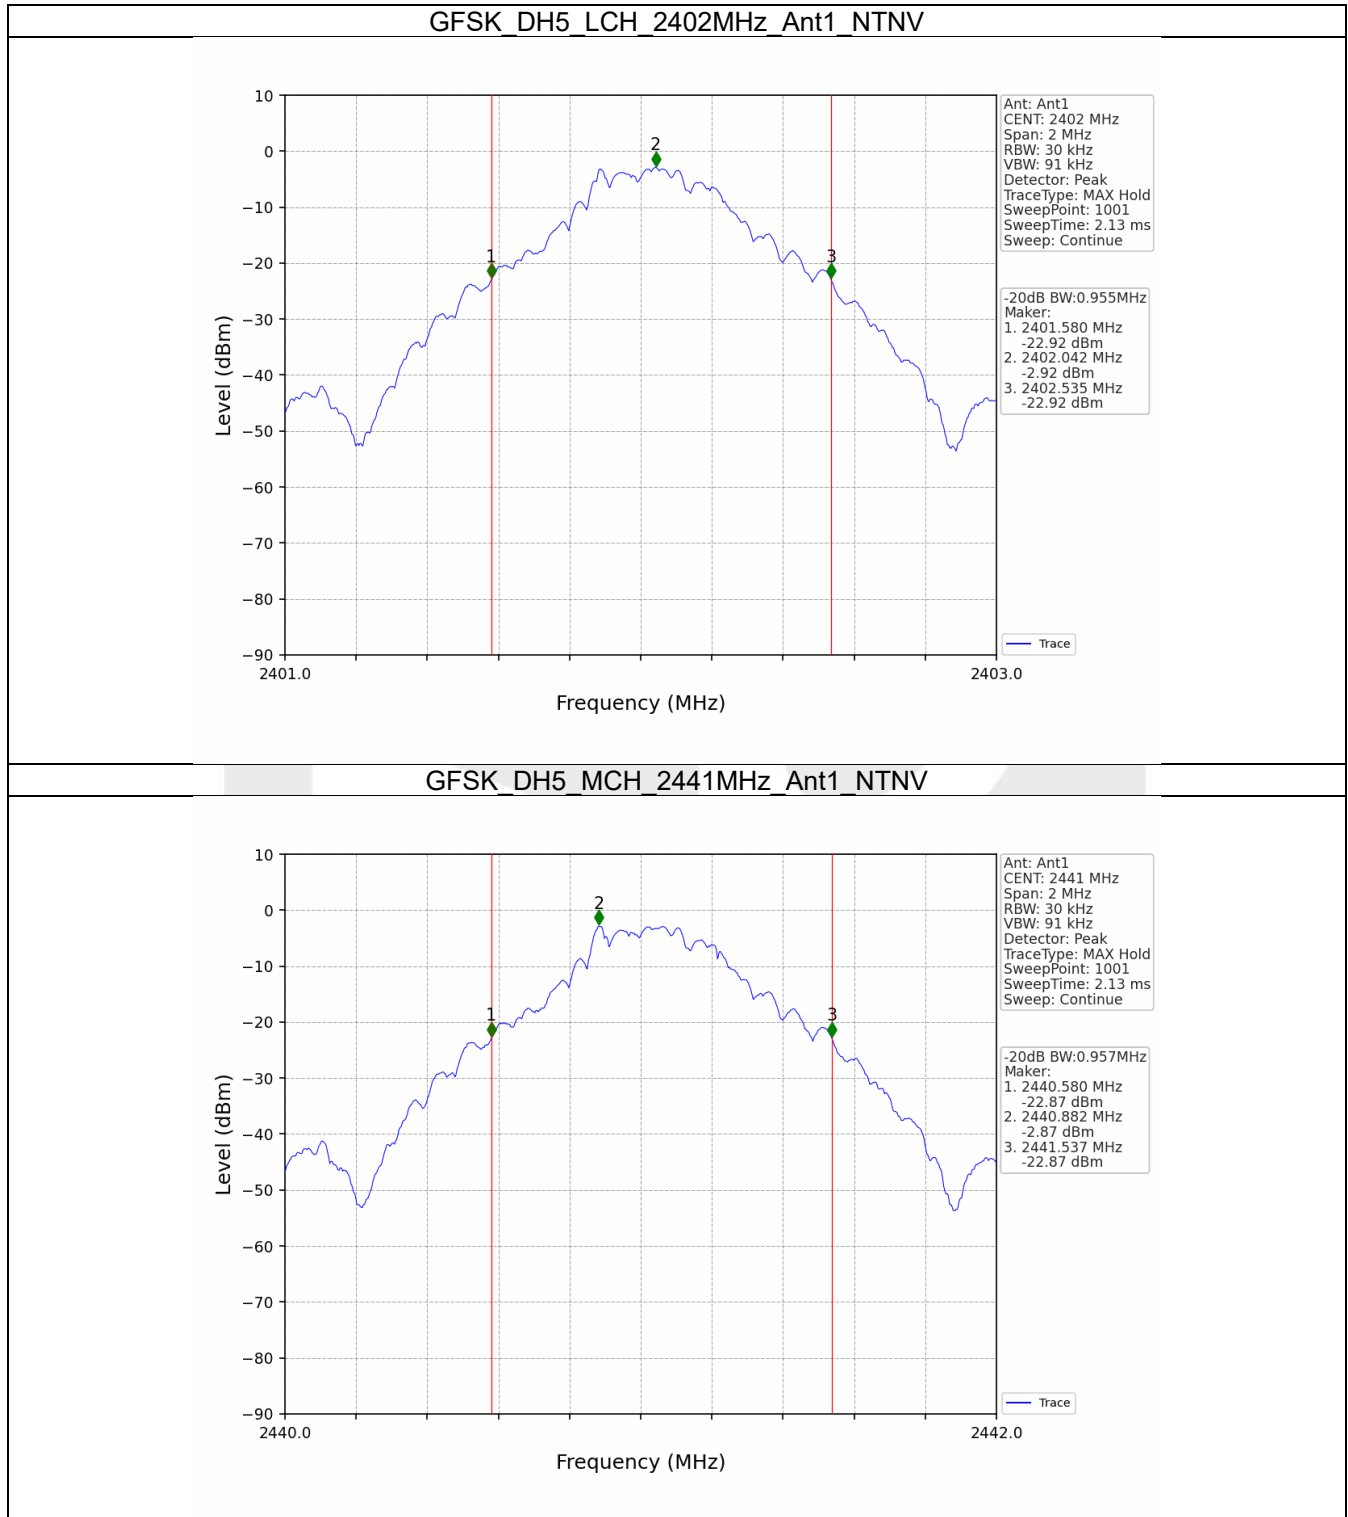

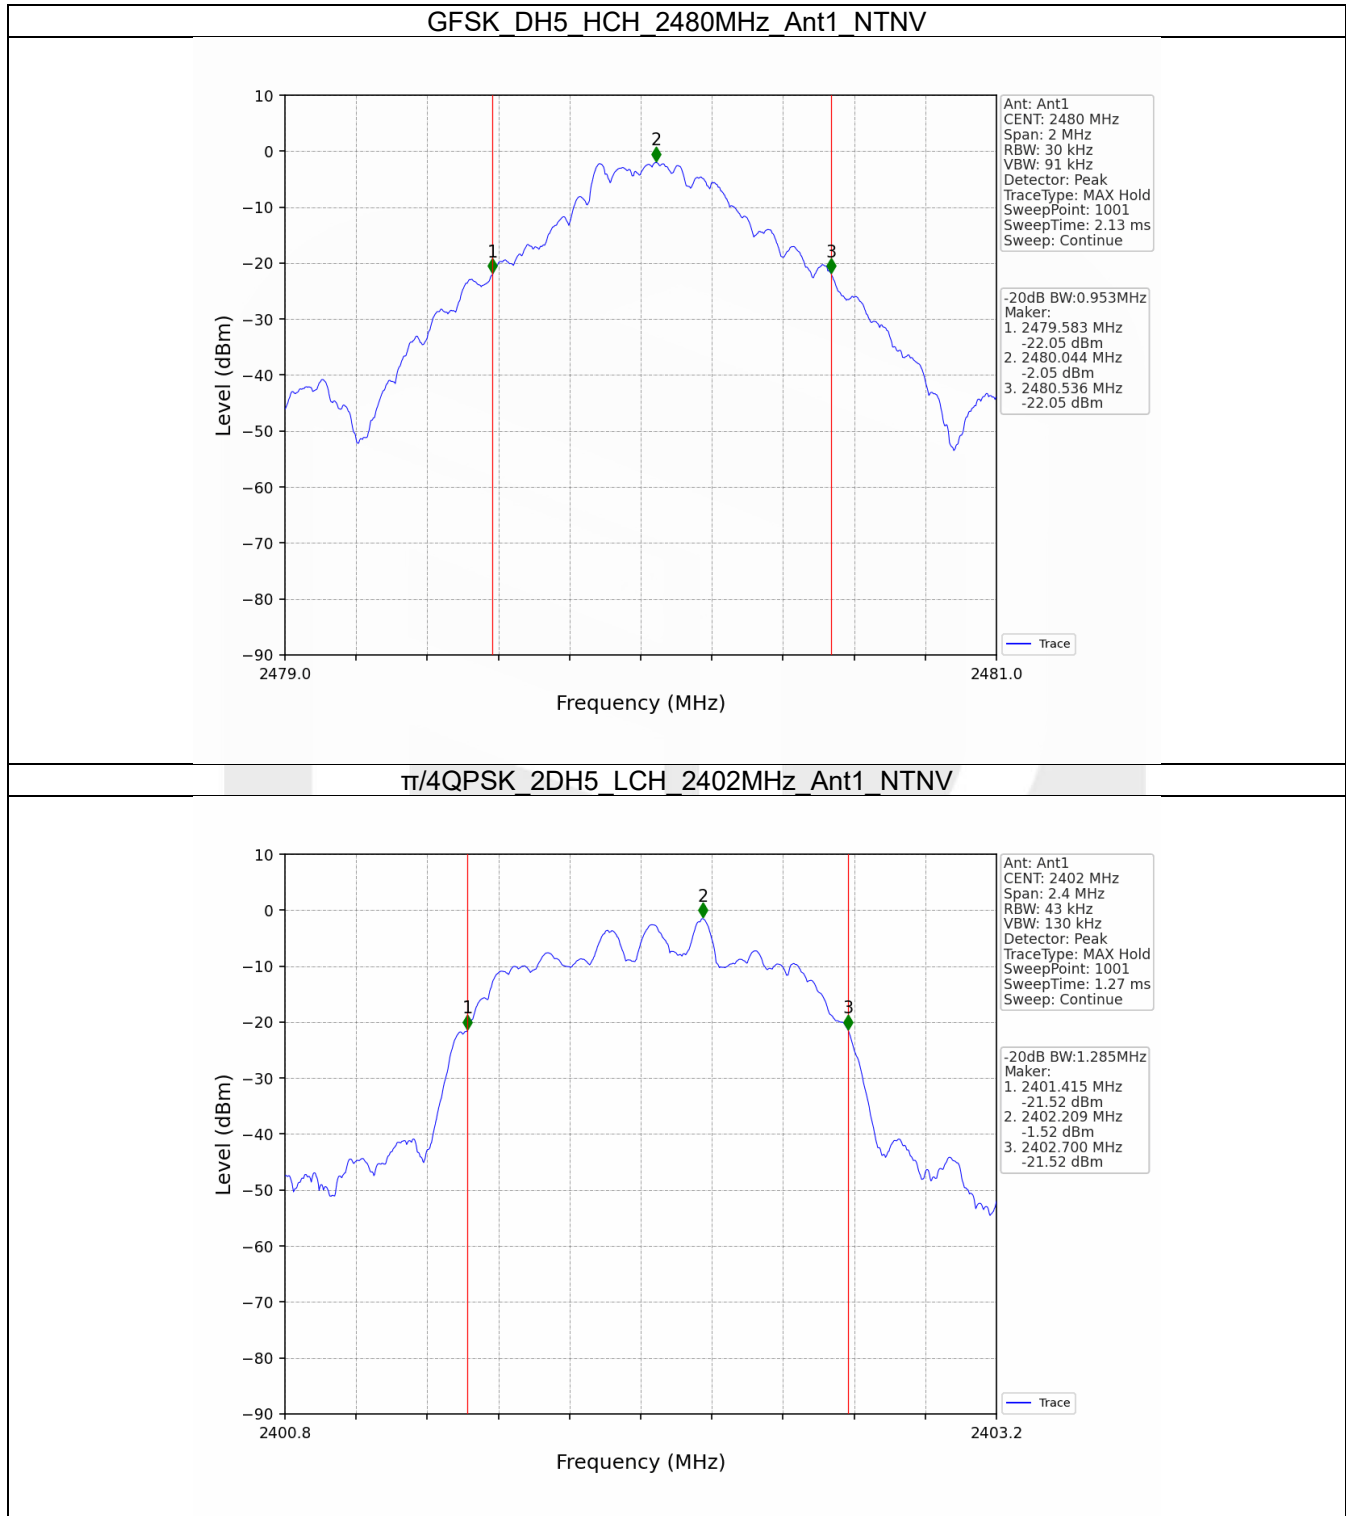

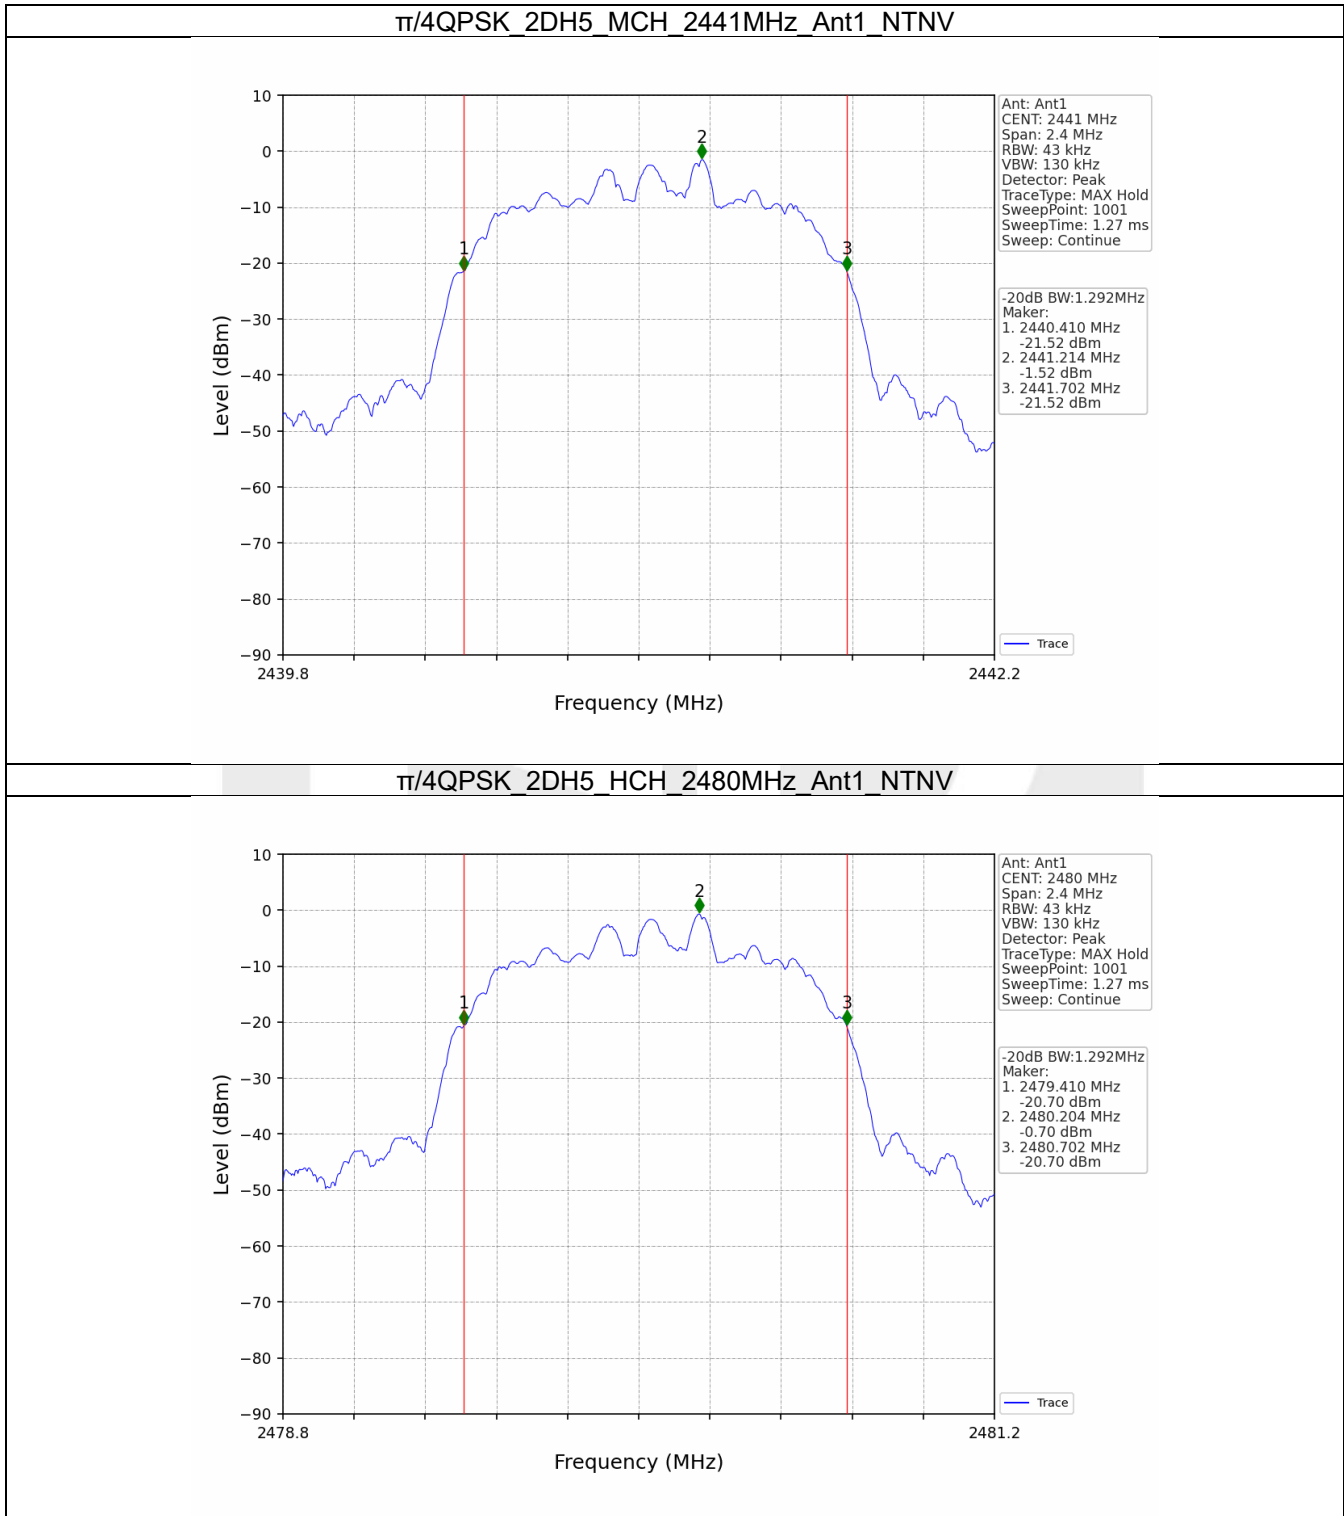


3. Maximum Conducted Output Power


3.1 Power


3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	-0.63	<=30	Pass
		2441	DH5	-0.38	<=30	Pass
		2480	DH5	0.25	<=30	Pass
$\pi/4$ QPSK	SISO	2402	2DH5	0.24	<=20.97	Pass
		2441	2DH5	0.46	<=20.97	Pass
		2480	2DH5	1.10	<=20.97	Pass

3.1.2 Test Graph

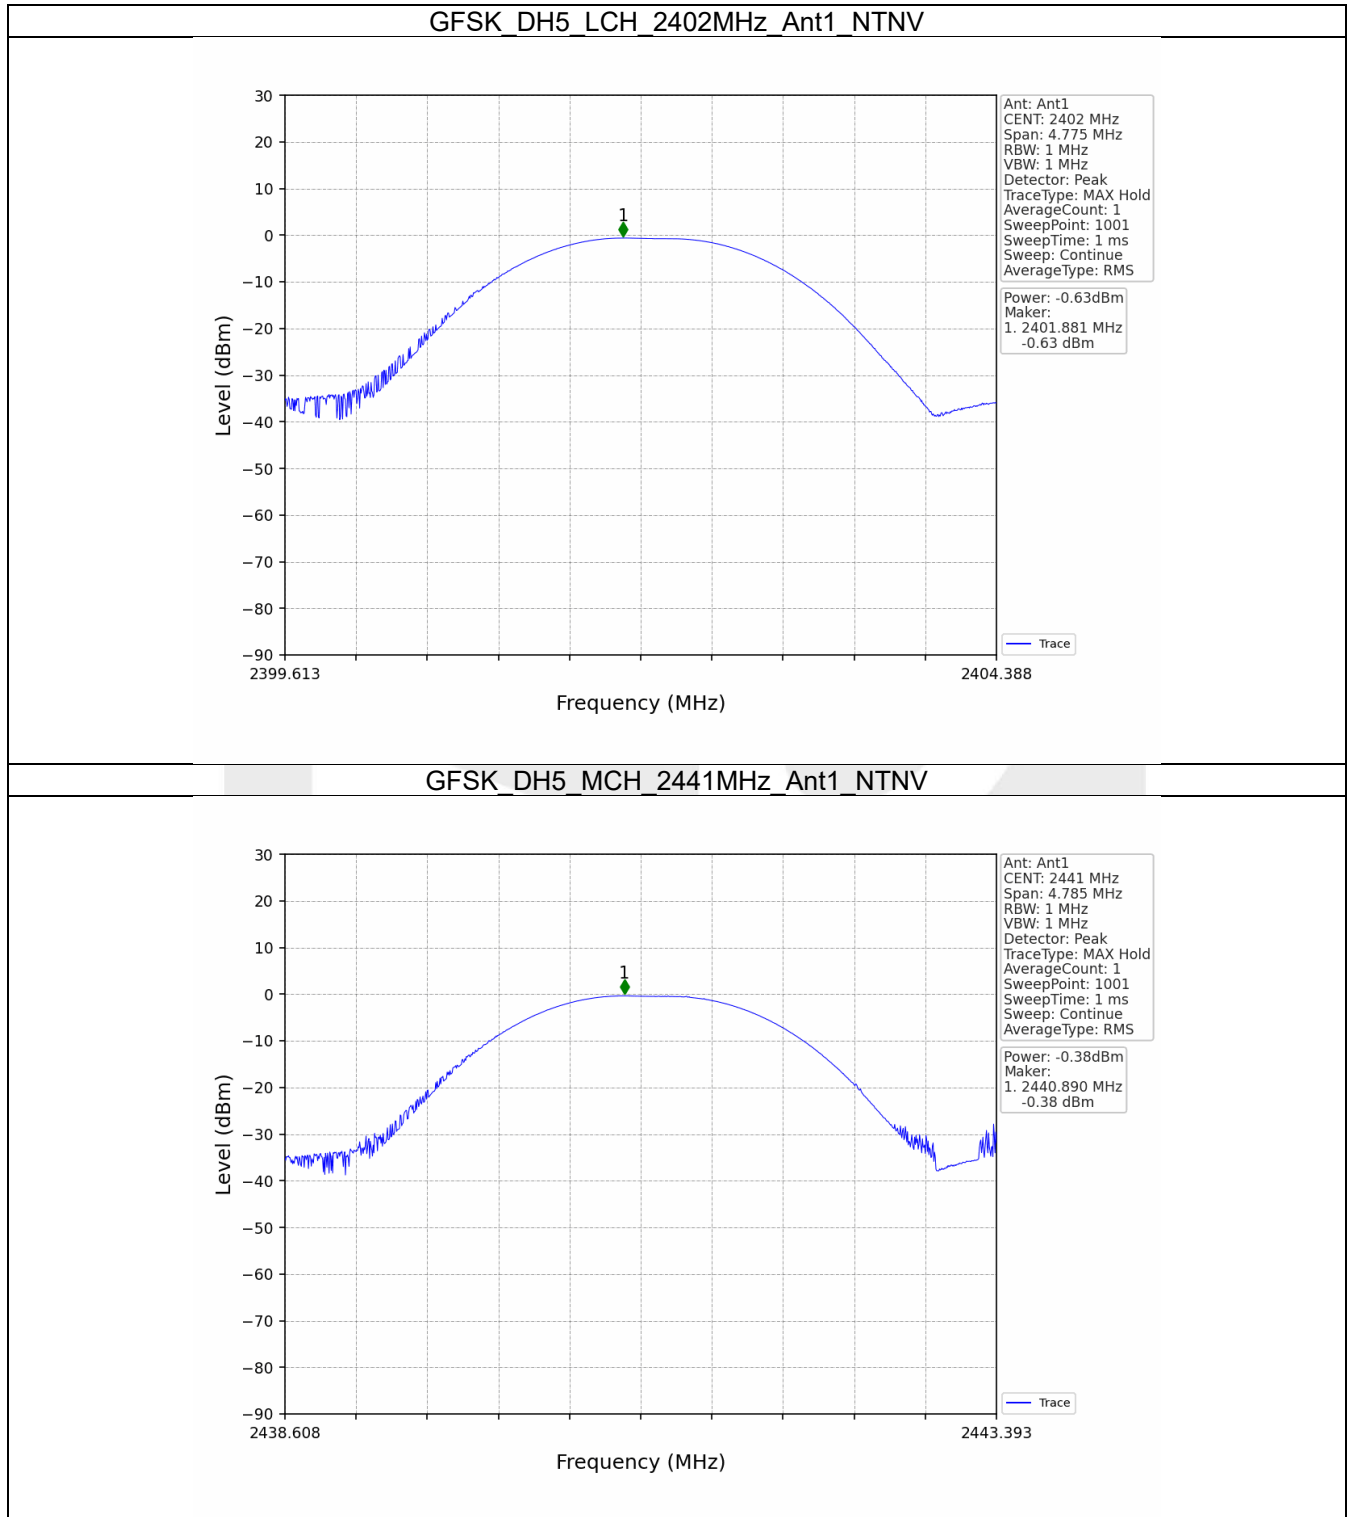

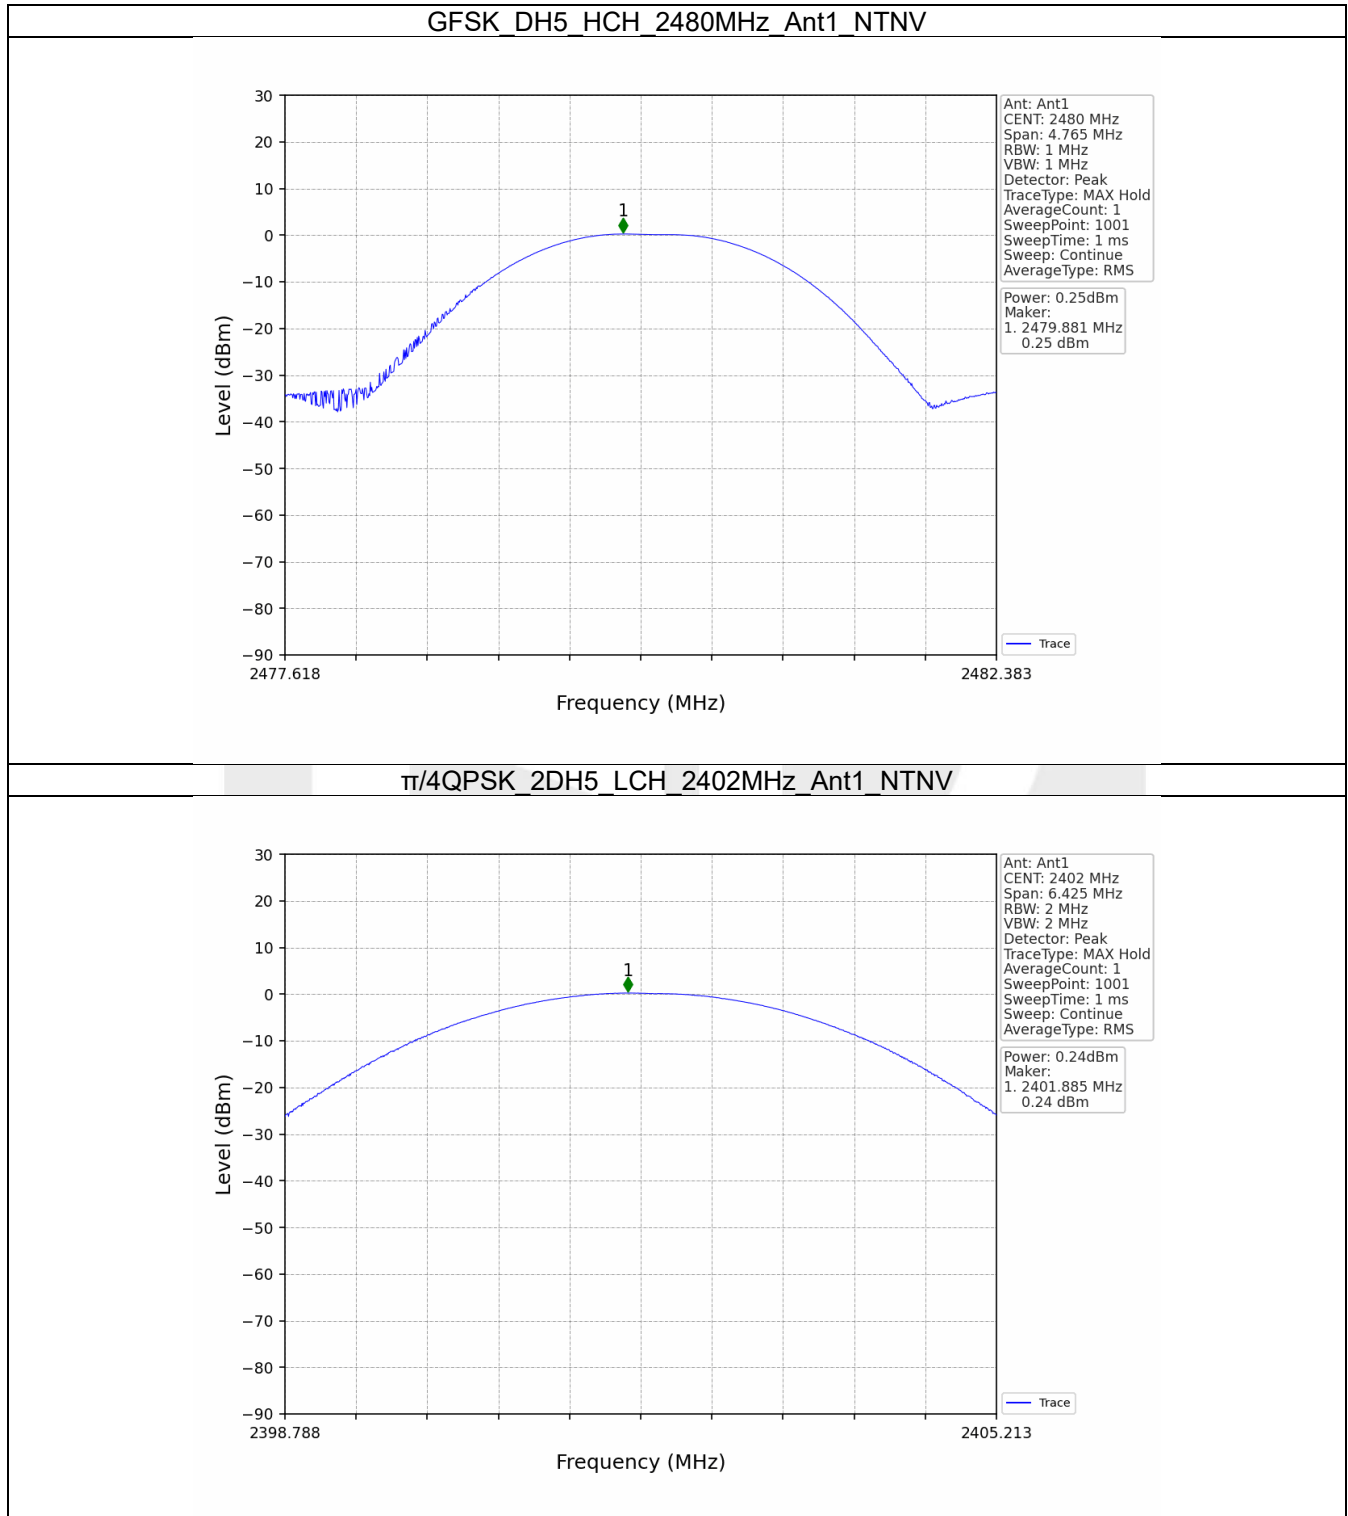

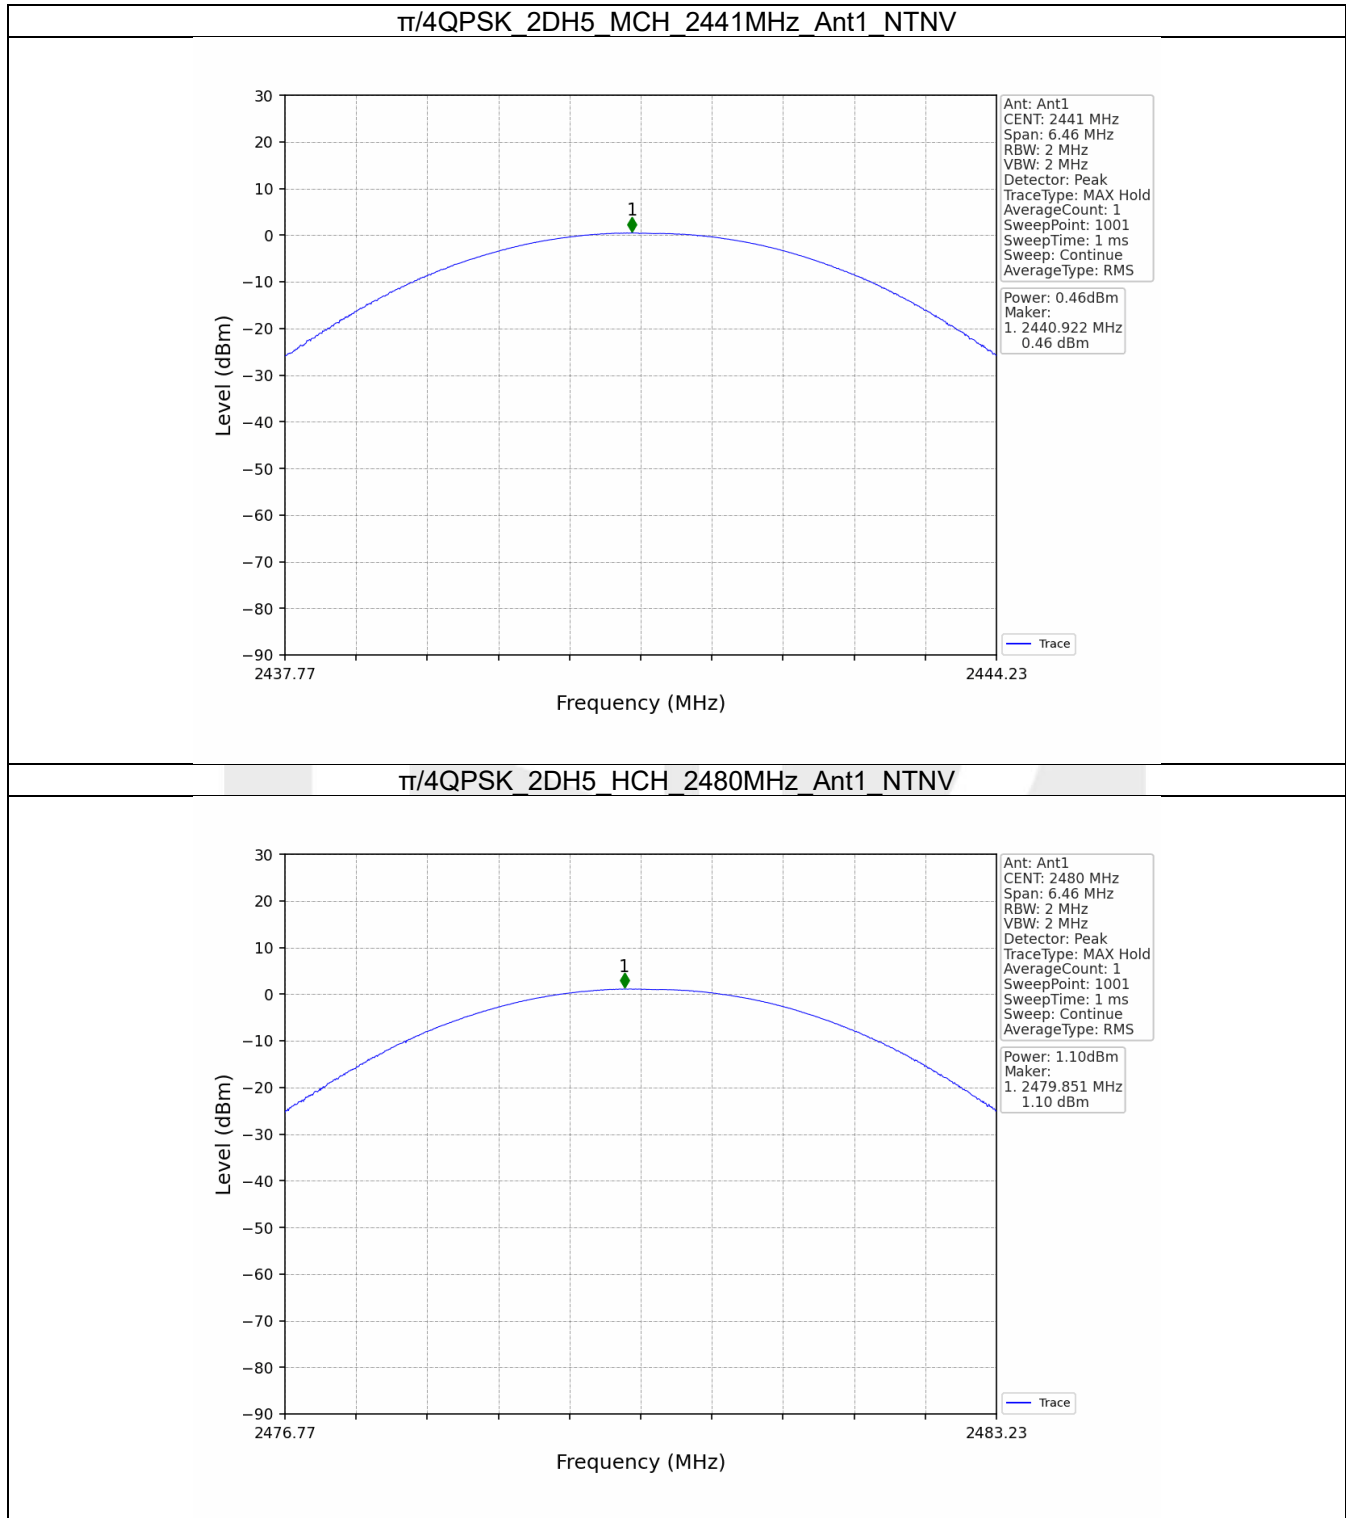


4. Carrier Frequency Separation

4.1 Ant1

4.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	0.957	≥ 0.957	Pass
$\pi/4$ QPSK	SISO	HOPP	2DH5	1.020	1.292	≥ 0.861	Pass

4.1.2 Test Graph

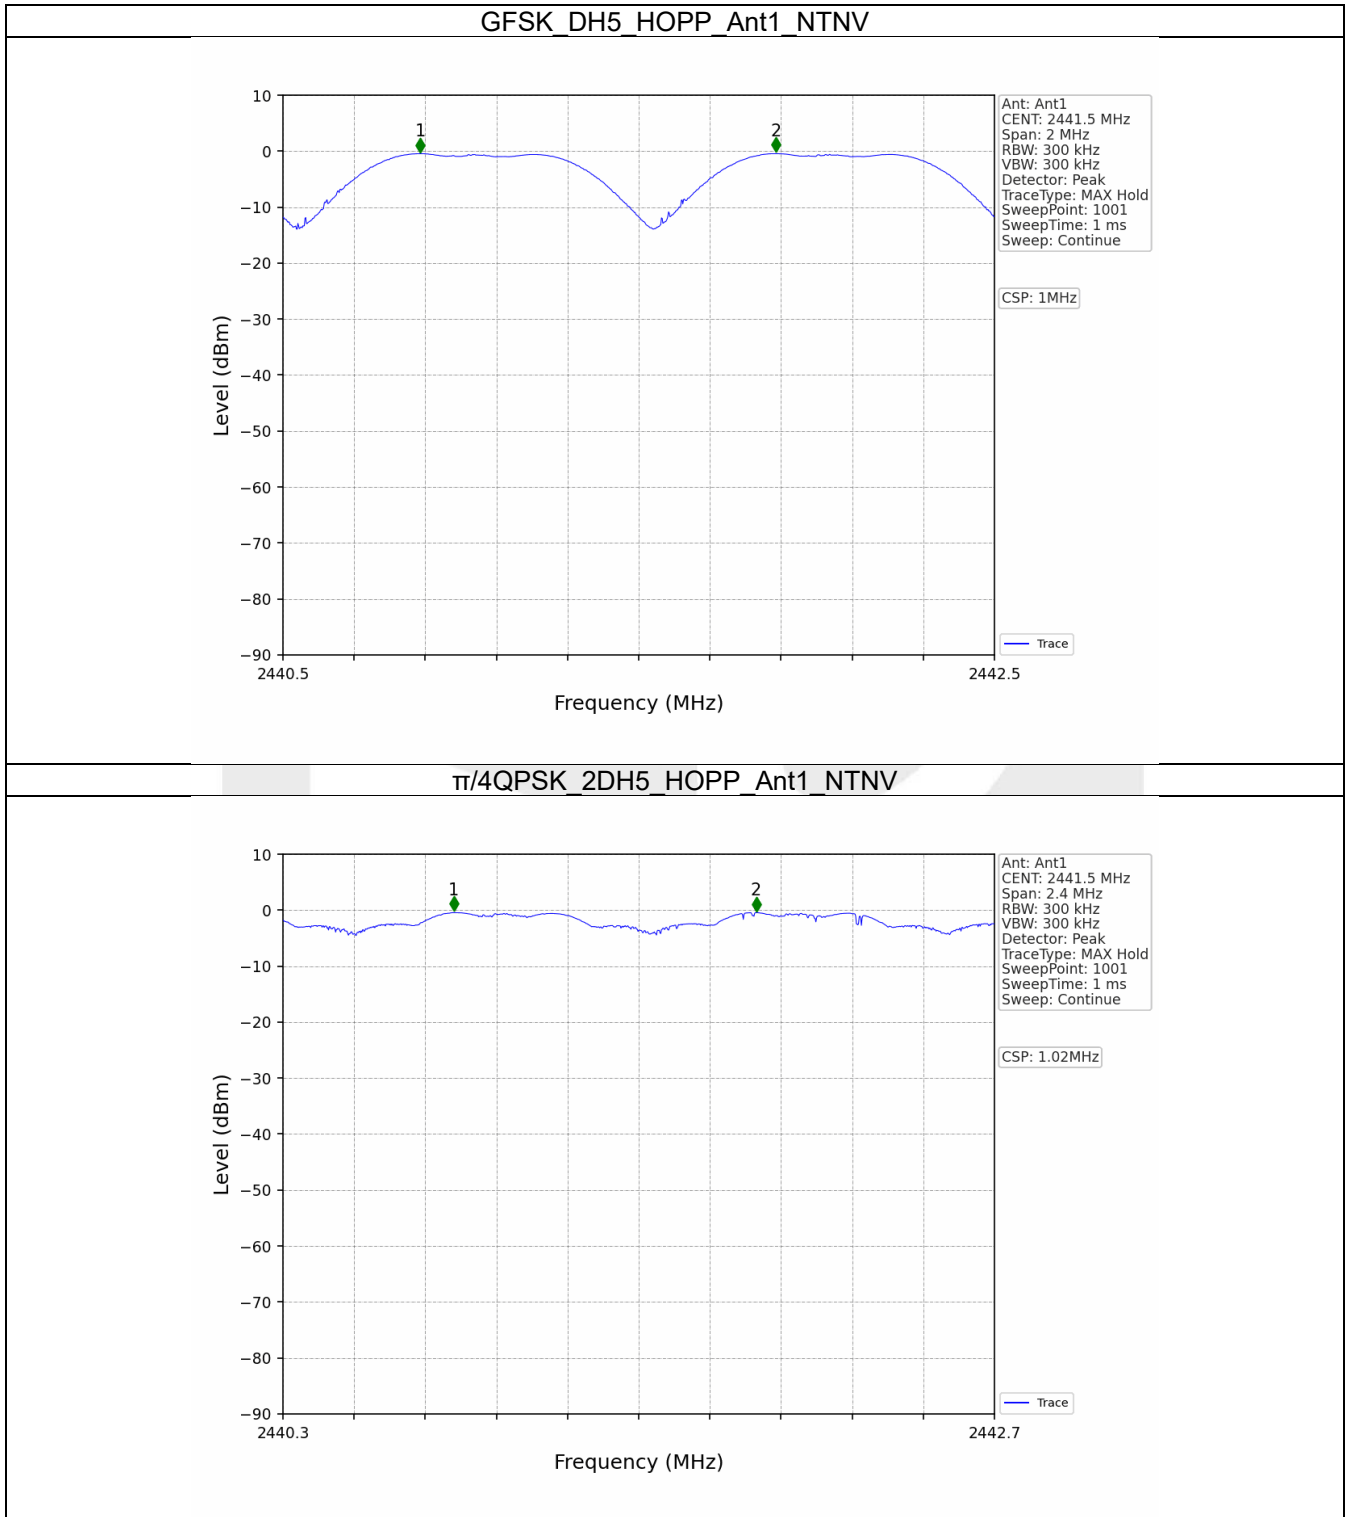


5. Number of Hopping Frequencies

5.1 HoppNum

5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
π /4QPSK	SISO	HOPP	2DH5	79	>=15	Pass

5.1.2 Test Graph

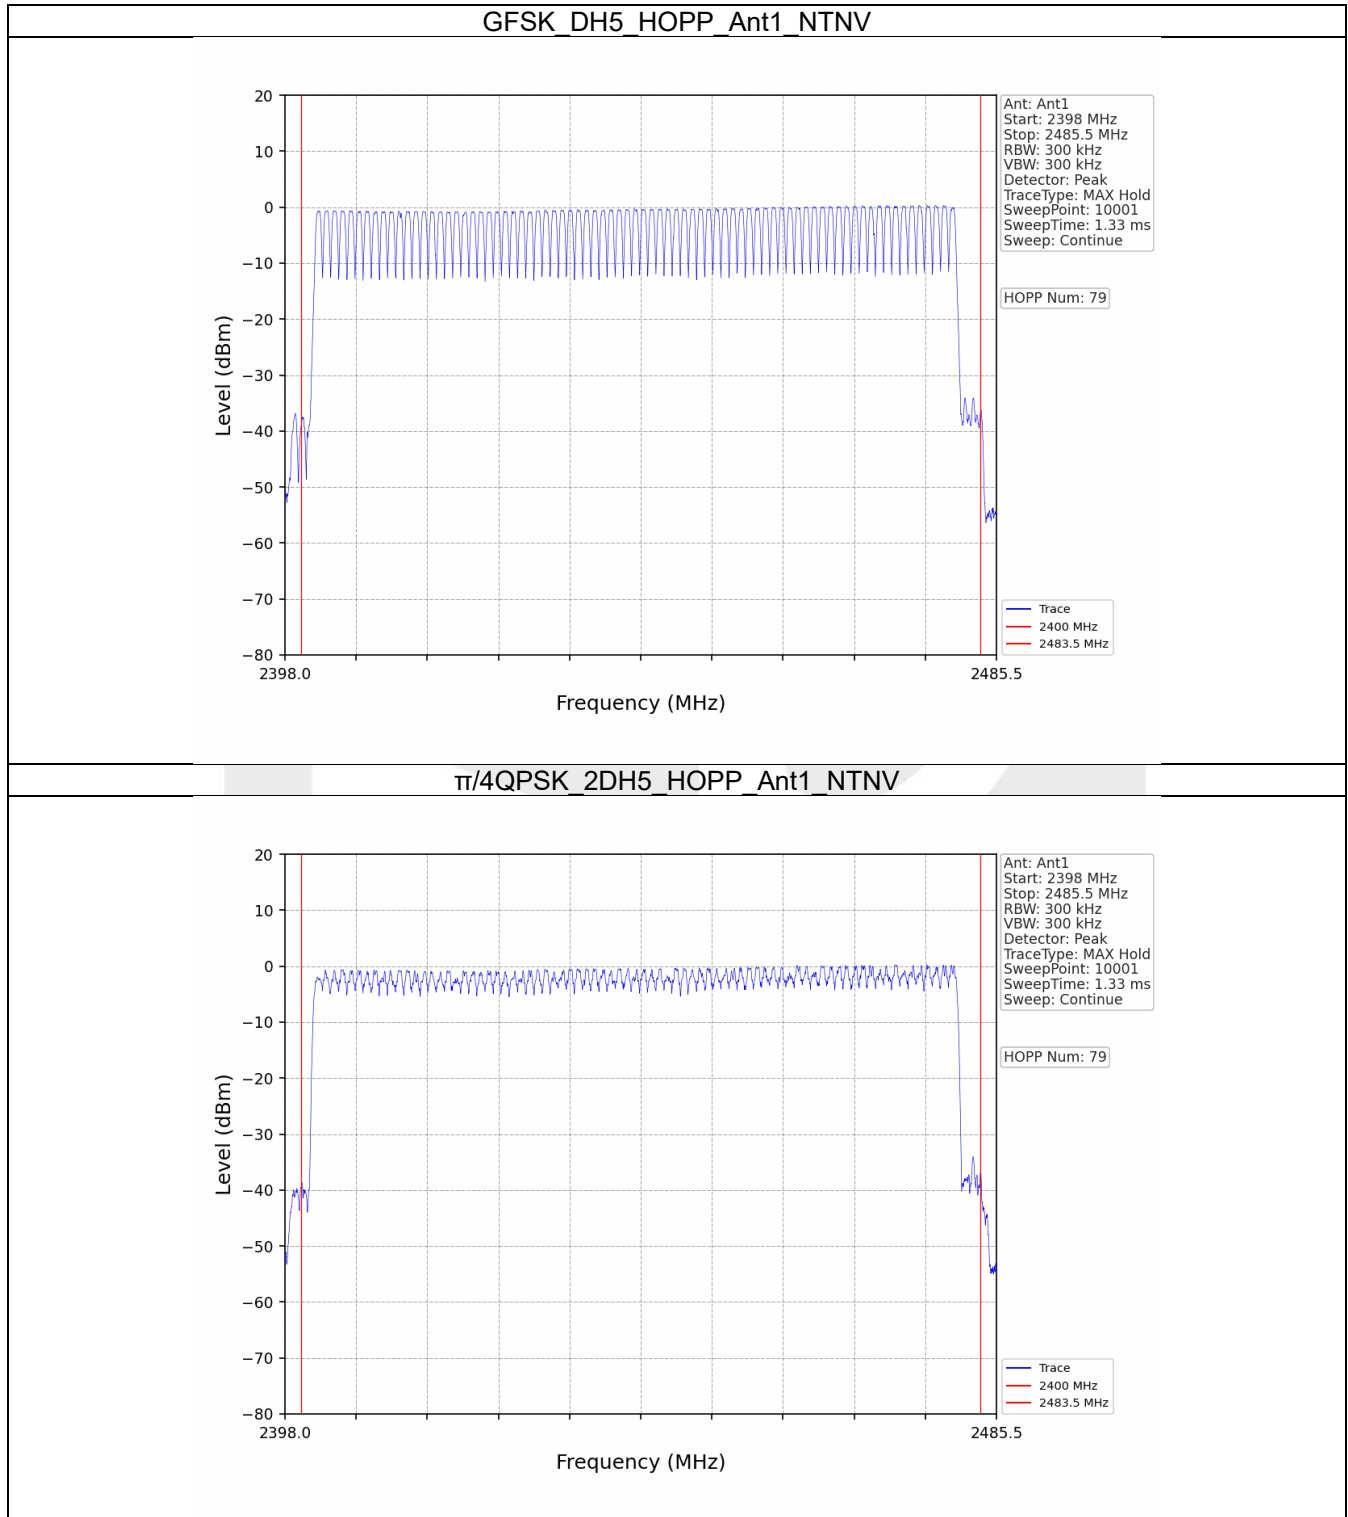


6. Time of Occupancy (Dwell Time)


6.1 Ant1


6.1.1 Test Result


Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.380	31.600	320	121.600	<=400	Pass
			DH3	1.638	31.600	154	252.252	<=400	Pass
			DH5	2.884	31.600	108	311.472	<=400	Pass
π/4QPSK	SISO	HOPP	2DH1	0.388	31.600	318	123.384	<=400	Pass
			2DH3	1.648	31.600	166	273.568	<=400	Pass
			2DH5	2.892	31.600	116	335.472	<=400	Pass


6.1.2 Test Graph


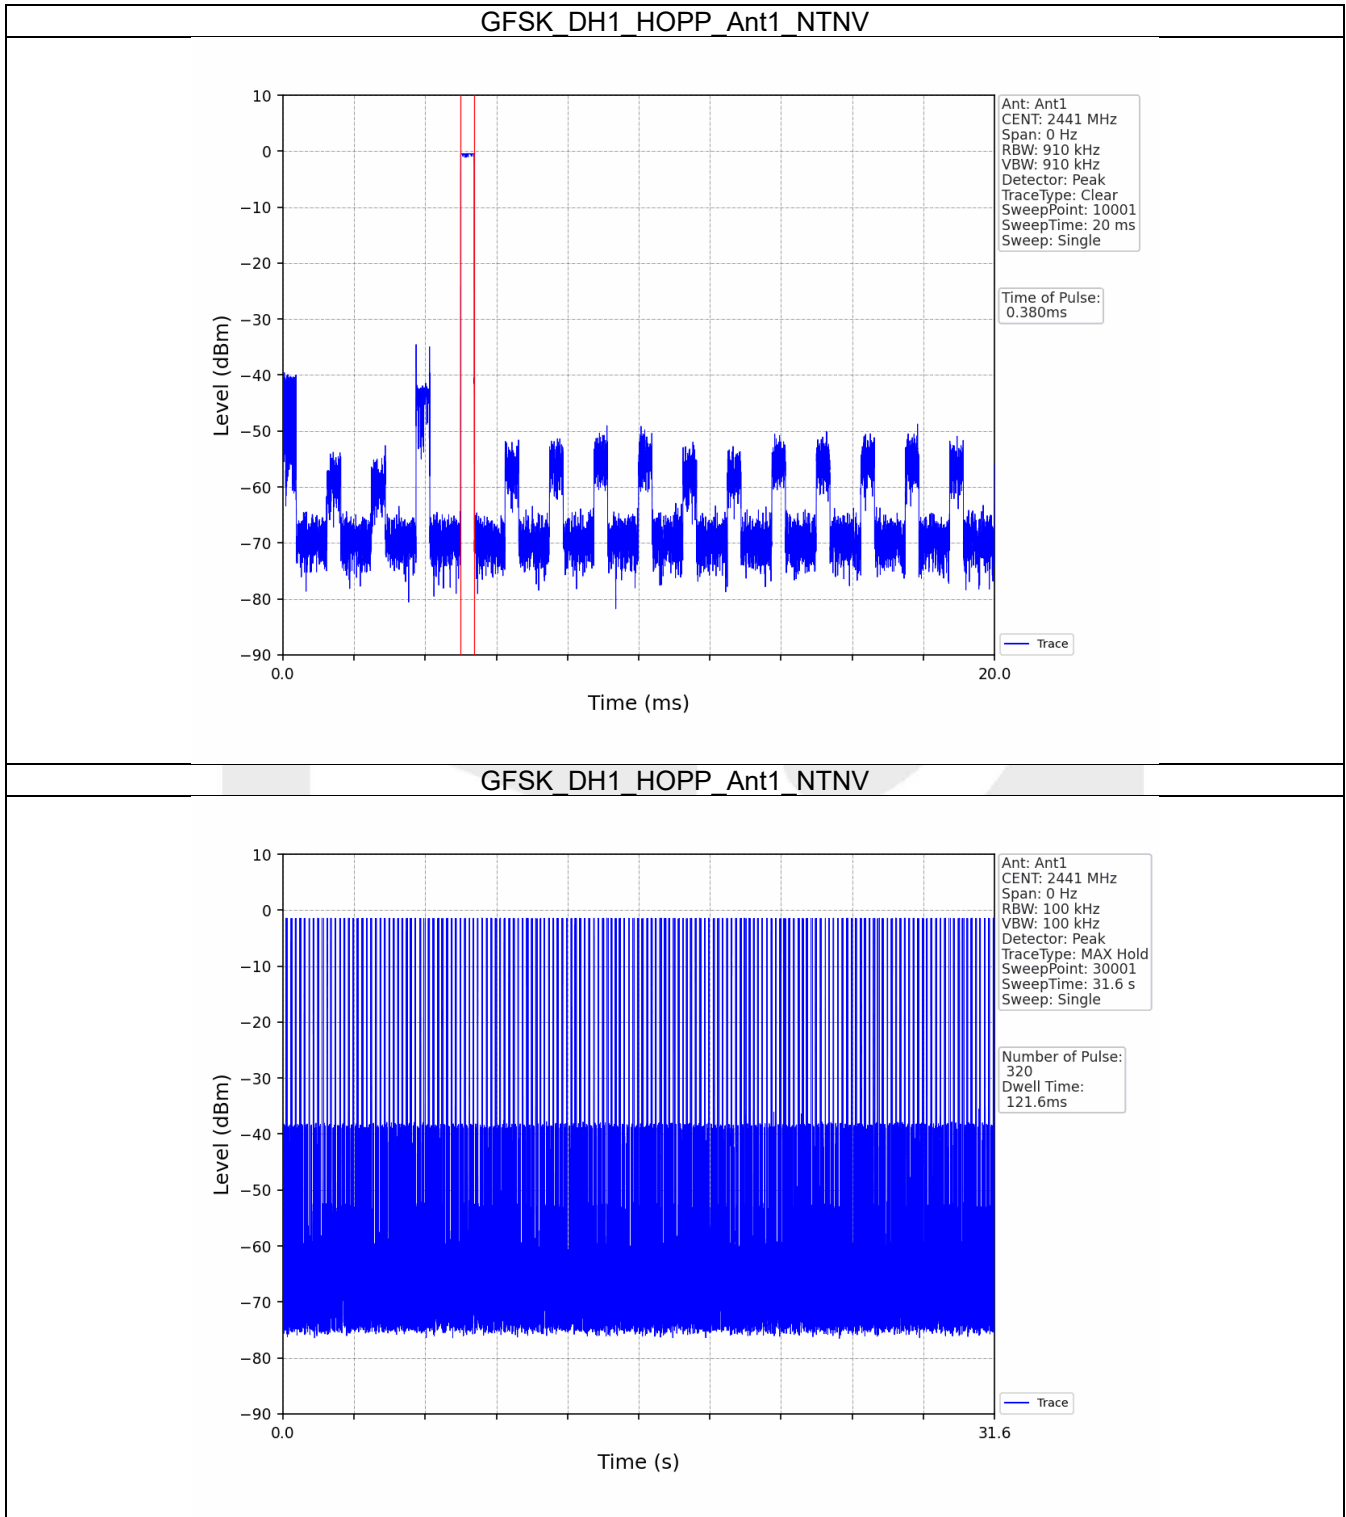


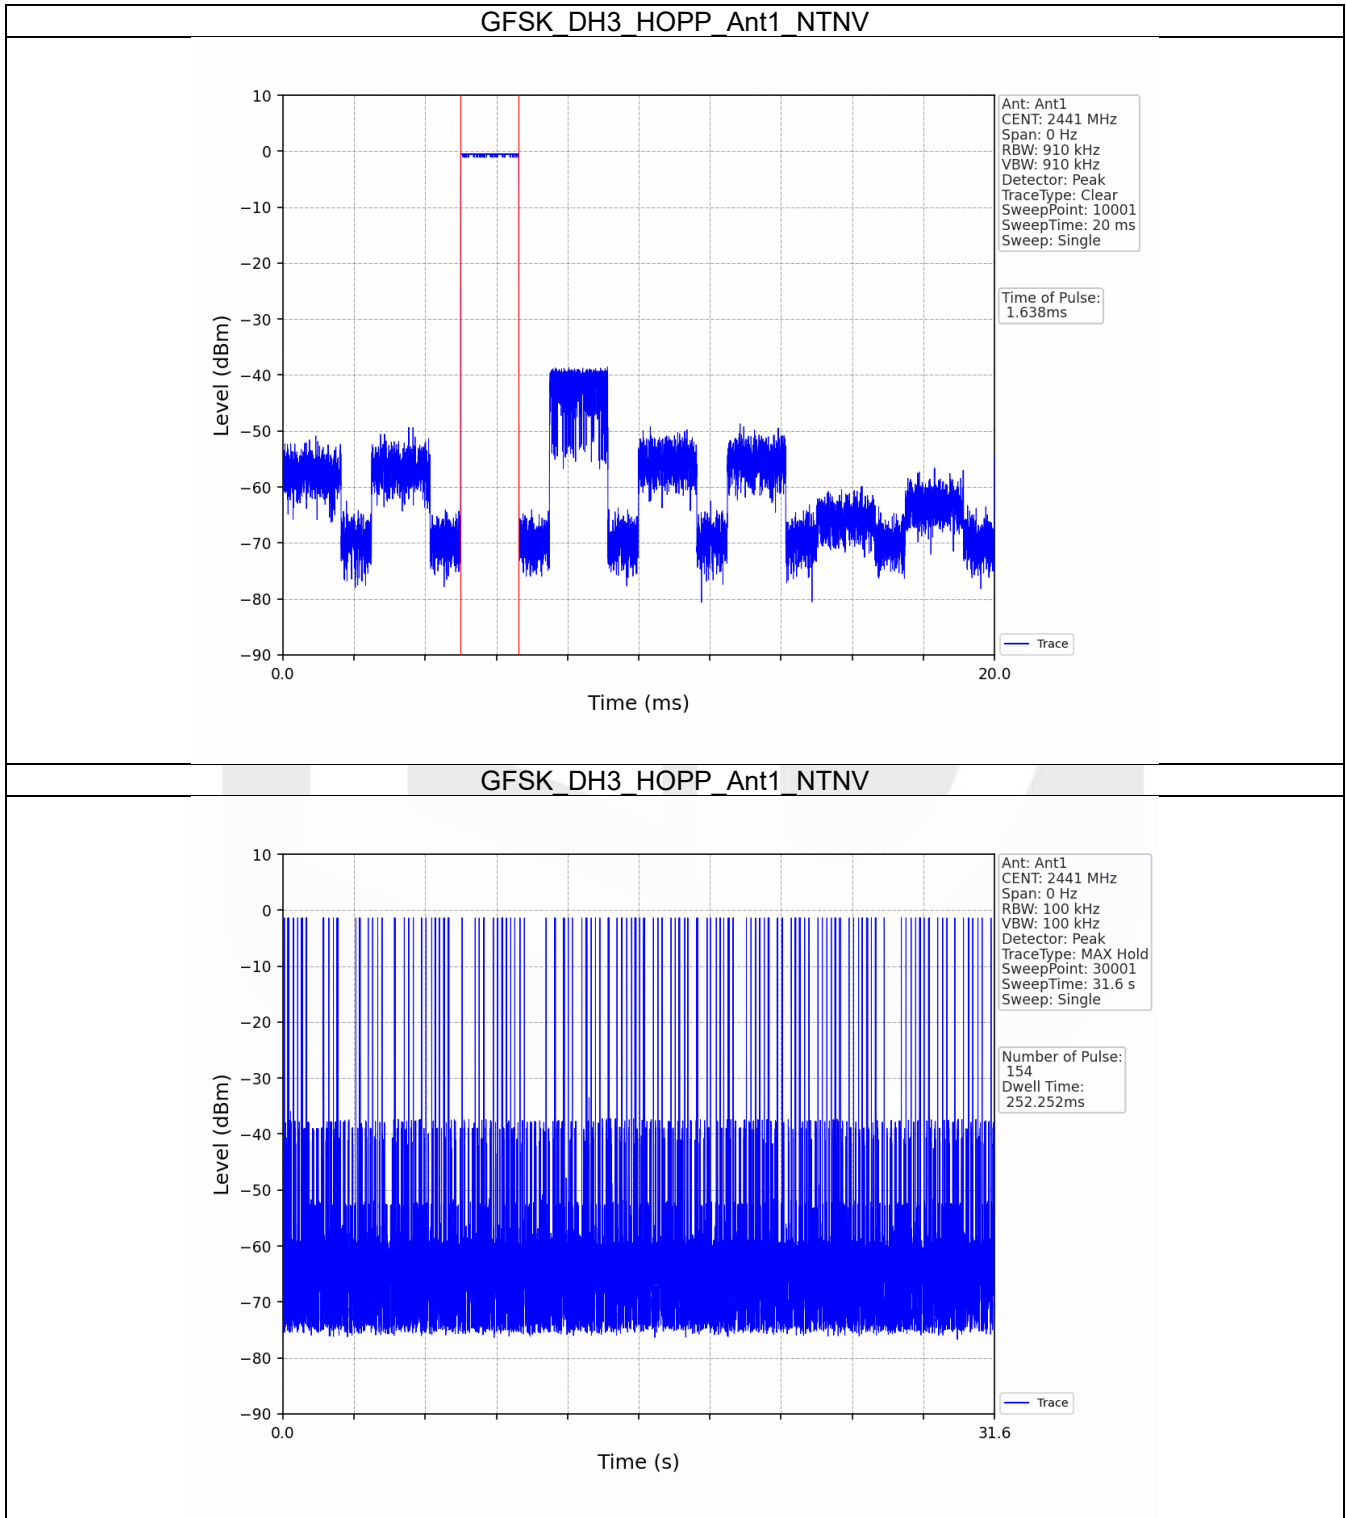

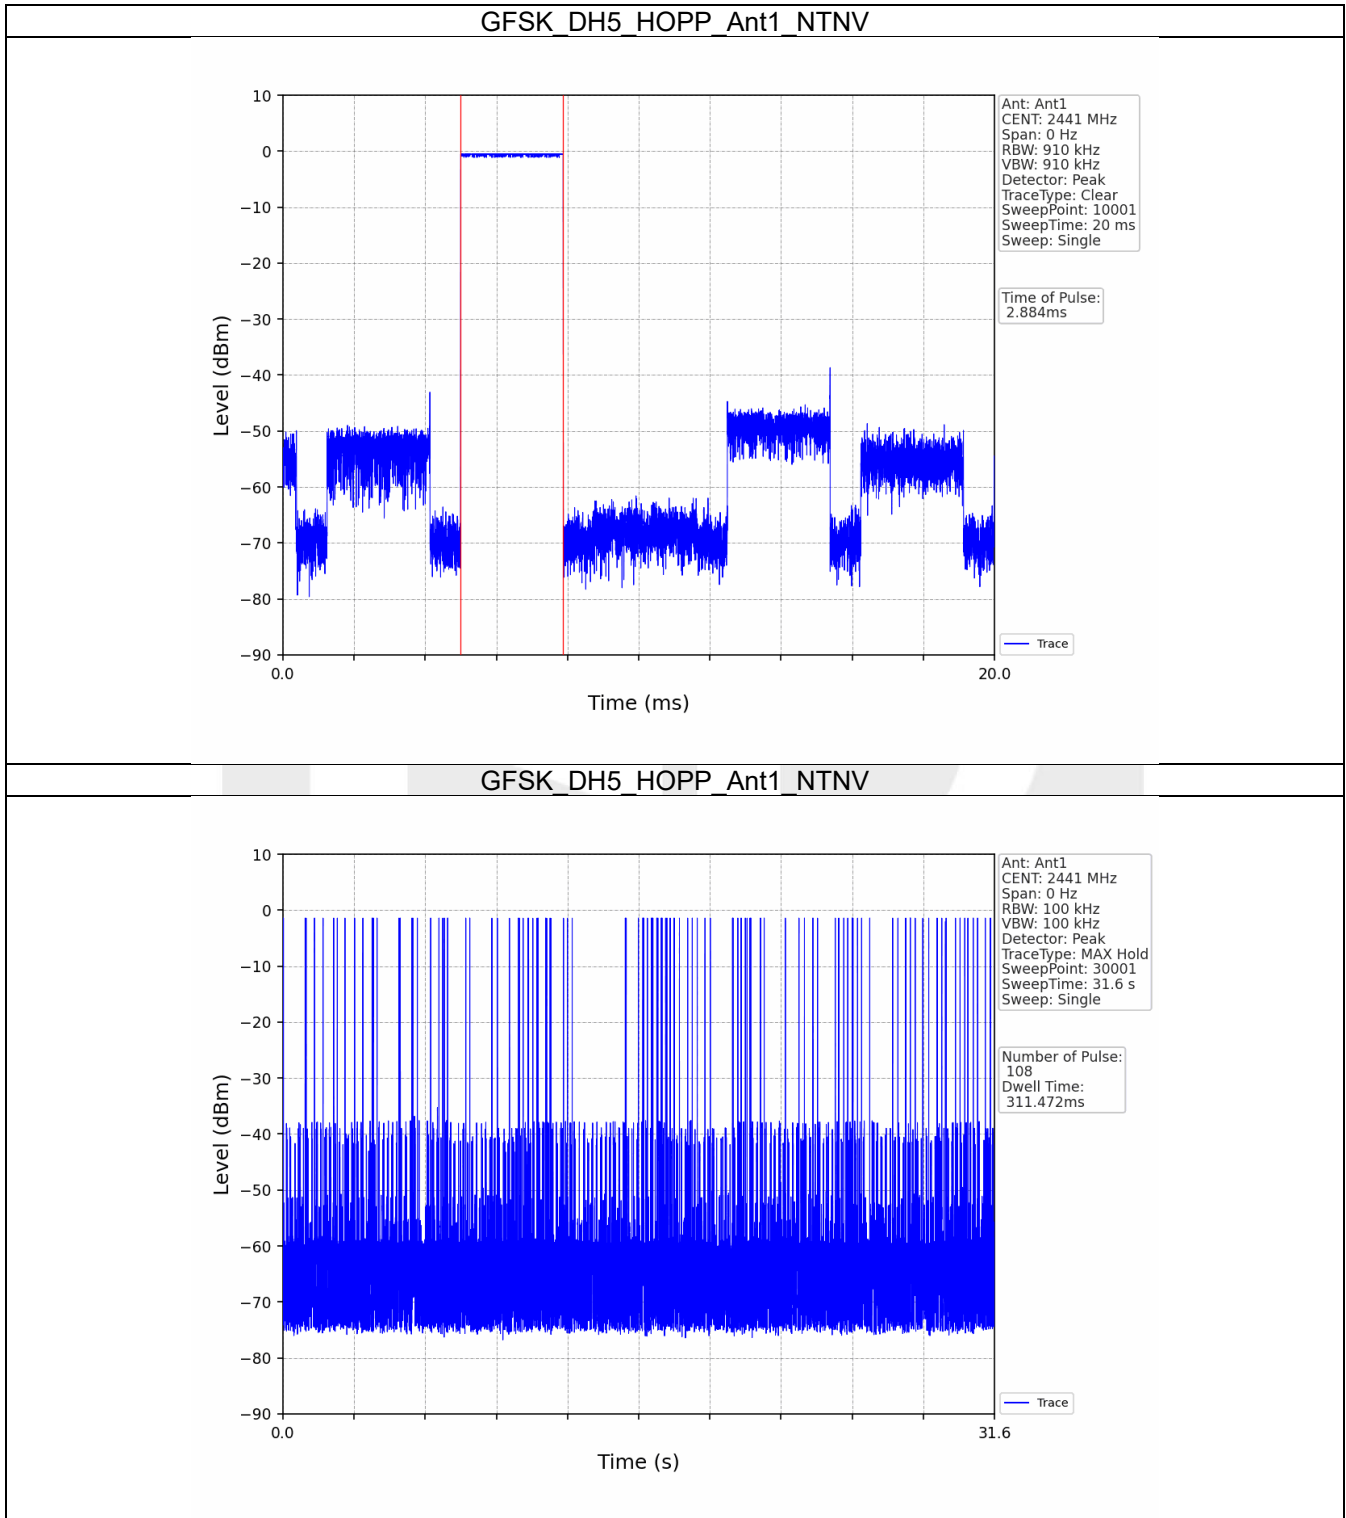

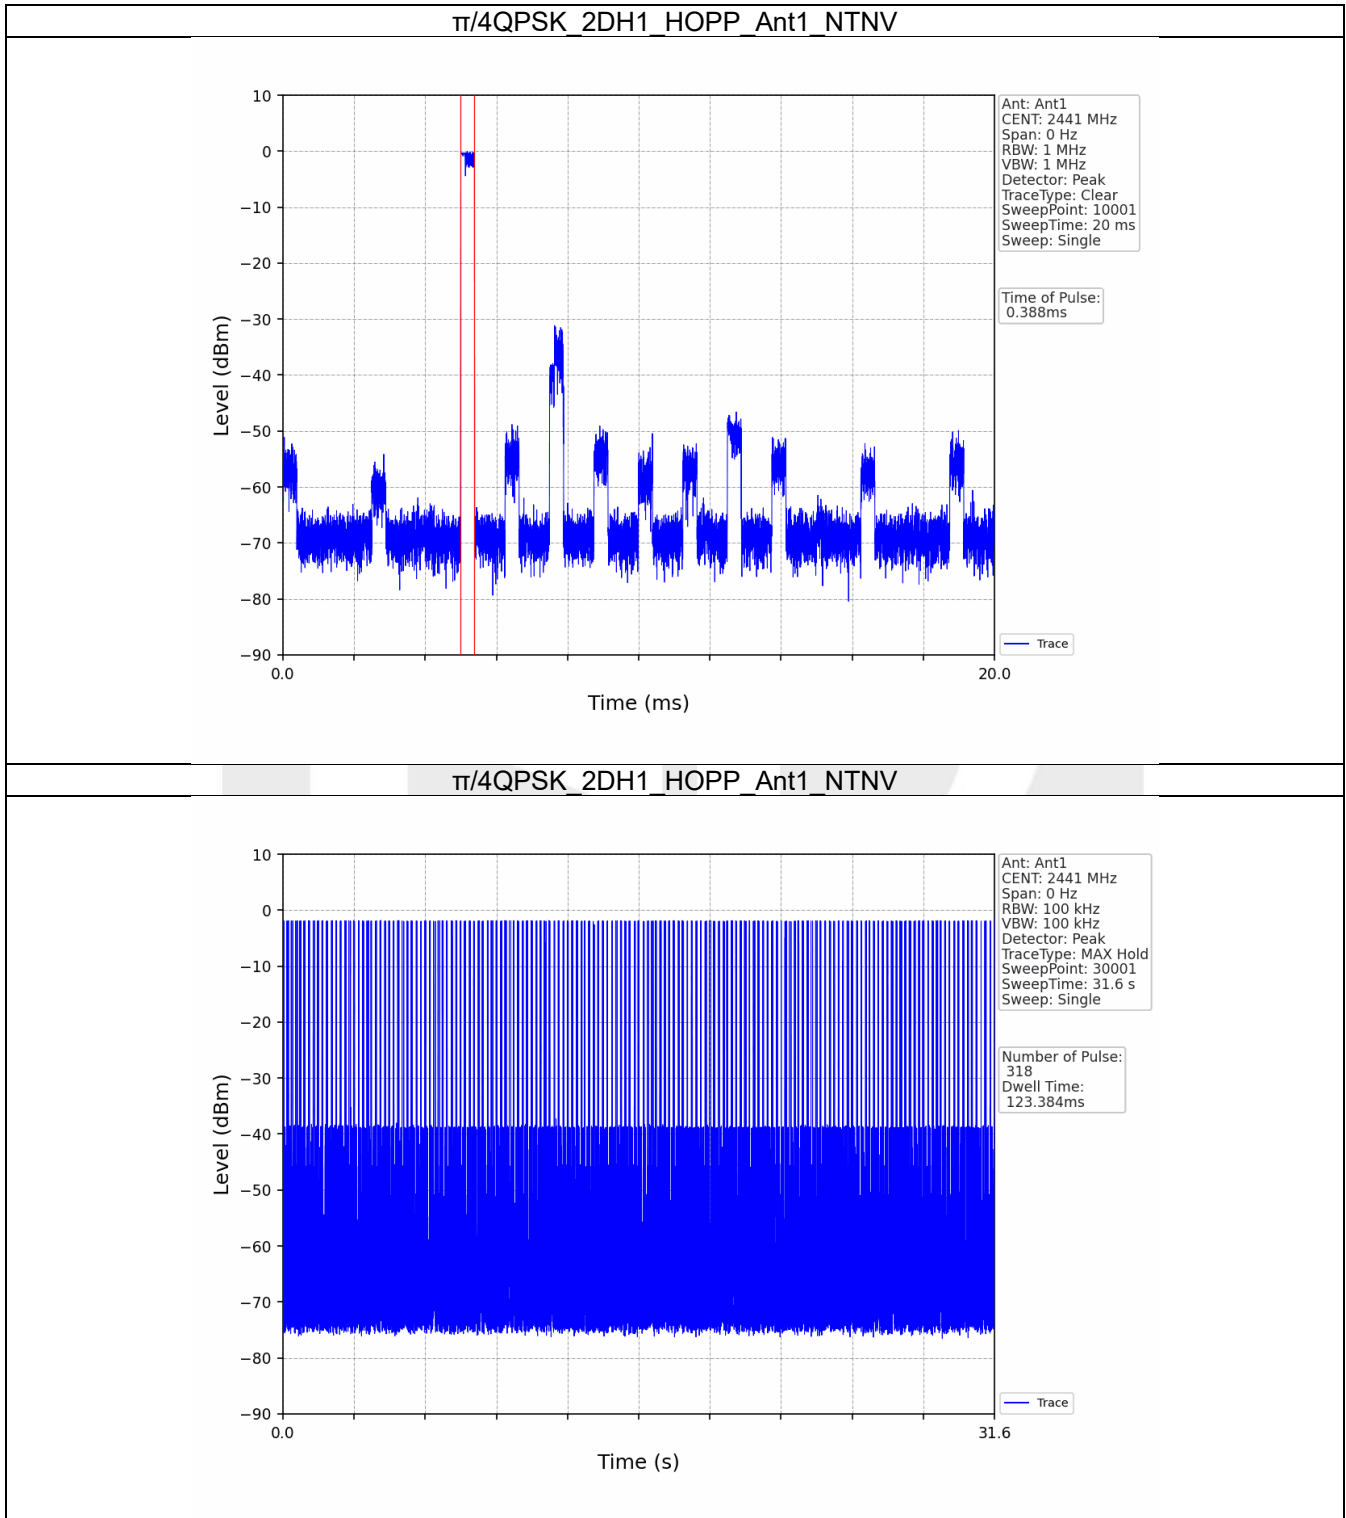

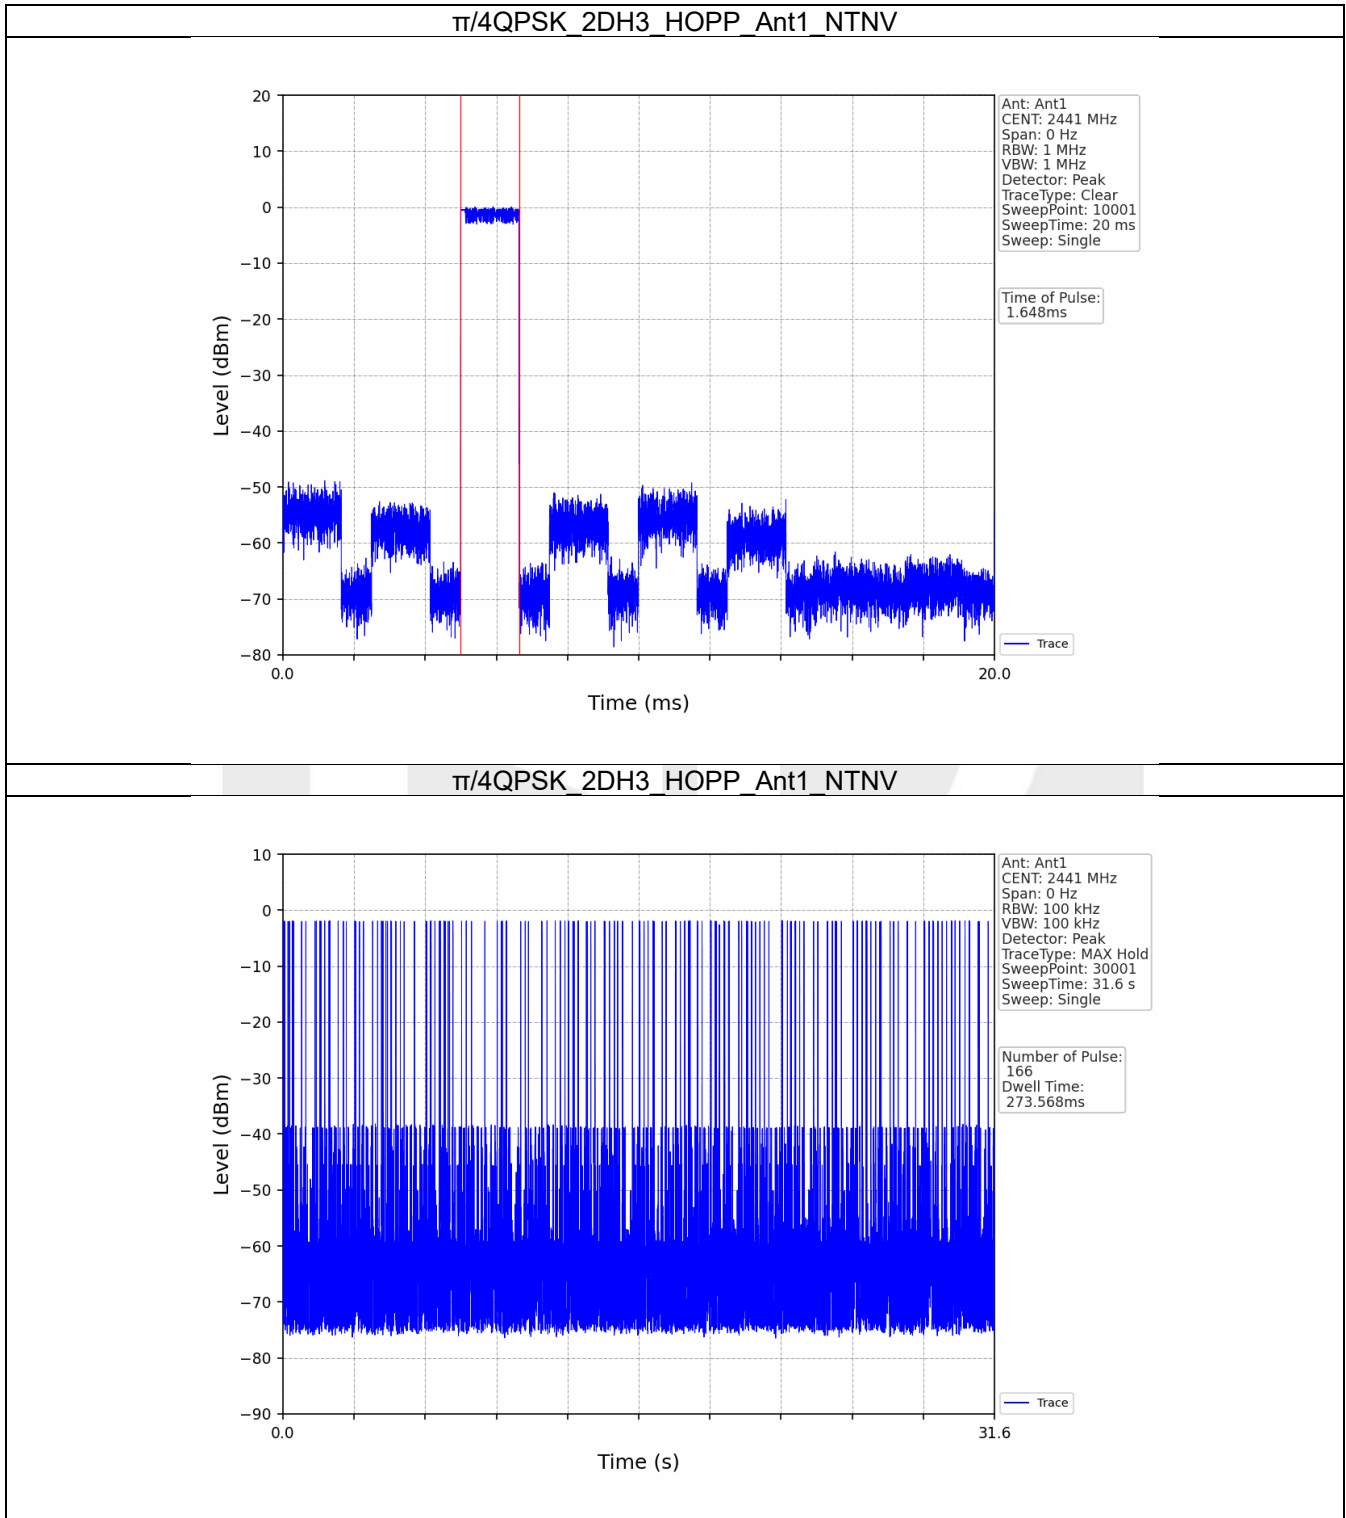

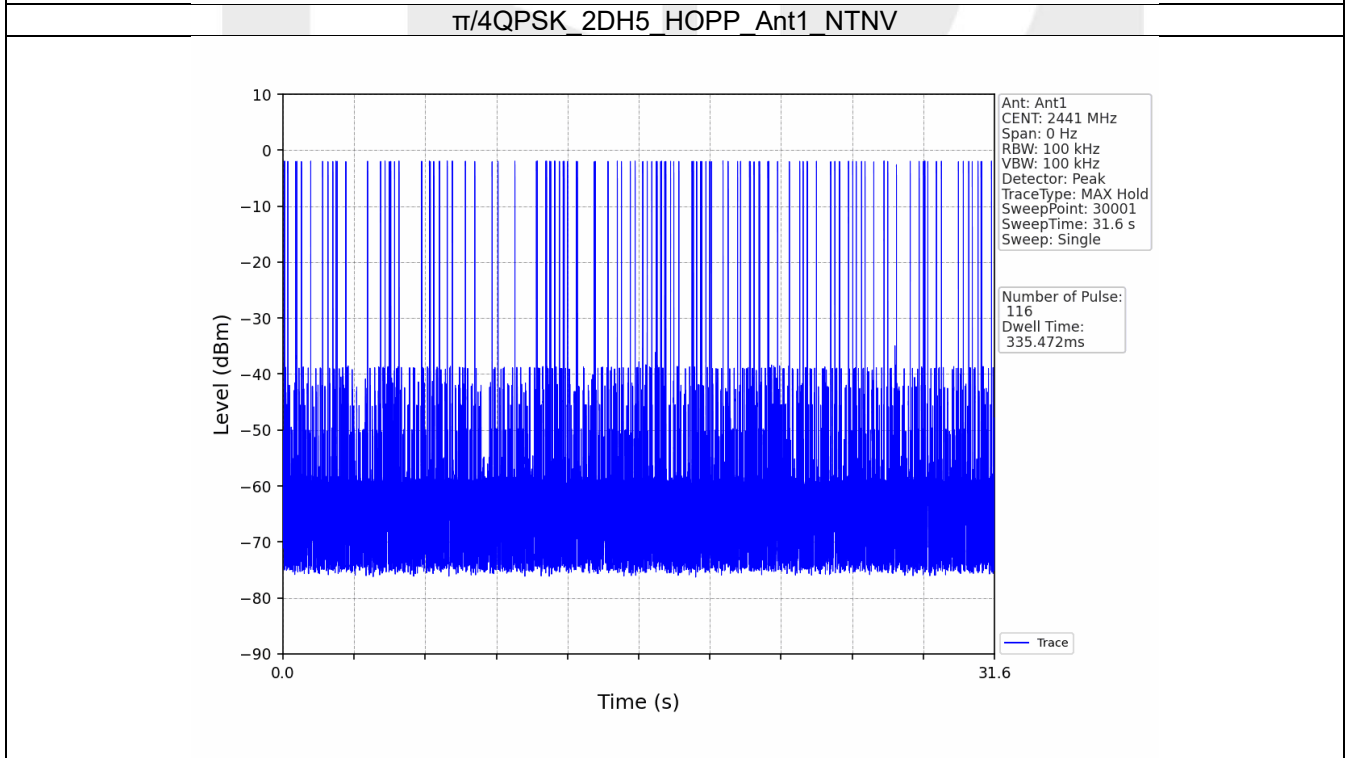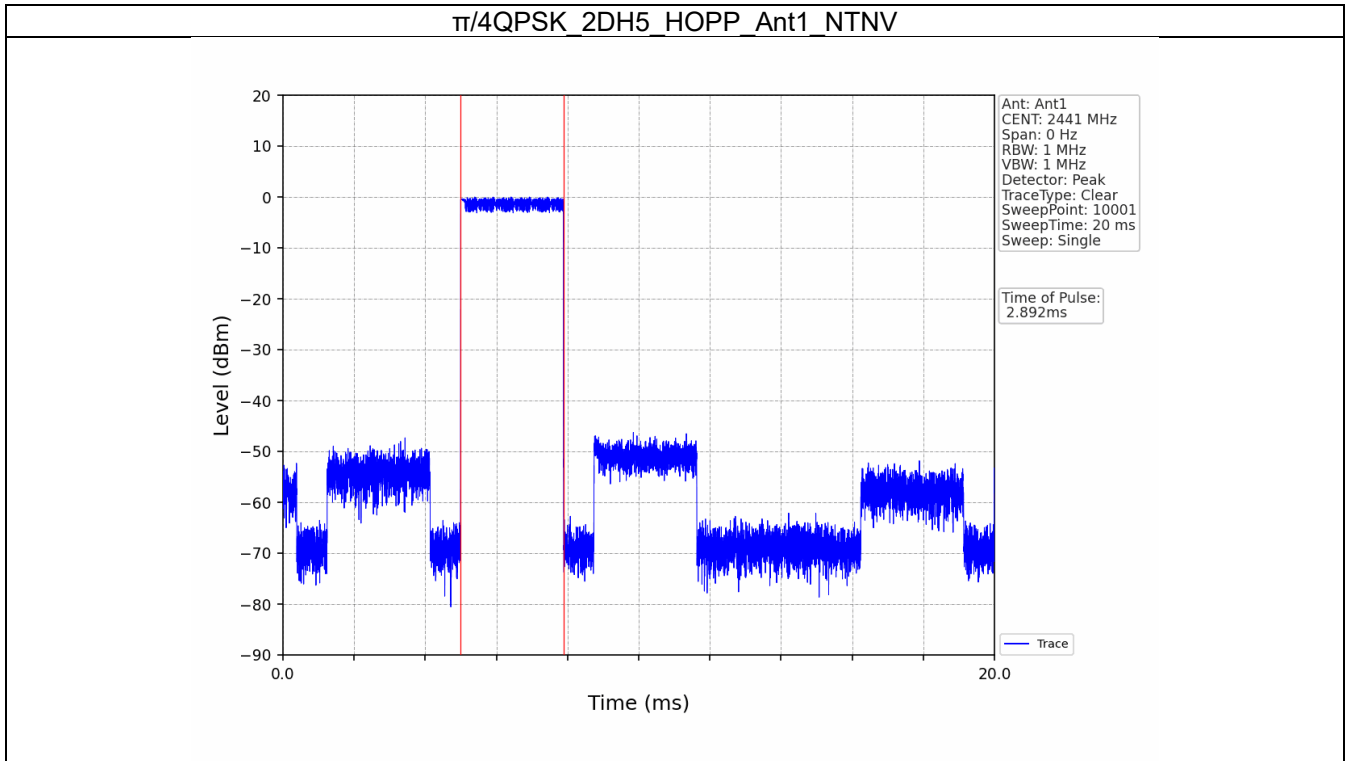

7. Unwanted Emissions In Non-restricted Frequency Bands


7.1 Ref


7.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	-0.71
		2441	DH5	1	-0.53
		2480	DH5	1	0.17
$\pi/4$ QPSK	SISO	2402	2DH5	1	-0.81
		2441	2DH5	1	-0.56
		2480	2DH5	1	0.09

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

7.1.2 Test Graph

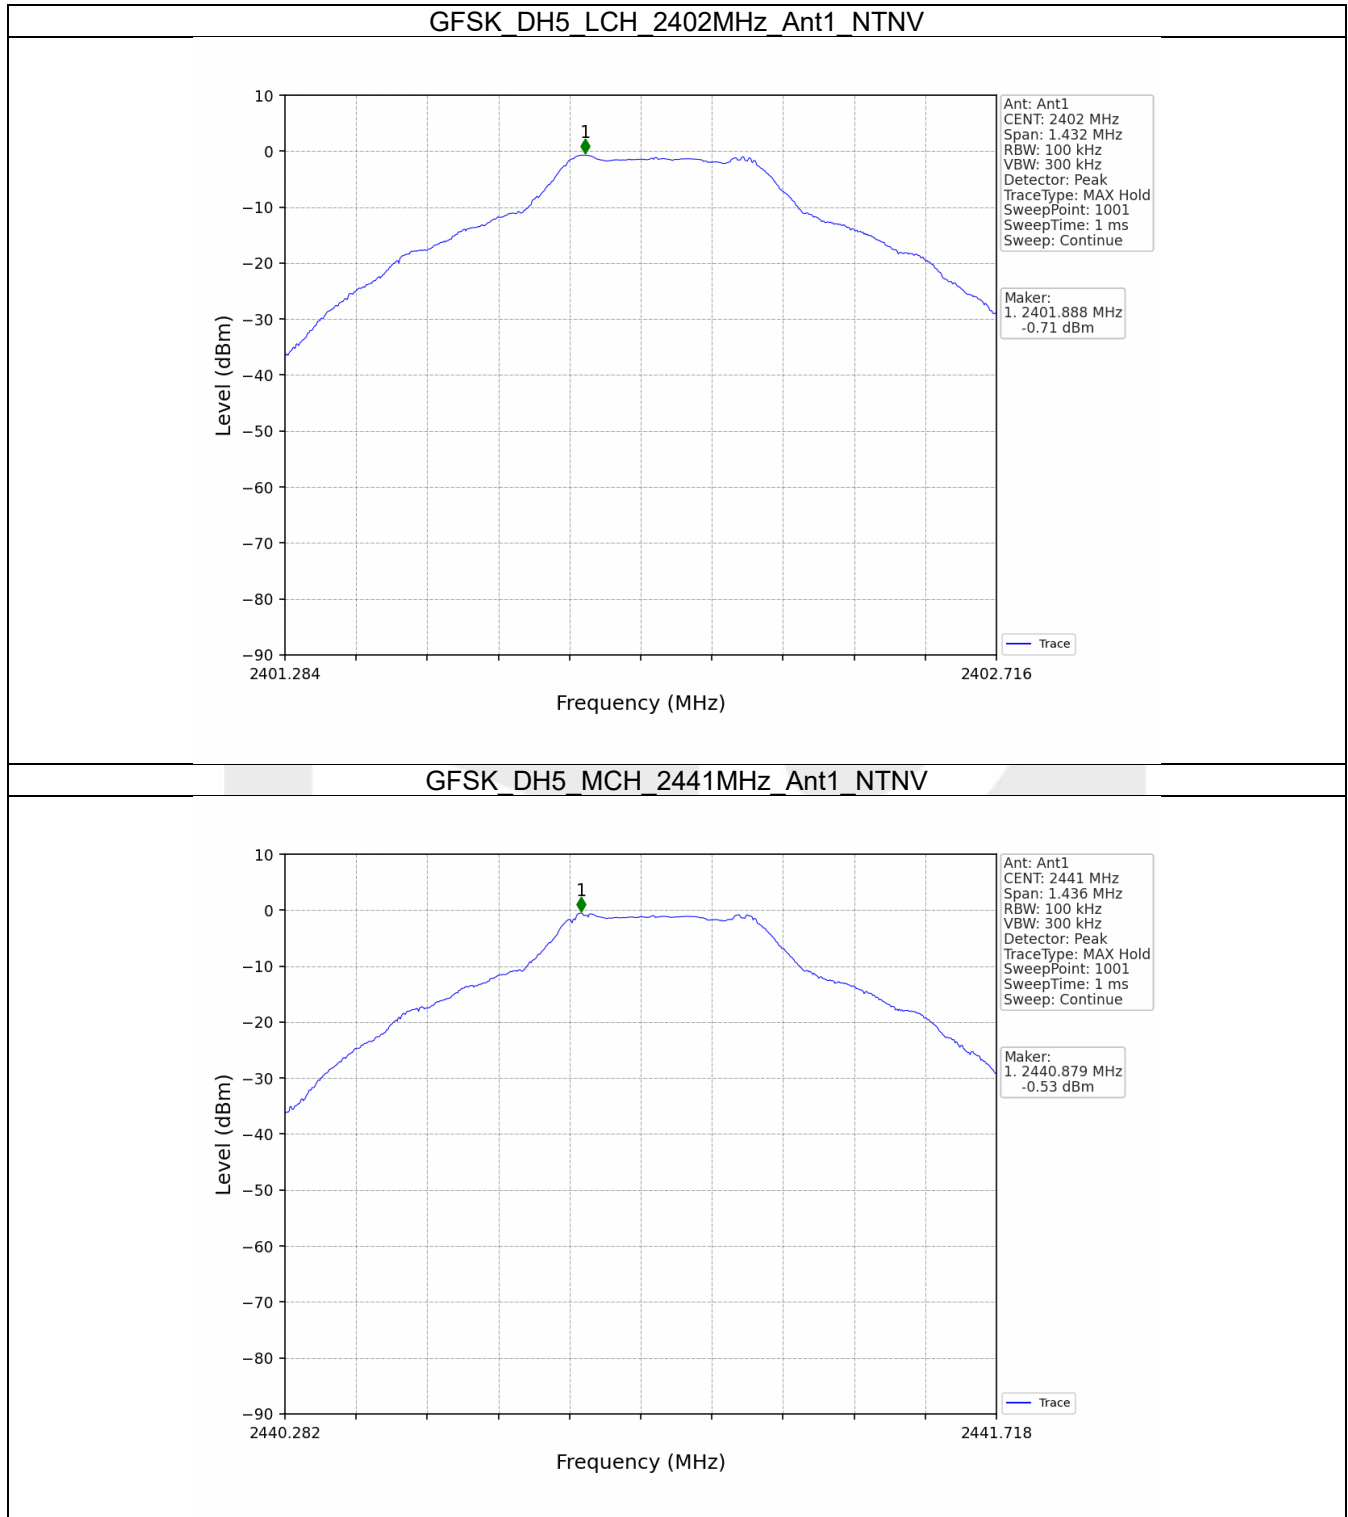

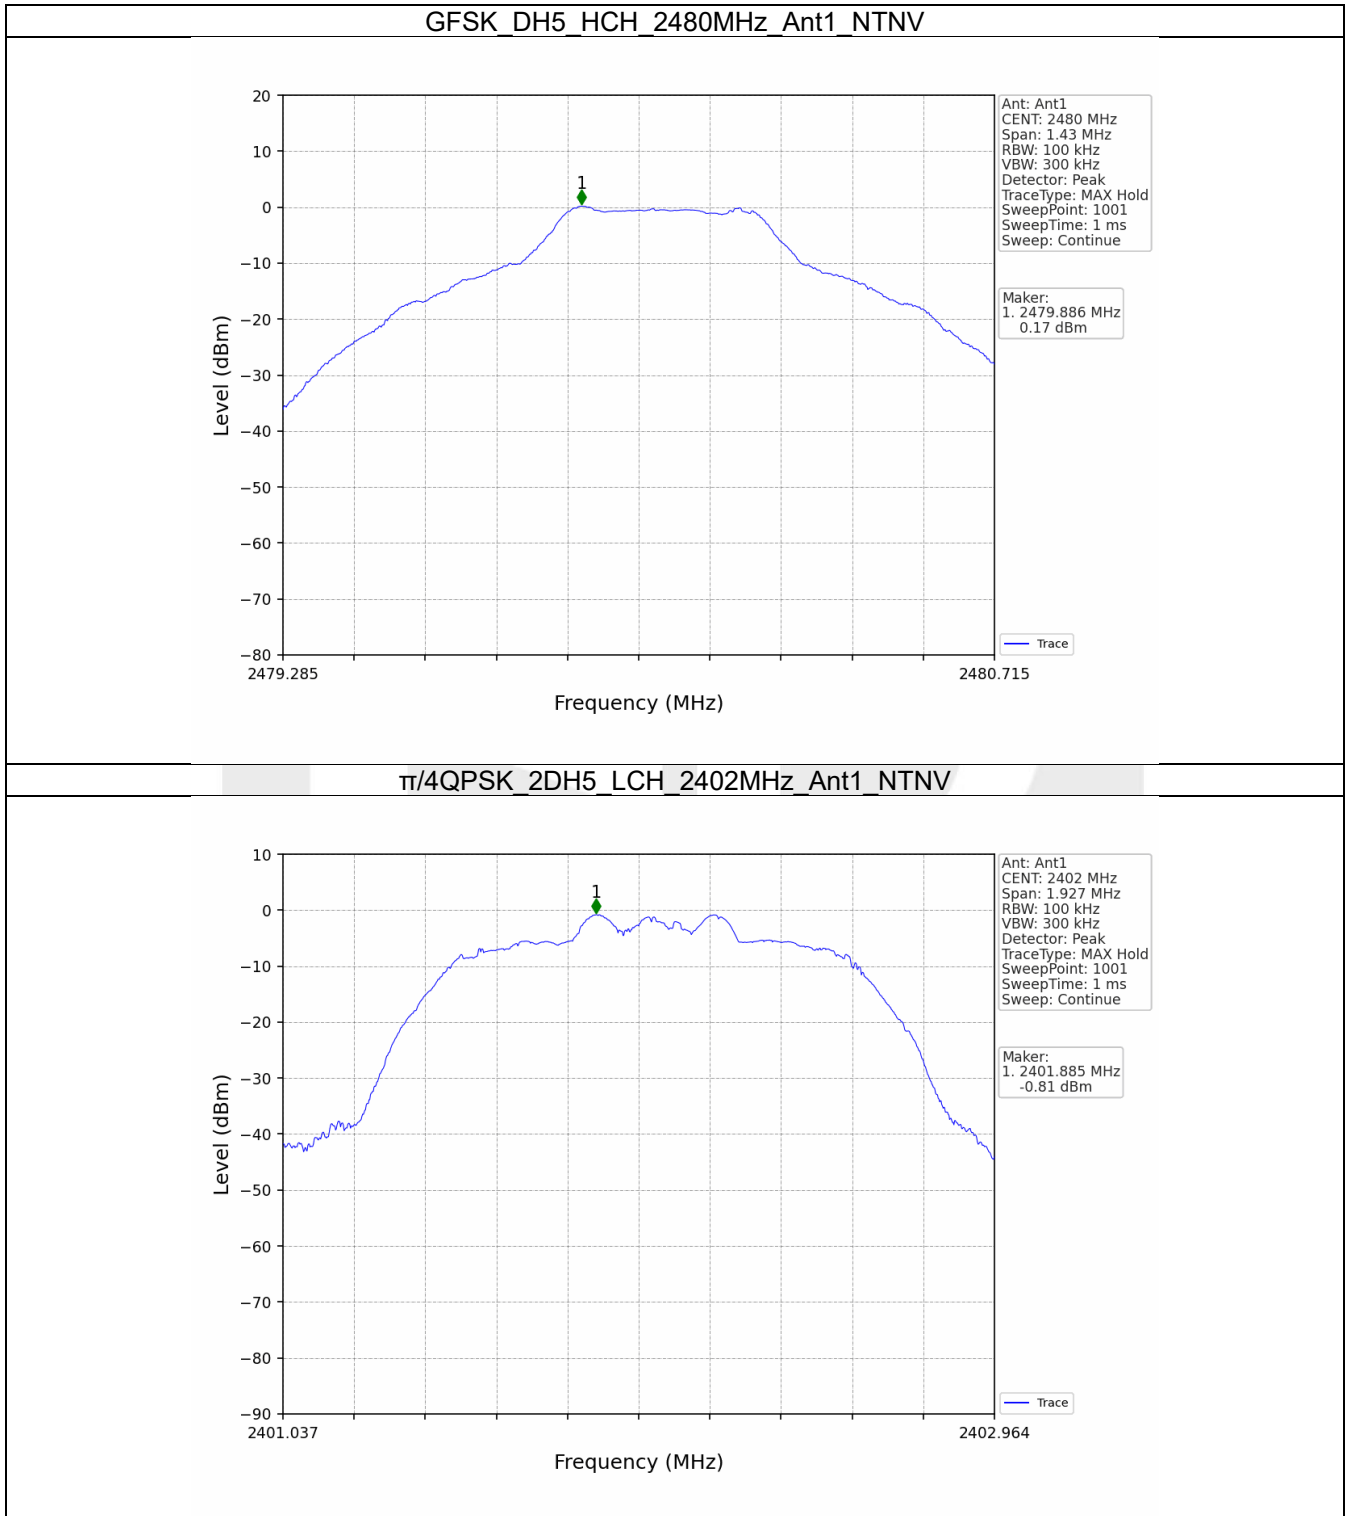

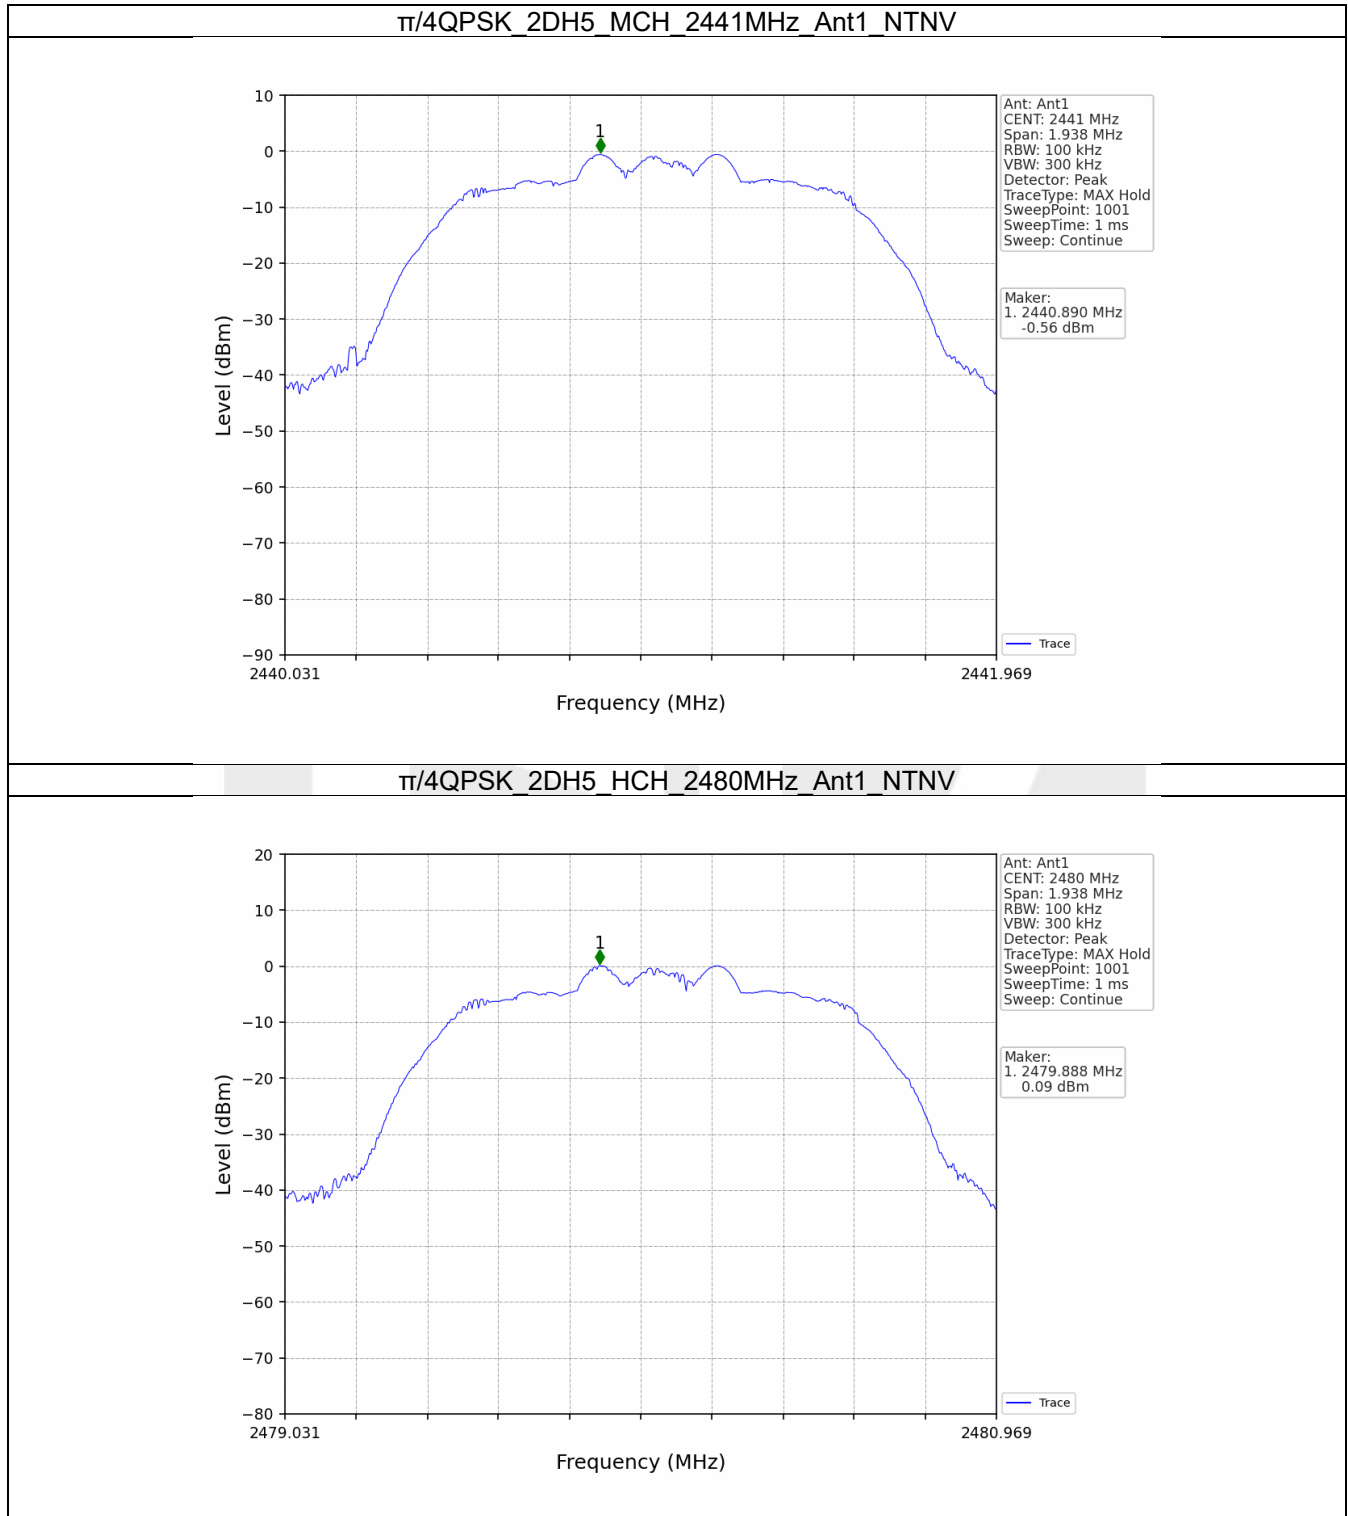



7.2 CSE
7.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	0.17	-19.83	Pass
		2441	DH5	1	0.17	-19.83	Pass
		2480	DH5	1	0.17	-19.83	Pass
		HOPP	DH5	1	0.17	-19.83	Pass
$\pi/4$ QPSK	SISO	2402	2DH5	1	0.09	-19.91	Pass
		2441	2DH5	1	0.09	-19.91	Pass
		2480	2DH5	1	0.09	-19.91	Pass
		HOPP	2DH5	1	0.09	-19.91	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


7.2.2 Test Graph

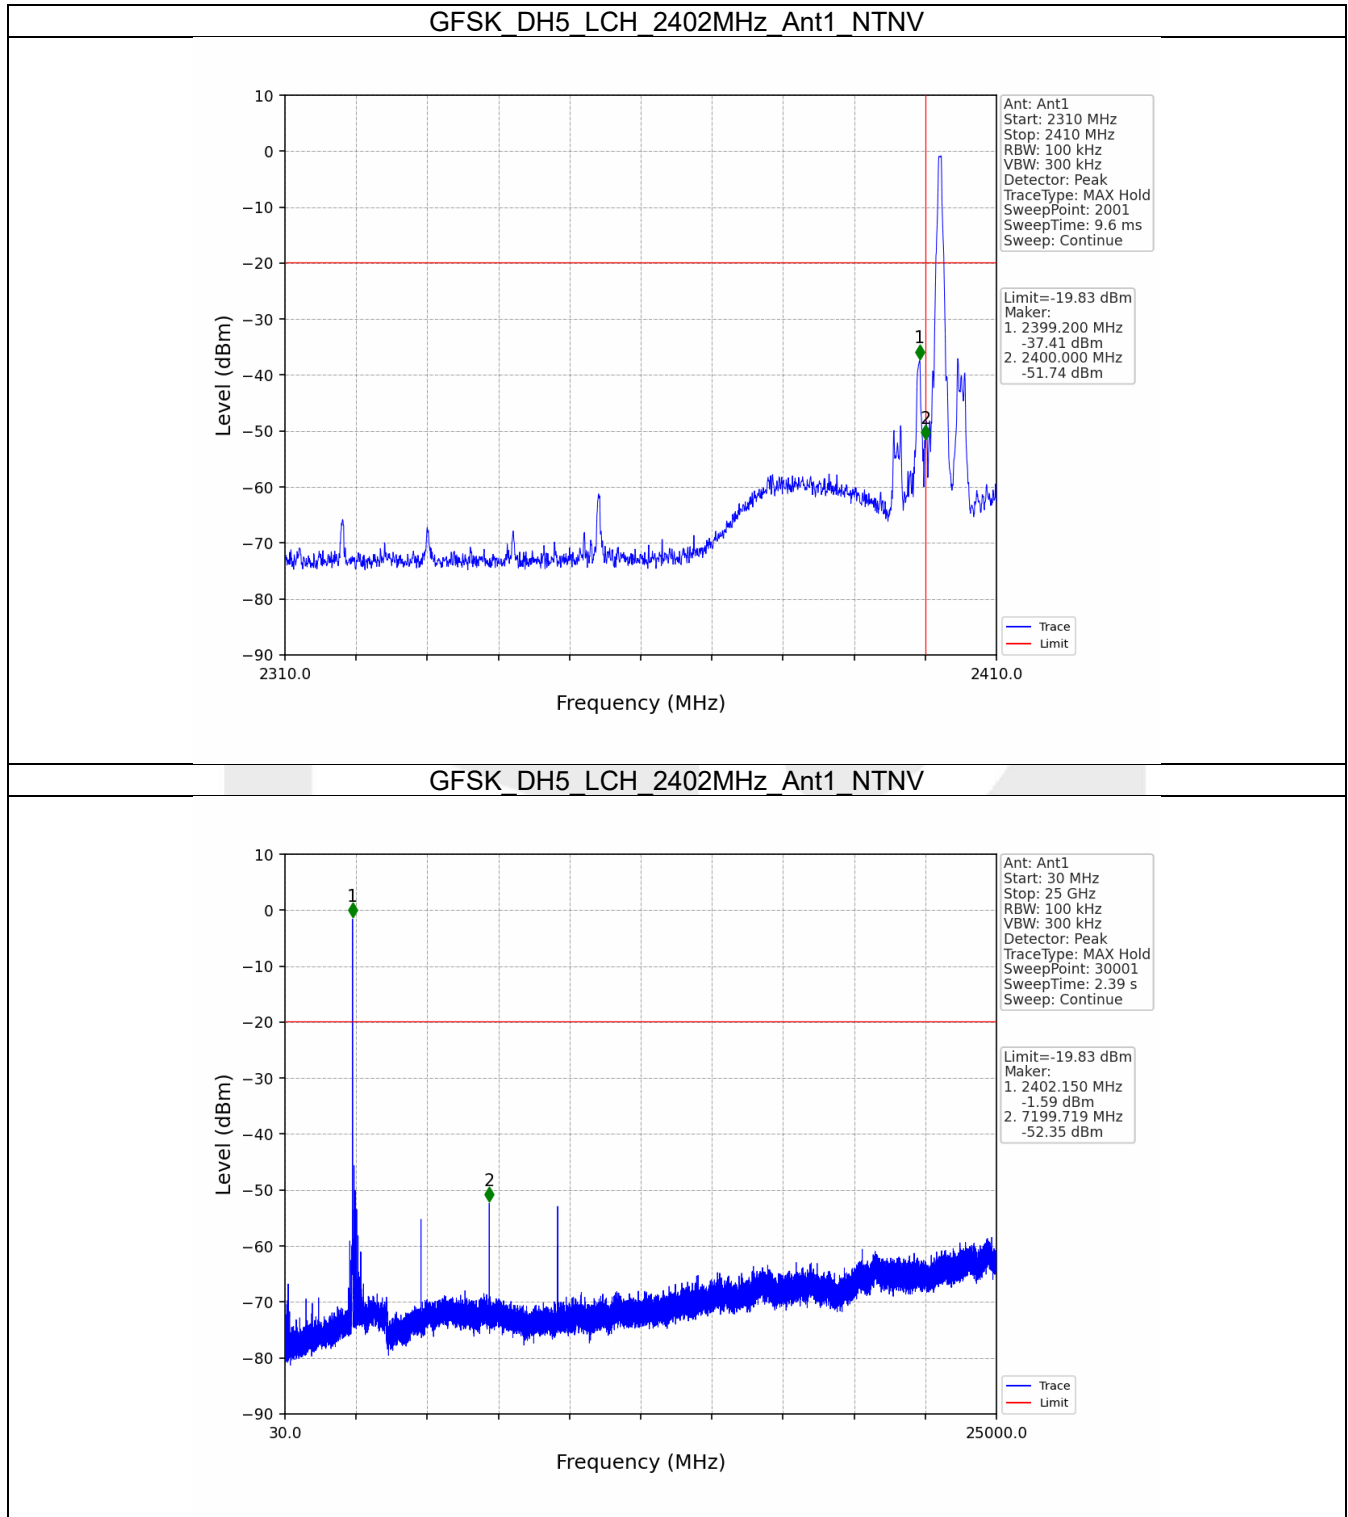


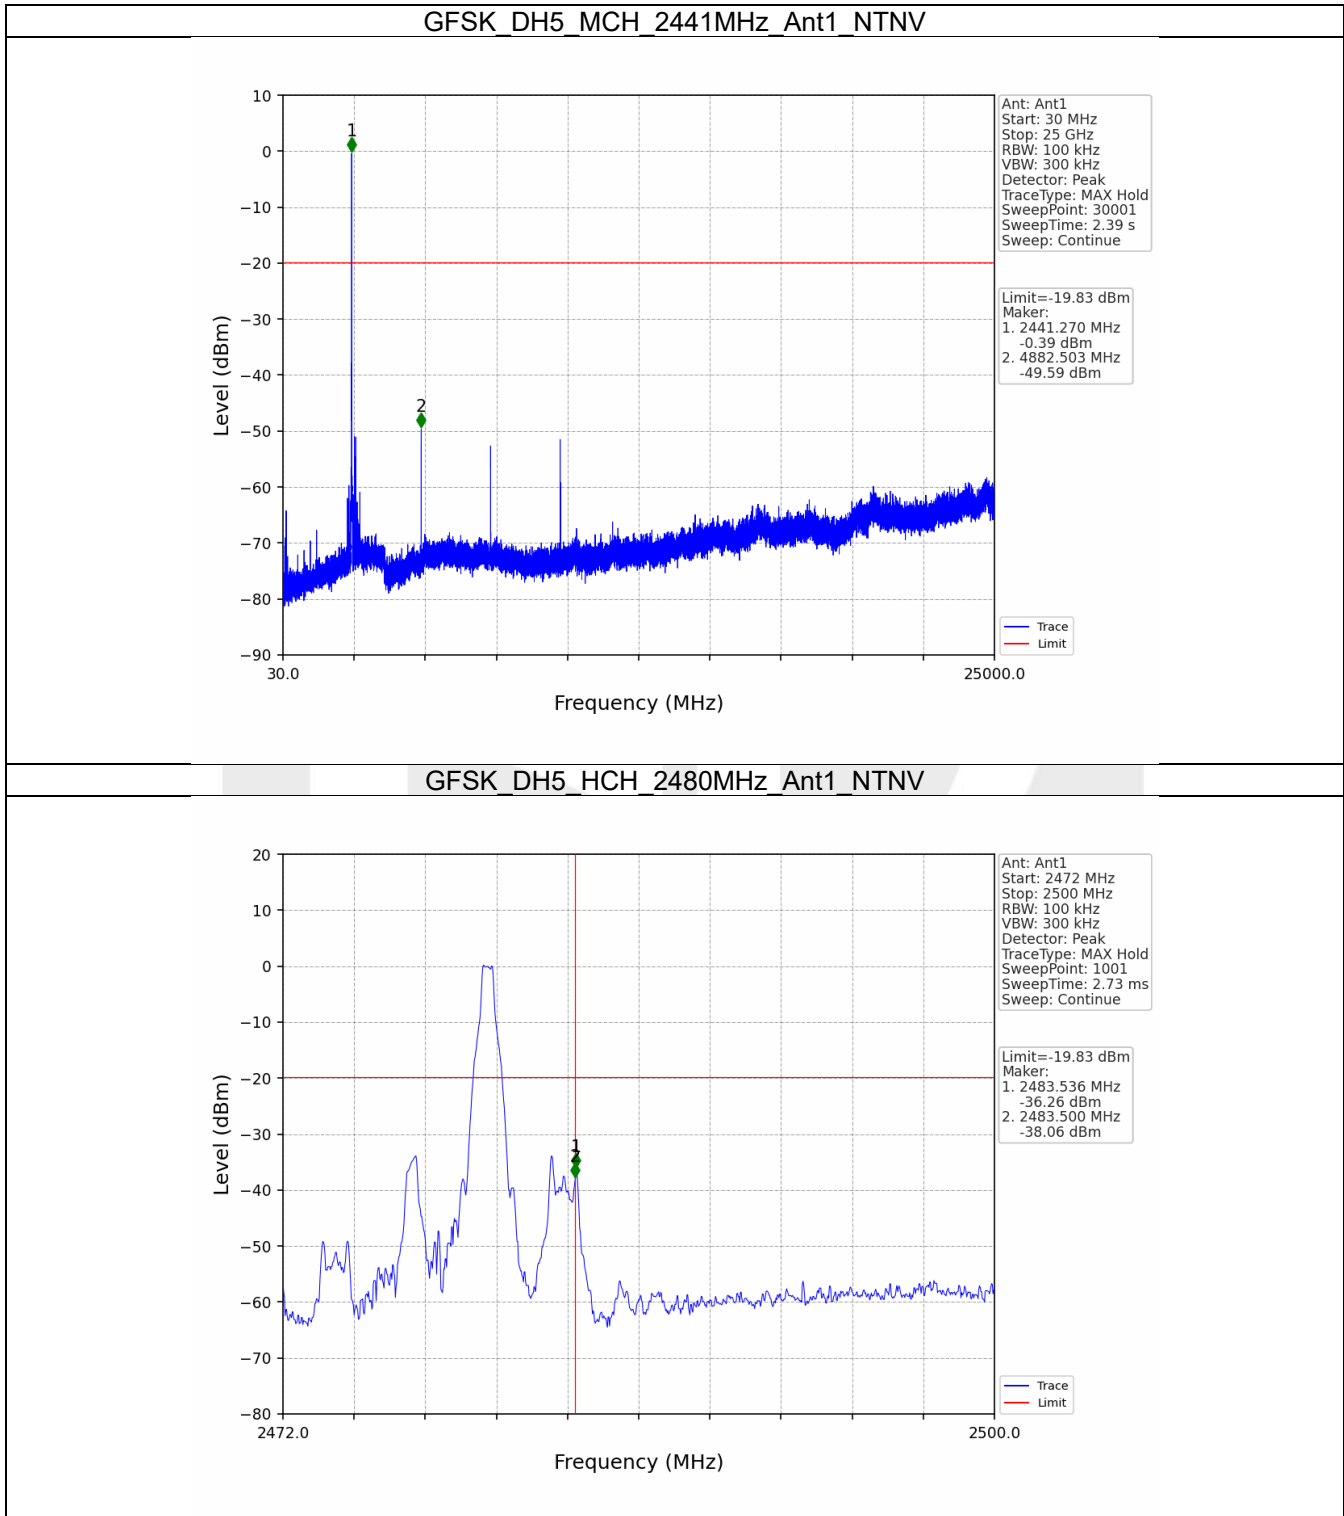


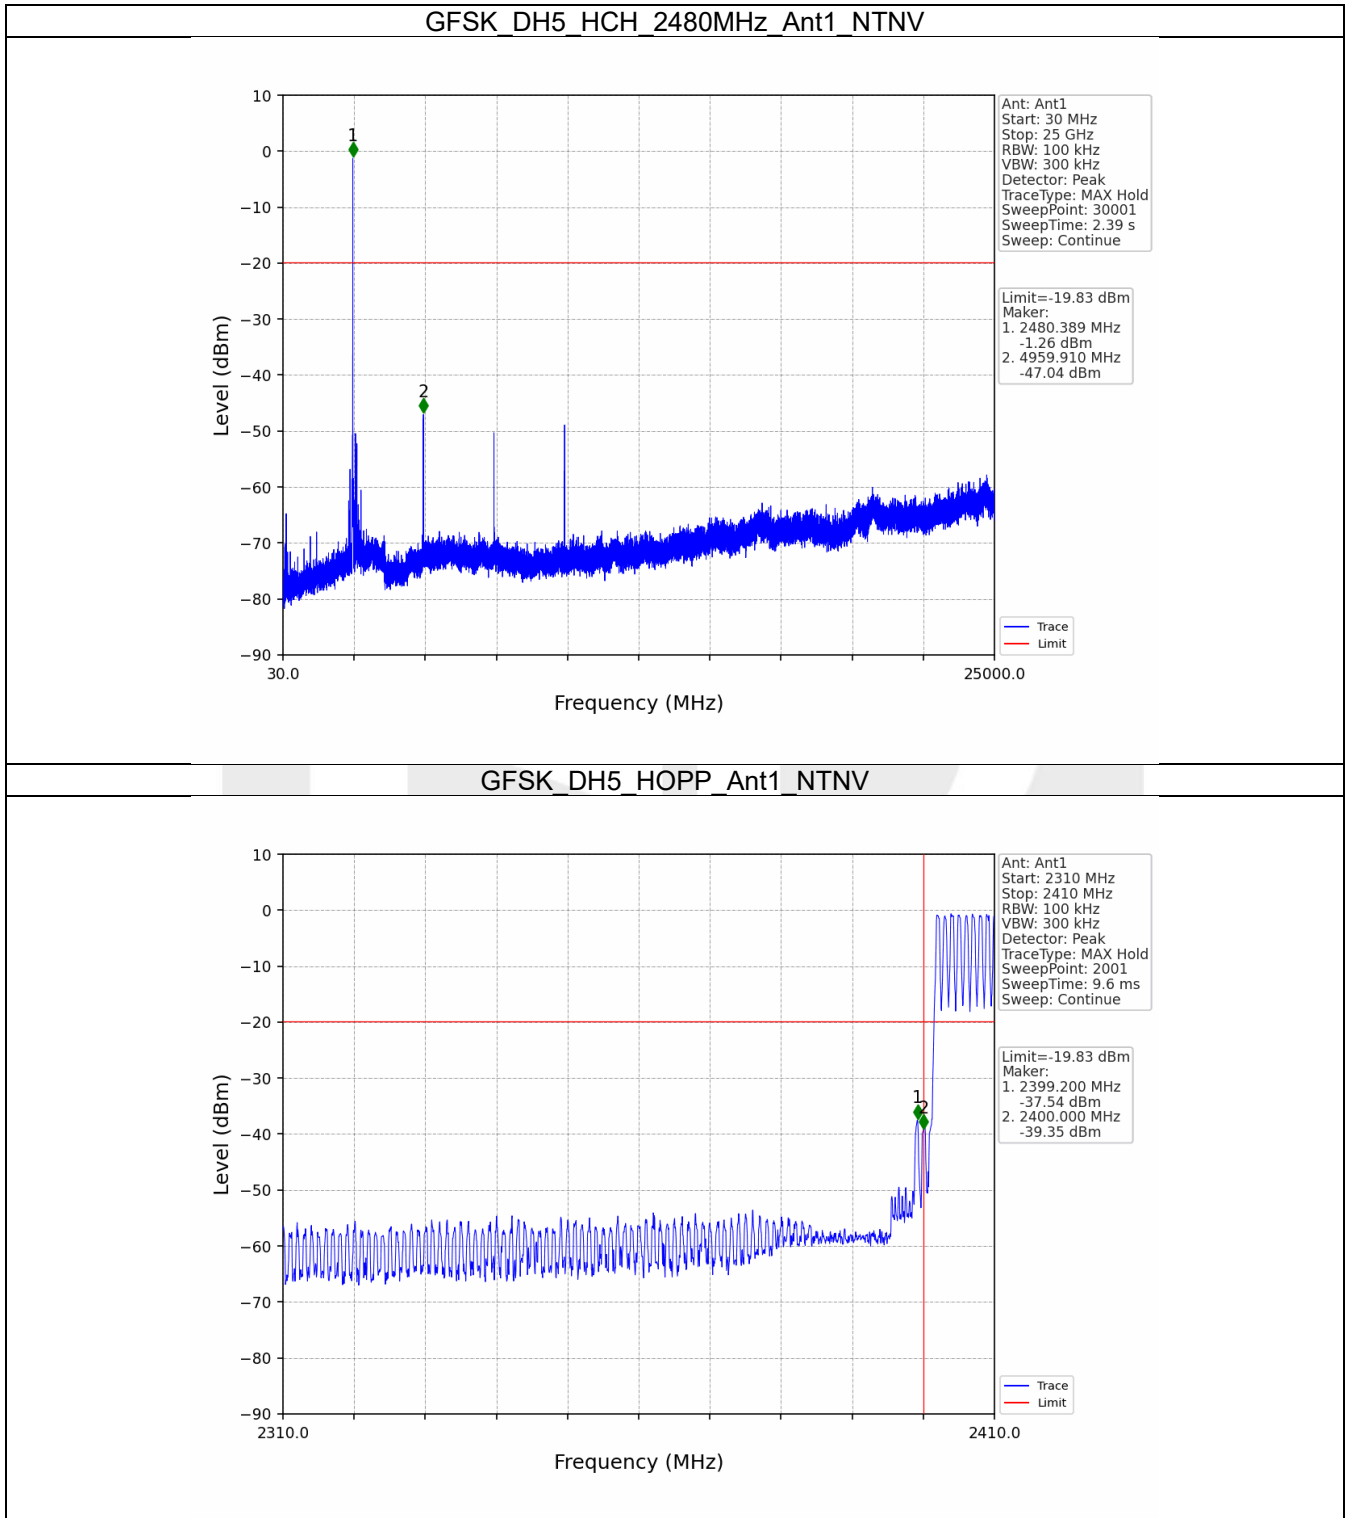

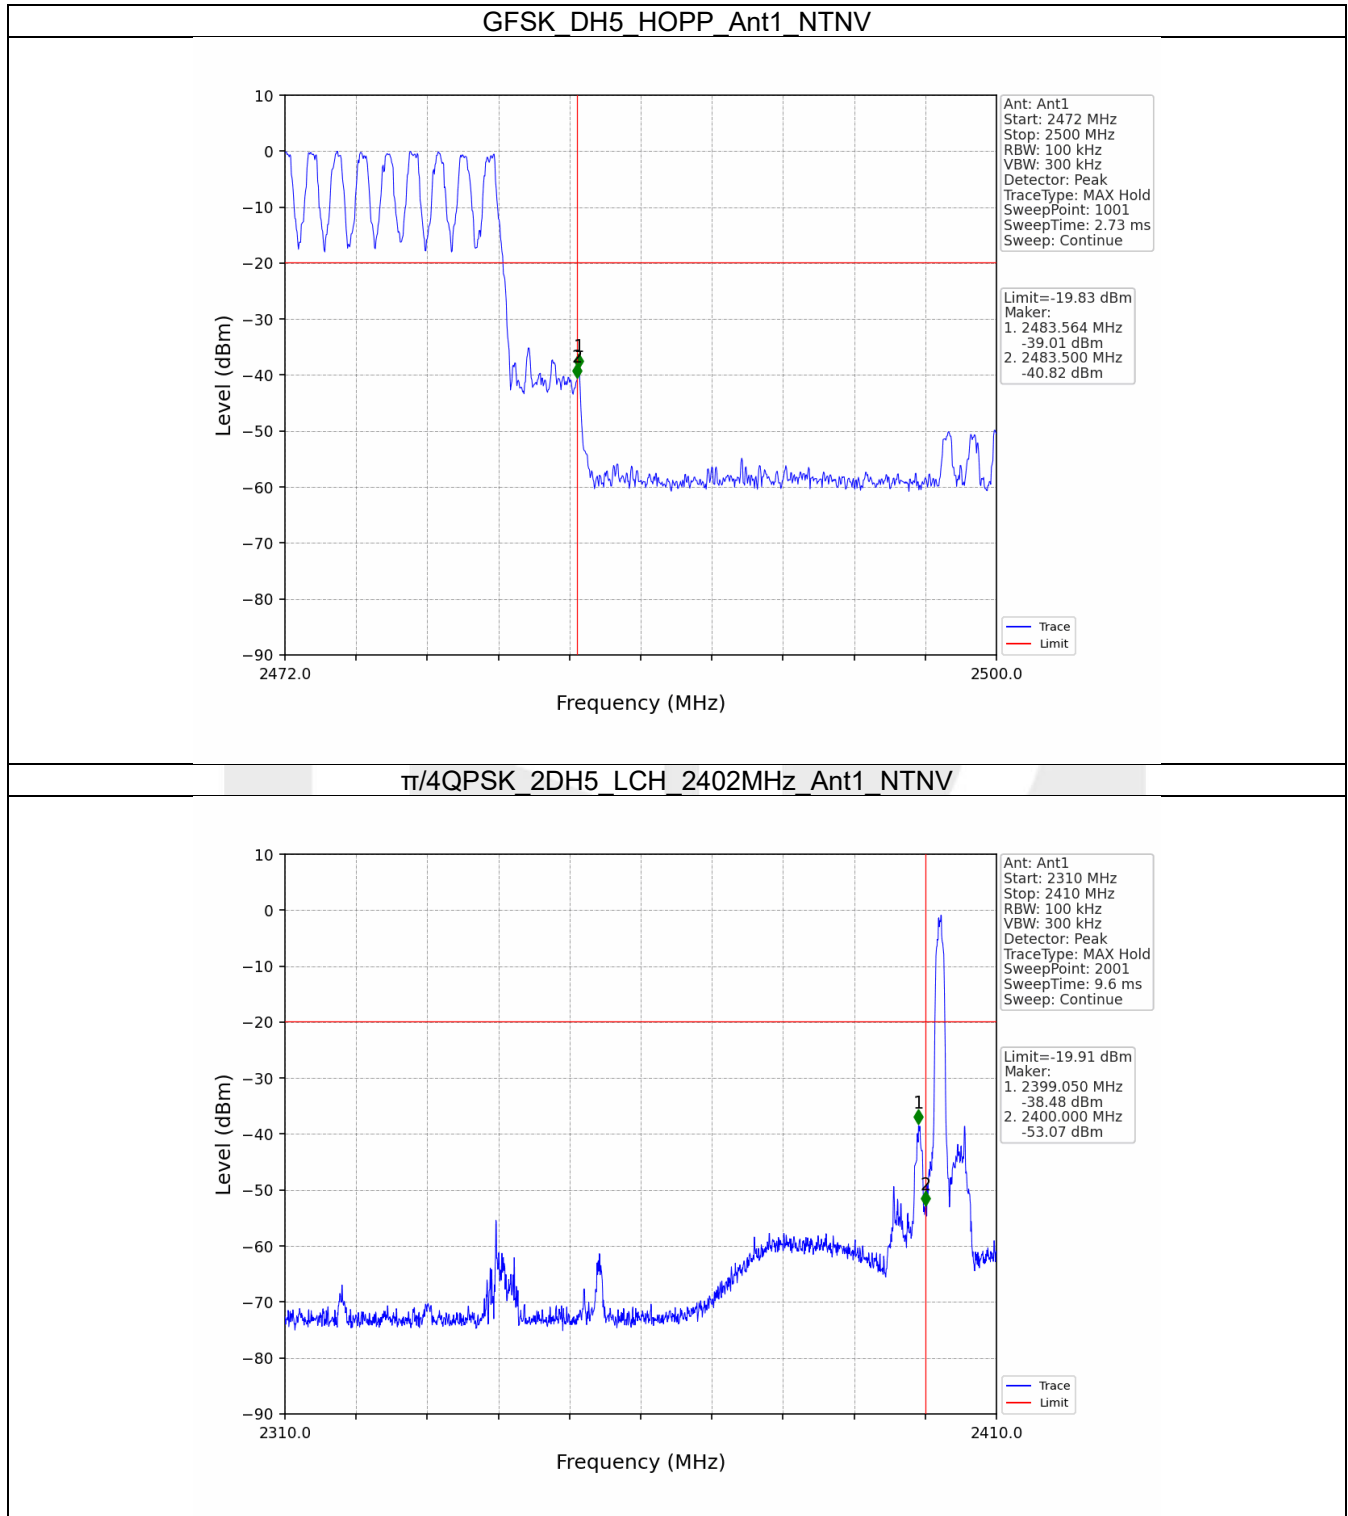

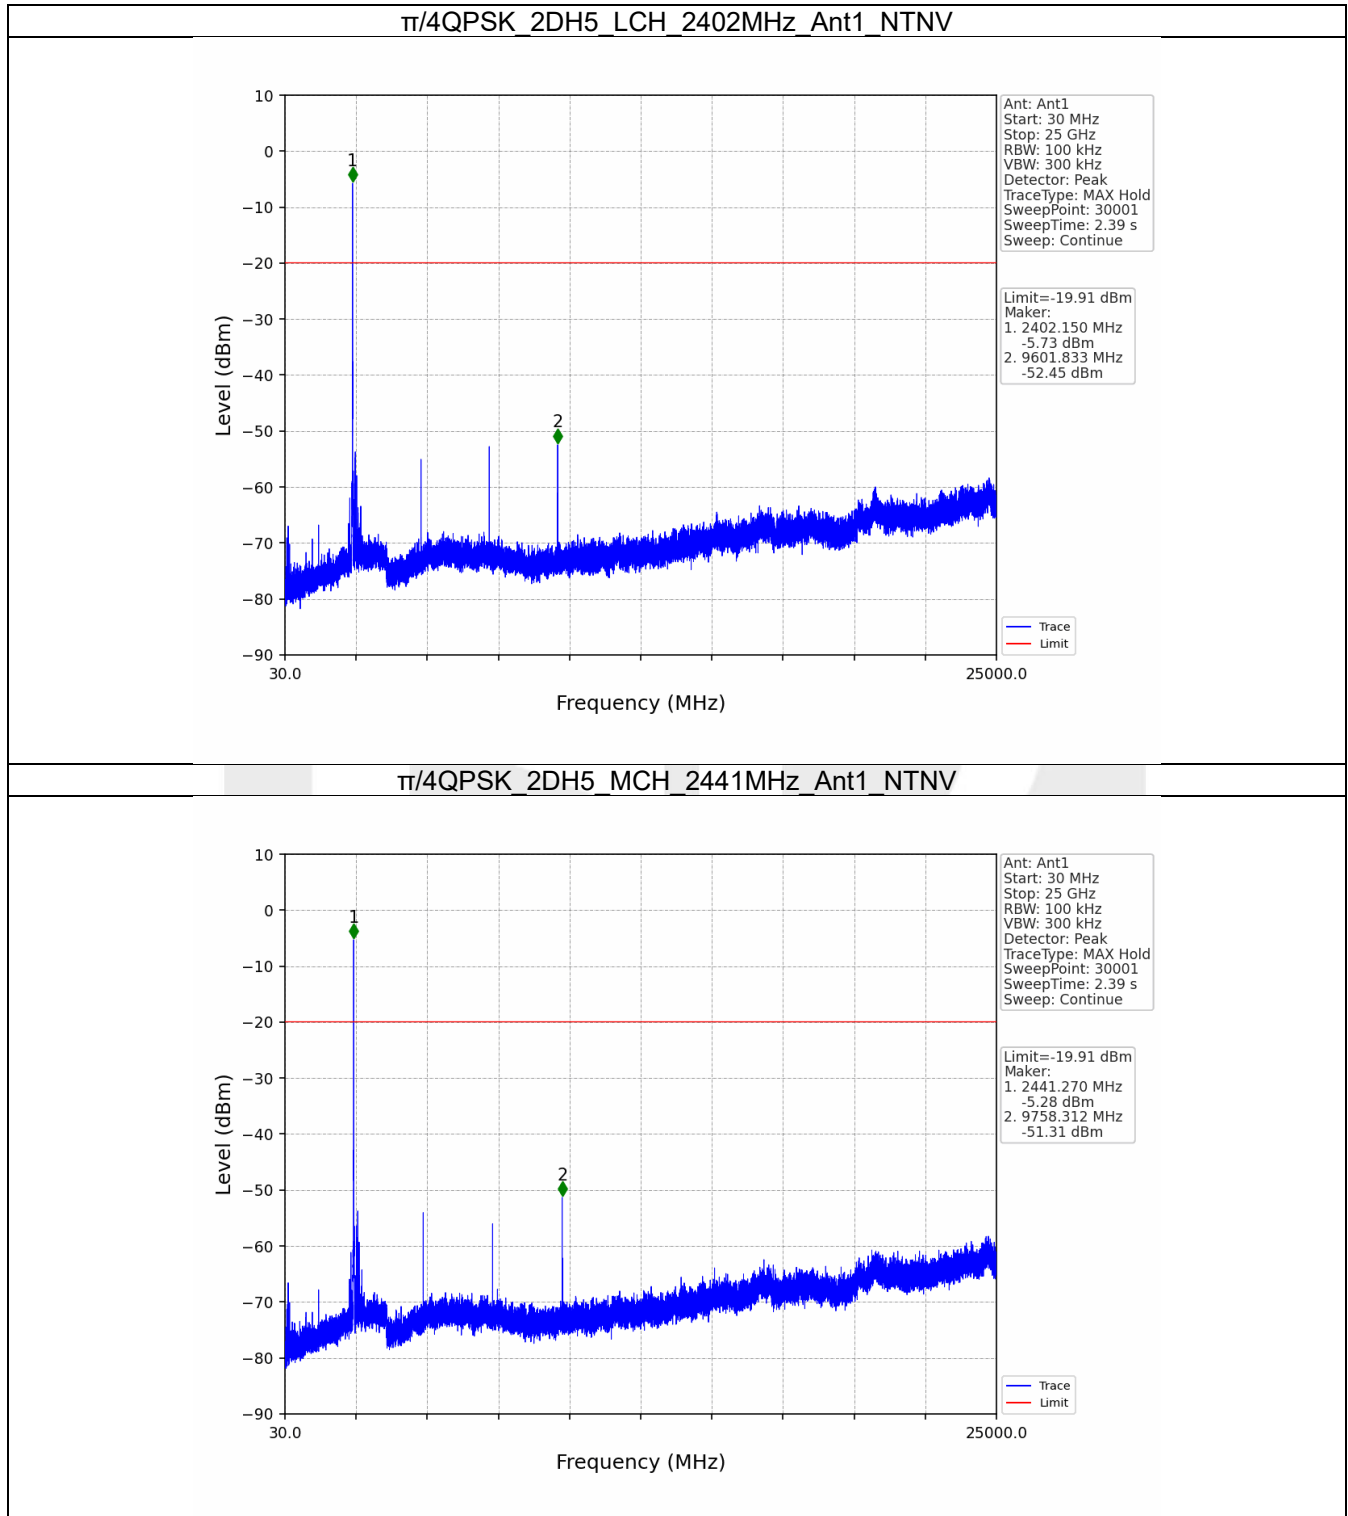

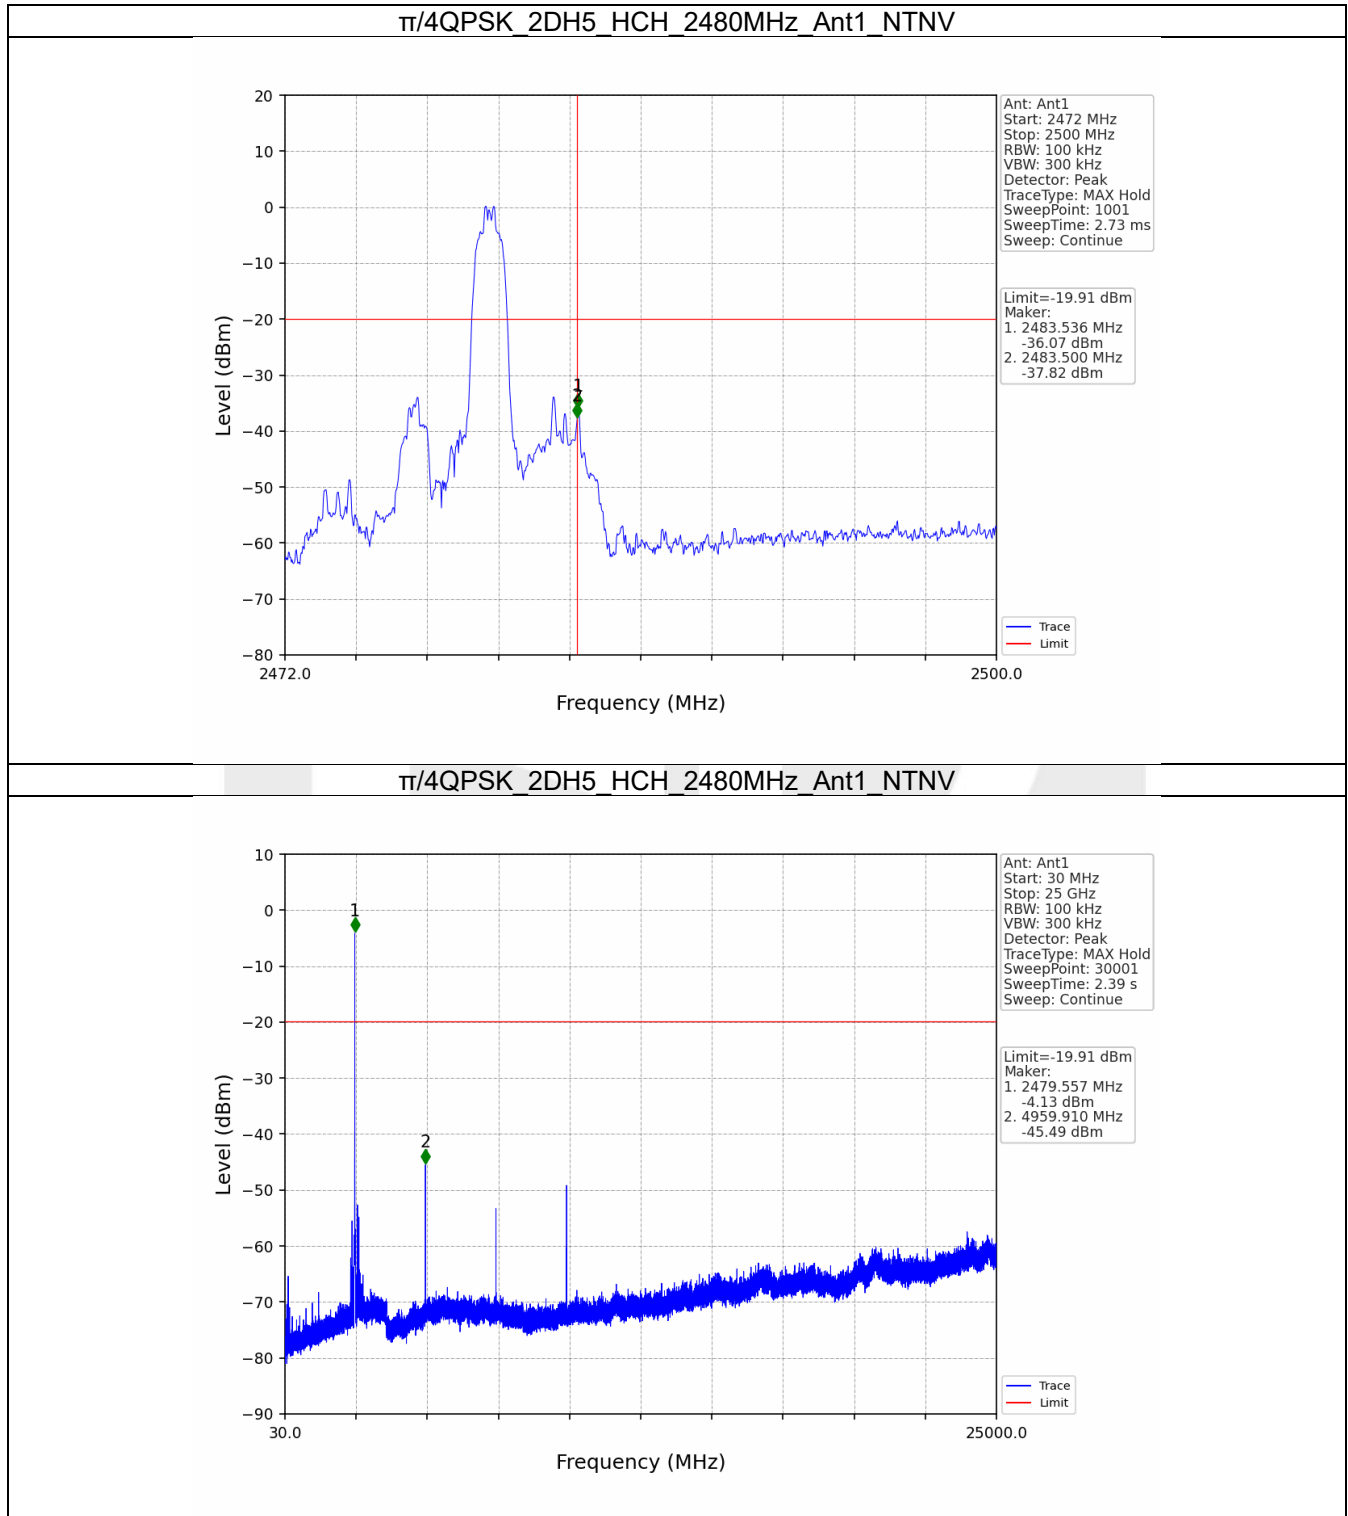

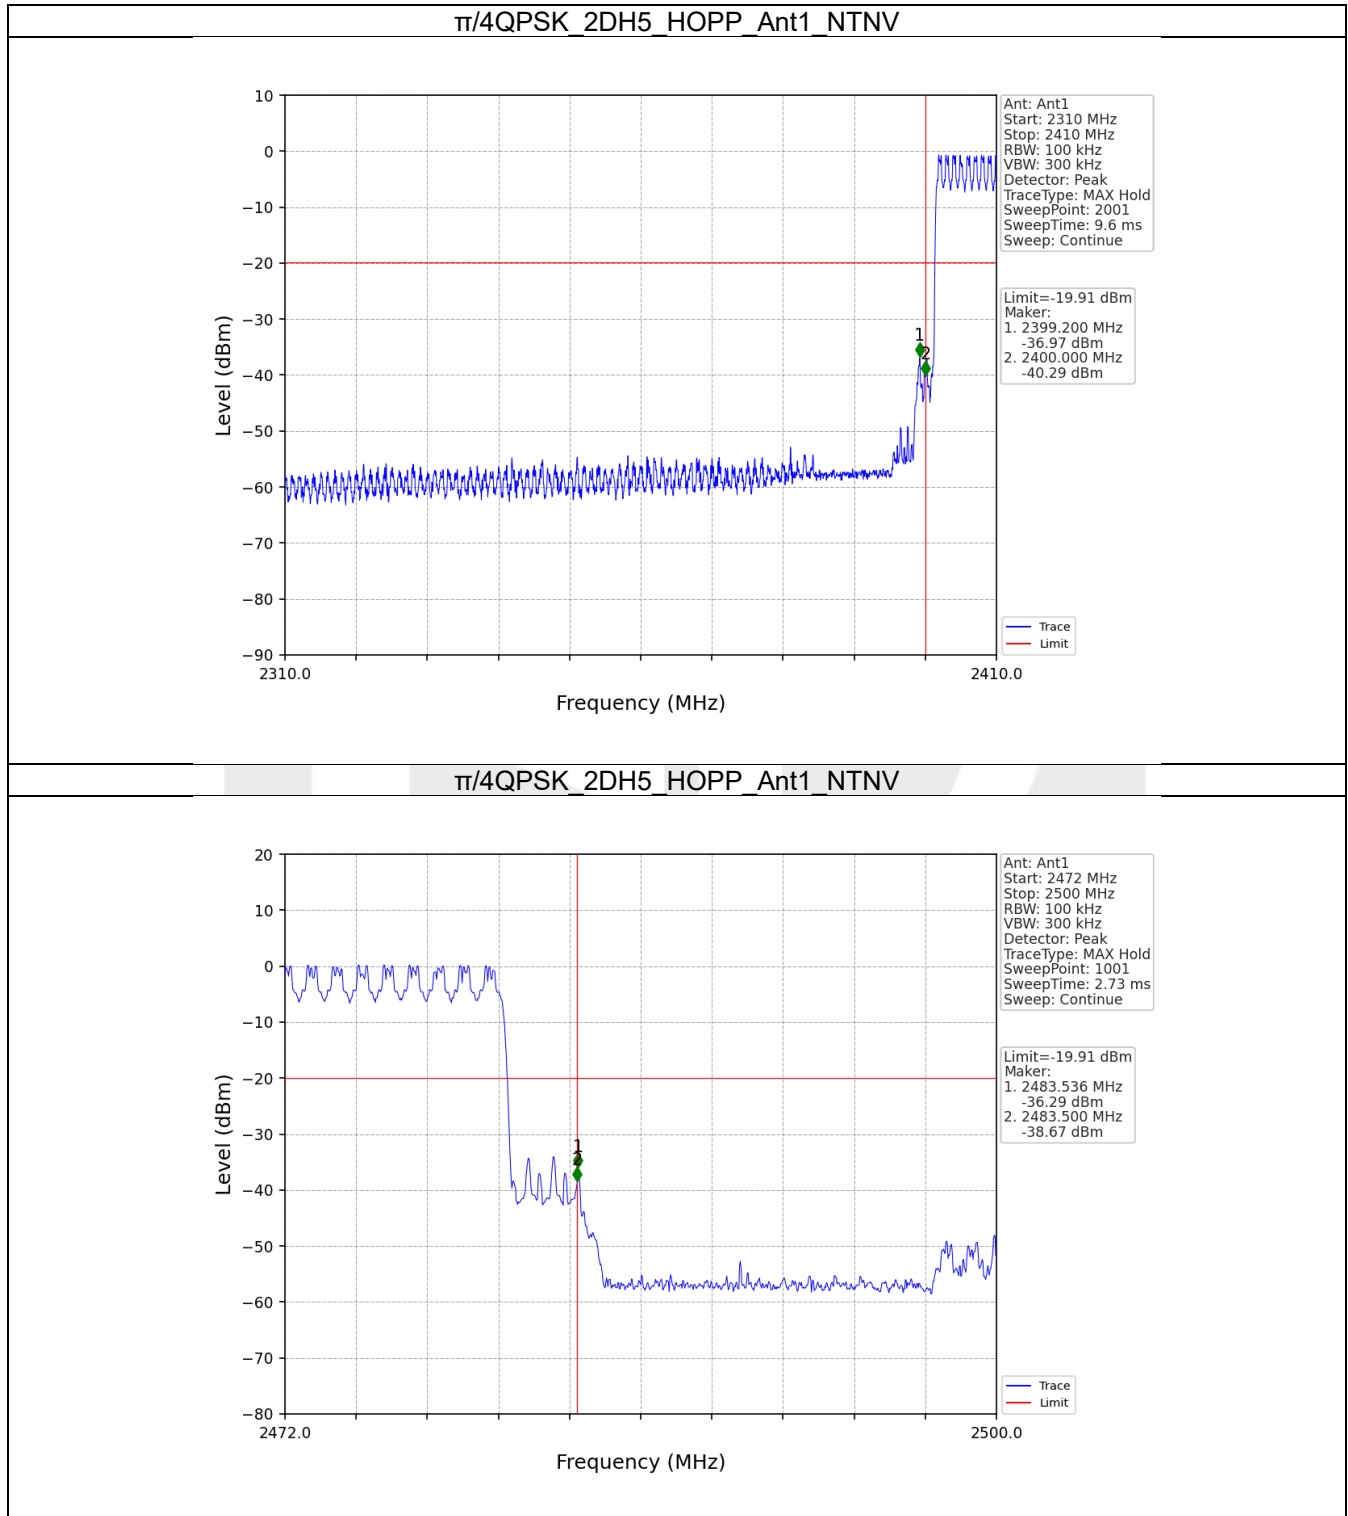

----- End of Report -----