



2DH5-Ant1-2480



3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480




10 Carrier Frequency Separation Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

10.2 Test Setup



10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data

Test Item	:	Frequency Separation	Test Mode	:	CH Low ~ CH High
Test Voltage	:	AC 120V	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	55%RH



Report No.: PTC23070308102E-FC01

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.95	≥ 0.634	PASS
2DH5	Ant1	Hop	1.128	≥ 0.900	PASS
3DH5	Ant1	Hop	1.302	≥ 0.884	PASS



DH5-Ant1-Hop



2DH5-Ant1-Hop



3DH5-Ant1-Hop




11 Number of Hopping Channel Test

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

11.2 Test Setup



11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:


1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.



11.4 Test Data

Test Item	:	Number of Hopping Frequency	Test Mode	:	CH Low ~ CH High
Test Voltage	:	AC 120V	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	55%RH


Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

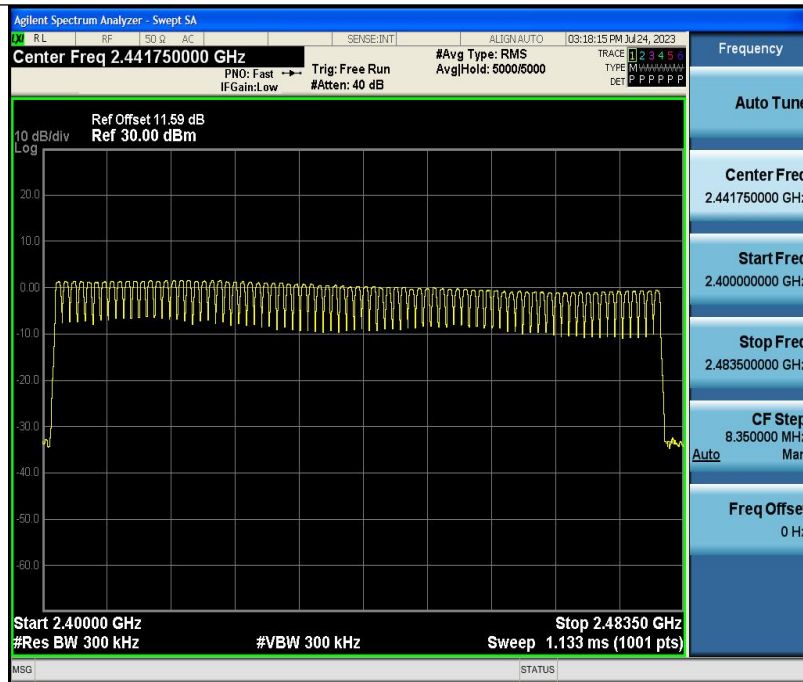

DH5-Ant1-Hop



2DH5-Ant1-Hop

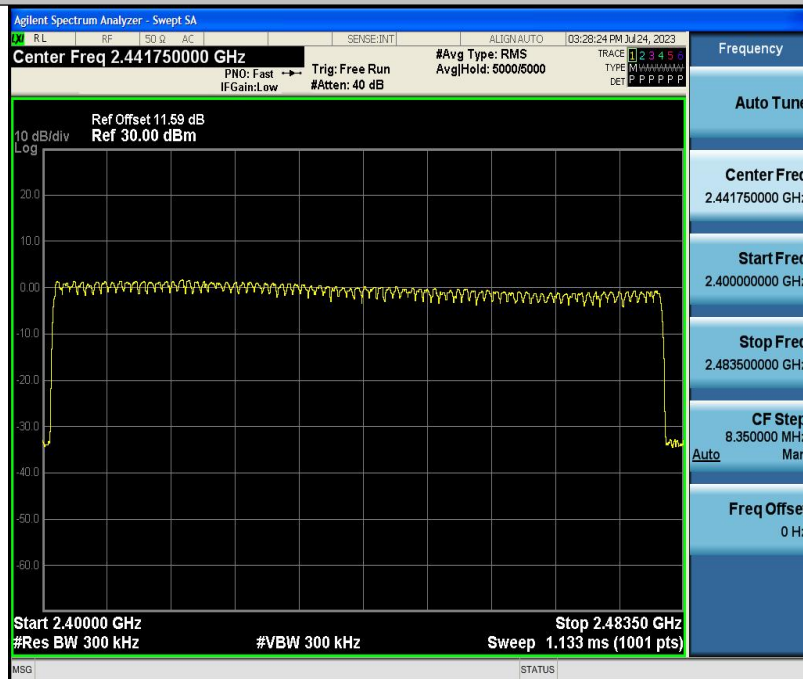

3DH5-Ant1-Hop




12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.




12.4 Test Data

Test Item	:	Time of Occupancy	Test Mode	:	CH Low ~ CH High
Test Voltage	:	AC 120V	Temperature	:	24.5℃
Test Result	:	PASS	Humidity	:	55%RH

Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.880	106.67	0.307	≤0.4	PASS
DH1	Ant1	Hop	0.376	320	0.12	≤0.4	PASS
DH3	Ant1	Hop	1.631	160	0.261	≤0.4	PASS
2DH5	Ant1	Hop	2.887	106.67	0.308	≤0.4	PASS
2DH1	Ant1	Hop	0.388	320	0.124	≤0.4	PASS
2DH3	Ant1	Hop	1.640	160	0.262	≤0.4	PASS
3DH5	Ant1	Hop	2.889	106.67	0.308	≤0.4	PASS
3DH1	Ant1	Hop	0.388	320	0.124	≤0.4	PASS
3DH3	Ant1	Hop	1.639	160	0.262	≤0.4	PASS

Note:


- 1.DH1/2DH1 Dwell Time: Reading * (1600/2)*31.6/(channel number).
- 2.DH3/2DH3 Dwell Time: Reading * (1600/4)*31.6/(channel number).
- 3.DH5/2DH5 Dwell Time: Reading * (1600/6)*31.6/(channel number).

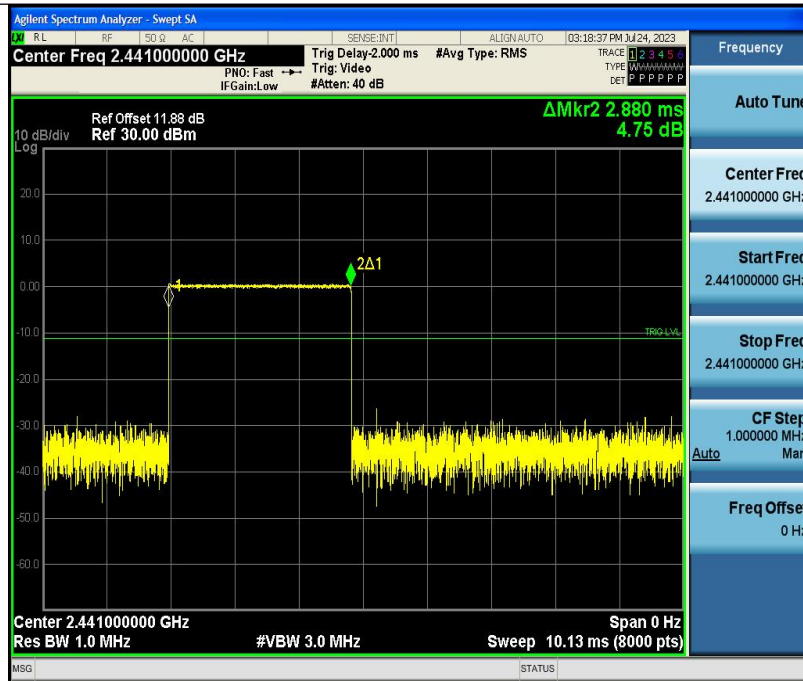


DH5-Ant1-Hop




DH1-Ant1-Hop

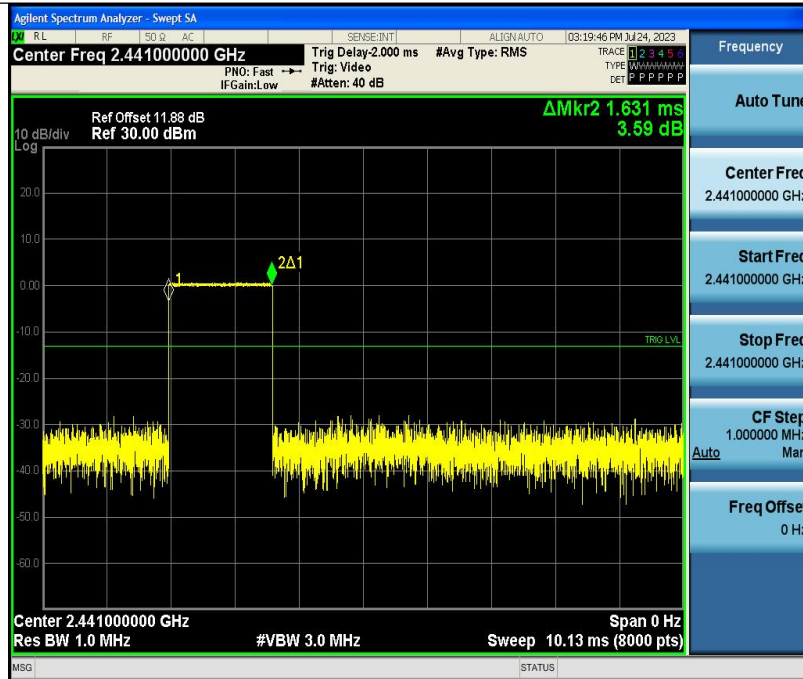

DH3-Ant1-Hop

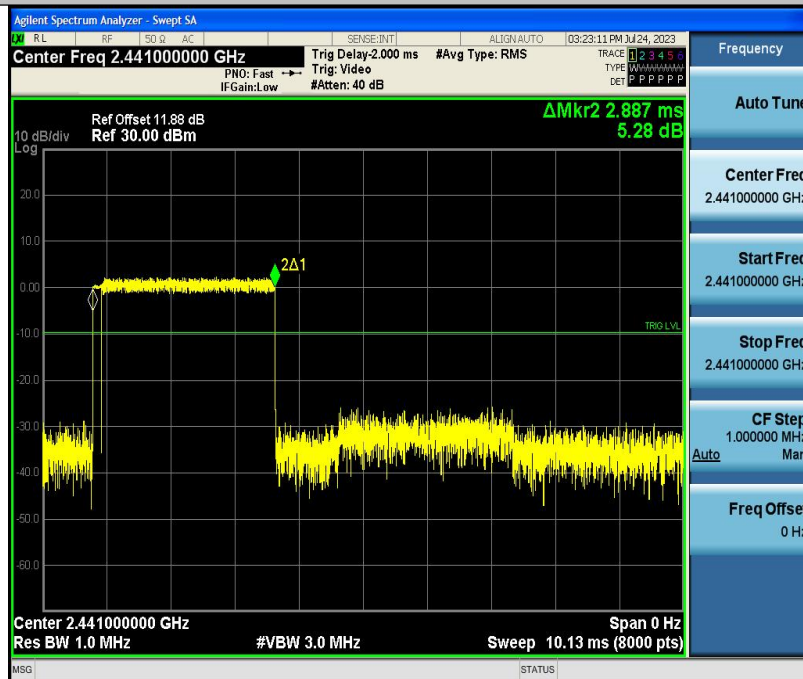


2DH5-Ant1-Hop

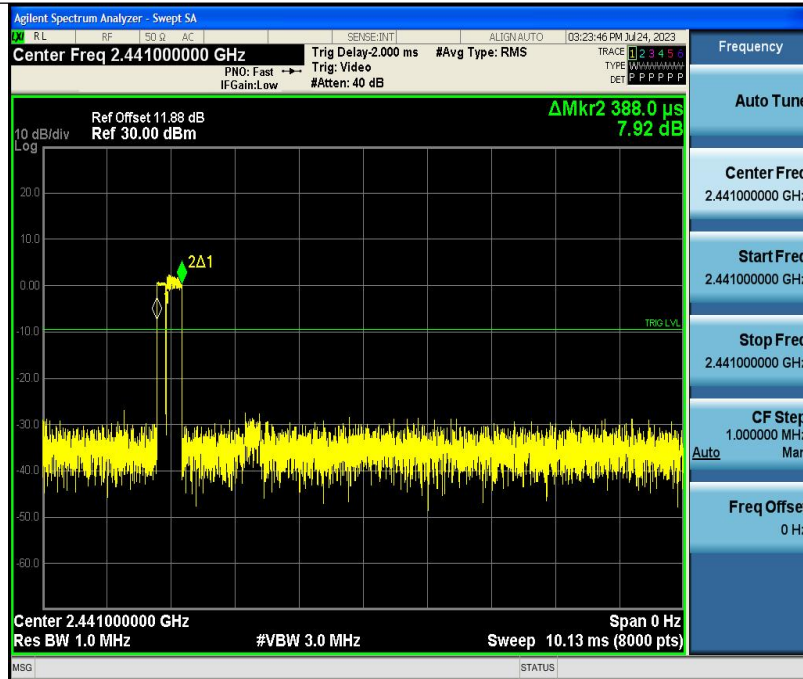


2DH1-Ant1-Hop




2DH3-Ant1-Hop

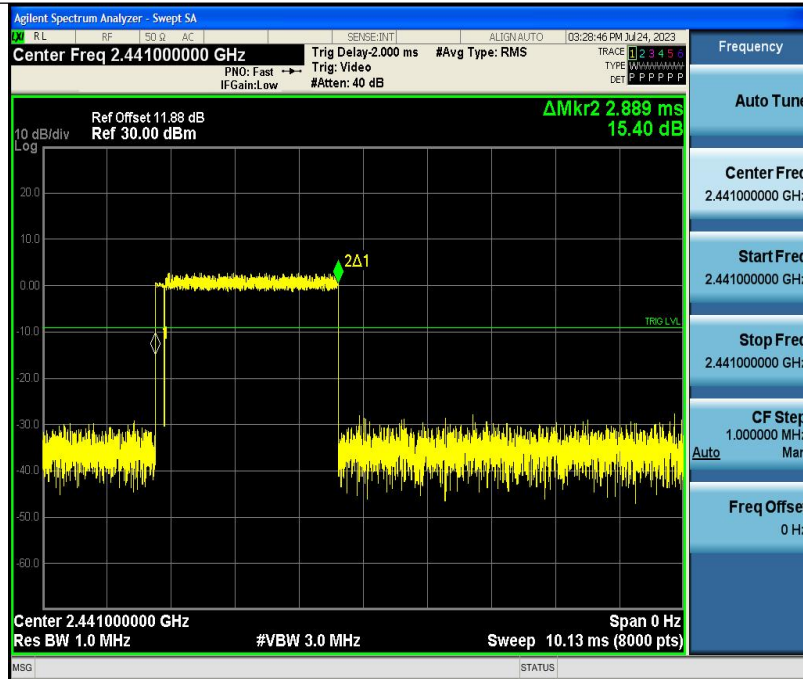

3DH5-Ant1-Hop

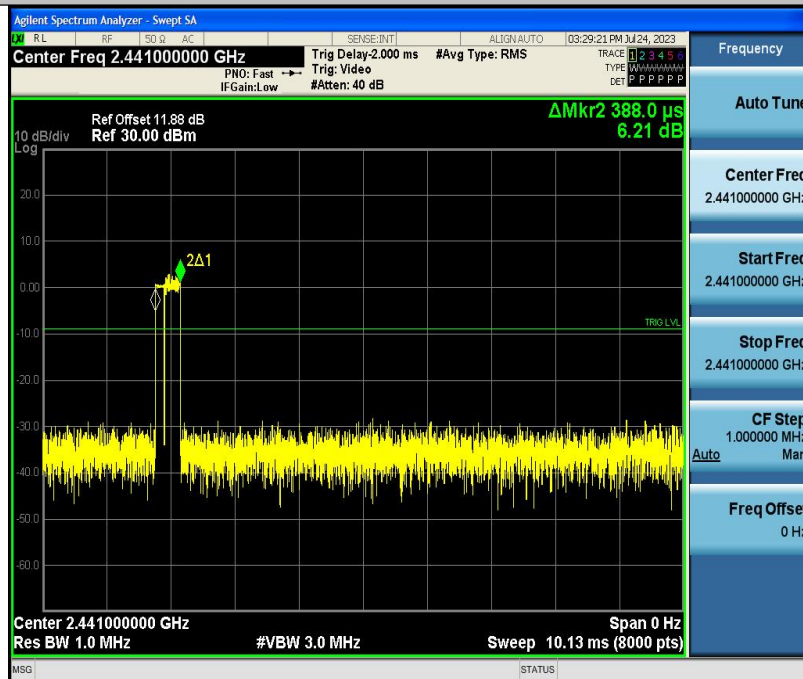

3DH1-Ant1-Hop

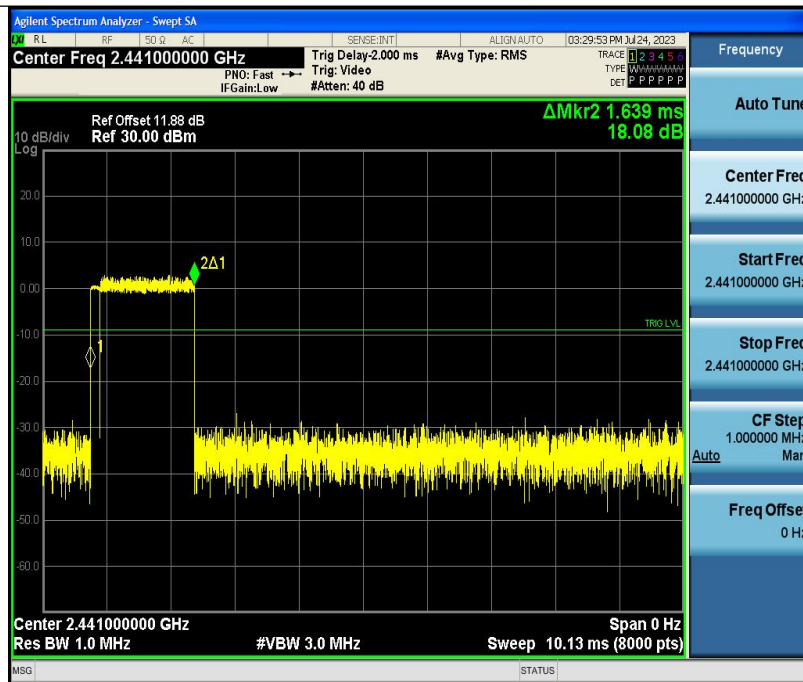


3DH3-Ant1-Hop

13 100kHz Bandwidth of Frequency Band Edge Requirement

13.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

13.2 Test Setup



13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:


1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.




13.4 Test Data

Test Item	:	Band edge	Test Mode	:	CH Low ~ CH High
Test Voltage	:	AC 120V	Temperature	:	24.5℃
Test Result	:	PASS	Humidity	:	55%RH


Test Mode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	1.31	-46.52	≤-18.69	PASS
DH5	Ant1	High	2480	-0.76	-46.2	≤-20.76	PASS
2DH5	Ant1	Low	2402	1.51	-46.57	≤-18.49	PASS
2DH5	Ant1	High	2480	-0.64	-46.34	≤-20.64	PASS
3DH5	Ant1	Low	2402	1.35	-46.47	≤-18.66	PASS
3DH5	Ant1	High	2480	-1.33	-46.85	≤-21.33	PASS
DH5	Ant1	Low	Hop_2402	0.75	-46.72	≤-19.25	PASS
DH5	Ant1	High	Hop_2480	-0.81	-45.16	≤-20.81	PASS
2DH5	Ant1	Low	Hop_2402	-0.86	-47.01	≤-20.86	PASS
2DH5	Ant1	High	Hop_2480	-2.48	-45.44	≤-22.48	PASS
3DH5	Ant1	Low	Hop_2402	-1.70	-46.78	≤-21.7	PASS
3DH5	Ant1	High	Hop_2480	-1.03	-45.67	≤-21.03	PASS

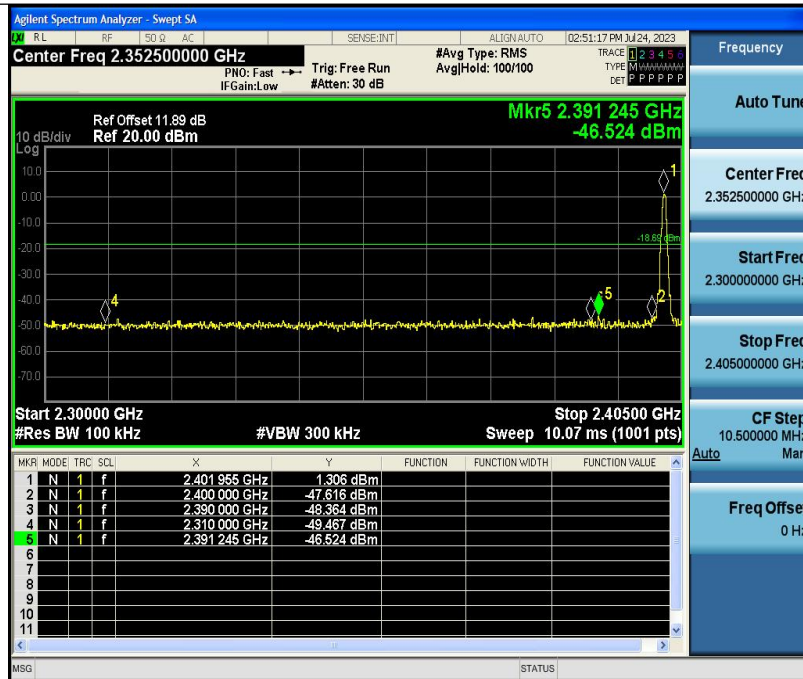


DH5-Ant1-2402

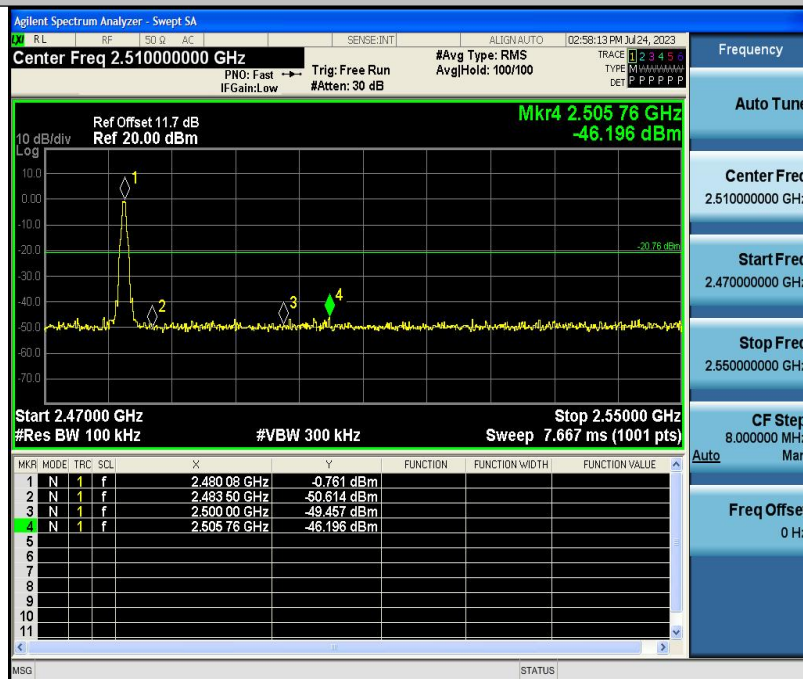


DH5-Ant1-2480

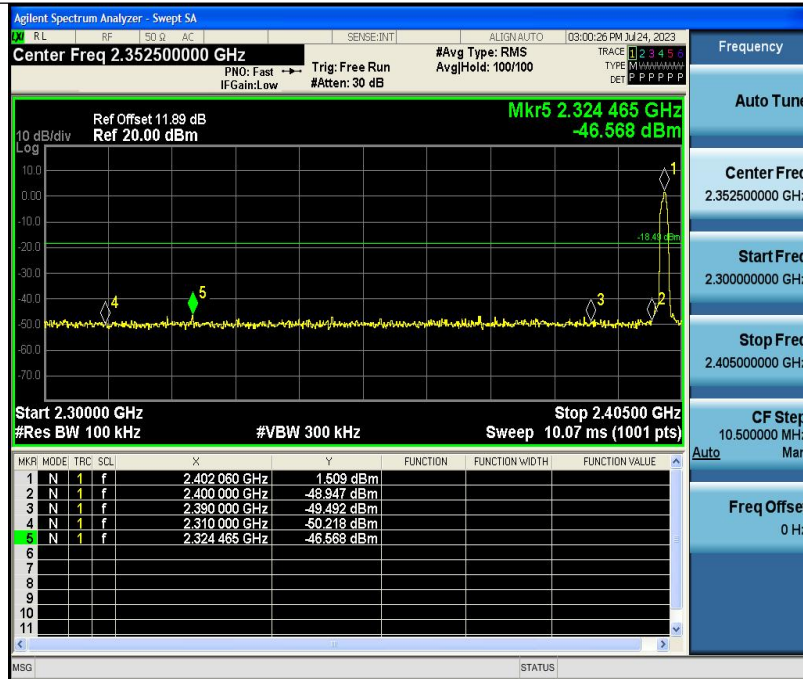


2DH5-Ant1-2402

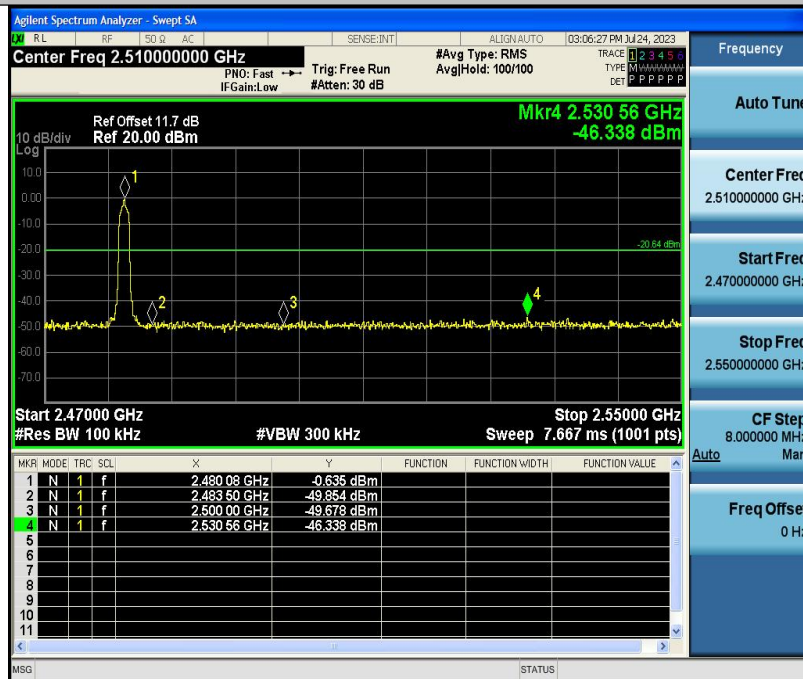


2DH5-Ant1-2480

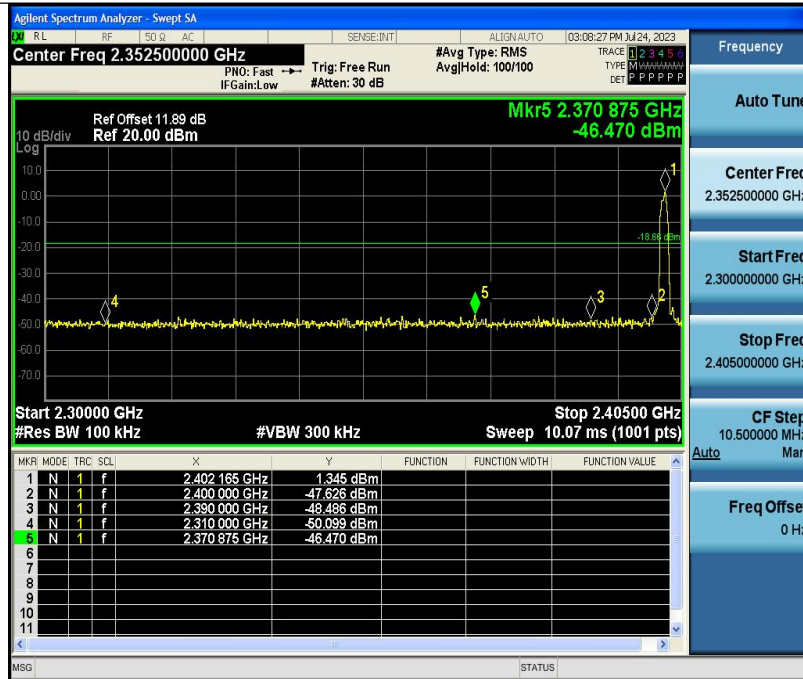


3DH5-Ant1-2402

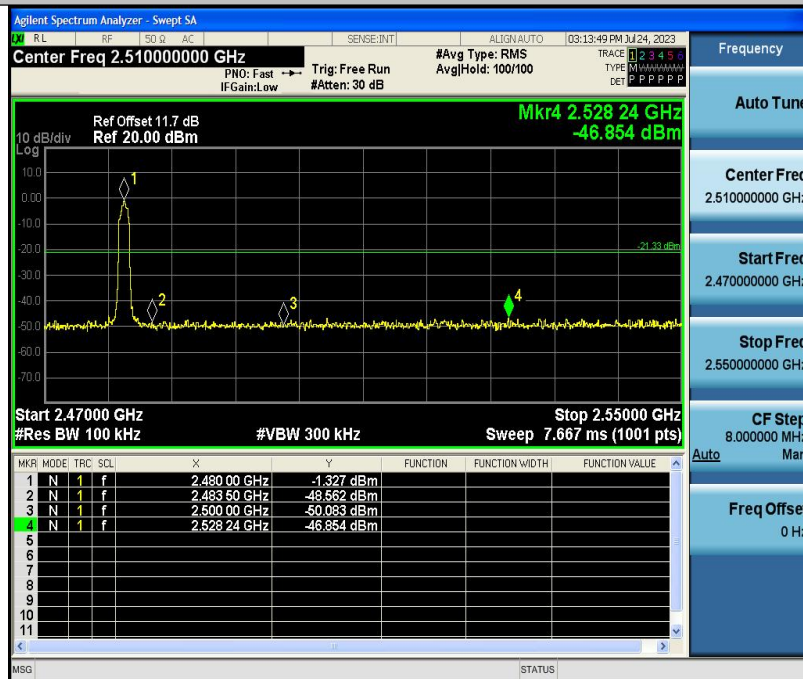


3DH5-Ant1-2480

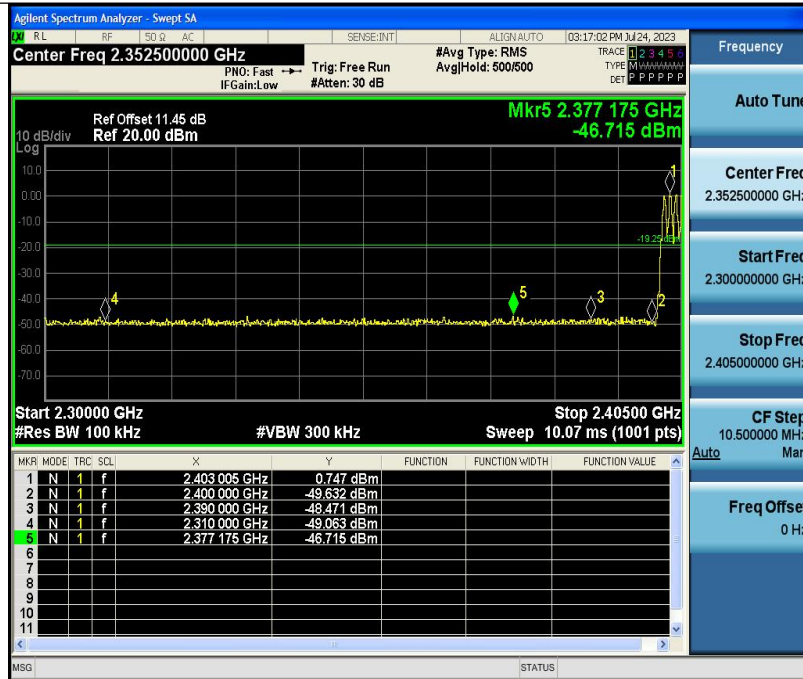


DH5-Ant1-Hop_2402

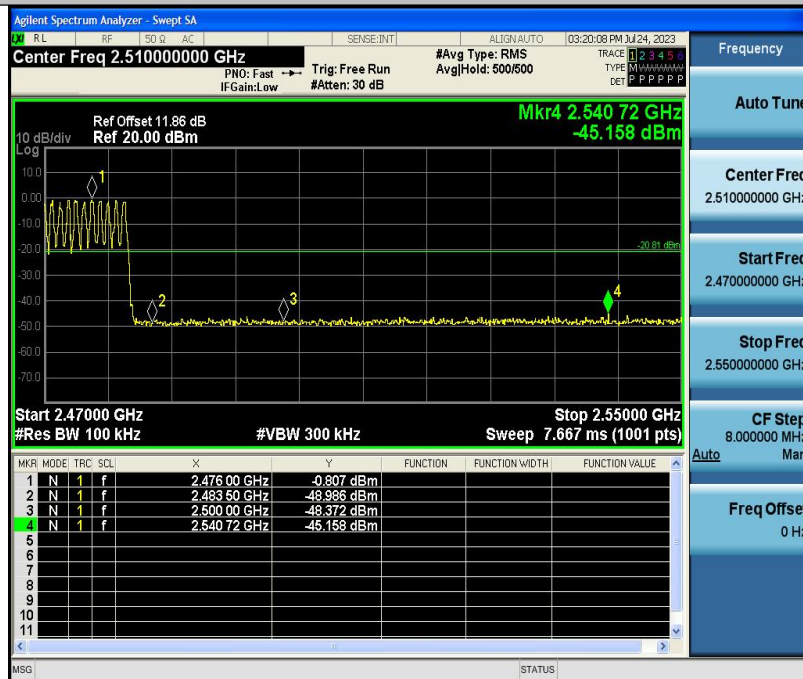


DH5-Ant1-Hop_2480

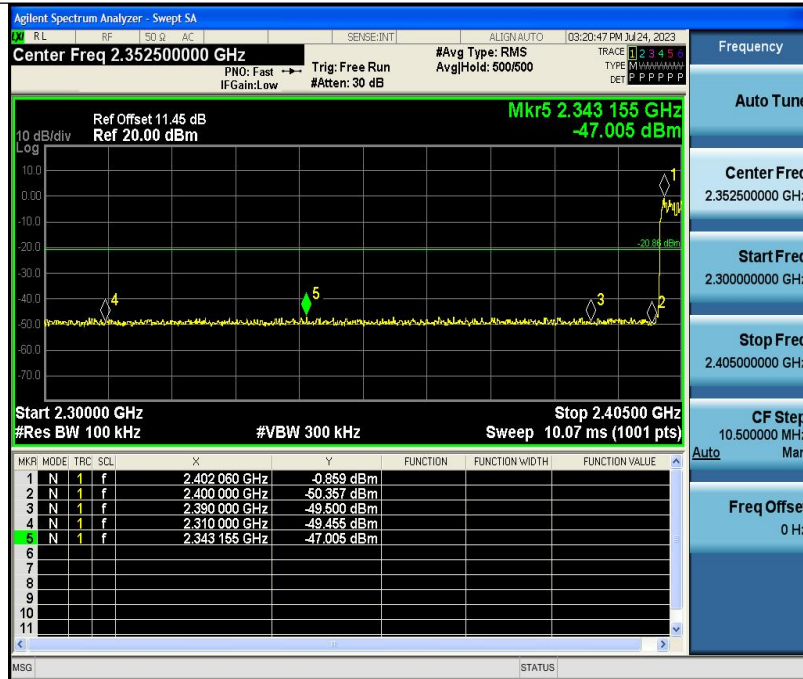


2DH5-Ant1-Hop_2402

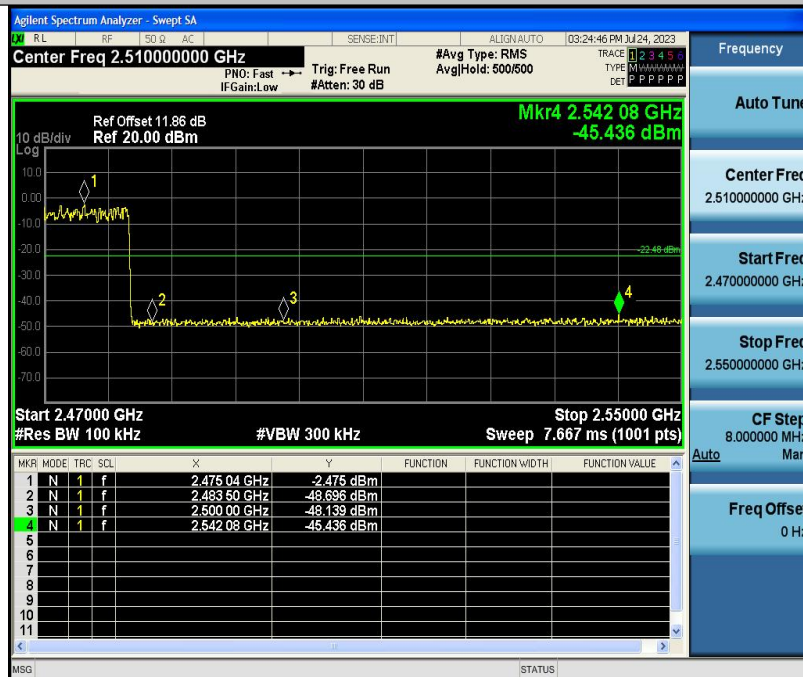

2DH5-Ant1-Hop_2480

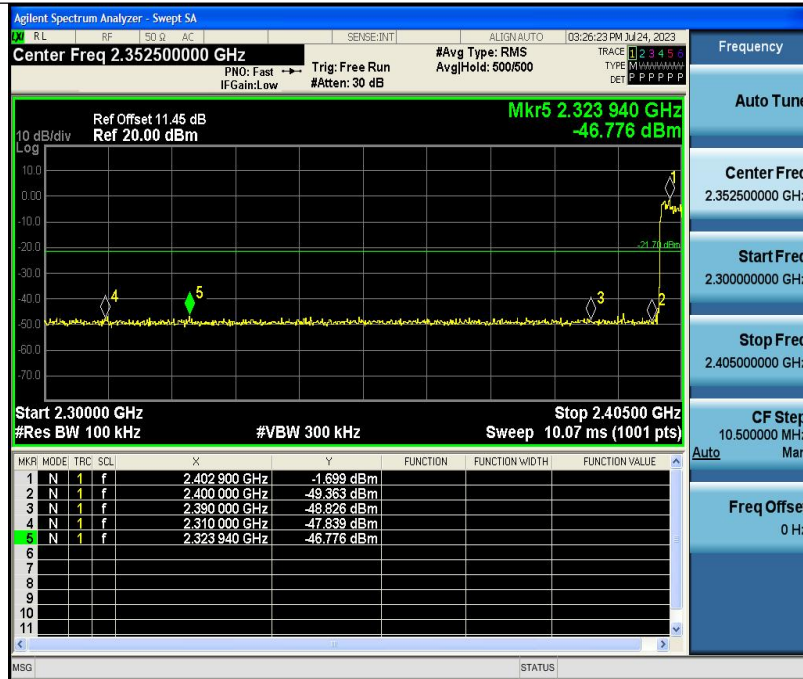

3DH5-Ant1-Hop_2402

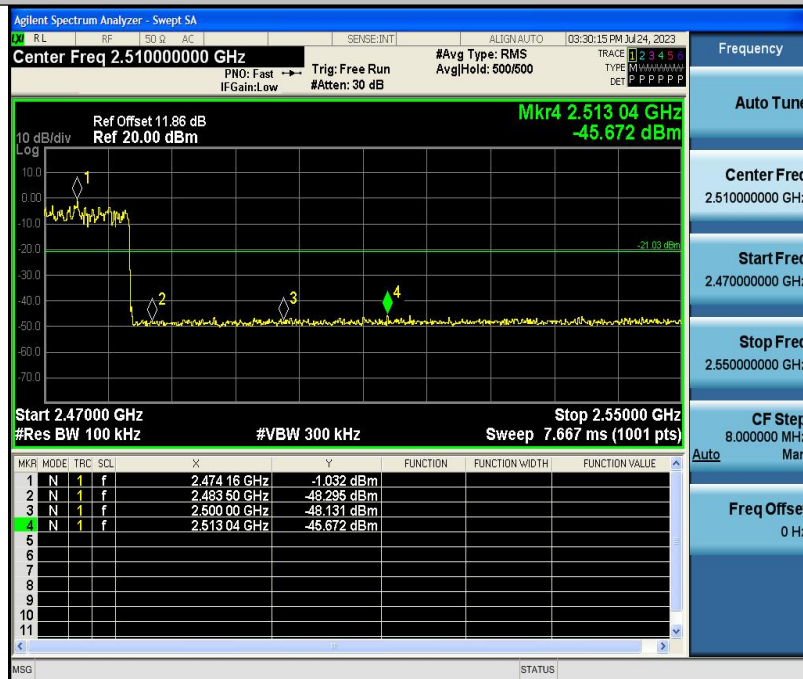

3DH5-Ant1-Hop_2480




Conducted Emission Method

Test Result


Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	0.59	0.59	---	PASS
DH5	Ant1	2402	30~1000	0.59	-50.55	≤-19.41	PASS
DH5	Ant1	2402	1000~26500	0.59	-40.29	≤-19.41	PASS
DH5	Ant1	2441	0~Reference	-0.43	-0.43	---	PASS
DH5	Ant1	2441	30~1000	-0.43	-50.15	≤-20.43	PASS
DH5	Ant1	2441	1000~26500	-0.43	-40.17	≤-20.43	PASS
DH5	Ant1	2480	0~Reference	-1.28	-1.28	---	PASS
DH5	Ant1	2480	30~1000	-1.28	-50.4	≤-21.28	PASS
DH5	Ant1	2480	1000~26500	-1.28	-39.44	≤-21.28	PASS
2DH5	Ant1	2402	0~Reference	-0.64	-0.64	---	PASS
2DH5	Ant1	2402	30~1000	-0.64	-53.91	≤-20.64	PASS
2DH5	Ant1	2402	1000~26500	-0.64	-40.15	≤-20.64	PASS
2DH5	Ant1	2441	0~Reference	-0.62	-0.62	---	PASS
2DH5	Ant1	2441	30~1000	-0.62	-52.98	≤-20.62	PASS
2DH5	Ant1	2441	1000~26500	-0.62	-39.67	≤-20.62	PASS
2DH5	Ant1	2480	0~Reference	-3.30	-3.30	---	PASS
2DH5	Ant1	2480	30~1000	-3.30	-53.09	≤-23.3	PASS
2DH5	Ant1	2480	1000~26500	-3.30	-39.62	≤-23.3	PASS
3DH5	Ant1	2402	0~Reference	-1.17	-1.17	---	PASS
3DH5	Ant1	2402	30~1000	-1.17	-50.91	≤-21.17	PASS
3DH5	Ant1	2402	1000~26500	-1.17	-40.04	≤-21.17	PASS
3DH5	Ant1	2441	0~Reference	-1.94	-1.94	---	PASS
3DH5	Ant1	2441	30~1000	-1.94	-53.06	≤-21.94	PASS
3DH5	Ant1	2441	1000~26500	-1.94	-39.78	≤-21.94	PASS
3DH5	Ant1	2480	0~Reference	-0.68	-0.68	---	PASS
3DH5	Ant1	2480	30~1000	-0.68	-50.43	≤-20.68	PASS
3DH5	Ant1	2480	1000~26500	-0.68	-39.49	≤-20.68	PASS



DH5-Ant1-2402-0~Reference

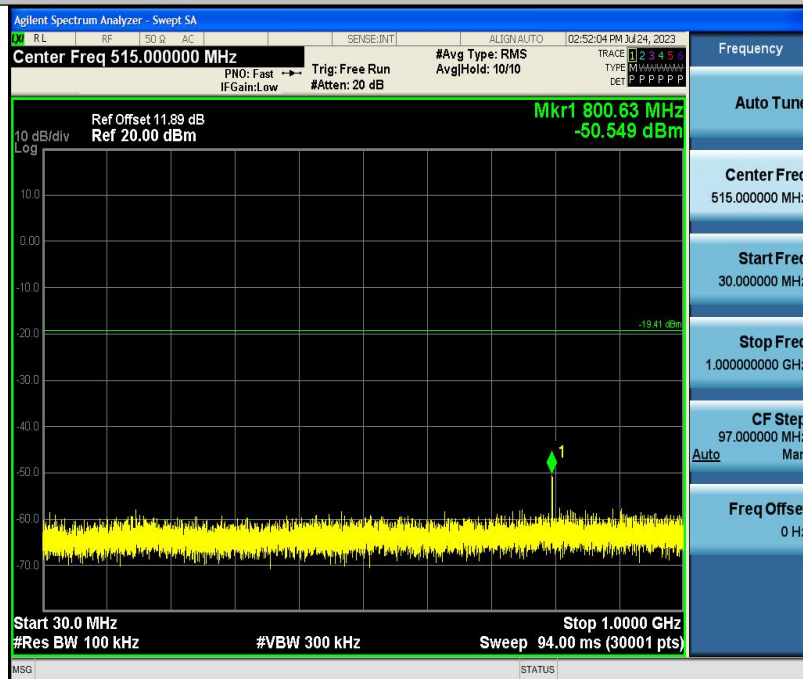


DH5-Ant1-2402-30~1000

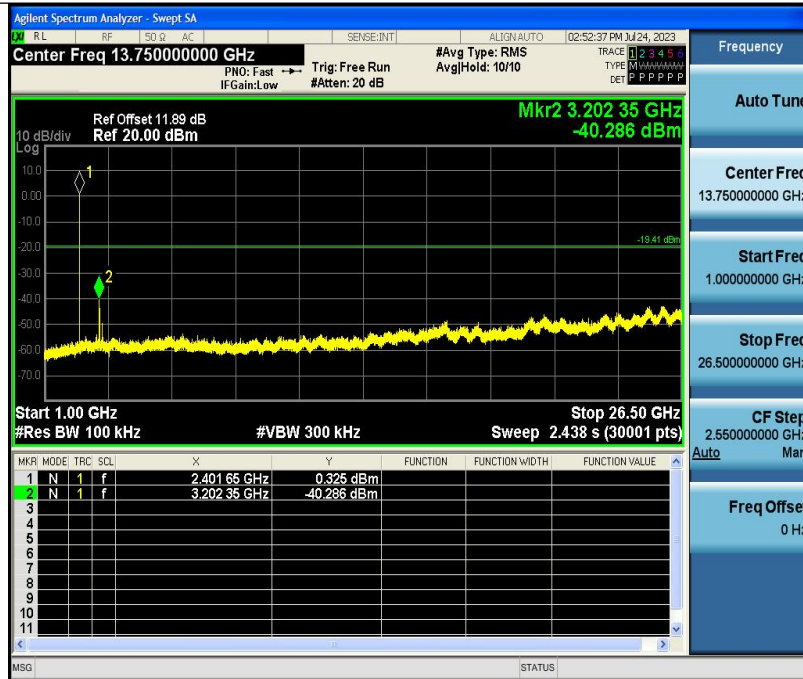


DH5-Ant1-2402-1000~26500



DH5-Ant1-2441-0~Reference

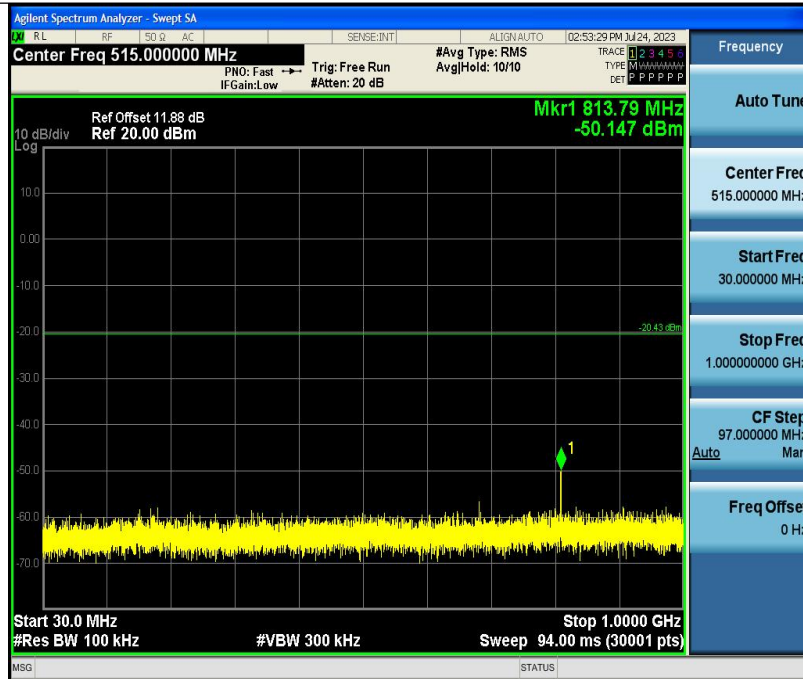

DH5-Ant1-2441-30~1000

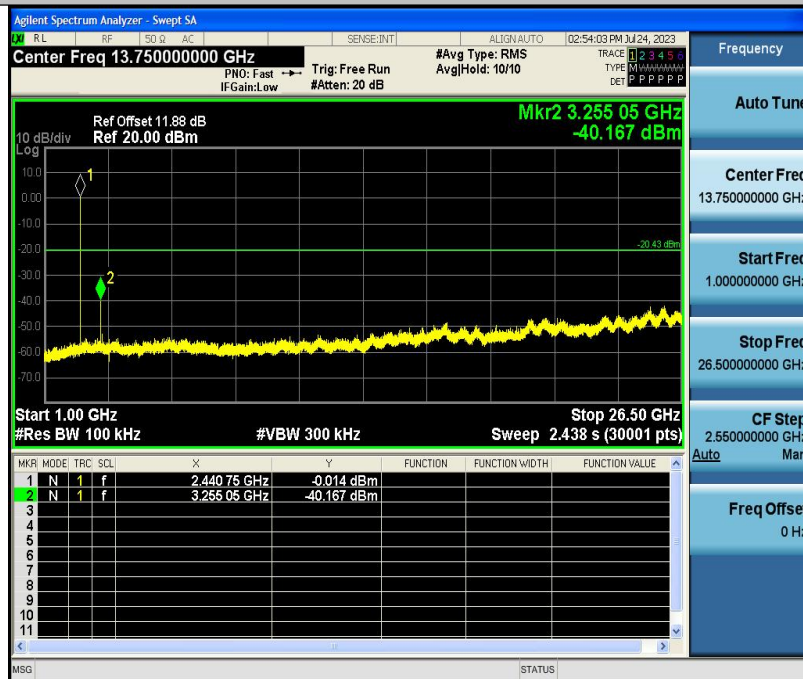

DH5-Ant1-2441-1000~26500