



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104,Building 7 and 8,DCC Cultural and Creative Garden No.98,Pingxin North Road,Shangmugu,Pinghu Street, Longgang District,Shenzhen,Guangdong,China

TEST REPORT

FCC Rules and Regulations Part 15 Subpart C (Section 15.209),

Report Reference No.....: GTS20230629003-1-5

FCC ID.....: 2BB3Y-S9

Compiled by

(position+printed name+signature)...: File administrators Peter Xiao

Supervised by

(position+printed name+signature)...: Test Engineer Jenny Zeng

Approved by

(position+printed name+signature)...: Manager Jason Hu



Date of issue.....: Jul.19, 2023

Representative Laboratory Name .: Shenzhen Global Test Service Co.,Ltd.

Address.....: No.7-101 and 8A-104,Building 7 and 8,DCC Cultural and Creative Garden No.98,Pingxin North Road,Shangmugu,Pinghu Street,Longgang District,Shenzhen,Guangdong,China

Applicant's name Shenzhen Many Win-Win Technology Co., Ltd.

Address: 202 Hengtai Business Building, No. 3 Tangkeng Junction East, Guantian Community, Shiyan Street, Baoan,Shenzhen, China

Test specification

Standard: FCC Rules and Regulations Part 15 Subpart C (Section 15.209)

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description 3-IN-1-WIRELESS CHARGER

Trade Mark: N/A

Manufacturer: Shenzhen Many Win-Win Technology Co., Ltd.

Model/Type reference.....: S9

List Model: S11

Modulation Type: ASK

Operation Frequency.....: 110-205KHz

Ratings: Input: DC 5.0V/3.0A, DC 9.0V/3.0A

Wireless Output 1: 5W/7.5W/10W/15W(Max)

Wireless Output 2: 5W

Wireless Output 3: 3W

Result.....: **PASS**

TEST REPORT

Test Report No. :	GTS20230629003-1-5	Jul.19, 2023
		Date of issue

Equipment under Test : 3-IN-1-WIRELESS CHARGER

Model /Type : S9

Listed Models : S11

Applicant : **Shenzhen Many Win-Win Technology Co., Ltd.**

Address : 202 Hengtai Business Building, No. 3 Tangkeng Junction East,
Guantian Community, Shiyan Street, Baoan,Shenzhen, China

Manufacturer : **Shenzhen Many Win-Win Technology Co., Ltd.**

Address : 202 Hengtai Business Building, No. 3 Tangkeng Junction East,
Guantian Community, Shiyan Street, Baoan,Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	6
2.4. EUT Exercise Software	6
2.5. Special Accessories	7
2.6. External I/O Cable	7
2.7. Modifications	7
3. TEST ENVIRONMENT	8
3.1. Address of the test laboratory	8
3.2. Test Facility	8
3.3. Test Description	8
3.4. Statement of the measurement uncertainty	8
3.5. Equipments Used during the Test	9
4. TEST CONDITIONS AND RESULTS	10
4.1. AC Power Conducted Emission	10
4.2. Radiated Emission	12
4.3. Occupied Bandwidth	16
4.4. Antenna Requirement	17
5. TEST SETUP PHOTOS OF THE EUT	18
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	20

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules and Regulations Part 15 Subpart C \(Section 15.209\)](#): Radiated emission limits; general requirements.

[ANSI C63.10: 2020](#): American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Jul.08, 2023
Testing commenced on	:	Jul.08, 2023
Testing concluded on	:	Jul.18, 2023

2.2. Product Description

Product Name:	3-IN-1-WIRELESS CHARGER
Trade Mark:	N/A
Model/Type reference:	S9
List Model:	S11
Model Declaration	PCB board, structure and internal of these model(s) are the same, Only the model name and appearance different , So no additional models were tested.
Power supply:	Input: DC 5.0V/3.0A, DC 9.0V/3.0A Wireless Output 1: 5W/7.5W/10W/15W(Max) Wireless Output 2: 5W Wireless Output 3: 3W
Hardware Version	N/A
Software Version	N/A
WPT	
Frequency Range	110.0~205.0KHz
Modulation Type	ASK (Continuous Wave)
Load Sensing	Contact transmission
Antenna Type	Coil Antenna
Antenna gain	0dBi

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/>	230V / 50 Hz	<input type="radio"/>	120V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 9.0V

Description of the test mode

Operation Frequency each of channel	
Channel	Frequency
1	120.19KHz

Mode	AC mode
Mode 1	Wireless Charging 15W(Wireless Output 1)+ Wireless Charging 5W(Wireless Output 2) +Wireless Charging 3W(Wireless Output 3)
Mode 2	Wireless Charging 15W(Wireless Output 1)+ Wireless Charging 5W(Wireless Output 2)
Mode 3	Wireless Charging 15W(Wireless Output 1) +Wireless Charging 3W(Wireless Output 3)
Mode 4	Wireless Charging 5W(Wireless Output 2) +Wireless Charging 3W(Wireless Output 3)
Mode 5	Wireless Charging 5W(Wireless Output 2)
Mode 6	Wireless Charging 3W(Wireless Output 3)
Mode 7	Wireless Charging 5W(Wireless Output 1)
Mode 8	Wireless Charging 7.5W(Wireless Output 1)
Mode 9	Wireless Charging 10W(Wireless Output 1)
Mode 10	Wireless Charging 15W(Wireless Output 1)

- Note :1.EUT has one Type-C port, The Type-C supports wireless charging in AC mode.
 2. All the modes have been tested and recorded worst mode in the report(Mode 1).
 3. All modes were tested for load states less than 1%, less than 50%, and less than 99%.

2.4. EUT Exercise Software

N/A

2.5. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
LANTO ELECTRONNIC LIMITED	Adapter	191106C	--	SDOC
Apple	Airpods	GX6DGNXE0C6L	--	SDOC
Apple	Watch	SMART 49MM	--	SDOC
--	Load	--	--	--

Note: The Adapter, Airpods, Watch and Load is only used for auxiliary testing.

2.6. External I/O Cable

I/O Port Description	Quantity	Cable
DC IN Port	1	1.0M, Unscreened Cable

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104,Building 7 and 8,DCC Cultural and Creative Garden No.98,Pingxin North Road,Shangmugu,Pinghu Street,Longgang District,Shenzhen,Guangdong,China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is165725.

CAB identifier is CN0082.

3.3. Test Description

Description Of Test	Result
Conducted Emissions Test	Compliant
Radiated Emission Test	Compliant
Occupied Bandwidth Measurement	Compliant
Antenna Requirement	Compliant

3.4. Statement of the measurement uncertainty

Measurement Uncertainty		
Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	=	4.06dB, k=2

3.5. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	CYBERTEK	EM5040A	E1850400105	2023/07/13	2024/07/12
LISN	R&S	ESH2-Z5	893606/008	2023/07/13	2024/07/12
EMI Test Receiver	R&S	ESPI3	101841-cd	2023/07/13	2024/07/12
EMI Test Receiver	R&S	ESCI7	101102	2022/09/09	2023/09/08
Spectrum Analyzer	Agilent	N9020A	MY48010425	2022/09/09	2023/09/08
Spectrum Analyzer	R&S	FSV40	100019	2023/07/13	2024/07/12
Vector Signal generator	Agilent	N5181A	MY49060502	2023/07/13	2024/07/12
Signal generator	Agilent	N5182A	3610AO1069	2022/09/09	2023/09/08
Climate Chamber	ESPEC	EL-10KA	A20120523	2022/09/09	2023/09/08
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2022/09/09	2023/09/08
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2022/09/09	2023/09/08
Bilog Antenna	Schwarzbeck	VULB9163	000976	2023/07/13	2024/07/12
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2022/09/09	2023/09/08
Amplifier	Schwarzbeck	BBV 9743	#202	2023/07/13	2024/07/12
Amplifier	Schwarzbeck	BBV9179	9719-025	2023/07/13	2024/07/12
Amplifier	EMCI	EMC051845B	980355	2023/07/13	2024/07/12
Temperature/Humidity Meter	Gangxing	CTH-608	02	2023/07/13	2024/07/12
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2023/07/13	2024/07/12
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2023/07/13	2024/07/12
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2023/07/13	2024/07/12
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2023/07/13	2024/07/12
Data acquisition card	Agilent	U2531A	TW53323507	2023/07/13	2024/07/12
Power Sensor	Agilent	U2021XA	MY5365004	2023/07/13	2024/07/12
Test Control Unit	Tonscend	JS0806-1	178060067	2023/07/13	2024/07/12
Automated filter bank	Tonscend	JS0806-F	19F8060177	2023/07/13	2024/07/12
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

The calibration interval is 1 year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

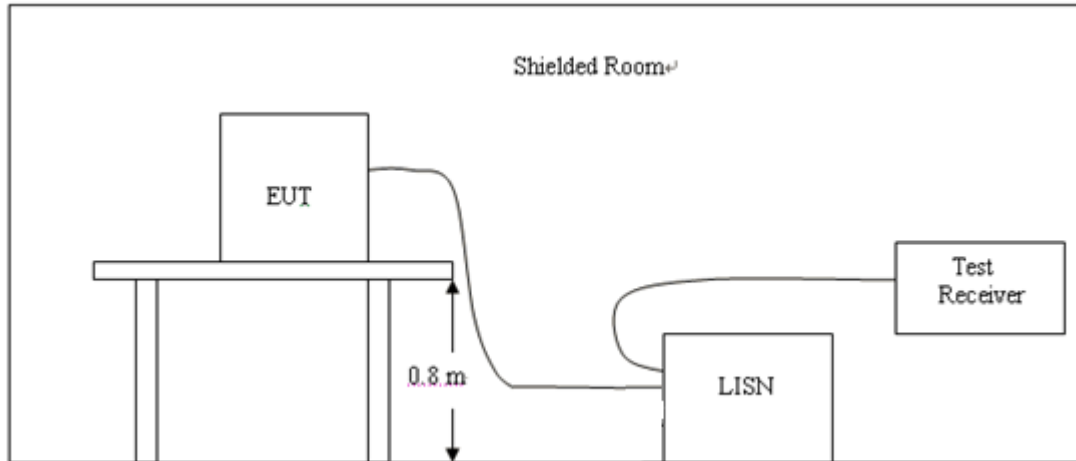

TEST PROCEDURE

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, The EUT received DC 9V power, the adapter received AC120V/60Hz or AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

1. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

Temperature	25°C	Humidity	60%
Test Engineer	Jenny Zeng	Configurations	WPT


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

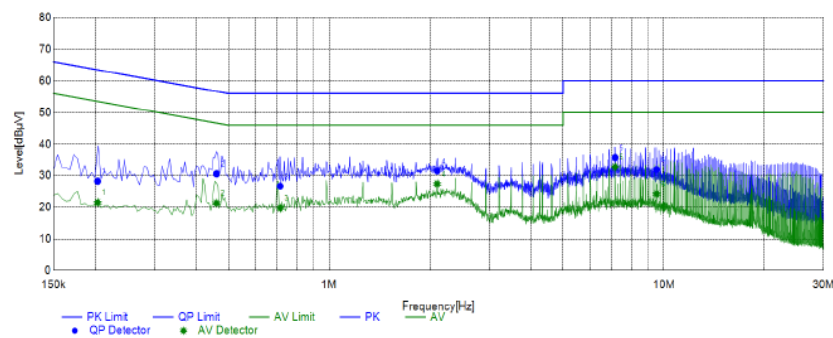

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.2035	18.74	11.95	9.55	28.29	21.50	63.47	53.47	35.18	31.97	L1	PASS
2	0.4611	21.16	11.88	9.42	30.58	21.30	56.67	46.67	26.09	25.37	L1	PASS
3	0.7147	17.28	10.35	9.39	26.67	19.74	56.00	46.00	29.33	26.26	L1	PASS
4	2.1056	22.14	18.04	9.36	31.50	27.40	56.00	46.00	24.50	18.60	L1	PASS
5	7.1587	26.45	23.49	9.28	35.73	32.77	60.00	50.00	24.27	17.23	L1	PASS
6	9.5098	22.73	14.98	9.21	31.94	24.19	60.00	50.00	28.06	25.81	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

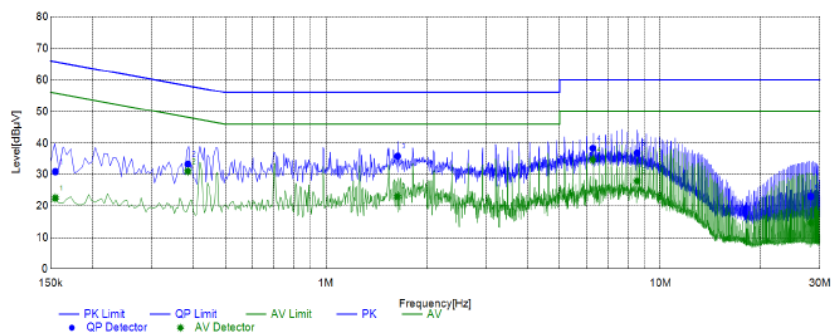

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1551	21.25	12.94	9.60	30.85	22.54	65.72	55.72	34.87	33.18	N	PASS
2	0.3866	23.82	21.52	9.48	33.30	31.00	58.14	48.14	24.84	17.14	N	PASS
3	1.6401	26.43	13.67	9.35	35.78	23.02	56.00	46.00	20.22	22.98	N	PASS
4	6.2843	29.00	25.37	9.33	38.33	34.70	60.00	50.00	21.67	15.30	N	PASS
5	8.5300	27.44	18.66	9.30	36.74	27.96	60.00	50.00	23.26	22.04	N	PASS
6	28.2083	13.75	5.38	9.24	22.99	14.62	60.00	50.00	37.01	35.38	N	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).


2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Note: All the modes have been tested and recorded worst mode in the report.


4.2. Radiated Emission

TEST CONFIGURATION

Frequency range 9 KHz – 30MHz

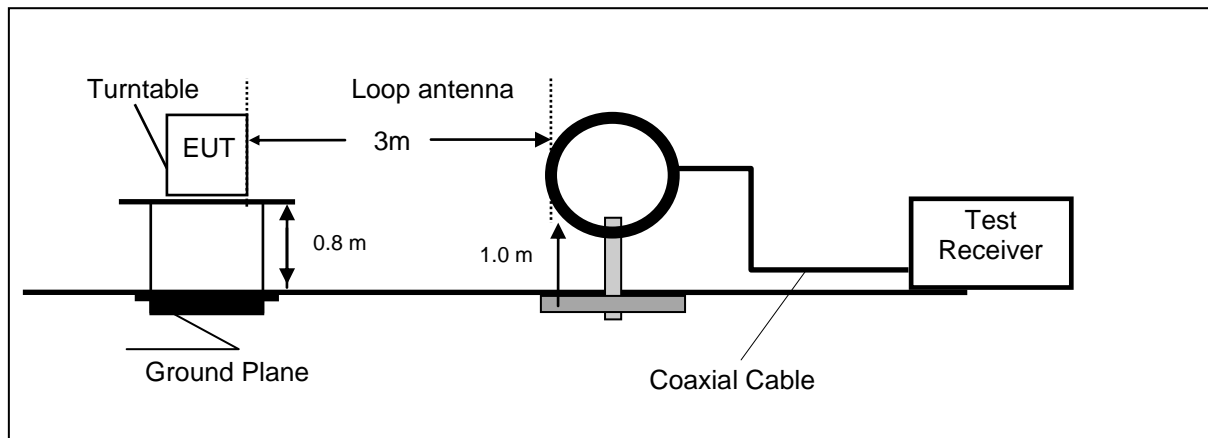

Frequency range 30MHz – 1000MHz

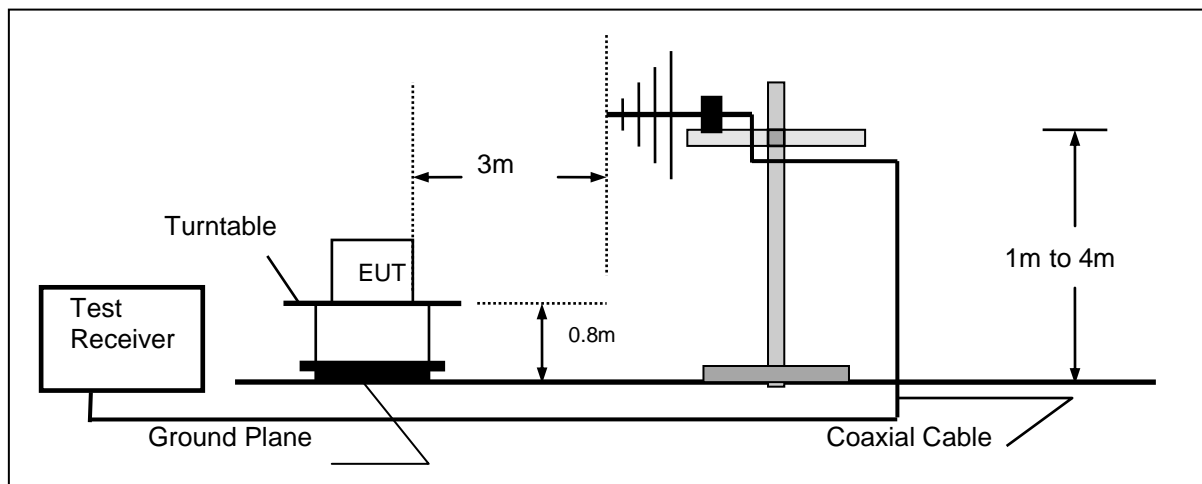

Frequency range above 1GHz-25GHz



TEST PROCEDURE

- 1.The EUT was placed on a turn table which is 12mm above ground plane when testing frequency range 9 KHz –25GHz.
- 2.Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
- 3.And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4.Repeat above procedures until all frequency measurements have been completed.
- 5.The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 205KHz.so radiated emission test frequency band from 9KHz to 1GHz.
- 6.The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- 7.Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS


Temperature	25℃	Humidity	58%
Test Engineer	Jenny Zeng	Configurations	WPT

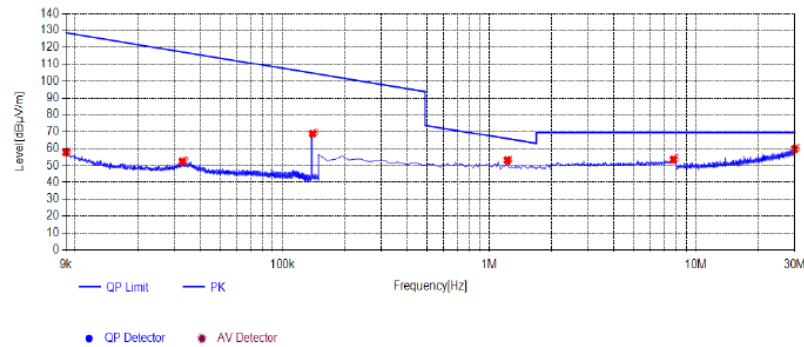For 9 KHz-30MHz**Coplanar****Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	0.009	57.75	0.10	57.85	128.52	70.67	100	184	PK	Coplanar	PASS
2	0.0329	52.20	0.14	52.34	117.27	64.93	100	112	PK	Coplanar	PASS
3	0.1221	68.51	0.34	68.85	104.68	35.83	100	199	PK	Coplanar	PASS
4	1.2246	52.33	0.79	53.12	65.84	12.72	100	3	PK	Coplanar	PASS
5	7.7767	50.11	3.40	53.51	69.54	16.03	100	274	PK	Coplanar	PASS
6	30	47.63	12.06	59.69	69.54	9.85	100	288	PK	Coplanar	PASS

Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

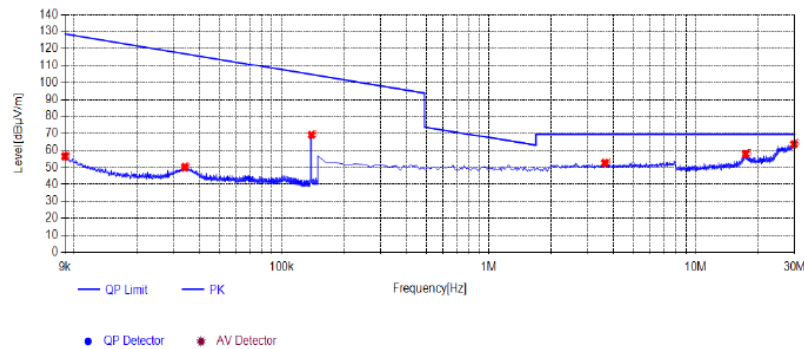Coaxial**Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	0.009	56.40	0.10	56.50	128.52	72.02	100	60	PK	Coaxial	PASS
2	0.0341	50.05	0.15	50.20	116.96	66.76	100	357	PK	Coaxial	PASS
3	0.1236	68.83	0.34	69.17	104.70	35.53	100	128	PK	Coaxial	PASS
4	3.6424	50.92	1.78	52.70	69.54	16.84	100	254	PK	Coaxial	PASS
5	17.4033	50.79	7.15	57.94	69.54	11.60	100	354	PK	Coaxial	PASS
6	29.8209	51.57	11.99	63.56	69.54	5.98	100	2	PK	Coaxial	PASS


Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

For 30MHz-1GHz

Horizontal

Test Graph

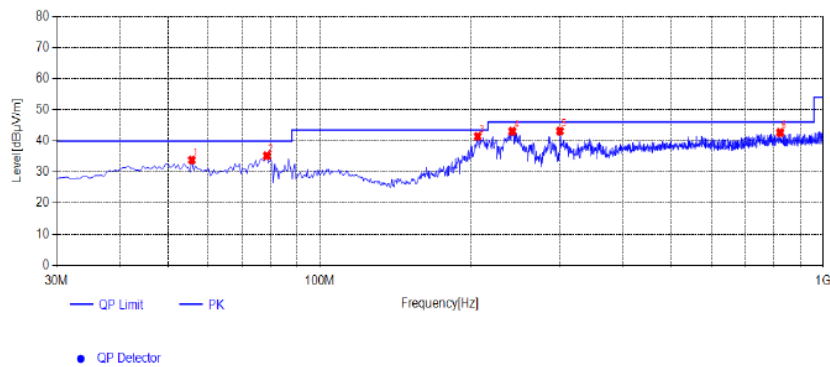

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	55.705	45.69	-11.87	33.82	40.00	6.18	100	256	PK	Horizontal	PASS
2	78.5	52.20	-17.03	35.17	40.00	4.83	100	213	PK	Horizontal	PASS
3	206.055	53.42	-11.93	41.49	43.50	2.01	100	36	PK	Horizontal	PASS
4	241.46	54.25	-11.17	43.08	46.00	2.92	100	26	PK	Horizontal	PASS
5	300.145	52.65	-9.50	43.15	46.00	2.85	100	360	PK	Horizontal	PASS
6	821.52	41.08	1.60	42.68	46.00	3.32	100	124	PK	Horizontal	PASS

Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

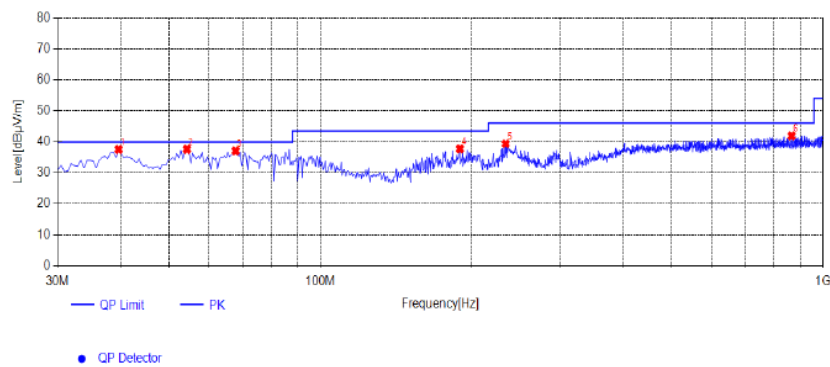

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	39.7	50.14	-12.66	37.48	40.00	2.52	100	108	PK	Vertical	PASS
2	54.25	49.07	-11.52	37.55	40.00	2.45	100	101	PK	Vertical	PASS
3	67.83	50.72	-13.69	37.03	40.00	2.97	100	276	PK	Vertical	PASS
4	189.565	51.13	-13.45	37.68	43.50	5.82	100	101	PK	Vertical	PASS
5	233.7	51.05	-11.69	39.36	46.00	6.64	100	98	PK	Vertical	PASS
6	865.655	40.75	1.19	41.94	46.00	4.06	100	306	PK	Vertical	PASS


Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Note: All the modes have been tested and recorded worst mode in the report.

4.3. Occupied Bandwidth

TEST CONFIGURATION

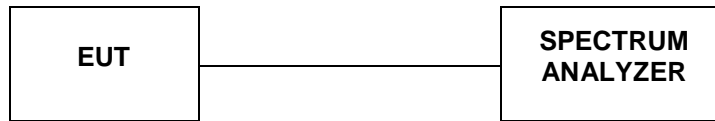

TEST PROCEDURE

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.


LIMIT

/

TEST RESULTS

Temperature	24.5°C	Humidity	53.9%
Test Engineer	Jenny Zeng	Configurations	WPT

Mode	Freq (KHz)	20dB Bandwidth (KHz)	Limit (kHz)	Conclusion
Tx Mode	120.19	2.339	/	PASS

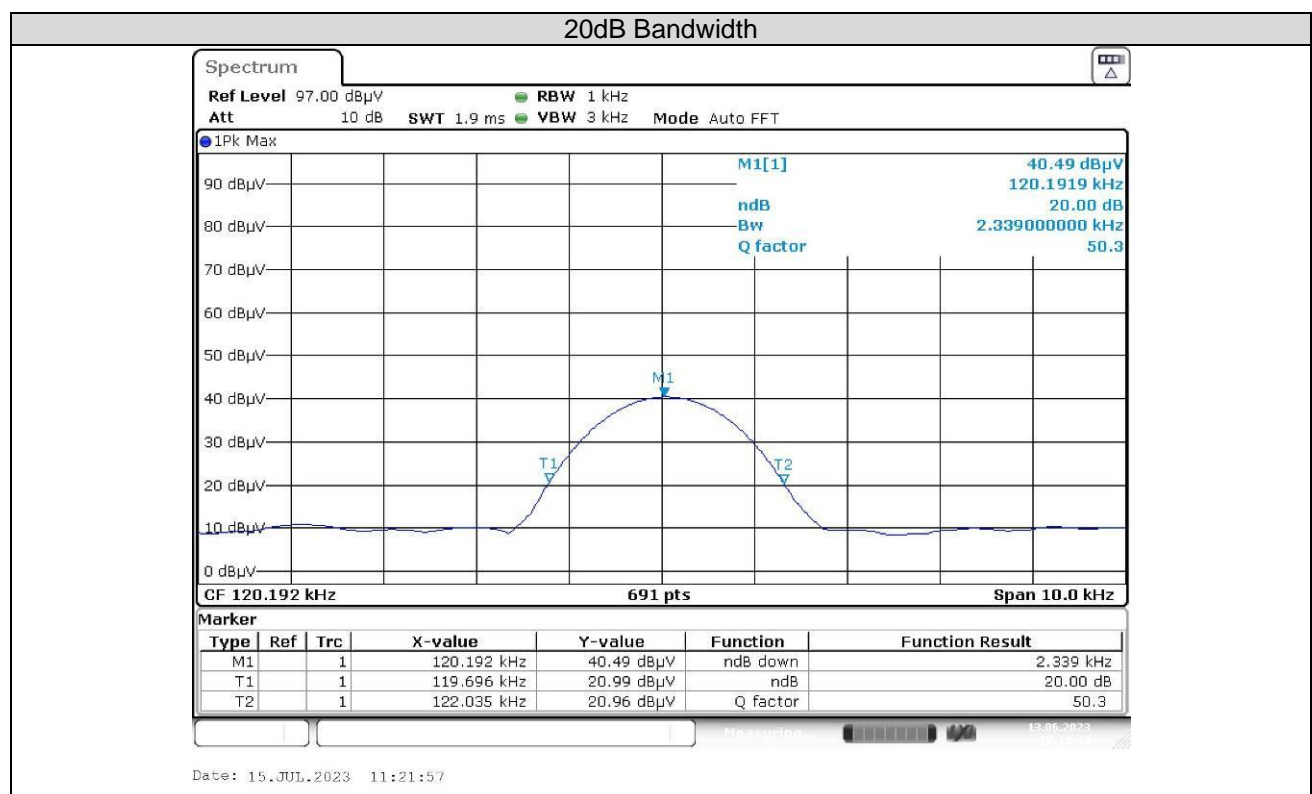

4.4. Antenna Requirement

Standard Applicable

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Information

The antenna used in this product is a Coil Antenna, The directional gains of antenna used for transmitting is 0dBi.

Reference to the **Internal photos**.

5. Test Setup Photos of the EUT

Photo of Radiated Emissions Measurement



Fig. 1

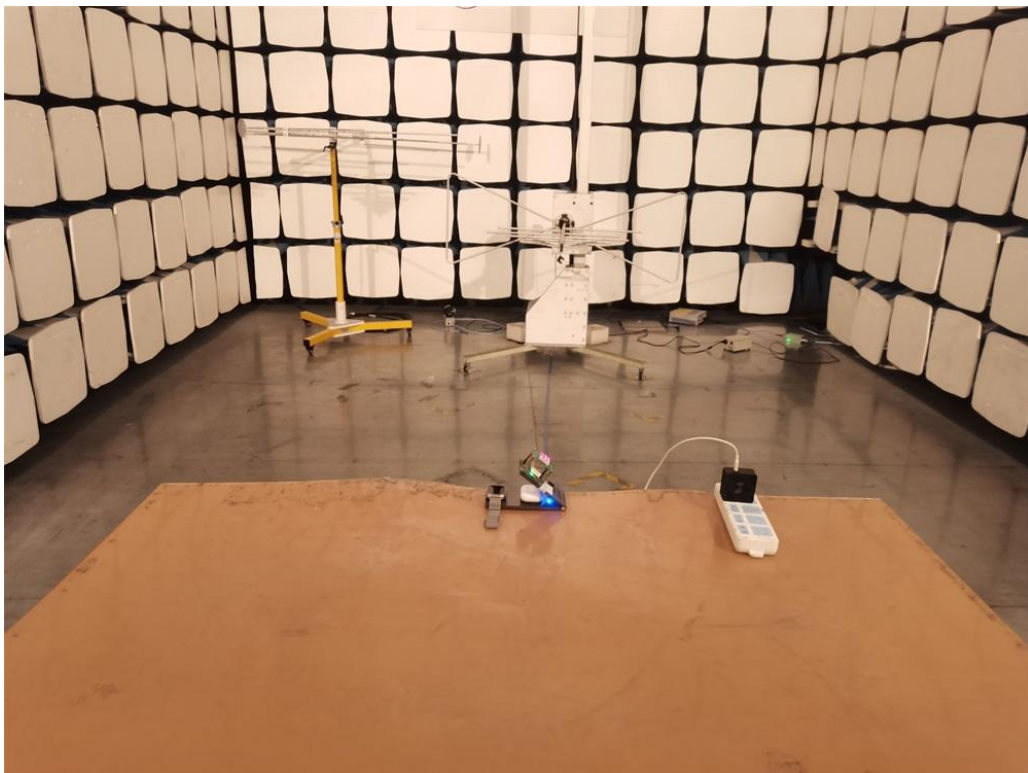


Fig. 2

Photo of Conducted Emissions Measurement



Fig. 3

6. External and Internal Photos of the EUT



Fig. 1

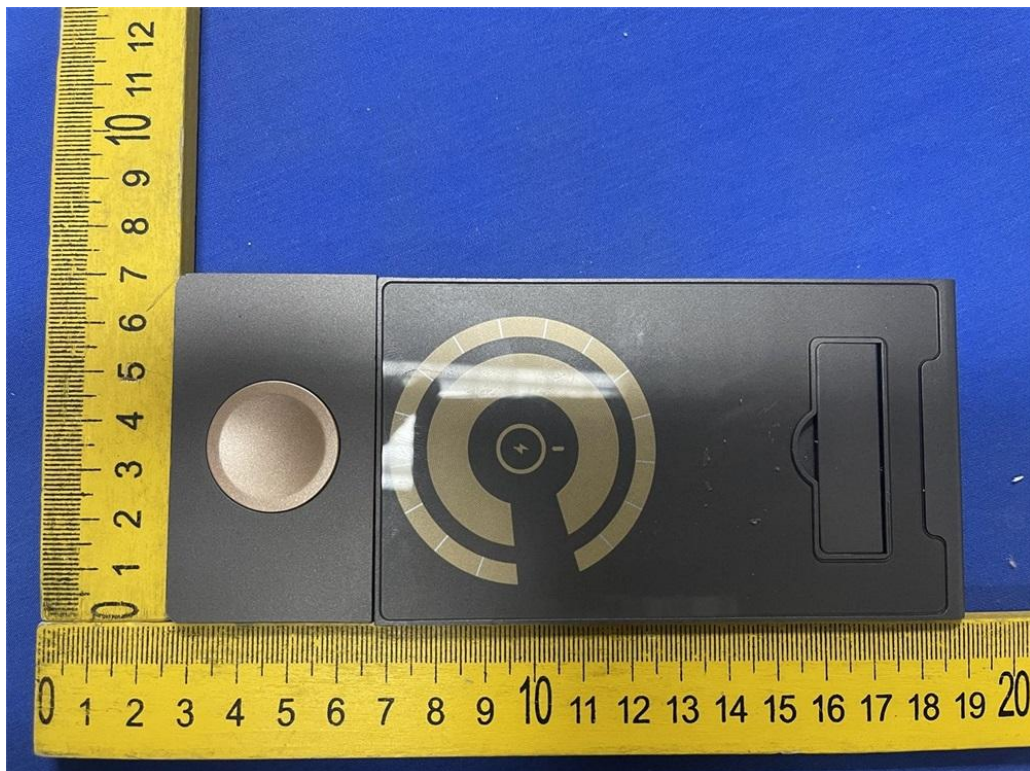


Fig. 2

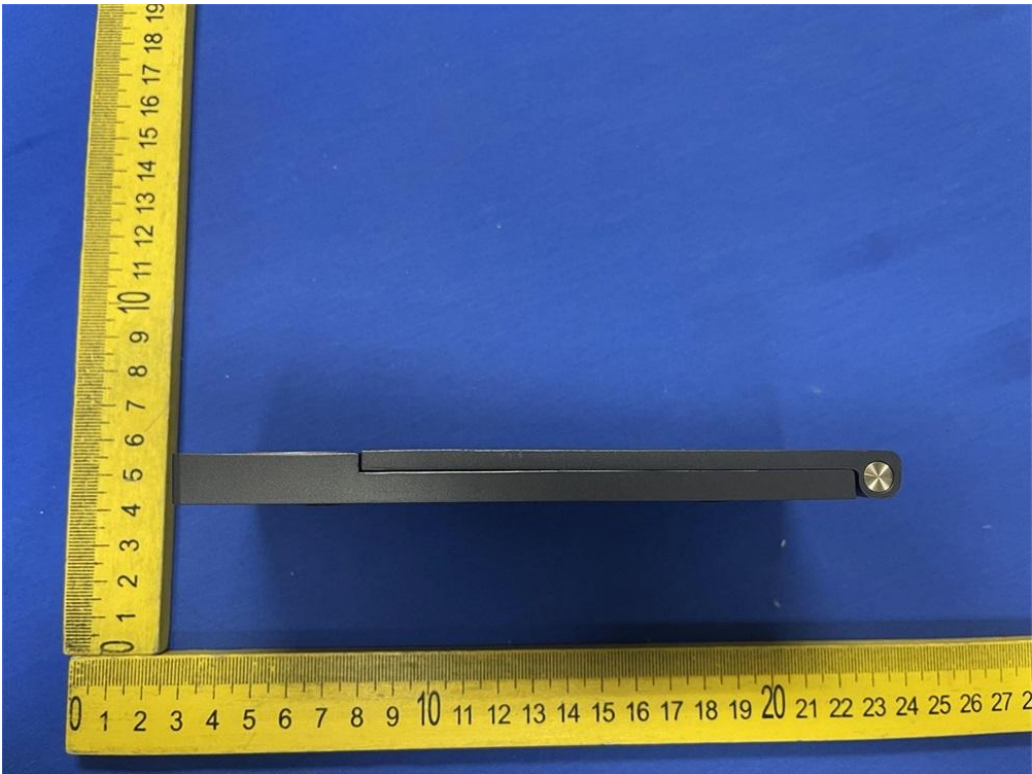


Fig. 3

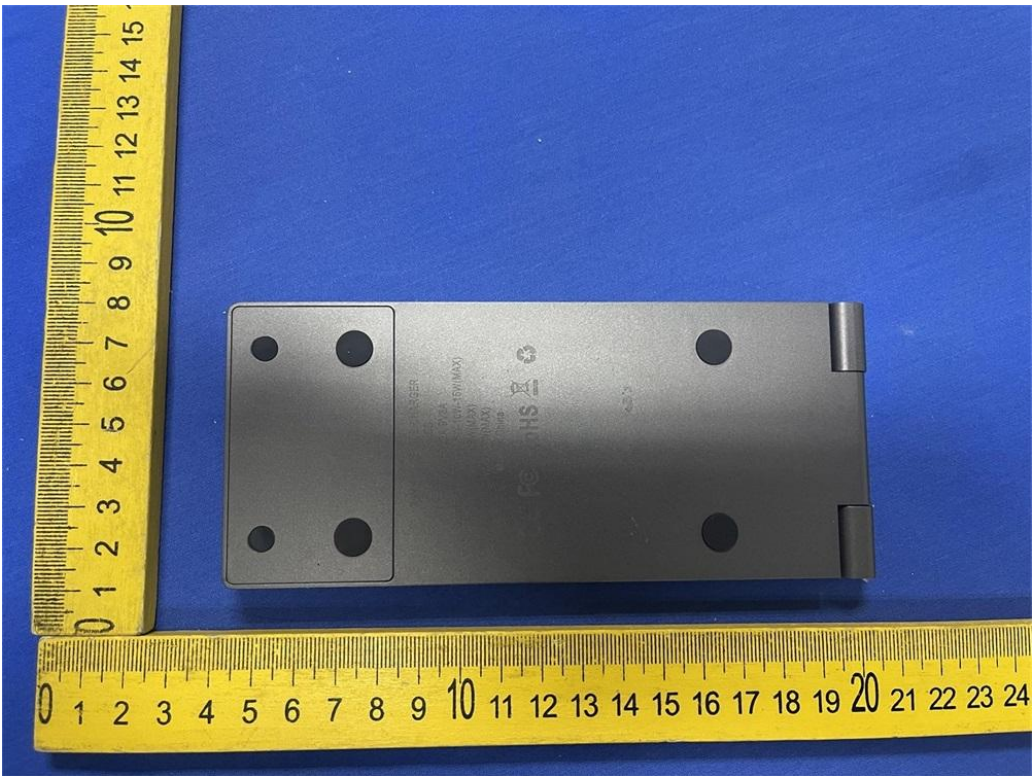


Fig. 4



Fig. 5

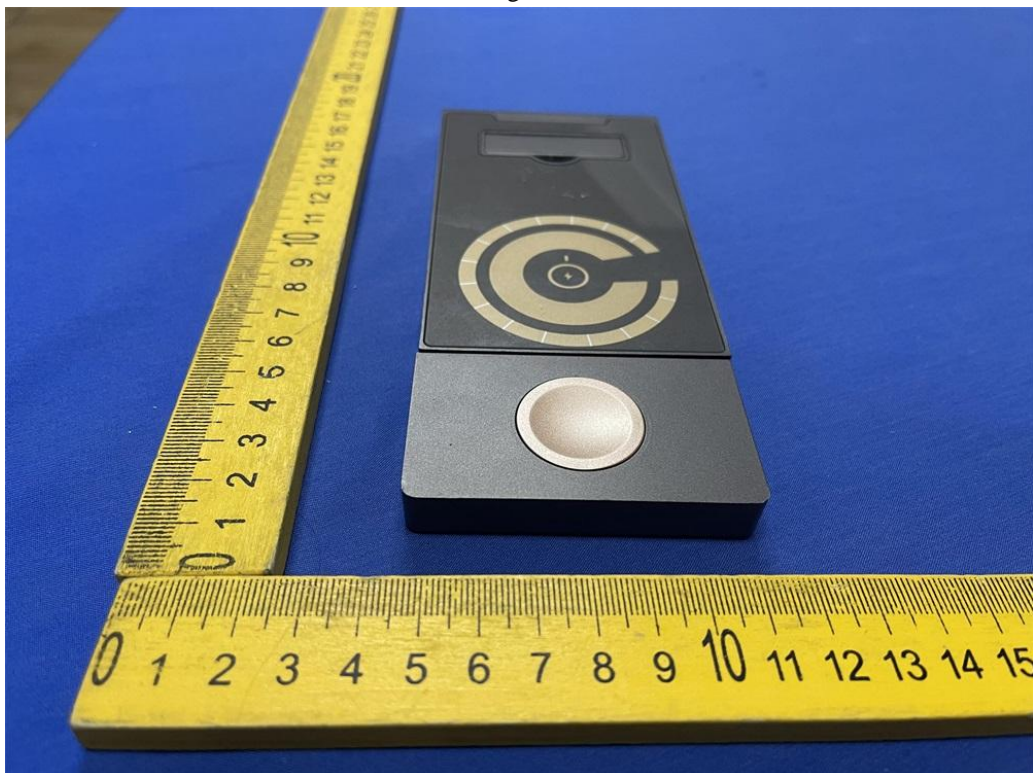


Fig. 6

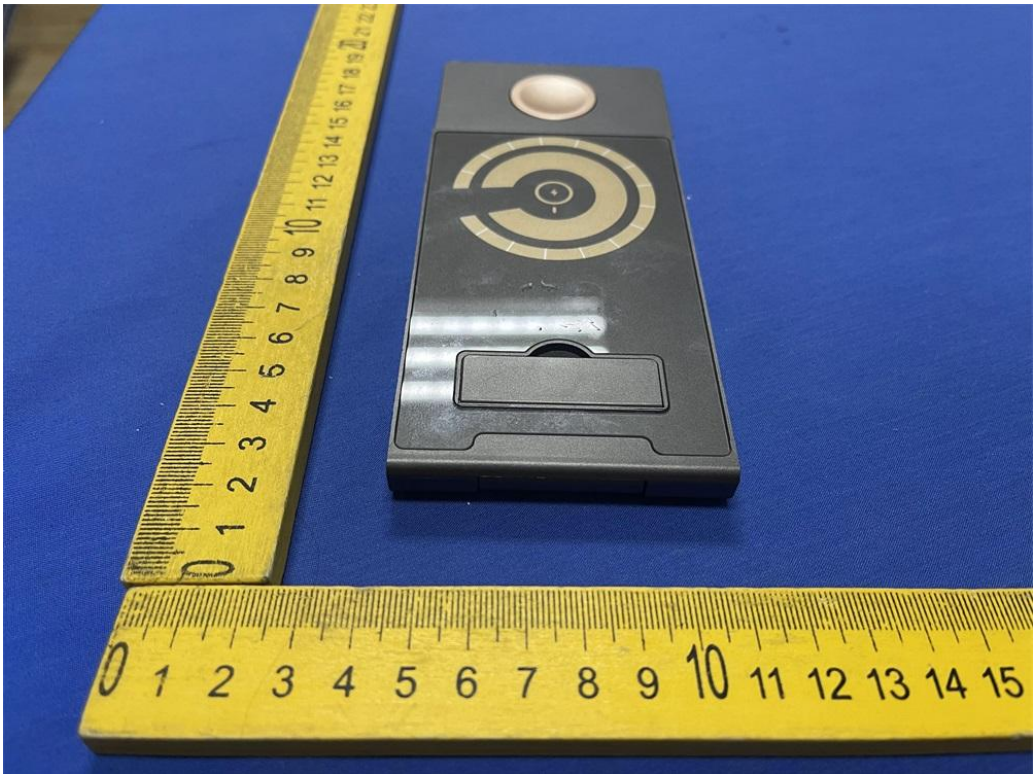


Fig. 7

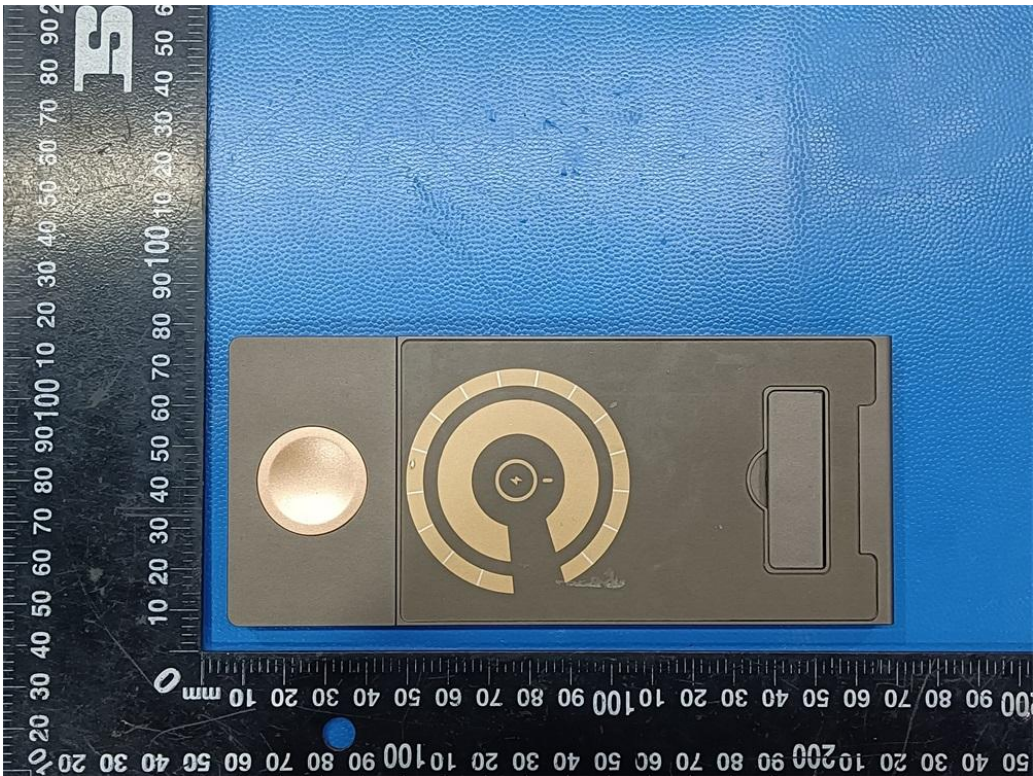


Fig. 8

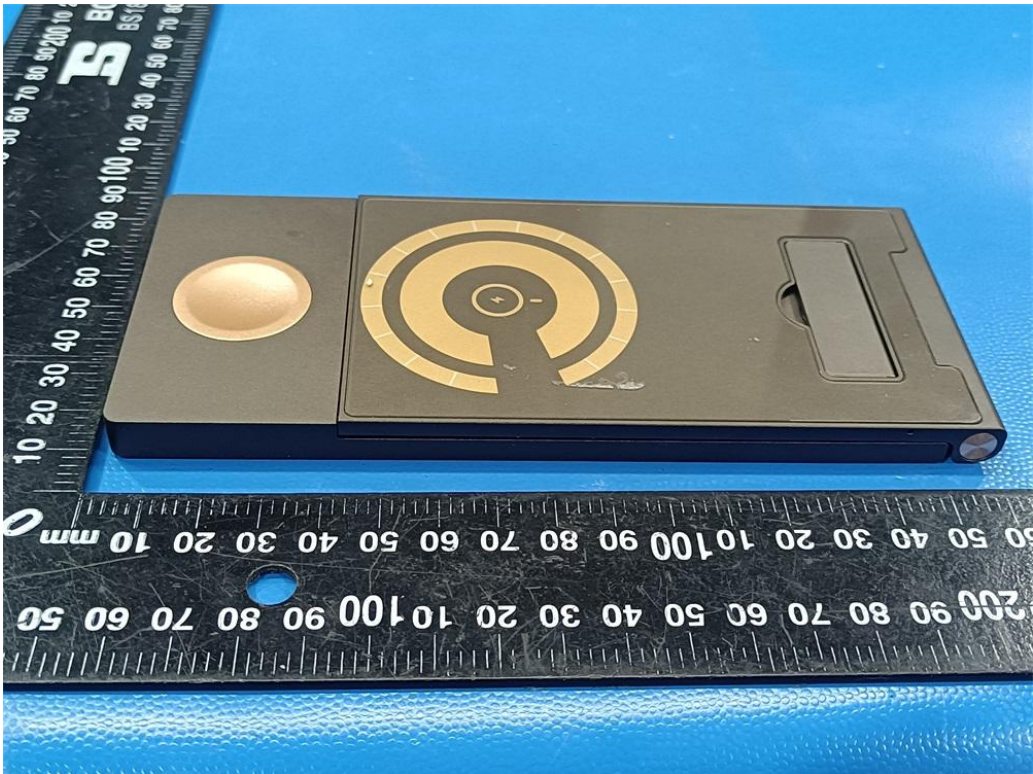


Fig. 9

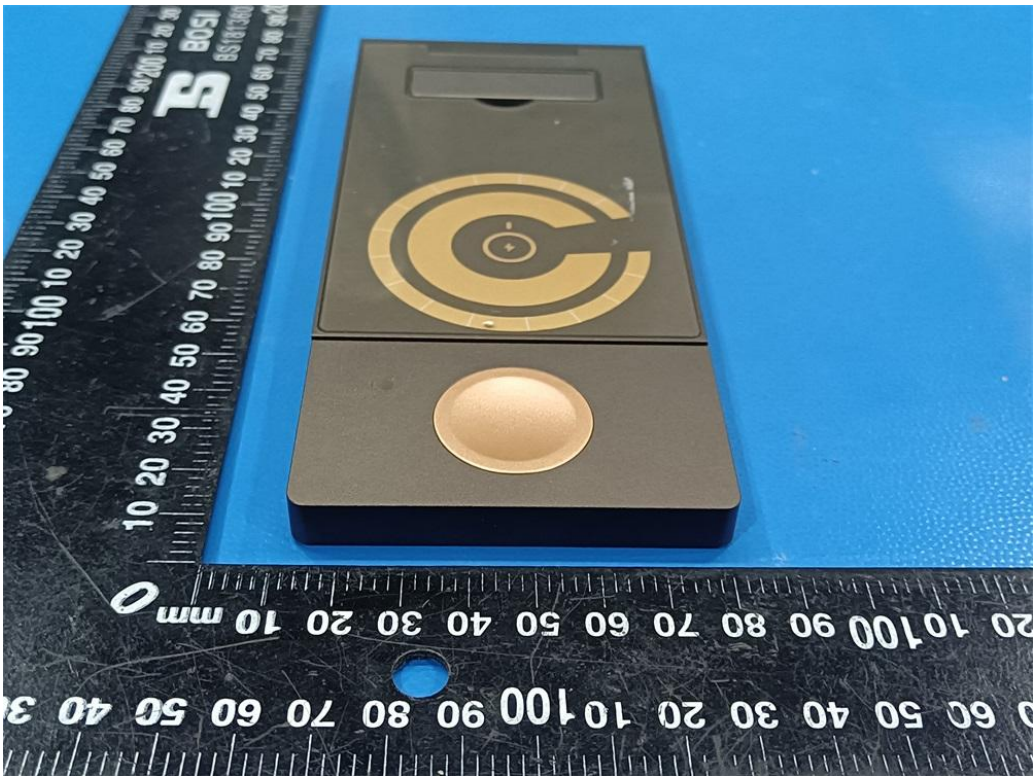


Fig. 10

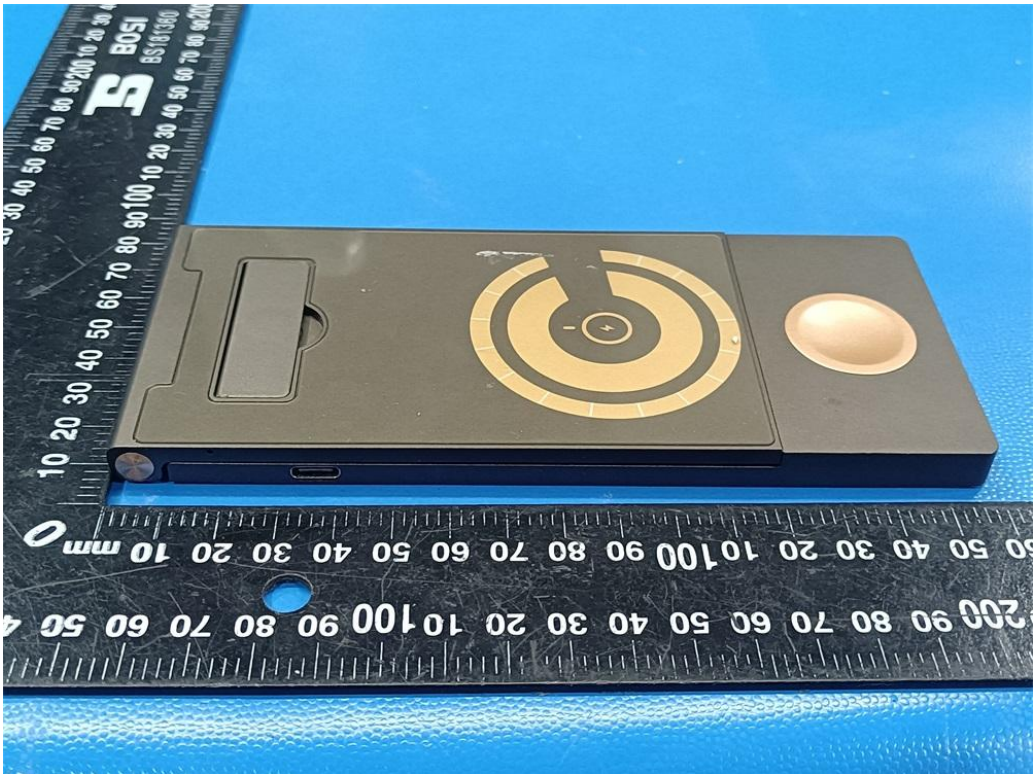


Fig. 11

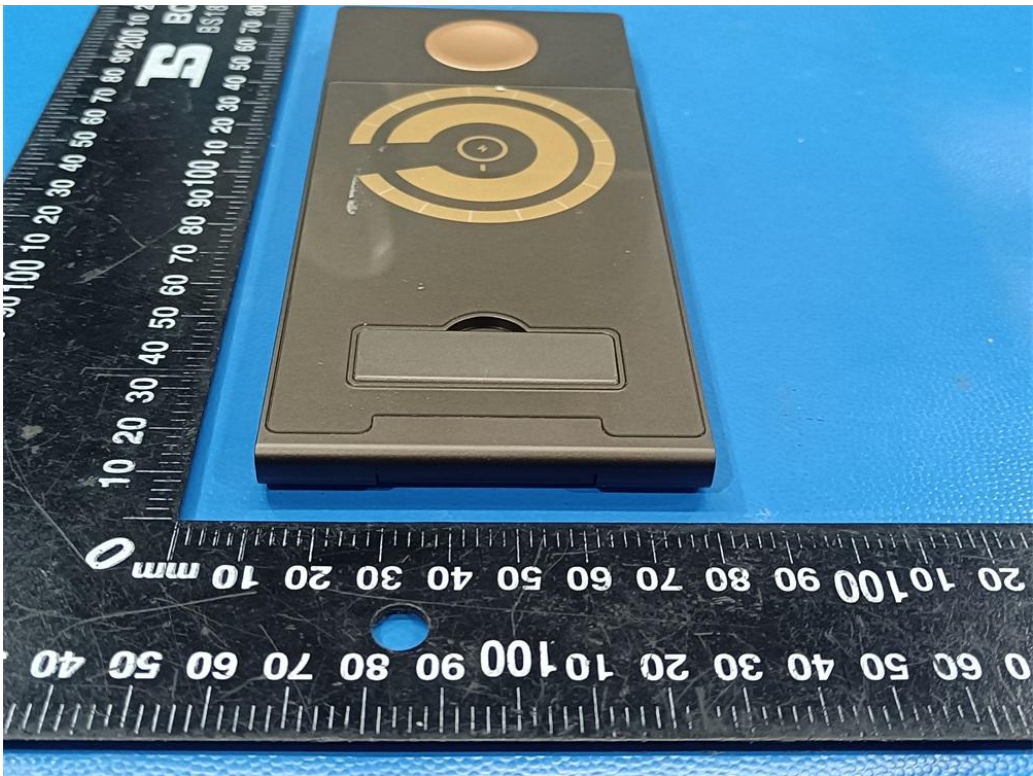


Fig. 12

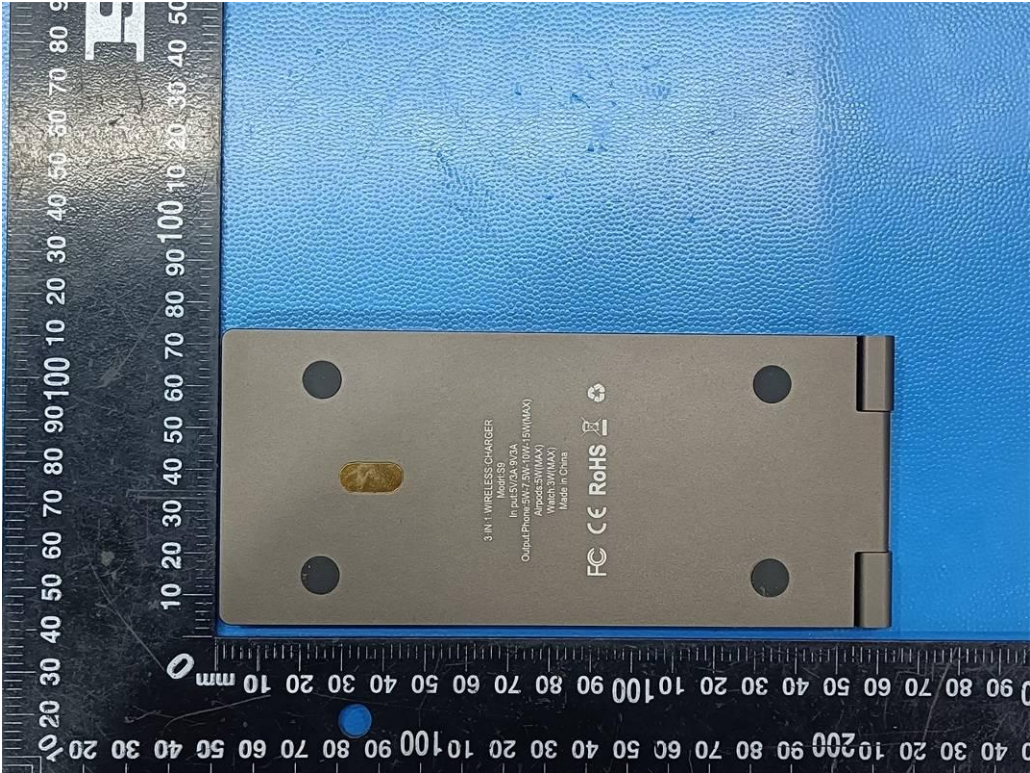


Fig. 13

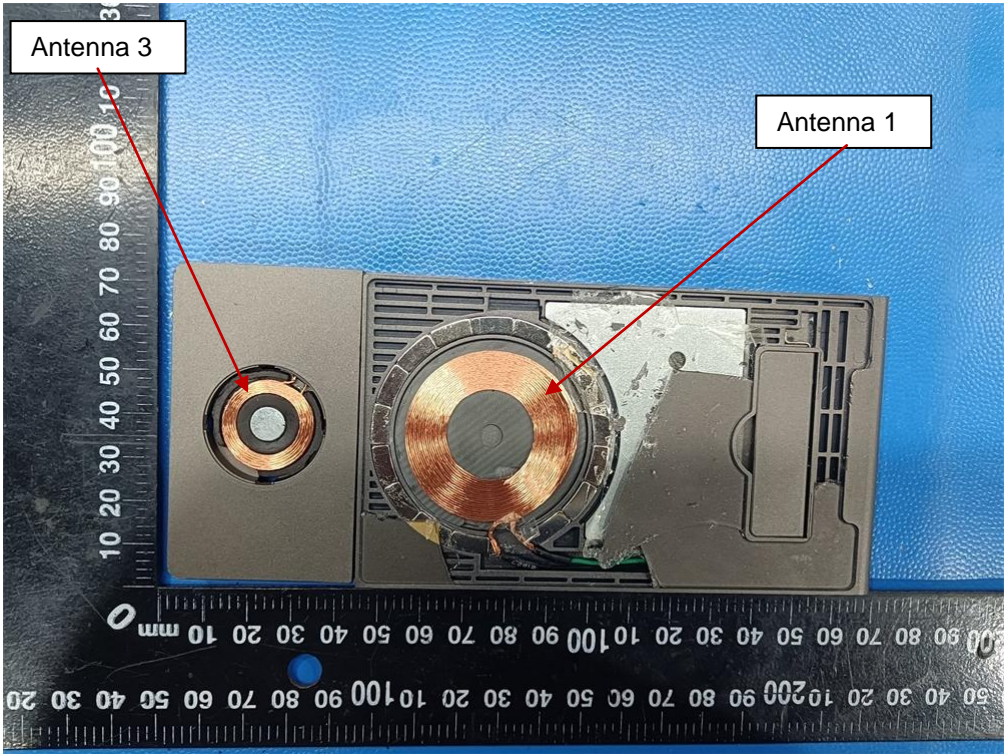


Fig. 14

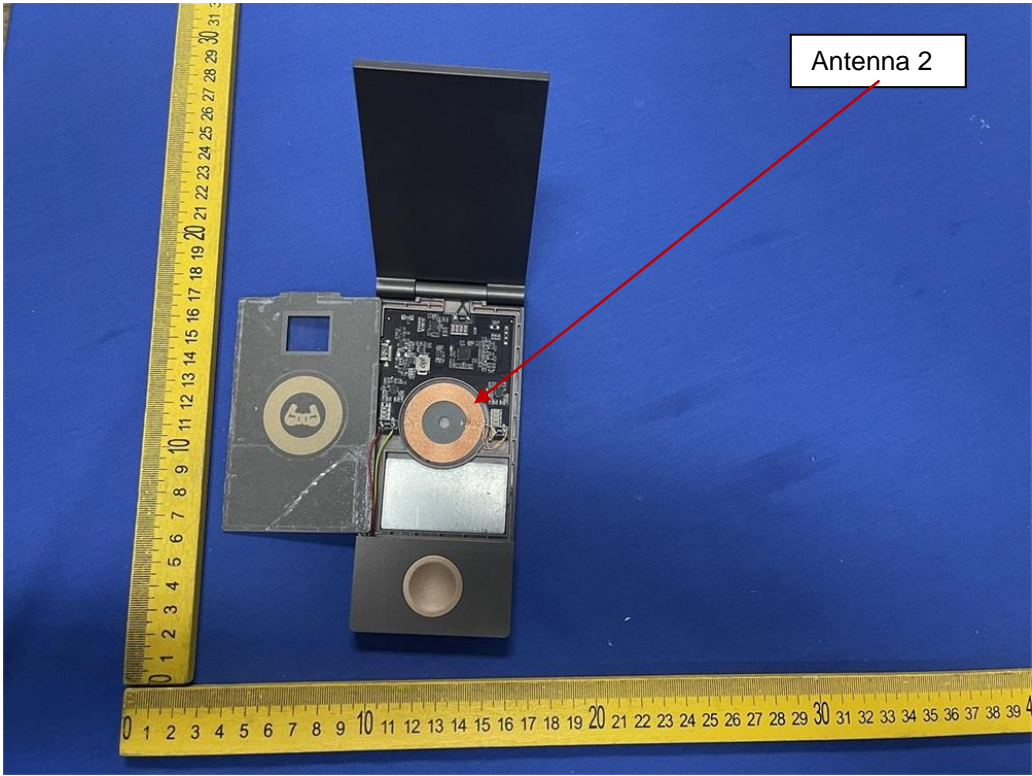


Fig. 15

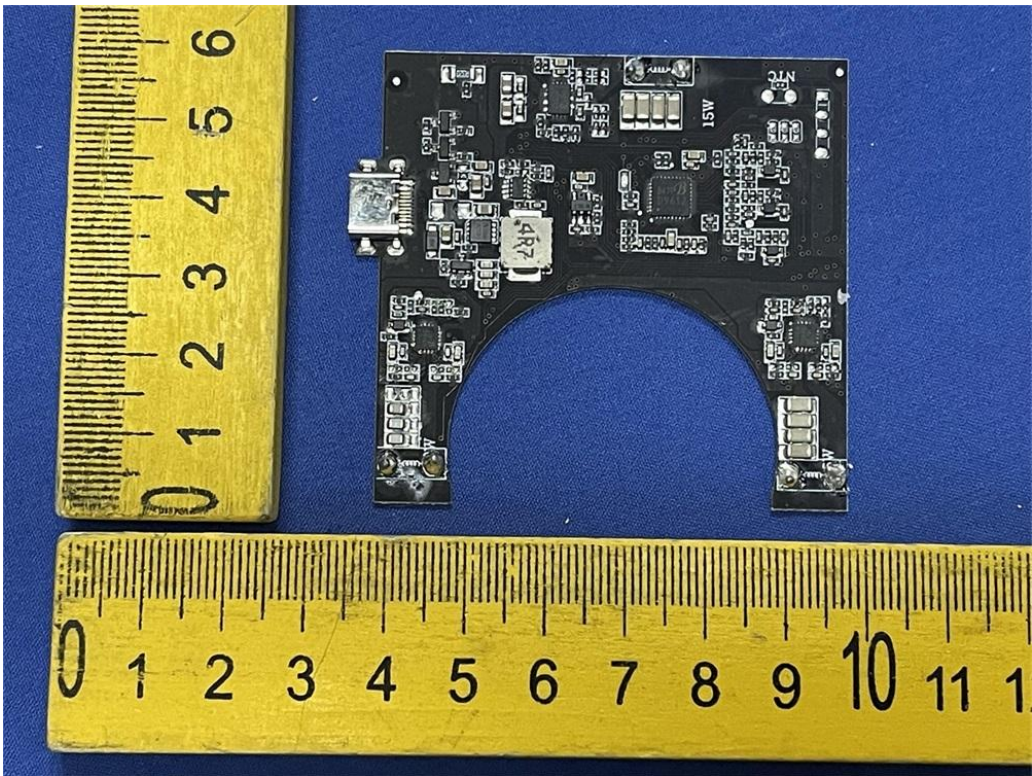


Fig. 16

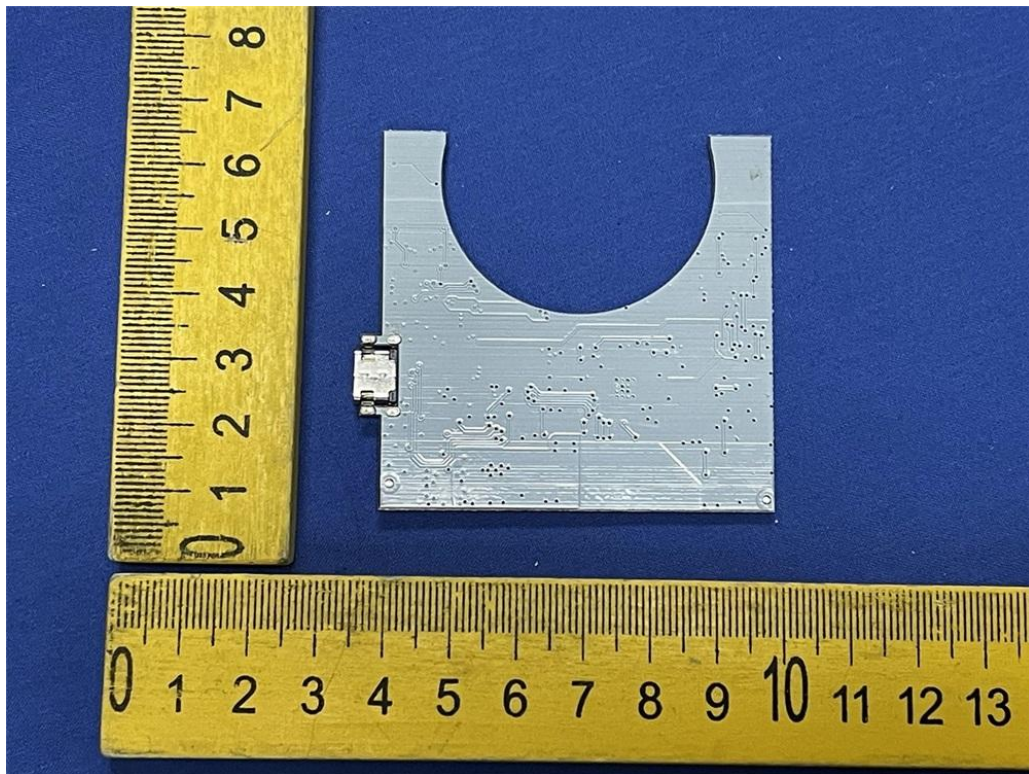


Fig. 17

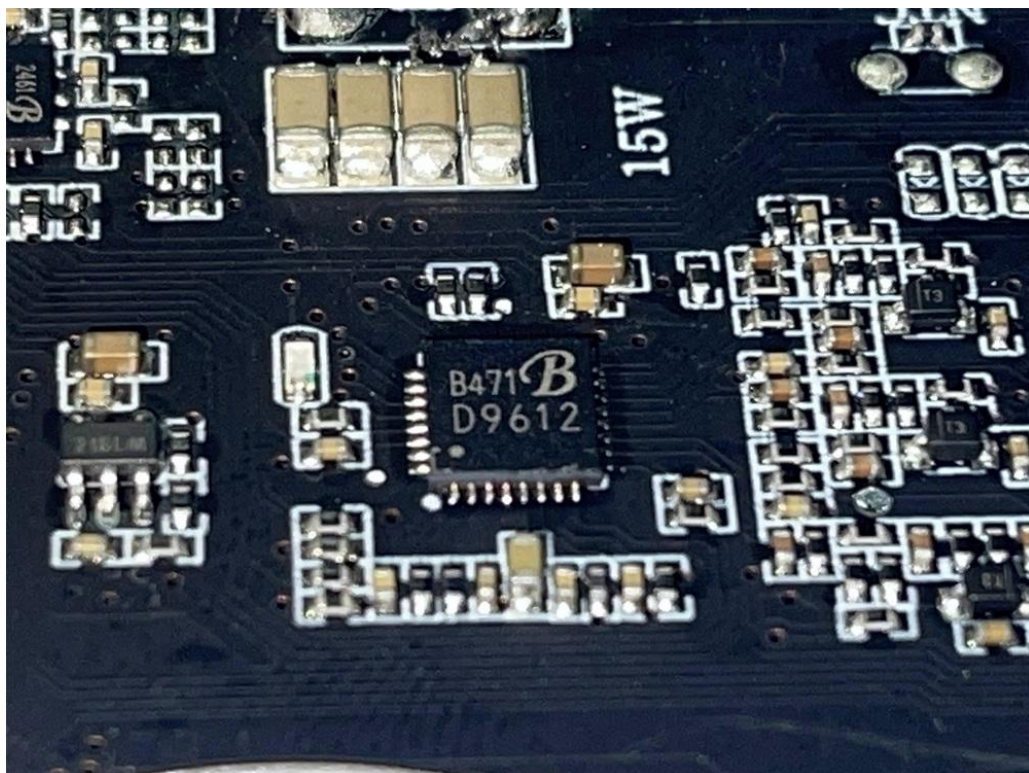


Fig. 18

.....End of Report.....