

TEST REPORT

Product Name : BLE module
Brand Mark : N/A
Model No. : HT-APP-MOD-WT-ZJ-01
FCC ID : 2BB69-HTWT002
Report Number : BLA-EMC-202307-A5902
Date of Sample Receipt : 2023/7/25
Date of Test : 2023/8/3 to 2023/8/20
Date of Issue : 2023/8/22
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Jiangsu Ever-tie Lighting Inc
No 18, East Fuxing Rd, NETDA Nantong, Jiangsu 226015 China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

charlie

Approved by:

Blue Zheng

Review by:

Sueels

Date:

2023/8/22



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/8/22	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT	8
8	LABORATORY LOCATION	9
9	TEST INSTRUMENTS LIST	10
10	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	12
10.1	LIMITS	12
10.2	BLOCK DIAGRAM OF TEST SETUP	12
10.3	PROCEDURE	12
10.4	TEST DATA	14
11	CONDUCTED BAND EDGES MEASUREMENT	16
11.1	LIMITS	16
11.2	BLOCK DIAGRAM OF TEST SETUP	16
11.3	TEST DATA	17
12	RADIATED SPURIOUS EMISSIONS	18
12.1	LIMITS	18
12.2	BLOCK DIAGRAM OF TEST SETUP	19
12.3	PROCEDURE	19
12.4	TEST DATA	21
13	ANTENNA REQUIREMENT	29
13.1	CONCLUSION	29
14	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	30
14.1	LIMITS	30
14.2	BLOCK DIAGRAM OF TEST SETUP	31
14.3	PROCEDURE	31
14.4	TEST DATA	33

15	CONDUCTED SPURIOUS EMISSIONS	37
15.1	LIMITS	37
15.2	BLOCK DIAGRAM OF TEST SETUP	37
15.3	TEST DATA	38
16	POWER SPECTRUM DENSITY	39
16.1	LIMITS	39
16.2	BLOCK DIAGRAM OF TEST SETUP	39
16.3	TEST DATA	39
17	CONDUCTED PEAK OUTPUT POWER	40
17.1	LIMITS	40
17.2	BLOCK DIAGRAM OF TEST SETUP	40
17.3	TEST DATA	41
18	MINIMUM 6DB BANDWIDTH	42
18.1	LIMITS	42
18.2	BLOCK DIAGRAM OF TEST SETUP	42
18.3	TEST DATA	42
19	APPENDIX	43
19.1	MAXIMUM CONDUCTED OUTPUT POWER	43
19.2	-6DB BANDWIDTH	47
19.3	OCCUPIED CHANNEL BANDWIDTH	51
19.4	MAXIMUM POWER SPECTRAL DENSITY LEVEL	55
19.5	BAND EDGE	59
19.6	CONDUCTED RF SPURIOUS EMISSION	64
APPENDIX A: PHOTOGRAPHS OF TEST SETUP		71
APPENDIX B: PHOTOGRAPHS OF EUT		73

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass

2 GENERAL INFORMATION

Applicant	Jiangsu Ever-tie Lighting Inc
Address	No 18, East Fuxing Rd, NETDA Nantong, Jiangsu 226015 China
Manufacturer	ADPOWER TECHNOLOGY (WUXI) INC
Address	BLDG D2, No. 200 Linghu Road, China Sensor Network International Park,
Factory	TAIZHOU ANTEYUAN ELECTRONIC CO.,LTD
Address	2F, C Plant, No203 Zhenxing road, Gaogang, Taizhou, Jiangsu, China 225300
Product Name	BLE module
Test Model No.	HT-APP-MOD-WT-ZJ-01

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	1.0
Software Version	V1.1
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Data Rate	1Mbps; 2Mbps
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	FPC Antenna
Antenna Gain:	3.27dBi (Provided by the customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	AC120V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode
Remark: Only the data of the worst mode would be recorded in this report. For Radiated emission, 1Mbps and 2Mbps mode all have been tested, only worse case 1Mbps mode is reported.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	lenovo	E460C	N/A	N/A

BlueAsia

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

BlueAsia

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2024/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2024/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2024/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2024/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A
SignalGenerator	Agilent	N5182A	MY47420955	2022/9/7	2023/9/6
Audio Analyzer	ATS-1	Audio Precision	ATS141094	2023/07/01	2024/06/30
Electric and Magnetic Field Analyzer	EHP-200A	Narda	180ZX11016	2023/03/30	2024/03/29
Audio shielding box	SB-ABT-C35	SKET	N/A	2022/09/14	2023/09/13
1kHz calibration audio source	MCS-ABT-C35	SKET	N/A	2022/09/14	2023/09/13
Free Field Microphone	MGS MP 663	SKET	0414	2022/09/09	2023/09/08

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2022/09/14	2023/09/13
LISN	R&S	ENV216	3560.6550.15	2022/09/14	2023/09/13
LISN	AT	AT166-2	AKK1806000003	2022/09/14	2023/09/13
ISN	TESEQ	ISNT8-cat6	53580	2022/09/14	2023/09/13
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2022/08/17	2024/08/16
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2022/08/17	2024/08/16
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2024/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2024/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2024/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2024/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14100889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
Audio Analyzer	Audioprecision	N/A	ATSI-41094	2022/7/1	2024/6/30
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A

10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

10.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

10.2 BLOCK DIAGRAM OF TEST SETUP

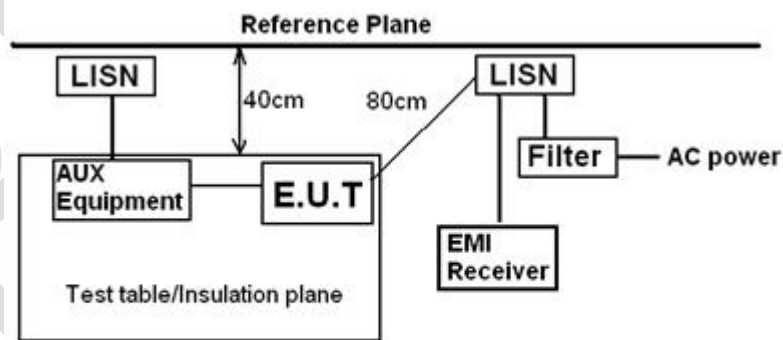

Remark:
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

10.3 PROCEDURE


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
 - 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
 - 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

10.4 TEST DATA

[TestMode: TX]; [Line: Neutral];[Power:AC120V/60Hz]

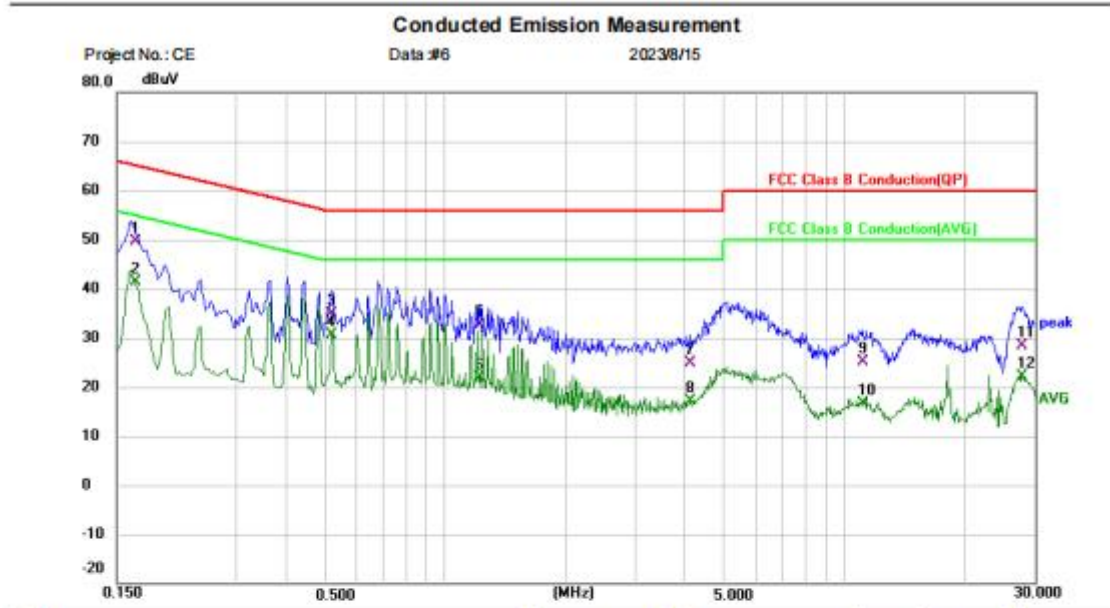


Site: _____ Phase: **N** Temperature: _____ (C)
 Limit: FCC Class B Conduction(QP) Power: _____ Humidity: _____ %RH
 EUT: BLE driver Distance: _____ RBW: 9 KHz
 M/N: HT-APP-MOD-WT-ZJ-01 VBW: 30 KHz Sweep Time: 10 ms
 Mode: TX mode
 Note: _____

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree		
1		0.1660	39.25	10.41	49.66	65.16	-15.50			QP	
2	*	0.1660	31.09	10.41	41.50	55.16	-13.66			AVG	
3		0.5180	24.74	10.05	34.79	56.00	-21.21			QP	
4		0.5180	20.46	10.05	30.51	46.00	-15.49			AVG	
5		1.2180	22.67	10.03	32.70	56.00	-23.30			QP	
6		1.2180	11.87	10.03	21.90	46.00	-24.10			AVG	
7		4.1220	15.08	9.89	24.97	56.00	-31.03			QP	
8		4.1220	7.29	9.89	17.18	46.00	-28.82			AVG	
9		11.1220	15.17	9.96	25.13	60.00	-34.87			QP	
10		11.1220	6.66	9.96	16.62	50.00	-33.38			AVG	
11		27.9300	18.54	9.96	28.50	60.00	-31.50			QP	
12		27.9300	12.26	9.96	22.22	50.00	-27.78			AVG	

Test Result: Pass

[TestMode: TX]; [Line: Line];[Power:AC120V/60Hz]

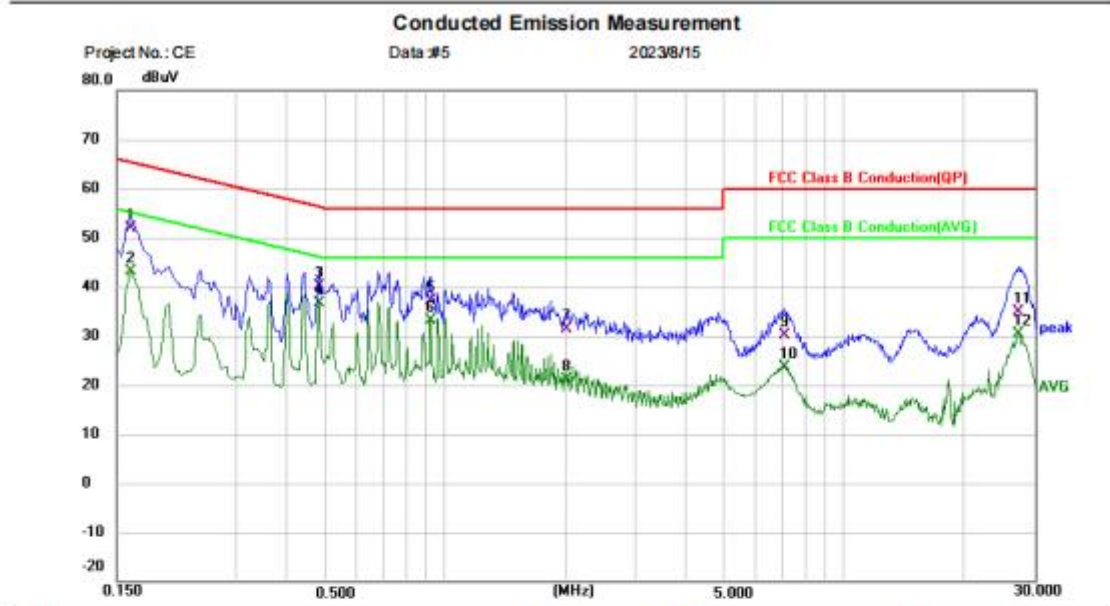

Project No.: CE
Data #5
2023/8/15

Site: Phase: **L1** Temperature: (C)
Limit: FCC Class B Conduction(QP) Power: Humidity: %RH
EUT: BLE driver Distance: RBW: 9 KHz
M/N: HT-APP-MOD-WT-ZJ-01 VBW: 30 KHz Sweep Time: 10 ms
Mode: TX mode
Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	0.1620	41.45	10.48	51.93	65.36	-13.43			QP	
2	0.1620	32.56	10.48	43.04	55.36	-12.32			AVG	
3	0.4820	30.14	10.08	40.22	56.30	-16.08			QP	
4 *	0.4820	26.67	10.08	36.75	46.30	-9.55			AVG	
5	0.9220	27.10	10.10	37.20	56.00	-18.80			QP	
6	0.9220	23.15	10.10	33.25	46.00	-12.75			AVG	
7	2.0180	21.01	10.31	31.32	56.00	-24.68			QP	
8	2.0180	10.73	10.31	21.04	46.00	-24.96			AVG	
9	7.0980	20.14	10.07	30.21	60.00	-29.79			QP	
10	7.0980	13.58	10.07	23.65	50.00	-26.35			AVG	
11	27.2740	24.75	10.01	34.76	60.00	-25.24			QP	
12	27.2740	20.29	10.01	30.30	50.00	-19.70			AVG	

Test Result: Pass


11 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

11.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

11.2 BLOCK DIAGRAM OF TEST SETUP

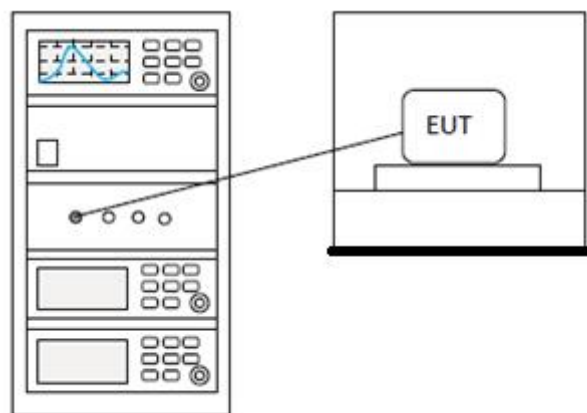

11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

12 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

12.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

12.2 BLOCK DIAGRAM OF TEST SETUP

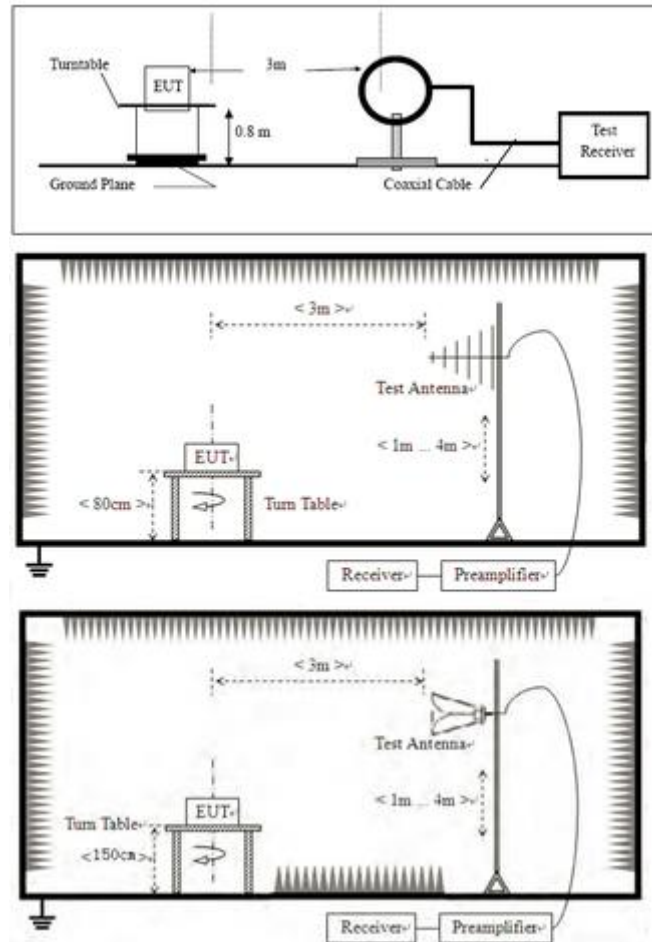

12.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

12.4 TEST DATA

Below 1GHz


[TestMode: TX]; [Polarity: Horizontal]

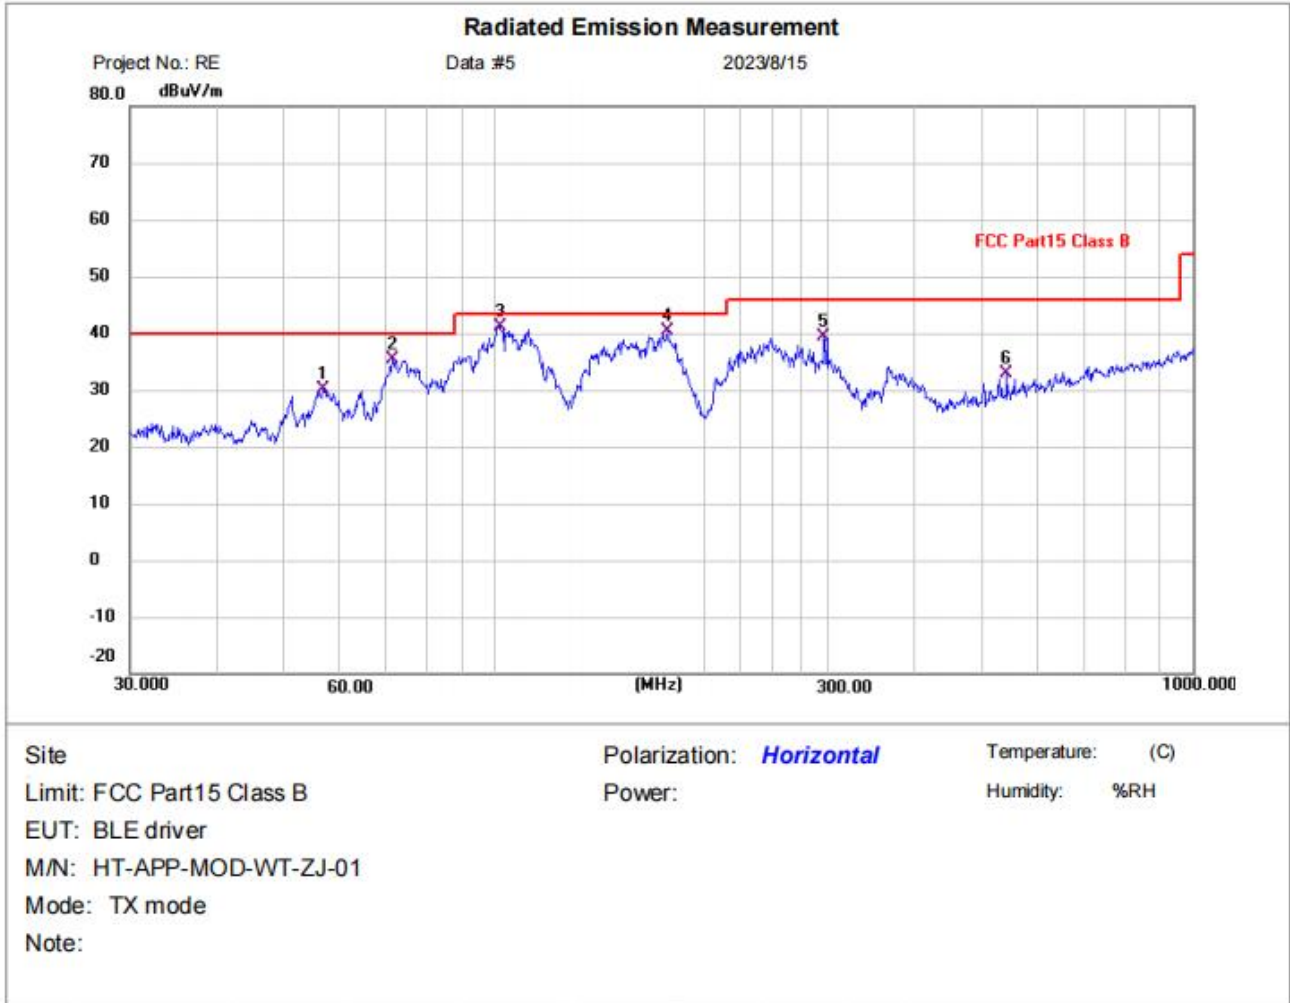

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	56.7917	7.07	23.11	30.18	40.00	-9.82	QP	P	
2	71.3300	14.61	20.80	35.41	40.00	-4.59	QP	P	
3 *	101.6443	21.44	19.79	41.23	43.50	-2.27	QP	P	
4	176.8878	18.27	22.08	40.35	43.50	-3.15	QP	P	
5	296.1836	16.22	23.23	39.45	46.00	-6.55	QP	P	
6	541.3725	4.26	28.69	32.95	46.00	-13.05	QP	P	

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

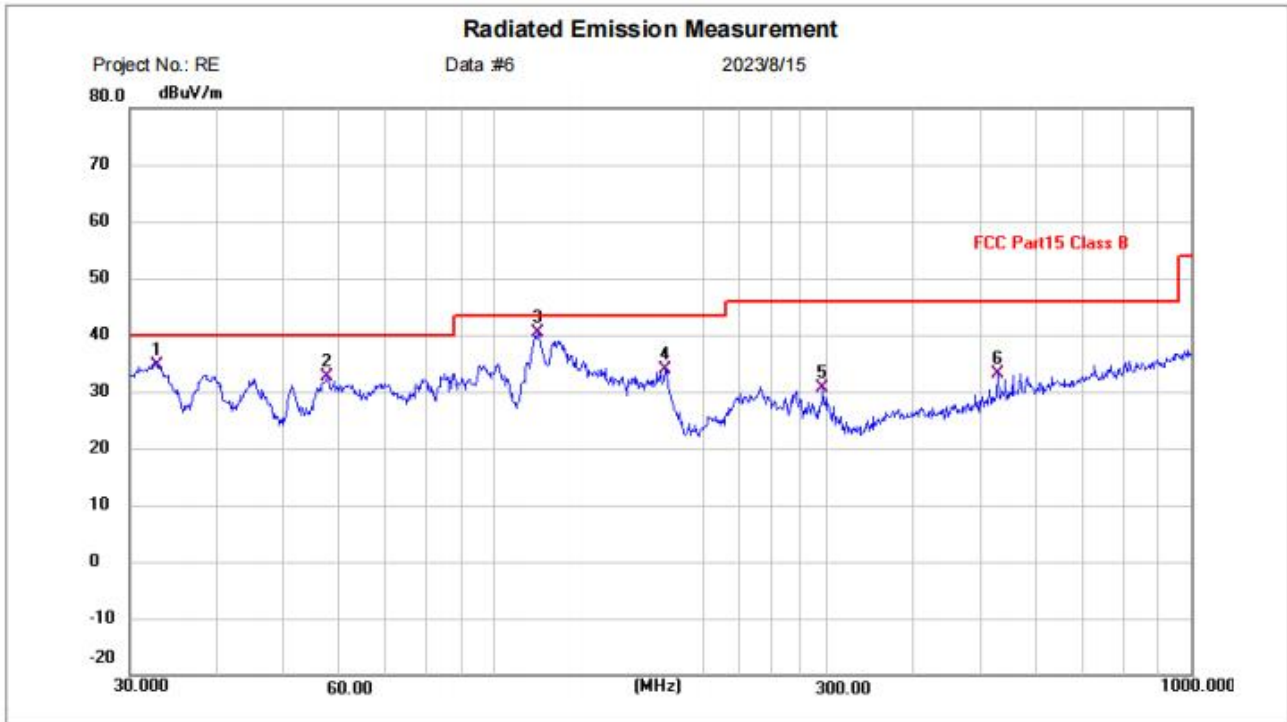


Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 Class B Power: Humidity: %RH
EUT: BLE driver
M/N: HT-APP-MOD-WT-ZJ-01
Mode: TX mode
Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	32.8636	11.79	22.89	34.68	40.00	-5.32	QP	P	
2	57.5939	9.85	22.68	32.53	40.00	-7.47	QP	P	
3 *	115.3205	19.45	20.90	40.35	43.50	-3.15	QP	P	
4	175.6516	11.65	22.26	33.91	43.50	-9.59	QP	P	
5	296.1836	7.39	23.23	30.62	46.00	-15.38	QP	P	
6	528.2458	4.74	28.44	33.18	46.00	-12.82	QP	P	

Test Result: Pass

Above 1GHz:

[TestMode: TX low channel]; [Polarity: Horizontal]

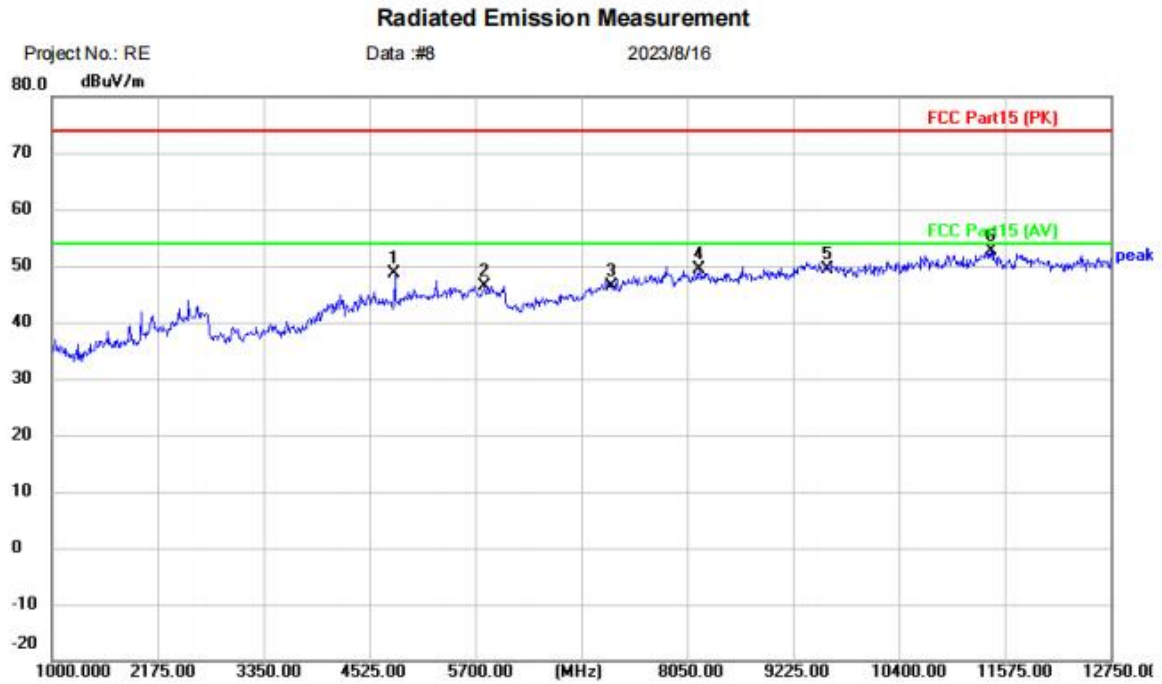


Site Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: BLE driver
 M/N: HT-APP-MOD-WT-ZJ-01
 Mode: TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	44.12	4.51	48.63	74.00	-25.37	peak	
2		5805.750	40.21	6.22	46.43	74.00	-27.57	peak	
3		7206.000	39.04	7.41	46.45	74.00	-27.55	peak	
4		8179.250	40.69	8.59	49.28	74.00	-24.72	peak	
5		9608.000	37.87	11.59	49.46	74.00	-24.54	peak	
6	*	11422.25	39.26	13.44	52.70	74.00	-21.30	peak	

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

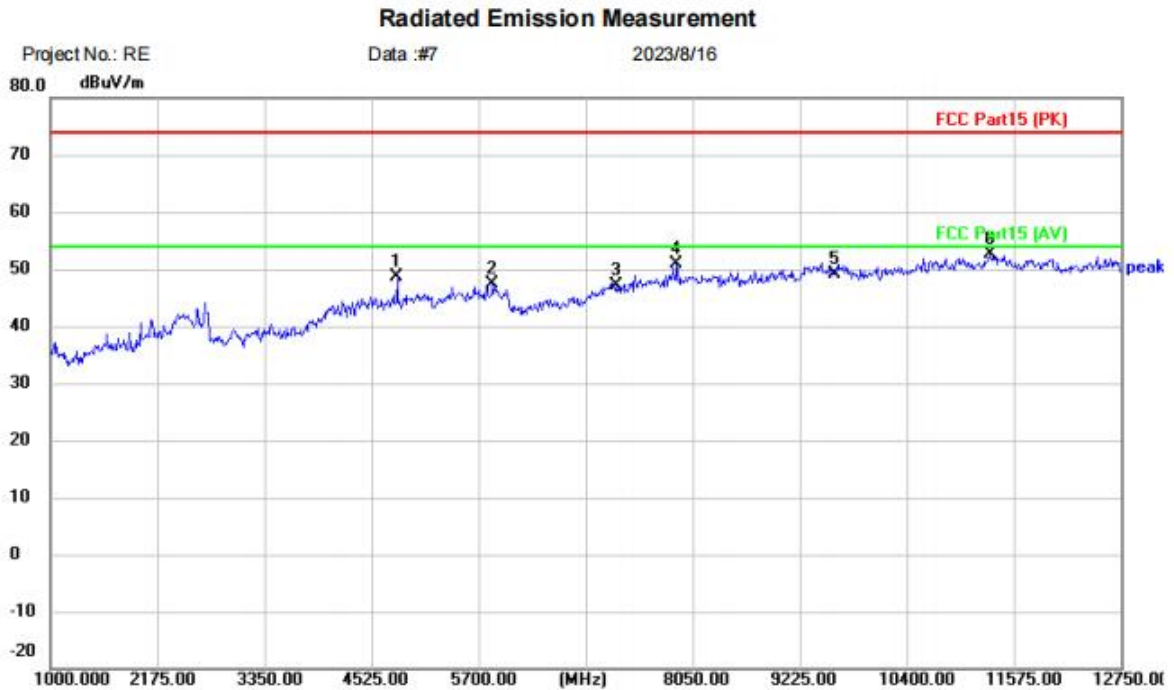


Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: BLE driver
 M/N: HT-APP-MOD-WT-ZJ-01
 Mode: TX-L
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	44.22	4.51	48.73	74.00	-25.27	peak	
2		5852.750	40.92	6.58	47.50	74.00	-26.50	peak	
3		7206.000	39.67	7.41	47.08	74.00	-26.92	peak	
4		7873.750	42.24	8.62	50.86	74.00	-23.14	peak	
5		9608.000	37.66	11.59	49.25	74.00	-24.75	peak	
6	*	11316.50	39.13	13.39	52.52	74.00	-21.48	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

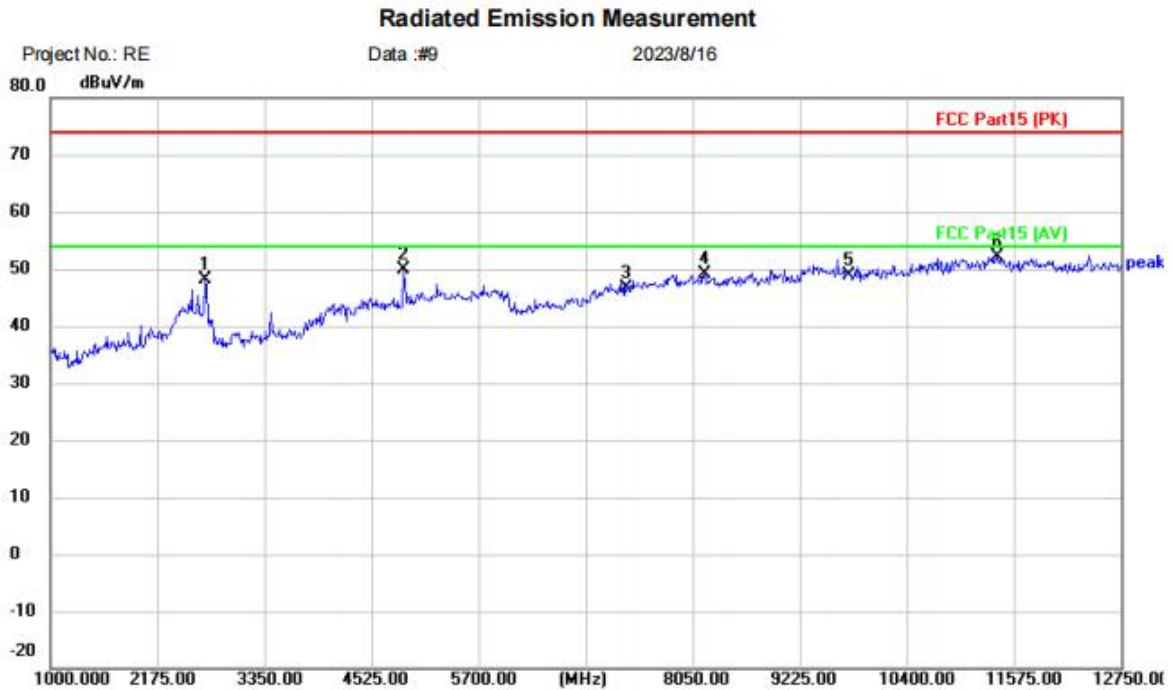


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: BLE driver
 M/N: HT-APP-MOD-WT-ZJ-01
 Mode: TX-M
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2692.000	51.61	-3.53	48.08	74.00	-25.92	peak	
2		4877.500	45.28	4.59	49.87	74.00	-24.13	peak	
3		7326.000	38.69	7.82	46.51	74.00	-27.49	peak	
4		8179.250	40.51	8.59	49.10	74.00	-24.90	peak	
5		9768.000	37.06	11.77	48.83	74.00	-25.17	peak	
6	*	11387.00	38.71	13.41	52.12	74.00	-21.88	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

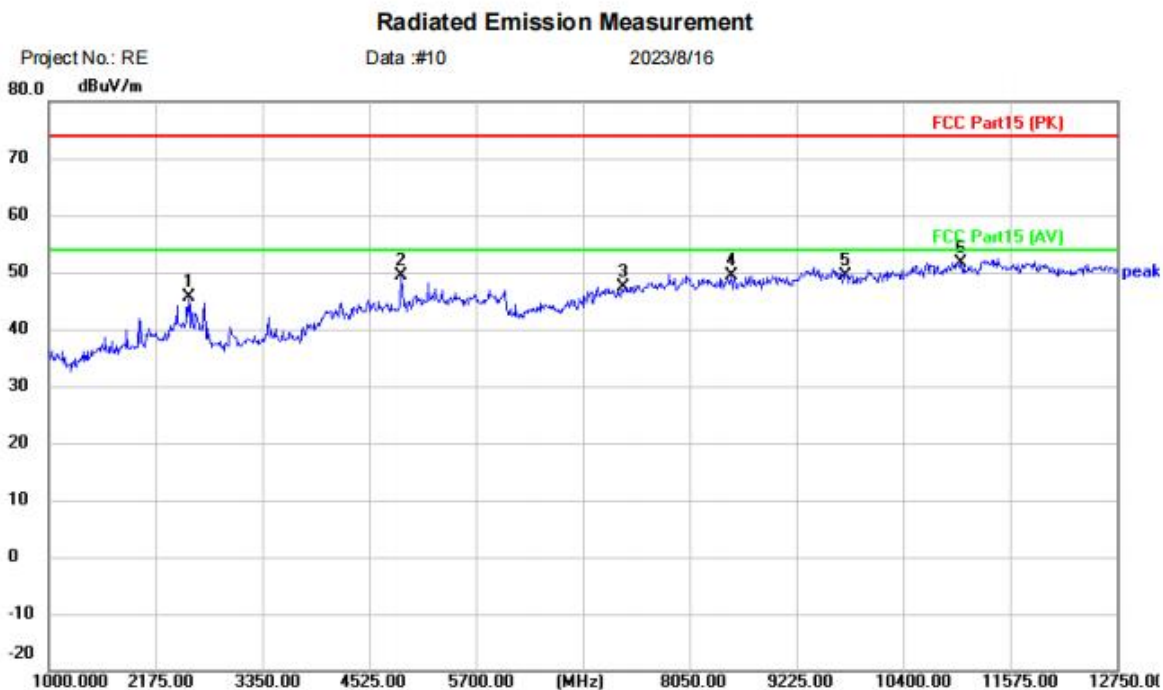


Site: _____ Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: _____ Humidity: %RH
 EUT: BLE driver
 M/N: HT-APP-MOD-WT-ZJ-01
 Mode: TX-M
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2539.250	49.03	-3.30	45.73	74.00	-28.27	peak	
2		4877.500	44.78	4.59	49.37	74.00	-24.63	peak	
3		7326.000	39.57	7.82	47.39	74.00	-26.61	peak	
4		8508.250	39.93	9.49	49.42	74.00	-24.58	peak	
5		9768.000	37.62	11.77	49.39	74.00	-24.61	peak	
6	*	11034.50	37.96	13.62	51.58	74.00	-22.42	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

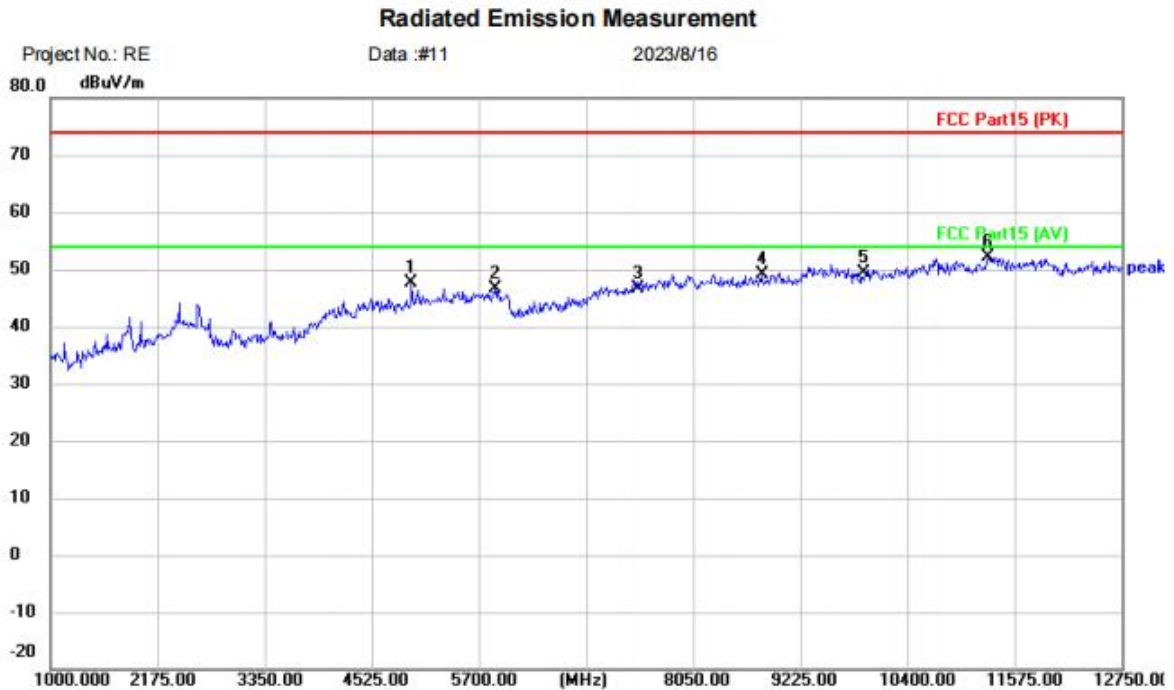


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: BLE driver		
M/N: HT-APP-MOD-WT-ZJ-01		
Mode: TX-H		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4959.750	42.21	5.47	47.68	74.00	-26.32	peak	
2		5876.250	40.00	6.66	46.66	74.00	-27.34	peak	
3		7440.000	38.35	8.24	46.59	74.00	-27.41	peak	
4		8802.000	39.19	10.02	49.21	74.00	-24.79	peak	
5		9920.000	37.42	11.96	49.38	74.00	-24.62	peak	
6	*	11281.25	38.73	13.36	52.09	74.00	-21.91	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Vertical]

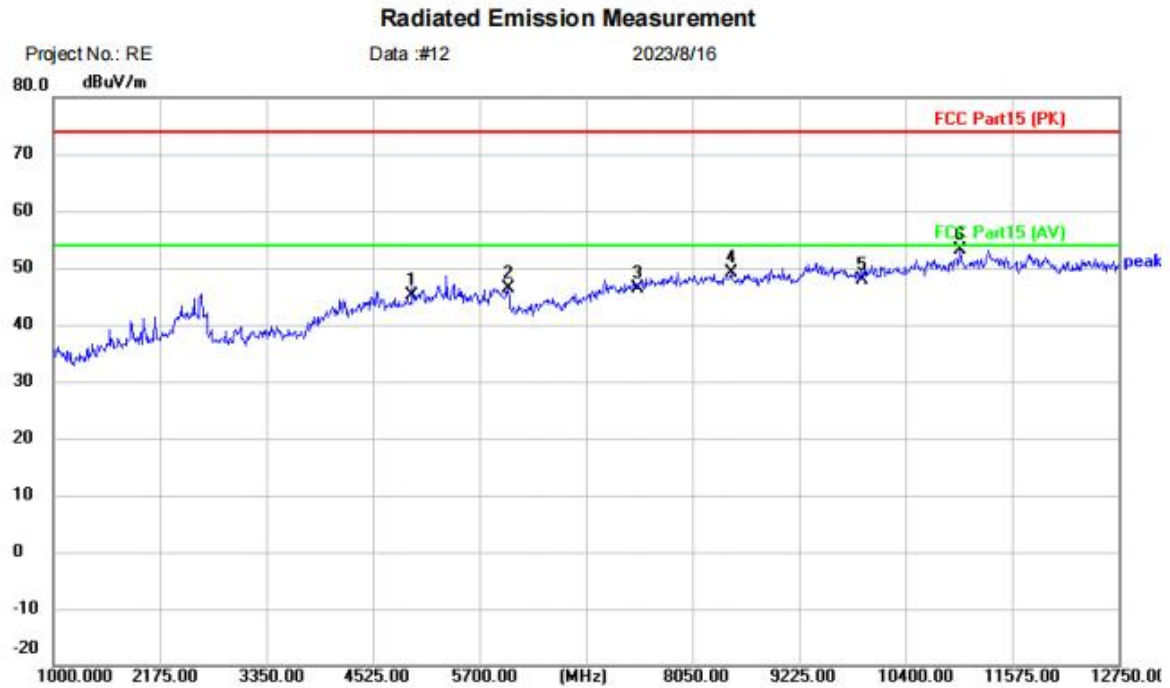

Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: BLE driver
 M/N: HT-APP-MOD-WT-ZJ-01
 Mode: TX-H
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	39.68	5.47	45.15	74.00	-28.85	peak	
2		6017.250	42.81	3.57	46.38	74.00	-27.62	peak	
3		7440.000	38.19	8.24	46.43	74.00	-27.57	peak	
4		8473.000	39.80	9.31	49.11	74.00	-24.89	peak	
5		9920.000	35.98	11.96	47.94	74.00	-26.06	peak	
6	*	10999.25	39.19	13.82	53.01	74.00	-20.99	peak	

Test Result: Pass

13 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


13.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.27dBi.

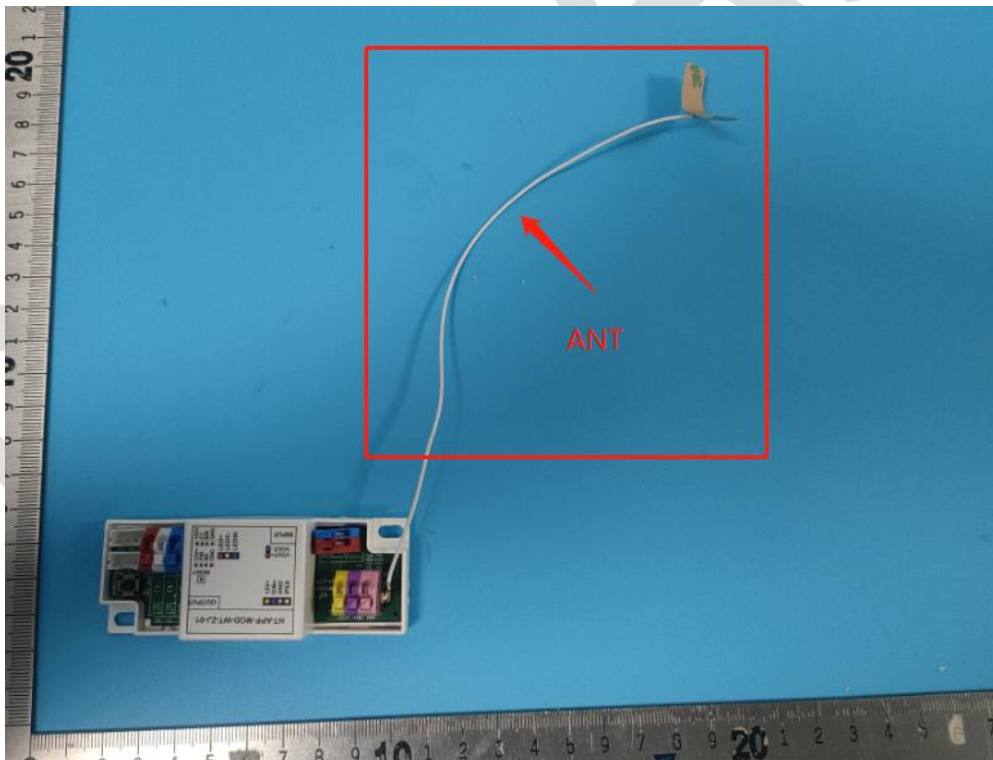

14 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

14.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

14.2 BLOCK DIAGRAM OF TEST SETUP

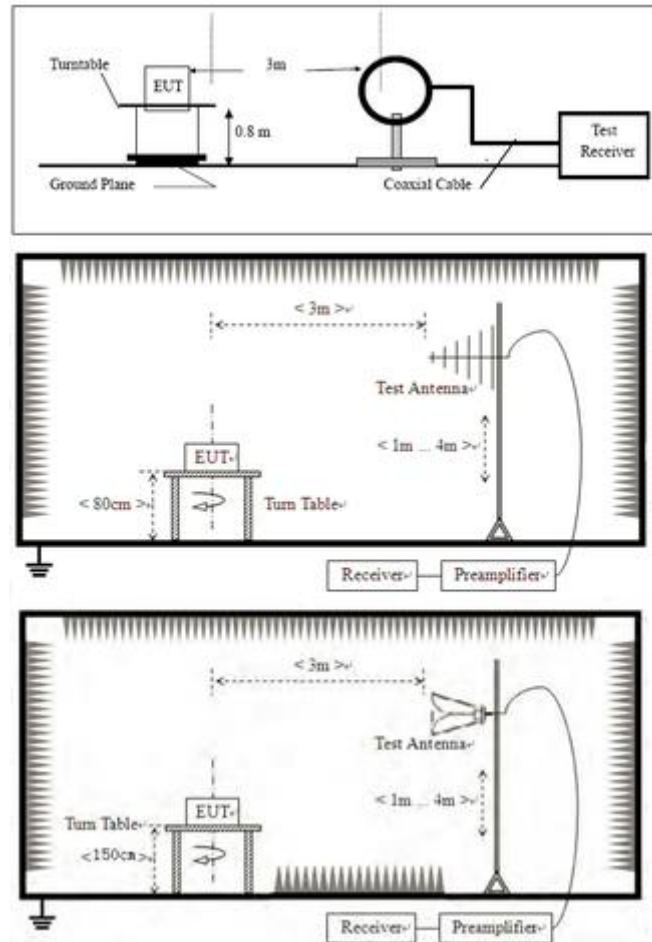

14.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

14.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

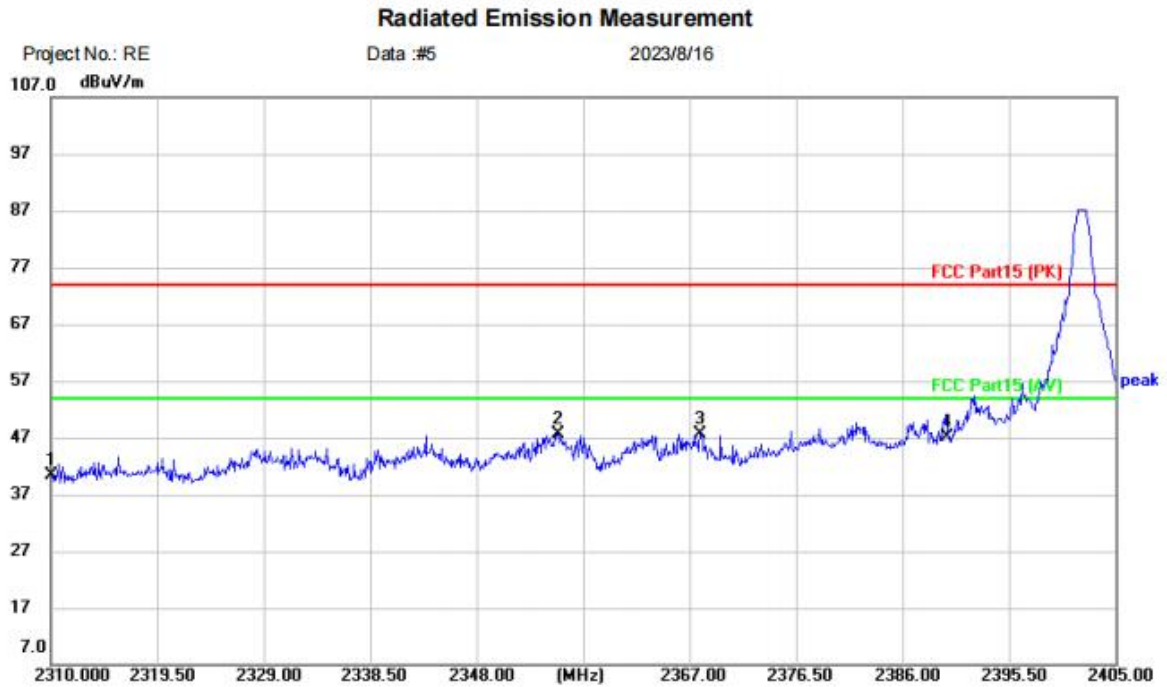


Site Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: BLE driver
 M/N: HT-APP-MOD-WT-ZJ-01
 Mode: TX-L
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	44.85	-4.40	40.45	74.00	-33.55	peak	
2		2355.315	52.06	-4.34	47.72	74.00	-26.28	peak	
3	*	2367.950	52.07	-4.33	47.74	74.00	-26.26	peak	
4		2390.000	51.38	-4.31	47.07	74.00	-26.93	peak	

Test Result: Pass

[TestMode:TX low channel]; [Polarity: Vertical]

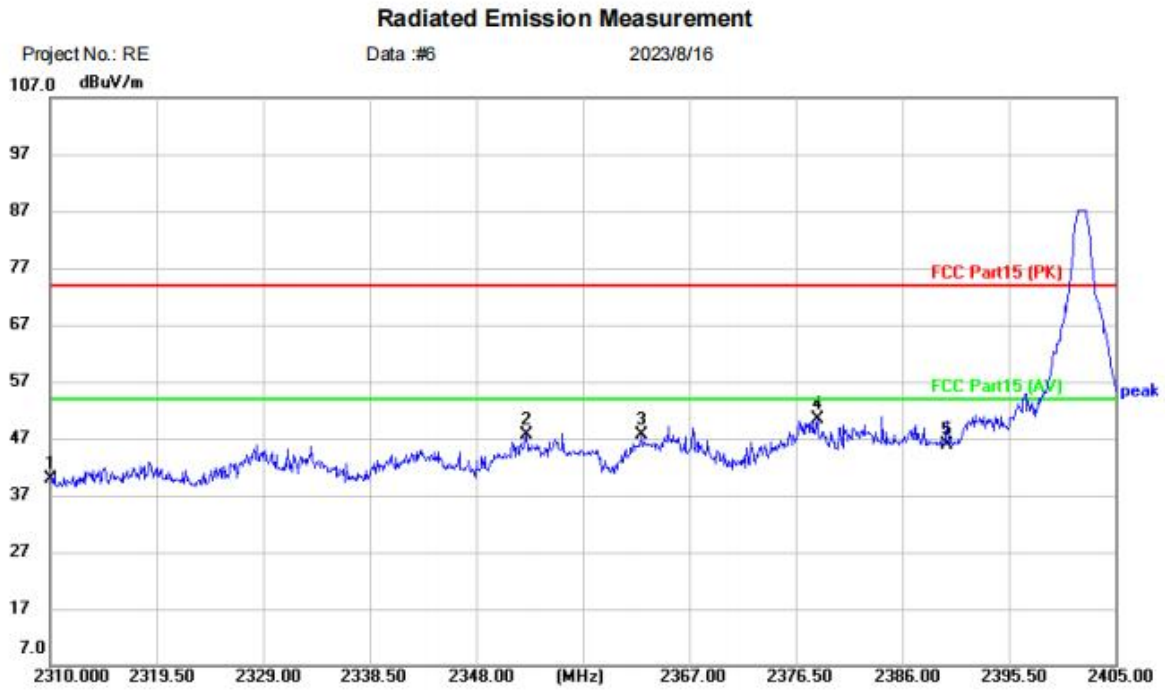

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: BLE driver

M/N: HT-APP-MOD-WT-ZJ-01


Mode: TX-L

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2310.000	44.16	-4.40	39.76	74.00	-34.24	peak	
2		2352.465	52.01	-4.35	47.66	74.00	-26.34	peak	
3		2362.725	52.05	-4.33	47.72	74.00	-26.28	peak	
4	*	2378.400	54.62	-4.32	50.30	74.00	-23.70	peak	
5		2390.000	50.16	-4.31	45.85	74.00	-28.15	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

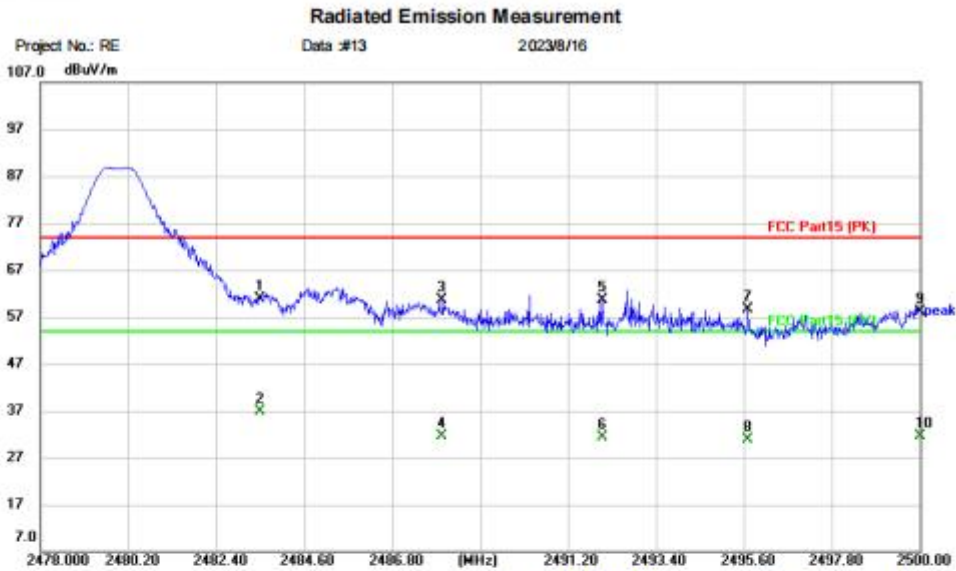


Site:
Limit: FCC Part15 (PK)
EUT: BLE driver
MN: HT-APP-MOD-WT-ZJ-01
Mode: TX-H
Note:
Polarization: *Horizontal*
Temperature: (C)
Humidity: %RH
Power:

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2483.500	65.54	-4.64	60.90	74.00	-13.10	peak	
2		2483.500	41.51	-4.64	36.87	54.00	-17.13	AVG	
3		2488.054	65.19	-4.67	60.52	74.00	-13.48	peak	
4		2488.054	36.19	-4.67	31.52	54.00	-22.48	AVG	
5		2492.058	65.25	-4.70	60.55	74.00	-13.45	peak	
6		2492.058	36.17	-4.70	31.47	54.00	-22.53	AVG	
7		2495.710	63.23	-4.72	58.51	74.00	-15.49	peak	
8		2495.710	35.55	-4.72	30.83	54.00	-23.17	AVG	
9		2500.000	62.89	-4.75	58.14	74.00	-15.86	peak	
10		2500.000	36.27	-4.75	31.52	54.00	-22.48	AVG	

Test Result: Pass

[TestMode:TX High channel]; [Polarity: Vertical]

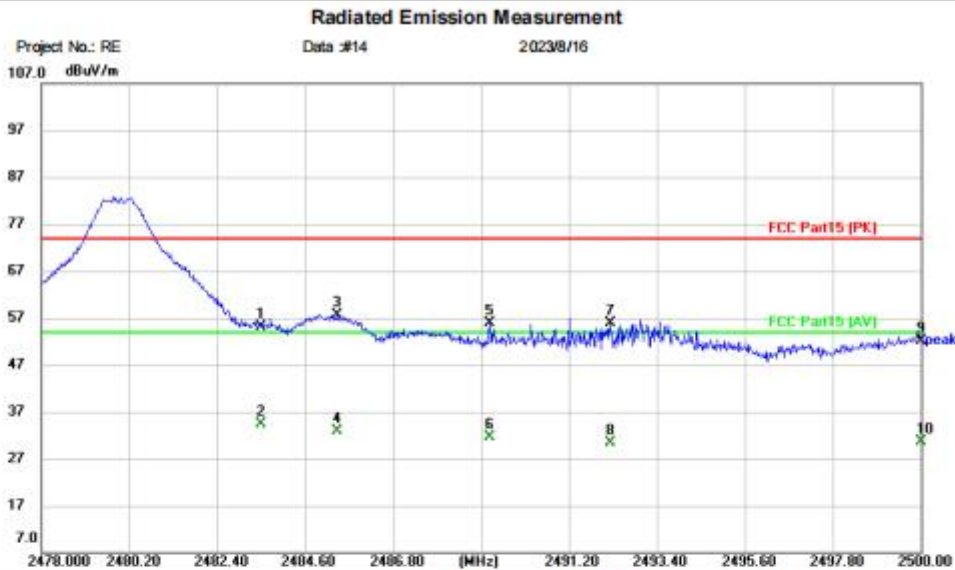

Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: BLE driver
M/N: HT-APP-MOD-WT-Z-J-01
Mode: TX-H
Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	2483.500	59.74	-4.64	55.10	74.00	-18.90	peak	
2	2483.500	39.08	-4.64	34.44	54.00	-19.56	AVG	
3 *	2485.392	62.21	-4.65	57.56	74.00	-16.44	peak	
4	2485.392	37.47	-4.65	32.82	54.00	-21.18	AVG	
5	2489.220	60.50	-4.67	55.83	74.00	-18.17	peak	
6	2489.220	36.29	-4.67	31.62	54.00	-22.38	AVG	
7	2492.234	60.56	-4.70	55.86	74.00	-18.14	peak	
8	2492.234	35.03	-4.70	30.33	54.00	-23.67	AVG	
9	2500.000	56.83	-4.75	52.08	74.00	-21.92	peak	
10	2500.000	35.41	-4.75	30.66	54.00	-23.34	AVG	

Test Result: Pass


15 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

15.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

15.2 BLOCK DIAGRAM OF TEST SETUP

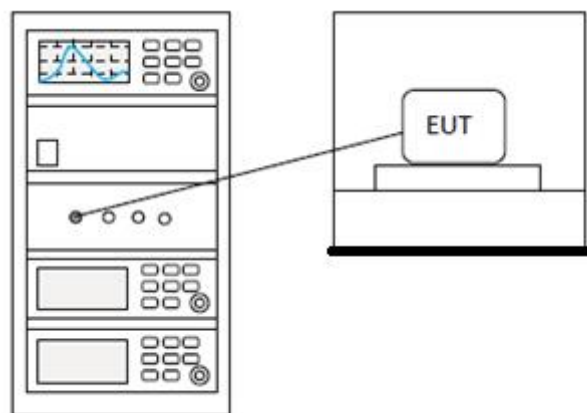

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


16 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

16.1 LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

16.2 BLOCK DIAGRAM OF TEST SETUP

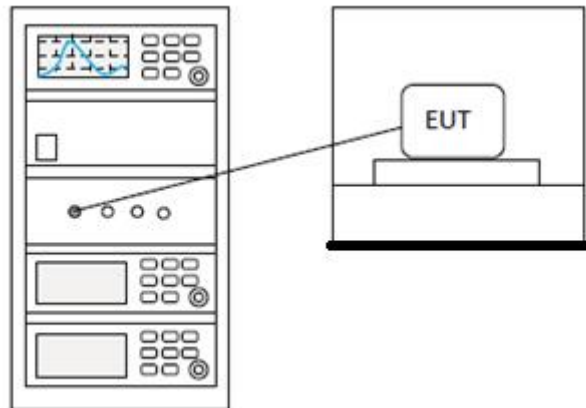

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


17 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

17.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

17.2 BLOCK DIAGRAM OF TEST SETUP

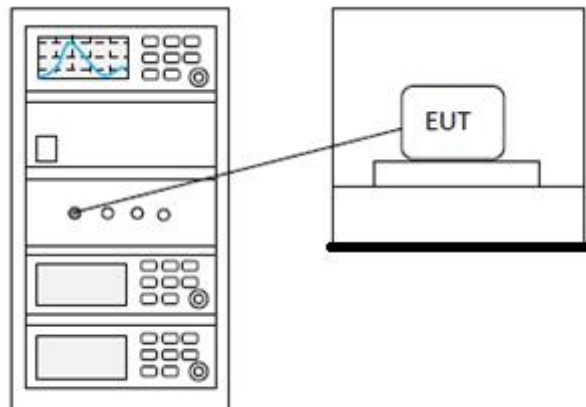

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


18 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

18.1 LIMITS

Limit:	≥500 kHz
--------	----------

18.2 BLOCK DIAGRAM OF TEST SETUP

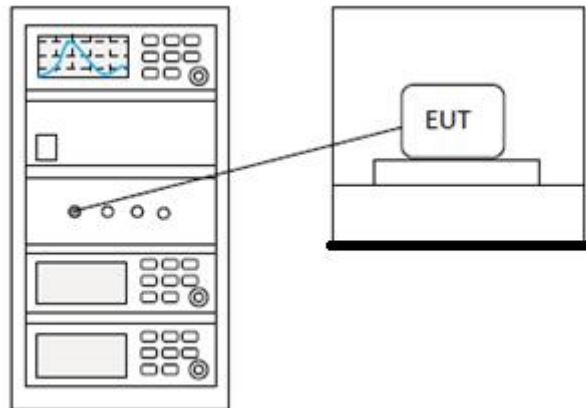

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


19 APPENDIX

Appendix1


19.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequen cy (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	0.77	0	0.77	30	Pass
NVNT	BLE 1M	2442	Ant1	0.075	0	0.075	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.607	0	-0.607	30	Pass
NVNT	BLE 2M	2402	Ant1	0.773	0	0.773	30	Pass
NVNT	BLE 2M	2442	Ant1	0.453	0	0.453	30	Pass
NVNT	BLE 2M	2480	Ant1	-0.006	0	-0.006	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

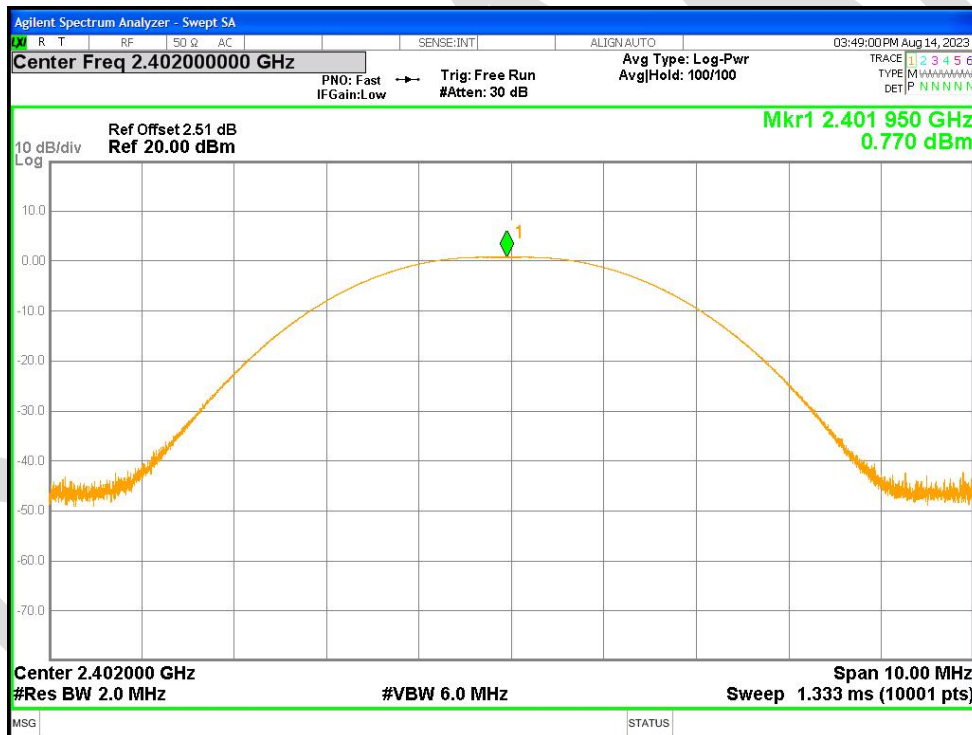


Power NVNT BLE 1M 2442MHz Ant1

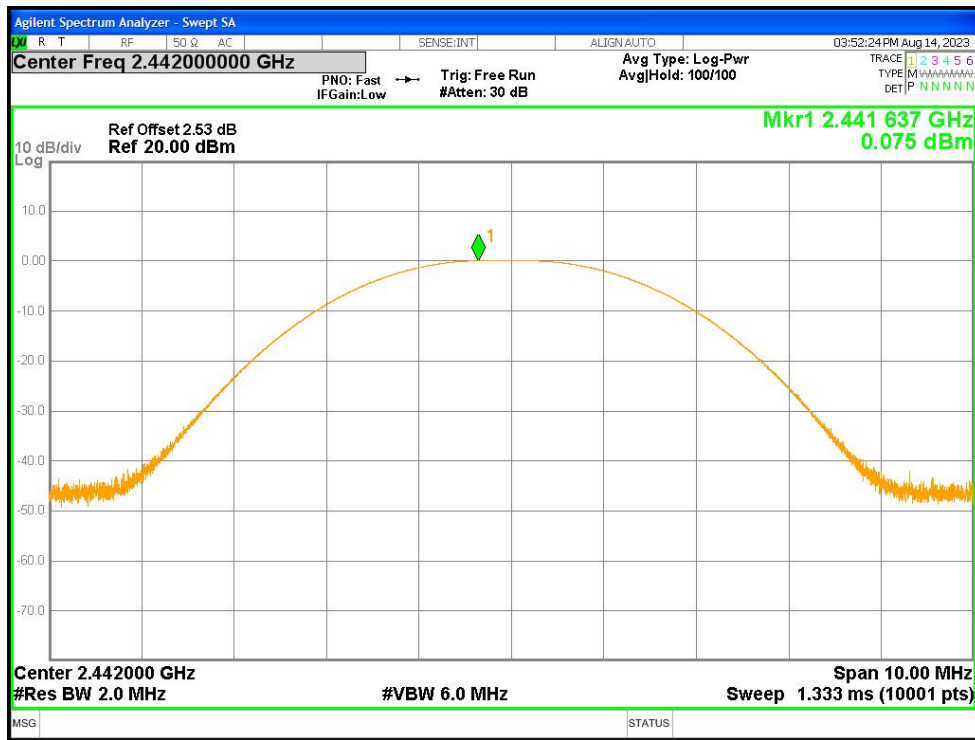


Power NVNT BLE 1M 2480MHz Ant1

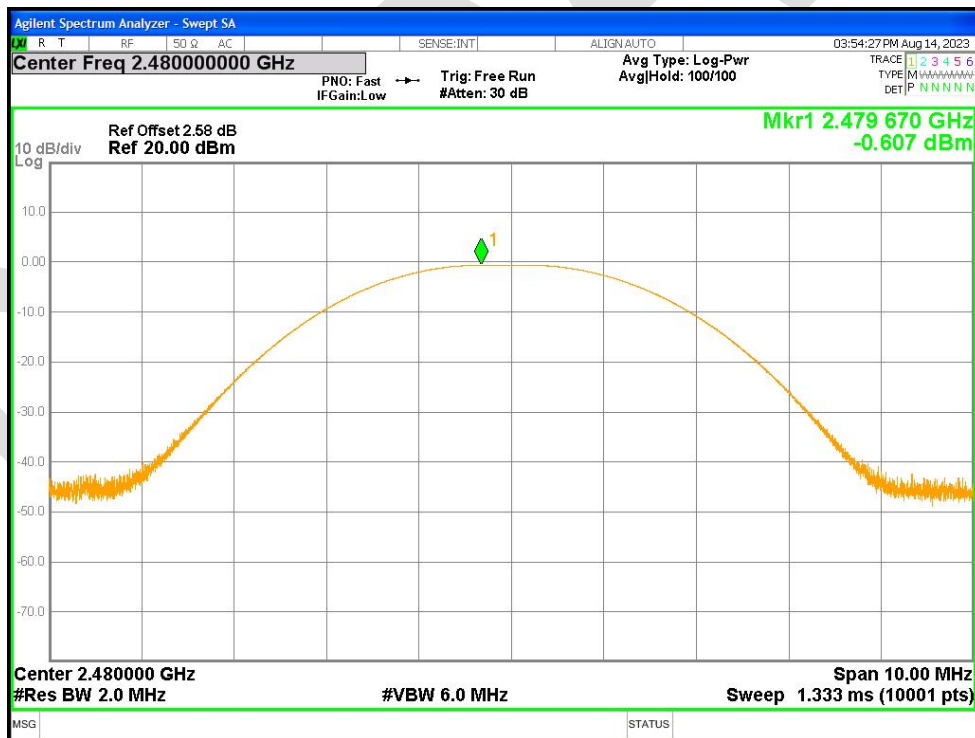


Power NVNT BLE 2M 2402MHz Ant1

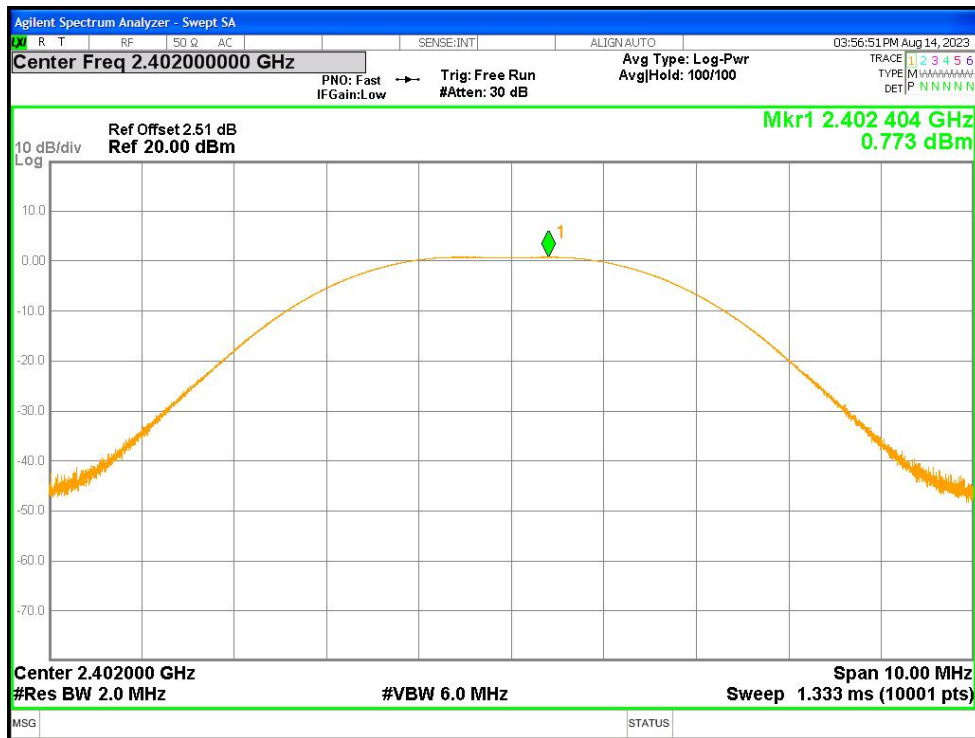

Power NVNT BLE 2M 2442MHz Ant1

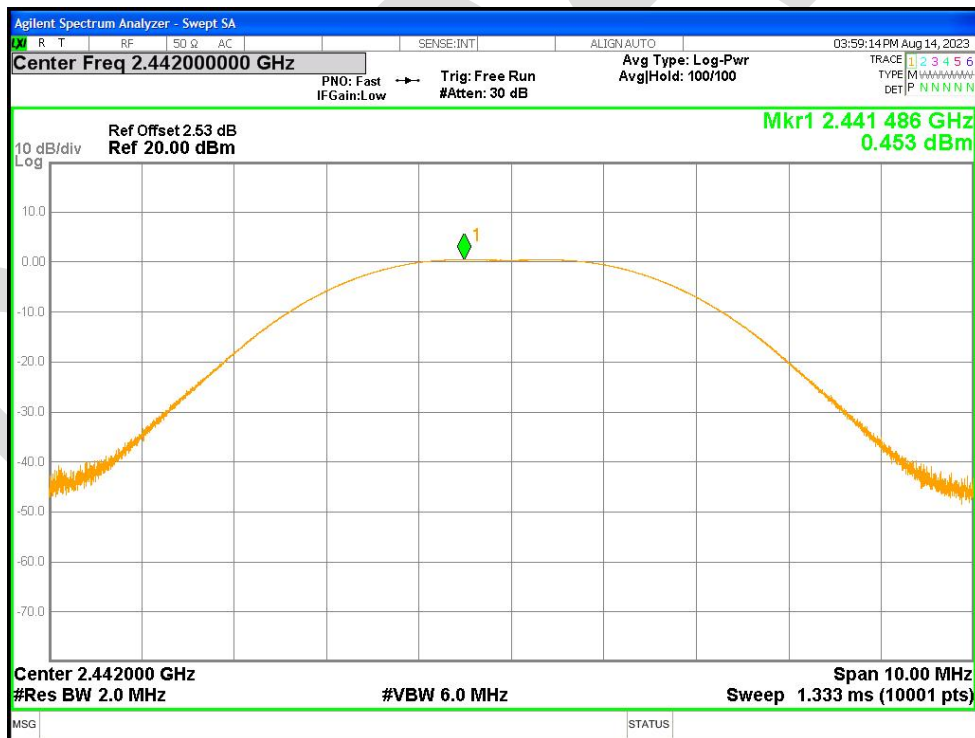


Power NVNT BLE 2M 2480MHz Ant1

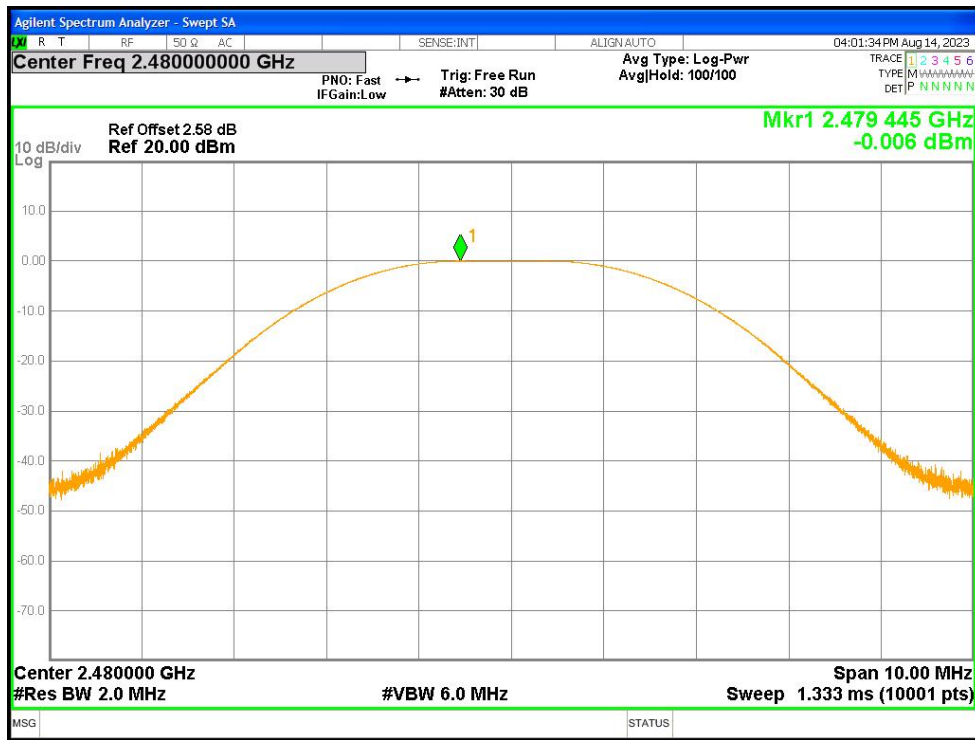


19.2 -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.670	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.682	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.682	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.309	0.5	Pass
NVNT	BLE 2M	2442	Ant1	1.412	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.379	0.5	Pass


-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

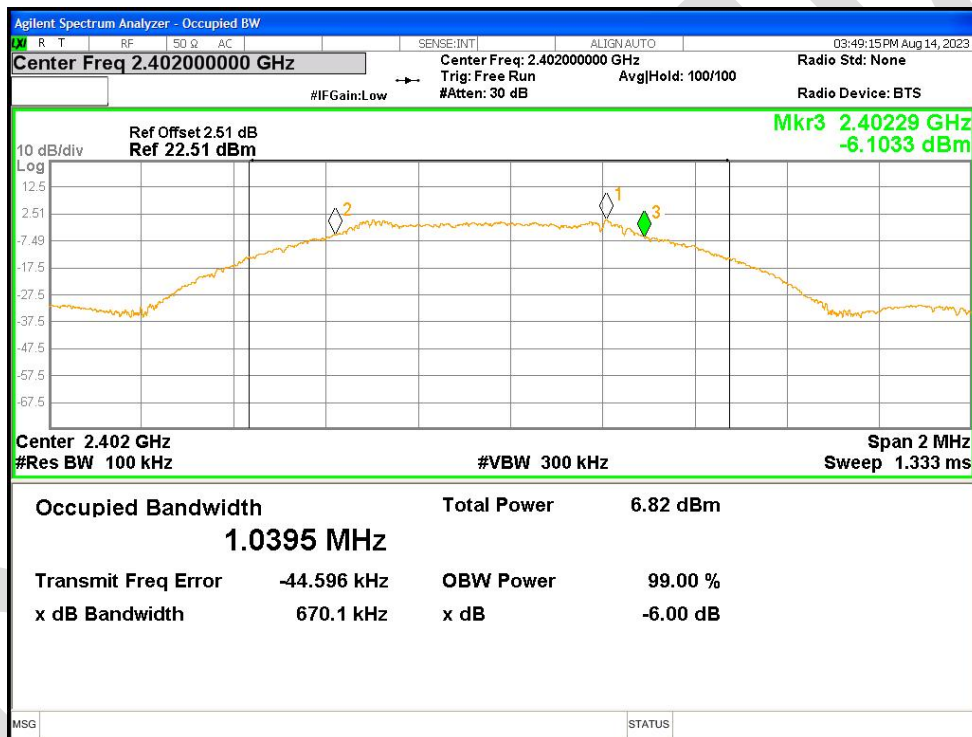


-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

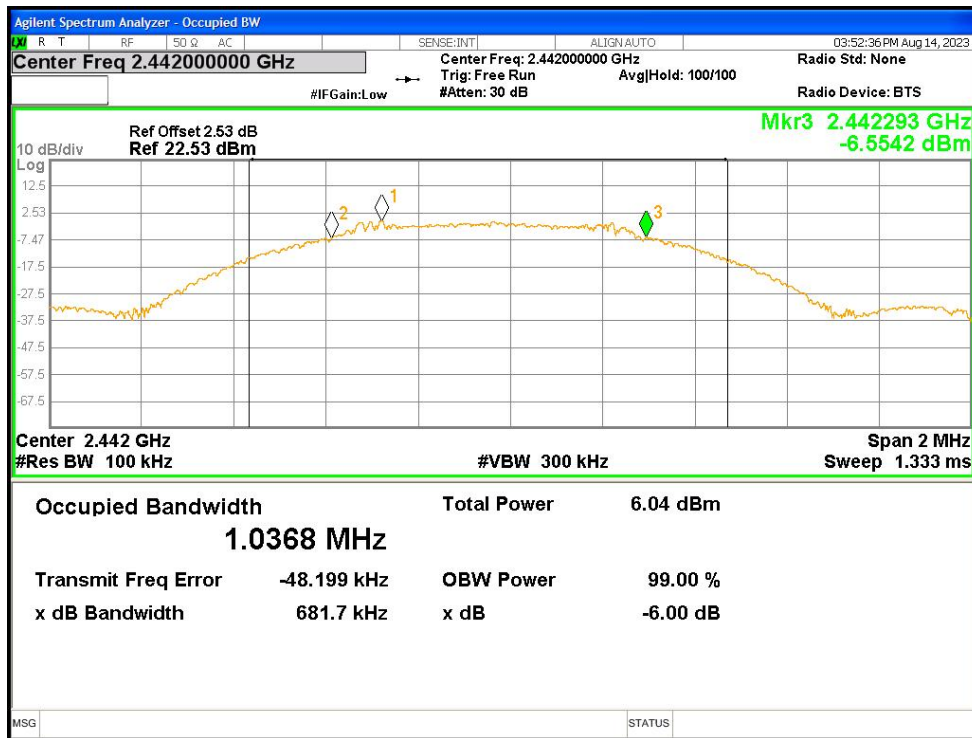


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

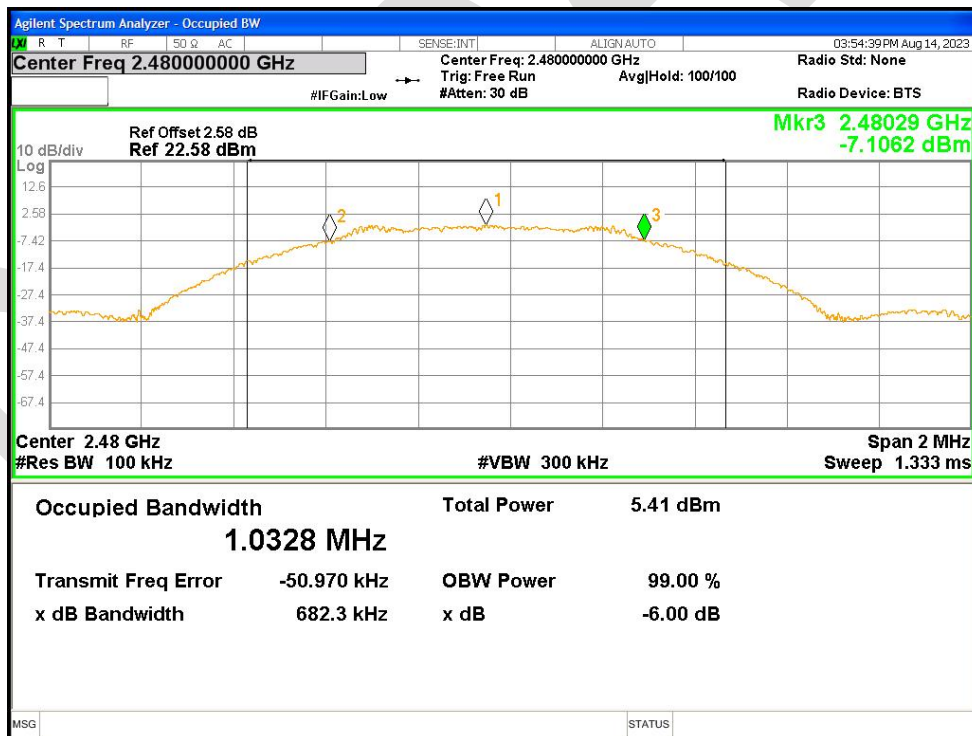


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

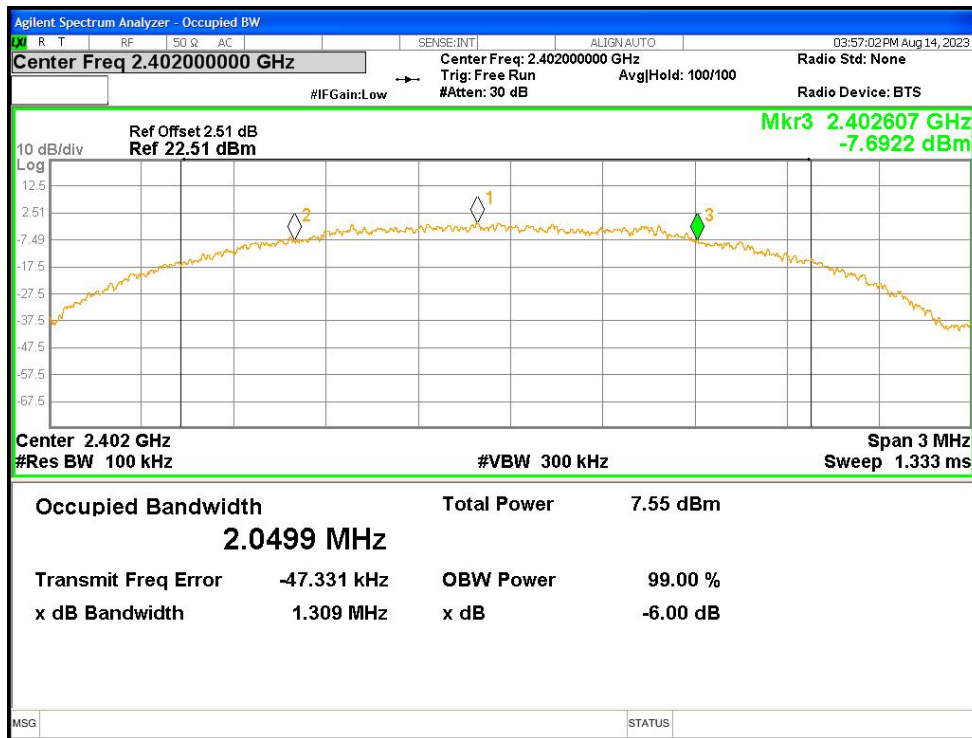

-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1

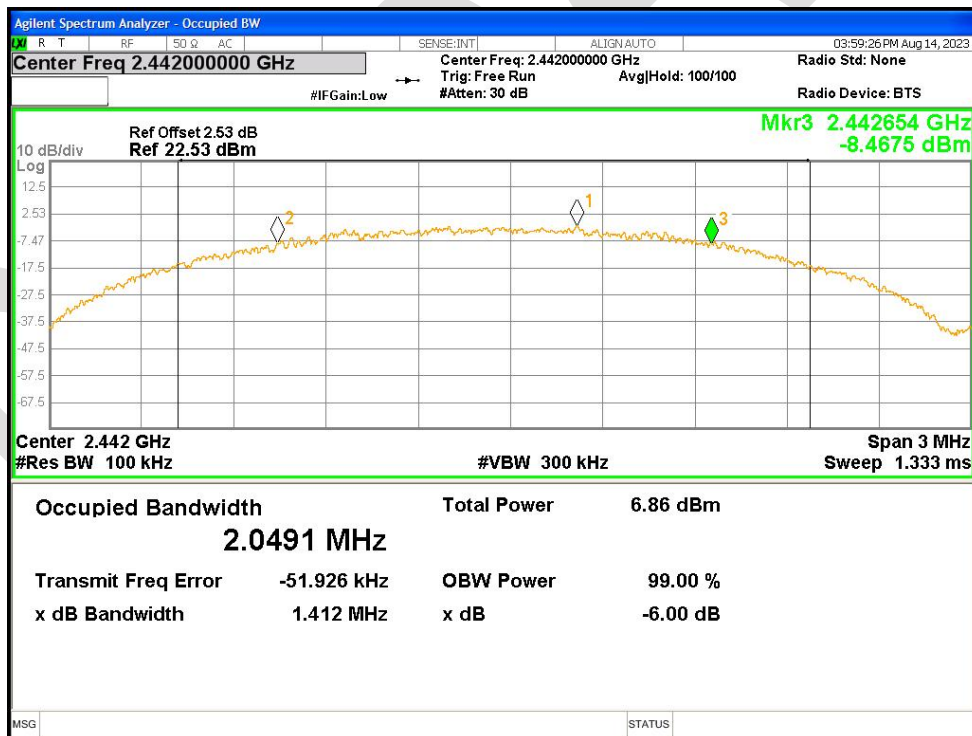


-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

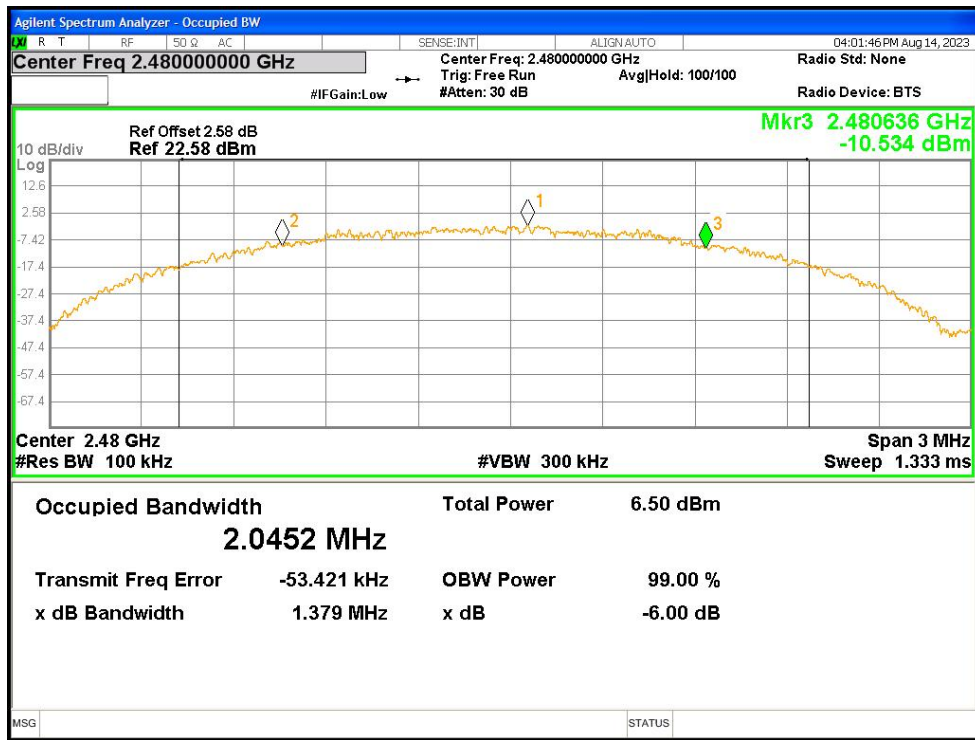


19.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.0292
NVNT	BLE 1M	2442	Ant1	1.0278
NVNT	BLE 1M	2480	Ant1	1.0173
NVNT	BLE 2M	2402	Ant1	2.0500
NVNT	BLE 2M	2442	Ant1	2.0270
NVNT	BLE 2M	2480	Ant1	2.0415


OBW NVNT BLE 1M 2402MHz Ant1

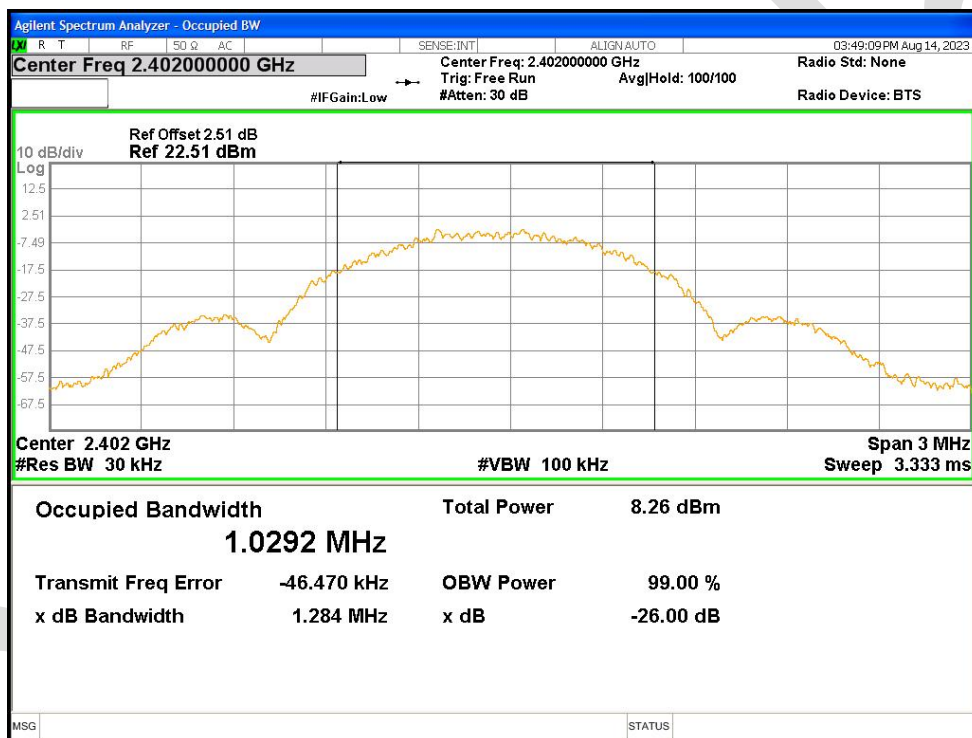


OBW NVNT BLE 1M 2442MHz Ant1

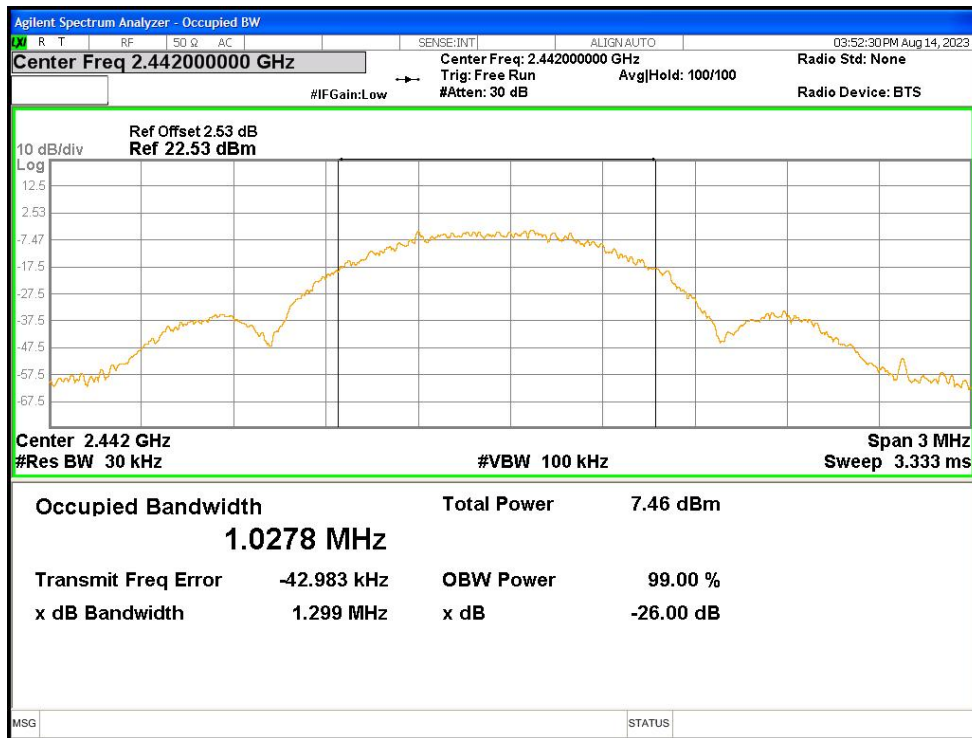


OBW NVNT BLE 1M 2480MHz Ant1

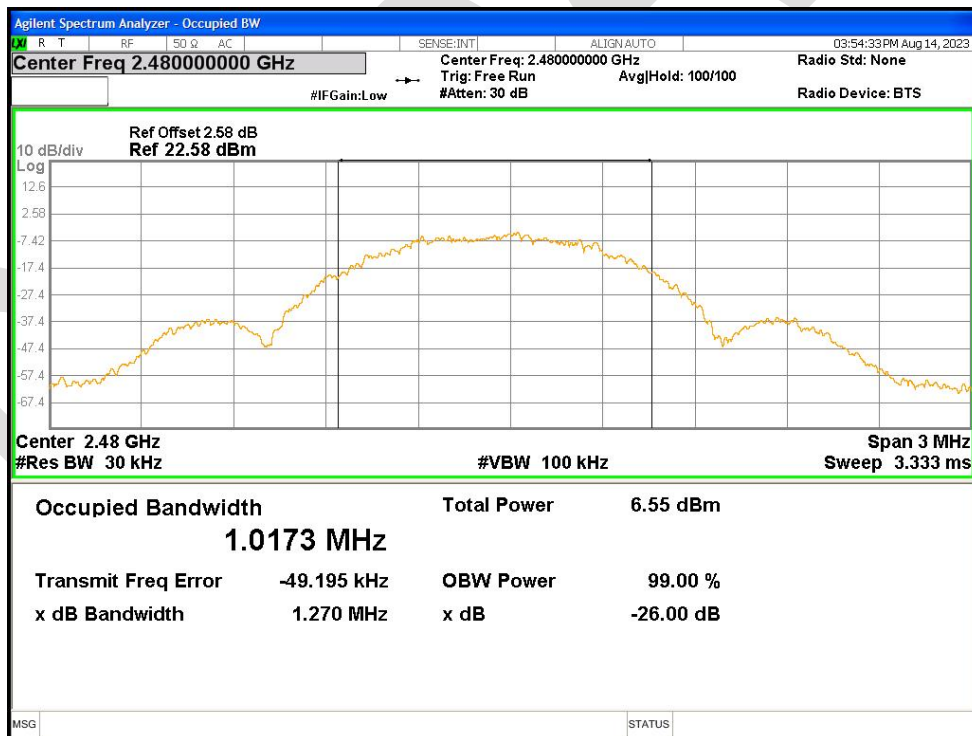


OBW NVNT BLE 2M 2402MHz Ant1

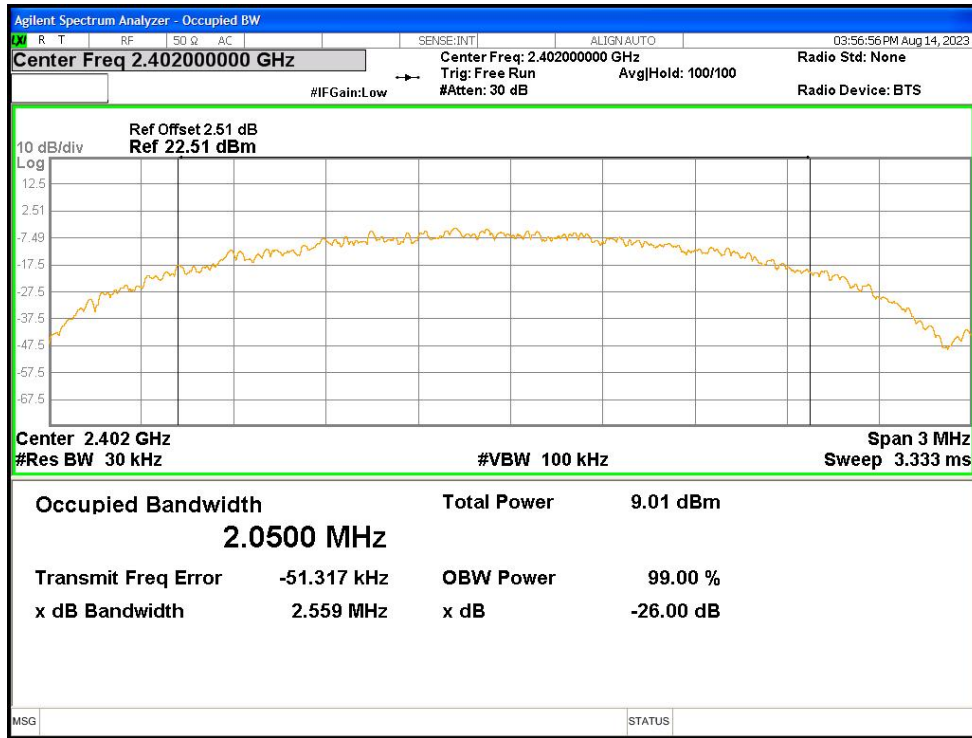

OBW NVNT BLE 2M 2442MHz Ant1

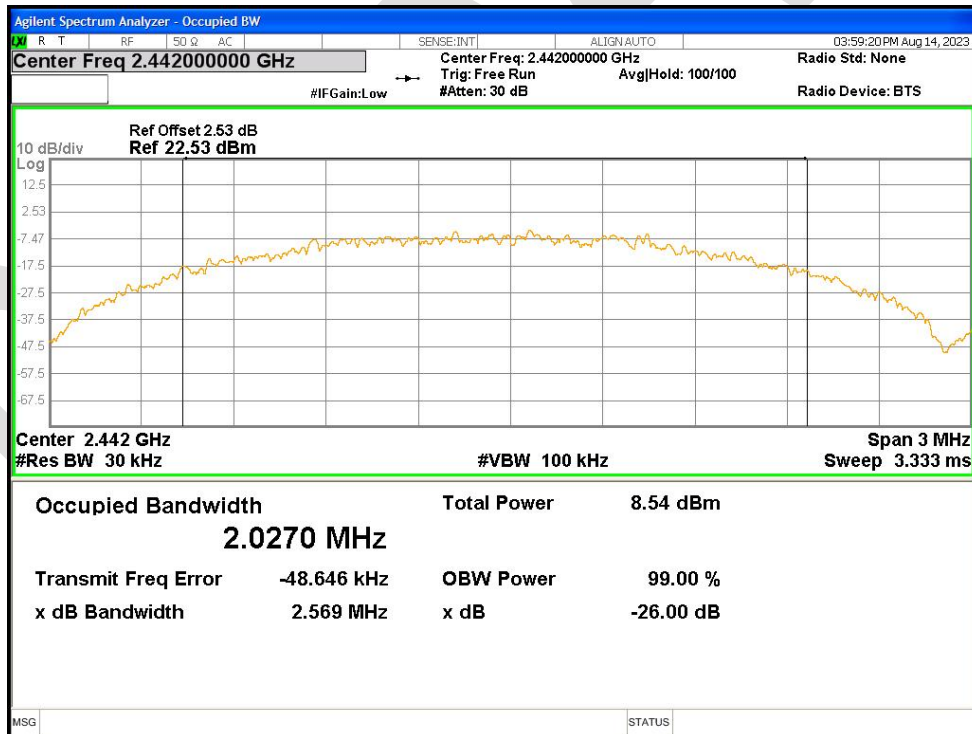


OBW NVNT BLE 2M 2480MHz Ant1

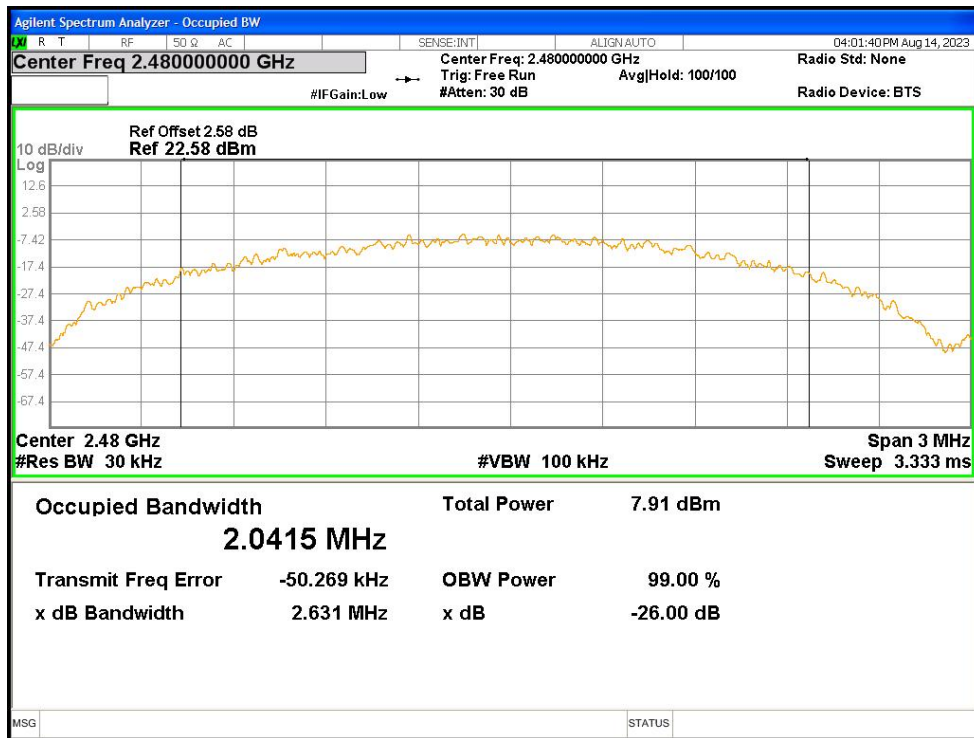


19.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-8.908	8	Pass
NVNT	BLE 1M	2442	Ant1	-11.646	8	Pass
NVNT	BLE 1M	2480	Ant1	-12.701	8	Pass
NVNT	BLE 2M	2402	Ant1	-13.746	8	Pass
NVNT	BLE 2M	2442	Ant1	-12.774	8	Pass
NVNT	BLE 2M	2480	Ant1	-12.353	8	Pass


PSD NVNT BLE 1M 2402MHz Ant1

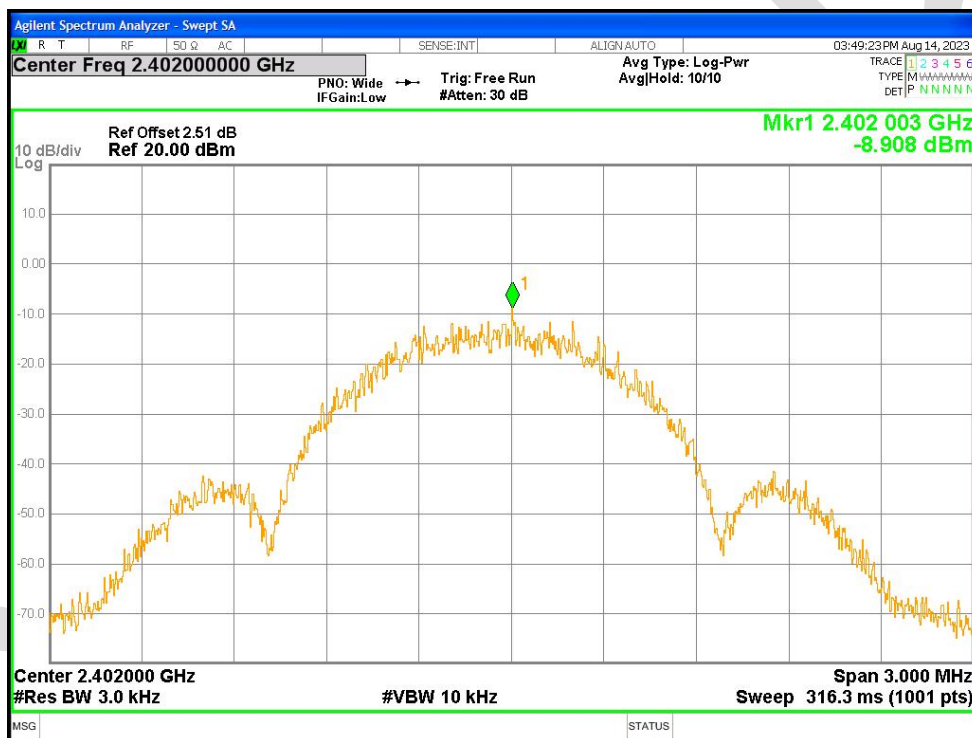


PSD NVNT BLE 1M 2442MHz Ant1

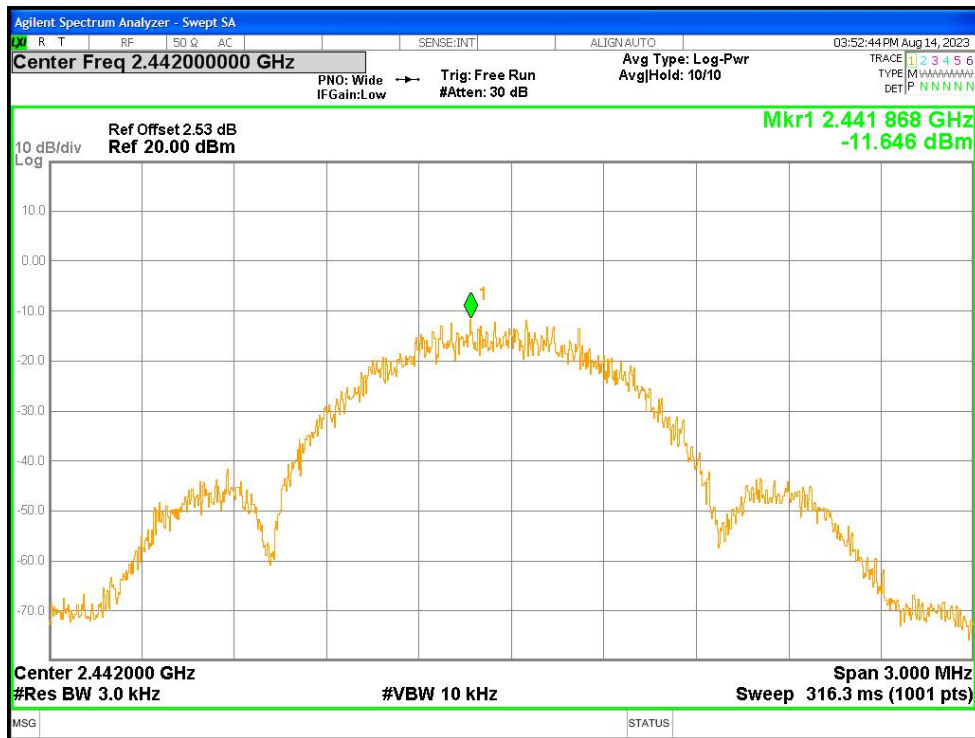


PSD NVNT BLE 1M 2480MHz Ant1

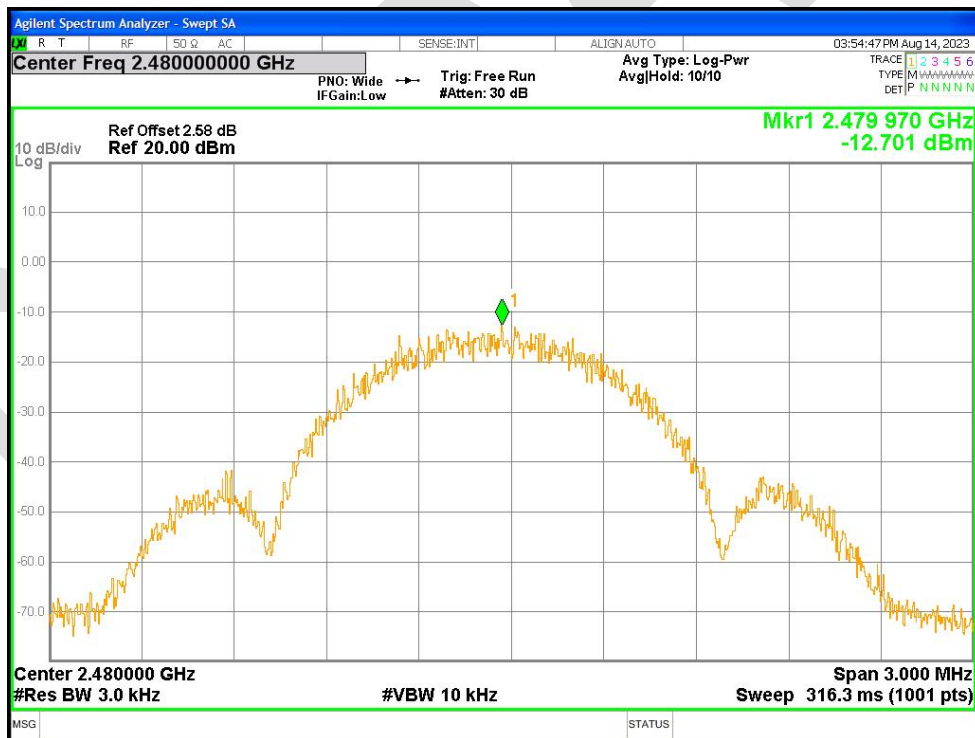


PSD NVNT BLE 2M 2402MHz Ant1

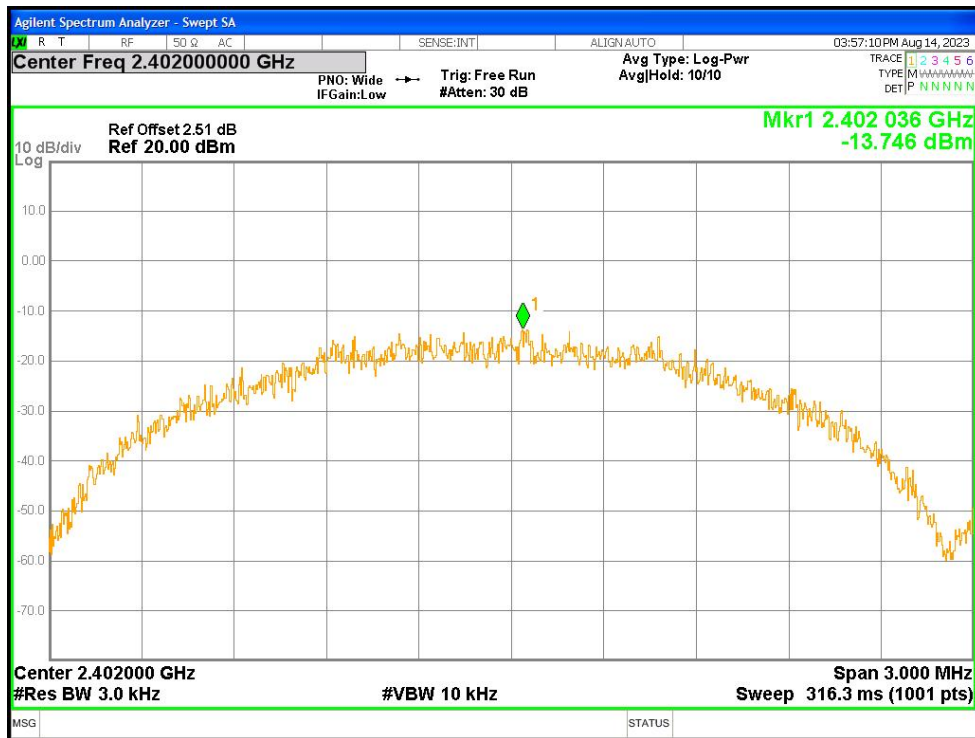

PSD NVNT BLE 2M 2442MHz Ant1

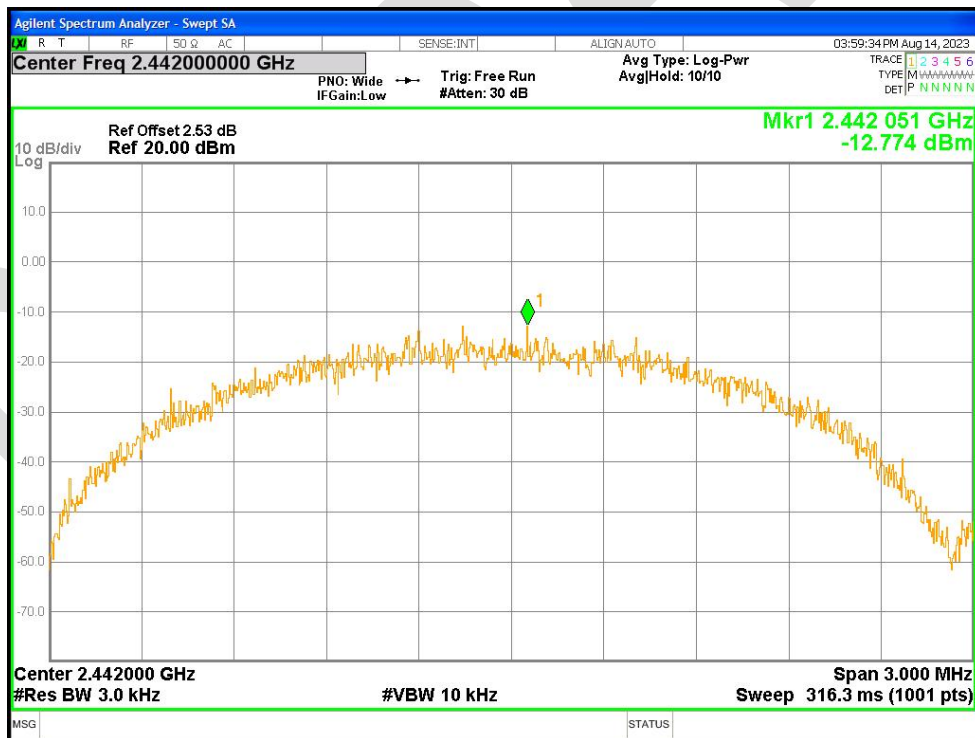

PSD NVNT BLE 2M 2480MHz Ant1

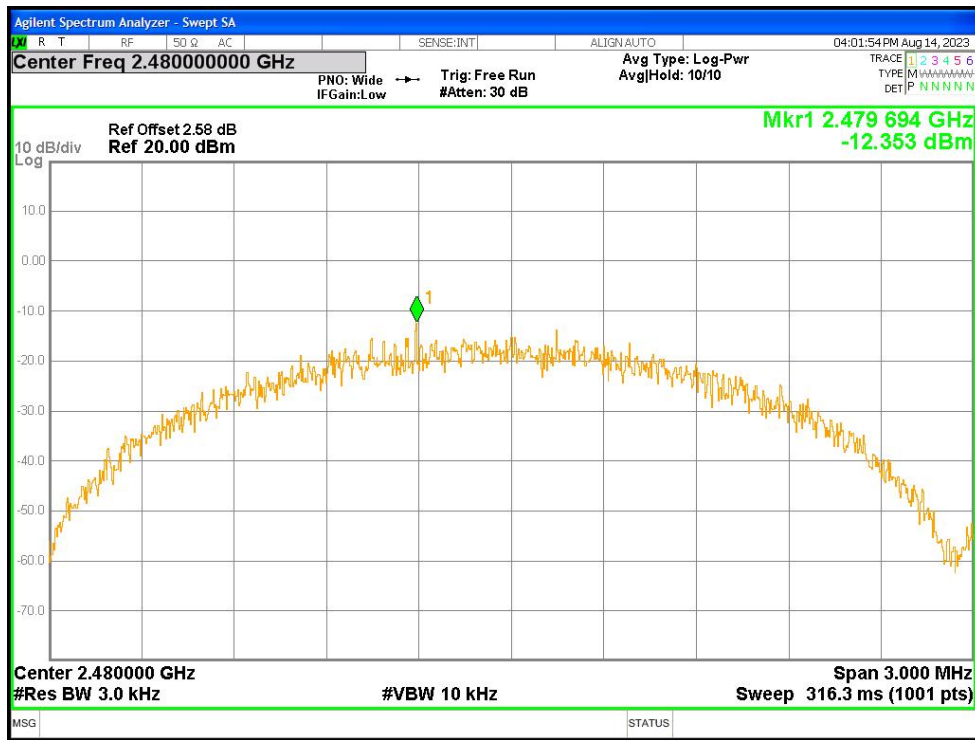


19.5 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-55.33	-30	Pass
NVNT	BLE 1M	2480	Ant1	-53.68	-30	Pass
NVNT	BLE 2M	2402	Ant1	-53.87	-30	Pass
NVNT	BLE 2M	2480	Ant1	-52.79	-30	Pass


Band Edge NVNT BLE 1M 2402MHz Ant1 Ref




Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

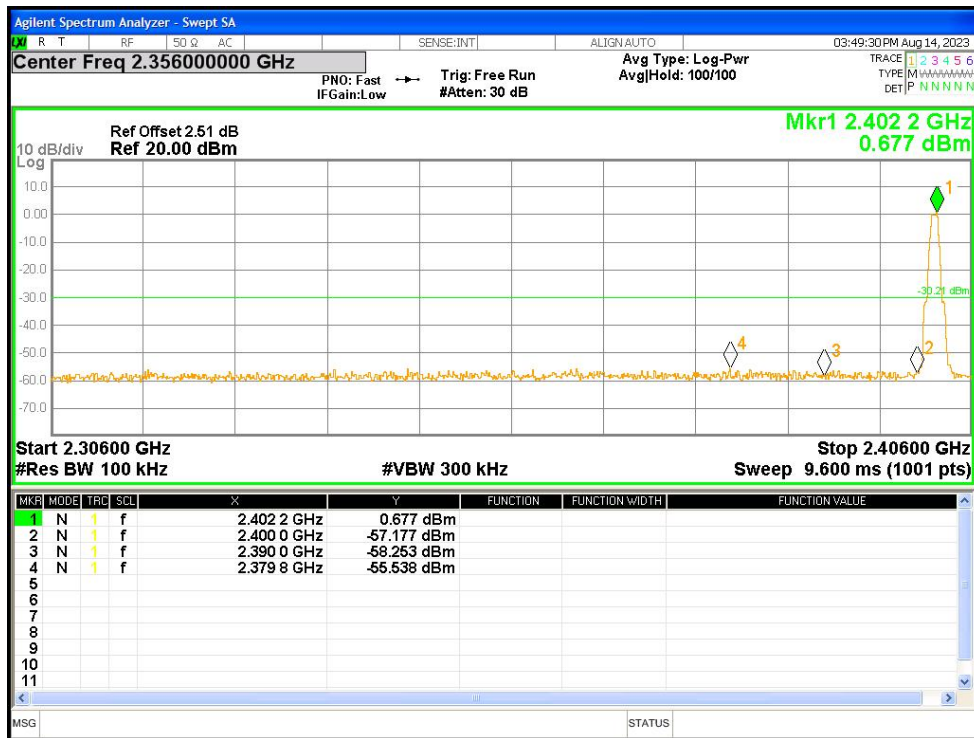


Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

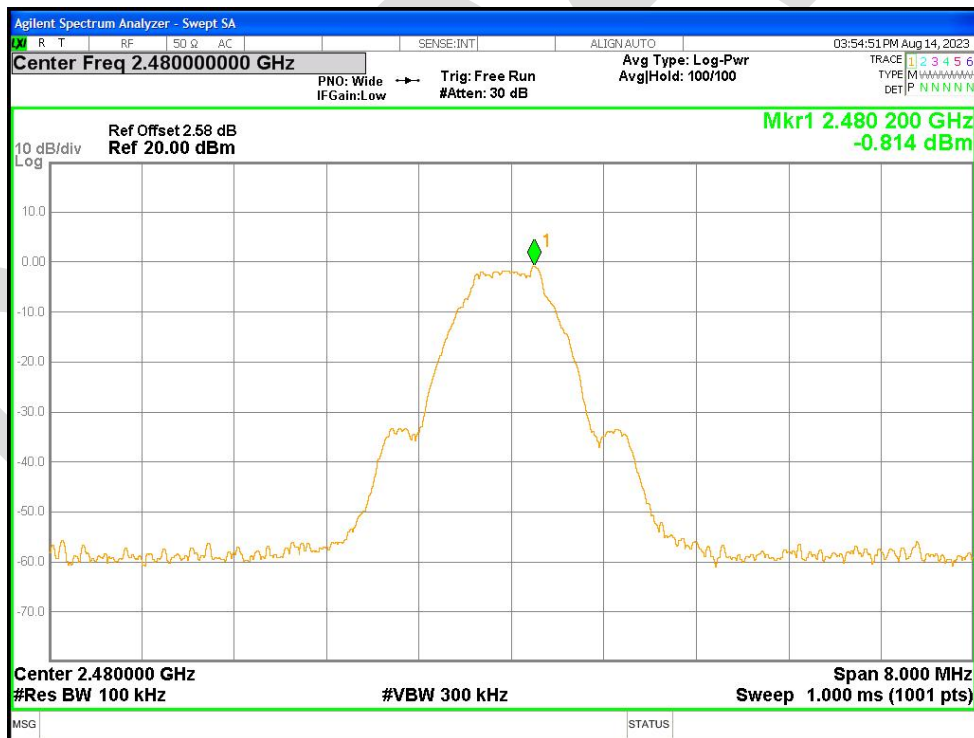

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

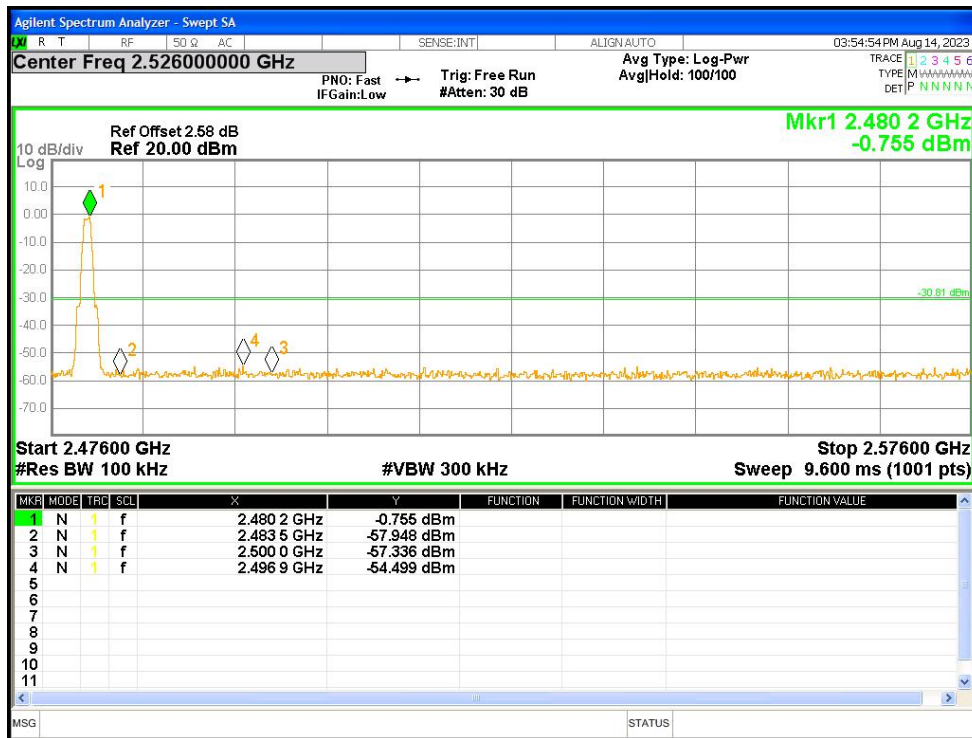

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

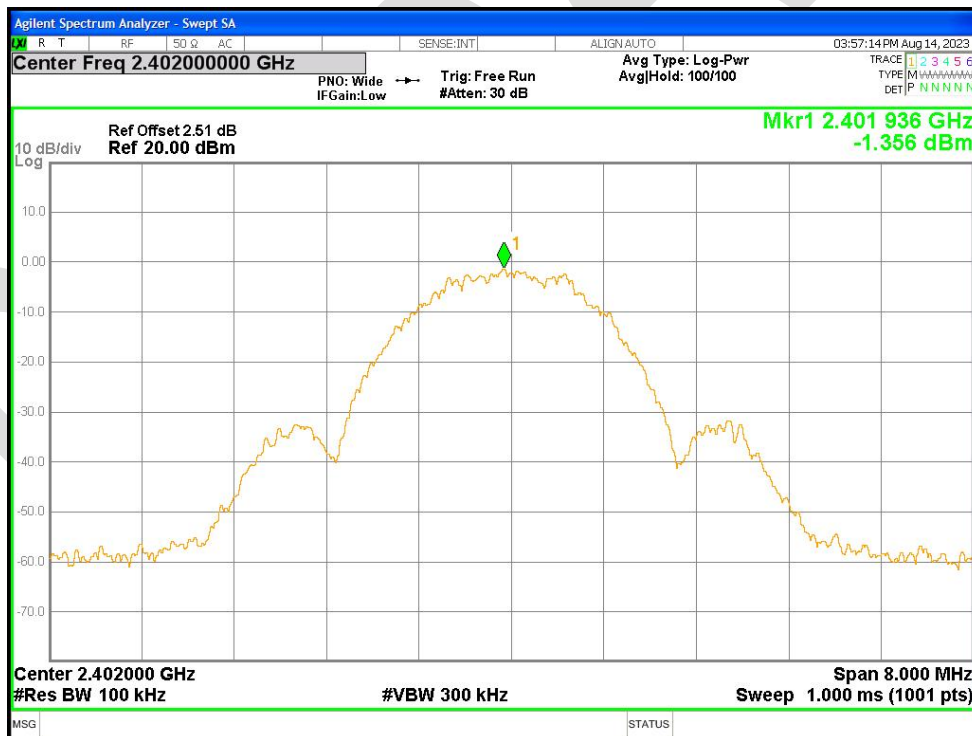

Band Edge NVNT BLE 2M 2402MHz Ant1 Emission