

## Label

Cellular : Uplink: 824MHz - 849MHz, Downlink: 869MHz - 894MHz

AWS-1 Uplink: 1710 - 1755MHz, Downlink: 2110 - 2155MHz

Broadband PCS Uplink: 1850-1915MHz, Downlink: 1930-1995MHz

Low A-E Blocks: 699-716MHz, Downlink: 729-746MHz

700 MHz Upper C Block: 777-787MHz, Downlink: 746-756MHz

Product: Cell Phone Signal Booster                      Model: S5-A

FCC ID: 2BB6MS5-A    IC : 31014-S5A                      Made in China

the antenna for the device must be installed to comply with the 10 meter above ground maximum antenna height limitation

This is a CONSUMER device.

BEFORE USE, you MUST REGISTER THIS DEVICE with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters.

Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.


In Canada, BEFORE USE you must meet all requirements set out in ISED CPC-2-1-05.

You MUST operate this device with approved antennas and cables as specified by the manufacturer. Antennas MUST be installed at least 20 cm (8 inches) from (i.e., MUST NOT be installed within 20 cm of) any person.

You MUST cease operating this device immediately if requested by the FCC (or ISED in Canada) or a licensed wireless service provider.

WARNING. E911 location information may not be provided or may be inaccurate for calls served by using this device.

This device may be operated ONLY in a fixed location (i.e., may operate in a fixed location only) for in-building use

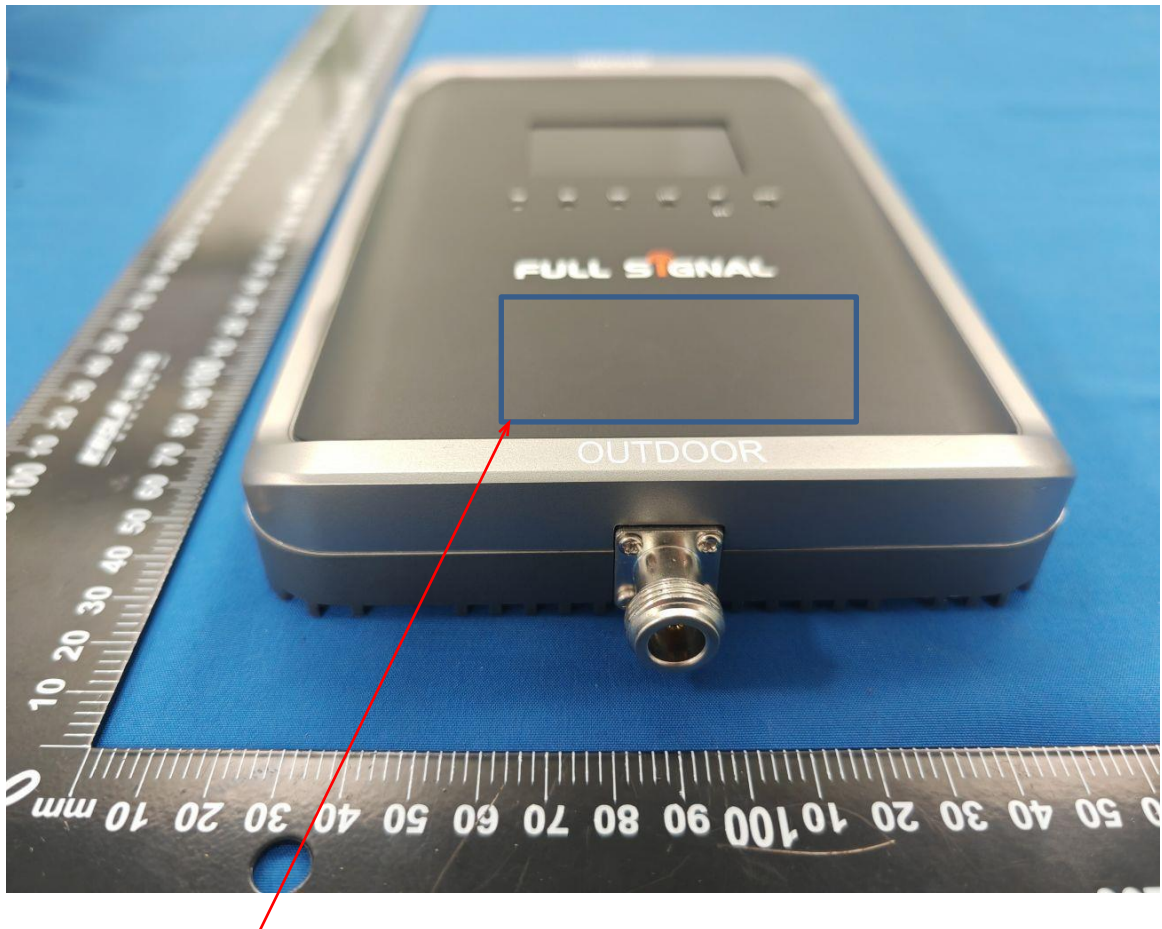

Location

Location: 90mm\*40mm