

FCC Test Report

FCC ID : SQG-60SIPT
Equipment : 802.11 ac/a/b/g/n + Bluetooth 4.2 module
(please refer to section 1.1.1 for more details.)
Model No. : ST60-SIPT
(please refer to section 1.1.1 for more details.)
Brand Name : Laird Technologies
Applicant : Laird Technologies
Address : W66N220 Commerce Court, Cedarburg,
Wisconsin 53012, USA
Standard : 47 CFR FCC Part 15.407
Received Date : Apr. 07, 2017
Tested Date : Apr. 12 ~ May 10, 2017

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:








Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	12
1.3	Test Setup Chart	12
1.4	The Equipment List	13
1.5	Testing Applied Standards	14
1.6	Measurement Uncertainty	14
2	TEST CONFIGURATION.....	15
2.1	Testing Condition	15
2.2	The Worst Test Modes and Channel Details	16
3	TRANSMITTER TEST RESULTS.....	18
3.1	Conducted Emissions.....	18
3.2	Emission Bandwidth	23
3.3	RF Output Power.....	28
3.4	Peak Power Spectral Density.....	34
3.5	Transmitter Radiated and Band Edge Emissions	39
3.6	Frequency Stability	394
4	TEST LABORATORY INFORMATION	397

Release Record

Report No.	Version	Description	Issued Date
FR740701AN	Rev. 01	Initial issue	Jul. 13, 2017
FR740701AN	Rev. 02	Revised model name	Jul. 21, 2017

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 4.494MHz 50.88(Margin -5.12dB) - QP	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 3883.33MHz 53.86 (Margin -0.14dB) - AV	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: 5150~5250MHz: 21.60 5250~5350MHz: 18.92 5470~5725MHz: 21.01 5725~5850MHz: 21.28	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description	
Laird Technologies	ST60-SIPT	802.11 ac/a/b/g/n + Bluetooth 4.2 module	SIPT only	For marketing purpose
	SU60-SIPT			
	ST60-2230C	802.11 ac/a/b/g/n M.2 2230 + Bluetooth 4.2 module	with carrier board	
	SU60-2230C			
† The above models, model ST60-2230C was selected as a representative one for the final test and only its data was recorded in this report.				

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5150-5250 5250-5350 5470-5725 5725-5850	a	5180-5240	36-48 [4]	1	6-54 Mbps
		5260-5320 5500-5720 5745-5825	52-64 [4] 100-144 [12] 149-165 [5]	2	
5150-5250 5250-5350 5470-5725 5725-5850	n (HT20)	5180-5240	36-48 [4]	1	MCS 0-7
		5260-5320 5500-5720	52-64 [4] 100-144 [12]	2	MCS 0-7
		5745-5825	149-165 [5]	2	MCS 8-15
5150-5250 5250-5350 5470-5725 5725-5850	n (HT40)	5190-5230	38-46 [2]	1	MCS 0-7
		5270-5310 5510-5710	54-62 [2] 102-142 [6]	2	MCS 0-7
		5755-5795	151-159 [2]	2	MCS 8-15
5150-5250 5250-5350 5470-5725 5725-5850	ac (VHT20)	5180-5240	36-48 [4]	1	MCS 0-9
		5260-5320 5500-5720 5745-5825	52-64 [4] 100-144 [12] 149-165 [5]	2	
5150-5250 5250-5350 5470-5725 5725-5850	ac (VHT40)	5190-5230	38-46 [2]	1	MCS 0-9
		5270-5310 5510-5710 5755-5795	54-62 [2] 102-142 [6] 151-159 [2]	2	
5150-5250 5250-5350 5470-5725 5725-5850	ac (VHT80)	5210	42 [1]	1	MCS 0-9
		5290 5530~5690 5775	58 [1] 106-138 [3] 155 [1]	2	

Note 1: RF output power specifies that Maximum Conducted Output Power.

Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

Note 3: The device supports TX antenna diversity function. The conducted power of single chain is same for 1TX and 2TX operating mode. Therefore, Ant1 + Ant 2 configuration is chosen for final testing.

1.1.3 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
1	LSR/001-0009	Dipole	IPEX U.FL	2	2	2	2	2
2	Laird NanoBlade-IP04	PCB Dipole	IPEX U.FL	2	3.9	3.9	4	4
3	Laird MAF95310 Mini NanoBlade Flex	PCB Dipole	IPEX U.FL	2.79	3.38	3.38	3.38	3.38
4	LSR/FlexPIFA 001-0016	PIFA	IPEX U.FL	2.5	3	3	3	3
5	Ethertronics WLAN_1000146	Isolated Magnetic Dipole	IPEX U.FL	2.5	3.5	3.5	3.5	3.5

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	DC 3.3V from host
--------------------------	-------------------

1.1.5 Accessories

N/A

1.1.6 Channel List

802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	54	5270
48	5240	62	5310
52	5260	102	5510
56	5280	110	5550
60	5300	118	5590
64	5320	126	5630
100	5500	134	5670
104	5520	142	5710
108	5540	151	5755
112	5560	159	5795
116	5580	VHT80	
120	5600	42	5210
124	5620	58	5290
128	5640	106	5530
132	5660	122	5610
136	5680	138	5690
140	5700	155	5775
144	5720	---	---
149	5745	---	---
153	5765	---	---
157	5785	---	---
161	5805	---	---

1.1.8 Power Setting

For Frequency band 5150-5250 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5180	17
11a	5200	19
11a	5240	19
HT20	5180	17
HT20	5200	19
HT20	5240	19
HT40	5190	15
HT40	5230	17
VHT20	5180	17
VHT20	5200	19
VHT20	5240	19
VHT40	5190	15
VHT40	5230	17
VHT80	5210	12

For Frequency band 5250~5350 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5260	16
11a	5300	16
11a	5320	15
HT20	5260	16
HT20	5300	16
HT20	5320	16
HT40	5270	16

For Frequency band 5470~5725 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5500	17
11a	5580	19
11a	5700	15
HT20	5500	17
HT20	5580	19
HT20	5700	16
HT40	5510	14
HT40	5550	17
HT40	5670	17
VHT20	5500	17
VHT20	5580	19
VHT20	5700	16
VHT40	5510	14
VHT40	5590	17
VHT40	5670	17
VHT80	5530	12
VHT80	5610	15

Channel that extends across the 5.725 GHz boundary

For Frequency band 5470~5725 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5720	19
HT20	5720	19
HT40	5710	18
VHT20	5720	19


For Frequency band 5725~5850 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5745	19
11a	5785	19
11a	5825	20
HT20	5745	19
HT20	5785	19
HT20	5825	20
HT40	5755	18
HT40	5795	18
VHT20	5745	19
VHT20	5785	19
VHT20	5825	20
VHT40	5755	18
VHT40	5795	18
VHT80	5775	15

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E5420	DoC	RJ45, 10m non-shielded
2	Notebook	Lenovo	T430	DoC	---
3	50Ω terminator	---	---	---	---
4	Fixture	---	---	---	Fixture, 0.2m non-shielded

Note: No2. & No. 4 were provided by applicant.

1.3 Test Setup Chart

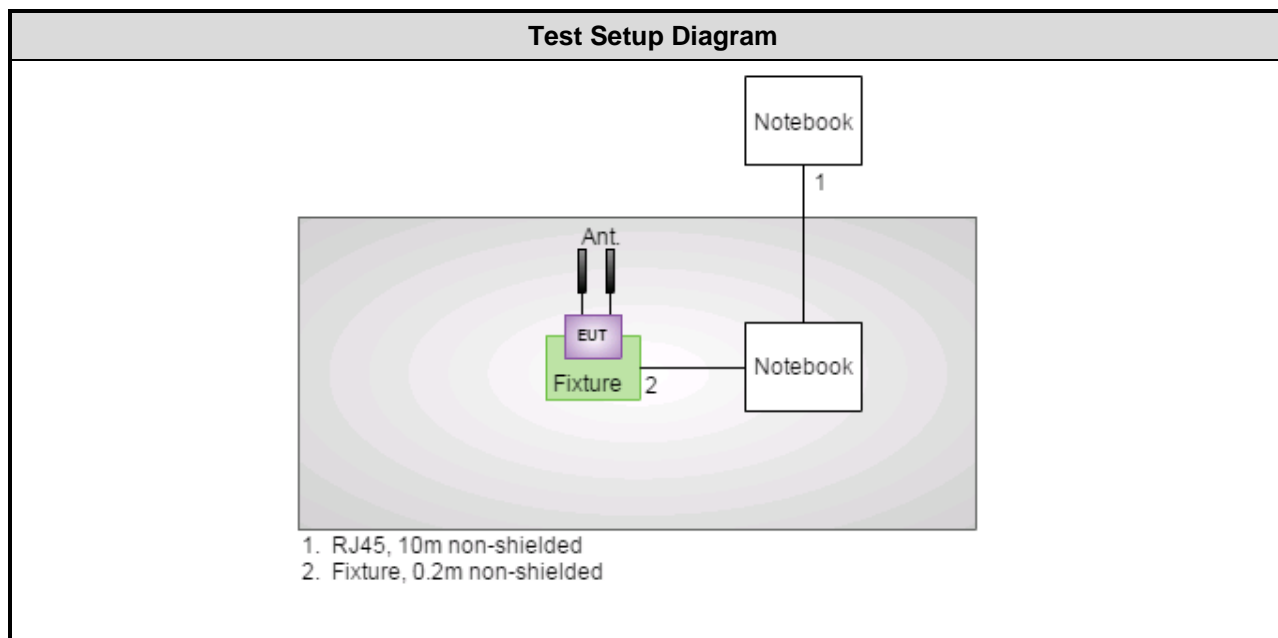

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Dec. 21, 2016	Dec. 20, 2017
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 08, 2016	Nov. 07, 2017
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 20, 2016	Dec. 19, 2017
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 09, 2016	Sep. 08, 2017
Receiver	Agilent	N9038A	MY53290044	Oct. 06, 2016	Oct. 05, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 04, 2016	Aug. 03, 2017
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 09, 2017	Feb. 08, 2018
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017
Preamplifier	EMC	EMC02325	980187	Sep. 08, 2016	Sep. 07, 2017
Preamplifier	Agilent	83017A	MY53270014	Aug. 22, 2016	Aug. 21, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 04, 2017	Feb. 03, 2018
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 04, 2017	Feb. 03, 2018
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 04, 2017	Feb. 03, 2018
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 04, 2017	Feb. 03, 2018
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 04, 2017	Feb. 03, 2018

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Mar. 15, 2017	Mar. 14, 2018
Power Meter	Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017
Power Sensor	Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017
DC POWER SOURCE	GW INSTRON	GPC-6030D	EM892433	Oct. 20, 2016	Oct. 19, 2017
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04

FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Frequency error	±34.134 Hz

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	20°C / 57%	Alex Tsai
Radiated Emissions	03CH03-WS	22-24°C / 66-67%	Aska Huang
RF Conducted	TH01-WS	22°C / 64%	Brad Wu

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Frequency band 5150~5250 MHz / 5250~5350 MHz / 5470~5725 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT20	5240	MCS 0	2
Radiated Emissions ≤1GHz	VHT20	5240	MCS 0	1, 2, 3, 4
RF Output Power	11a	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700 / 5720	6 Mbps	2
	HT20	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700 / 5720	MCS 0	
	HT40	5190 / 5230/ 5270 / 5310 / 5510 5590 / 5670 / 5710	MCS 0	
	VHT20	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700 / 5720	MCS 0	
	VHT40	5190 / 5230/ 5270 / 5310 / 5510 5590 / 5670 / 5710	MCS 0	
	VHT80	5210 / 5290 / 5530 / 5610 / 5690	MCS 0	
Emission Bandwidth Peak Power Spectral Density	11a	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700 / 5720	6 Mbps	2
	VHT20	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700 / 5720	MCS 0	
	VHT40	5190 / 5230/ 5270 / 5310 / 5510 5590 / 5670 / 5710	MCS 0	
	VHT80	5210 / 5290 / 5530 / 5610 / 5690	MCS 0	
Radiated Emissions >1GHz	11a	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700 / 5720	6 Mbps	1, 2, 3, 4
	VHT20	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700 / 5720	MCS 0	
	VHT40	5190 / 5230/ 5270 / 5310 / 5510 5590 / 5670 / 5710	MCS 0	
	VHT80	5210 / 5290 / 5530 / 5610 / 5690	MCS 0	
Frequency Stability	Un-modulation	5320	---	2

NOTE:

Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT20	5825	MCS 0	2
Radiated Emissions ≤1GHz	VHT20	5825	MCS 0	1, 2, 3, 4
RF Output Power	11a	5745 / 5785 / 5825	6 Mbps	2
	HT20	5745 / 5785 / 5825	MCS 0	
	HT40	5755 / 5795	MCS 0	
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Emission Bandwidth 6dB bandwidth Peak Power Spectral Density	11a	5745 / 5785 / 5825	6 Mbps	2
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Radiated Emissions >1GHz	11a	5745 / 5785 / 5825	6 Mbps	1, 2, 3, 4
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Frequency Stability	Un-modulation	5785	---	2

NOTE:

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.
- The test configurations are listed as follows:
 - Configuration 1 : Dipole Antenna
 - Configuration 2 : PCB Dipole Antenna
 - Configuration 3 : PIFA Antenna
 - Configuration 4 : Isolated Magnetic Dipole Antenna

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

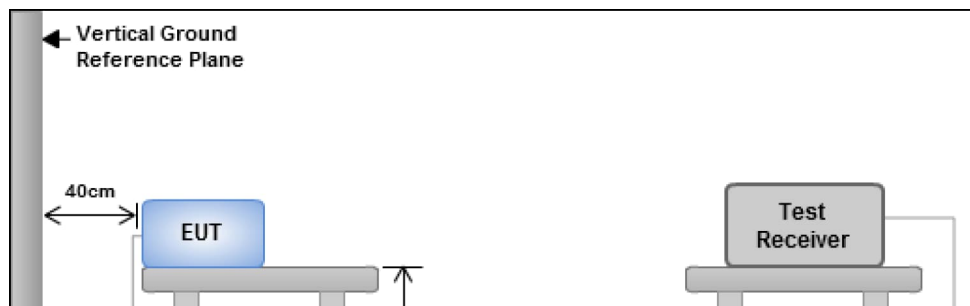


3.1.4 Test Result of Conducted Emissions

Modulation	VHT20	Test Freq. (MHz)	5240
Power Phase	Line		

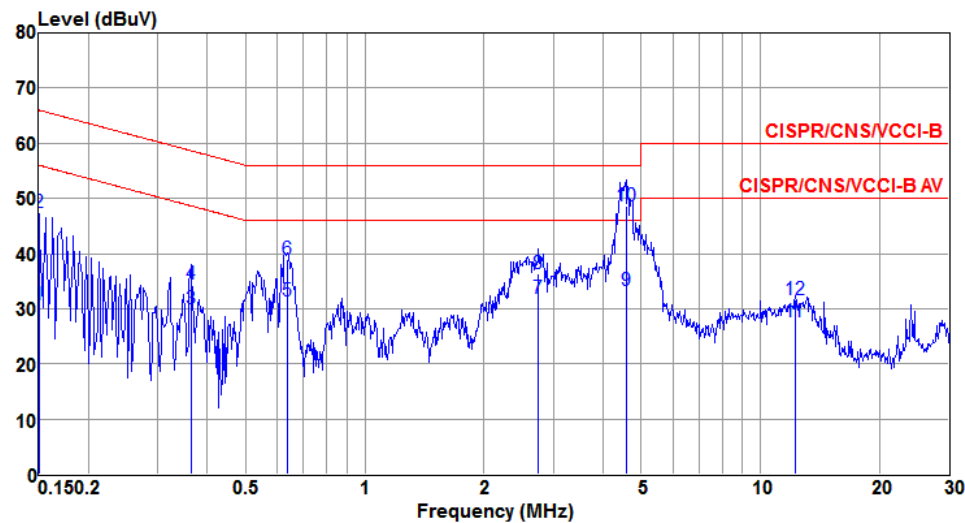


	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.150	30.71	56.00	-25.29	30.60	0.07	0.04	Average
2	0.150	47.41	66.00	-18.59	47.30	0.07	0.04	QP
3	0.363	29.97	48.65	-18.68	29.86	0.07	0.04	Average
4	0.363	34.55	58.65	-24.10	34.44	0.07	0.04	QP
5	0.637	31.38	46.00	-14.62	31.27	0.07	0.04	Average
6	0.637	38.89	56.00	-17.11	38.78	0.07	0.04	QP
7	2.750	31.95	46.00	-14.05	31.71	0.15	0.09	Average
8	2.750	36.43	56.00	-19.57	36.19	0.15	0.09	QP
9	4.574	33.21	46.00	-12.79	32.87	0.17	0.17	Average
10@	4.574	48.70	56.00	-7.30	48.36	0.17	0.17	QP
11	12.253	27.72	50.00	-22.28	27.24	0.26	0.22	Average
12	12.253	31.63	60.00	-28.37	31.15	0.26	0.22	QP

Modulation	VHT20	Test Freq. (MHz)	5240
Power Phase	Neutral		

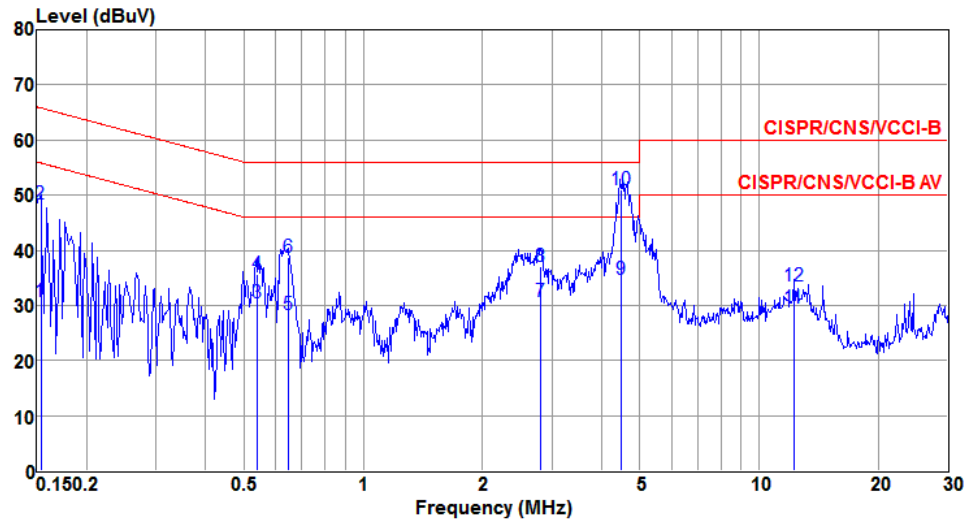


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	30.78	55.82	-25.04	30.64	0.10	0.04	Average
2	0.153	48.28	65.82	-17.54	48.14	0.10	0.04	QP
3	0.541	30.49	46.00	-15.51	30.33	0.12	0.04	Average
4	0.541	35.61	56.00	-20.39	35.45	0.12	0.04	QP
5	0.647	28.23	46.00	-17.77	28.08	0.11	0.04	Average
6	0.647	38.65	56.00	-17.35	38.50	0.11	0.04	QP
7	2.809	30.73	46.00	-15.27	30.48	0.15	0.10	Average
8	2.809	36.96	56.00	-19.04	36.71	0.15	0.10	QP
9	4.494	34.72	46.00	-11.28	34.39	0.16	0.17	Average
10	4.494	50.88	56.00	-5.12	50.55	0.16	0.17	QP
11	12.253	29.62	50.00	-20.38	29.06	0.34	0.22	Average
12	12.253	33.46	60.00	-26.54	32.90	0.34	0.22	QP

Modulation	VHT20	Test Freq. (MHz)	5825
Power Phase	Line		

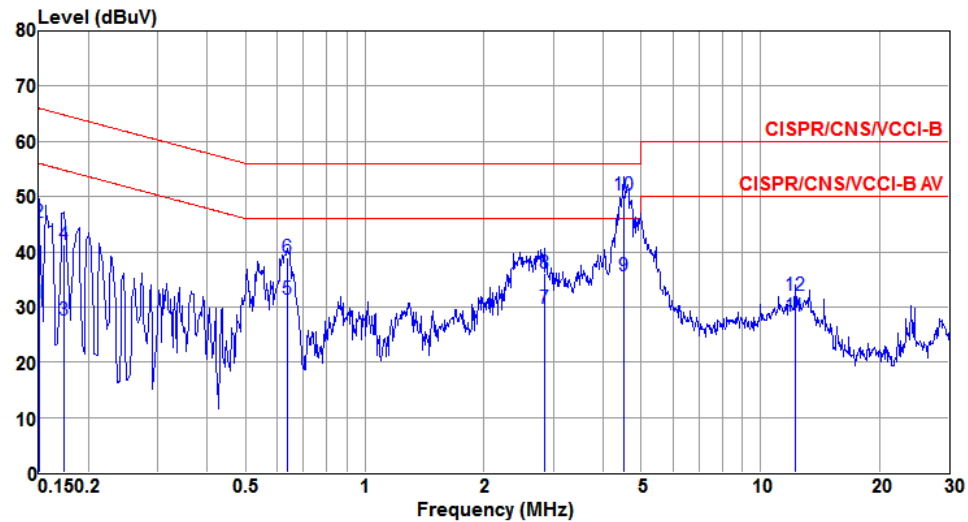

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.150	30.61	56.00	-25.39	30.50	0.07	0.04	Average
2	0.150	45.35	66.00	-20.65	45.24	0.07	0.04	QP
3	0.174	27.65	54.77	-27.12	27.52	0.09	0.04	Average
4	0.174	41.35	64.77	-23.42	41.22	0.09	0.04	QP
5	0.637	31.35	46.00	-14.65	31.24	0.07	0.04	Average
6	0.637	38.96	56.00	-17.04	38.85	0.07	0.04	QP
7	2.839	29.86	46.00	-16.14	29.61	0.15	0.10	Average
8	2.839	36.08	56.00	-19.92	35.83	0.15	0.10	QP
9	4.509	35.69	46.00	-10.31	35.35	0.17	0.17	Average
10@	4.509	50.33	56.00	-5.67	49.99	0.17	0.17	QP
11	12.253	28.27	50.00	-21.73	27.79	0.26	0.22	Average
12	12.253	32.16	60.00	-27.84	31.68	0.26	0.22	QP

Modulation	VHT20	Test Freq. (MHz)	5825
Power Phase	Neutral		

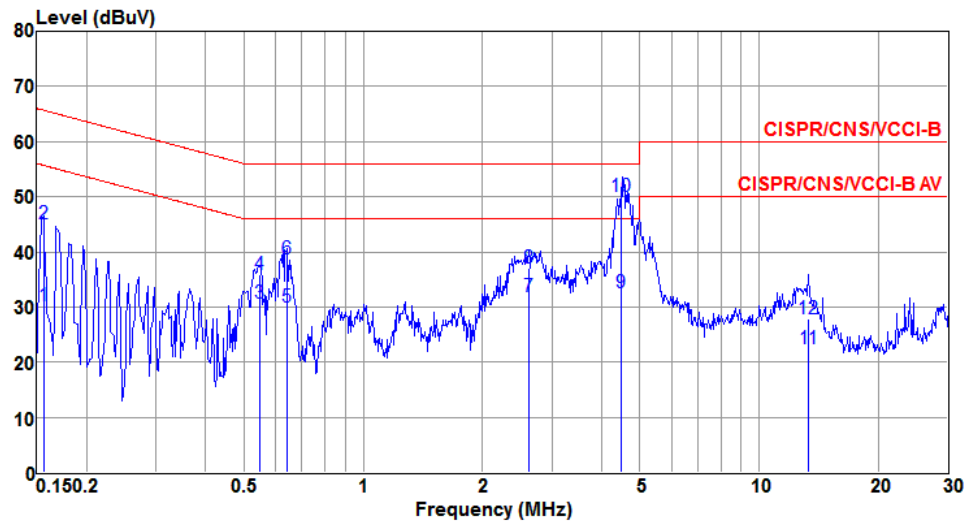

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.156	30.26	55.69	-25.43	30.12	0.10	0.04	Average
2	0.156	44.97	65.69	-20.72	44.83	0.10	0.04	QP
3	0.546	30.62	46.00	-15.38	30.46	0.12	0.04	Average
4	0.546	35.96	56.00	-20.04	35.80	0.12	0.04	QP
5	0.644	30.08	46.00	-15.92	29.93	0.11	0.04	Average
6	0.644	38.75	56.00	-17.25	38.60	0.11	0.04	QP
7	2.622	31.76	46.00	-14.24	31.52	0.15	0.09	Average
8	2.622	36.96	56.00	-19.04	36.72	0.15	0.09	QP
9	4.477	32.47	46.00	-13.53	32.14	0.16	0.17	Average
10@	4.477	50.14	56.00	-5.86	49.81	0.16	0.17	QP
11	13.337	22.44	50.00	-27.56	21.86	0.35	0.23	Average
12	13.337	27.79	60.00	-32.21	27.21	0.35	0.23	QP

3.2 Emission Bandwidth

3.2.1 Limit of Emission Bandwidth

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.2.2 Test Procedures

26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW
2. Set VBW \geq 3 RBW
3. Sample detection and single sweep mode shall be used
4. Use the 99 % power bandwidth function of the instrument

6dB Bandwidth

1. Set RBW = 100kHz, VBW = 300kHz
2. Detector = Peak, Trace mode = max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

3.2.3 Test Setup

3.2.4 Test Result of Emission Bandwidth


For Frequency band 5150~5250 MHz										
Emission Bandwidth										
Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
11a	2	5180	19.88	20.00	---	---	16.83	16.76	---	---
11a	2	5200	28.12	26.78	---	---	17.01	16.90	---	---
11a	2	5240	28.70	27.42	---	---	17.01	16.90	---	---
VHT20	2	5180	20.29	20.12	---	---	17.69	17.66	---	---
VHT20	2	5200	21.39	20.12	---	---	17.75	17.69	---	---
VHT20	2	5240	20.75	20.12	---	---	17.75	17.69	---	---
VHT40	2	5190	41.62	41.51	---	---	36.44	36.40	---	---
VHT40	2	5230	41.74	41.39	---	---	36.46	36.40	---	---
VHT80	2	5210	81.86	81.62	---	---	76.48	76.40	---	---

For Frequency band 5250~5350 MHz											
Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)				Power Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	2	5260	20.00	19.88	---	---	16.81	16.73	---	---	24.00
11a	2	5300	19.94	19.88	---	---	16.81	16.71	---	---	24.00
11a	2	5320	20.00	19.88	---	---	16.80	16.74	---	---	24.00
VHT20	2	5260	20.29	20.06	---	---	17.69	17.66	---	---	24.00
VHT20	2	5300	20.29	20.12	---	---	17.69	17.66	---	---	24.00
VHT20	2	5320	20.23	20.06	---	---	17.69	17.65	---	---	24.00
VHT40	2	5270	41.62	41.51	---	---	36.48	36.38	---	---	24.00


For Frequency band 5470-5725 MHz

Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)				Power Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	2	5500	20.06	20.00	---	---	16.84	16.74	---	---	24.00
11a	2	5580	28.58	25.04	---	---	17.01	16.88	---	---	24.00
11a	2	5700	20.00	19.88	---	---	16.80	16.71	---	---	24.00
VHT20	2	5500	20.29	20.12	---	---	17.69	17.66	---	---	24.00
VHT20	2	5580	20.41	20.17	---	---	17.74	17.68	---	---	24.00
VHT20	2	5700	20.29	20.17	---	---	17.68	17.66	---	---	24.00
VHT40	2	5510	41.62	41.39	---	---	36.46	36.36	---	---	24.00
VHT40	2	5590	41.86	41.51	---	---	36.50	36.38	---	---	24.00
VHT40	2	5670	41.86	41.39	---	---	36.48	36.38	---	---	24.00
VHT80	2	5530	82.09	81.39	---	---	76.48	76.36	---	---	24.00
VHT80	2	5610	82.32	81.39	---	---	76.48	76.40	---	---	24.00

Worst Plot of 26dB Bandwidth

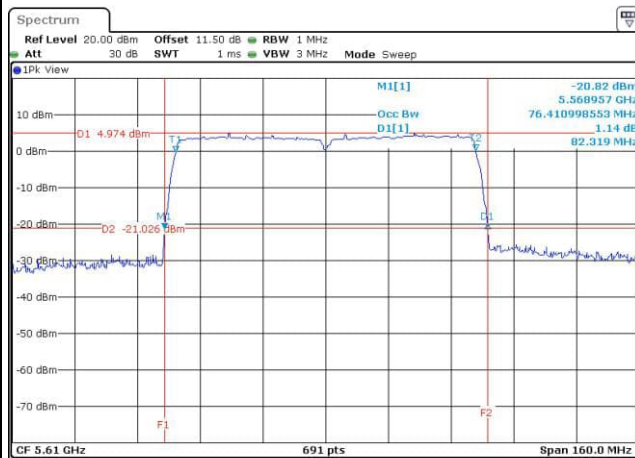

Worst Plot of 99% Bandwidth

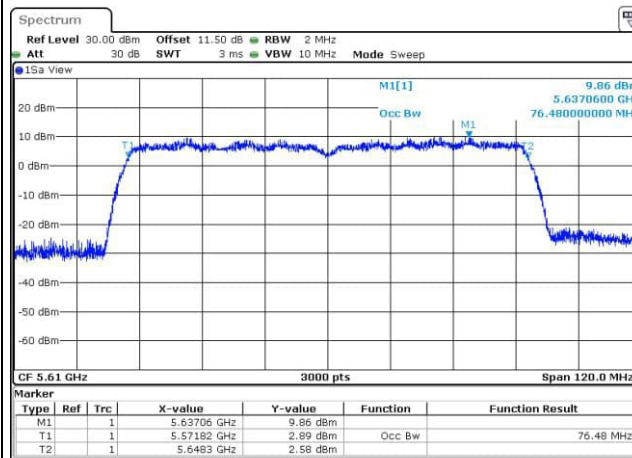


Channel that extends across the 5.725 GHz boundary

Frequency band			UNII Emission Bandwidth Result (Within 5470-5725MHz band)								
Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)				Power Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	2	5720	19.89	19.77	---	---	13.57	13.46	---	---	23.96
VHT20	2	5720	15.09	15.09	---	---	13.89	13.89	---	---	22.79
VHT40	2	5710	36.01	35.71	---	---	33.25	33.19	---	---	24.00
VHT80	2	5690	75.87	75.65	---	---	73.22	73.18	---	---	24.00


Frequency band			UNII Emission Bandwidth Result (Extends across 5725MHz band)								
Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)				Power Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	2	5720	9.13	7.20	---	---	3.46	3.42	---	---	30.00
VHT20	2	5720	5.39	5.04	---	---	3.85	3.80	---	---	30.00
VHT40	2	5710	5.97	5.80	---	---	3.25	3.21	---	---	30.00
VHT80	2	5690	6.17	5.91	---	---	3.26	3.14	---	---	30.00

Worst Plots

Within 5470-5725MHz band

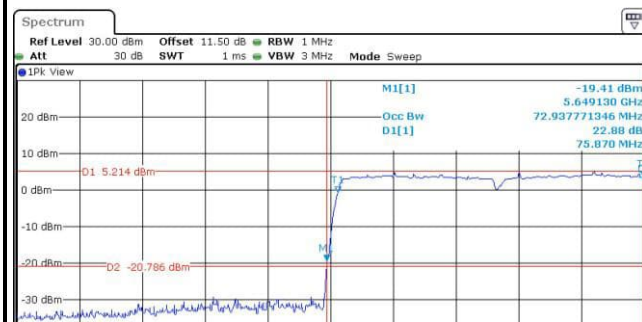

Extends across 5725MHz band

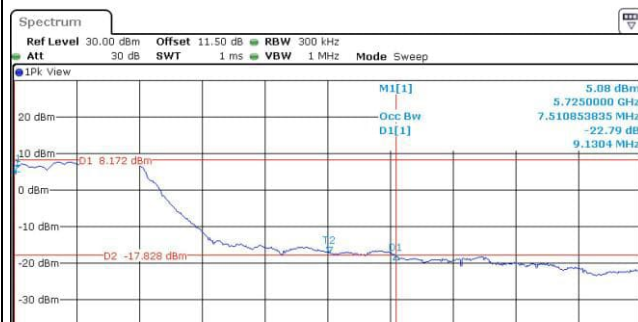


For Frequency band 5725-5850 MHz


Emission Bandwidth

Mode	N _{TX}	Freq. (MHz)	OBW Bandwidth (MHz)				6dB Bandwidth (MHz)				6dB BW Limit (MHz)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	2	5745	17.01	16.99	---	---	16.58	16.58	---	---	0.5
11a	2	5785	17.01	16.96	---	---	16.64	16.58	---	---	0.5
11a	2	5825	17.20	17.17	---	---	16.64	16.58	---	---	0.5
VHT20	2	5745	17.73	17.71	---	---	17.68	17.68	---	---	0.5
VHT20	2	5785	17.75	17.71	---	---	17.74	17.68	---	---	0.5
VHT20	2	5825	17.83	17.76	---	---	17.68	17.68	---	---	0.5
VHT40	2	5755	36.56	36.45	---	---	36.41	36.41	---	---	0.5
VHT40	2	5795	36.53	36.45	---	---	36.41	36.41	---	---	0.5
VHT80	2	5775	76.48	76.43	---	---	76.52	76.52	---	---	0.5

Worst Plot of 99% Bandwidth

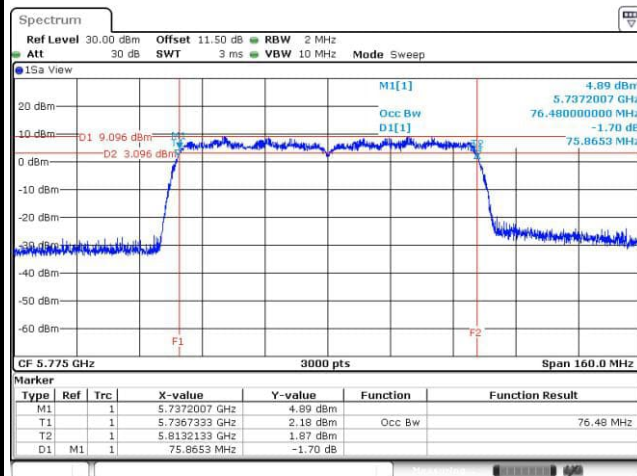

Worst Plot of 6dB Bandwidth

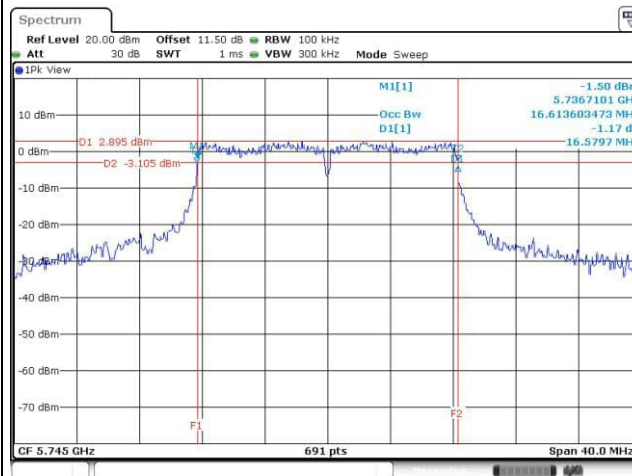

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Frequency band 5150-5250 MHz	
Operating Mode	Limit
<input type="checkbox"/> Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
<input type="checkbox"/> Indoor access point	Conducted Power: 1 W
<input type="checkbox"/> Fixed point-to-point access points	Conducted Power: 1 W
<input checked="" type="checkbox"/> Client devices	Conducted Power: 250 mW


Frequency Band (MHz)	Limit
<input checked="" type="checkbox"/> 5250 ~ 5350	250mW or 11dBm+10 log B
<input checked="" type="checkbox"/> 5470 ~ 5725	250mW or 11dBm+10 log B
<input checked="" type="checkbox"/> 5725 ~ 5850	1 W

Note: "B" is the 26dB emission bandwidth in MHz.

3.3.2 Test Procedures

- Power meter (For channel that does not extends across the 5.725 GHz boundary)
 - Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required
- Spectrum analyzer (For channel that extends across the 5.725 GHz boundary)
 1. Set RBW=1MHz, VBW=3MHz , Sweep time= Auto, Detector = RMS
 2. Trace average at least 100 traces in power averaging mode
 3. Compute power by integrating the spectrum across the 26 dB FRW

3.3.3 Test Setup

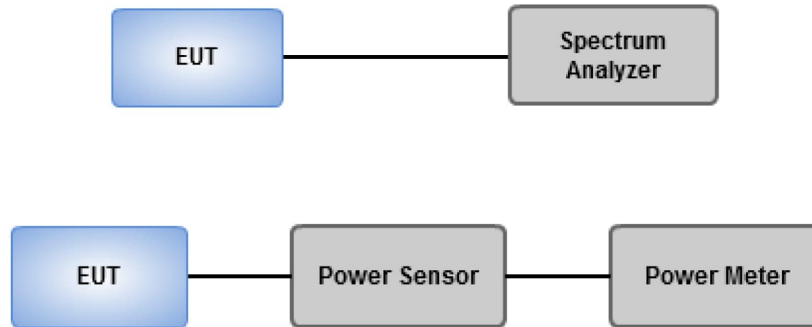

3.3.4 Test Result of Maximum Conducted Output Power

For Frequency band 5150~5250 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5180	16.61	16.5	---	---	90.483	19.57	24.00
11a	2	5200	18.56	18.12	---	---	136.643	21.36	24.00
11a	2	5240	18.65	18.41	---	---	142.625	21.54	24.00
HT20	2	5180	16.52	16.41	---	---	88.627	19.48	24.00
HT20	2	5200	18.45	18.02	---	---	133.371	21.25	24.00
HT20	2	5240	18.53	18.39	---	---	140.309	21.47	24.00
HT40	2	5190	14.71	14.35	---	---	56.807	17.54	24.00
HT40	2	5230	16.91	16.18	---	---	90.586	19.57	24.00
VHT20	2	5180	16.65	16.52	---	---	91.113	19.60	24.00
VHT20	2	5200	18.58	18.14	---	---	137.274	21.38	24.00
VHT20	2	5240	18.66	18.52	---	---	144.573	21.60	24.00
VHT40	2	5190	14.82	14.48	---	---	58.393	17.66	24.00
VHT40	2	5230	17.02	16.31	---	---	93.106	19.69	24.00
VHT80	2	5210	12.15	11.88	---	---	31.823	15.03	24.00


For Frequency band 5250~5350 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5260	15.94	15.59	---	---	75.489	18.78	23.99
11a	2	5300	15.81	15.52	---	---	73.752	18.68	23.99
11a	2	5320	14.56	14.38	---	---	55.992	17.48	23.99
HT20	2	5260	15.89	15.63	---	---	75.375	18.77	24.00
HT20	2	5300	15.71	15.54	---	---	73.049	18.64	24.00
HT20	2	5320	15.95	15.41	---	---	74.109	18.70	24.00

For Frequency band 5470~5725 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5500	16.15	15.76	---	---	78.880	18.97	24.00
11a	2	5580	18.04	17.72	---	---	122.836	20.89	24.00
11a	2	5700	13.86	13.35	---	---	45.949	16.62	23.99
HT20	2	5500	16.12	15.74	---	---	78.423	18.94	24.00
HT20	2	5580	18.03	17.72	---	---	122.689	20.89	24.00
HT20	2	5700	14.85	14.26	---	---	57.218	17.58	24.00
HT40	2	5510	13.38	12.81	---	---	40.876	16.11	24.00
HT40	2	5590	16.14	15.63	---	---	77.674	18.90	24.00
HT40	2	5670	15.55	14.86	---	---	66.512	18.23	24.00
VHT20	2	5500	16.24	15.86	---	---	80.620	19.06	24.00
VHT20	2	5580	18.16	17.84	---	---	126.277	21.01	24.00
VHT20	2	5700	14.98	14.39	---	---	58.956	17.71	24.00
VHT40	2	5510	13.49	12.96	---	---	42.105	16.24	24.00
VHT40	2	5590	16.28	15.74	---	---	79.959	19.03	24.00
VHT40	2	5670	15.68	15.05	---	---	68.972	18.39	24.00
VHT80	2	5530	11.42	11.62	---	---	28.389	14.53	24.00
VHT80	2	5610	14.92	14.21	---	---	57.409	17.59	24.00

Channel that extends across the 5.725 GHz boundary

Maximum Conducted Output Power (Within 5470-5725MHz band)									
RF Output Power (dBm)									
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Total Power (mW)	Total Power (dBm)	Limit
11a	2	5720	16.20	16.08	---	---	82.238	19.15	23.96
HT20	2	5720	15.86	15.94	---	---	77.812	18.91	22.79
HT40	2	5710	16.00	15.44	---	---	74.805	18.74	24.00
VHT20	2	5720	16.36	15.81	---	---	81.358	19.10	22.79
VHT40	2	5710	16.00	15.45	---	---	74.886	18.74	24.00
VHT80	2	5690	13.83	13.39	---	---	45.982	16.63	24.00

Maximum Conducted Output Power (Extends across 5725MHz band)									
RF Output Power (dBm)									
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Total Power (mW)	Total Power (dBm)	Limit
11a	2	5720	10.22	9.90	---	---	20.292	13.07	30.00
HT20	2	5720	10.40	10.37	---	---	21.854	13.40	30.00
HT40	2	5710	6.42	5.65	---	---	8.0580	9.06	30.00
VHT20	2	5720	10.91	10.95	---	---	24.776	13.94	30.00
VHT40	2	5710	6.43	5.93	---	---	8.3130	9.20	30.00
VHT80	2	5690	0.34	-0.13	---	---	2.0520	3.12	30.00

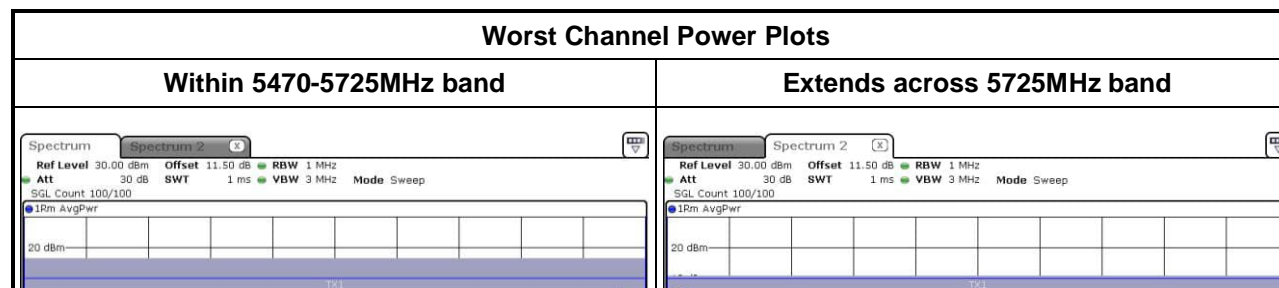

For Frequency band 5725-5850 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5745	17.18	17.06	---	---	103.056	20.13	30.00
11a	2	5785	17.02	17.11	---	---	101.754	20.08	30.00
11a	2	5825	18.06	18.32	---	---	131.894	21.20	30.00
HT20	2	5745	17.12	17.04	---	---	102.105	20.09	30.00
HT20	2	5785	17.06	16.85	---	---	99.233	19.97	30.00
HT20	2	5825	18.06	18.21	---	---	130.195	21.15	30.00
HT40	2	5755	16.13	15.89	---	---	79.835	19.02	30.00
HT40	2	5795	16.08	16.31	---	---	83.307	19.21	30.00
VHT20	2	5745	17.24	17.15	---	---	104.846	20.21	30.00
VHT20	2	5785	17.12	17.03	---	---	101.989	20.09	30.00
VHT20	2	5825	18.19	18.34	---	---	134.151	21.28	30.00
VHT40	2	5755	16.25	16.03	---	---	82.256	19.15	30.00
VHT40	2	5795	16.22	16.45	---	---	86.036	19.35	30.00
VHT80	2	5775	14.25	14.43	---	---	54.340	17.35	30.00

3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

Frequency band 5150-5250 MHz		
Operating Mode		Limit
<input type="checkbox"/>	Outdoor access point	17 dBm / MHz
<input type="checkbox"/>	Indoor access point	17 dBm / MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm / MHz
<input checked="" type="checkbox"/>	Client devices	11 dBm / MHz

Frequency Band (MHz)		Limit
<input checked="" type="checkbox"/>	5250 ~ 5350	11 dBm / MHz
<input checked="" type="checkbox"/>	5470 ~ 5725	11 dBm / MHz
<input checked="" type="checkbox"/>	5725 ~ 5850	30 dBm /500 kHz

3.4.2 Test Procedures

For 5150~5250 MHz, 5250~5350 MHz, 5470~5725 MHz

Method SA-1

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Method SA-2 Alternative

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

For 5725~5850 MHz

Method SA-1

1. Set RBW = 500 kHz, VBW = 2 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Method SA-2 Alternative

1. Set RBW = 500 kHz, VBW = 2 MHz, Detector = RMS.
2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

3.4.3 Test Setup



3.4.4 Test Result of Peak Power Spectral Density

Frequency band			5150~5250 MHz / 5250~5350 MHz			
Condition			Peak Power Spectral Density (dBm/MHz)			
Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)
11a	2	5180	6.83	0.00	6.83	10.09
11a	2	5200	8.76	0.00	8.76	10.09
11a	2	5240	8.78	0.00	8.78	10.09
VHT20	2	5180	8.75	0.00	8.75	10.09
VHT20	2	5200	8.78	0.00	8.78	10.09
VHT20	2	5240	8.83	0.00	8.83	10.09
VHT40	2	5190	2.42	0.00	2.42	10.09
VHT40	2	5230	3.73	0.00	3.73	10.09
VHT80	2	5210	-4.51	0.00	-4.51	10.09
11a	2	5260	6.10	0.00	6.10	10.09
11a	2	5300	5.94	0.00	5.94	10.09
11a	2	5320	4.99	0.00	4.99	10.09
VHT20	2	5260	5.99	0.00	5.99	10.09
VHT20	2	5300	5.95	0.00	5.95	10.09
VHT20	2	5320	5.85	0.00	5.85	10.09
VHT40	2	5270	3.10	0.00	3.10	10.09
VHT40	2	5310	0.97	0.00	0.97	10.09
VHT80	2	5290	-4.29	0.00	-4.29	10.09


Note:

1. Test result is bin-by-bin summing measured value of each TX port.
2. D.F is duty factor.
3. Directional gain = 3.9 dBi + 10 * log(2/1) = 6.91 dBi > 6dBi
Limit shall be reduced to 11 dBm - (6.91 dBi - 6 dBi)= 10.09 dBm

Frequency band			5470~5725 MHz			
Condition			Peak Power Spectral Density (dBm/MHz)			
Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)
11a	2	5500	6.03	0.00	6.03	9.99
11a	2	5580	8.29	0.00	8.29	9.99
11a	2	5700	4.03	0.00	4.03	9.99
11a	2	5720	7.84	0.00	7.84	9.99
VHT20	2	5500	5.94	0.00	5.94	9.99
VHT20	2	5580	7.71	0.00	7.71	9.99
VHT20	2	5700	5.04	0.00	5.04	9.99
VHT20	2	5720	8.05	0.00	8.05	9.99
VHT40	2	5510	-0.02	0.00	-0.02	9.99
VHT40	2	5590	2.92	0.00	2.92	9.99
VHT40	2	5670	2.65	0.00	2.65	9.99
VHT40	2	5710	4.05	0.00	4.05	9.99
VHT80	2	5530	-5.22	0.00	-5.22	9.99
VHT80	2	5610	-2.51	0.00	-2.51	9.99
VHT80	2	5690	-2.34	0.00	-2.34	9.99

Note:


1. Test result is bin-by-bin summing measured value of each TX port.
2. D.F is duty factor.
3. Directional gain = $4 \text{ dBi} + 10 * \log(2/1) = 7.01 \text{ dBi} > 6\text{dBi}$
Limit shall be reduced to $11 \text{ dBm} - (7.01 \text{ dBi} - 6 \text{ dBi}) = 9.99 \text{ dBm}$

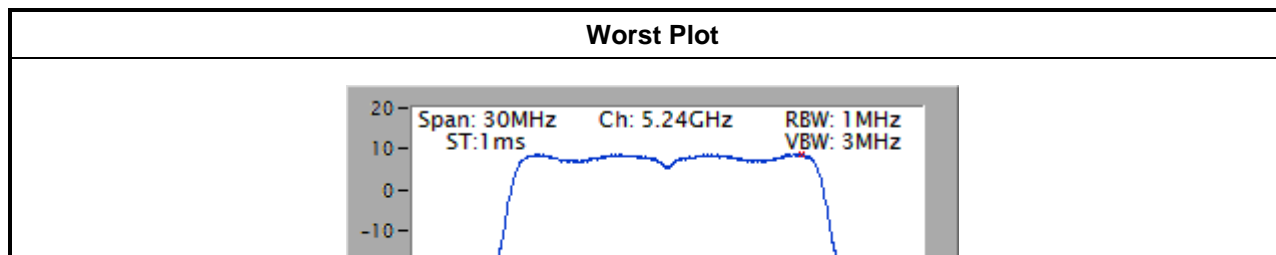

For Frequency band 5725-5850 MHz						
Condition			Peak Power Spectral Density (dBm/500kHz)			
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/500kHz)	Duty Factor (dB)	PPSD with D.F (dBm/500kHz)	PPSD Limit (dBm/500kHz)
11a	2	5745	5.48	0.00	5.48	28.99
11a	2	5785	5.57	0.00	5.57	28.99
11a	2	5825	6.24	0.00	6.24	28.99
VHT20	2	5745	5.85	0.00	5.85	28.99
VHT20	2	5785	5.65	0.00	5.65	28.99
VHT20	2	5825	6.23	0.00	6.23	28.99
VHT40	2	5755	1.58	0.00	1.58	28.99
VHT40	2	5795	1.71	0.00	1.71	28.99
VHT80	2	5775	-4.60	0.00	-4.60	28.99

Note:

1. Test result is bin-by-bin summing measured value of each TX port.
2. D.F is duty factor.
3. Directional gain = 4 dBi + 10 * log(2/1) = 7.01 dBi > 6dBi
Limit shall be reduced to 30 dBm - (7.01 dBi - 6 dBi)= 28.99 dBm

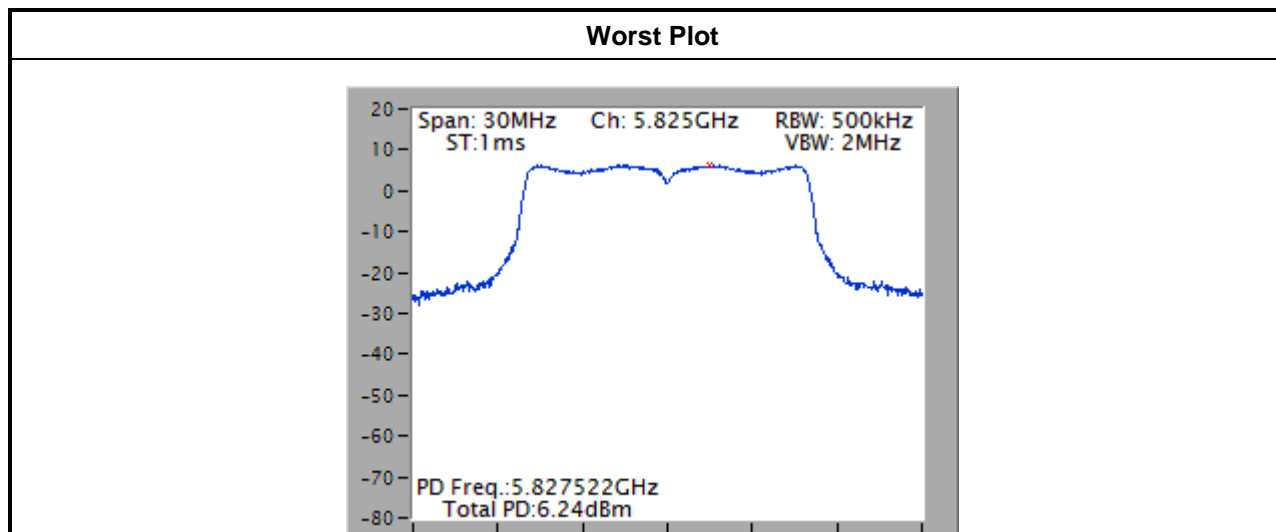

3.5 Transmitter Radiated and Band Edge Emissions

3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m @3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m @3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m @3m]
5.725 - 5.850 GHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

Radiated Emissions below 1 GHz

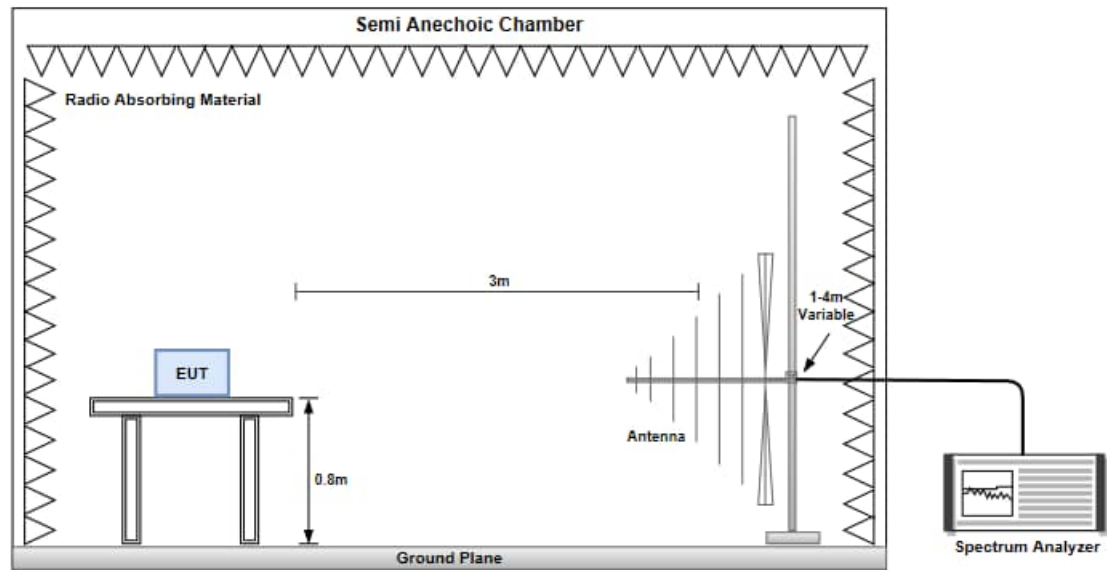


Radiated Emissions above 1 GHz

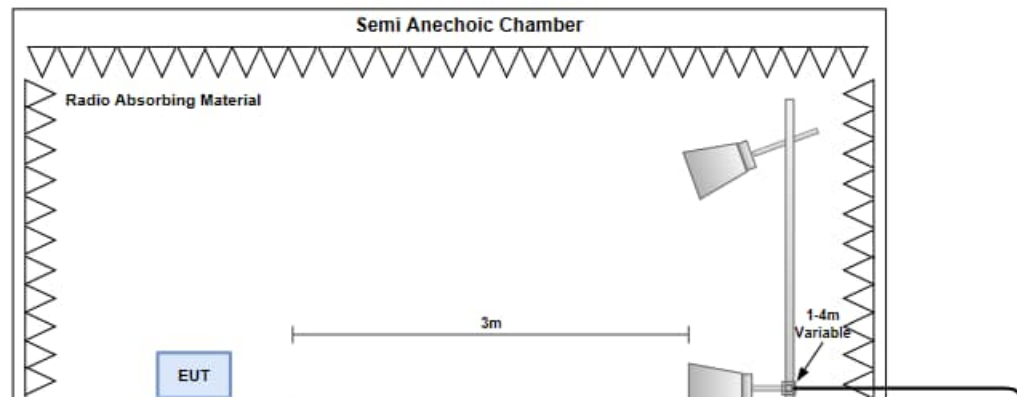

Configuration 1 : Dipole Antenna


3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

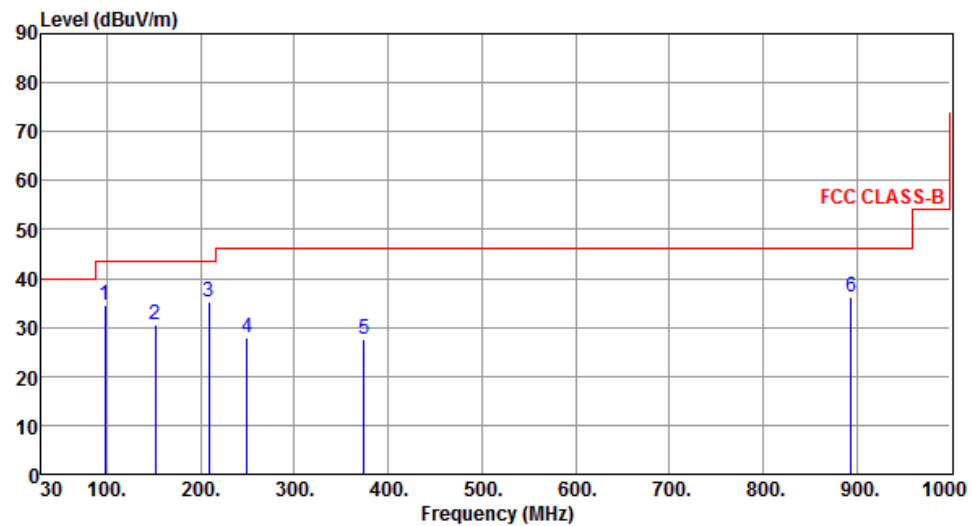


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	97.59	34.55	43.50	-8.95	48.36	-13.81	Peak	---	---
2	151.42	30.55	43.50	-12.95	39.05	-8.50	Peak	---	---
3	208.72	35.15	43.50	-8.35	46.44	-11.29	Peak	---	---
4	249.31	27.82	46.00	-18.18	37.44	-9.62	Peak	---	---
5	374.42	27.45	46.00	-18.55	33.37	-5.92	Peak	---	---
6	894.31	36.33	46.00	-9.67	32.15	4.18	Peak	---	---

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

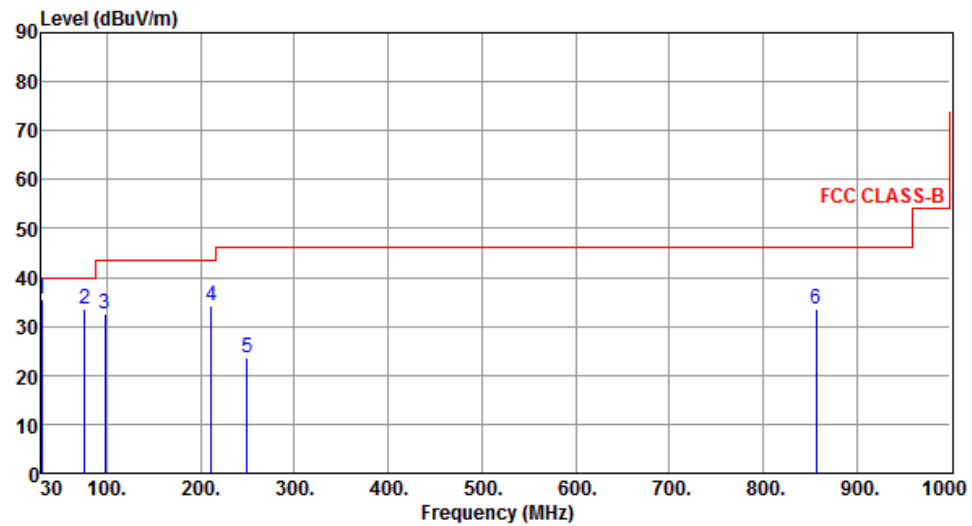


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.57	35.44	40.00	-4.56	44.80	-9.36	Peak	---	---
2	76.42	33.52	40.00	-6.48	45.93	-12.41	Peak	---	---
3	97.82	32.43	43.50	-11.07	46.21	-13.78	Peak	---	---
4	211.42	34.32	43.50	-9.18	45.59	-11.27	Peak	---	---
5	249.30	23.56	46.00	-22.44	33.18	-9.62	Peak	---	---
6	856.47	33.48	46.00	-12.52	29.96	3.52	Peak	---	---

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

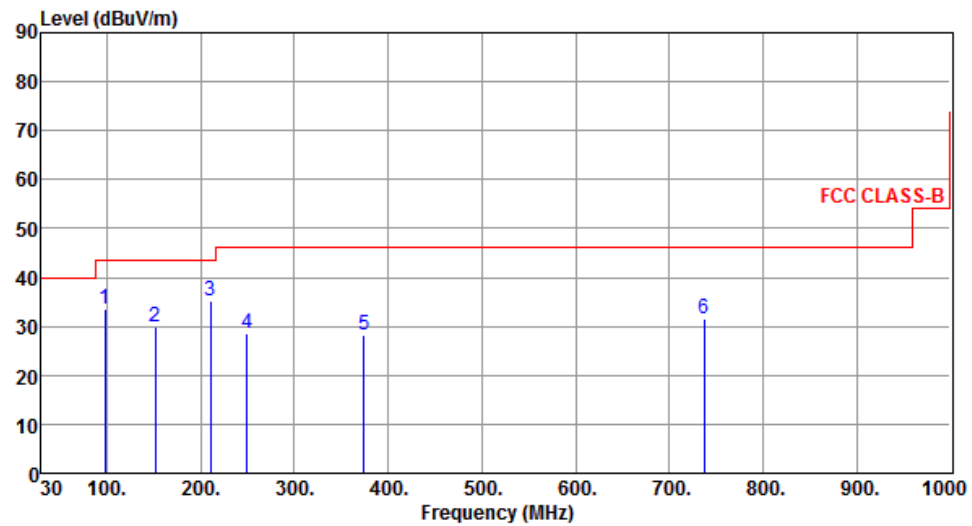

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	97.86	33.52	43.50	-9.98	47.30	-13.78	Peak	---	---
2	151.96	29.73	43.50	-13.77	38.22	-8.49	Peak	---	---
3	210.36	35.11	43.50	-8.39	46.39	-11.28	Peak	---	---
4	249.36	28.42	46.00	-17.58	38.04	-9.62	Peak	---	---
5	374.42	28.26	46.00	-17.74	34.18	-5.92	Peak	---	---
6	737.37	31.68	46.00	-14.32	30.11	1.57	Peak	---	---


Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

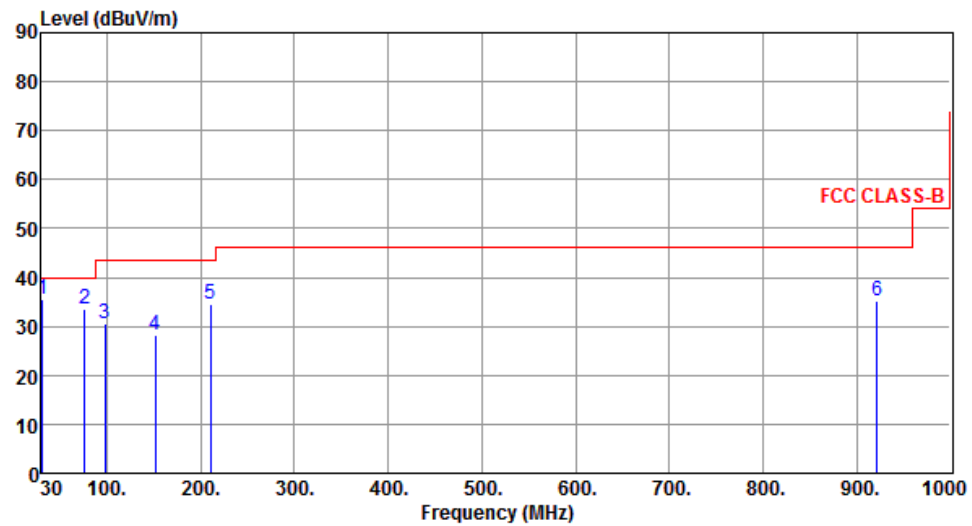

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.96	35.44	40.00	-4.56	44.78	-9.34	Peak	---	---
2	76.42	33.43	40.00	-6.57	45.84	-12.41	Peak	---	---
3	97.86	30.42	43.50	-13.08	44.20	-13.78	Peak	---	---
4	151.32	28.26	43.50	-15.24	36.76	-8.50	Peak	---	---
5	210.25	34.52	43.50	-8.98	45.81	-11.29	Peak	---	---
6	921.42	35.16	46.00	-10.84	30.51	4.65	Peak	---	---


3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		

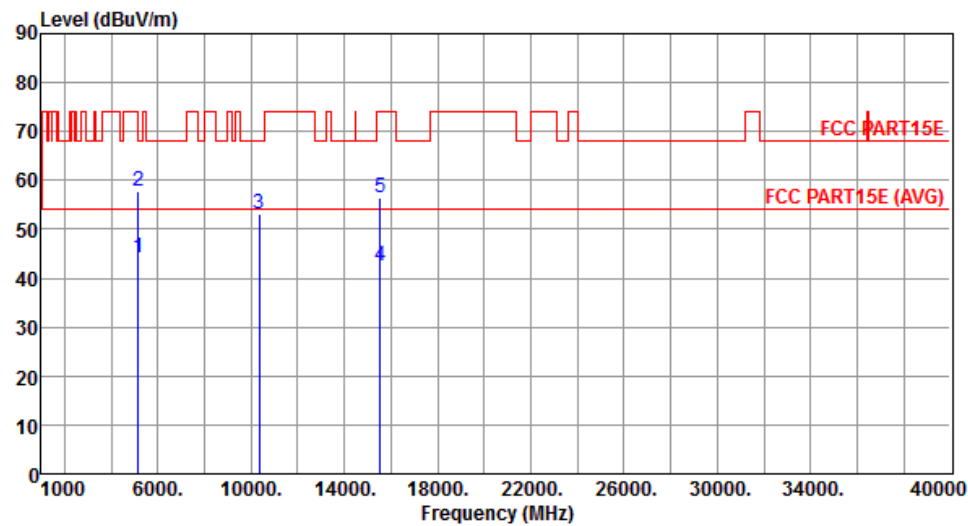


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.10	54.00	-9.90	39.08	5.02	Average	243	106
2	5150.00	57.69	74.00	-16.31	52.67	5.02	Peak	243	106
3	10360.00	53.02	68.20	-15.18	39.28	13.74	Peak	100	130
4	15540.00	42.46	54.00	-11.54	27.49	14.97	Average	140	300
5	15540.00	56.49	74.00	-17.51	41.52	14.97	Peak	140	300

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

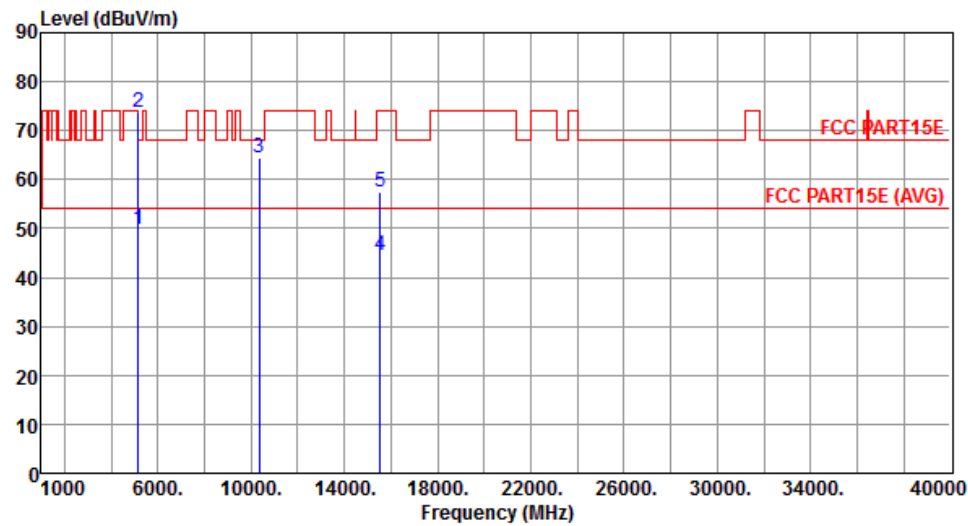


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	49.89	54.00	-4.11	44.87	5.02	Average	231	95
2	5150.00	73.72	74.00	-0.28	68.70	5.02	Peak	231	95
3	10360.00	64.48	68.20	-3.72	50.74	13.74	Peak	342	93
4	15540.00	44.39	54.00	-9.61	29.42	14.97	Average	134	343
5	15540.00	57.59	74.00	-16.41	42.62	14.97	Peak	134	343

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

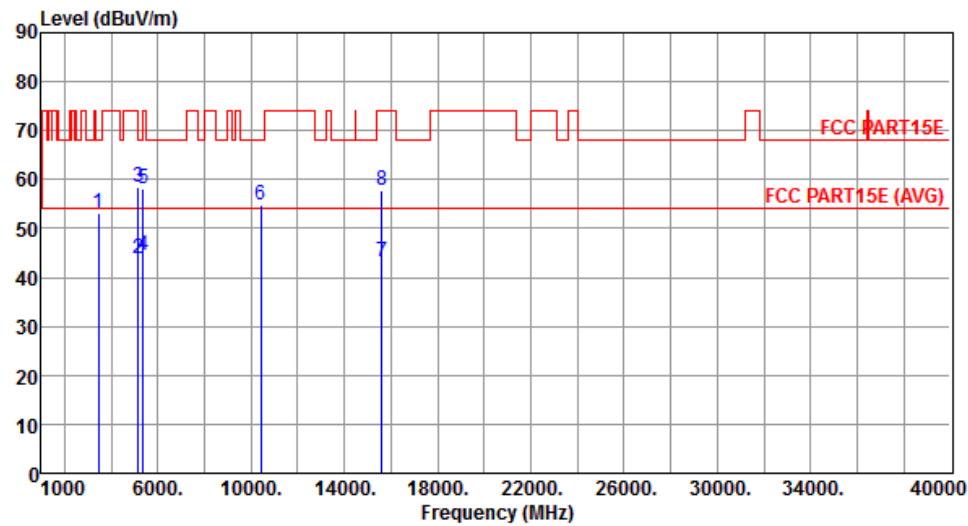


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.00	53.17	68.20	-15.03	52.31	0.86	Peak	100	48
2	5150.00	43.97	54.00	-10.03	38.95	5.02	Average	255	131
3	5150.00	58.42	74.00	-15.58	53.40	5.02	Peak	255	131
4	5350.00	44.66	54.00	-9.34	39.35	5.31	Average	255	131
5	5350.00	58.24	74.00	-15.76	52.93	5.31	Peak	255	131
6	10400.00	54.64	68.20	-13.56	40.87	13.77	Peak	100	126
7	15600.00	43.33	54.00	-10.67	28.39	14.94	Average	140	300
8	15600.00	57.70	74.00	-16.30	42.76	14.94	Peak	140	300

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

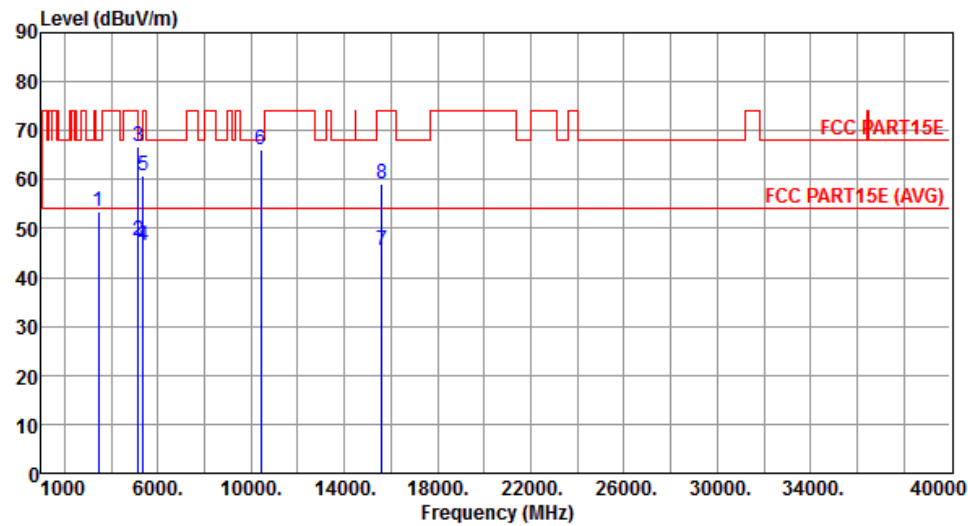


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.00	53.42	68.20	-14.78	52.56	0.86	Peak	100	350
2	5150.00	47.64	54.00	-6.36	42.62	5.02	Average	165	102
3	5150.00	66.66	74.00	-7.34	61.64	5.02	Peak	165	102
4	5350.00	46.38	54.00	-7.62	41.07	5.31	Average	165	102
5	5350.00	60.83	74.00	-13.17	55.52	5.31	Peak	165	102
6	10400.00	66.16	68.20	-2.04	52.39	13.77	Peak	349	101
7	15600.00	45.50	54.00	-8.50	30.56	14.94	Average	140	343
8	15600.00	59.19	74.00	-14.81	44.25	14.94	Peak	140	343

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

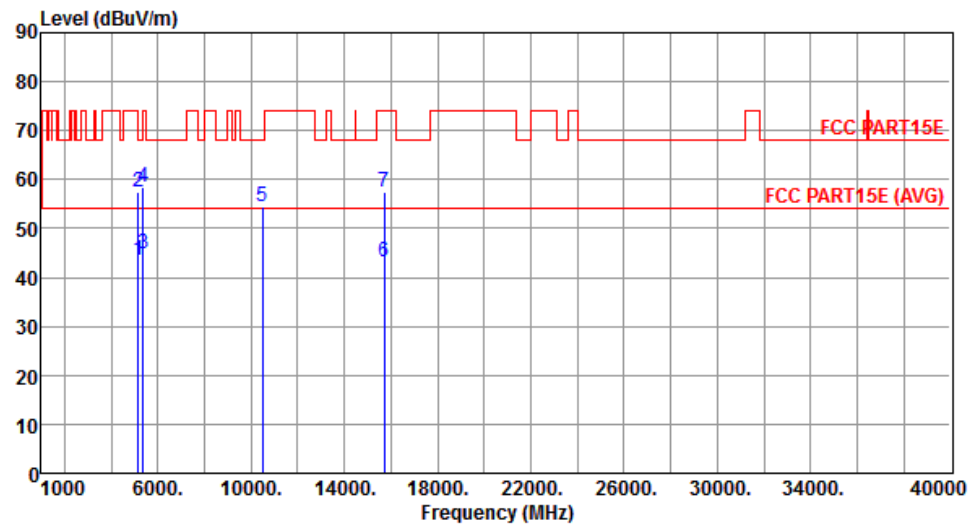


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.66	54.00	-10.34	38.64	5.02	Average	232	105
2	5150.00	57.48	74.00	-16.52	52.46	5.02	Peak	232	105
3	5350.00	44.70	54.00	-9.30	39.39	5.31	Average	232	105
4	5350.00	58.49	74.00	-15.51	53.18	5.31	Peak	232	105
5	10480.00	54.36	68.20	-13.84	40.55	13.81	Peak	100	126
6	15720.00	43.13	54.00	-10.87	28.22	14.91	Average	143	299
7	15720.00	57.58	74.00	-16.42	42.67	14.91	Peak	143	299

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

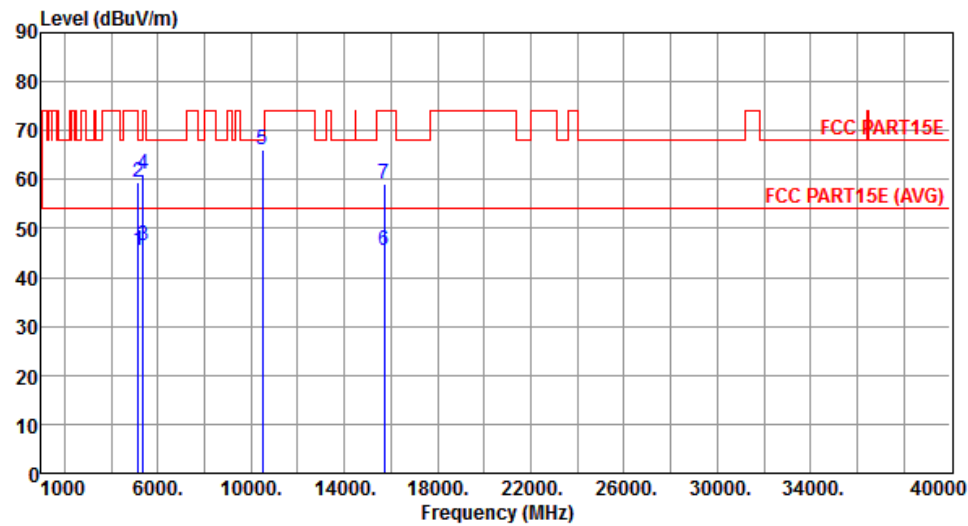


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.57	54.00	-8.43	40.55	5.02	Average	247	75
2	5150.00	59.30	74.00	-14.70	54.28	5.02	Peak	247	75
3	5350.00	46.51	54.00	-7.49	41.20	5.31	Average	247	75
4	5350.00	60.98	74.00	-13.02	55.67	5.31	Peak	247	75
5	10480.00	66.02	68.20	-2.18	52.21	13.81	Peak	346	98
6	15720.00	45.41	54.00	-8.59	30.50	14.91	Average	139	340
7	15720.00	59.07	74.00	-14.93	44.16	14.91	Peak	139	340

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		

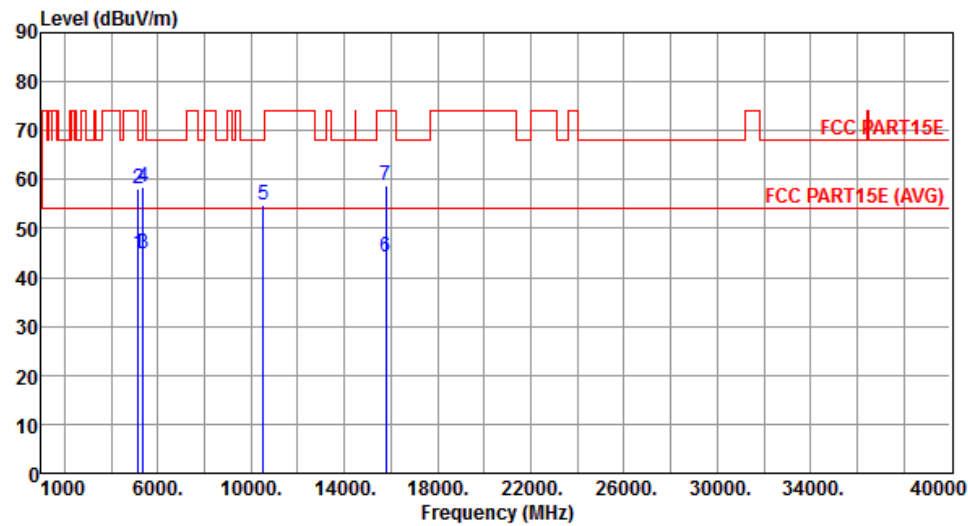


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.00	54.00	-9.00	39.98	5.02	Average	201	66
2	5150.00	58.17	74.00	-15.83	53.15	5.02	Peak	201	66
3	5350.00	44.71	54.00	-9.29	39.40	5.31	Average	201	66
4	5350.00	58.33	74.00	-15.67	53.02	5.31	Peak	201	66
5	10520.00	54.75	68.20	-13.45	40.91	13.84	Peak	100	138
6	15780.00	44.26	54.00	-9.74	29.39	14.87	Average	149	314
7	15780.00	58.79	74.00	-15.21	43.92	14.87	Peak	149	314

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical		

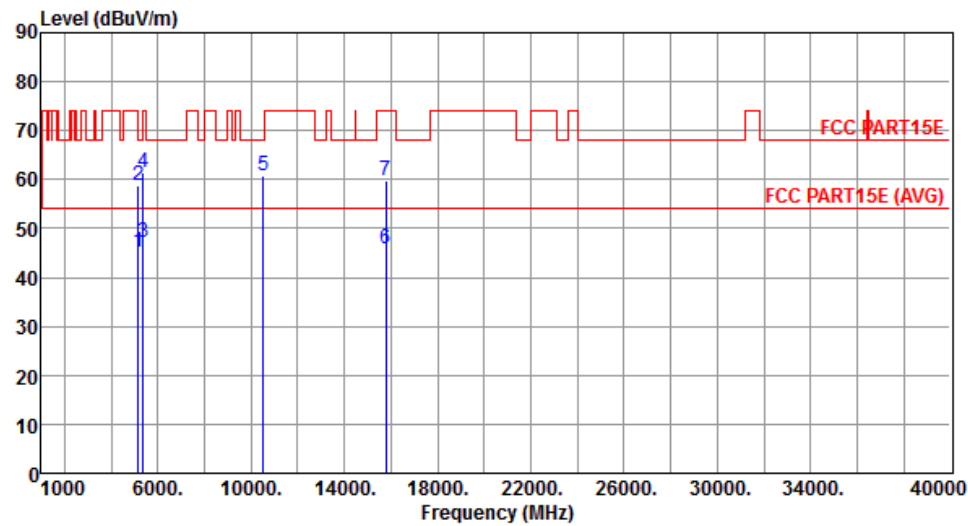


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.14	54.00	-8.86	40.12	5.02	Average	233	94
2	5150.00	58.68	74.00	-15.32	53.66	5.02	Peak	233	94
3	5350.00	47.18	54.00	-6.82	41.87	5.31	Average	233	94
4	5350.00	61.33	74.00	-12.67	56.02	5.31	Peak	233	94
5	10520.00	60.87	68.20	-7.33	47.03	13.84	Peak	341	102
6	15780.00	45.91	54.00	-8.09	31.04	14.87	Average	138	336
7	15780.00	59.82	74.00	-14.18	44.95	14.87	Peak	138	336

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal		

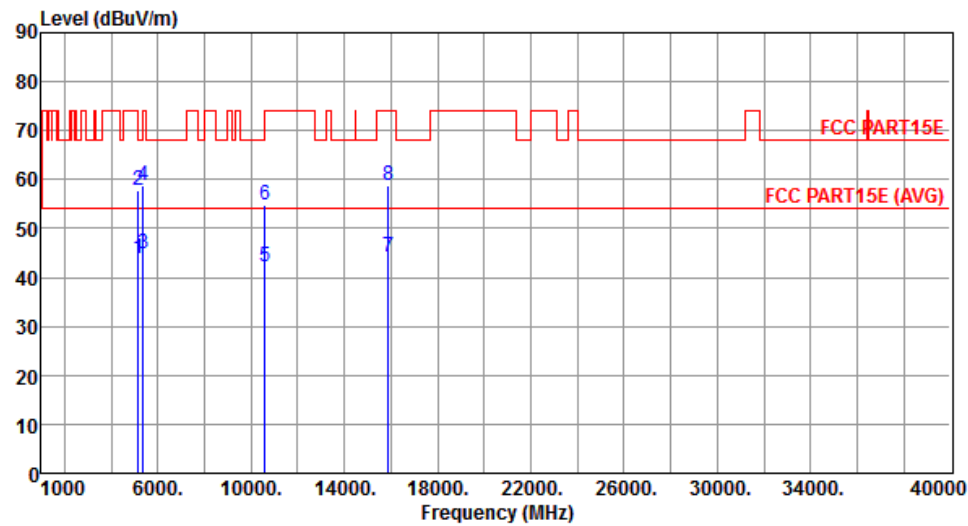


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.91	54.00	-10.09	38.89	5.02	Average	177	135
2	5150.00	57.86	74.00	-16.14	52.84	5.02	Peak	177	135
3	5350.00	44.67	54.00	-9.33	39.36	5.31	Average	177	135
4	5350.00	58.65	74.00	-15.35	53.34	5.31	Peak	177	135
5	10600.00	42.14	54.00	-11.86	28.22	13.92	Average	100	143
6	10600.00	54.69	74.00	-19.31	40.77	13.92	Peak	100	143
7	15900.00	44.02	54.00	-9.98	29.18	14.84	Average	147	317
8	15900.00	58.64	74.00	-15.36	43.80	14.84	Peak	147	317

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Vertical		

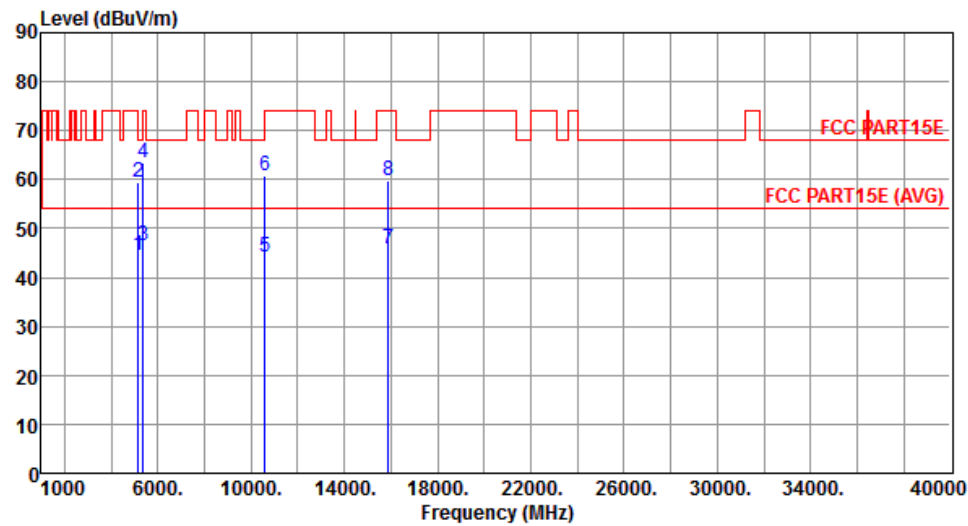


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.54	54.00	-9.46	39.52	5.02	Average	200	141
2	5150.00	59.54	74.00	-14.46	54.52	5.02	Peak	200	141
3	5350.00	46.58	54.00	-7.42	41.27	5.31	Average	200	141
4	5350.00	63.31	74.00	-10.69	58.00	5.31	Peak	200	141
5	10600.00	44.27	54.00	-9.73	30.35	13.92	Average	348	101
6	10600.00	60.62	74.00	-13.38	46.70	13.92	Peak	348	101
7	15900.00	45.78	54.00	-8.22	30.94	14.84	Average	139	339
8	15900.00	59.74	74.00	-14.26	44.90	14.84	Peak	139	339

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal		

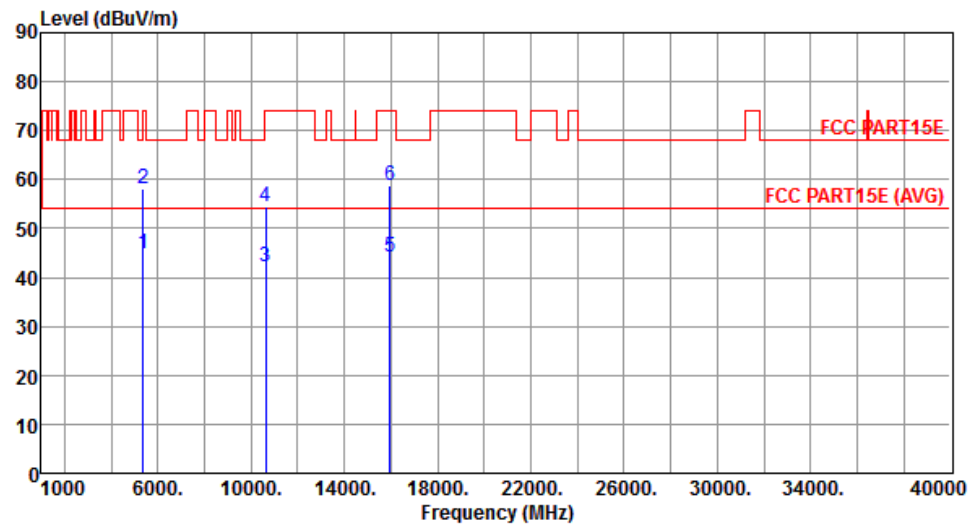


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	44.73	54.00	-9.27	39.42	5.31	Average	190	131
2	5350.00	58.17	74.00	-15.83	52.86	5.31	Peak	190	131
3	10640.00	42.19	54.00	-11.81	28.23	13.96	Average	100	148
4	10640.00	54.53	74.00	-19.47	40.57	13.96	Peak	100	148
5	15960.00	44.13	54.00	-9.87	29.32	14.81	Average	140	309
6	15960.00	58.73	74.00	-15.27	43.92	14.81	Peak	140	309

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical		

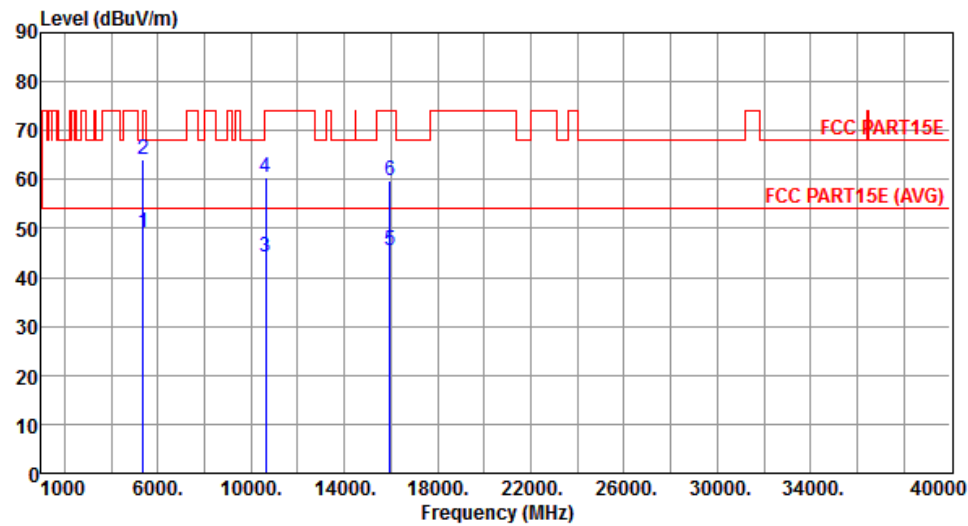


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	49.17	54.00	-4.83	43.86	5.31	Average	228	95
2	5350.00	64.17	74.00	-9.83	58.86	5.31	Peak	228	95
3	10640.00	44.30	54.00	-9.70	30.34	13.96	Average	341	98
4	10640.00	60.56	74.00	-13.44	46.60	13.96	Peak	341	98
5	15960.00	45.65	54.00	-8.35	30.84	14.81	Average	145	341
6	15960.00	59.63	74.00	-14.37	44.82	14.81	Peak	145	341

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Horizontal		

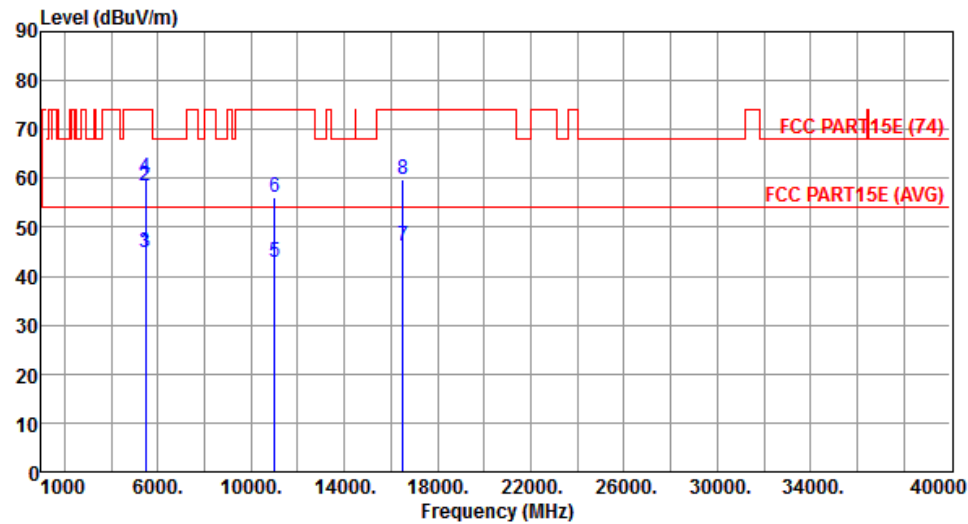


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	44.82	54.00	-9.18	39.36	5.46	Average	194	78
2	5460.00	58.52	74.00	-15.48	53.06	5.46	Peak	194	78
3	5470.00	44.97	54.00	-9.03	39.50	5.47	Average	194	78
4	5470.00	60.25	74.00	-13.75	54.78	5.47	Peak	194	78
5	11000.00	42.86	54.00	-11.14	28.56	14.30	Average	100	39
6	11000.00	56.02	74.00	-17.98	41.72	14.30	Peak	100	39
7	16500.00	46.16	54.00	-7.84	30.32	15.84	Average	119	293
8	16500.00	59.64	74.00	-14.36	43.80	15.84	Peak	119	293

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical		

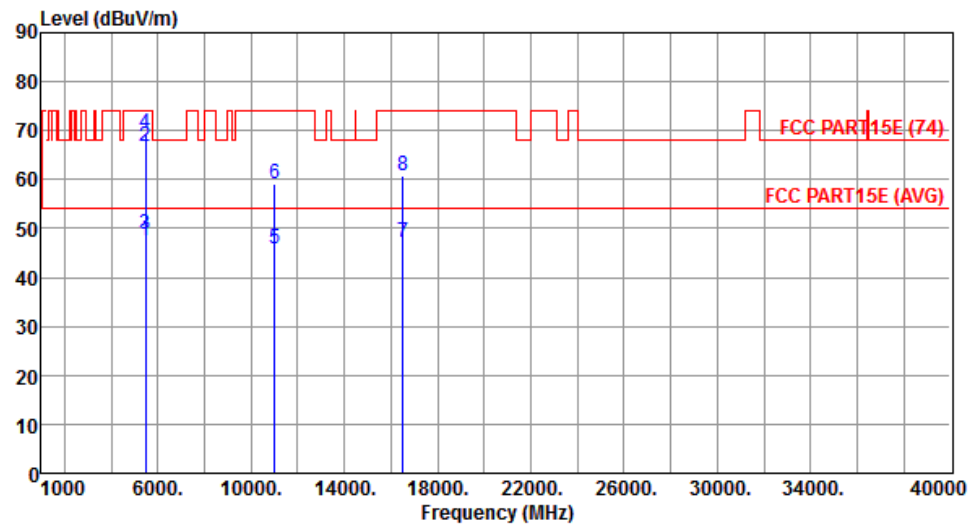


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.61	54.00	-6.39	42.15	5.46	Average	184	63
2	5460.00	66.78	74.00	-7.22	61.32	5.46	Peak	184	63
3	5470.00	48.83	54.00	-5.17	43.36	5.47	Average	184	63
4	5470.00	69.49	74.00	-4.51	64.02	5.47	Peak	184	63
5	11000.00	45.79	54.00	-8.21	31.49	14.30	Average	388	16
6	11000.00	59.11	74.00	-14.89	44.81	14.30	Peak	388	16
7	16500.00	47.08	54.00	-6.92	31.24	15.84	Average	123	339
8	16500.00	60.66	74.00	-13.34	44.82	15.84	Peak	123	339

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal		

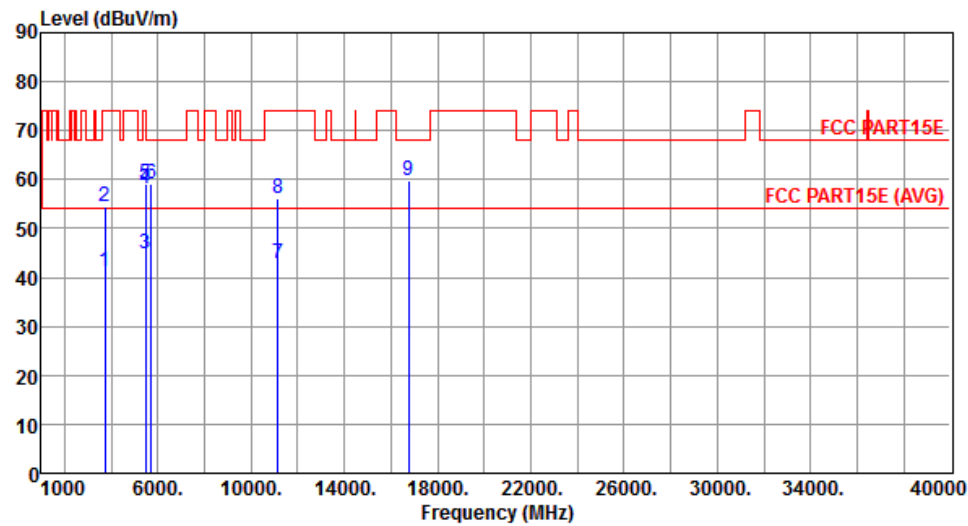


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m			dBuV			cm	deg
1	3720.00	41.11	54.00	-12.89	39.51	1.60	Average	100	337
2	3720.00	54.45	74.00	-19.55	52.85	1.60	Peak	100	337
3	5460.00	44.90	54.00	-9.10	39.44	5.46	Average	121	298
4	5460.00	58.15	74.00	-15.85	52.69	5.46	Peak	121	298
5	5470.00	58.96	68.20	-9.24	53.49	5.47	Peak	121	298
6	5725.00	59.15	68.20	-9.05	53.34	5.81	Peak	121	298
7	11160.00	43.00	54.00	-11.00	28.56	14.44	Average	100	30
8	11160.00	56.18	74.00	-17.82	41.74	14.44	Peak	100	30
9	16740.00	59.87	68.20	-8.33	43.90	15.97	Peak	121	298

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		

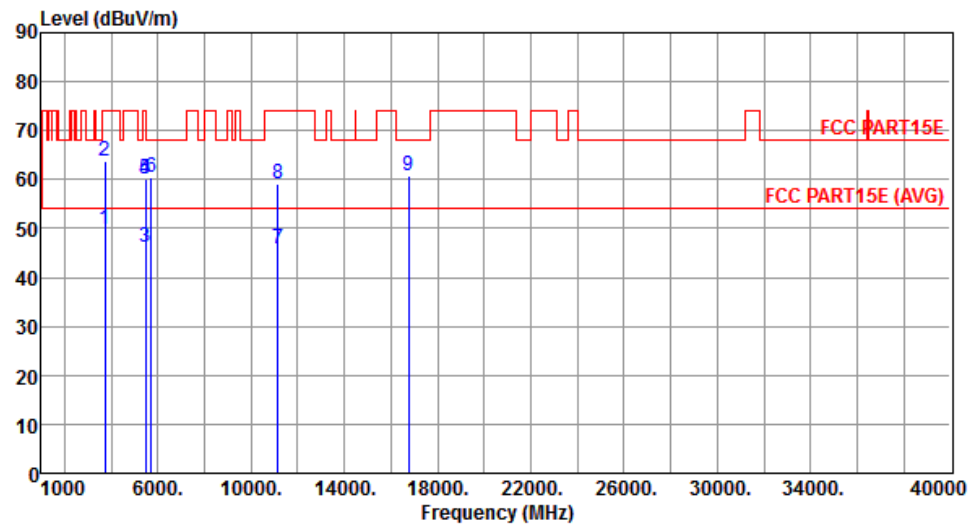


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	49.77	54.00	-4.23	48.17	1.60	Average	267	93
2	3720.00	63.80	74.00	-10.20	62.20	1.60	Peak	267	93
3	5460.00	46.29	54.00	-7.71	40.83	5.46	Average	214	136
4	5460.00	60.13	74.00	-13.87	54.67	5.46	Peak	214	136
5	5470.00	60.12	68.20	-8.08	54.65	5.47	Peak	214	136
6	5725.00	60.29	68.20	-7.91	54.48	5.81	Peak	214	136
7	11160.00	45.94	54.00	-8.06	31.50	14.44	Average	387	20
8	11160.00	59.24	74.00	-14.76	44.80	14.44	Peak	387	20
9	16740.00	60.87	68.20	-7.33	44.90	15.97	Peak	125	330

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		

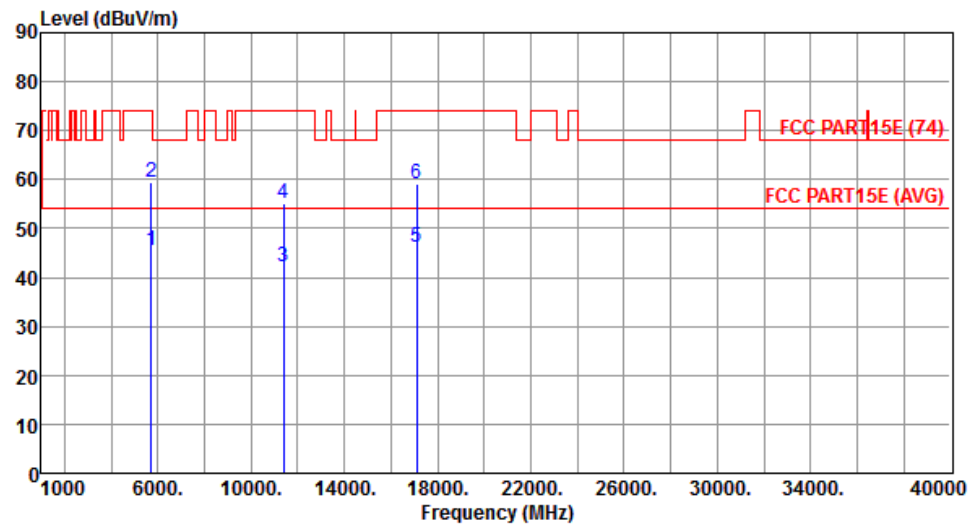


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	45.44	54.00	-8.56	39.63	5.81	Average	203	64
2	5725.00	59.46	74.00	-14.54	53.65	5.81	Peak	203	64
3	11400.00	42.14	54.00	-11.86	27.49	14.65	Average	100	35
4	11400.00	55.12	74.00	-18.88	40.47	14.65	Peak	100	35
5	17100.00	46.07	54.00	-7.93	29.56	16.51	Average	119	311
6	17100.00	58.99	74.00	-15.01	42.48	16.51	Peak	119	311

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		

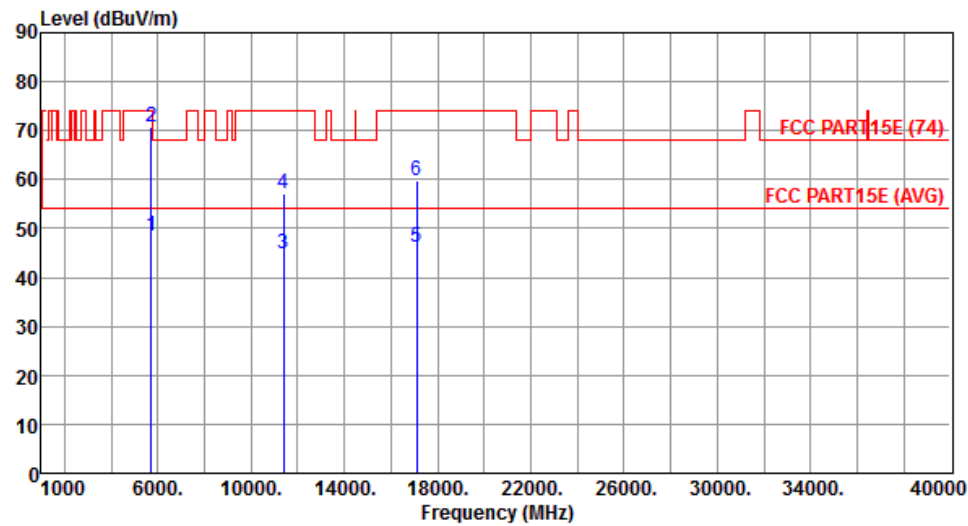


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	48.51	54.00	-5.49	42.70	5.81	Average	207	123
2	5725.00	70.81	74.00	-3.19	65.00	5.81	Peak	207	123
3	11400.00	44.88	54.00	-9.12	30.23	14.65	Average	384	18
4	11400.00	57.23	74.00	-16.77	42.58	14.65	Peak	384	18
5	17100.00	46.29	54.00	-7.71	29.78	16.51	Average	131	316
6	17100.00	59.70	74.00	-14.30	43.19	16.51	Peak	131	316

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal		

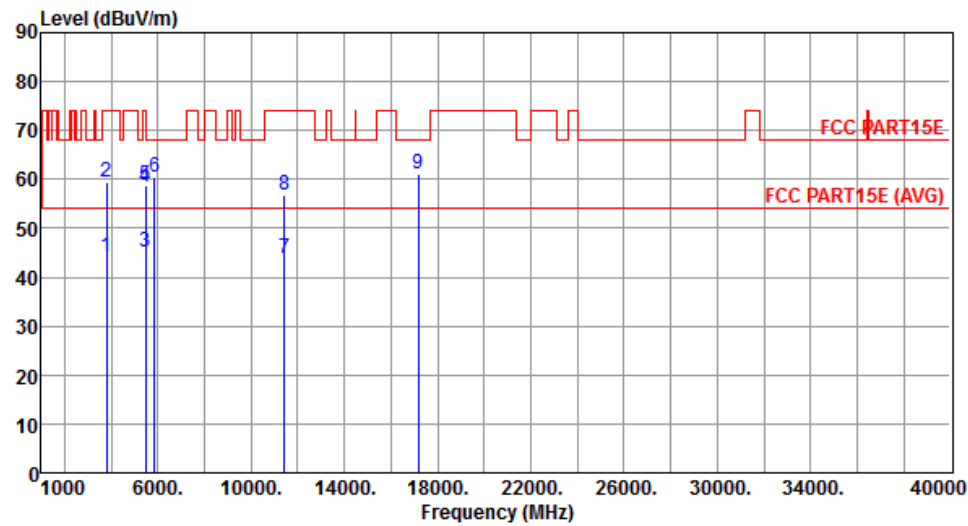


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	44.12	54.00	-9.88	42.22	1.90	Average	218	0
2	3813.33	59.33	74.00	-14.67	57.43	1.90	Peak	218	0
3	5460.00	45.02	54.00	-8.98	39.56	5.46	Average	214	67
4	5460.00	58.36	74.00	-15.64	52.90	5.46	Peak	214	67
5	5470.00	58.67	68.20	-9.53	53.20	5.47	Peak	214	67
6	5850.00	60.34	68.20	-7.86	54.35	5.99	Peak	214	67
7	11440.00	43.85	54.00	-10.15	29.16	14.69	Average	100	45
8	11440.00	56.64	74.00	-17.36	41.95	14.69	Peak	100	45
9	17160.00	61.02	68.20	-7.18	44.26	16.76	Peak	118	305

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Vertical		

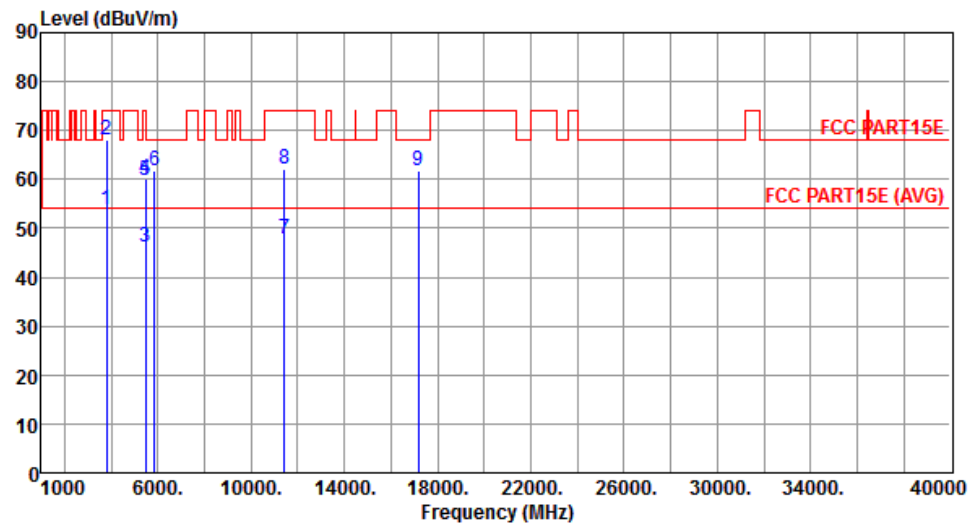


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	53.76	54.00	-0.24	51.86	1.90	Average	282	90
2	3813.33	67.99	74.00	-6.01	66.09	1.90	Peak	282	90
3	5460.00	46.01	54.00	-7.99	40.55	5.46	Average	187	138
4	5460.00	60.13	74.00	-13.87	54.67	5.46	Peak	187	138
5	5470.00	59.65	68.20	-8.55	54.18	5.47	Peak	187	138
6	5850.00	61.84	68.20	-6.36	55.85	5.99	Peak	187	138
7	11440.00	47.83	54.00	-6.17	33.14	14.69	Average	323	98
8	11440.00	62.19	74.00	-11.81	47.50	14.69	Peak	323	98
9	17160.00	61.84	68.20	-6.36	45.08	16.76	Peak	130	351

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

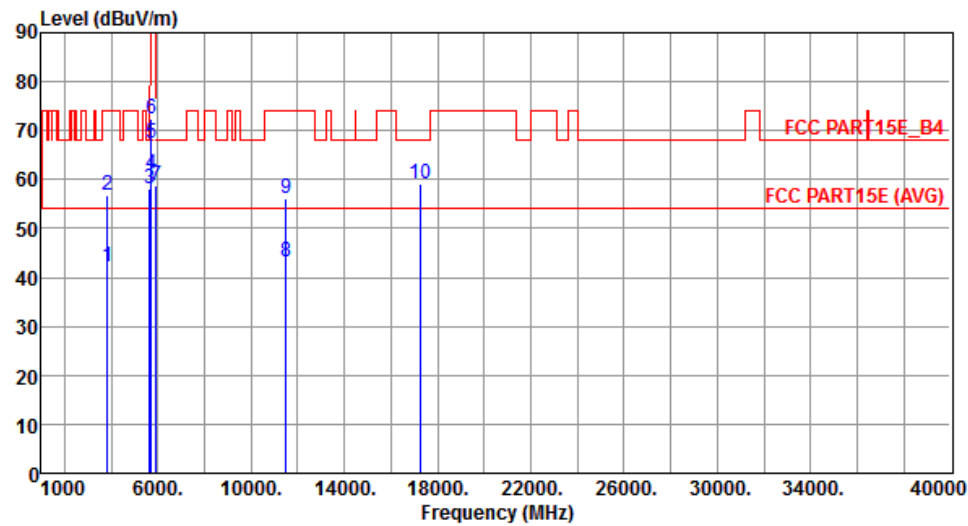


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	42.08	54.00	-11.92	40.12	1.96	Average	100	333
2	3830.00	56.79	74.00	-17.21	54.83	1.96	Peak	100	333
3	5650.00	58.16	68.20	-10.04	52.47	5.69	Peak	214	61
4	5700.00	61.08	105.20	-44.12	55.31	5.77	Peak	214	61
5	5720.00	67.25	110.80	-43.55	61.46	5.79	Peak	214	61
6	5725.00	72.54	122.20	-49.66	66.73	5.81	Peak	214	61
7	5925.00	58.80	68.20	-9.40	52.71	6.09	Peak	214	61
8	11490.00	43.09	54.00	-10.91	28.36	14.73	Average	100	122
9	11490.00	55.97	74.00	-18.03	41.24	14.73	Peak	100	122
10	17235.00	59.18	68.20	-9.02	42.11	17.07	Peak	100	155

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

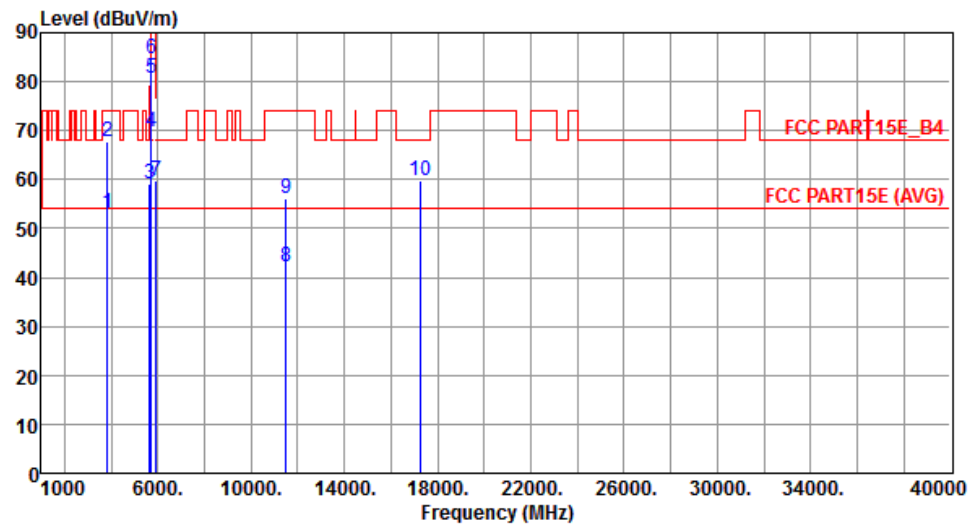


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	53.12	54.00	-0.88	51.16	1.96	Average	275	71
2	3830.00	67.87	74.00	-6.13	65.91	1.96	Peak	275	71
3	5650.00	59.25	68.20	-8.95	53.56	5.69	Peak	190	126
4	5700.00	69.78	105.20	-35.42	64.01	5.77	Peak	190	126
5	5720.00	80.58	110.80	-30.22	74.79	5.79	Peak	190	126
6	5725.00	84.65	122.20	-37.55	78.84	5.81	Peak	190	126
7	5925.00	59.62	68.20	-8.58	53.53	6.09	Peak	190	126
8	11490.00	42.26	54.00	-11.74	27.53	14.73	Average	100	145
9	11490.00	55.97	74.00	-18.03	41.24	14.73	Peak	100	145
10	17235.00	59.74	68.20	-8.46	42.67	17.07	Peak	100	196

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		

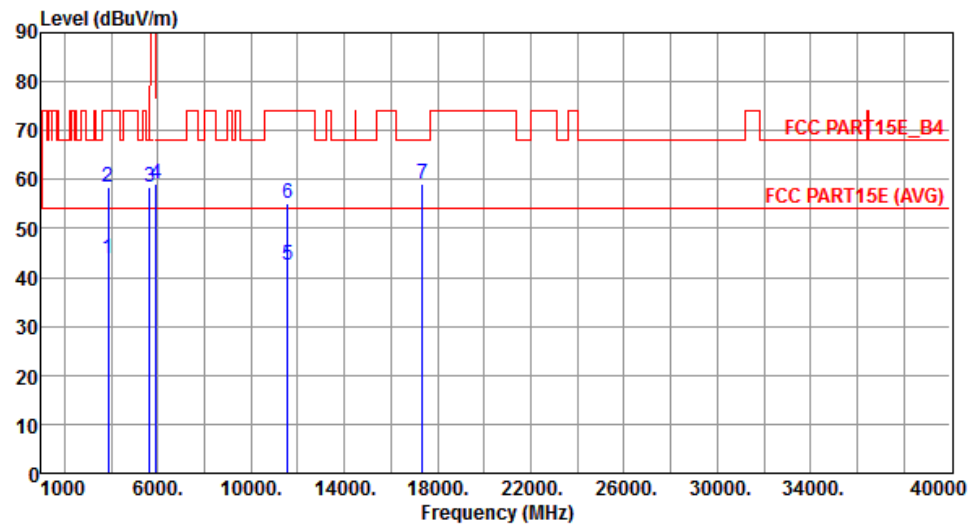


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	43.91	54.00	-10.09	41.86	2.05	Average	100	333
2	3856.66	58.51	74.00	-15.49	56.46	2.05	Peak	100	333
3	5650.00	58.53	68.20	-9.67	52.84	5.69	Peak	214	67
4	5925.00	59.23	68.20	-8.97	53.14	6.09	Peak	214	67
5	11570.00	42.44	54.00	-11.56	27.84	14.60	Average	100	168
6	11570.00	55.05	74.00	-18.95	40.45	14.60	Peak	100	168
7	17355.00	58.96	68.20	-9.24	41.41	17.55	Peak	100	175

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

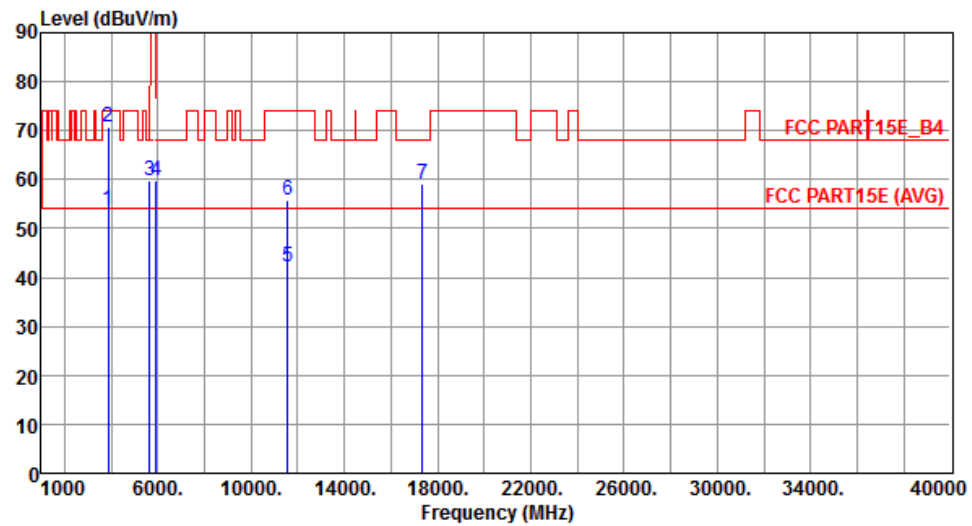


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	53.82	54.00	-0.18	51.77	2.05	Average	262	99
2	3856.66	70.59	74.00	-3.41	68.54	2.05	Peak	262	99
3	5650.00	59.76	68.20	-8.44	54.07	5.69	Peak	197	125
4	5925.00	59.77	68.20	-8.43	53.68	6.09	Peak	197	125
5	11570.00	42.22	54.00	-11.78	27.62	14.60	Average	100	213
6	11570.00	55.65	74.00	-18.35	41.05	14.60	Peak	100	213
7	17355.00	59.26	68.20	-8.94	41.71	17.55	Peak	100	177

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		

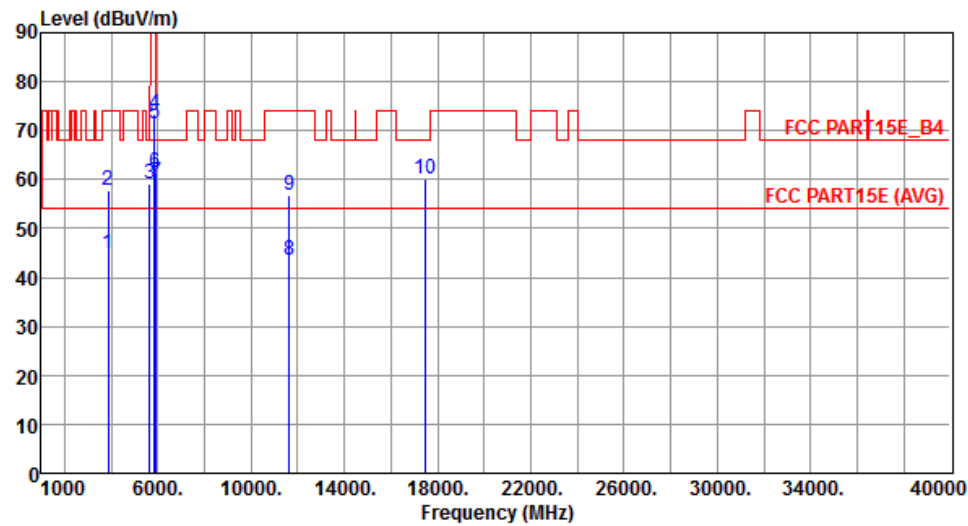

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	44.97	54.00	-9.03	42.83	2.14	Average	100	347
2	3883.33	57.64	74.00	-16.36	55.50	2.14	Peak	100	347
3	5650.00	59.00	68.20	-9.20	53.31	5.69	Peak	201	62
4	5850.00	73.41	122.20	-48.79	67.42	5.99	Peak	201	62
5	5855.00	71.35	110.80	-39.45	65.35	6.00	Peak	201	62
6	5875.00	61.58	105.20	-43.62	55.56	6.02	Peak	201	62
7	5925.00	59.39	68.20	-8.81	53.30	6.09	Peak	201	62
8	11650.00	43.48	54.00	-10.52	29.04	14.44	Average	165	147
9	11650.00	56.69	74.00	-17.31	42.25	14.44	Peak	165	147
10	17475.00	60.25	68.20	-7.95	42.21	18.04	Peak	100	166


Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		

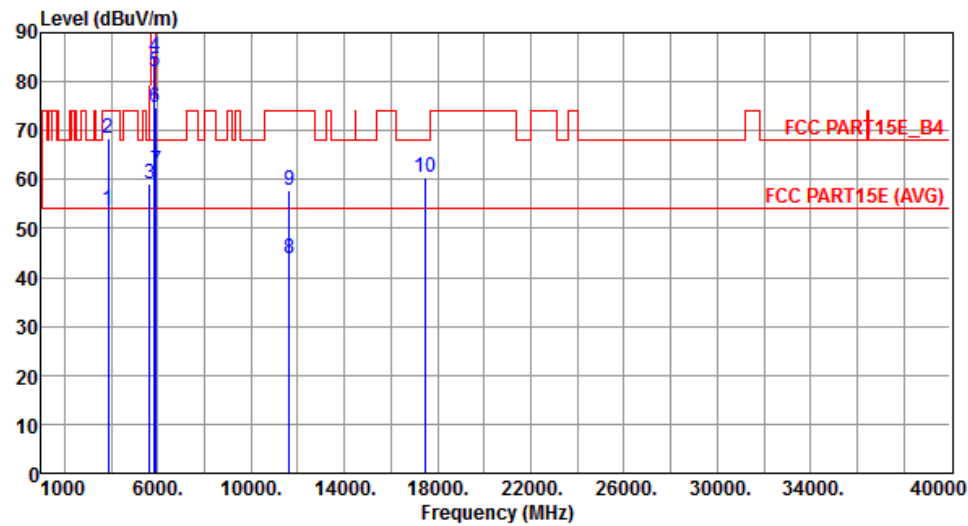

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
					dBuV			cm	deg
1	3883.33	53.78	54.00	-0.22	51.64	2.14	Average	259	96
2	3883.33	68.49	74.00	-5.51	66.35	2.14	Peak	259	96
3	5650.00	59.14	68.20	-9.06	53.45	5.69	Peak	192	136
4	5850.00	85.12	122.20	-37.08	79.13	5.99	Peak	192	136
5	5855.00	82.12	110.80	-28.68	76.12	6.00	Peak	192	136
6	5875.00	74.63	105.20	-30.57	68.61	6.02	Peak	192	136
7	5925.00	61.90	68.20	-6.30	55.81	6.09	Peak	192	136
8	11650.00	44.00	54.00	-10.00	29.56	14.44	Average	172	144
9	11650.00	57.69	74.00	-16.31	43.25	14.44	Peak	172	144
10	17475.00	60.34	68.20	-7.86	42.30	18.04	Peak	100	156


3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		

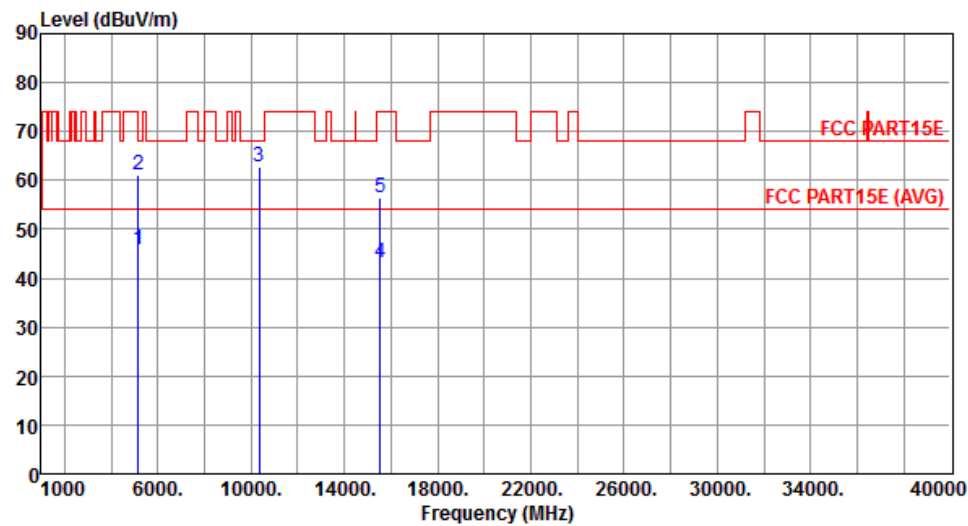


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.69	54.00	-8.31	40.67	5.02	Average	199	61
2	5150.00	61.09	74.00	-12.91	56.07	5.02	Peak	199	61
3	10360.00	62.63	68.20	-5.57	48.89	13.74	Peak	190	52
4	15540.00	43.09	54.00	-10.91	28.12	14.97	Average	100	312
5	15540.00	56.50	74.00	-17.50	41.53	14.97	Peak	100	312

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Vertical		

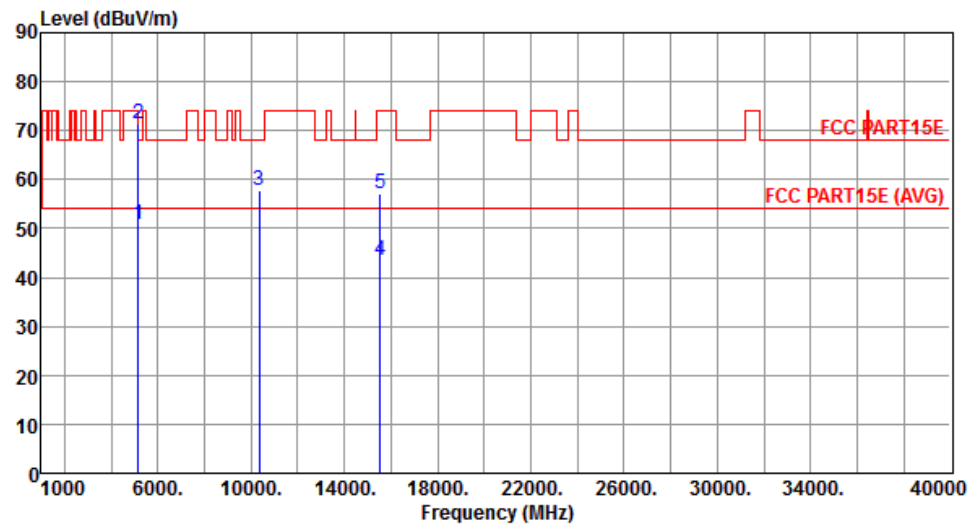


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	50.96	54.00	-3.04	45.94	5.02	Average	197	43
2	5150.00	71.32	74.00	-2.68	66.30	5.02	Peak	197	43
3	10360.00	57.80	68.20	-10.40	44.06	13.74	Peak	143	295
4	15540.00	43.40	54.00	-10.60	28.43	14.97	Average	100	318
5	15540.00	57.22	74.00	-16.78	42.25	14.97	Peak	100	318

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

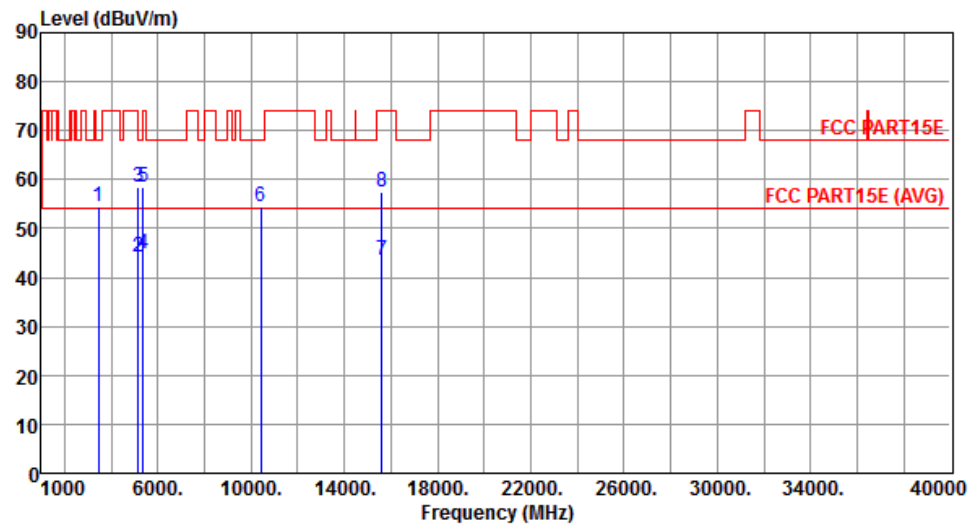


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.00	54.37	68.20	-13.83	53.51	0.86	Peak	100	52
2	5150.00	44.23	54.00	-9.77	39.21	5.02	Average	252	130
3	5150.00	58.47	74.00	-15.53	53.45	5.02	Peak	252	130
4	5350.00	44.77	54.00	-9.23	39.46	5.31	Average	252	130
5	5350.00	58.42	74.00	-15.58	53.11	5.31	Peak	252	130
6	10400.00	54.39	68.20	-13.81	40.62	13.77	Peak	100	133
7	15600.00	43.46	54.00	-10.54	28.52	14.94	Average	138	292
8	15600.00	57.38	74.00	-16.62	42.44	14.94	Peak	138	292

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

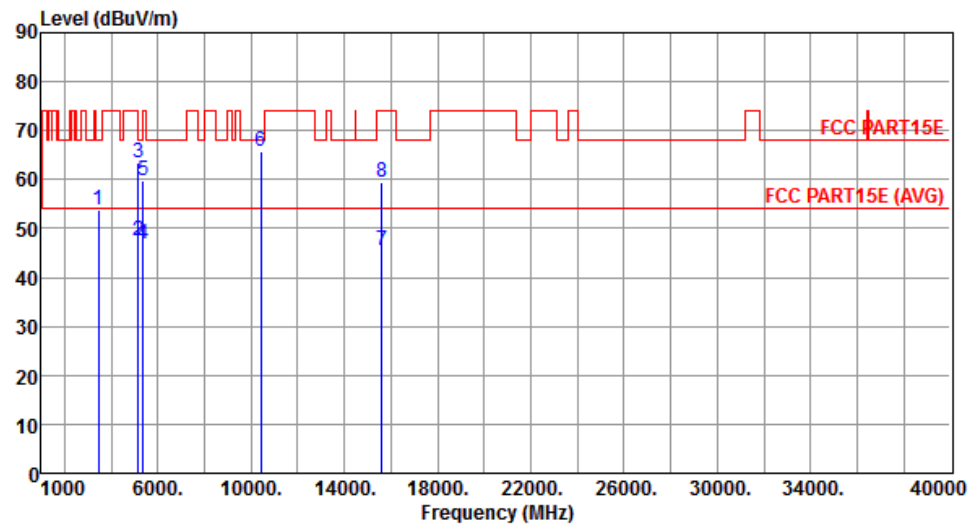


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
					dBuV			cm	deg
1	3466.00	53.97	68.20	-14.23	53.11	0.86	Peak	100	348
2	5150.00	47.48	54.00	-6.52	42.46	5.02	Average	162	110
3	5150.00	63.55	74.00	-10.45	58.53	5.02	Peak	162	110
4	5350.00	46.73	54.00	-7.27	41.42	5.31	Average	162	110
5	5350.00	59.79	74.00	-14.21	54.48	5.31	Peak	162	110
6	10400.00	65.92	68.20	-2.28	52.15	13.77	Peak	340	100
7	15600.00	45.56	54.00	-8.44	30.62	14.94	Average	138	342
8	15600.00	59.35	74.00	-14.65	44.41	14.94	Peak	138	342

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

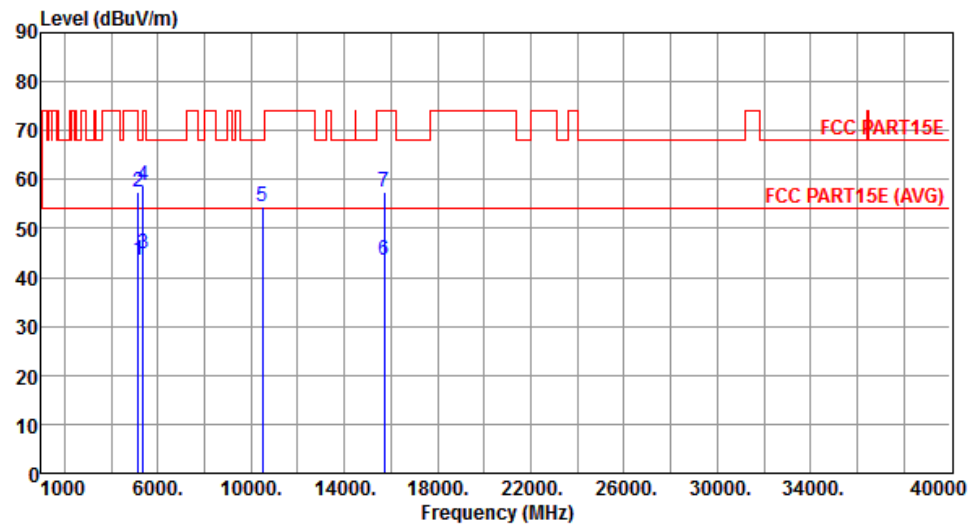


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.61	54.00	-10.39	38.59	5.02	Average	230	108
2	5150.00	57.46	74.00	-16.54	52.44	5.02	Peak	230	108
3	5350.00	44.84	54.00	-9.16	39.53	5.31	Average	230	108
4	5350.00	58.75	74.00	-15.25	53.44	5.31	Peak	230	108
5	10480.00	54.56	68.20	-13.64	40.75	13.81	Peak	100	144
6	15720.00	43.43	54.00	-10.57	28.52	14.91	Average	141	275
7	15720.00	57.34	74.00	-16.66	42.43	14.91	Peak	141	298

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

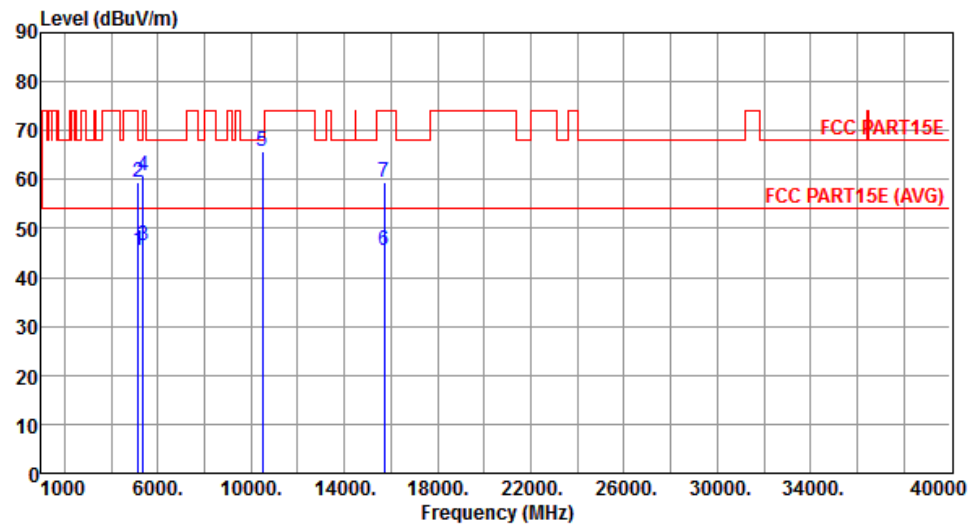


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.44	54.00	-8.56	40.42	5.02	Average	245	73
2	5150.00	59.48	74.00	-14.52	54.46	5.02	Peak	245	73
3	5350.00	46.59	54.00	-7.41	41.28	5.31	Average	245	72
4	5350.00	60.84	74.00	-13.16	55.53	5.31	Peak	245	72
5	10480.00	65.86	68.20	-2.34	52.05	13.81	Peak	342	100
6	15720.00	45.52	54.00	-8.48	30.61	14.91	Average	144	344
7	15720.00	59.32	74.00	-14.68	44.41	14.91	Peak	144	344

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		

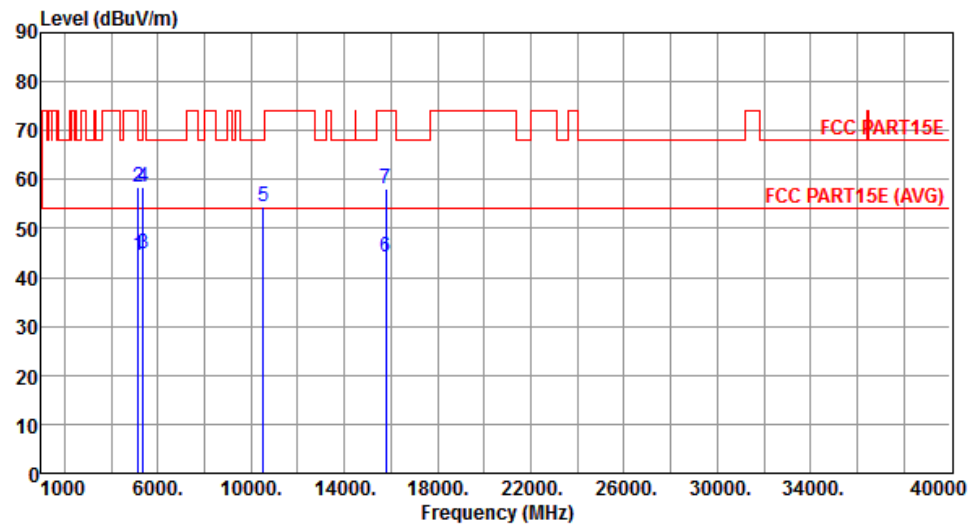


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.58	54.00	-9.42	39.56	5.02	Average	200	72
2	5150.00	58.29	74.00	-15.71	53.27	5.02	Peak	200	72
3	5350.00	44.99	54.00	-9.01	39.68	5.31	Average	200	72
4	5350.00	58.58	74.00	-15.42	53.27	5.31	Peak	200	72
5	10520.00	54.61	68.20	-13.59	40.77	13.84	Peak	100	135
6	15780.00	44.31	54.00	-9.69	29.44	14.87	Average	148	310
7	15780.00	58.15	74.00	-15.85	43.28	14.87	Peak	148	310

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Vertical		

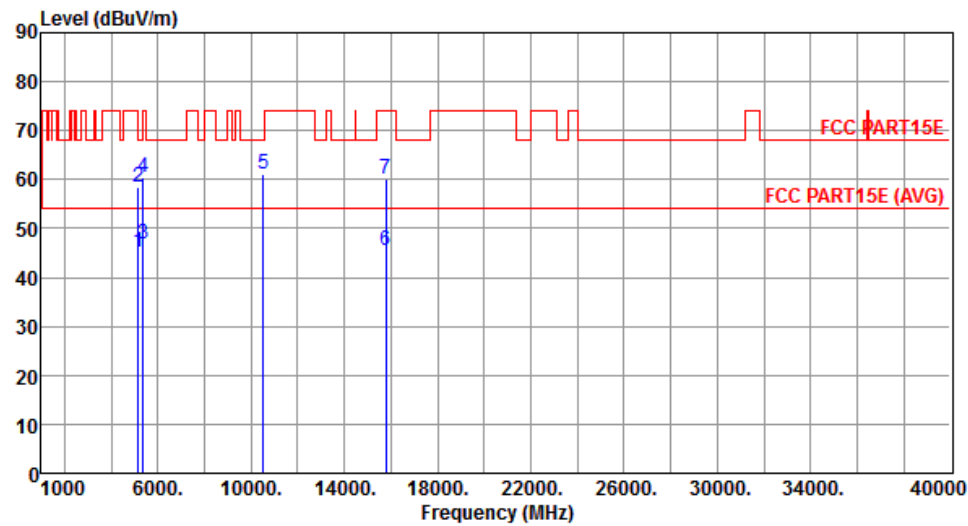


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.29	54.00	-8.71	40.27	5.02	Average	231	91
2	5150.00	58.55	74.00	-15.45	53.53	5.02	Peak	231	91
3	5350.00	46.79	54.00	-7.21	41.48	5.31	Average	231	91
4	5350.00	60.55	74.00	-13.45	55.24	5.31	Peak	231	91
5	10520.00	61.27	68.20	-6.93	47.43	13.84	Peak	340	100
6	15780.00	45.63	54.00	-8.37	30.76	14.87	Average	135	342
7	15780.00	60.00	74.00	-14.00	45.13	14.87	Peak	135	342

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Horizontal		

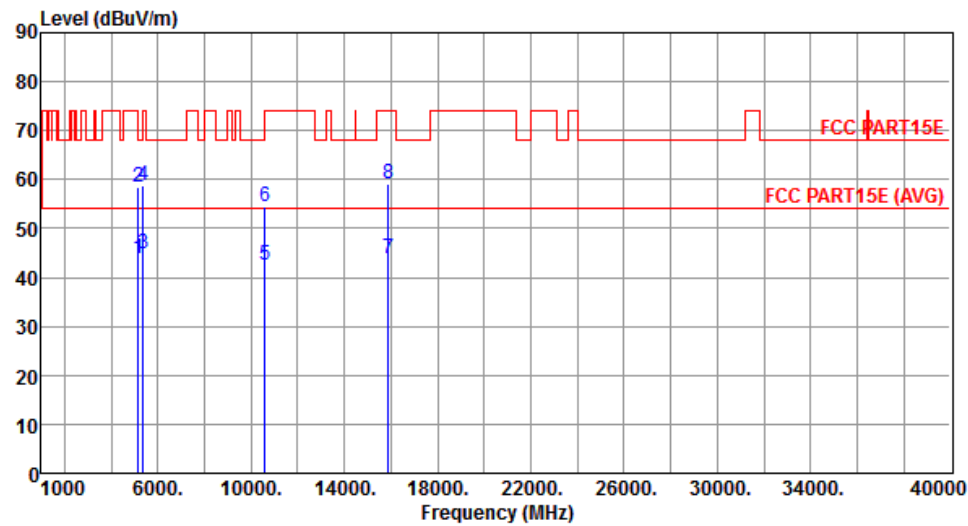


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m			dBuV			cm	deg
1	5150.00	43.79	54.00	-10.21	38.77	5.02	Average	175	132
2	5150.00	58.44	74.00	-15.56	53.42	5.02	Peak	175	132
3	5350.00	44.73	54.00	-9.27	39.42	5.31	Average	175	132
4	5350.00	58.75	74.00	-15.25	53.44	5.31	Peak	175	132
5	10600.00	42.36	54.00	-11.64	28.44	13.92	Average	100	138
6	10600.00	54.40	74.00	-19.60	40.48	13.92	Peak	100	138
7	15900.00	43.89	54.00	-10.11	29.05	14.84	Average	144	320
8	15900.00	59.02	74.00	-14.98	44.18	14.84	Peak	144	320

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Vertical		

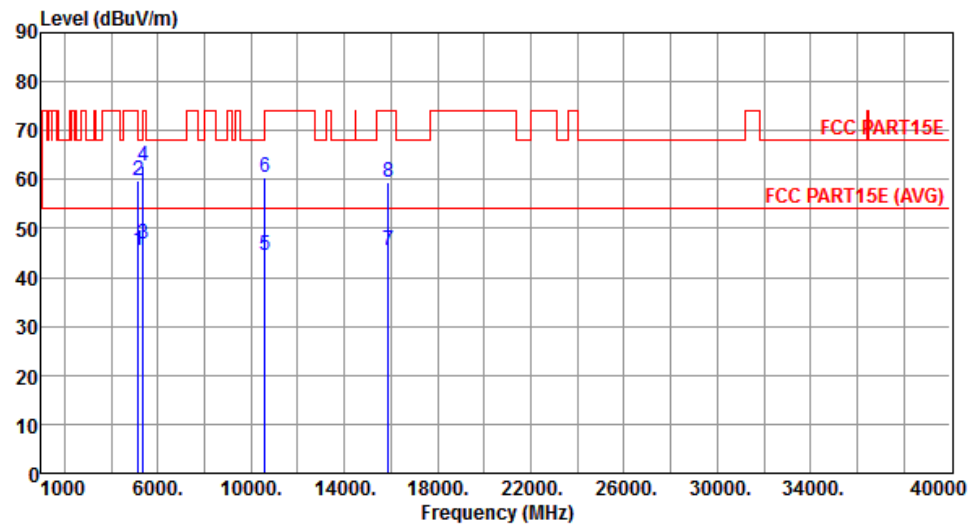


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.45	54.00	-8.55	40.43	5.02	Average	200	135
2	5150.00	59.79	74.00	-14.21	54.77	5.02	Peak	200	135
3	5350.00	46.84	54.00	-7.16	41.53	5.31	Average	200	135
4	5350.00	62.75	74.00	-11.25	57.44	5.31	Peak	200	135
5	10600.00	44.40	54.00	-9.60	30.48	13.92	Average	345	100
6	10600.00	60.48	74.00	-13.52	46.56	13.92	Peak	345	100
7	15900.00	45.61	54.00	-8.39	30.77	14.84	Average	138	340
8	15900.00	59.56	74.00	-14.44	44.72	14.84	Peak	138	340

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		

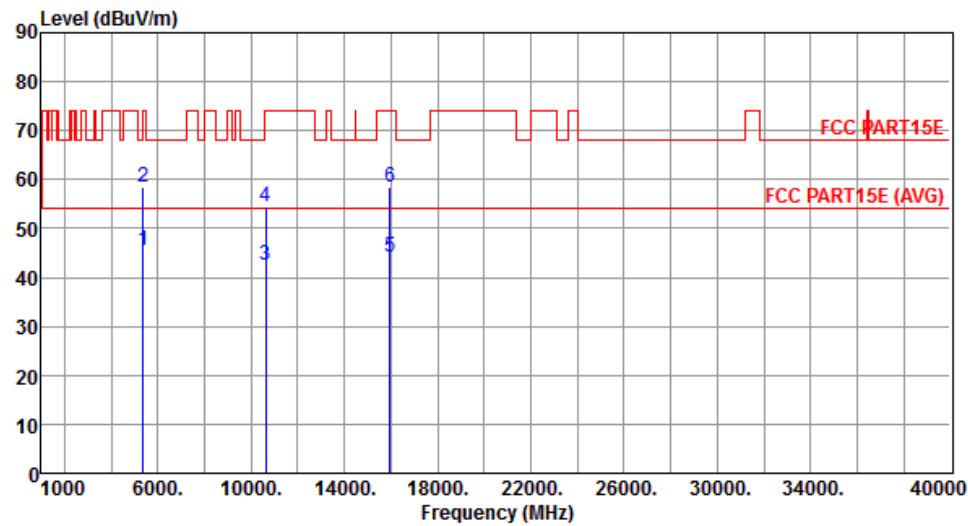


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5350.00	45.43	54.00	-8.57	40.12	5.31	Average	199	62
2	5350.00	58.36	74.00	-15.64	53.05	5.31	Peak	199	62
3	10640.00	42.48	54.00	-11.52	28.52	13.96	Average	100	142
4	10640.00	54.59	74.00	-19.41	40.63	13.96	Peak	100	142
5	15960.00	44.03	54.00	-9.97	29.22	14.81	Average	135	318
6	15960.00	58.56	74.00	-15.44	43.75	14.81	Peak	135	318

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Vertical		

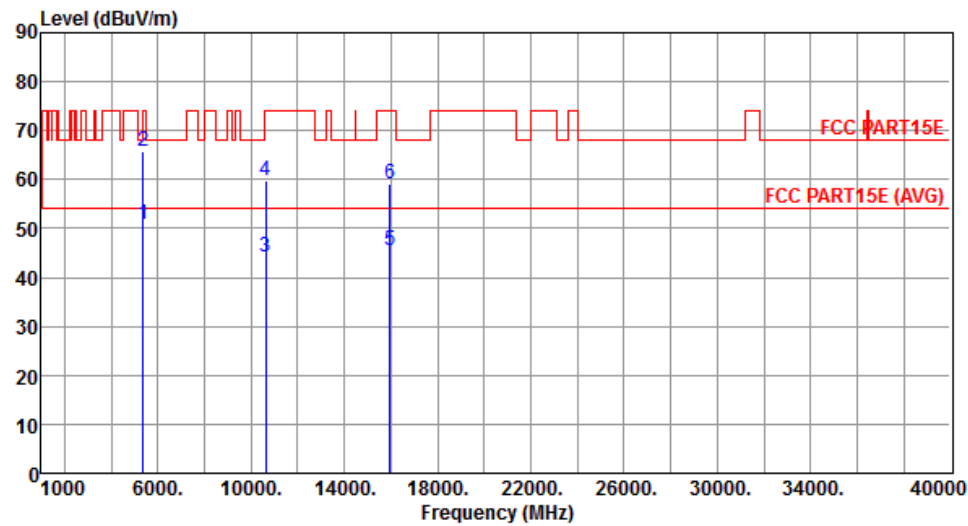


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	50.79	54.00	-3.21	45.48	5.31	Average	209	121
2	5350.00	65.66	74.00	-8.34	60.35	5.31	Peak	209	121
3	10640.00	44.26	54.00	-9.74	30.30	13.96	Average	341	105
4	10640.00	59.88	74.00	-14.12	45.92	13.96	Peak	341	105
5	15960.00	45.42	54.00	-8.58	30.61	14.81	Average	135	322
6	15960.00	59.06	74.00	-14.94	44.25	14.81	Peak	135	322

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		

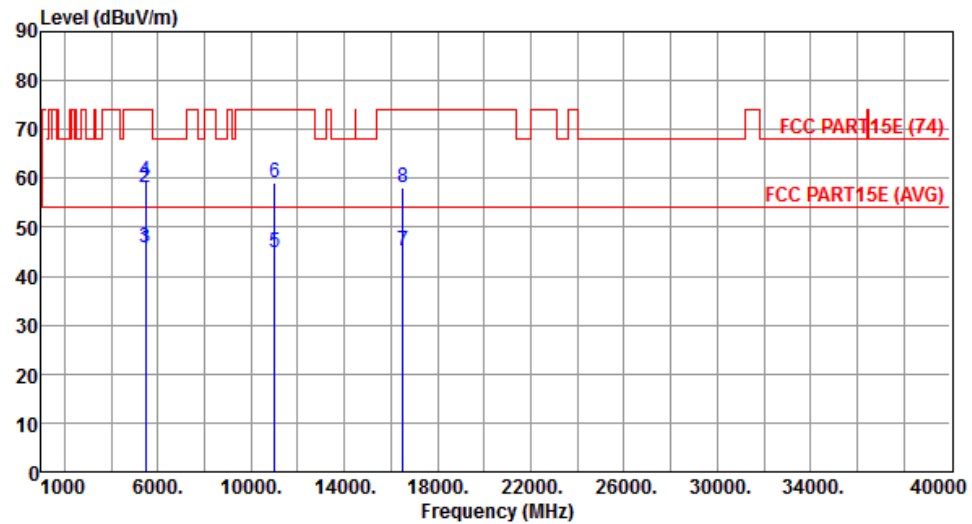


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.50	54.00	-8.50	40.04	5.46	Average	191	80
2	5460.00	58.08	74.00	-15.92	52.62	5.46	Peak	191	80
3	5470.00	45.71	54.00	-8.29	40.24	5.47	Average	191	80
4	5470.00	59.38	74.00	-14.62	53.91	5.47	Peak	191	80
5	11000.00	44.71	54.00	-9.29	30.41	14.30	Average	212	40
6	11000.00	59.08	74.00	-14.92	44.78	14.30	Peak	212	40
7	16500.00	45.28	54.00	-8.72	29.44	15.84	Average	100	331
8	16500.00	58.15	74.00	-15.85	42.31	15.84	Peak	100	331

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Vertical		

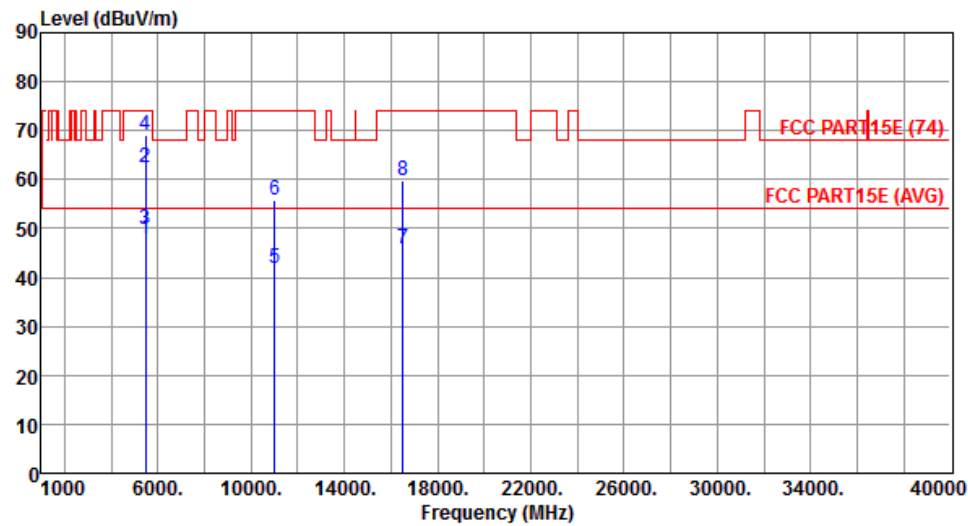


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.67	54.00	-6.33	42.21	5.46	Average	199	142
2	5460.00	62.58	74.00	-11.42	57.12	5.46	Peak	199	142
3	5470.00	49.91	54.00	-4.09	44.44	5.47	Average	199	142
4	5470.00	69.12	74.00	-4.88	63.65	5.47	Peak	199	142
5	11000.00	41.83	54.00	-12.17	27.53	14.30	Average	145	290
6	11000.00	55.76	74.00	-18.24	41.46	14.30	Peak	145	290
7	16500.00	45.77	54.00	-8.23	29.93	15.84	Average	100	325
8	16500.00	59.62	74.00	-14.38	43.78	15.84	Peak	100	325

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		

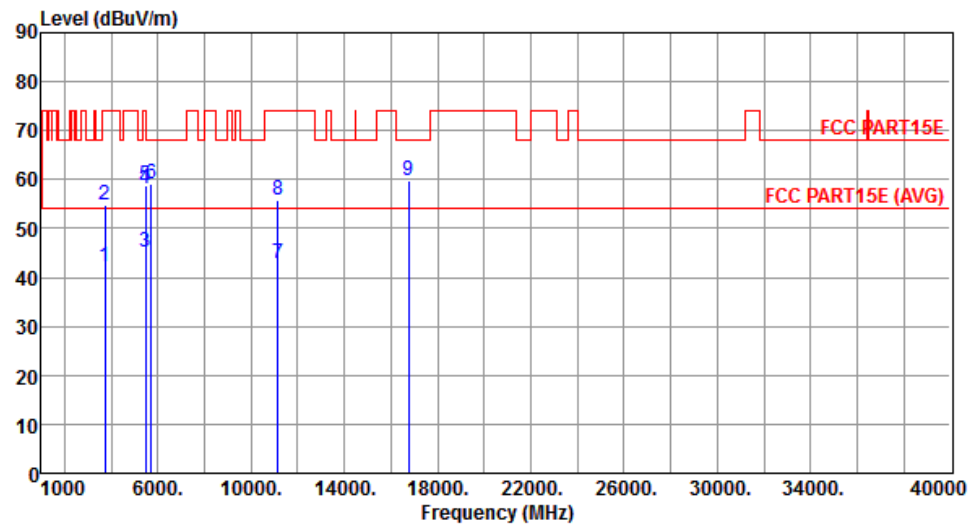


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	42.03	54.00	-11.97	40.43	1.60	Average	100	332
2	3720.00	54.79	74.00	-19.21	53.19	1.60	Peak	100	332
3	5460.00	45.02	54.00	-8.98	39.56	5.46	Average	118	295
4	5460.00	58.22	74.00	-15.78	52.76	5.46	Peak	118	295
5	5470.00	58.93	68.20	-9.27	53.46	5.47	Peak	118	295
6	5725.00	59.23	68.20	-8.97	53.42	5.81	Peak	118	295
7	11160.00	42.71	54.00	-11.29	28.27	14.44	Average	100	33
8	11160.00	55.88	74.00	-18.12	41.44	14.44	Peak	100	33
9	16740.00	59.69	68.20	-8.51	43.72	15.97	Peak	120	196

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Vertical		

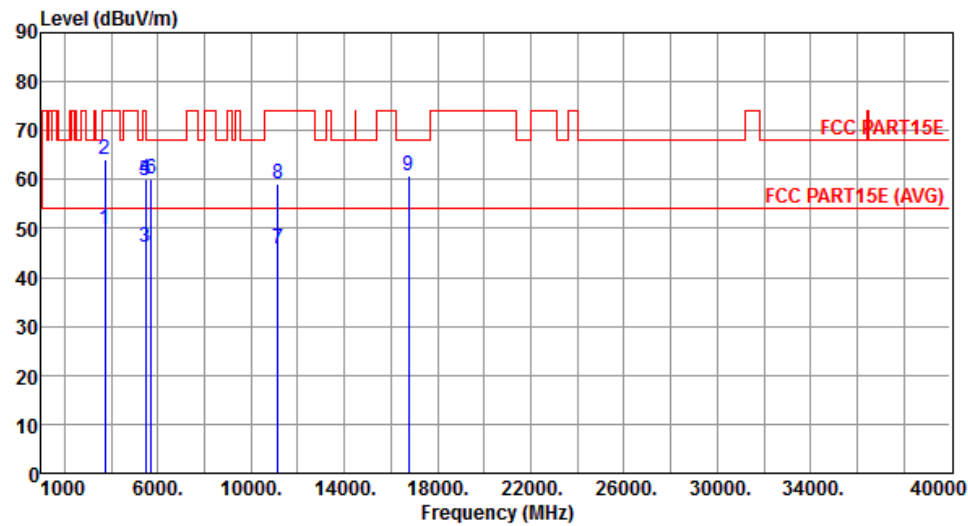


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	49.85	54.00	-4.15	48.25	1.60	Average	265	90
2	3720.00	64.02	74.00	-9.98	62.42	1.60	Peak	265	90
3	5460.00	46.17	54.00	-7.83	40.71	5.46	Average	213	135
4	5460.00	59.97	74.00	-14.03	54.51	5.46	Peak	213	135
5	5470.00	59.78	68.20	-8.42	54.31	5.47	Peak	213	135
6	5725.00	60.09	68.20	-8.11	54.28	5.81	Peak	213	135
7	11160.00	45.92	54.00	-8.08	31.48	14.44	Average	385	16
8	11160.00	59.17	74.00	-14.83	44.73	14.44	Peak	385	16
9	16740.00	60.69	68.20	-7.51	44.72	15.97	Peak	125	331

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

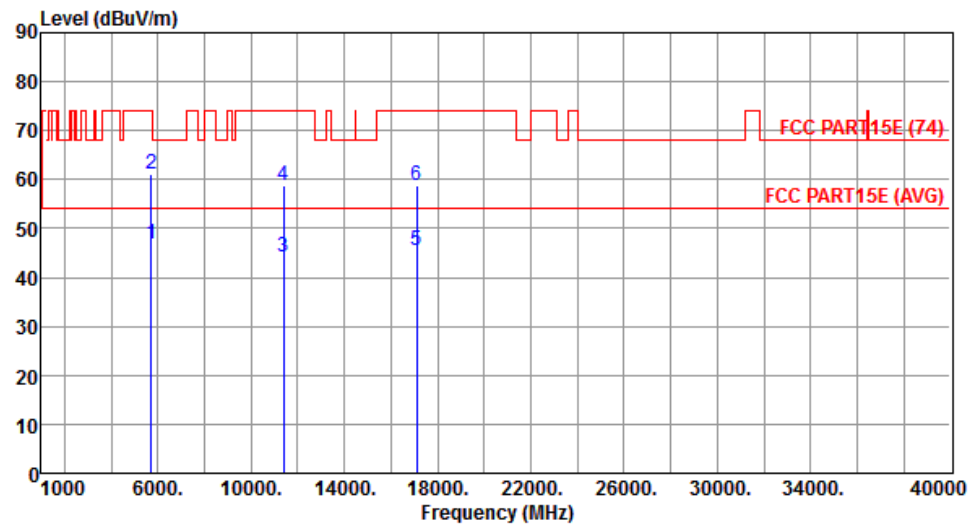


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	46.68	54.00	-7.32	40.87	5.81	Average	199	67
2	5725.00	61.17	74.00	-12.83	55.36	5.81	Peak	199	67
3	11400.00	44.21	54.00	-9.79	29.56	14.65	Average	205	44
4	11400.00	58.86	74.00	-15.14	44.21	14.65	Peak	205	44
5	17100.00	45.62	54.00	-8.38	29.11	16.51	Average	100	340
6	17100.00	58.79	74.00	-15.21	42.28	16.51	Peak	100	340

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Vertical		

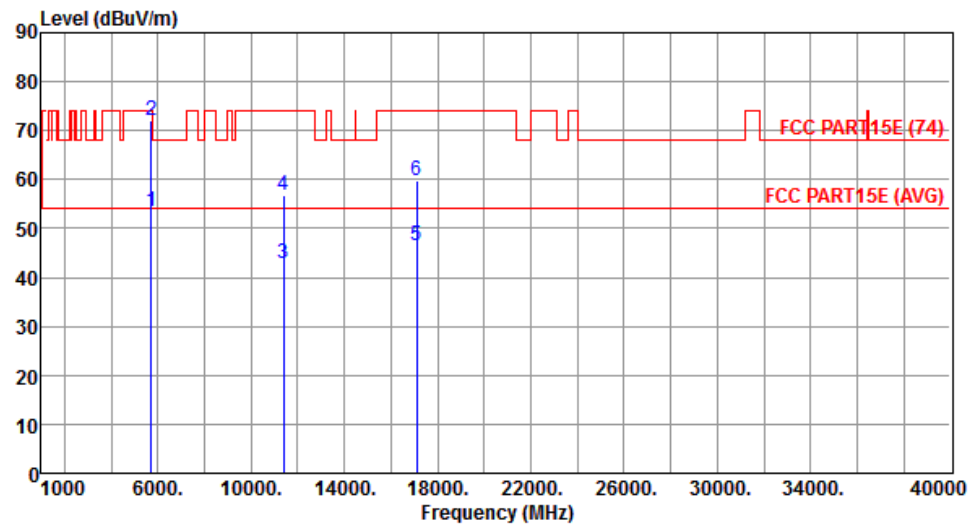


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	53.50	54.00	-0.50	47.69	5.81	Average	266	97
2	5725.00	72.10	74.00	-1.90	66.29	5.81	Peak	266	97
3	11400.00	42.86	54.00	-11.14	28.21	14.65	Average	150	285
4	11400.00	56.89	74.00	-17.11	42.24	14.65	Peak	150	285
5	17100.00	46.33	54.00	-7.67	29.82	16.51	Average	100	315
6	17100.00	59.82	74.00	-14.18	43.31	16.51	Peak	100	315

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		

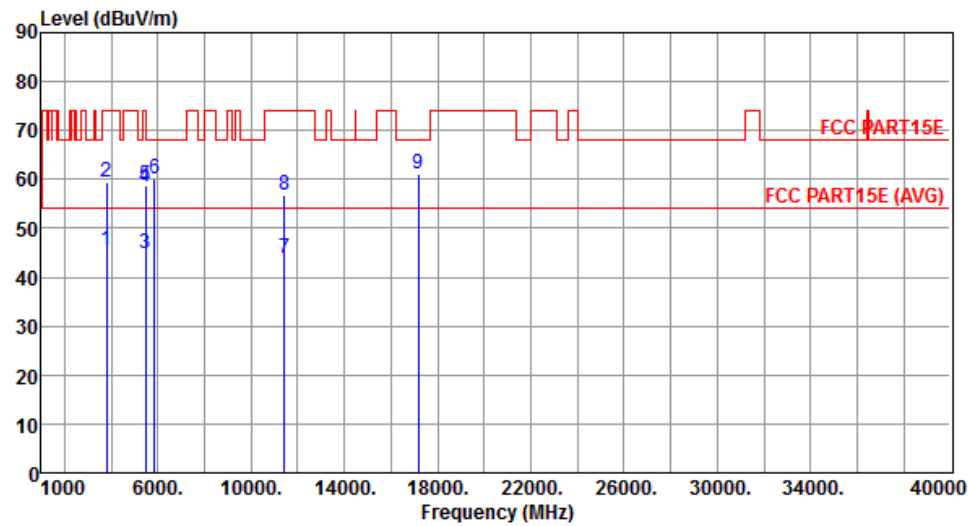


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	45.41	54.00	-8.59	43.51	1.90	Average	215	0
2	3813.33	59.56	74.00	-14.44	57.66	1.90	Peak	215	0
3	5460.00	44.88	54.00	-9.12	39.42	5.46	Average	215	65
4	5460.00	58.57	74.00	-15.43	53.11	5.46	Peak	215	65
5	5470.00	58.88	68.20	-9.32	53.41	5.47	Peak	215	65
6	5850.00	60.26	68.20	-7.94	54.27	5.99	Peak	215	65
7	11440.00	43.95	54.00	-10.05	29.26	14.69	Average	100	48
8	11440.00	56.90	74.00	-17.10	42.21	14.69	Peak	100	48
9	17160.00	61.07	68.20	-7.13	44.31	16.76	Peak	115	310

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Vertical		

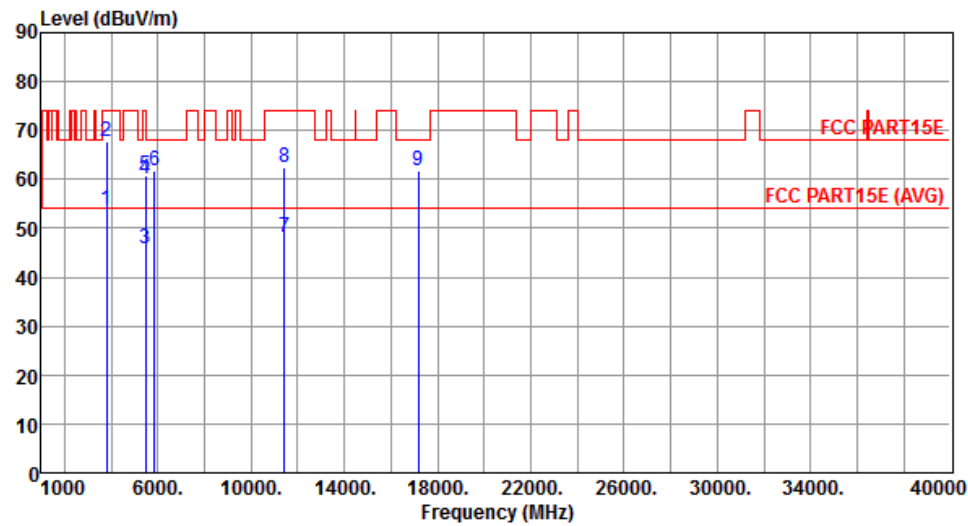


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	53.68	54.00	-0.32	51.78	1.90	Average	280	89
2	3813.33	67.91	74.00	-6.09	66.01	1.90	Peak	280	89
3	5460.00	45.93	54.00	-8.07	40.47	5.46	Average	185	140
4	5460.00	59.99	74.00	-14.01	54.53	5.46	Peak	185	140
5	5470.00	60.68	68.20	-7.52	55.21	5.47	Peak	185	140
6	5850.00	61.72	68.20	-6.48	55.73	5.99	Peak	185	140
7	11440.00	48.15	54.00	-5.85	33.46	14.69	Average	322	99
8	11440.00	62.32	74.00	-11.68	47.63	14.69	Peak	322	99
9	17160.00	61.93	68.20	-6.27	45.17	16.76	Peak	132	348

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

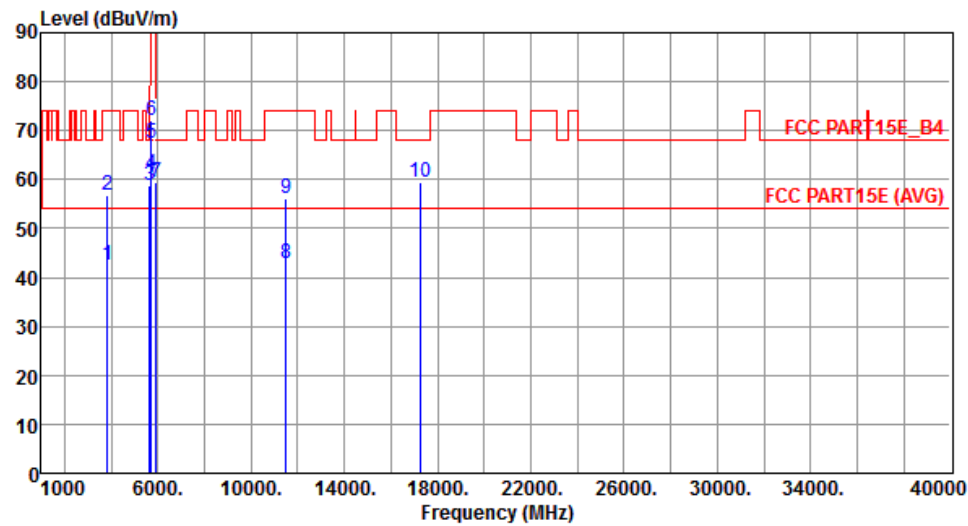


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	42.49	54.00	-11.51	40.53	1.96	Average	100	331
2	3830.00	56.68	74.00	-17.32	54.72	1.96	Peak	100	331
3	5650.00	58.81	68.20	-9.39	53.12	5.69	Peak	212	60
4	5700.00	61.04	105.20	-44.16	55.27	5.77	Peak	212	60
5	5720.00	67.52	110.80	-43.28	61.73	5.79	Peak	212	60
6	5725.00	72.09	122.20	-50.11	66.28	5.81	Peak	212	60
7	5925.00	59.46	68.20	-8.74	53.37	6.09	Peak	212	60
8	11490.00	42.89	54.00	-11.11	28.16	14.73	Average	100	131
9	11490.00	56.21	74.00	-17.79	41.48	14.73	Peak	100	131
10	17235.00	59.54	68.20	-8.66	42.47	17.07	Peak	100	162

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Vertical		

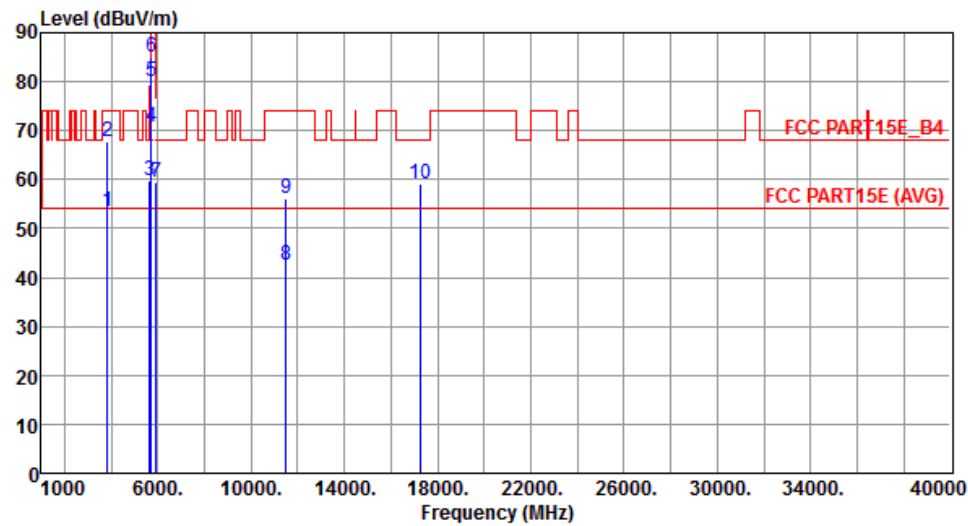


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	53.31	54.00	-0.69	51.35	1.96	Average	272	70
2	3830.00	67.71	74.00	-6.29	65.75	1.96	Peak	272	70
3	5650.00	59.90	68.20	-8.30	54.21	5.69	Peak	192	125
4	5700.00	70.89	105.20	-34.31	65.12	5.77	Peak	192	125
5	5720.00	80.18	110.80	-30.62	74.39	5.79	Peak	192	125
6	5725.00	84.97	122.20	-37.23	79.16	5.81	Peak	192	125
7	5925.00	59.50	68.20	-8.70	53.41	6.09	Peak	192	125
8	11490.00	42.41	54.00	-11.59	27.68	14.73	Average	100	138
9	11490.00	56.16	74.00	-17.84	41.43	14.73	Peak	100	138
10	17235.00	59.22	68.20	-8.98	42.15	17.07	Peak	100	167

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		

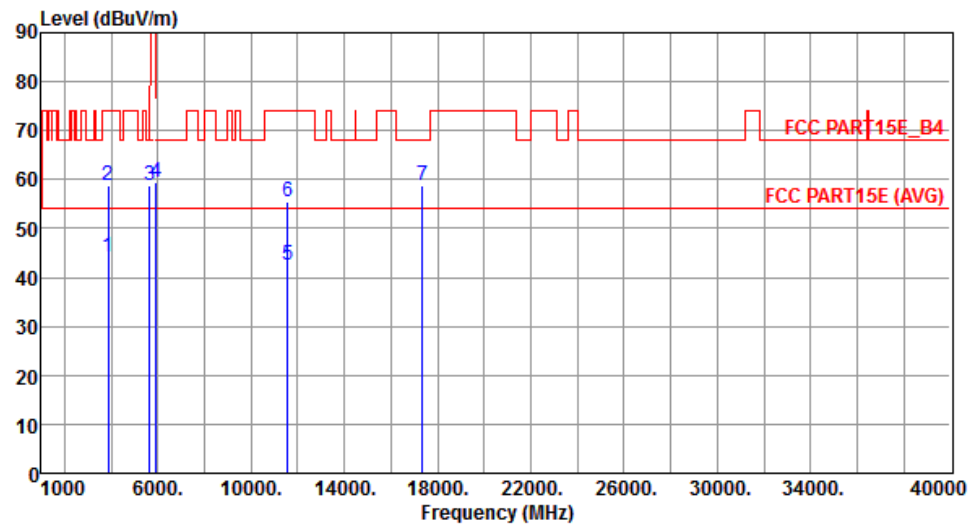


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	44.26	54.00	-9.74	42.21	2.05	Average	100	328
2	3856.66	58.77	74.00	-15.23	56.72	2.05	Peak	100	328
3	5650.00	58.81	68.20	-9.39	53.12	5.69	Peak	215	65
4	5925.00	59.36	68.20	-8.84	53.27	6.09	Peak	215	65
5	11570.00	42.37	54.00	-11.63	27.77	14.60	Average	100	163
6	11570.00	55.43	74.00	-18.57	40.83	14.60	Peak	100	163
7	17355.00	58.92	68.20	-9.28	41.37	17.55	Peak	100	162

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Vertical		

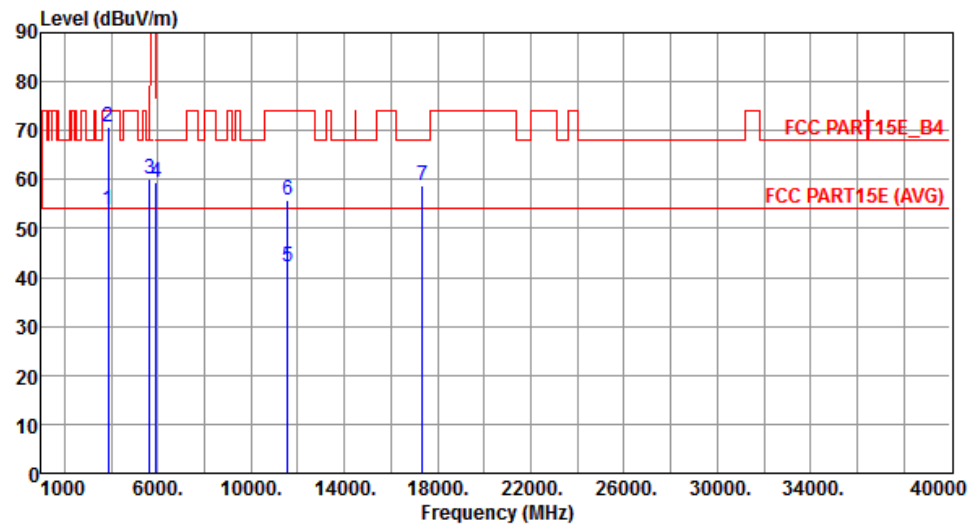


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	53.84	54.00	-0.16	51.79	2.05	Average	261	98
2	3856.66	70.62	74.00	-3.38	68.57	2.05	Peak	261	98
3	5650.00	60.13	68.20	-8.07	54.44	5.69	Peak	195	122
4	5925.00	59.60	68.20	-8.60	53.51	6.09	Peak	195	122
5	11570.00	42.16	54.00	-11.84	27.56	14.60	Average	100	206
6	11570.00	55.84	74.00	-18.16	41.24	14.60	Peak	100	206
7	17355.00	58.92	68.20	-9.28	41.37	17.55	Peak	100	170

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

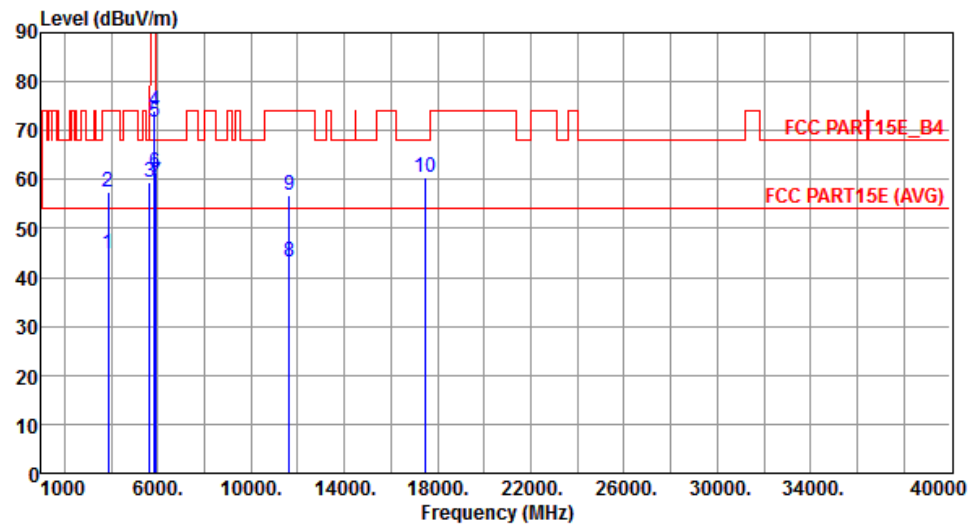

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	44.87	54.00	-9.13	42.73	2.14	Average	100	345
2	3883.33	57.41	74.00	-16.59	55.27	2.14	Peak	100	345
3	5650.00	59.31	68.20	-8.89	53.62	5.69	Peak	200	60
4	5850.00	74.20	122.20	-48.00	68.21	5.99	Peak	200	60
5	5855.00	71.72	110.80	-39.08	65.72	6.00	Peak	200	60
6	5875.00	61.33	105.20	-43.87	55.31	6.02	Peak	200	60
7	5925.00	59.60	68.20	-8.60	53.51	6.09	Peak	200	60
8	11650.00	43.16	54.00	-10.84	28.72	14.44	Average	163	145
9	11650.00	56.85	74.00	-17.15	42.41	14.44	Peak	163	145
10	17475.00	60.46	68.20	-7.74	42.42	18.04	Peak	100	163


Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

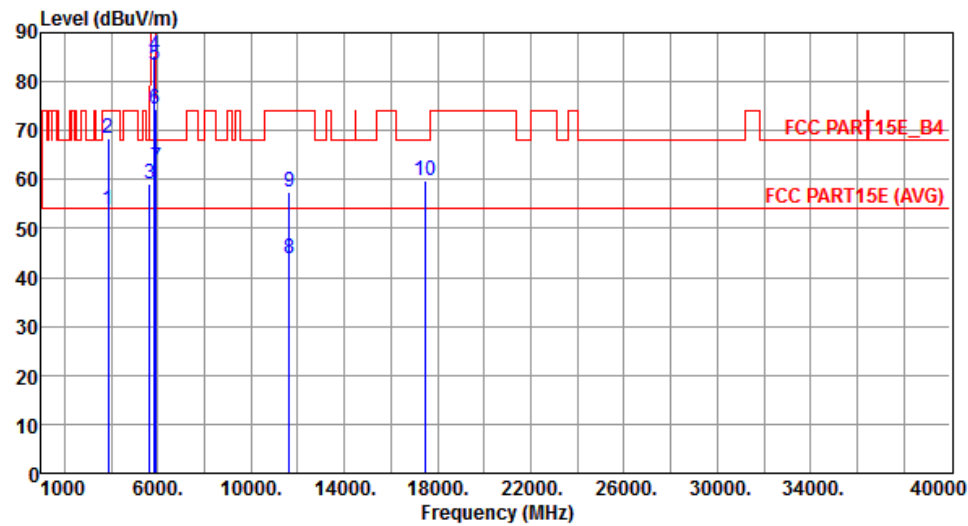

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	53.86	54.00	-0.14	51.72	2.14	Average	255	91
2	3883.33	68.41	74.00	-5.59	66.27	2.14	Peak	255	91
3	5650.00	59.22	68.20	-8.98	53.53	5.69	Peak	191	135
4	5850.00	85.26	122.20	-36.94	79.27	5.99	Peak	191	135
5	5855.00	83.24	110.80	-27.56	77.24	6.00	Peak	191	135
6	5875.00	74.54	105.20	-30.66	68.52	6.02	Peak	191	135
7	5925.00	62.32	68.20	-5.88	56.23	6.09	Peak	191	135
8	11650.00	43.67	54.00	-10.33	29.23	14.44	Average	170	142
9	11650.00	57.29	74.00	-16.71	42.85	14.44	Peak	170	142
10	17475.00	59.81	68.20	-8.39	41.77	18.04	Peak	100	138


3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		

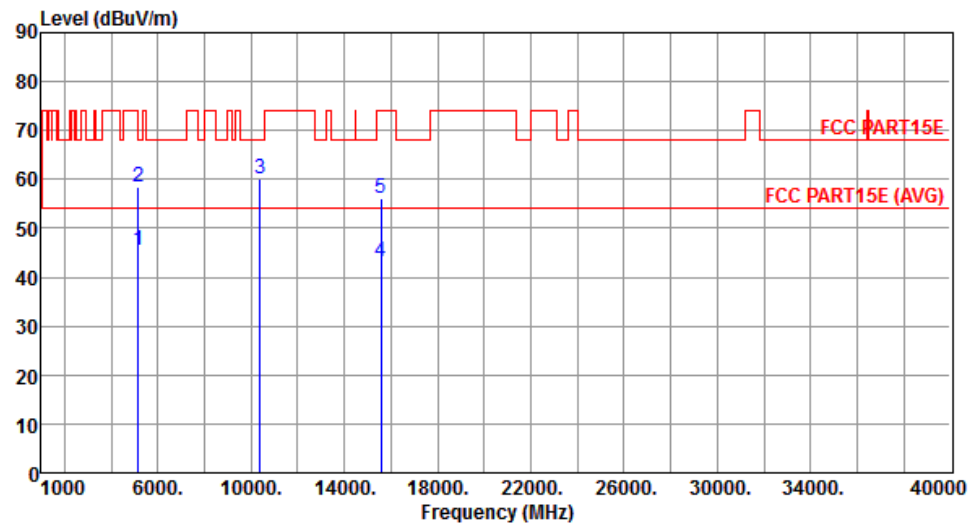


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.41	54.00	-8.59	40.39	5.02	Average	199	62
2	5150.00	58.59	74.00	-15.41	53.57	5.02	Peak	199	62
3	10380.00	59.97	68.20	-8.23	46.22	13.75	Peak	190	50
4	15570.00	43.07	54.00	-10.93	28.11	14.96	Average	100	310
5	15570.00	56.19	74.00	-17.81	41.23	14.96	Peak	100	310

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

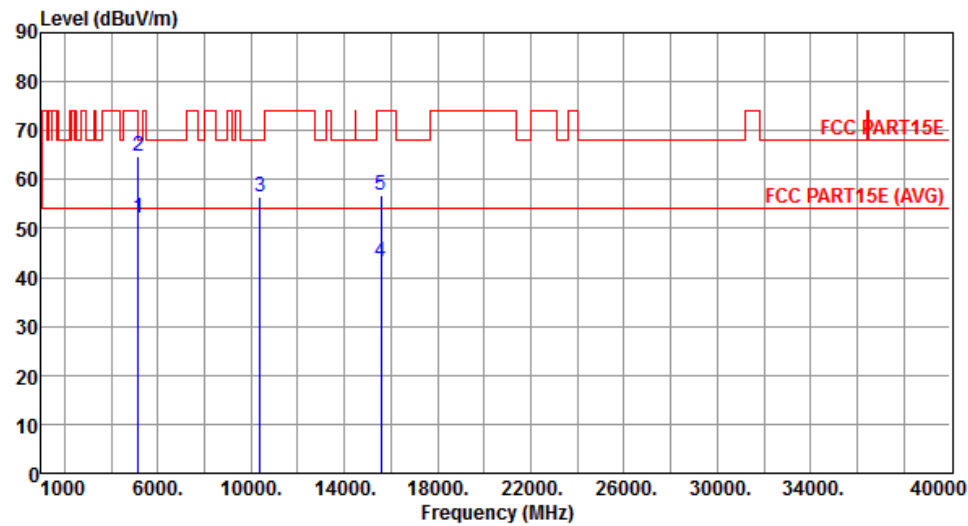


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	51.99	54.00	-2.01	46.97	5.02	Average	190	135
2	5150.00	64.75	74.00	-9.25	59.73	5.02	Peak	190	135
3	10380.00	56.48	68.20	-11.72	42.73	13.75	Peak	142	295
4	15570.00	43.30	54.00	-10.70	28.34	14.96	Average	100	328
5	15570.00	56.71	74.00	-17.29	41.75	14.96	Peak	100	328

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

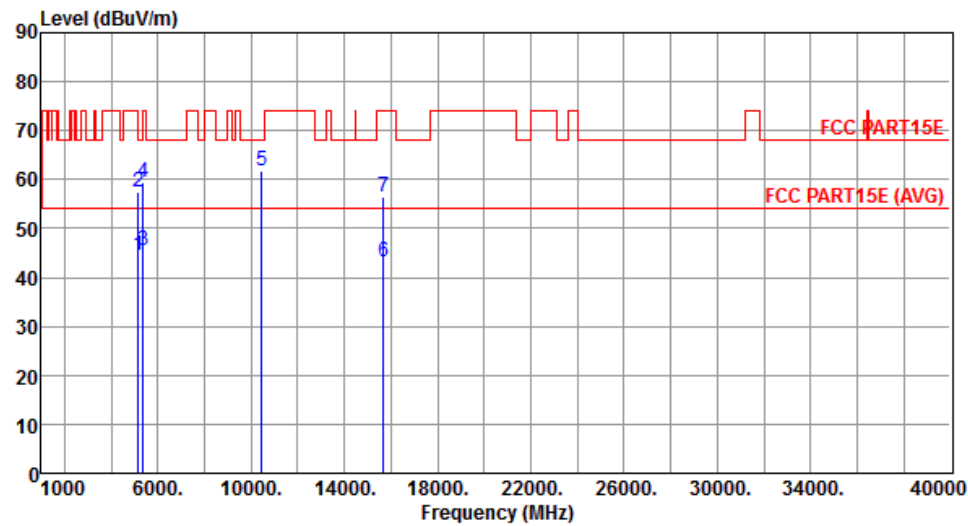


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.59	54.00	-9.41	39.57	5.02	Average	204	58
2	5150.00	57.44	74.00	-16.56	52.42	5.02	Peak	204	58
3	5350.00	45.42	54.00	-8.58	40.11	5.31	Average	204	58
4	5350.00	59.39	74.00	-14.61	54.08	5.31	Peak	204	58
5	10460.00	61.65	68.20	-6.55	47.86	13.79	Peak	190	52
6	15690.00	43.15	54.00	-10.85	28.23	14.92	Average	100	321
7	15690.00	56.33	74.00	-17.67	41.41	14.92	Peak	100	321

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

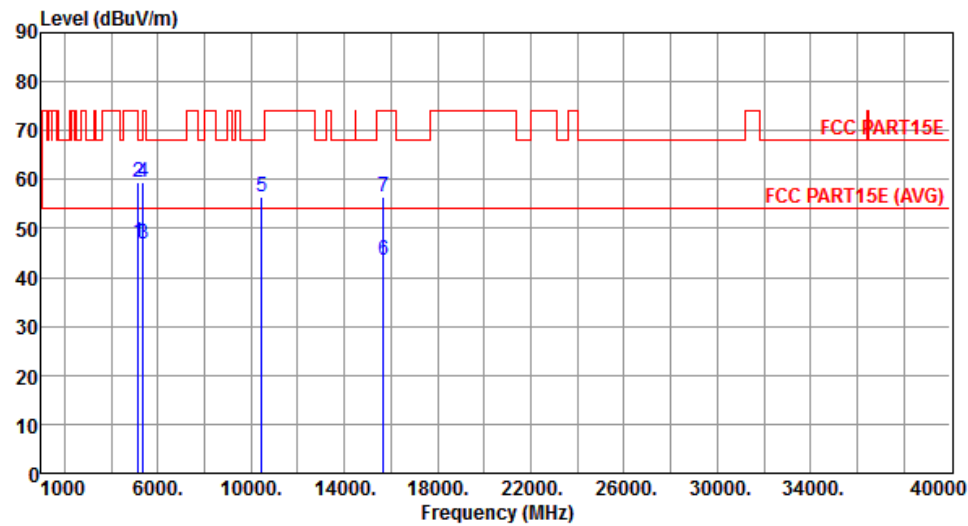


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.32	54.00	-6.68	42.30	5.02	Average	197	135
2	5150.00	59.42	74.00	-14.58	54.40	5.02	Peak	197	135
3	5350.00	46.95	54.00	-7.05	41.64	5.31	Average	197	135
4	5350.00	59.41	74.00	-14.59	54.10	5.31	Peak	197	135
5	10460.00	56.58	68.20	-11.62	42.79	13.79	Peak	140	299
6	15690.00	43.46	54.00	-10.54	28.54	14.92	Average	100	338
7	15690.00	56.37	74.00	-17.63	41.45	14.92	Peak	100	338

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		

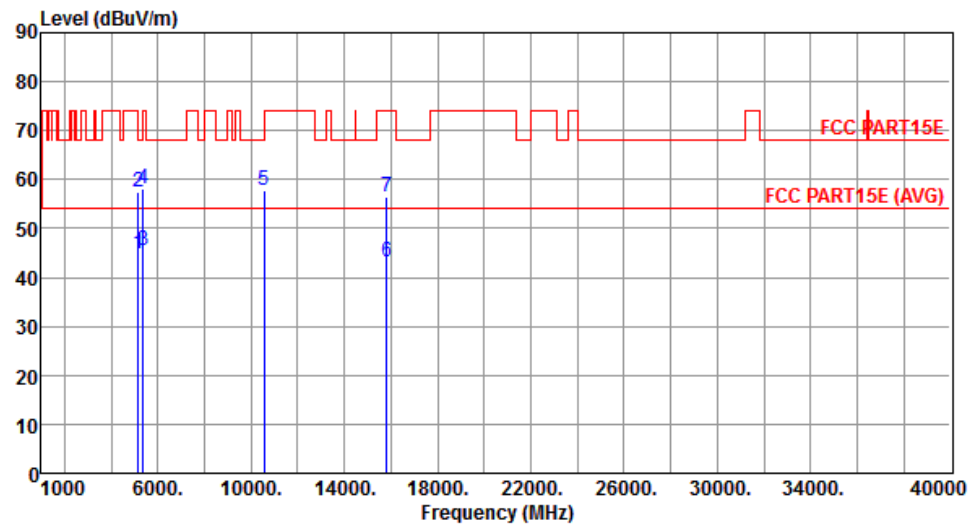


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.88	54.00	-9.12	39.86	5.02	Average	204	63
2	5150.00	57.29	74.00	-16.71	52.27	5.02	Peak	204	63
3	5350.00	45.52	54.00	-8.48	40.21	5.31	Average	204	63
4	5350.00	58.27	74.00	-15.73	52.96	5.31	Peak	204	63
5	10540.00	57.71	68.20	-10.49	43.85	13.86	Peak	220	48
6	15810.00	43.21	54.00	-10.79	28.35	14.86	Average	100	332
7	15810.00	56.55	74.00	-17.45	41.69	14.86	Peak	100	332

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Vertical		

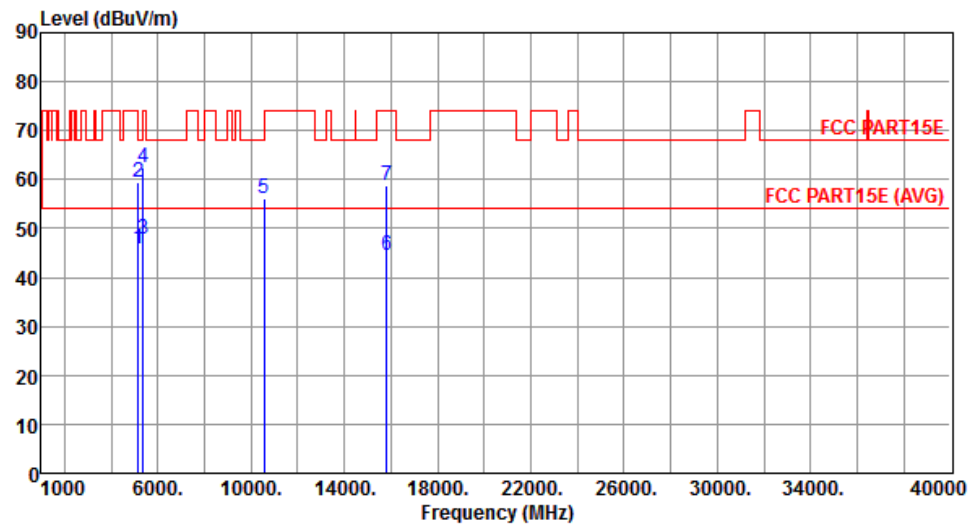


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m			dBuV			cm	deg
1	5150.00	45.91	54.00	-8.09	40.89	5.02	Average	200	133
2	5150.00	59.32	74.00	-14.68	54.30	5.02	Peak	200	133
3	5350.00	47.88	54.00	-6.12	42.57	5.31	Average	200	133
4	5350.00	62.41	74.00	-11.59	57.10	5.31	Peak	200	133
5	10540.00	56.10	68.20	-12.10	42.24	13.86	Peak	100	310
6	15810.00	44.41	54.00	-9.59	29.55	14.86	Average	100	335
7	15810.00	58.65	74.00	-15.35	43.79	14.86	Peak	100	335

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		

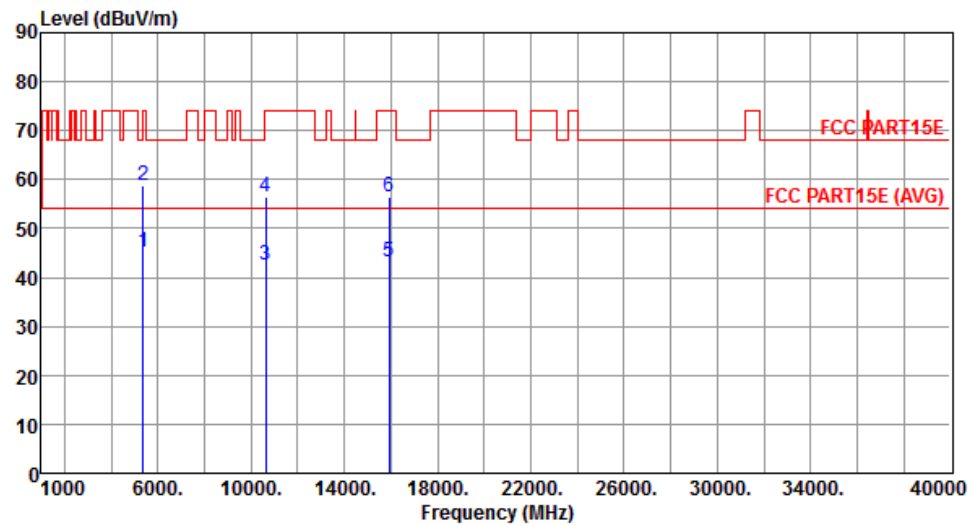


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	45.12	54.00	-8.88	39.81	5.31	Average	198	78
2	5350.00	58.66	74.00	-15.34	53.35	5.31	Peak	198	78
3	10620.00	42.50	54.00	-11.50	28.57	13.93	Average	200	49
4	10620.00	56.31	74.00	-17.69	42.38	13.93	Peak	200	49
5	15930.00	43.11	54.00	-10.89	28.29	14.82	Average	100	333
6	15930.00	56.60	74.00	-17.40	41.78	14.82	Peak	100	333

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Vertical		

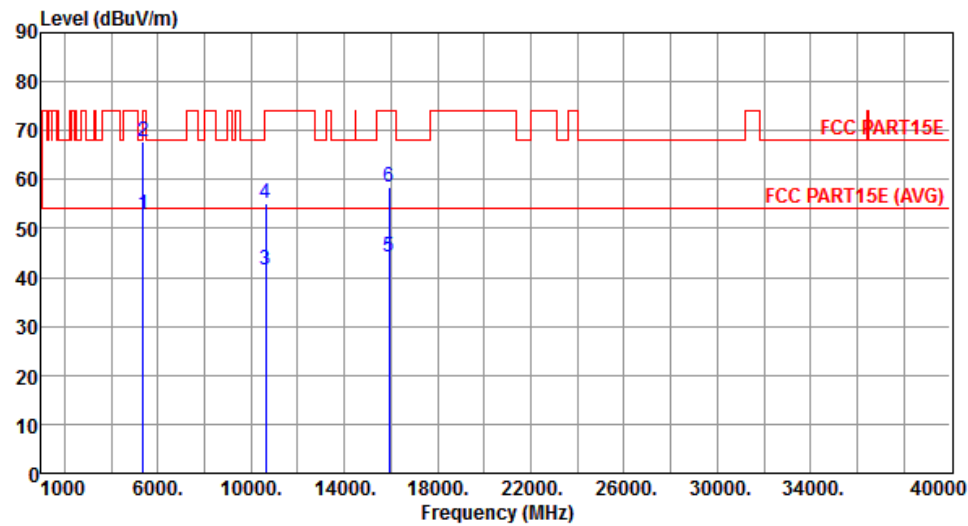


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	52.69	54.00	-1.31	47.38	5.31	Average	193	138
2	5350.00	67.60	74.00	-6.40	62.29	5.31	Peak	193	138
3	10620.00	41.38	54.00	-12.62	27.45	13.93	Average	100	291
4	10620.00	55.25	74.00	-18.75	41.32	13.93	Peak	100	291
5	15930.00	44.31	54.00	-9.69	29.49	14.82	Average	100	328
6	15930.00	58.58	74.00	-15.42	43.76	14.82	Peak	100	328

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		

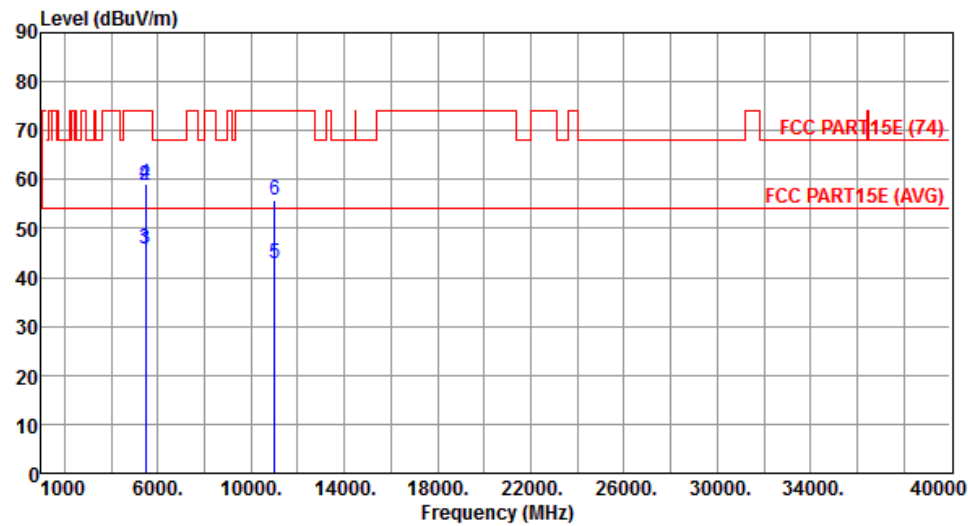


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.46	54.00	-8.54	40.00	5.46	Average	217	66
2	5460.00	58.77	74.00	-15.23	53.31	5.46	Peak	217	66
3	5470.00	45.76	54.00	-8.24	40.29	5.47	Average	217	66
4	5470.00	59.15	74.00	-14.85	53.68	5.47	Peak	217	66
5	11020.00	42.88	54.00	-11.12	28.56	14.32	Average	100	165
6	11020.00	55.69	74.00	-18.31	41.37	14.32	Peak	100	165

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Vertical		

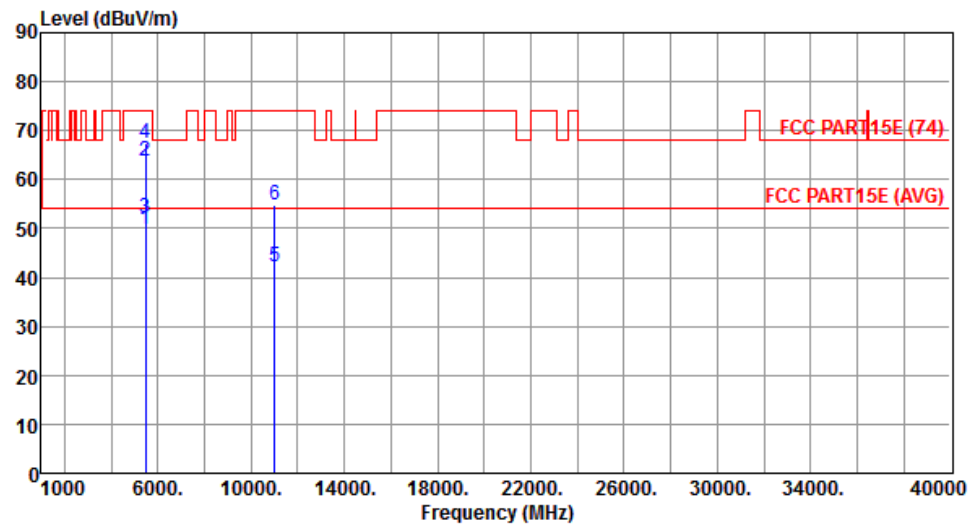


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	49.88	54.00	-4.12	44.42	5.46	Average	214	123
2	5460.00	63.69	74.00	-10.31	58.23	5.46	Peak	214	123
3	5470.00	52.15	54.00	-1.85	46.68	5.47	Average	214	123
4	5470.00	67.42	74.00	-6.58	61.95	5.47	Peak	214	123
5	11020.00	42.09	54.00	-11.91	27.77	14.32	Average	100	147
6	11020.00	54.89	74.00	-19.11	40.57	14.32	Peak	100	147

Modulation	VHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		

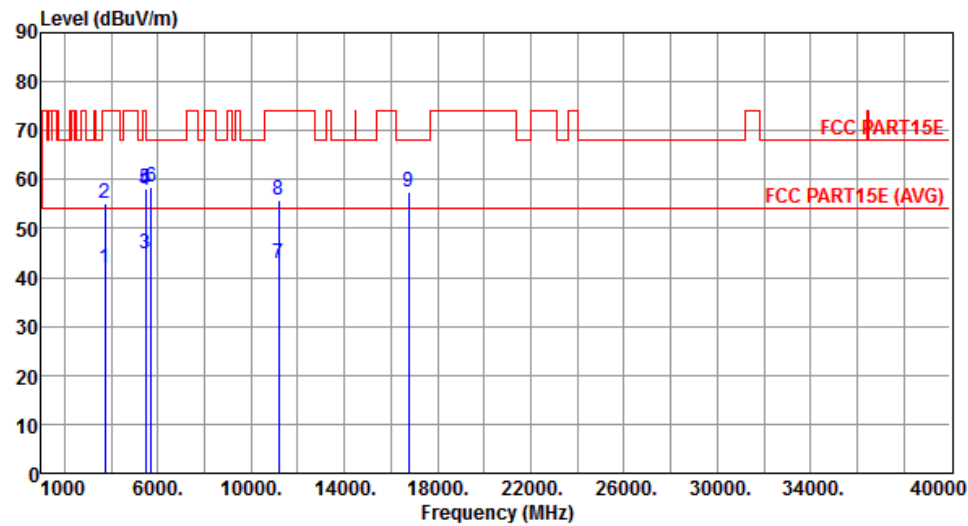


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3726.66	41.88	54.00	-12.12	40.24	1.64	Average	100	325
2	3726.66	55.04	74.00	-18.96	53.40	1.64	Peak	100	325
3	5460.00	44.99	54.00	-9.01	39.53	5.46	Average	208	60
4	5460.00	57.93	74.00	-16.07	52.47	5.46	Peak	208	60
5	5470.00	58.09	68.20	-10.11	52.62	5.47	Peak	208	60
6	5725.00	58.34	68.20	-9.86	52.53	5.81	Peak	208	60
7	11180.00	42.70	54.00	-11.30	28.24	14.46	Average	100	22
8	11180.00	55.94	74.00	-18.06	41.48	14.46	Peak	100	22
9	16770.00	57.36	68.20	-10.84	41.38	15.98	Peak	100	172

Modulation	VHT40	Test Freq. (MHz)	5590
Polarization	Vertical		

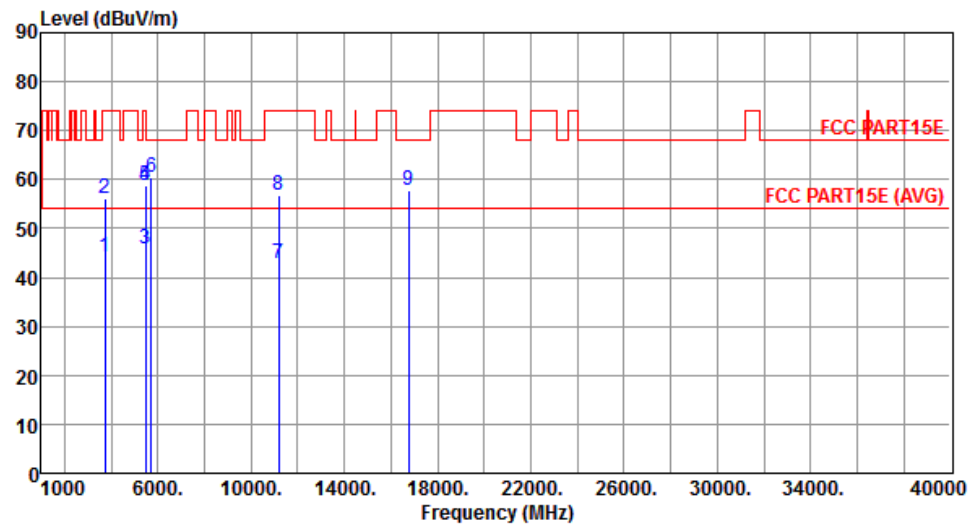


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3726.66	44.16	54.00	-9.84	42.52	1.64	Average	265	90
2	3726.66	56.16	74.00	-17.84	54.52	1.64	Peak	265	90
3	5460.00	45.88	54.00	-8.12	40.42	5.46	Average	145	100
4	5460.00	58.90	74.00	-15.10	53.44	5.46	Peak	145	100
5	5470.00	58.78	68.20	-9.42	53.31	5.47	Peak	145	100
6	5725.00	60.29	68.20	-7.91	54.48	5.81	Peak	145	100
7	11180.00	42.70	54.00	-11.30	28.24	14.46	Average	100	162
8	11180.00	56.89	74.00	-17.11	42.43	14.46	Peak	100	162
9	16770.00	57.92	68.20	-10.28	41.94	15.98	Peak	100	183

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Horizontal		

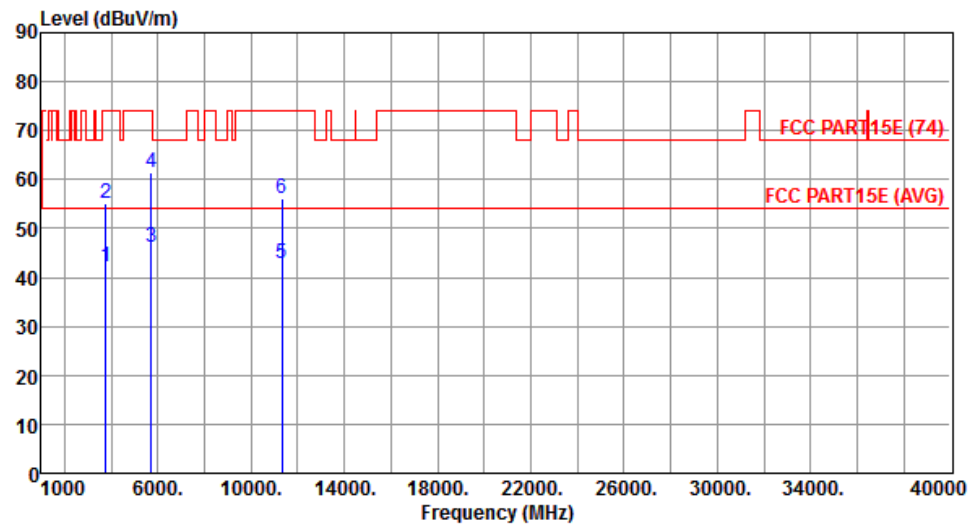


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3780.00	42.07	54.00	-11.93	40.27	1.80	Average	100	331
2	3780.00	55.07	74.00	-18.93	53.27	1.80	Peak	100	331
3	5725.00	46.30	54.00	-7.70	40.49	5.81	Average	201	59
4	5725.00	61.34	74.00	-12.66	55.53	5.81	Peak	201	59
5	11340.00	42.84	54.00	-11.16	28.24	14.60	Average	100	165
6	11340.00	55.97	74.00	-18.03	41.37	14.60	Peak	100	165

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Vertical		

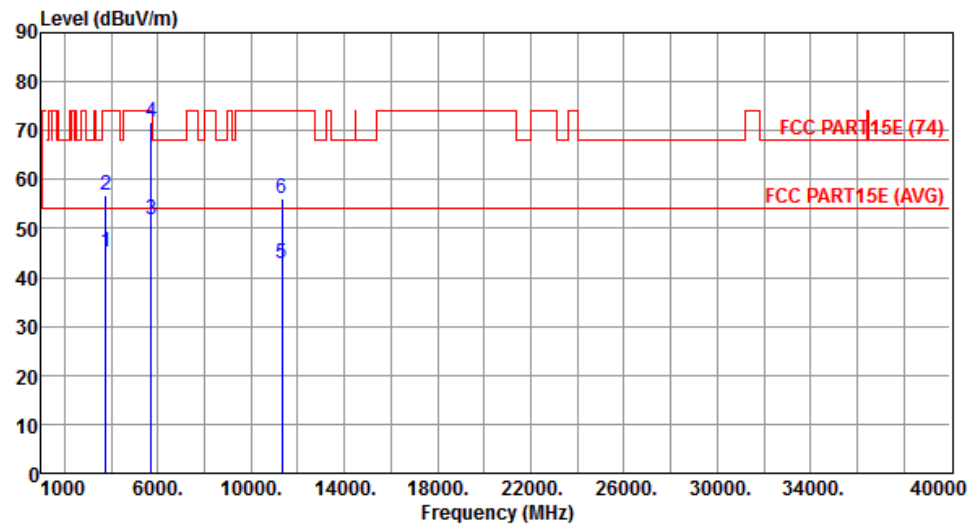


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3780.00	45.06	54.00	-8.94	43.26	1.80	Average	256	98
2	3780.00	56.95	74.00	-17.05	55.15	1.80	Peak	256	98
3	5725.00	51.69	54.00	-2.31	45.88	5.81	Average	259	100
4	5725.00	71.57	74.00	-2.43	65.76	5.81	Peak	259	100
5	11340.00	42.84	54.00	-11.16	28.24	14.60	Average	100	182
6	11340.00	55.98	74.00	-18.02	41.38	14.60	Peak	100	182

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		

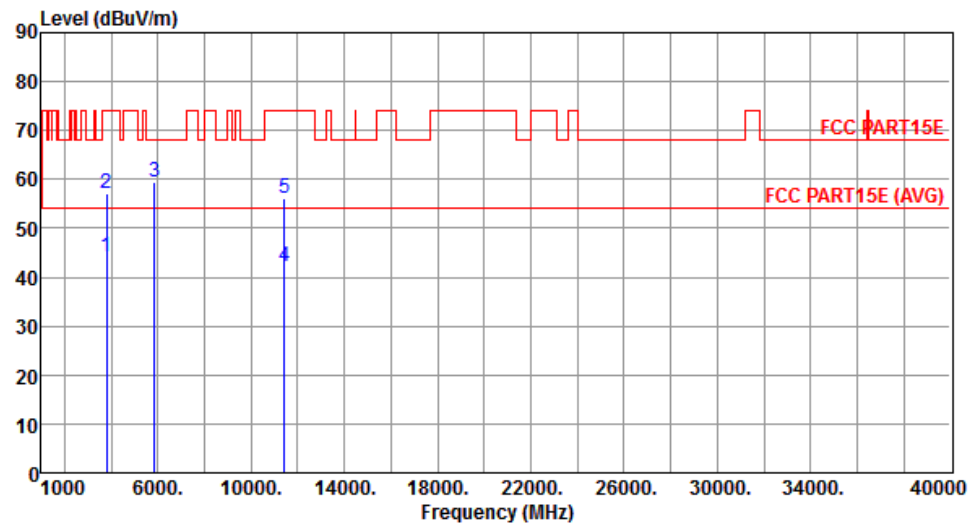


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3806.66	44.09	54.00	-9.91	42.21	1.88	Average	100	331
2	3806.66	57.03	74.00	-16.97	55.15	1.88	Peak	100	331
3	5850.00	59.32	68.20	-8.88	53.33	5.99	Peak	201	59
4	11420.00	42.23	54.00	-11.77	27.56	14.67	Average	100	196
5	11420.00	55.98	74.00	-18.02	41.31	14.67	Peak	100	196

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Vertical		

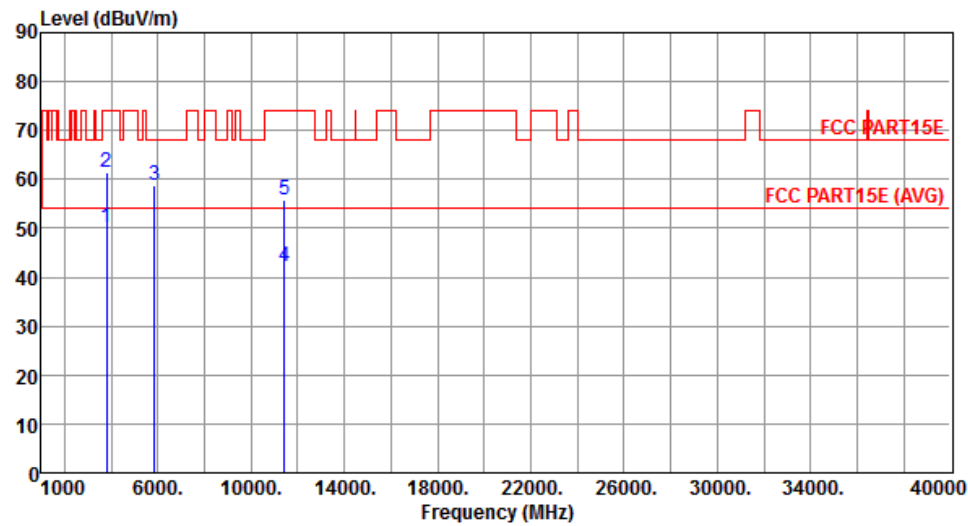


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3806.66	50.13	54.00	-3.87	48.25	1.88	Average	261	90
2	3806.66	61.45	74.00	-12.55	59.57	1.88	Peak	261	90
3	5850.00	58.92	68.20	-9.28	52.93	5.99	Peak	165	122
4	11420.00	42.32	54.00	-11.68	27.65	14.67	Average	100	177
5	11420.00	55.92	74.00	-18.08	41.25	14.67	Peak	100	177

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		

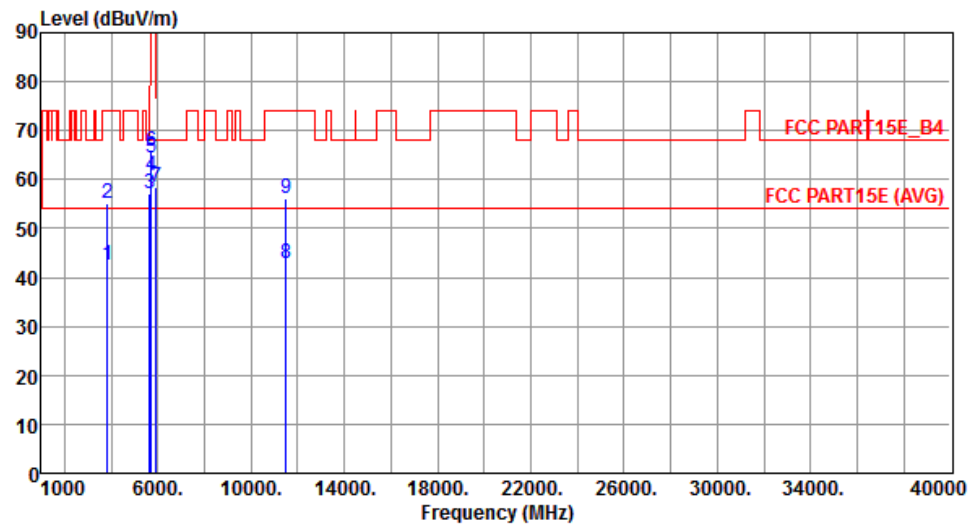


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3836.66	42.41	54.00	-11.59	40.43	1.98	Average	100	325
2	3836.66	55.29	74.00	-18.71	53.31	1.98	Peak	100	325
3	5650.00	57.04	68.20	-11.16	51.35	5.69	Peak	197	378
4	5700.00	60.79	105.20	-44.41	55.02	5.77	Peak	197	378
5	5720.00	64.46	110.80	-46.34	58.67	5.79	Peak	197	378
6	5725.00	65.73	122.20	-56.47	59.92	5.81	Peak	197	378
7	5925.00	58.55	68.20	-9.65	52.46	6.09	Peak	197	59
8	11510.00	42.96	54.00	-11.04	28.24	14.72	Average	100	156
9	11510.00	56.03	74.00	-17.97	41.31	14.72	Peak	100	156

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Vertical		

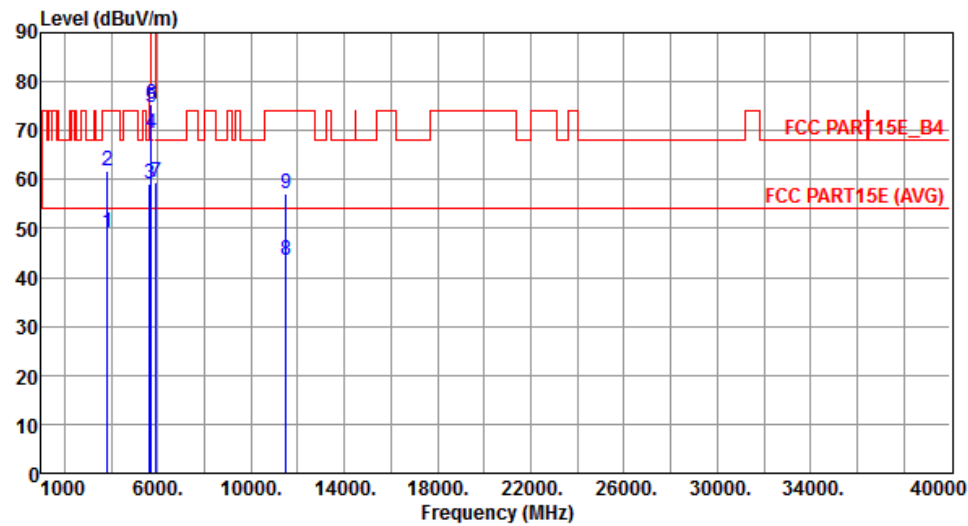


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3836.66	49.20	54.00	-4.80	47.22	1.98	Average	253	96
2	3836.66	61.72	74.00	-12.28	59.74	1.98	Peak	253	96
3	5650.00	59.24	68.20	-8.96	53.55	5.69	Peak	236	126
4	5700.00	69.33	105.20	-35.87	63.56	5.77	Peak	236	126
5	5720.00	74.57	110.80	-36.23	68.78	5.79	Peak	236	126
6	5725.00	75.54	122.20	-46.66	69.73	5.81	Peak	236	126
7	5925.00	59.50	68.20	-8.70	53.41	6.09	Peak	236	126
8	11510.00	43.37	54.00	-10.63	28.65	14.72	Average	100	156
9	11510.00	57.10	74.00	-16.90	42.38	14.72	Peak	100	156

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

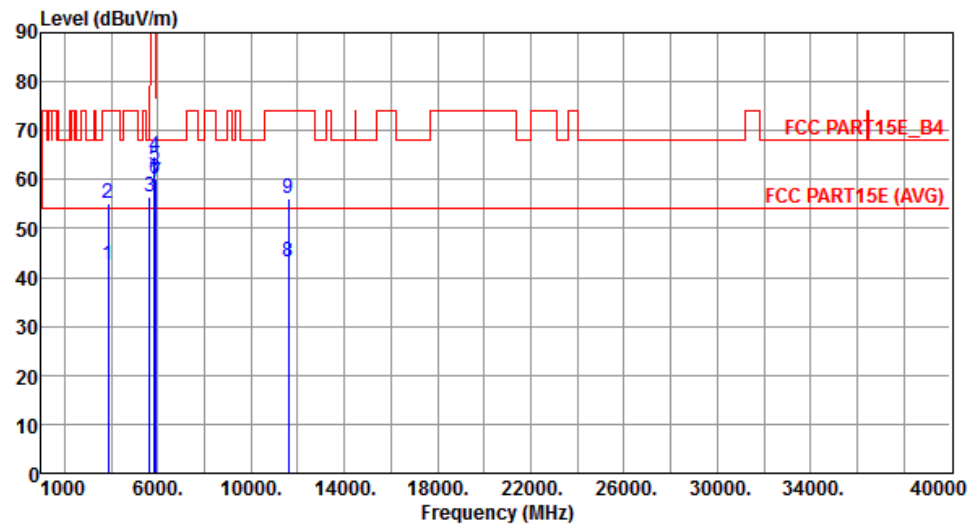

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3863.33	42.41	54.00	-11.59	40.34	2.07	Average	100	173
2	3863.33	55.23	74.00	-18.77	53.16	2.07	Peak	100	173
3	5650.00	56.46	68.20	-11.74	50.77	5.69	Peak	204	60
4	5850.00	64.87	122.20	-57.33	58.88	5.99	Peak	204	60
5	5855.00	62.75	110.80	-48.05	56.75	6.00	Peak	204	60
6	5875.00	60.14	105.20	-45.06	54.12	6.02	Peak	204	60
7	5925.00	59.39	68.20	-8.81	53.30	6.09	Peak	204	60
8	11590.00	43.22	54.00	-10.78	28.66	14.56	Average	100	178
9	11590.00	56.09	74.00	-17.91	41.53	14.56	Peak	100	178


Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

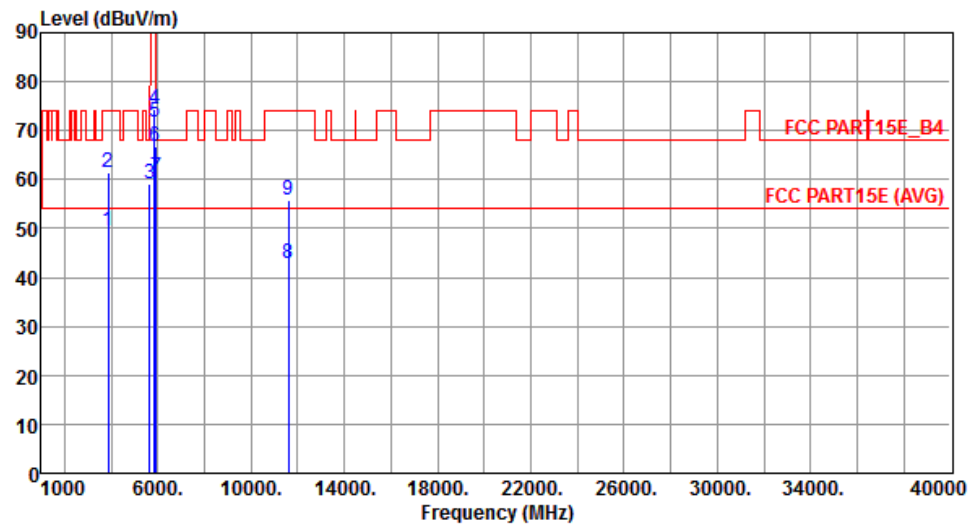

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3863.33	49.62	54.00	-4.38	47.55	2.07	Average	293	95
2	3863.33	61.38	74.00	-12.62	59.31	2.07	Peak	293	95
3	5650.00	59.02	68.20	-9.18	53.33	5.69	Peak	236	96
4	5850.00	74.43	122.20	-47.77	68.44	5.99	Peak	236	96
5	5855.00	71.84	110.80	-38.96	65.84	6.00	Peak	236	96
6	5875.00	66.87	105.20	-38.33	60.85	6.02	Peak	236	96
7	5925.00	60.41	68.20	-7.79	54.32	6.09	Peak	236	96
8	11590.00	42.80	54.00	-11.20	28.24	14.56	Average	100	165
9	11590.00	55.94	74.00	-18.06	41.38	14.56	Peak	100	165


3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		

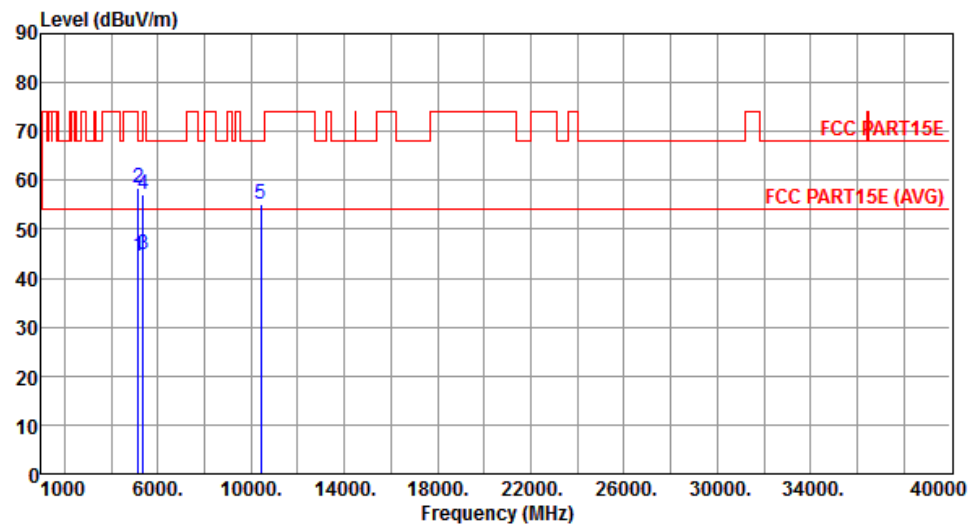


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.63	54.00	-9.37	39.61	5.02	Average	170	331
2	5150.00	58.35	74.00	-15.65	53.33	5.02	Peak	170	331
3	5350.00	44.89	54.00	-9.11	39.58	5.31	Average	170	331
4	5350.00	57.28	74.00	-16.72	51.97	5.31	Peak	170	331
5	10420.00	55.20	68.20	-13.00	41.42	13.78	Peak	100	156

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

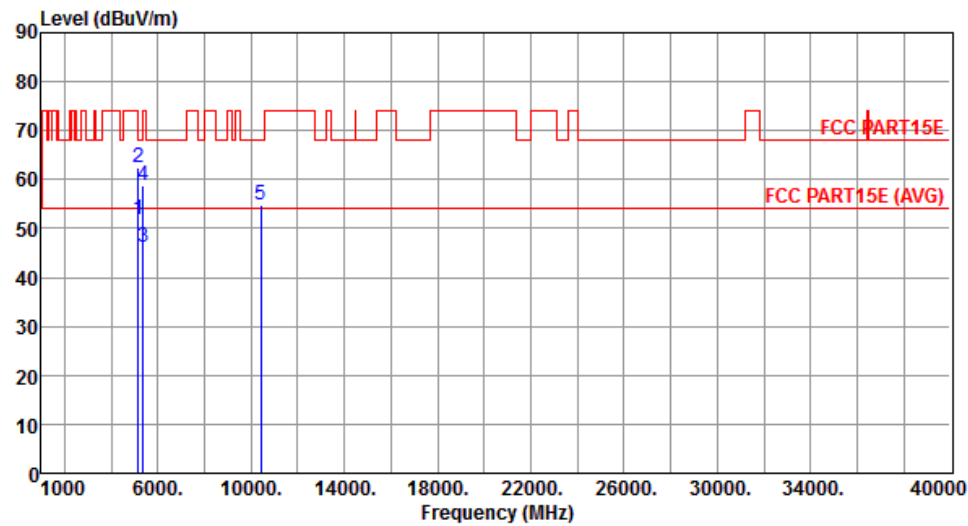


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	51.76	54.00	-2.24	46.74	5.02	Average	231	97
2	5150.00	62.50	74.00	-11.50	57.48	5.02	Peak	231	97
3	5350.00	46.22	54.00	-7.78	40.91	5.31	Average	231	97
4	5350.00	58.75	74.00	-15.25	53.44	5.31	Peak	231	97
5	10420.00	54.83	68.20	-13.37	41.05	13.78	Peak	100	173

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Horizontal		

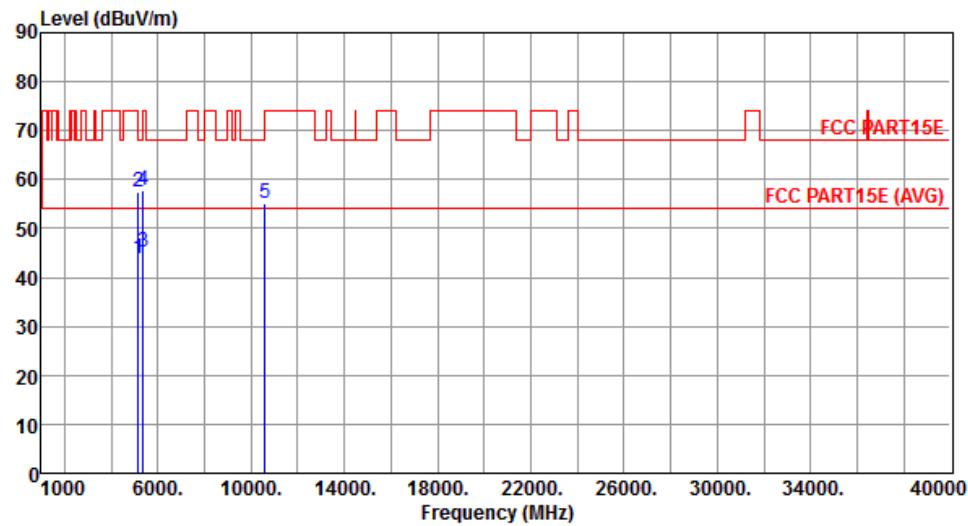


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.88	54.00	-10.12	38.86	5.02	Average	182	333
2	5150.00	57.48	74.00	-16.52	52.46	5.02	Peak	182	333
3	5350.00	45.33	54.00	-8.67	40.02	5.31	Average	182	333
4	5350.00	57.87	74.00	-16.13	52.56	5.31	Peak	182	333
5	10580.00	55.15	68.20	-13.05	41.25	13.90	Peak	100	172

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Vertical		

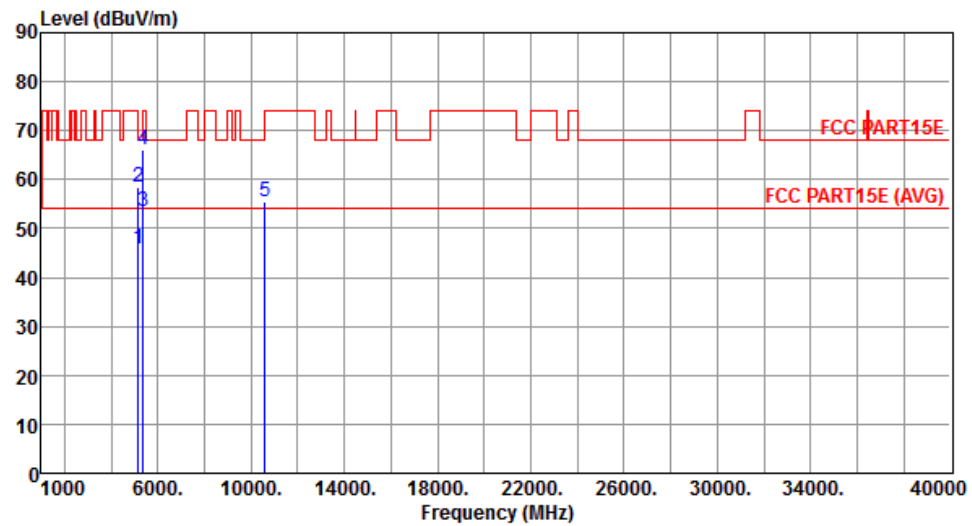


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.75	54.00	-8.25	40.73	5.02	Average	204	134
2	5150.00	58.59	74.00	-15.41	53.57	5.02	Peak	204	134
3	5350.00	53.58	54.00	-0.42	48.27	5.31	Average	204	134
4	5350.00	66.20	74.00	-7.80	60.89	5.31	Peak	204	134
5	10580.00	55.34	68.20	-12.86	41.44	13.90	Peak	100	124

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		

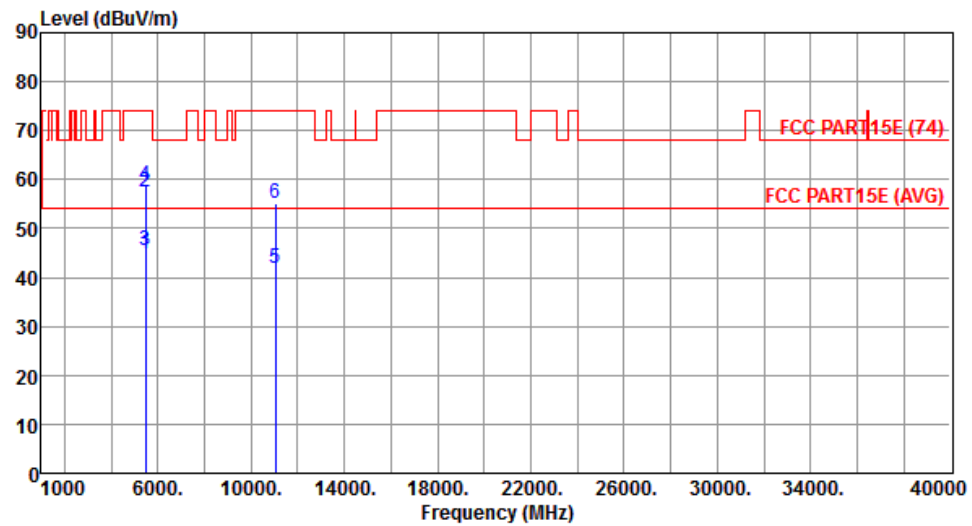


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	44.95	54.00	-9.05	39.49	5.46	Average	193	327
2	5460.00	57.36	74.00	-16.64	51.90	5.46	Peak	193	327
3	5470.00	45.59	54.00	-8.41	40.12	5.47	Average	193	327
4	5470.00	58.85	74.00	-15.15	53.38	5.47	Peak	193	327
5	11060.00	41.91	54.00	-12.09	27.56	14.35	Average	100	173
6	11060.00	55.06	74.00	-18.94	40.71	14.35	Peak	100	173

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Vertical		

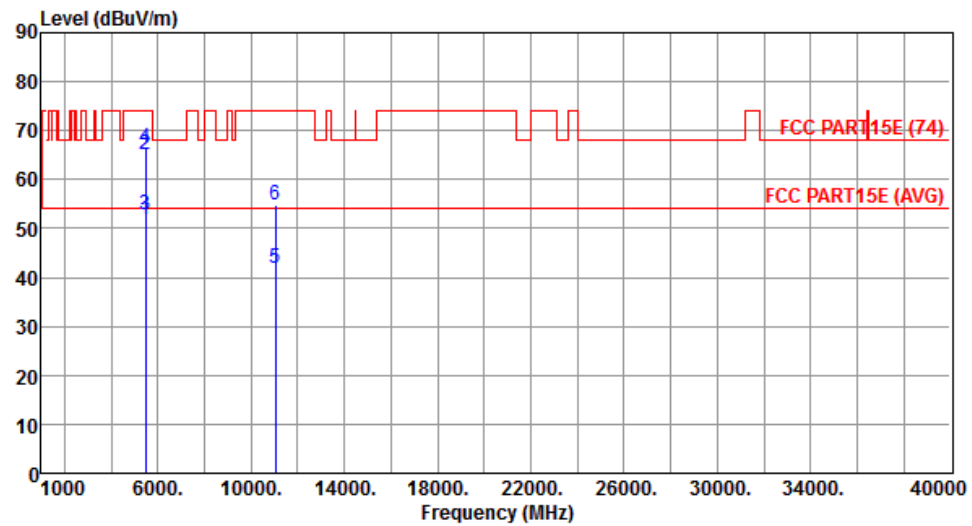


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	51.75	54.00	-2.25	46.29	5.46	Average	184	139
2	5460.00	65.17	74.00	-8.83	59.71	5.46	Peak	184	139
3	5470.00	52.86	54.00	-1.14	47.39	5.47	Average	184	139
4	5470.00	66.28	74.00	-7.72	60.81	5.47	Peak	184	139
5	11060.00	42.00	54.00	-12.00	27.65	14.35	Average	100	144
6	11060.00	54.73	74.00	-19.27	40.38	14.35	Peak	100	144

Modulation	VHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		

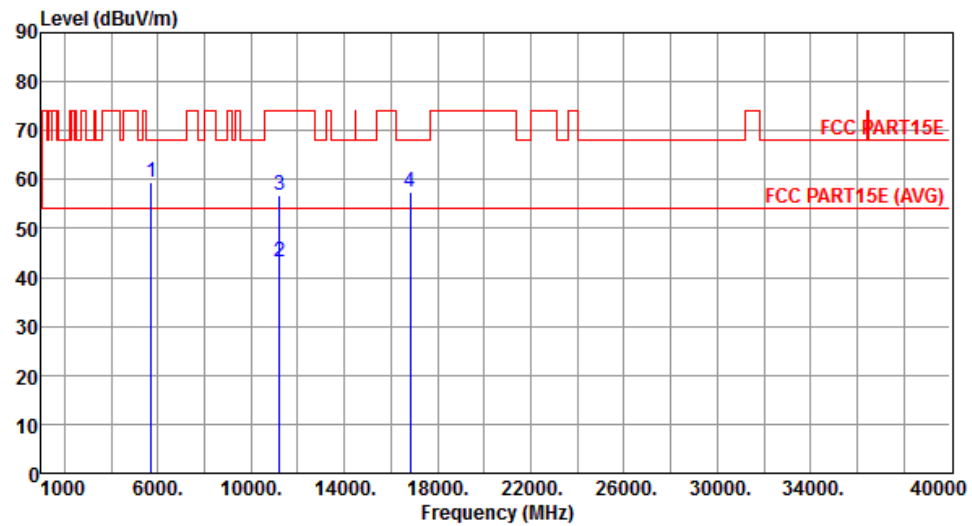


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	59.34	68.20	-8.86	53.53	5.81	Peak	191	327
2	11220.00	43.04	54.00	-10.96	28.55	14.49	Average	100	102
3	11220.00	56.70	74.00	-17.30	42.21	14.49	Peak	100	102
4	16830.00	57.49	68.20	-10.71	41.47	16.02	Peak	100	205

Modulation	VHT80	Test Freq. (MHz)	5610
Polarization	Vertical		

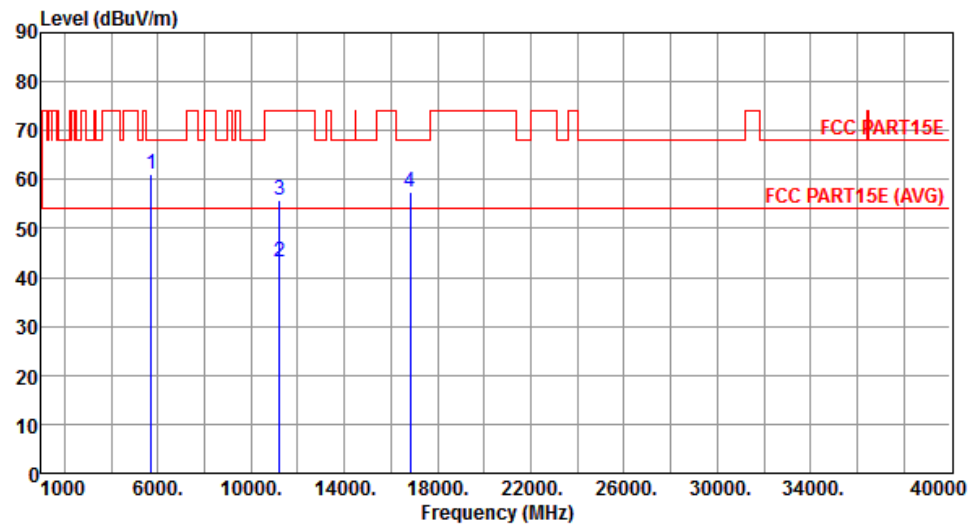


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	61.17	68.20	-7.03	55.36	5.81	Peak	185	132
2	11220.00	43.05	54.00	-10.95	28.56	14.49	Average	100	177
3	11220.00	55.74	74.00	-18.26	41.25	14.49	Peak	100	177
4	16830.00	57.50	68.20	-10.70	41.48	16.02	Peak	100	196

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		

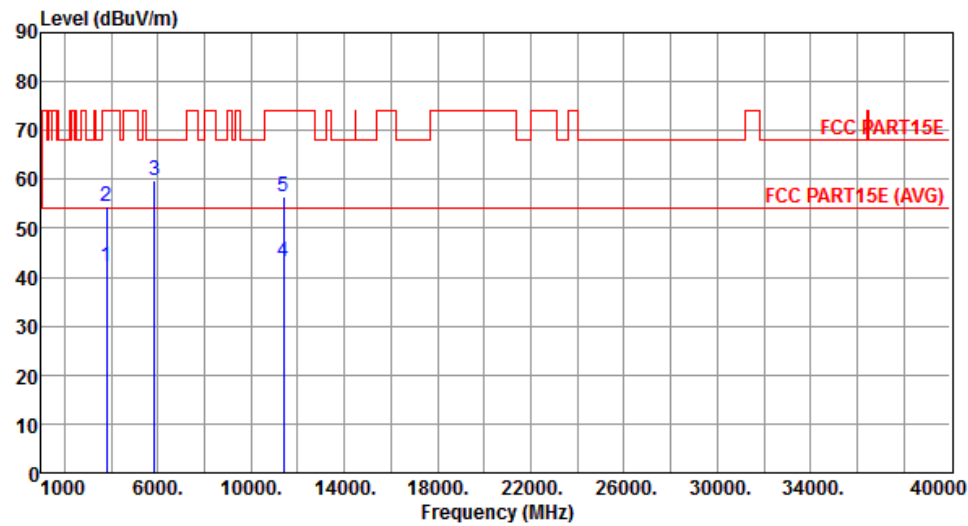


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3793.33	42.08	54.00	-11.92	40.24	1.84	Average	100	330
2	3793.33	54.61	74.00	-19.39	52.77	1.84	Peak	100	330
3	5850.00	59.64	68.20	-8.56	53.65	5.99	Peak	190	325
4	11380.00	43.07	54.00	-10.93	28.44	14.63	Average	100	110
5	11380.00	56.35	74.00	-17.65	41.72	14.63	Peak	100	110

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Vertical		

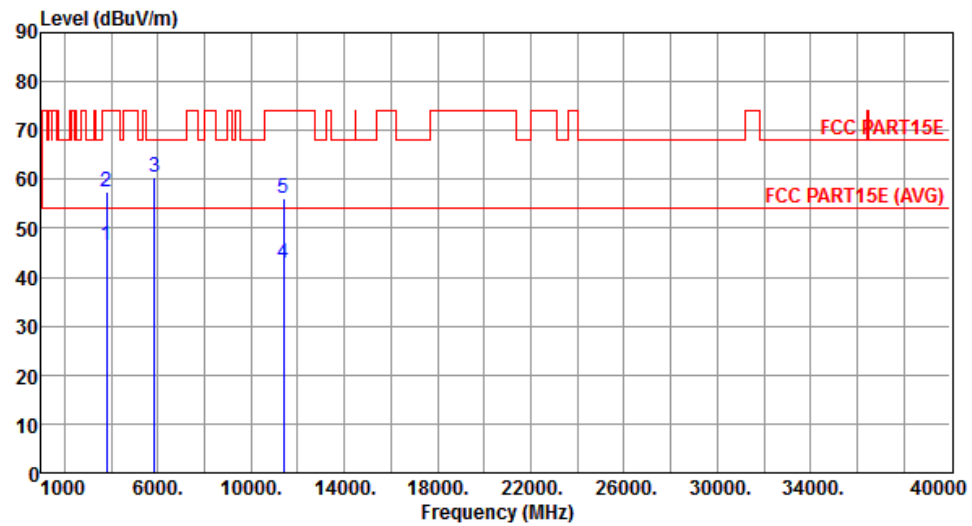


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3793.33	46.64	54.00	-7.36	44.80	1.84	Average	254	99
2	3793.33	57.48	74.00	-16.52	55.64	1.84	Peak	254	99
3	5850.00	60.41	68.20	-7.79	54.42	5.99	Peak	182	131
4	11380.00	42.79	54.00	-11.21	28.16	14.63	Average	100	172
5	11380.00	56.05	74.00	-17.95	41.42	14.63	Peak	100	173

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		

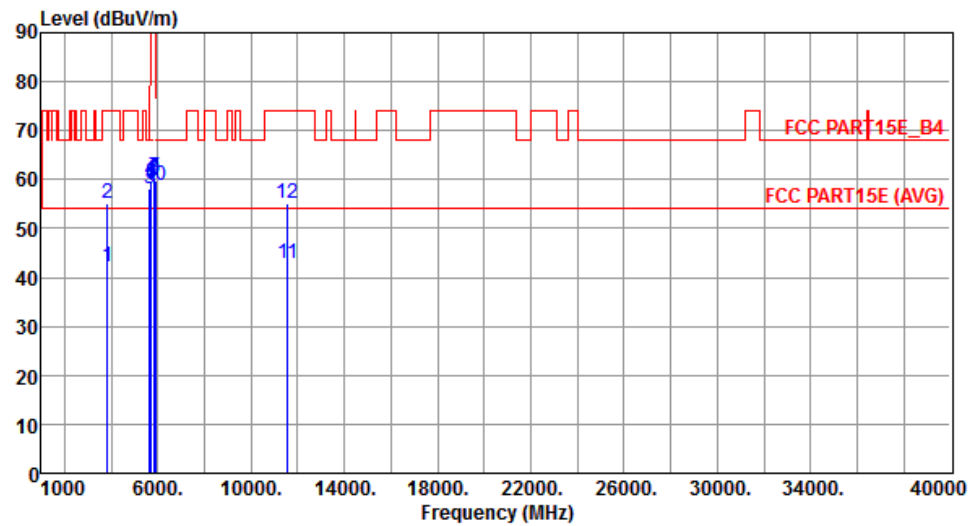

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3850.00	42.33	54.00	-11.67	40.31	2.02	Average	100	328
2	3850.00	55.24	74.00	-18.76	53.22	2.02	Peak	100	328
3	5650.00	58.11	68.20	-10.09	52.42	5.69	Peak	185	320
4	5700.00	59.09	105.20	-46.11	53.32	5.77	Peak	185	320
5	5720.00	59.21	110.80	-51.59	53.42	5.79	Peak	185	320
6	5725.00	59.47	122.20	-62.73	53.66	5.81	Peak	185	320
7	5850.00	60.40	122.20	-61.80	54.41	5.99	Peak	185	320
8	5855.00	60.02	110.80	-50.78	54.02	6.00	Peak	185	320
9	5875.00	59.79	105.20	-45.41	53.77	6.02	Peak	185	320
10	5925.00	58.81	68.20	-9.39	52.72	6.09	Peak	185	320
11	11550.00	42.85	54.00	-11.15	28.21	14.64	Average	100	144
12	11550.00	55.22	74.00	-18.78	40.58	14.64	Peak	100	144

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Vertical		

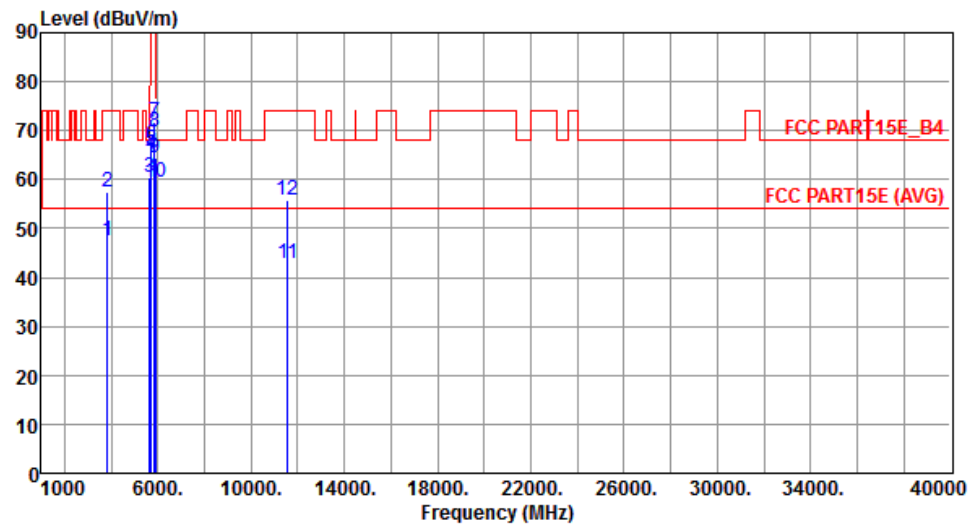


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3850.00	47.51	54.00	-6.49	45.49	2.02	Average	254	99
2	3850.00	57.57	74.00	-16.43	55.55	2.02	Peak	254	99
3	5650.00	60.32	68.20	-7.88	54.63	5.69	Peak	185	131
4	5700.00	65.19	105.20	-40.01	59.42	5.77	Peak	185	131
5	5720.00	66.01	110.80	-44.79	60.22	5.79	Peak	185	131
6	5725.00	67.14	122.20	-55.06	61.33	5.81	Peak	185	131
7	5850.00	71.83	122.20	-50.37	65.84	5.99	Peak	185	131
8	5855.00	69.62	110.80	-41.18	63.62	6.00	Peak	185	131
9	5875.00	64.31	105.20	-40.89	58.29	6.02	Peak	185	131
10	5925.00	59.41	68.20	-8.79	53.32	6.09	Peak	185	131
11	11550.00	42.88	54.00	-11.12	28.24	14.64	Average	100	163
12	11550.00	55.76	74.00	-18.24	41.12	14.64	Peak	100	163

Configuration 2 : PCB Dipole Antenna


3.5.9 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

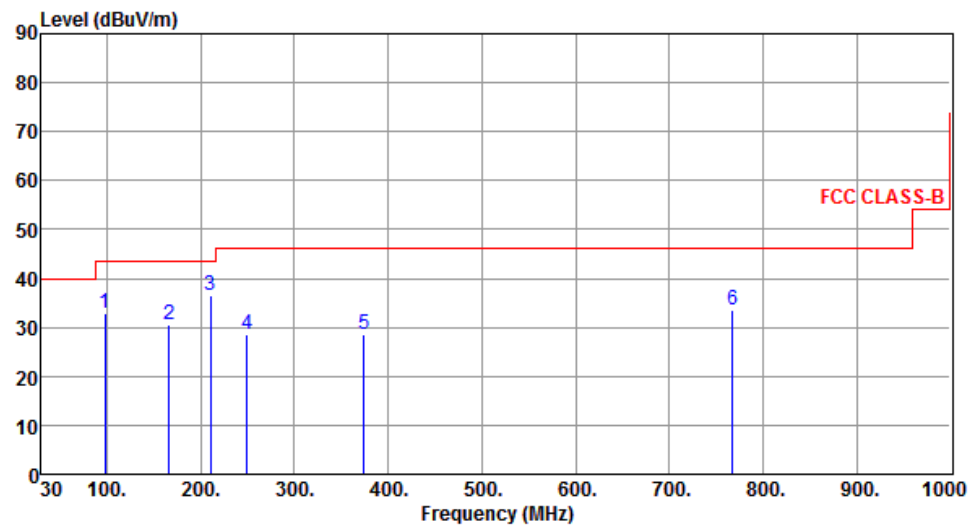


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	97.96	33.00	43.50	-10.50	46.76	-13.76	Peak	---	---
2	166.72	30.56	43.50	-12.94	39.20	-8.64	Peak	---	---
3	210.36	36.48	43.50	-7.02	47.76	-11.28	Peak	---	---
4	249.26	28.61	46.00	-17.39	38.23	-9.62	Peak	---	---
5	374.43	28.61	46.00	-17.39	34.53	-5.92	Peak	---	---
6	767.73	33.51	46.00	-12.49	31.33	2.18	Peak	---	---

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

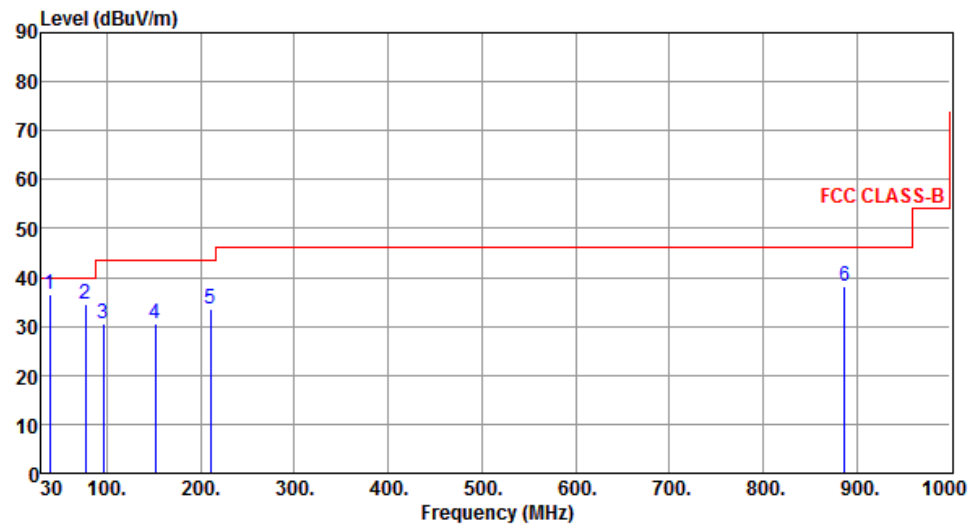


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.65	36.66	40.00	-3.34	45.52	-8.86	Peak	---	---
2	77.43	34.62	40.00	-5.38	47.25	-12.63	Peak	---	---
3	95.91	30.43	43.50	-13.07	44.43	-14.00	Peak	---	---
4	151.43	30.44	43.50	-13.06	38.94	-8.50	Peak	---	---
5	210.36	33.51	43.50	-9.99	44.79	-11.28	Peak	---	---
6	886.96	38.31	46.00	-7.69	34.25	4.06	Peak	---	---

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

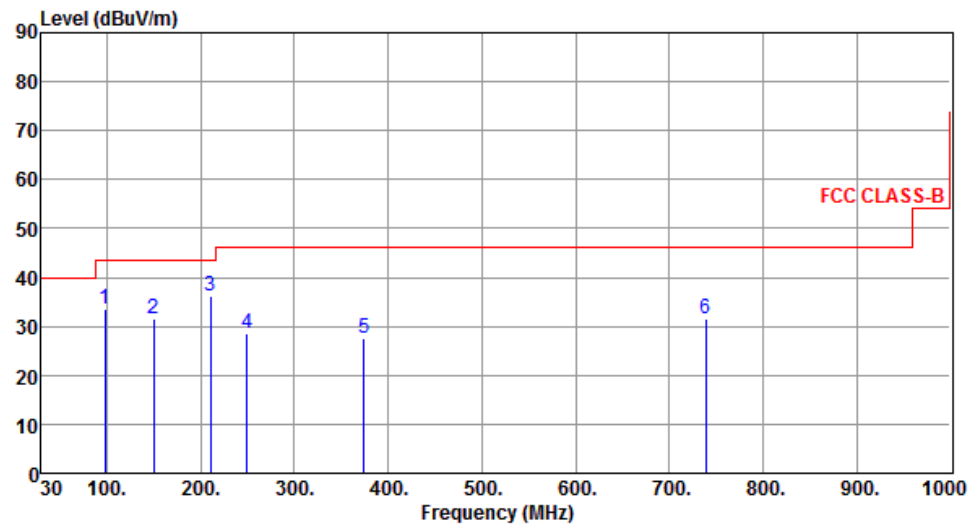

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	97.96	33.53	43.50	-9.97	47.29	-13.76	Peak	---	---
2	149.73	31.61	43.50	-11.89	40.14	-8.53	Peak	---	---
3	210.53	36.33	43.50	-7.17	47.60	-11.27	Peak	---	---
4	249.43	28.72	46.00	-17.28	38.34	-9.62	Peak	---	---
5	374.42	27.61	46.00	-18.39	33.53	-5.92	Peak	---	---
6	738.51	31.55	46.00	-14.45	29.96	1.59	Peak	---	---


Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

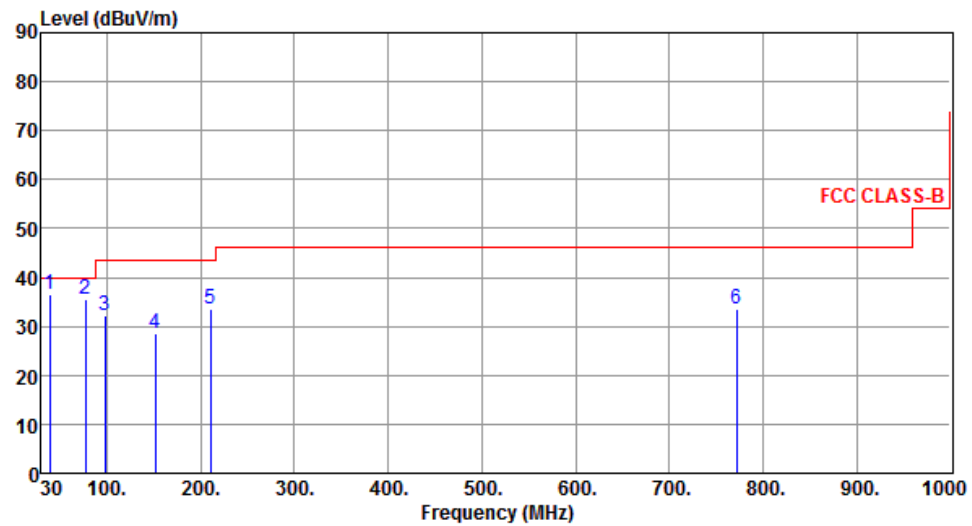

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.71	36.44	40.00	-3.56	45.29	-8.85	Peak	---	---
2	77.42	35.43	40.00	-4.57	48.06	-12.63	Peak	---	---
3	97.93	32.38	43.50	-11.12	46.15	-13.77	Peak	---	---
4	151.73	28.44	43.50	-15.06	36.93	-8.49	Peak	---	---
5	210.73	33.61	43.50	-9.89	44.88	-11.27	Peak	---	---
6	772.26	33.54	46.00	-12.46	31.29	2.25	Peak	---	---


3.5.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		

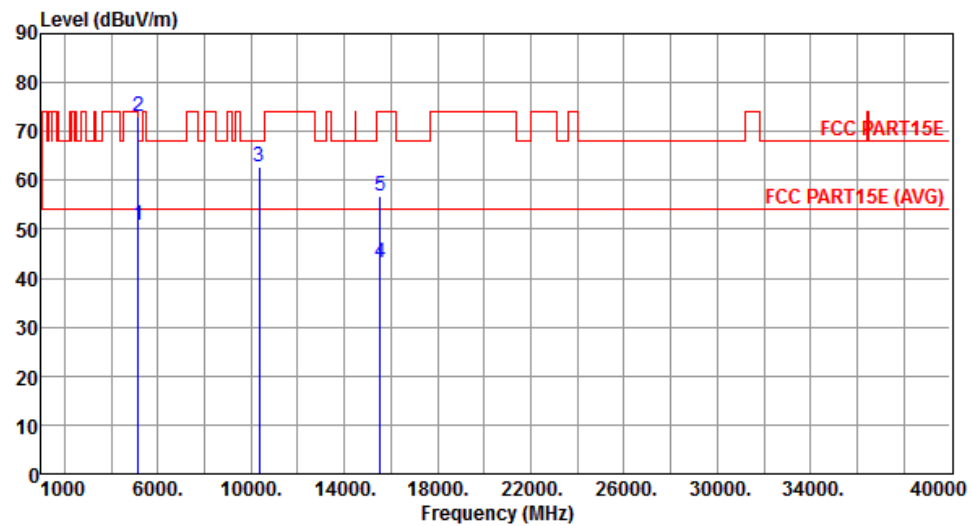


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	50.77	54.00	-3.23	45.75	5.02	Average	155	340
2	5150.00	73.07	74.00	-0.93	68.05	5.02	Peak	155	340
3	10360.00	62.82	68.20	-5.38	49.08	13.74	Peak	193	49
4	15540.00	43.29	54.00	-10.71	28.32	14.97	Average	100	309
5	15540.00	56.78	74.00	-17.22	41.81	14.97	Peak	100	309

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

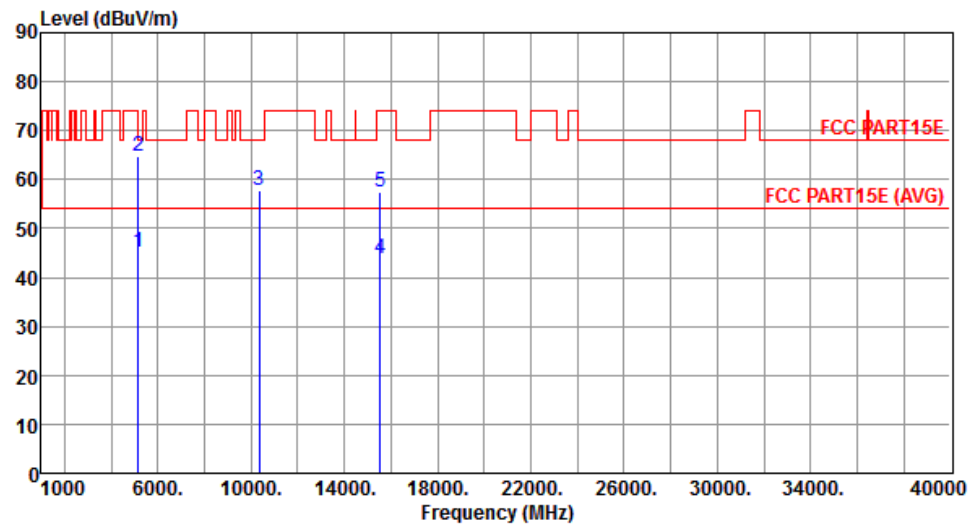


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.27	54.00	-8.73	40.25	5.02	Average	131	134
2	5150.00	64.72	74.00	-9.28	59.70	5.02	Peak	131	134
3	10360.00	57.93	68.20	-10.27	44.19	13.74	Peak	144	298
4	15540.00	43.71	54.00	-10.29	28.74	14.97	Average	100	331
5	15540.00	57.43	74.00	-16.57	42.46	14.97	Peak	100	331

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

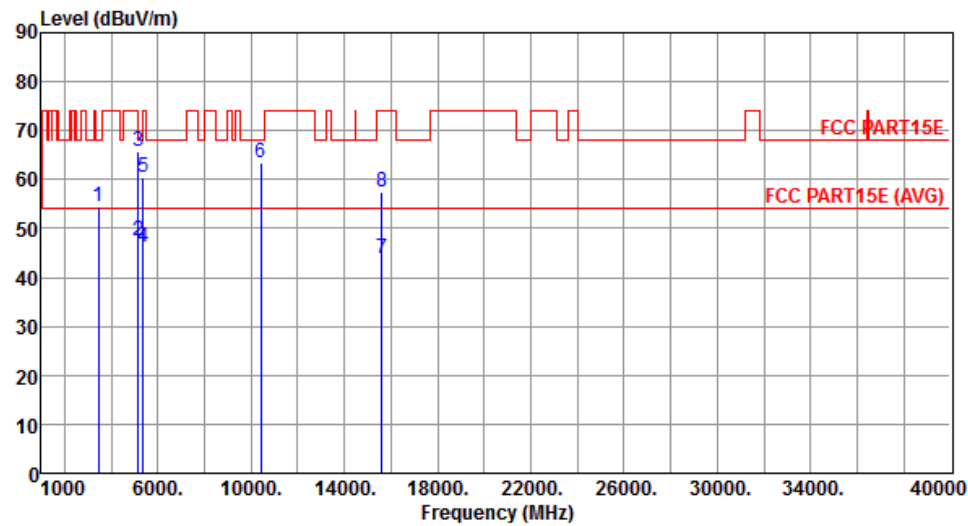


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.00	54.63	68.20	-13.57	53.77	0.86	Peak	100	17
2	5150.00	47.43	54.00	-6.57	42.41	5.02	Average	165	333
3	5150.00	65.76	74.00	-8.24	60.74	5.02	Peak	165	333
4	5350.00	46.12	54.00	-7.88	40.81	5.31	Average	165	333
5	5350.00	60.34	74.00	-13.66	55.03	5.31	Peak	165	333
6	10400.00	63.42	68.20	-4.78	49.65	13.77	Peak	192	46
7	15600.00	43.72	54.00	-10.28	28.78	14.94	Average	100	318
8	15600.00	57.47	74.00	-16.53	42.53	14.94	Peak	100	318

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

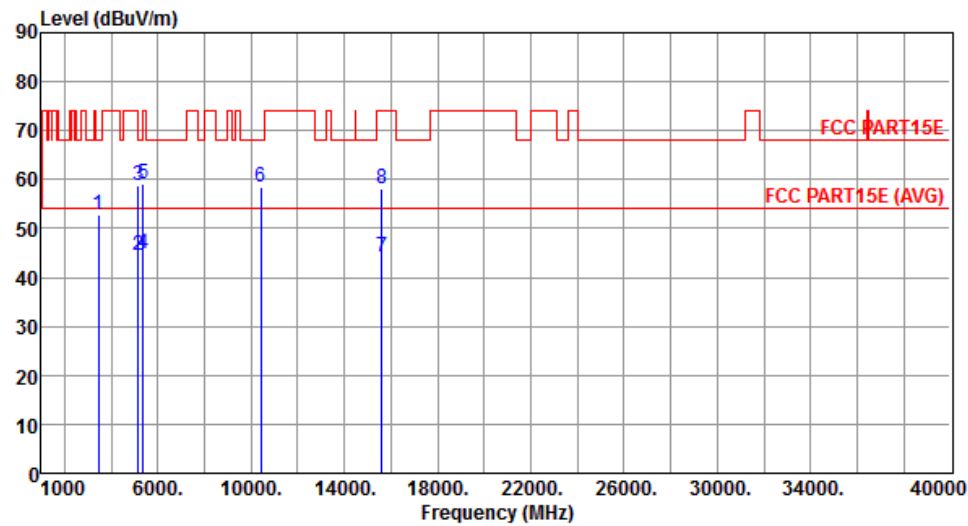


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.00	52.87	68.20	-15.33	52.01	0.86	Peak	100	302
2	5150.00	44.37	54.00	-9.63	39.35	5.02	Average	141	134
3	5150.00	58.66	74.00	-15.34	53.64	5.02	Peak	141	134
4	5350.00	44.67	54.00	-9.33	39.36	5.31	Average	141	134
5	5350.00	59.02	74.00	-14.98	53.71	5.31	Peak	141	134
6	10400.00	58.34	68.20	-9.86	44.57	13.77	Peak	140	304
7	15600.00	44.27	54.00	-9.73	29.33	14.94	Average	100	325
8	15600.00	57.99	74.00	-16.01	43.05	14.94	Peak	100	325

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

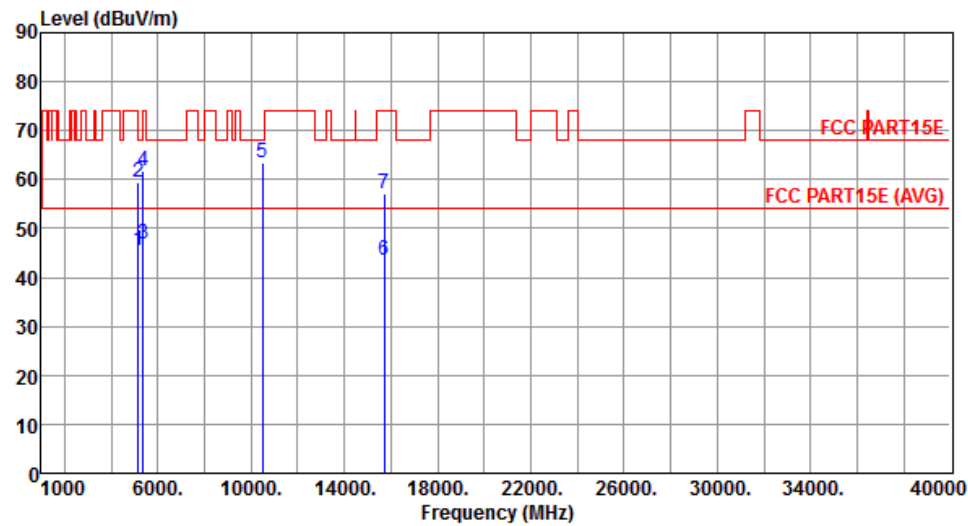


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.61	54.00	-8.39	40.59	5.02	Average	153	338
2	5150.00	59.41	74.00	-14.59	54.39	5.02	Peak	153	338
3	5350.00	46.72	54.00	-7.28	41.41	5.31	Average	153	338
4	5350.00	61.65	74.00	-12.35	56.34	5.31	Peak	153	338
5	10480.00	63.31	68.20	-4.89	49.50	13.81	Peak	189	44
6	15720.00	43.61	54.00	-10.39	28.70	14.91	Average	100	314
7	15720.00	57.21	74.00	-16.79	42.30	14.91	Peak	100	314

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

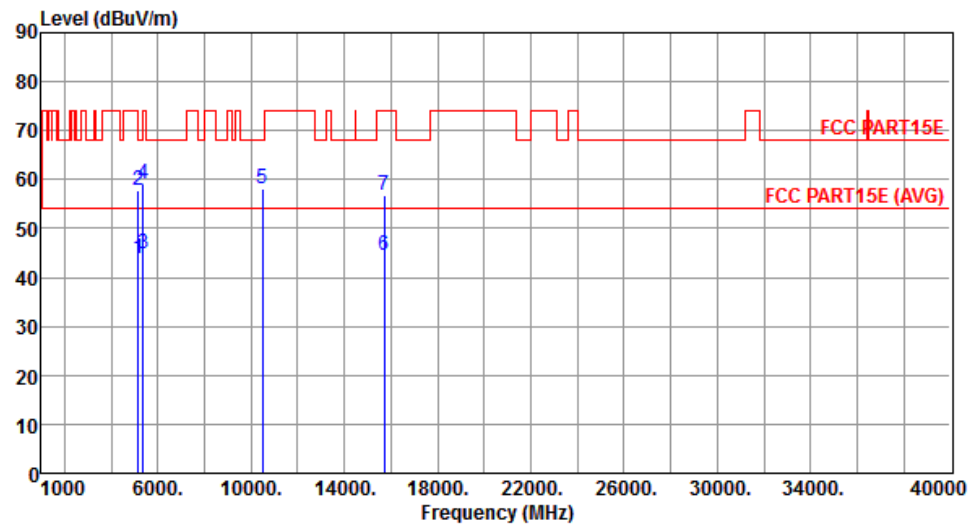


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.98	54.00	-10.02	38.96	5.02	Average	142	132
2	5150.00	57.83	74.00	-16.17	52.81	5.02	Peak	142	132
3	5350.00	44.71	54.00	-9.29	39.40	5.31	Average	142	132
4	5350.00	59.17	74.00	-14.83	53.86	5.31	Peak	142	132
5	10480.00	58.26	68.20	-9.94	44.45	13.81	Peak	145	308
6	15720.00	44.36	54.00	-9.64	29.45	14.91	Average	100	332
7	15720.00	56.82	74.00	-17.18	41.91	14.91	Peak	100	332

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		

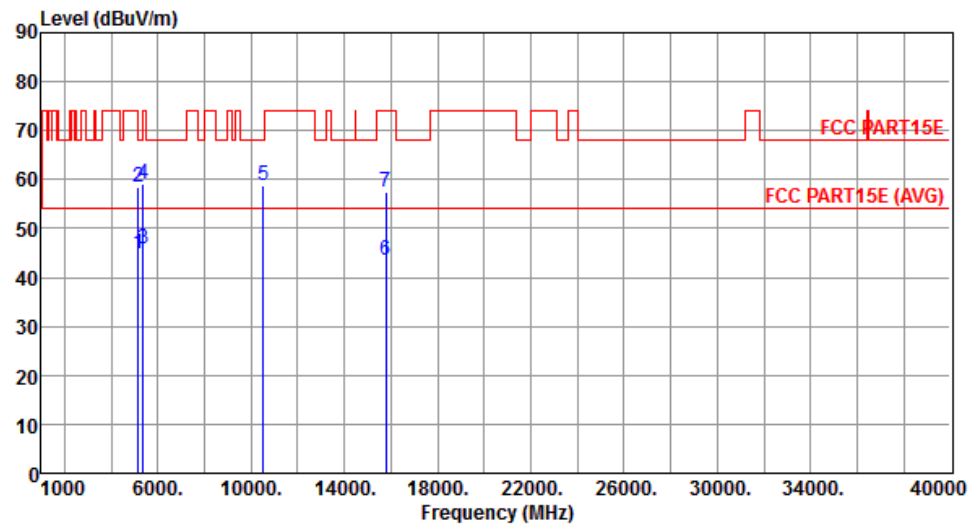


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5150.00	44.74	54.00	-9.26	39.72	5.02	Average	141	338
2	5150.00	58.56	74.00	-15.44	53.54	5.02	Peak	141	338
3	5350.00	45.94	54.00	-8.06	40.63	5.31	Average	141	338
4	5350.00	59.27	74.00	-14.73	53.96	5.31	Peak	141	338
5	10520.00	58.63	68.20	-9.57	44.79	13.84	Peak	228	50
6	15780.00	43.60	54.00	-10.40	28.73	14.87	Average	100	331
7	15780.00	57.60	74.00	-16.40	42.73	14.87	Peak	100	331

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical		

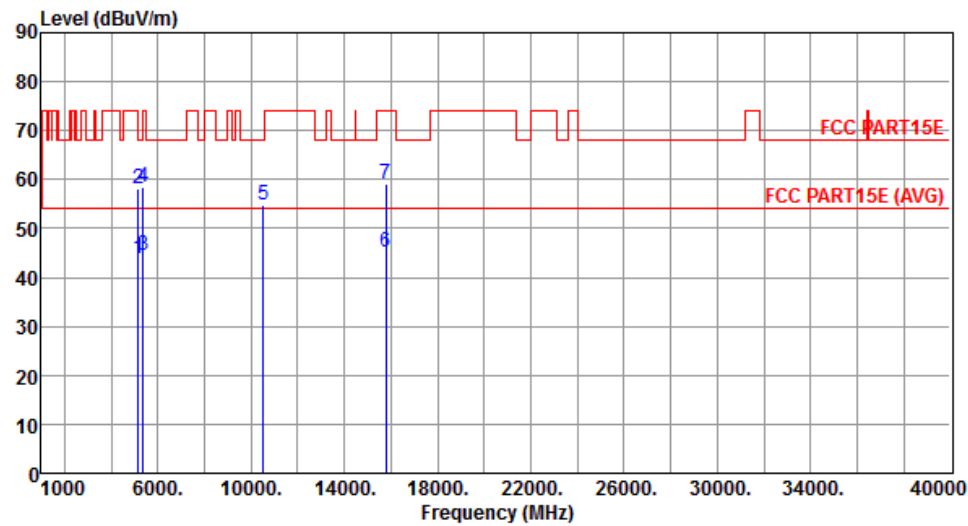


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.85	54.00	-10.15	38.83	5.02	Average	139	135
2	5150.00	57.97	74.00	-16.03	52.95	5.02	Peak	139	135
3	5350.00	44.66	54.00	-9.34	39.35	5.31	Average	139	135
4	5350.00	58.39	74.00	-15.61	53.08	5.31	Peak	139	135
5	10520.00	54.93	68.20	-13.27	41.09	13.84	Peak	146	302
6	15780.00	45.30	54.00	-8.70	30.43	14.87	Average	100	332
7	15780.00	59.21	74.00	-14.79	44.34	14.87	Peak	100	332

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal		

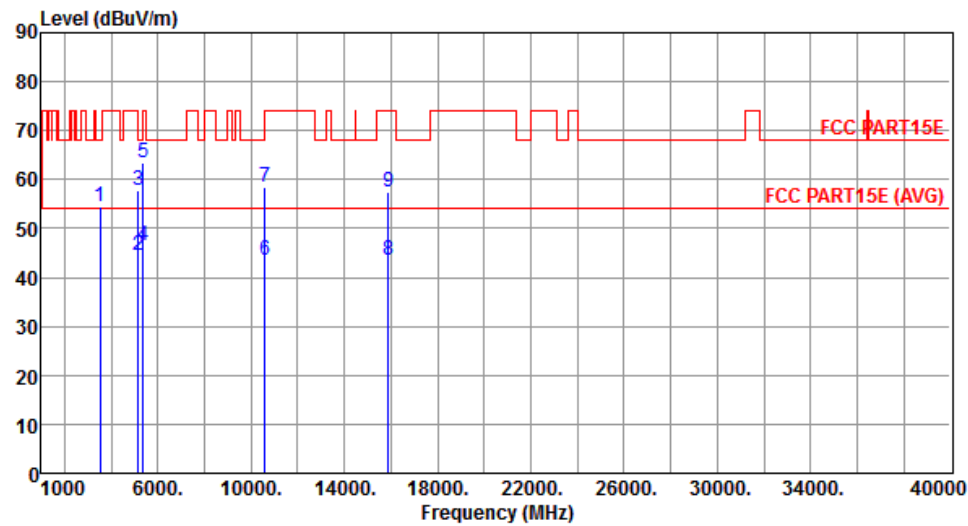


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3533.00	54.52	68.20	-13.68	53.50	1.02	Peak	100	20
2	5150.00	44.57	54.00	-9.43	39.55	5.02	Average	140	350
3	5150.00	57.93	74.00	-16.07	52.91	5.02	Peak	140	350
4	5350.00	46.49	54.00	-7.51	41.18	5.31	Average	140	350
5	5350.00	63.59	74.00	-10.41	58.28	5.31	Peak	140	350
6	10600.00	43.45	54.00	-10.55	29.53	13.92	Average	226	52
7	10600.00	58.51	74.00	-15.49	44.59	13.92	Peak	226	52
8	15900.00	43.56	54.00	-10.44	28.72	14.84	Average	100	335
9	15900.00	57.55	74.00	-16.45	42.71	14.84	Peak	100	335

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Vertical		

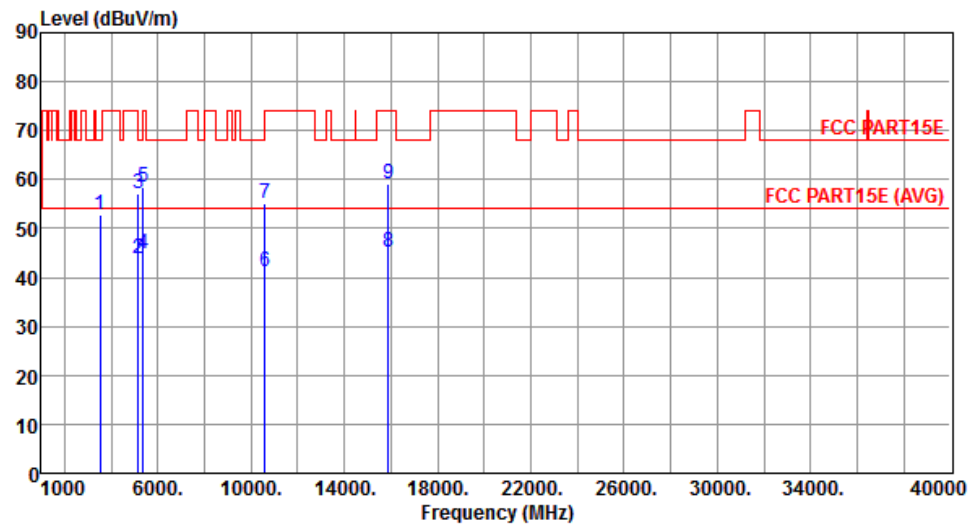


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3533.00	52.64	68.20	-15.56	51.62	1.02	Peak	100	310
2	5150.00	43.84	54.00	-10.16	38.82	5.02	Average	162	126
3	5150.00	57.21	74.00	-16.79	52.19	5.02	Peak	162	126
4	5350.00	44.73	54.00	-9.27	39.42	5.31	Average	162	126
5	5350.00	58.36	74.00	-15.64	53.05	5.31	Peak	162	126
6	10600.00	41.30	54.00	-12.70	27.38	13.92	Average	150	298
7	10600.00	55.00	74.00	-19.00	41.08	13.92	Peak	150	298
8	15900.00	45.24	54.00	-8.76	30.40	14.84	Average	100	335
9	15900.00	59.03	74.00	-14.97	44.19	14.84	Peak	100	335

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal		

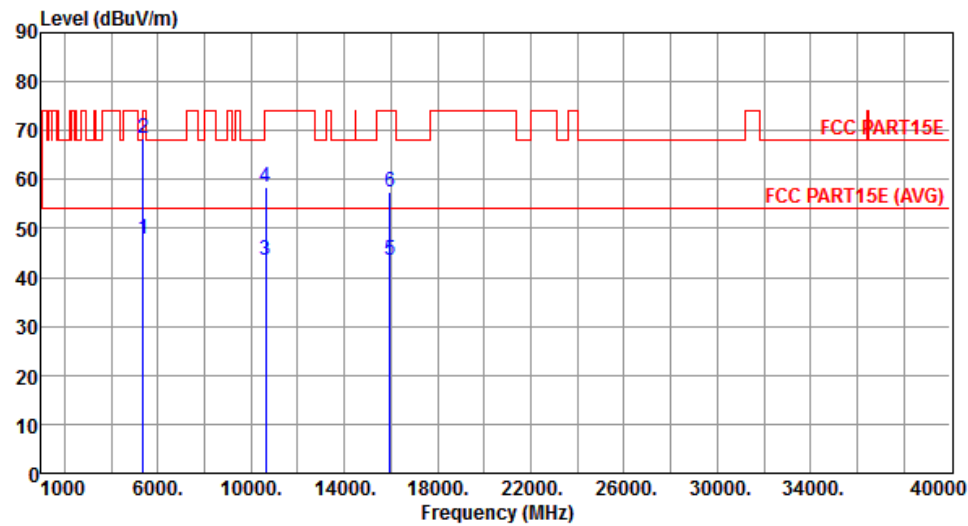


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.80	54.00	-6.20	42.49	5.31	Average	144	344
2	5350.00	68.51	74.00	-5.49	63.20	5.31	Peak	144	344
3	10640.00	43.36	54.00	-10.64	29.40	13.96	Average	223	51
4	10640.00	58.49	74.00	-15.51	44.53	13.96	Peak	223	51
5	15960.00	43.45	54.00	-10.55	28.64	14.81	Average	100	329
6	15960.00	57.44	74.00	-16.56	42.63	14.81	Peak	100	329

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical		

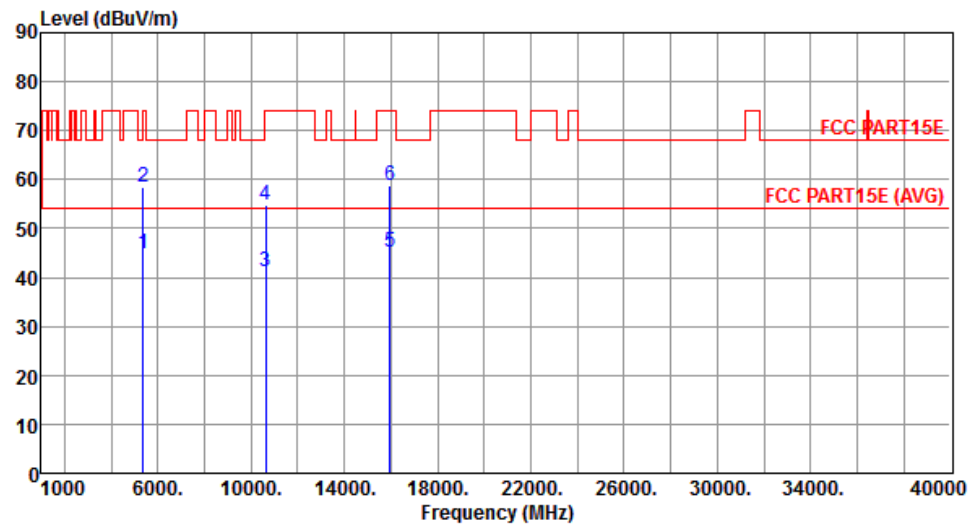


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	44.85	54.00	-9.15	39.54	5.31	Average	142	78
2	5350.00	58.37	74.00	-15.63	53.06	5.31	Peak	142	78
3	10640.00	41.23	54.00	-12.77	27.27	13.96	Average	148	294
4	10640.00	54.86	74.00	-19.14	40.90	13.96	Peak	148	294
5	15960.00	45.18	54.00	-8.82	30.37	14.81	Average	100	332
6	15960.00	58.93	74.00	-15.07	44.12	14.81	Peak	100	332

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Horizontal		

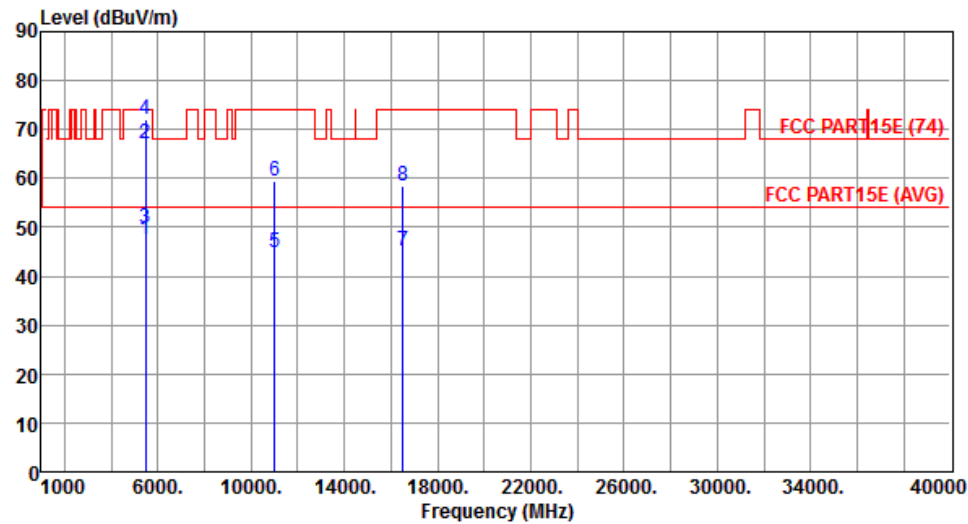


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.36	54.00	-6.64	41.90	5.46	Average	148	352
2	5460.00	67.15	74.00	-6.85	61.69	5.46	Peak	148	352
3	5470.00	49.84	54.00	-4.16	44.37	5.47	Average	148	352
4	5470.00	71.94	74.00	-2.06	66.47	5.47	Peak	148	352
5	11000.00	44.82	54.00	-9.18	30.52	14.30	Average	213	41
6	11000.00	59.52	74.00	-14.48	45.22	14.30	Peak	213	41
7	16500.00	45.19	54.00	-8.81	29.35	15.84	Average	100	336
8	16500.00	58.31	74.00	-15.69	42.47	15.84	Peak	100	336

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical		

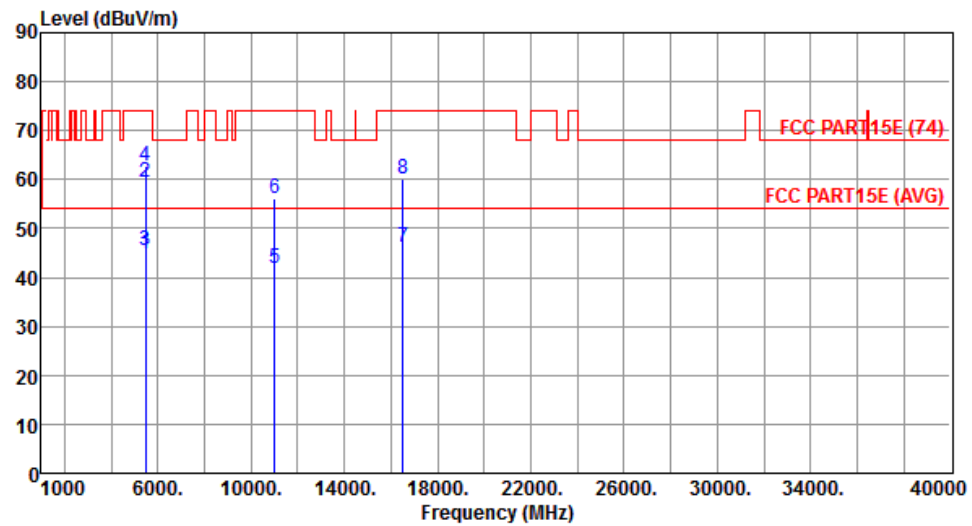


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	44.76	54.00	-9.24	39.30	5.46	Average	168	136
2	5460.00	59.40	74.00	-14.60	53.94	5.46	Peak	168	136
3	5470.00	45.43	54.00	-8.57	39.96	5.47	Average	168	136
4	5470.00	62.83	74.00	-11.17	57.36	5.47	Peak	168	136
5	11000.00	41.92	54.00	-12.08	27.62	14.30	Average	148	293
6	11000.00	56.18	74.00	-17.82	41.88	14.30	Peak	148	293
7	16500.00	46.17	54.00	-7.83	30.33	15.84	Average	100	322
8	16500.00	60.03	74.00	-13.97	44.19	15.84	Peak	100	322

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal		

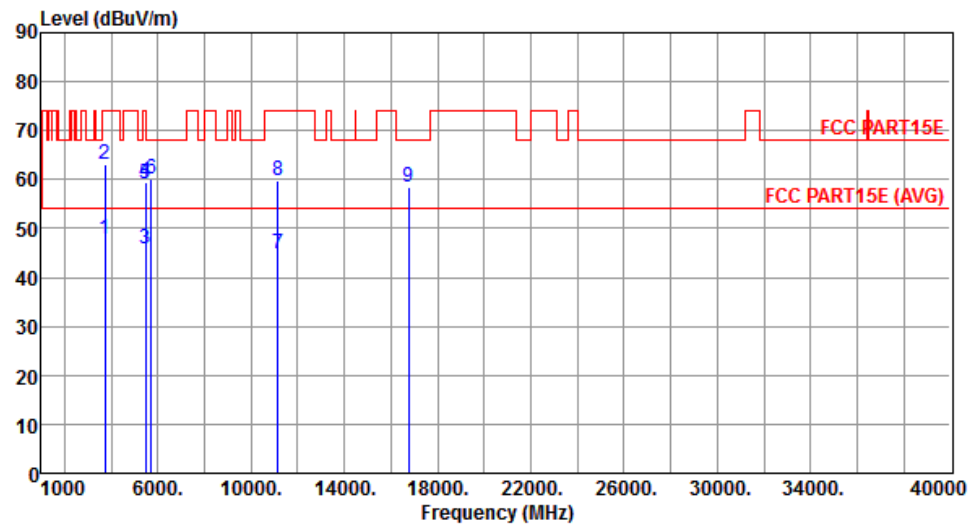


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	47.92	54.00	-6.08	46.32	1.60	Average	100	148
2	3720.00	63.06	74.00	-10.94	61.46	1.60	Peak	100	148
3	5460.00	45.76	54.00	-8.24	40.30	5.46	Average	153	353
4	5460.00	59.53	74.00	-14.47	54.07	5.46	Peak	153	353
5	5470.00	59.16	68.20	-9.04	53.69	5.47	Peak	153	353
6	5725.00	59.97	68.20	-8.23	54.16	5.81	Peak	153	353
7	11160.00	44.90	54.00	-9.10	30.46	14.44	Average	217	33
8	11160.00	59.65	74.00	-14.35	45.21	14.44	Peak	217	33
9	16740.00	58.43	68.20	-9.77	42.46	15.97	Peak	100	340

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		

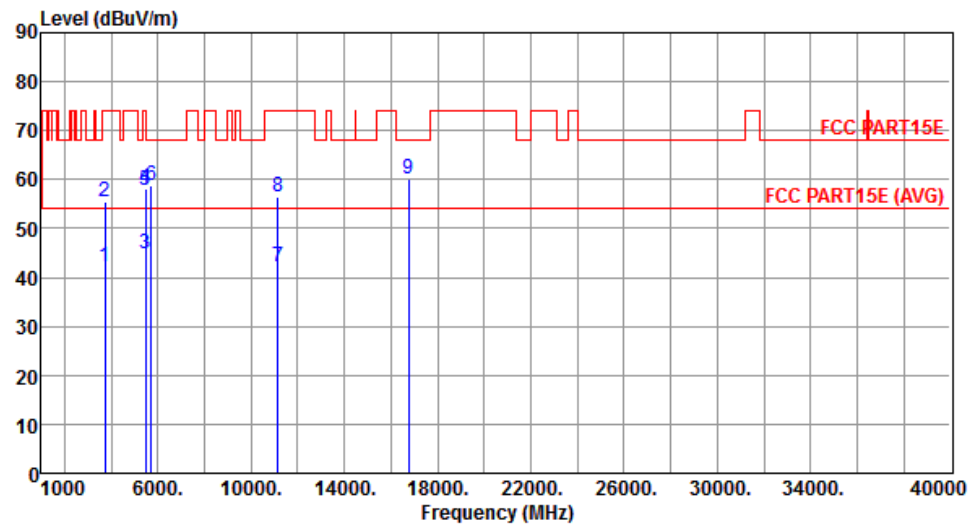


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	42.01	54.00	-11.99	40.41	1.60	Average	100	137
2	3720.00	55.45	74.00	-18.55	53.85	1.60	Peak	100	137
3	5460.00	44.74	54.00	-9.26	39.28	5.46	Average	173	123
4	5460.00	58.25	74.00	-15.75	52.79	5.46	Peak	173	123
5	5470.00	57.90	68.20	-10.30	52.43	5.47	Peak	173	123
6	5725.00	58.80	68.20	-9.40	52.99	5.81	Peak	173	123
7	11160.00	42.19	54.00	-11.81	27.75	14.44	Average	153	296
8	11160.00	56.35	74.00	-17.65	41.91	14.44	Peak	153	296
9	16740.00	60.26	68.20	-7.94	44.29	15.97	Peak	100	328

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		

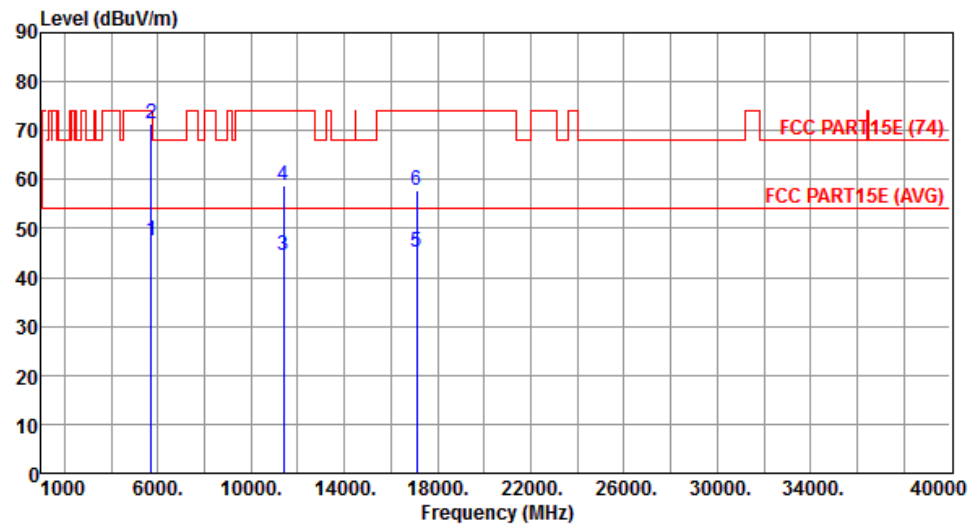


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	47.58	54.00	-6.42	41.77	5.81	Average	130	341
2	5725.00	71.28	74.00	-2.72	65.47	5.81	Peak	130	341
3	11400.00	44.39	54.00	-9.61	29.74	14.65	Average	208	45
4	11400.00	58.71	74.00	-15.29	44.06	14.65	Peak	208	45
5	17100.00	45.19	54.00	-8.81	28.68	16.51	Average	100	342
6	17100.00	57.69	74.00	-16.31	41.18	16.51	Peak	100	342

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		

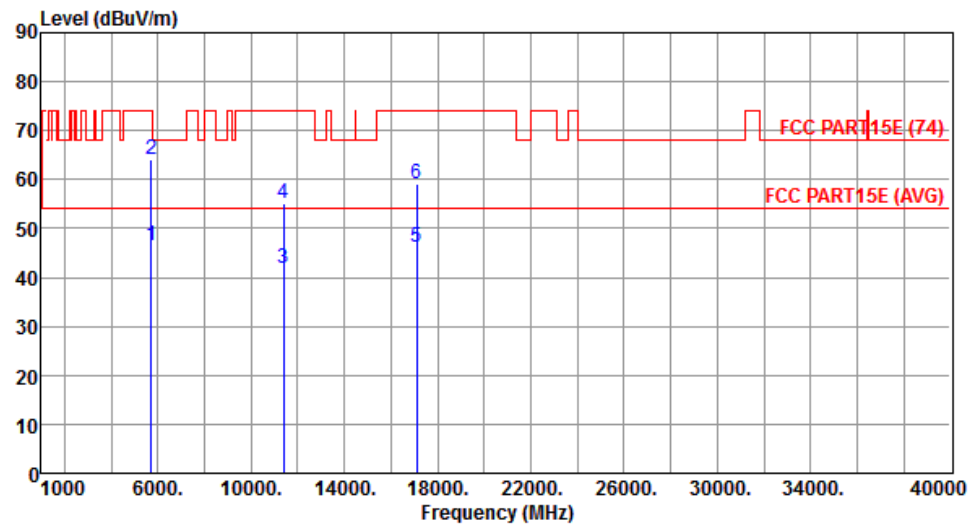


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	46.37	54.00	-7.63	40.56	5.81	Average	168	102
2	5725.00	64.11	74.00	-9.89	58.30	5.81	Peak	168	102
3	11400.00	41.69	54.00	-12.31	27.04	14.65	Average	153	288
4	11400.00	55.04	74.00	-18.96	40.39	14.65	Peak	153	288
5	17100.00	46.08	54.00	-7.92	29.57	16.51	Average	100	317
6	17100.00	59.04	74.00	-14.96	42.53	16.51	Peak	100	317

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal		

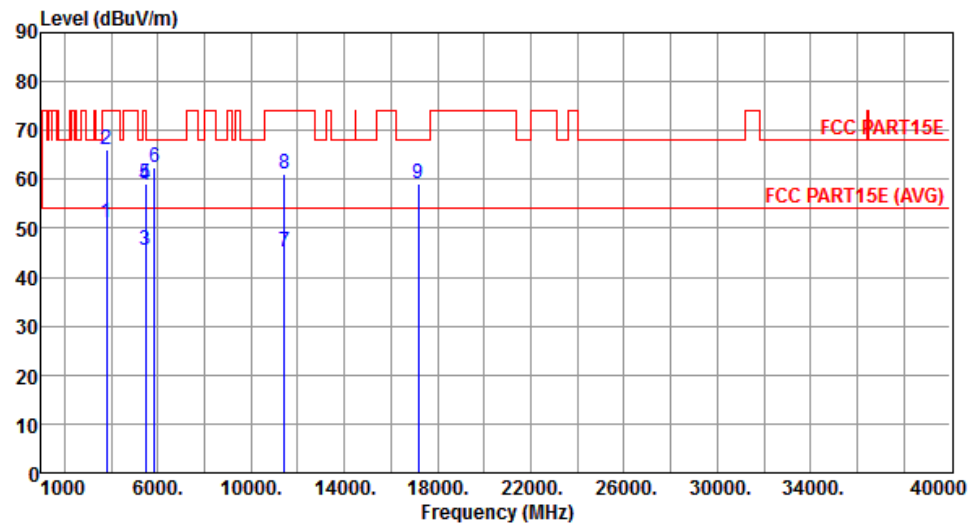


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	51.15	54.00	-2.85	49.25	1.90	Average	200	205
2	3813.33	66.21	74.00	-7.79	64.31	1.90	Peak	200	205
3	5460.00	45.64	54.00	-8.36	40.18	5.46	Average	128	348
4	5460.00	58.91	74.00	-15.09	53.45	5.46	Peak	128	348
5	5470.00	59.23	68.20	-8.97	53.76	5.47	Peak	128	348
6	5850.00	62.39	68.20	-5.81	56.40	5.99	Peak	128	348
7	11440.00	45.19	54.00	-8.81	30.50	14.69	Average	189	35
8	11440.00	61.01	74.00	-12.99	46.32	14.69	Peak	189	35
9	17160.00	59.10	68.20	-9.10	42.34	16.76	Peak	100	346

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Vertical		

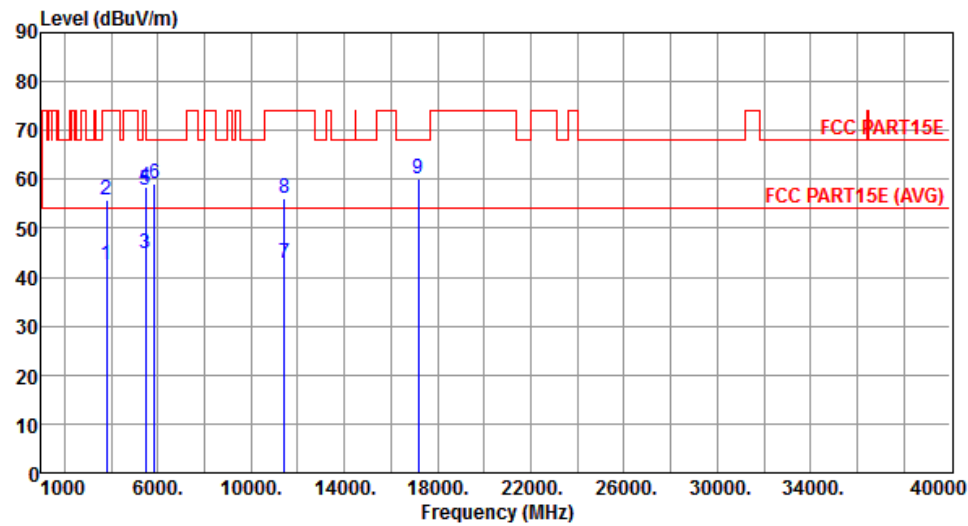


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	42.45	54.00	-11.55	40.55	1.90	Average	150	255
2	3813.33	55.78	74.00	-18.22	53.88	1.90	Peak	150	255
3	5460.00	44.77	54.00	-9.23	39.31	5.46	Average	194	114
4	5460.00	58.37	74.00	-15.63	52.91	5.46	Peak	194	114
5	5470.00	57.63	68.20	-10.57	52.16	5.47	Peak	194	114
6	5850.00	59.26	68.20	-8.94	53.27	5.99	Peak	194	114
7	11440.00	42.87	54.00	-11.13	28.18	14.69	Average	146	292
8	11440.00	56.20	74.00	-17.80	41.51	14.69	Peak	146	292
9	17160.00	60.05	68.20	-8.15	43.29	16.76	Peak	100	309

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

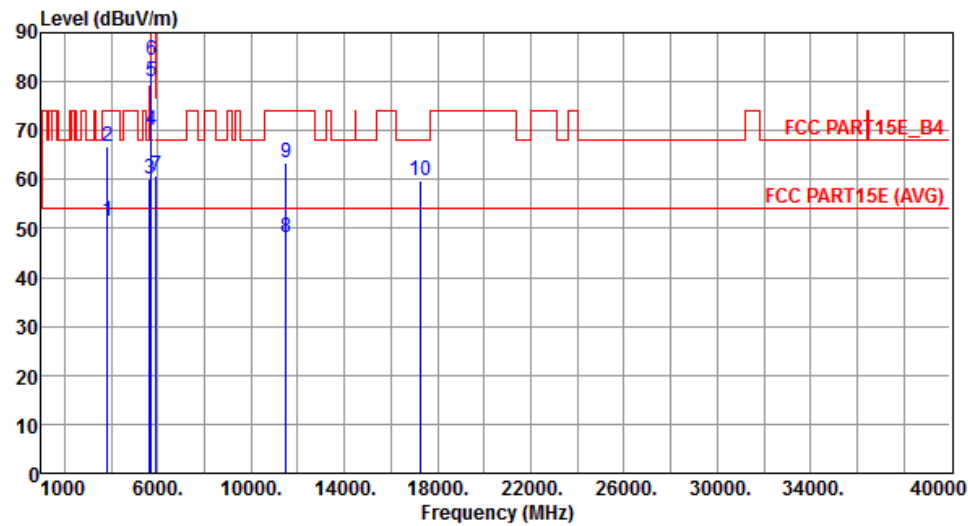


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	51.38	54.00	-2.62	49.42	1.96	Average	192	202
2	3830.00	66.68	74.00	-7.32	64.72	1.96	Peak	192	202
3	5650.00	60.19	68.20	-8.01	54.50	5.69	Peak	216	342
4	5700.00	70.15	105.20	-35.05	64.38	5.77	Peak	216	342
5	5720.00	80.06	110.80	-30.74	74.27	5.79	Peak	216	342
6	5725.00	84.29	122.20	-37.91	78.48	5.81	Peak	216	342
7	5925.00	60.80	68.20	-7.40	54.71	6.09	Peak	216	342
8	11490.00	48.14	54.00	-5.86	33.41	14.73	Average	255	334
9	11490.00	63.55	74.00	-10.45	48.82	14.73	Peak	255	334
10	17235.00	59.80	68.20	-8.40	42.73	17.07	Peak	100	41

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

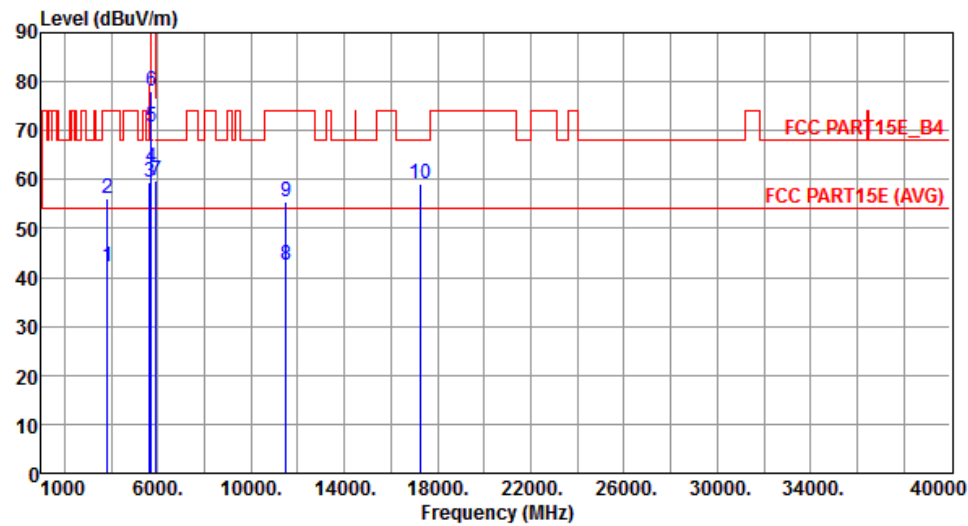


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	42.31	54.00	-11.69	40.35	1.96	Average	151	270
2	3830.00	56.27	74.00	-17.73	54.31	1.96	Peak	151	270
3	5650.00	59.55	68.20	-8.65	53.86	5.69	Peak	192	94
4	5700.00	62.42	105.20	-42.78	56.65	5.77	Peak	192	94
5	5720.00	70.88	110.80	-39.92	65.09	5.79	Peak	192	94
6	5725.00	77.89	122.20	-44.31	72.08	5.81	Peak	192	94
7	5925.00	59.74	68.20	-8.46	53.65	6.09	Peak	192	94
8	11490.00	42.54	54.00	-11.46	27.81	14.73	Average	143	20
9	11490.00	55.48	74.00	-18.52	40.75	14.73	Peak	143	20
10	17235.00	59.16	68.20	-9.04	42.09	17.07	Peak	100	8

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		

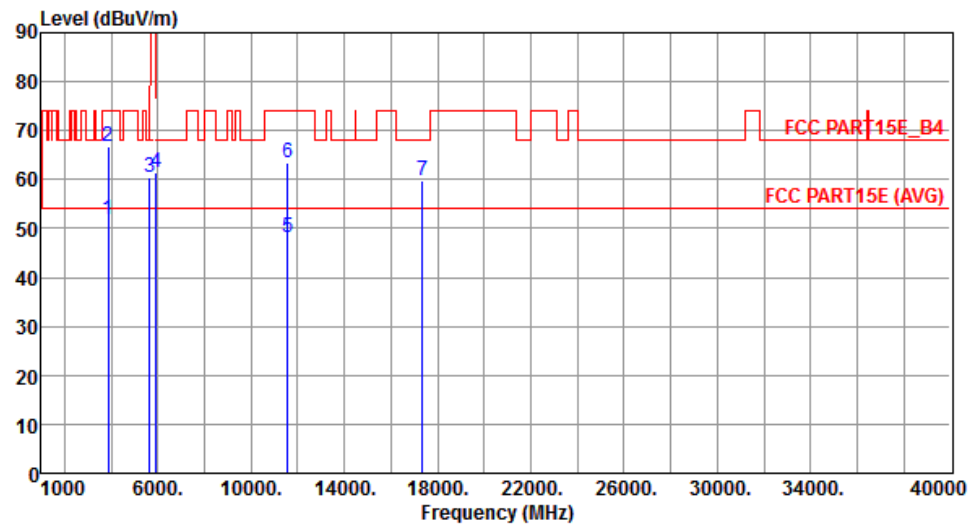


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.00	51.74	54.00	-2.26	49.70	2.04	Average	104	341
2	3856.00	66.77	74.00	-7.23	64.73	2.04	Peak	104	341
3	5650.00	60.53	68.20	-7.67	54.84	5.69	Peak	223	341
4	5925.00	61.31	68.20	-6.89	55.22	6.09	Peak	100	36
5	11570.00	48.02	54.00	-5.98	33.42	14.60	Average	258	336
6	11570.00	63.41	74.00	-10.59	48.81	14.60	Peak	258	336
7	17355.00	59.76	68.20	-8.44	42.21	17.55	Peak	100	36

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

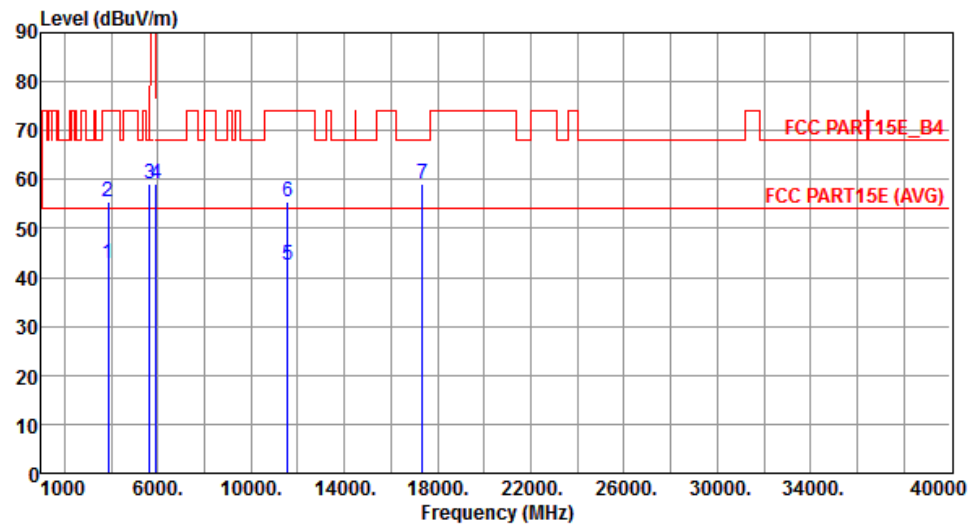


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.00	42.79	54.00	-11.21	40.75	2.04	Average	100	132
2	3856.00	55.34	74.00	-18.66	53.30	2.04	Peak	100	132
3	5650.00	59.06	68.20	-9.14	53.37	5.69	Peak	188	93
4	5925.00	59.22	68.20	-8.98	53.13	6.09	Peak	188	93
5	11570.00	42.48	54.00	-11.52	27.88	14.60	Average	147	18
6	11570.00	55.40	74.00	-18.60	40.80	14.60	Peak	147	18
7	17355.00	59.02	68.20	-9.18	41.47	17.55	Peak	100	5

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		

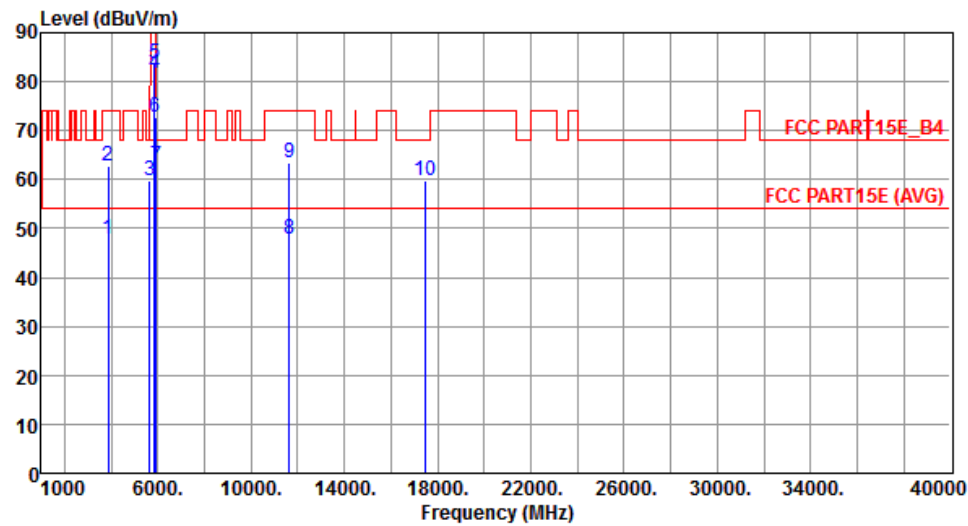

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	47.86	54.00	-6.14	45.72	2.14	Average	190	13
2	3883.33	62.75	74.00	-11.25	60.61	2.14	Peak	190	13
3	5650.00	59.92	68.20	-8.28	54.23	5.69	Peak	222	342
4	5850.00	81.69	122.20	-40.51	75.70	5.99	Peak	222	342
5	5855.00	83.59	110.80	-27.21	77.59	6.00	Peak	222	342
6	5875.00	72.68	105.20	-32.52	66.66	6.02	Peak	222	342
7	5925.00	62.89	68.20	-5.31	56.80	6.09	Peak	222	342
8	11650.00	47.93	54.00	-6.07	33.49	14.44	Average	256	341
9	11650.00	63.34	74.00	-10.66	48.90	14.44	Peak	256	341
10	17475.00	59.62	68.20	-8.58	41.58	18.04	Peak	100	42


Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		

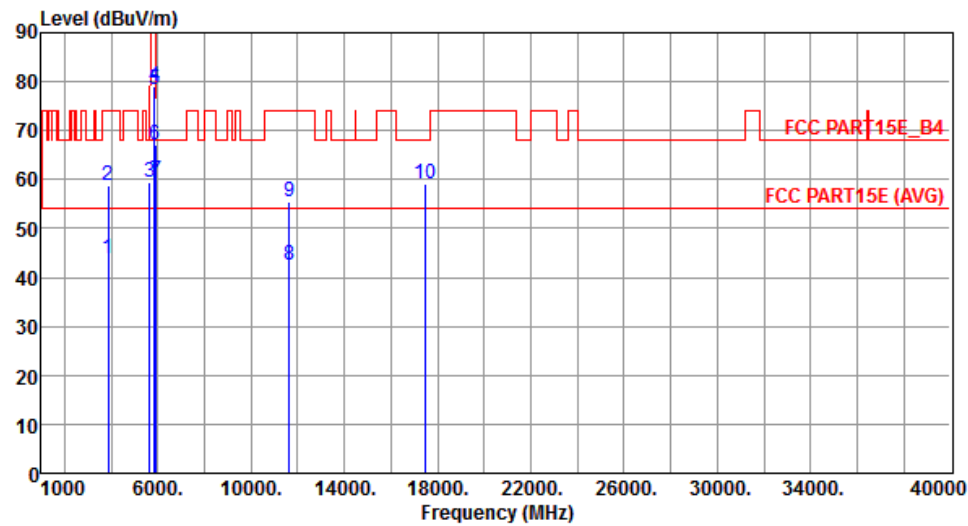

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	43.79	54.00	-10.21	41.65	2.14	Average	205	95
2	3883.33	58.91	74.00	-15.09	56.77	2.14	Peak	205	95
3	5650.00	59.40	68.20	-8.80	53.71	5.69	Peak	196	91
4	5850.00	79.15	122.20	-43.05	73.16	5.99	Peak	196	91
5	5855.00	78.43	110.80	-32.37	72.43	6.00	Peak	196	91
6	5875.00	67.02	105.20	-38.18	61.00	6.02	Peak	196	91
7	5925.00	59.88	68.20	-8.32	53.79	6.09	Peak	196	91
8	11650.00	42.41	54.00	-11.59	27.97	14.44	Average	153	24
9	11650.00	55.31	74.00	-18.69	40.87	14.44	Peak	153	24
10	17475.00	58.96	68.20	-9.24	40.92	18.04	Peak	100	2


3.5.11 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		

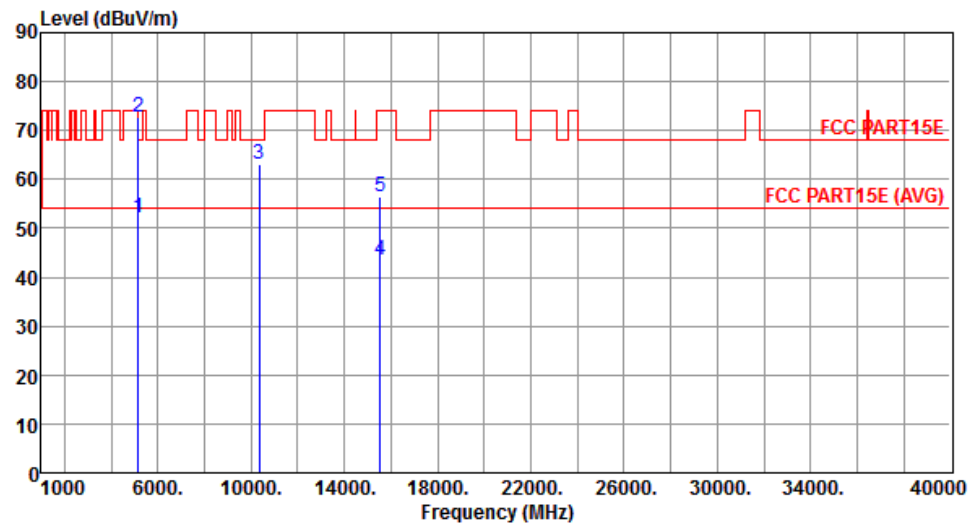


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.09	54.00	-1.91	47.07	5.02	Average	145	350
2	5150.00	72.76	74.00	-1.24	67.74	5.02	Peak	145	350
3	10360.00	62.97	68.20	-5.23	49.23	13.74	Peak	192	51
4	15540.00	43.41	54.00	-10.59	28.44	14.97	Average	100	315
5	15540.00	56.53	74.00	-17.47	41.56	14.97	Peak	100	315

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Vertical		

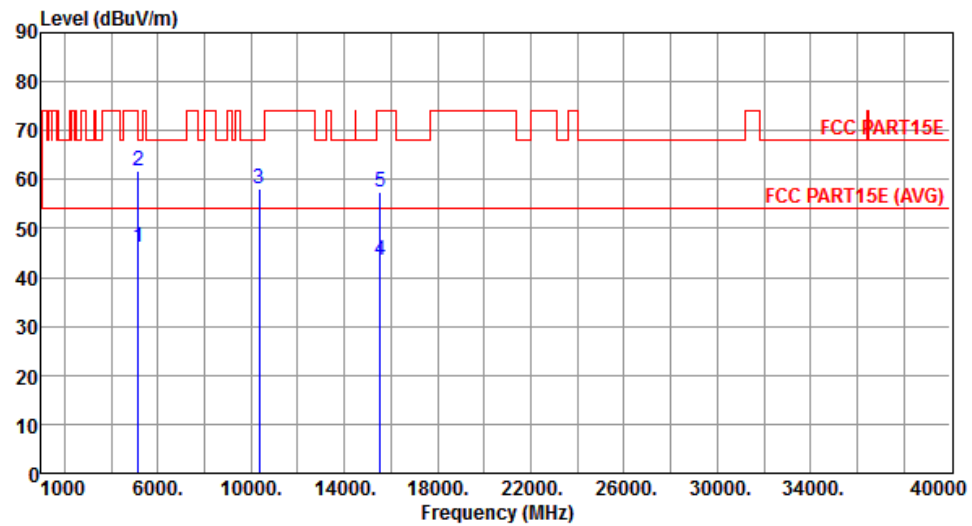


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.06	54.00	-7.94	41.04	5.02	Average	131	135
2	5150.00	61.67	74.00	-12.33	56.65	5.02	Peak	131	135
3	10360.00	58.10	68.20	-10.10	44.36	13.74	Peak	142	306
4	15540.00	43.53	54.00	-10.47	28.56	14.97	Average	100	328
5	15540.00	57.34	74.00	-16.66	42.37	14.97	Peak	100	328

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

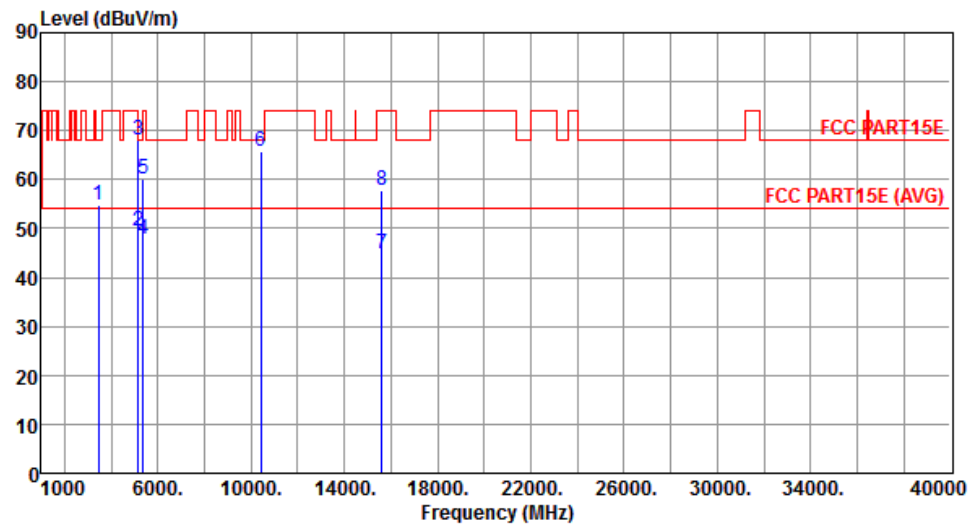


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.66	54.96	68.20	-13.24	54.10	0.86	Peak	100	17
2	5150.00	49.44	54.00	-4.56	44.42	5.02	Average	148	340
3	5150.00	67.92	74.00	-6.08	62.90	5.02	Peak	148	340
4	5350.00	47.96	54.00	-6.04	42.65	5.31	Average	148	340
5	5350.00	60.15	74.00	-13.85	54.84	5.31	Peak	148	340
6	10400.00	65.66	68.20	-2.54	51.89	13.77	Peak	191	44
7	15600.00	44.95	54.00	-9.05	30.01	14.94	Average	206	16
8	15600.00	57.71	74.00	-16.29	42.77	14.94	Peak	206	16

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

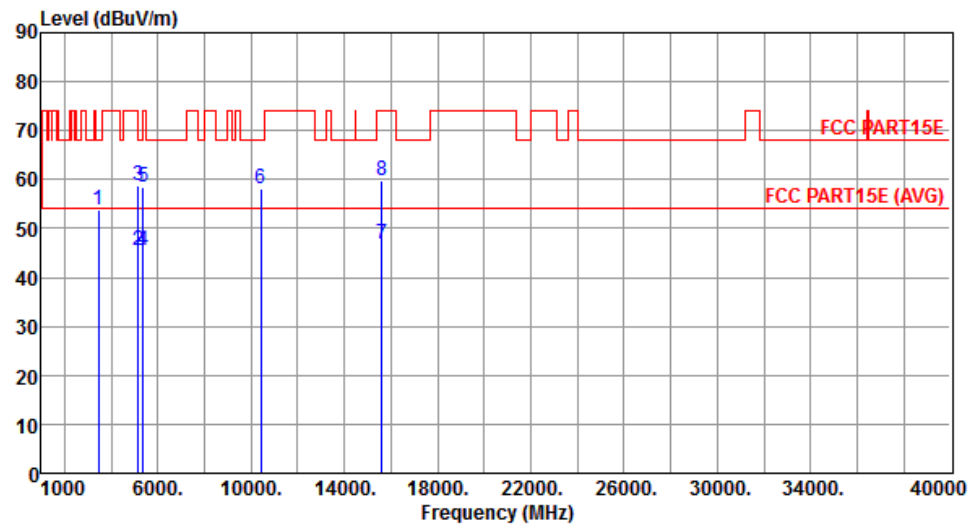


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.66	53.96	68.20	-14.24	53.10	0.86	Peak	100	351
2	5150.00	45.41	54.00	-8.59	40.39	5.02	Average	132	136
3	5150.00	58.82	74.00	-15.18	53.80	5.02	Peak	132	136
4	5350.00	45.60	54.00	-8.40	40.29	5.31	Average	132	136
5	5350.00	58.51	74.00	-15.49	53.20	5.31	Peak	132	136
6	10400.00	58.11	68.20	-10.09	44.34	13.77	Peak	100	291
7	15600.00	46.74	54.00	-7.26	31.80	14.94	Average	100	342
8	15600.00	59.83	74.00	-14.17	44.89	14.94	Peak	100	342

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

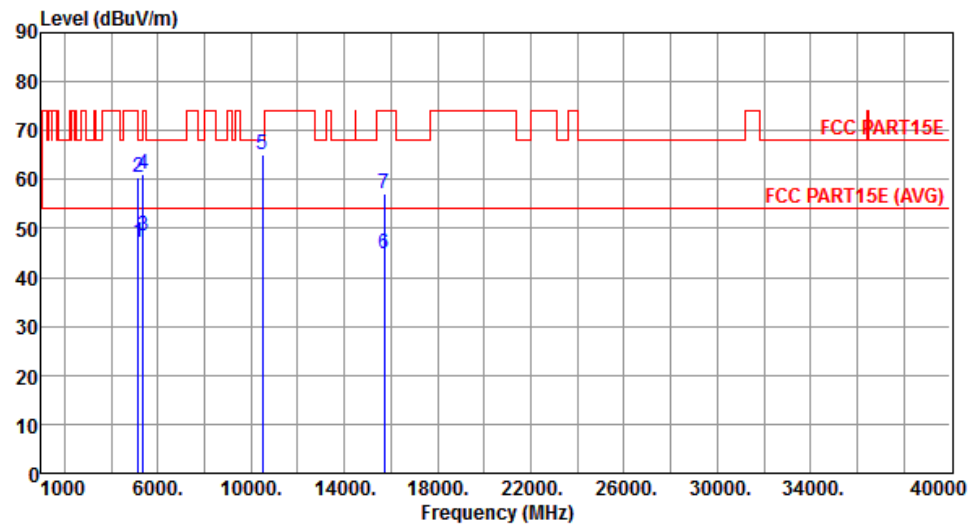


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.10	54.00	-6.90	42.08	5.02	Average	149	339
2	5150.00	60.36	74.00	-13.64	55.34	5.02	Peak	149	339
3	5350.00	48.32	54.00	-5.68	43.01	5.31	Average	149	339
4	5350.00	61.20	74.00	-12.80	55.89	5.31	Peak	149	339
5	10480.00	65.08	68.20	-3.12	51.27	13.81	Peak	193	45
6	15720.00	44.75	54.00	-9.25	29.84	14.91	Average	100	25
7	15720.00	57.01	74.00	-16.99	42.10	14.91	Peak	100	25

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

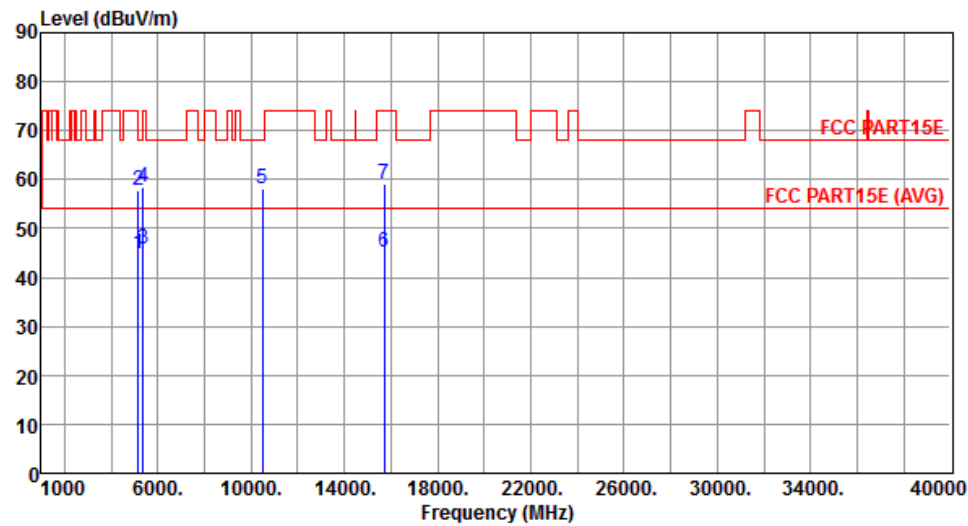


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5150.00	44.97	54.00	-9.03	39.95	5.02	Average	132	135
2	5150.00	57.63	74.00	-16.37	52.61	5.02	Peak	132	135
3	5350.00	45.79	54.00	-8.21	40.48	5.31	Average	132	135
4	5350.00	58.37	74.00	-15.63	53.06	5.31	Peak	132	135
5	10480.00	58.16	68.20	-10.04	44.35	13.81	Peak	100	290
6	15720.00	45.25	54.00	-8.75	30.34	14.91	Average	100	341
7	15720.00	59.15	74.00	-14.85	44.24	14.91	Peak	100	341

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		

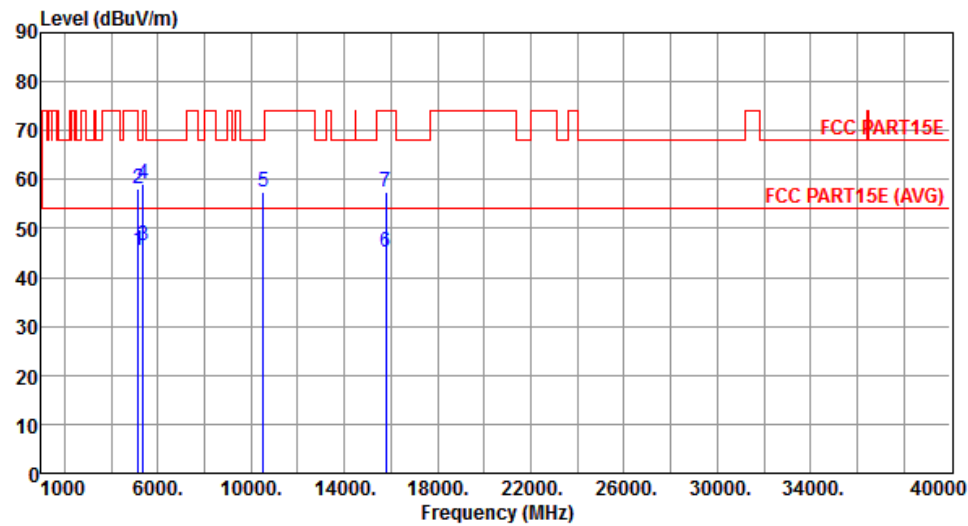


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.40	54.00	-8.60	40.38	5.02	Average	141	345
2	5150.00	58.26	74.00	-15.74	53.24	5.02	Peak	141	345
3	5350.00	46.64	54.00	-7.36	41.33	5.31	Average	141	345
4	5350.00	59.03	74.00	-14.97	53.72	5.31	Peak	141	345
5	10520.00	57.59	68.20	-10.61	43.75	13.84	Peak	195	50
6	15780.00	45.01	54.00	-8.99	30.14	14.87	Average	100	332
7	15780.00	57.30	74.00	-16.70	42.43	14.87	Peak	100	332

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Vertical		

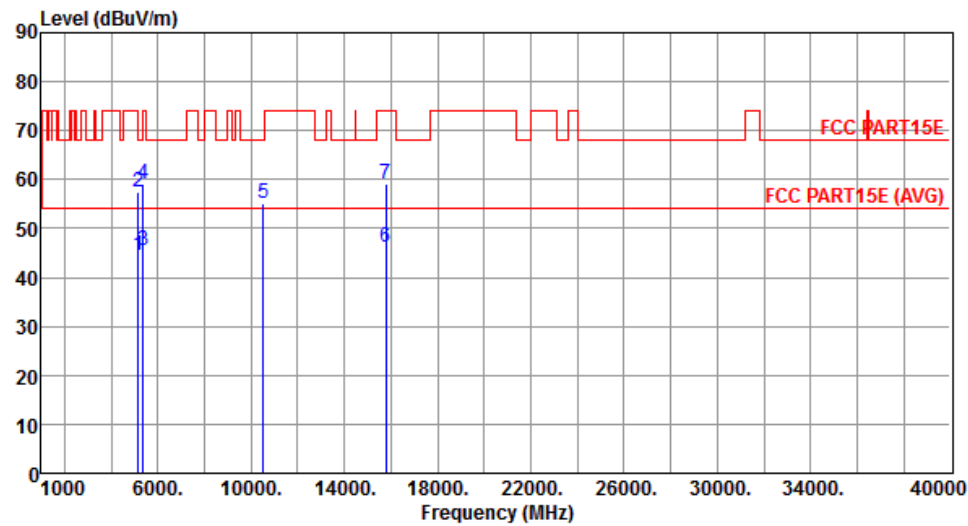


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.58	54.00	-9.42	39.56	5.02	Average	130	115
2	5150.00	57.50	74.00	-16.50	52.48	5.02	Peak	130	115
3	5350.00	45.53	54.00	-8.47	40.22	5.31	Average	130	115
4	5350.00	59.09	74.00	-14.91	53.78	5.31	Peak	130	115
5	10520.00	55.29	68.20	-12.91	41.45	13.84	Peak	170	292
6	15780.00	46.15	54.00	-7.85	31.28	14.87	Average	100	335
7	15780.00	59.26	74.00	-14.74	44.39	14.87	Peak	100	335

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Horizontal		

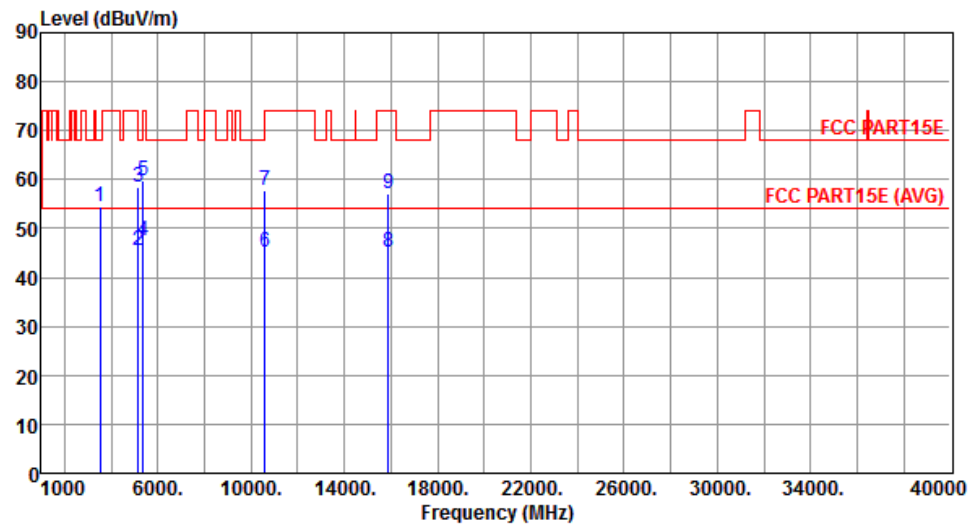


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3533.00	54.46	68.20	-13.74	53.44	1.02	Peak	100	21
2	5150.00	45.56	54.00	-8.44	40.54	5.02	Average	142	347
3	5150.00	58.44	74.00	-15.56	53.42	5.02	Peak	142	347
4	5350.00	47.56	54.00	-6.44	42.25	5.31	Average	142	347
5	5350.00	59.91	74.00	-14.09	54.60	5.31	Peak	142	347
6	10600.00	45.25	54.00	-8.75	31.33	13.92	Average	196	48
7	10600.00	57.67	74.00	-16.33	43.75	13.92	Peak	196	48
8	15900.00	45.15	54.00	-8.85	30.31	14.84	Average	100	336
9	15900.00	57.09	74.00	-16.91	42.25	14.84	Peak	100	336

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Vertical		

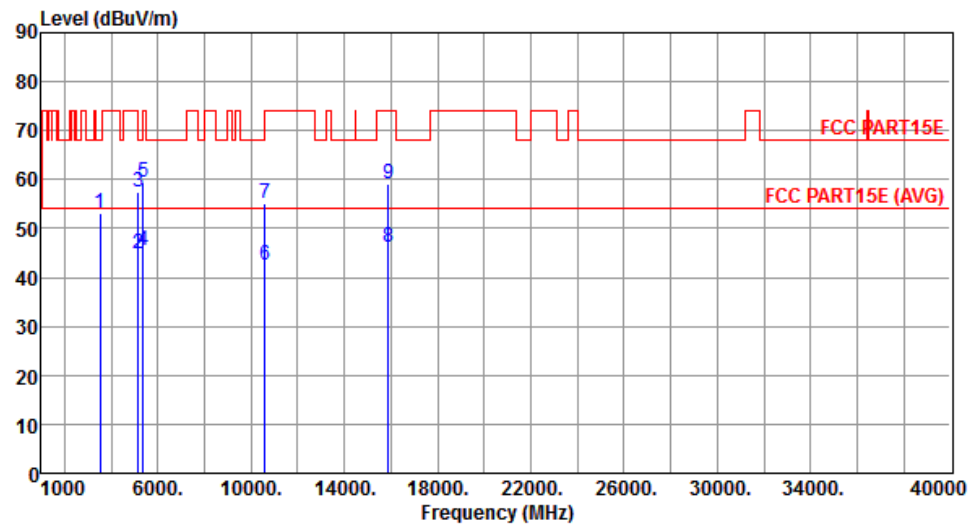


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3533.00	53.23	68.20	-14.97	52.21	1.02	Peak	100	308
2	5150.00	44.81	54.00	-9.19	39.79	5.02	Average	132	116
3	5150.00	57.39	74.00	-16.61	52.37	5.02	Peak	132	116
4	5350.00	45.61	54.00	-8.39	40.30	5.31	Average	132	116
5	5350.00	59.34	74.00	-14.66	54.03	5.31	Peak	132	116
6	10600.00	42.51	54.00	-11.49	28.59	13.92	Average	171	295
7	10600.00	55.23	74.00	-18.77	41.31	13.92	Peak	171	295
8	15900.00	46.22	54.00	-7.78	31.38	14.84	Average	100	337
9	15900.00	59.11	74.00	-14.89	44.27	14.84	Peak	100	337

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		

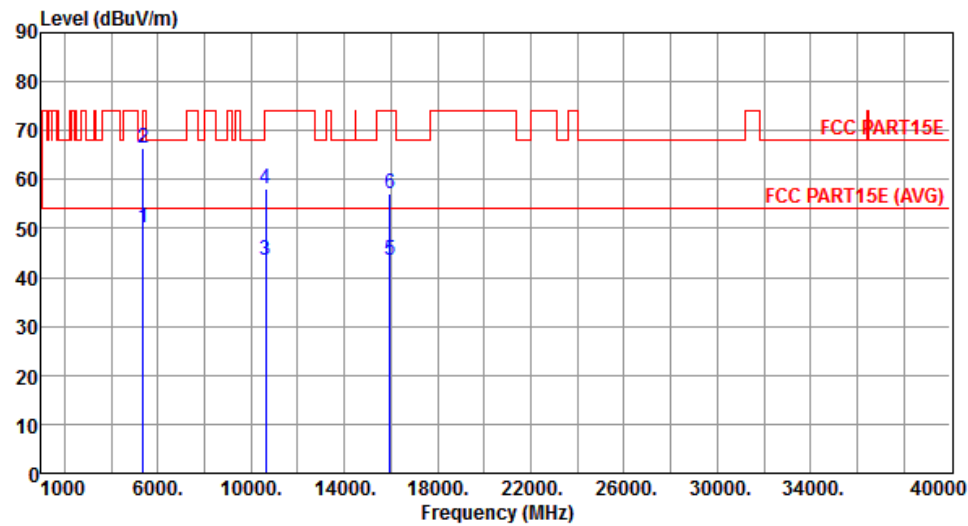


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	49.99	54.00	-4.01	44.68	5.31	Average	146	338
2	5350.00	66.59	74.00	-7.41	61.28	5.31	Peak	146	338
3	10640.00	43.51	54.00	-10.49	29.55	13.96	Average	222	50
4	10640.00	58.19	74.00	-15.81	44.23	13.96	Peak	222	50
5	15960.00	43.37	54.00	-10.63	28.56	14.81	Average	100	333
6	15960.00	57.25	74.00	-16.75	42.44	14.81	Peak	100	333

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Vertical		

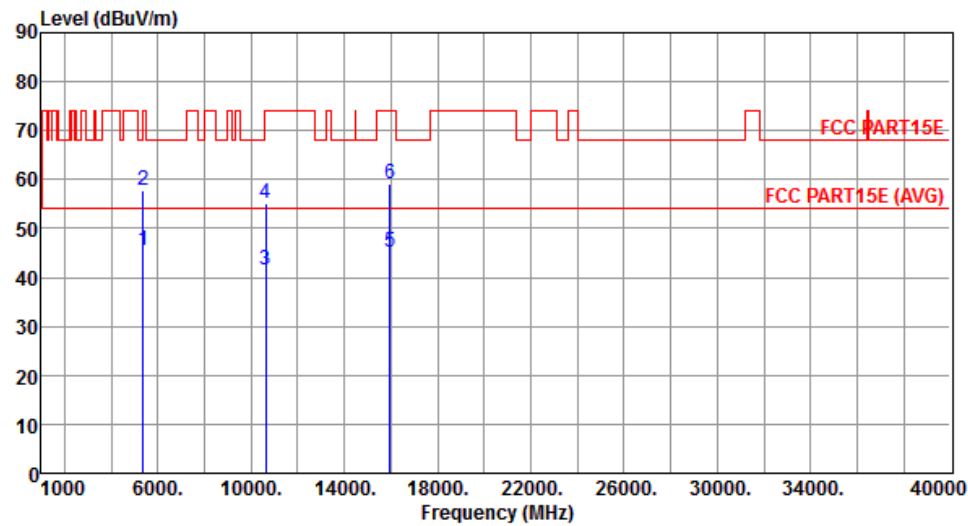


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	45.63	54.00	-8.37	40.32	5.31	Average	143	67
2	5350.00	57.75	74.00	-16.25	52.44	5.31	Peak	143	67
3	10640.00	41.50	54.00	-12.50	27.54	13.96	Average	148	299
4	10640.00	55.06	74.00	-18.94	41.10	13.96	Peak	148	299
5	15960.00	45.05	54.00	-8.95	30.24	14.81	Average	100	330
6	15960.00	59.08	74.00	-14.92	44.27	14.81	Peak	100	330

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		

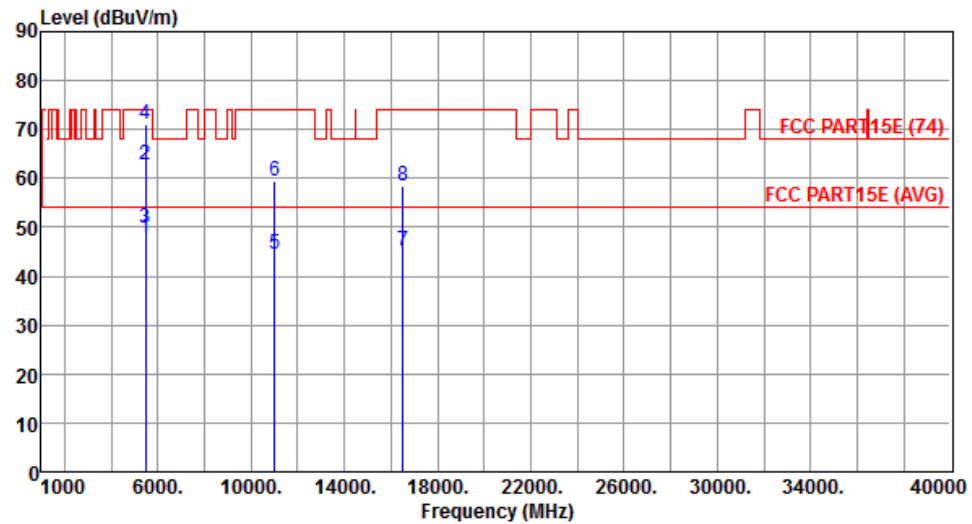


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.76	54.00	-6.24	42.30	5.46	Average	145	349
2	5460.00	62.86	74.00	-11.14	57.40	5.46	Peak	145	349
3	5470.00	49.70	54.00	-4.30	44.23	5.47	Average	145	349
4	5470.00	70.98	74.00	-3.02	65.51	5.47	Peak	145	349
5	11000.00	44.61	54.00	-9.39	30.31	14.30	Average	165	40
6	11000.00	59.61	74.00	-14.39	45.31	14.30	Peak	165	40
7	16500.00	45.15	54.00	-8.85	29.31	15.84	Average	100	333
8	16500.00	58.39	74.00	-15.61	42.55	15.84	Peak	100	333

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Vertical		

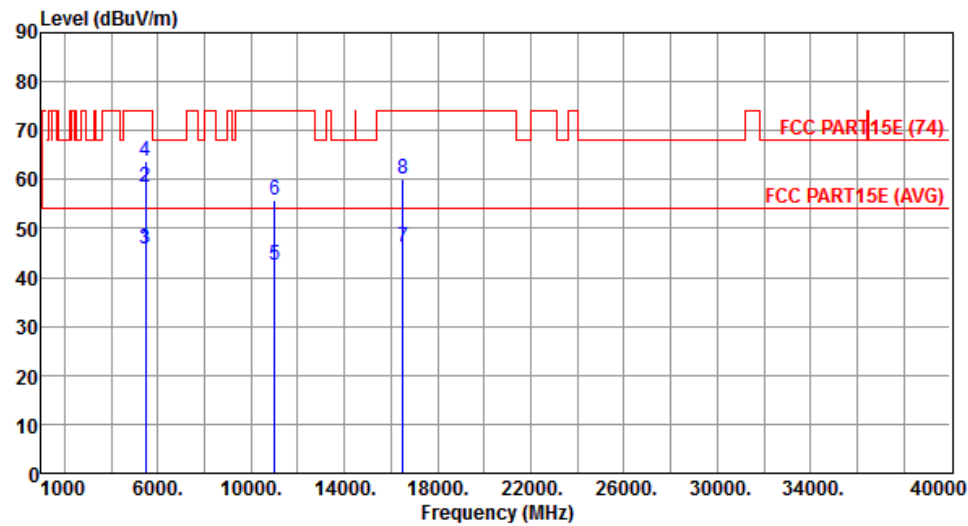


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.68	54.00	-8.32	40.22	5.46	Average	137	78
2	5460.00	58.51	74.00	-15.49	53.05	5.46	Peak	137	78
3	5470.00	45.86	54.00	-8.14	40.39	5.47	Average	137	78
4	5470.00	63.89	74.00	-10.11	58.42	5.47	Peak	137	78
5	11000.00	42.56	54.00	-11.44	28.26	14.30	Average	100	168
6	11000.00	55.83	74.00	-18.17	41.53	14.30	Peak	100	168
7	16500.00	46.26	54.00	-7.74	30.42	15.84	Average	100	321
8	16500.00	60.07	74.00	-13.93	44.23	15.84	Peak	100	321

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		

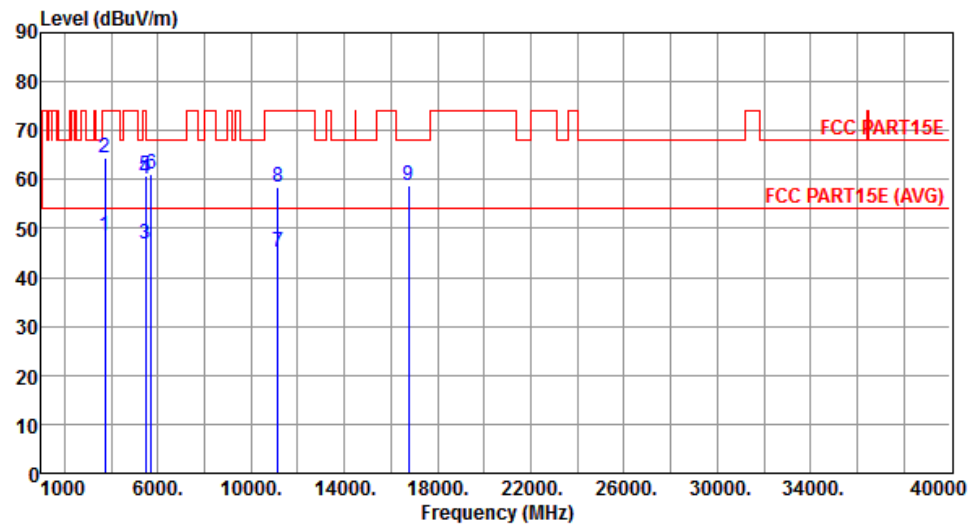


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	48.36	54.00	-5.64	46.76	1.60	Average	144	166
2	3720.00	64.30	74.00	-9.70	62.70	1.60	Peak	144	166
3	5460.00	46.98	54.00	-7.02	41.52	5.46	Average	144	340
4	5460.00	60.06	74.00	-13.94	54.60	5.46	Peak	144	340
5	5470.00	60.76	68.20	-7.44	55.29	5.47	Peak	144	340
6	5725.00	61.07	68.20	-7.13	55.26	5.81	Peak	144	340
7	11160.00	45.15	54.00	-8.85	30.71	14.44	Average	126	327
8	11160.00	58.32	74.00	-15.68	43.88	14.44	Peak	126	327
9	16740.00	58.89	68.20	-9.31	42.92	15.97	Peak	100	343

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Vertical		

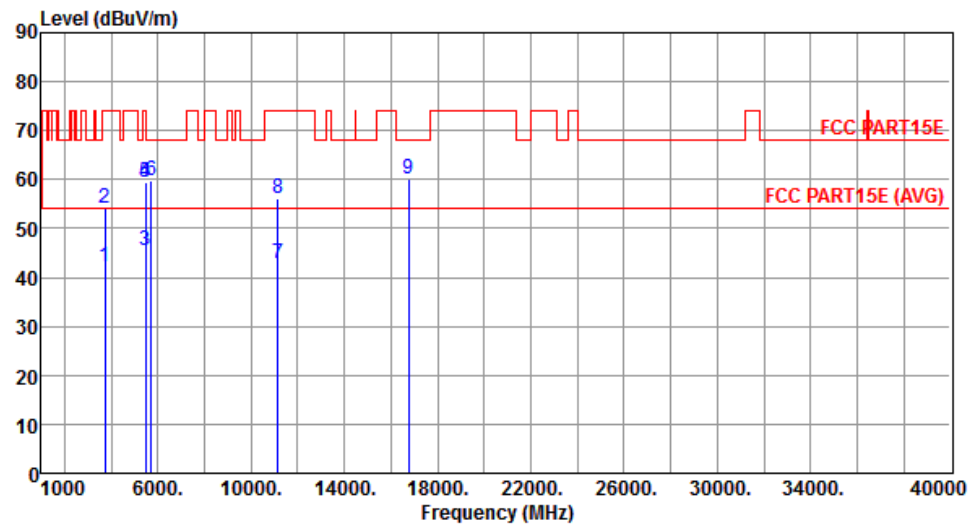


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	42.06	54.00	-11.94	40.46	1.60	Average	100	134
2	3720.00	54.01	74.00	-19.99	52.41	1.60	Peak	100	134
3	5460.00	45.62	54.00	-8.38	40.16	5.46	Average	139	78
4	5460.00	59.34	74.00	-14.66	53.88	5.46	Peak	139	78
5	5470.00	59.43	68.20	-8.77	53.96	5.47	Peak	139	78
6	5725.00	59.69	68.20	-8.51	53.88	5.81	Peak	139	78
7	11160.00	43.00	54.00	-11.00	28.56	14.44	Average	150	292
8	11160.00	55.99	74.00	-18.01	41.55	14.44	Peak	150	292
9	16740.00	60.11	68.20	-8.09	44.14	15.97	Peak	100	328

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

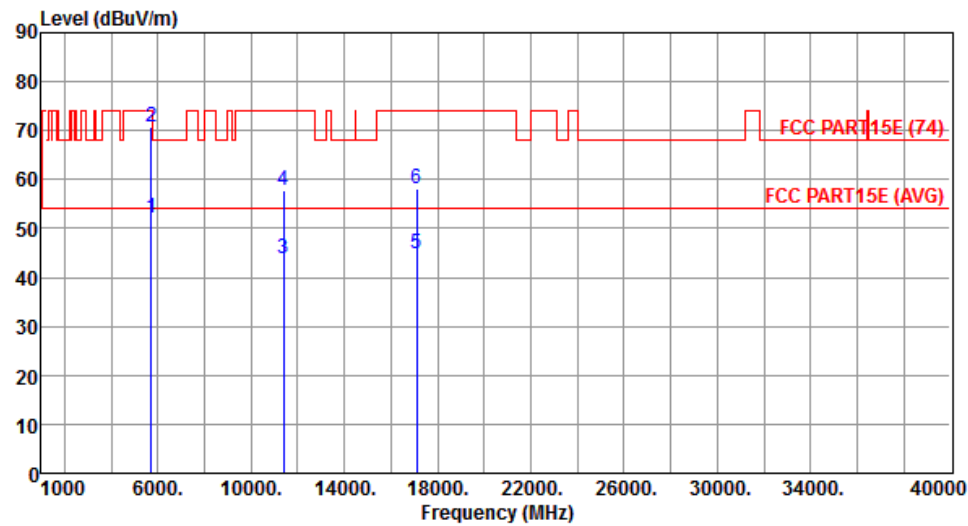


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	51.98	54.00	-2.02	46.17	5.81	Average	137	350
2	5725.00	70.88	74.00	-3.12	65.07	5.81	Peak	137	350
3	11400.00	43.90	54.00	-10.10	29.25	14.65	Average	201	43
4	11400.00	57.92	74.00	-16.08	43.27	14.65	Peak	201	43
5	17100.00	44.67	54.00	-9.33	28.16	16.51	Average	100	345
6	17100.00	58.06	74.00	-15.94	41.55	16.51	Peak	100	345

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Vertical		

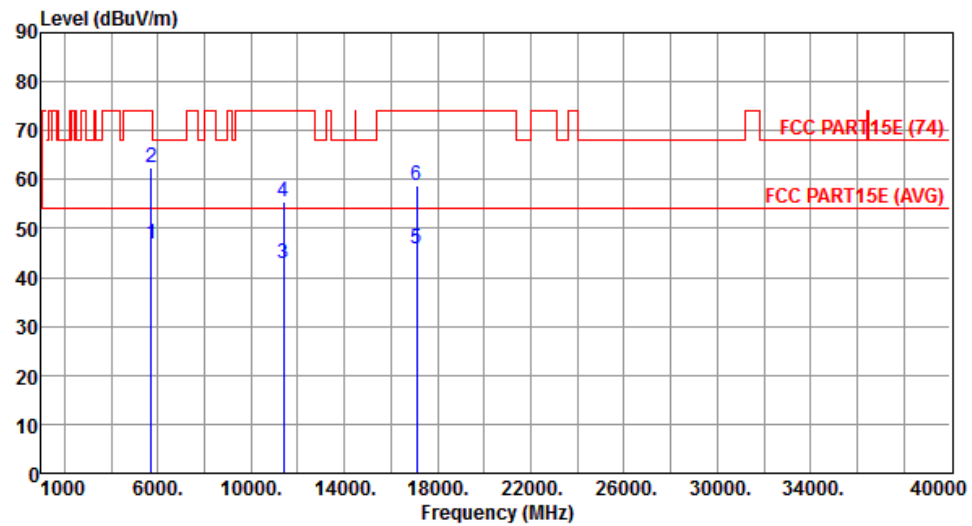


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	46.67	54.00	-7.33	40.86	5.81	Average	139	68
2	5725.00	62.51	74.00	-11.49	56.70	5.81	Peak	139	68
3	11400.00	42.88	54.00	-11.12	28.23	14.65	Average	100	168
4	11400.00	55.37	74.00	-18.63	40.72	14.65	Peak	100	168
5	17100.00	45.89	54.00	-8.11	29.38	16.51	Average	100	320
6	17100.00	58.67	74.00	-15.33	42.16	16.51	Peak	100	320

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		

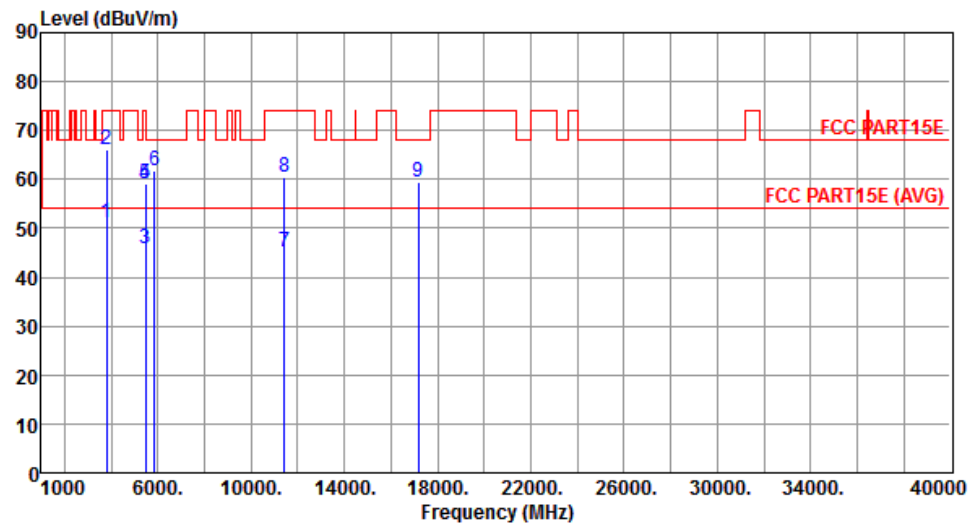


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	51.07	54.00	-2.93	49.17	1.90	Average	202	200
2	3813.33	65.97	74.00	-8.03	64.07	1.90	Peak	202	200
3	5460.00	45.69	54.00	-8.31	40.23	5.46	Average	133	345
4	5460.00	59.08	74.00	-14.92	53.62	5.46	Peak	133	345
5	5470.00	59.27	68.20	-8.93	53.80	5.47	Peak	133	345
6	5850.00	61.72	68.20	-6.48	55.73	5.99	Peak	133	345
7	11440.00	45.32	54.00	-8.68	30.63	14.69	Average	190	42
8	11440.00	60.44	74.00	-13.56	45.75	14.69	Peak	190	42
9	17160.00	59.43	68.20	-8.77	42.67	16.76	Peak	100	344

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Vertical		

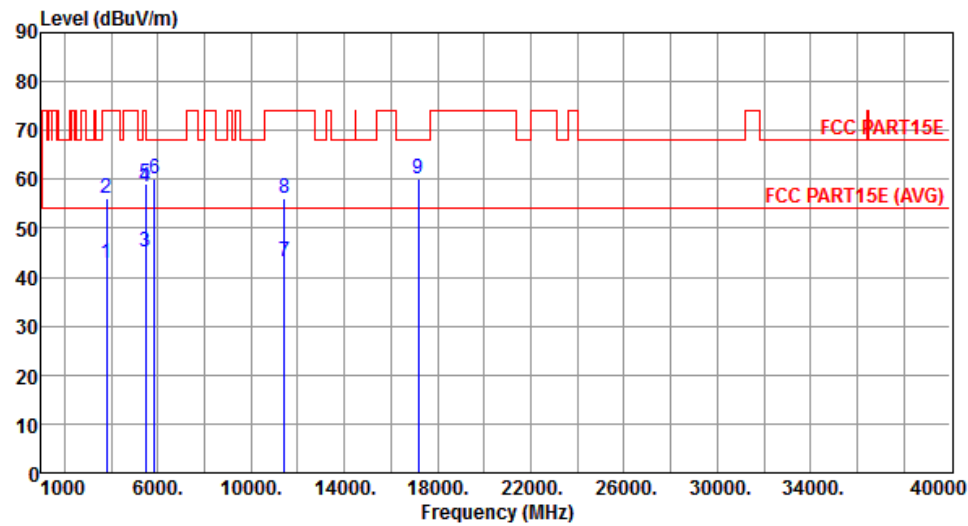


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	42.88	54.00	-11.12	40.98	1.90	Average	151	258
2	3813.33	56.13	74.00	-17.87	54.23	1.90	Peak	151	258
3	5460.00	45.02	54.00	-8.98	39.56	5.46	Average	192	113
4	5460.00	58.61	74.00	-15.39	53.15	5.46	Peak	192	113
5	5470.00	58.95	68.20	-9.25	53.48	5.47	Peak	192	113
6	5850.00	60.17	68.20	-8.03	54.18	5.99	Peak	192	113
7	11440.00	43.22	54.00	-10.78	28.53	14.69	Average	152	296
8	11440.00	56.16	74.00	-17.84	41.47	14.69	Peak	152	296
9	17160.00	60.20	68.20	-8.00	43.44	16.76	Peak	100	312

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

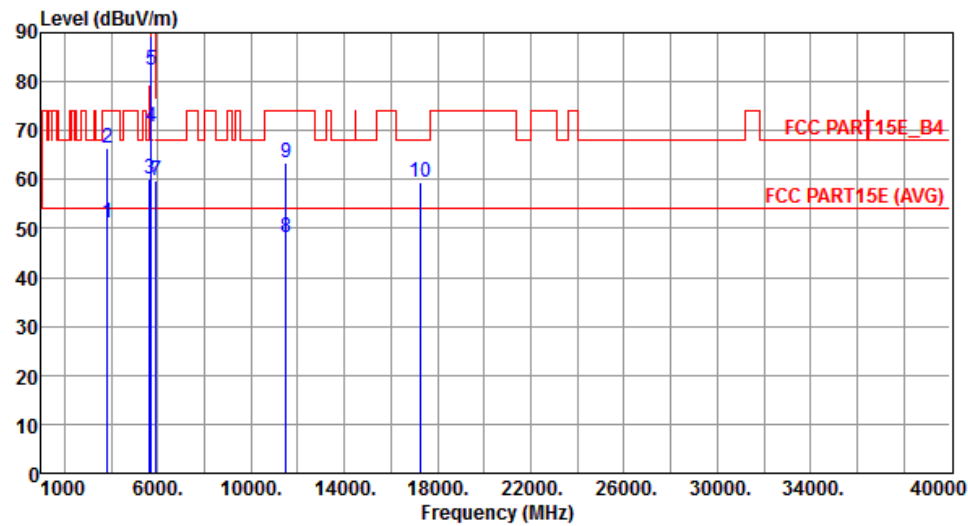


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	51.25	54.00	-2.75	49.29	1.96	Average	190	204
2	3830.00	66.36	74.00	-7.64	64.40	1.96	Peak	190	204
3	5650.00	60.13	68.20	-8.07	54.44	5.69	Peak	139	340
4	5700.00	70.78	105.20	-34.42	65.01	5.77	Peak	139	340
5	5720.00	82.46	110.80	-28.34	76.67	5.79	Peak	139	340
6	5725.00	89.33	122.20	-32.87	83.52	5.81	Peak	139	340
7	5925.00	59.75	68.20	-8.45	53.66	6.09	Peak	139	340
8	11490.00	48.29	54.00	-5.71	33.56	14.73	Average	251	333
9	11490.00	63.45	74.00	-10.55	48.72	14.73	Peak	251	333
10	17235.00	59.60	68.20	-8.60	42.53	17.07	Peak	100	42

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Vertical		

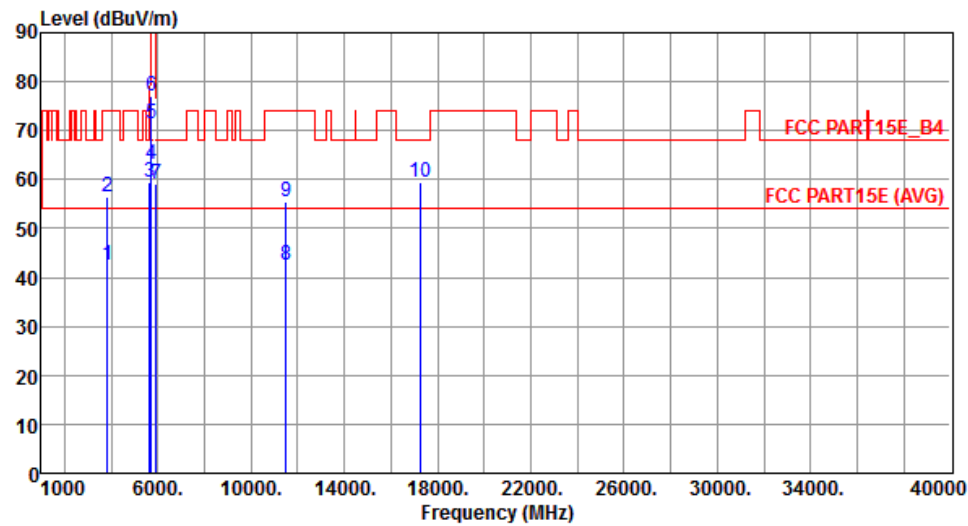


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	42.52	54.00	-11.48	40.56	1.96	Average	154	273
2	3830.00	56.37	74.00	-17.63	54.41	1.96	Peak	154	273
3	5650.00	59.46	68.20	-8.74	53.77	5.69	Peak	161	112
4	5700.00	63.09	105.20	-42.11	57.32	5.77	Peak	161	112
5	5720.00	71.25	110.80	-39.55	65.46	5.79	Peak	161	112
6	5725.00	77.03	122.20	-45.17	71.22	5.81	Peak	161	112
7	5925.00	59.23	68.20	-8.97	53.14	6.09	Peak	161	112
8	11490.00	42.66	54.00	-11.34	27.93	14.73	Average	140	18
9	11490.00	55.50	74.00	-18.50	40.77	14.73	Peak	140	18
10	17235.00	59.50	68.20	-8.70	42.43	17.07	Peak	100	15

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		

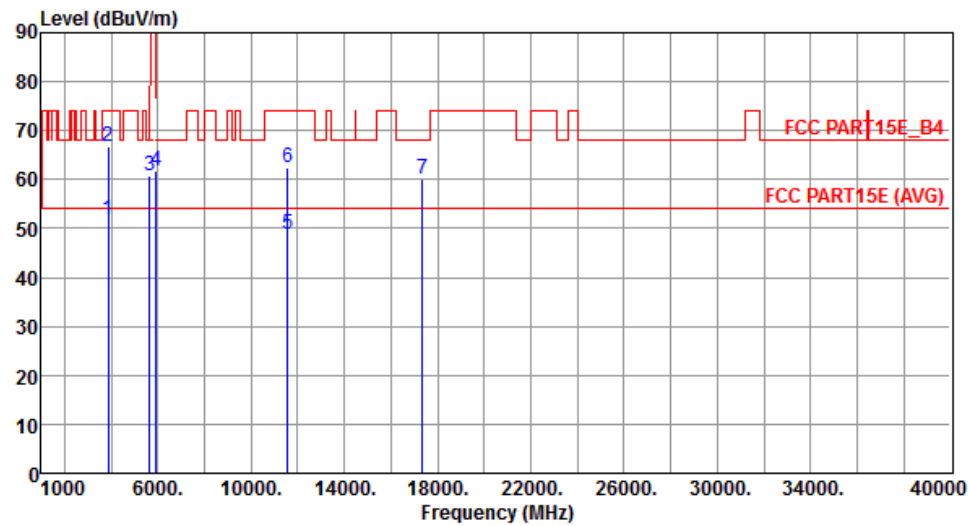


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	51.86	54.00	-2.14	49.81	2.05	Average	203	200
2	3856.66	66.68	74.00	-7.32	64.63	2.05	Peak	203	200
3	5650.00	60.90	68.20	-7.30	55.21	5.69	Peak	137	341
4	5925.00	61.81	68.20	-6.39	55.72	6.09	Peak	137	341
5	11570.00	48.72	54.00	-5.28	34.12	14.60	Average	202	343
6	11570.00	62.56	74.00	-11.44	47.96	14.60	Peak	202	343
7	17355.00	59.98	68.20	-8.22	42.43	17.55	Peak	100	44

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Vertical		

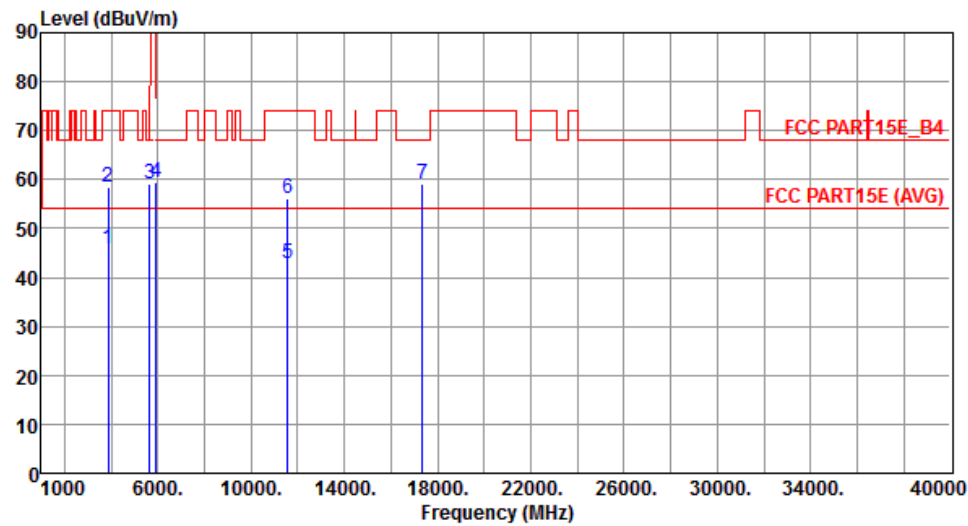


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	45.83	54.00	-8.17	43.78	2.05	Average	141	258
2	3856.66	58.61	74.00	-15.39	56.56	2.05	Peak	141	258
3	5650.00	59.13	68.20	-9.07	53.44	5.69	Peak	155	111
4	5925.00	59.46	68.20	-8.74	53.37	6.09	Peak	155	111
5	11570.00	42.72	54.00	-11.28	28.12	14.60	Average	150	23
6	11570.00	56.04	74.00	-17.96	41.44	14.60	Peak	150	23
7	17355.00	59.10	68.20	-9.10	41.55	17.55	Peak	100	10

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

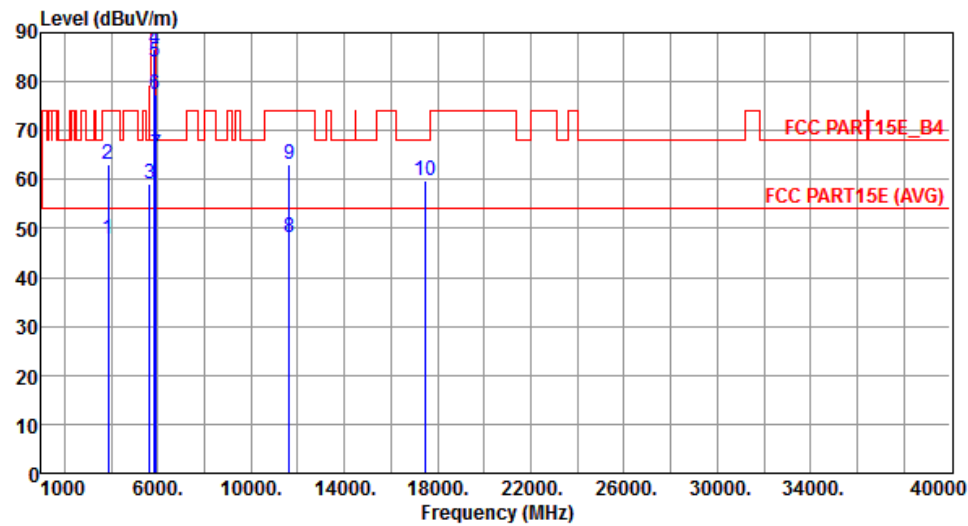

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	47.83	54.00	-6.17	45.69	2.14	Average	191	16
2	3883.33	62.94	74.00	-11.06	60.80	2.14	Peak	191	16
3	5650.00	59.24	68.20	-8.96	53.55	5.69	Peak	144	343
4	5850.00	86.79	122.20	-35.41	80.80	5.99	Peak	144	343
5	5855.00	84.06	110.80	-26.74	78.06	6.00	Peak	144	343
6	5875.00	77.51	105.20	-27.69	71.49	6.02	Peak	144	343
7	5925.00	64.95	68.20	-3.25	58.86	6.09	Peak	144	343
8	11650.00	48.12	54.00	-5.88	33.68	14.44	Average	100	200
9	11650.00	63.17	74.00	-10.83	48.73	14.44	Peak	100	200
10	17475.00	59.71	68.20	-8.49	41.67	18.04	Peak	100	56


Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

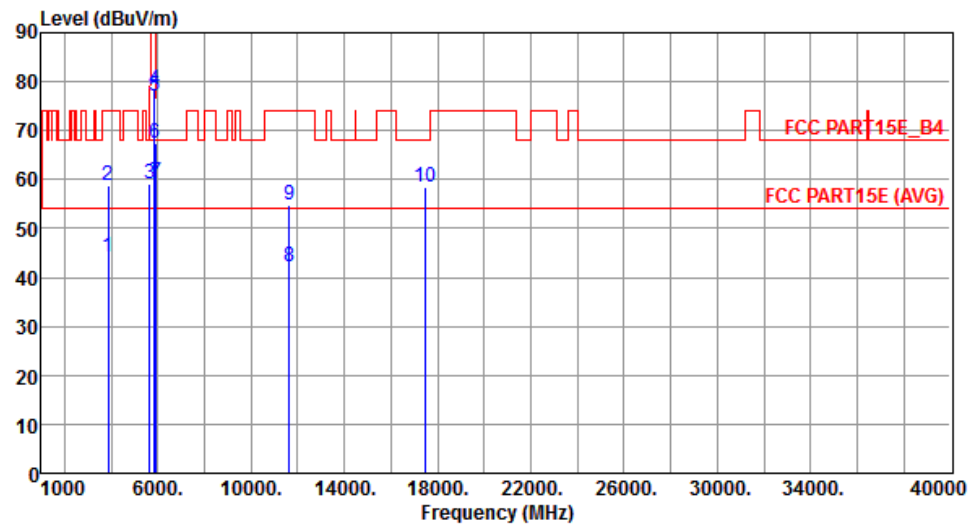

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	44.04	54.00	-9.96	41.90	2.14	Average	210	96
2	3883.33	58.70	74.00	-15.30	56.56	2.14	Peak	210	96
3	5650.00	59.13	68.20	-9.07	53.44	5.69	Peak	145	138
4	5850.00	78.21	122.20	-43.99	72.22	5.99	Peak	145	138
5	5855.00	77.12	110.80	-33.68	71.12	6.00	Peak	145	138
6	5875.00	67.34	105.20	-37.86	61.32	6.02	Peak	145	138
7	5925.00	59.54	68.20	-8.66	53.45	6.09	Peak	145	138
8	11650.00	42.09	54.00	-11.91	27.65	14.44	Average	155	22
9	11650.00	54.79	74.00	-19.21	40.35	14.44	Peak	155	22
10	17475.00	58.56	68.20	-9.64	40.52	18.04	Peak	100	6


3.5.12 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		

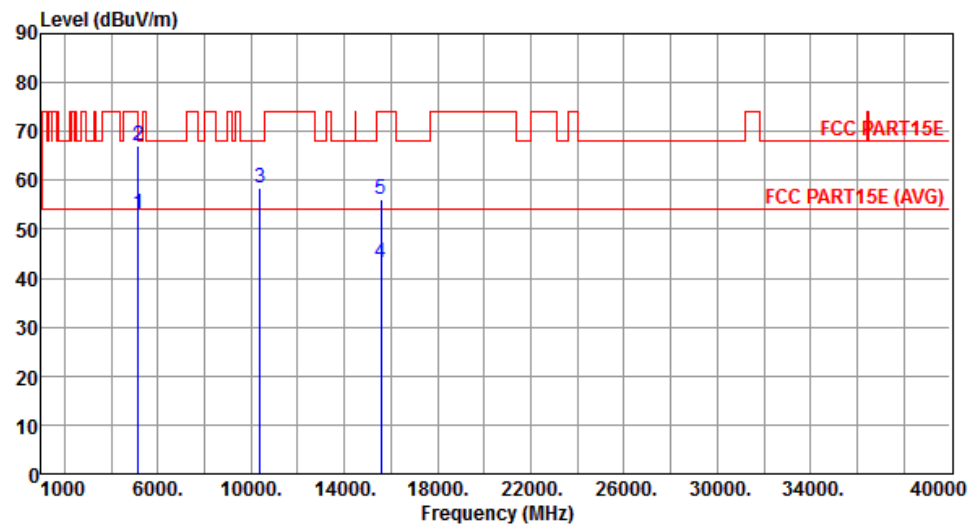


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.99	54.00	-1.01	47.97	5.02	Average	141	355
2	5150.00	67.15	74.00	-6.85	62.13	5.02	Peak	141	355
3	10380.00	58.38	68.20	-9.82	44.63	13.75	Peak	180	48
4	15570.00	43.07	54.00	-10.93	28.11	14.96	Average	100	312
5	15570.00	56.16	74.00	-17.84	41.20	14.96	Peak	100	312

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

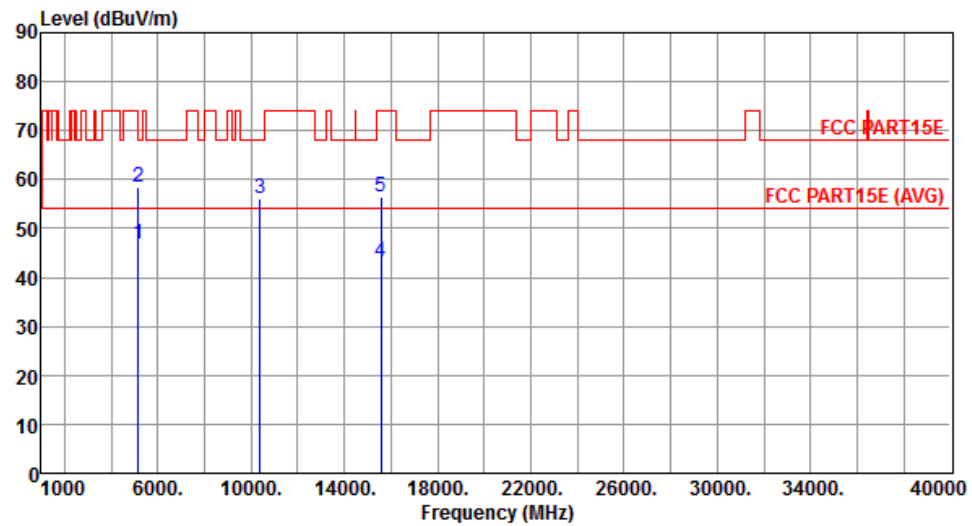


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.82	54.00	-7.18	41.80	5.02	Average	146	116
2	5150.00	58.50	74.00	-15.50	53.48	5.02	Peak	146	116
3	10380.00	56.11	68.20	-12.09	42.36	13.75	Peak	140	310
4	15570.00	43.32	54.00	-10.68	28.36	14.96	Average	100	311
5	15570.00	56.51	74.00	-17.49	41.55	14.96	Peak	100	311

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

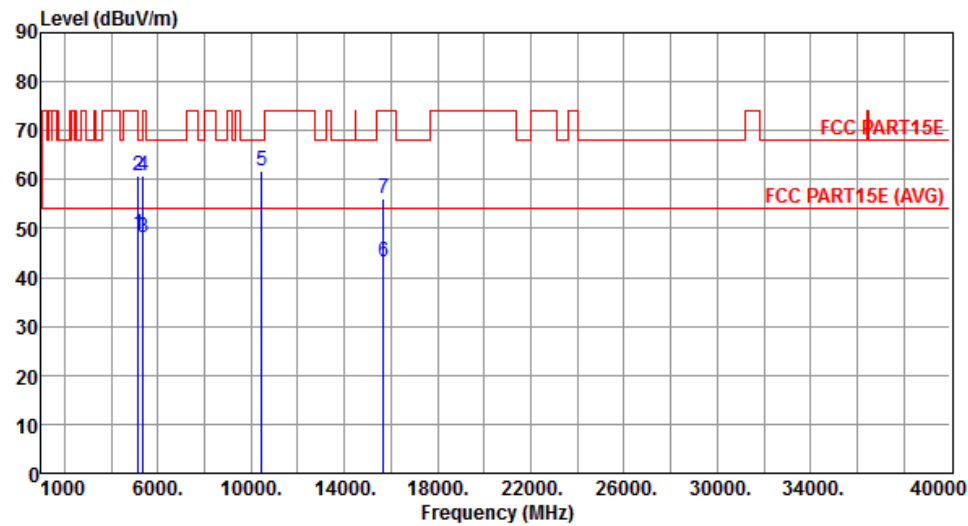


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	48.88	54.00	-5.12	43.86	5.02	Average	147	346
2	5150.00	60.80	74.00	-13.20	55.78	5.02	Peak	147	346
3	5350.00	48.23	54.00	-5.77	42.92	5.31	Average	147	346
4	5350.00	60.87	74.00	-13.13	55.56	5.31	Peak	147	346
5	10460.00	61.66	68.20	-6.54	47.87	13.79	Peak	191	53
6	15690.00	43.07	54.00	-10.93	28.15	14.92	Average	100	311
7	15690.00	56.12	74.00	-17.88	41.20	14.92	Peak	100	311

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

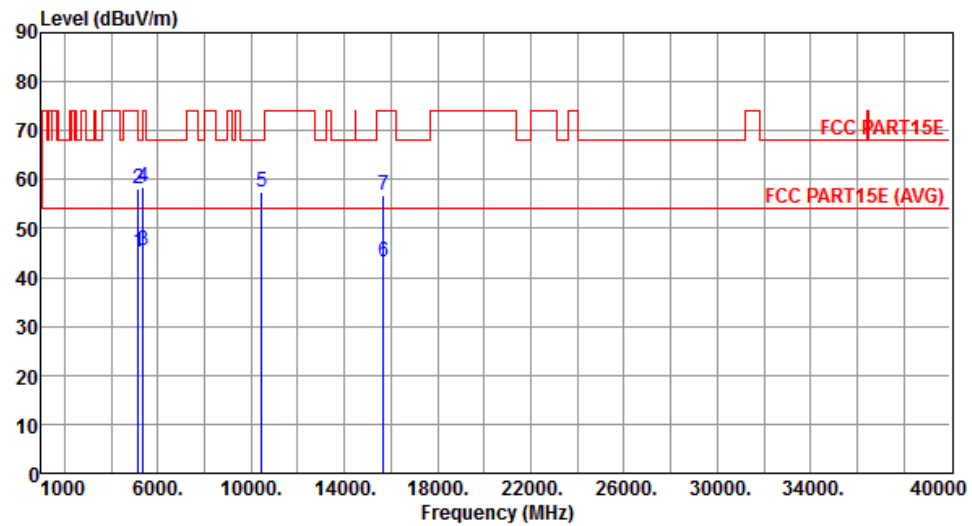


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.28	54.00	-8.72	40.26	5.02	Average	144	118
2	5150.00	58.20	74.00	-15.80	53.18	5.02	Peak	144	118
3	5350.00	45.56	54.00	-8.44	40.25	5.31	Average	144	118
4	5350.00	58.35	74.00	-15.65	53.04	5.31	Peak	144	118
5	10460.00	57.57	68.20	-10.63	43.78	13.79	Peak	141	315
6	15690.00	43.22	54.00	-10.78	28.30	14.92	Average	100	331
7	15690.00	56.69	74.00	-17.31	41.77	14.92	Peak	100	331

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		

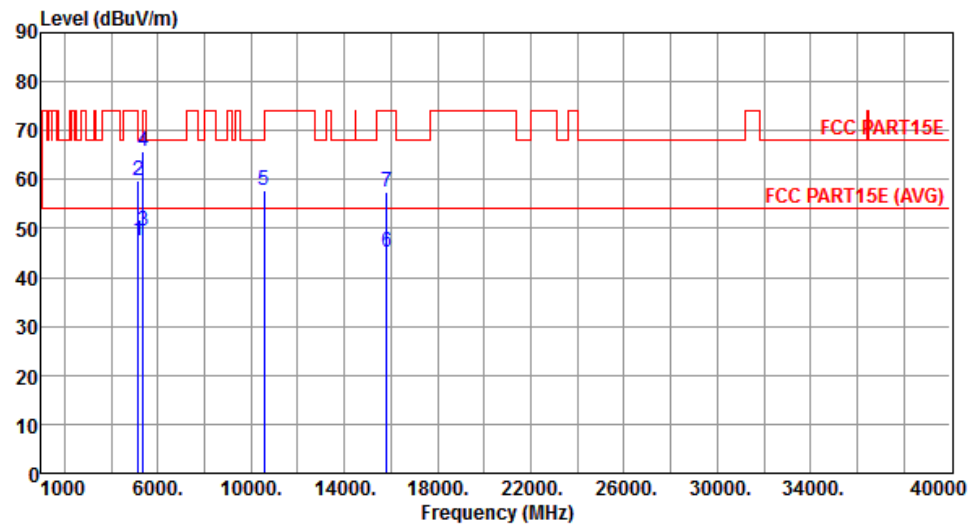


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.54	54.00	-6.46	42.52	5.02	Average	146	347
2	5150.00	59.77	74.00	-14.23	54.75	5.02	Peak	146	347
3	5350.00	49.41	54.00	-4.59	44.10	5.31	Average	146	347
4	5350.00	65.83	74.00	-8.17	60.52	5.31	Peak	146	347
5	10540.00	57.71	68.20	-10.49	43.85	13.86	Peak	199	48
6	15810.00	45.09	54.00	-8.91	30.23	14.86	Average	100	335
7	15810.00	57.41	74.00	-16.59	42.55	14.86	Peak	100	335

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Vertical		

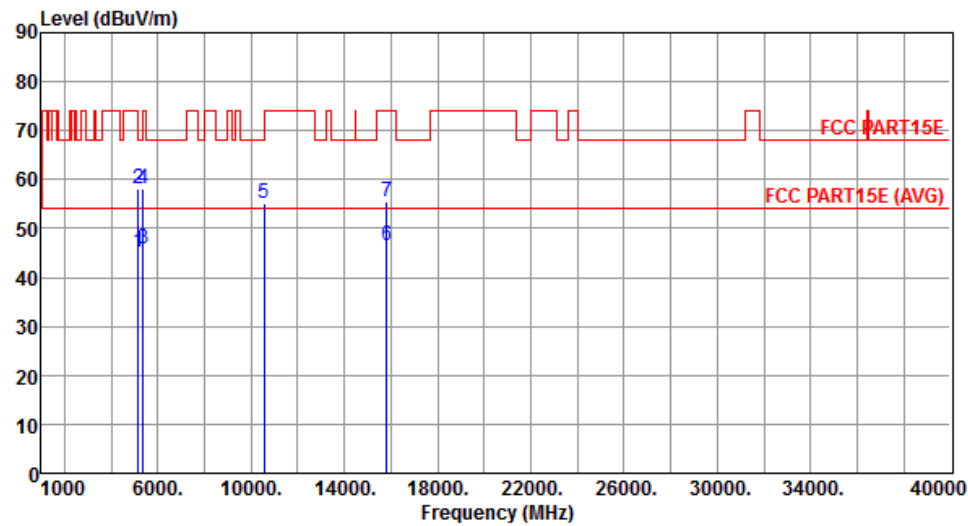


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.18	54.00	-8.82	40.16	5.02	Average	147	127
2	5150.00	58.05	74.00	-15.95	53.03	5.02	Peak	147	127
3	5350.00	45.82	54.00	-8.18	40.51	5.31	Average	147	127
4	5350.00	58.15	74.00	-15.85	52.84	5.31	Peak	147	127
5	10540.00	55.17	68.20	-13.03	41.31	13.86	Peak	165	290
6	15810.00	46.41	54.00	-7.59	31.55	14.86	Average	100	332
7	15810.00	55.58	74.00	-18.42	40.72	14.86	Peak	100	332

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		

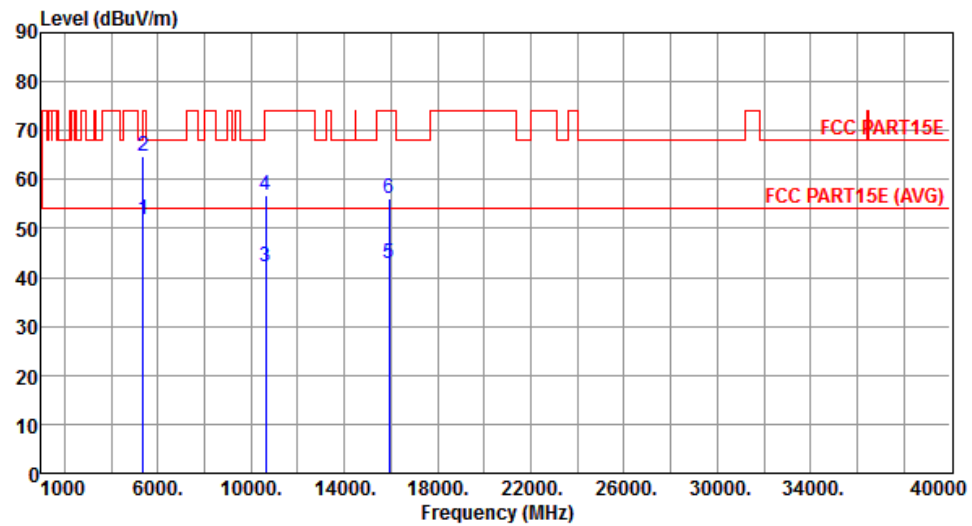


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	51.82	54.00	-2.18	46.51	5.31	Average	143	344
2	5350.00	64.83	74.00	-9.17	59.52	5.31	Peak	143	344
3	10620.00	42.10	54.00	-11.90	28.17	13.93	Average	221	48
4	10620.00	56.69	74.00	-17.31	42.76	13.93	Peak	221	48
5	15930.00	42.95	54.00	-11.05	28.13	14.82	Average	100	331
6	15930.00	56.29	74.00	-17.71	41.47	14.82	Peak	100	331

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Vertical		

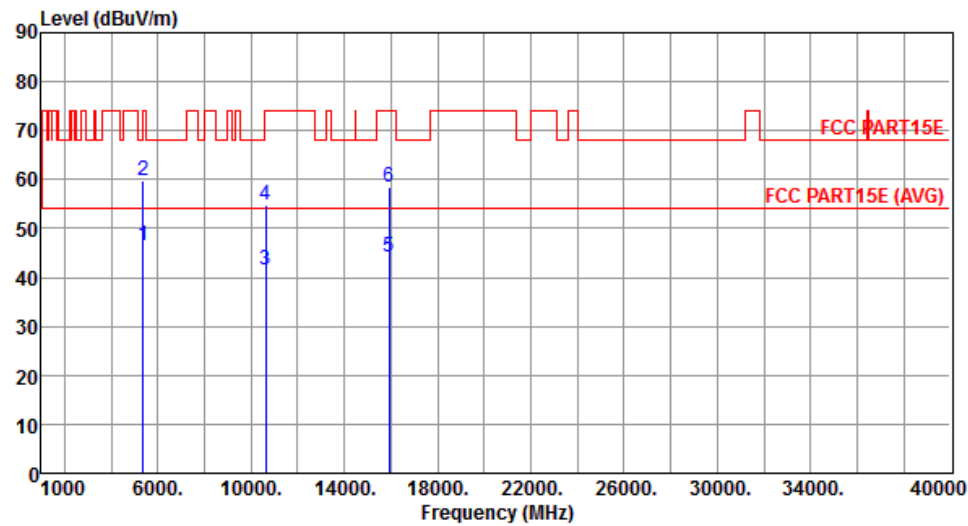


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.55	54.00	-7.45	41.24	5.31	Average	144	133
2	5350.00	59.80	74.00	-14.20	54.49	5.31	Peak	144	133
3	10620.00	41.62	54.00	-12.38	27.69	13.93	Average	100	302
4	10620.00	54.71	74.00	-19.29	40.78	13.93	Peak	100	302
5	15930.00	44.18	54.00	-9.82	29.36	14.82	Average	100	334
6	15930.00	58.55	74.00	-15.45	43.73	14.82	Peak	100	334

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		

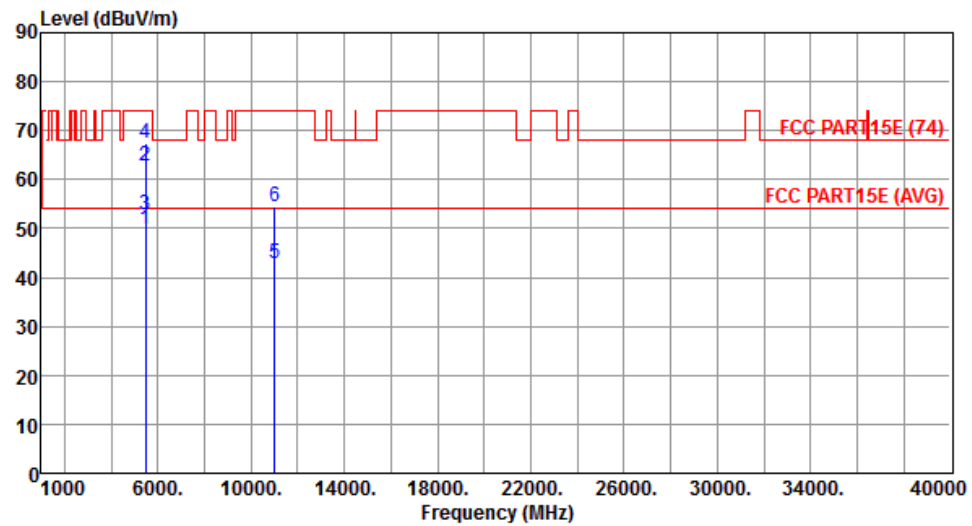


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	49.96	54.00	-4.04	44.50	5.46	Average	142	343
2	5460.00	62.68	74.00	-11.32	57.22	5.46	Peak	142	343
3	5470.00	52.84	54.00	-1.16	47.37	5.47	Average	142	343
4	5470.00	67.56	74.00	-6.44	62.09	5.47	Peak	142	343
5	11020.00	42.97	54.00	-11.03	28.65	14.32	Average	155	38
6	11020.00	54.59	74.00	-19.41	40.27	14.32	Peak	155	38

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Vertical		

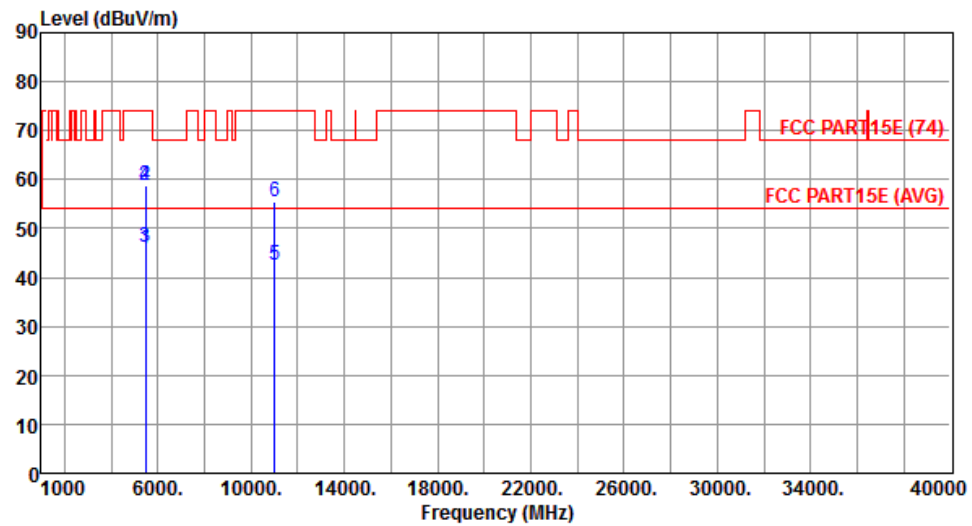


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.67	54.00	-8.33	40.21	5.46	Average	141	132
2	5460.00	58.85	74.00	-15.15	53.39	5.46	Peak	141	132
3	5470.00	46.01	54.00	-7.99	40.54	5.47	Average	141	132
4	5470.00	58.63	74.00	-15.37	53.16	5.47	Peak	141	132
5	11020.00	42.42	54.00	-11.58	28.10	14.32	Average	100	165
6	11020.00	55.56	74.00	-18.44	41.24	14.32	Peak	100	165

Modulation	VHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		

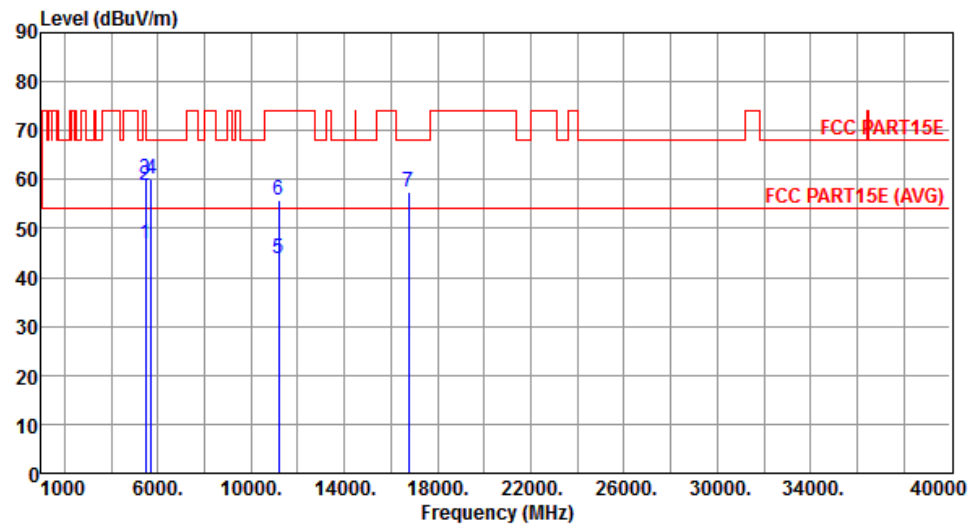


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.69	54.00	-7.31	41.23	5.46	Average	135	345
2	5460.00	58.92	74.00	-15.08	53.46	5.46	Peak	135	345
3	5470.00	60.20	68.20	-8.00	54.73	5.47	Peak	135	345
4	5725.00	60.17	68.20	-8.03	54.36	5.81	Peak	135	345
5	11180.00	43.68	54.00	-10.32	29.22	14.46	Average	148	338
6	11180.00	55.75	74.00	-18.25	41.29	14.46	Peak	148	338
7	16770.00	57.42	68.20	-10.78	41.44	15.98	Peak	100	343

Modulation	VHT40	Test Freq. (MHz)	5590
Polarization	Vertical		

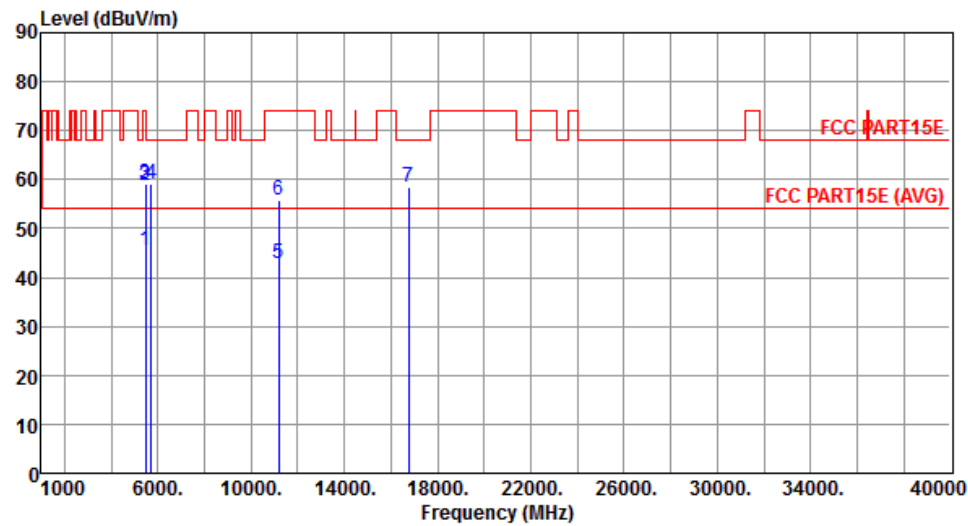


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.58	54.00	-8.42	40.12	5.46	Average	135	138
2	5460.00	58.93	74.00	-15.07	53.47	5.46	Peak	135	138
3	5470.00	59.03	68.20	-9.17	53.56	5.47	Peak	135	138
4	5725.00	59.09	68.20	-9.11	53.28	5.81	Peak	135	138
5	11180.00	42.70	54.00	-11.30	28.24	14.46	Average	145	288
6	11180.00	55.92	74.00	-18.08	41.46	14.46	Peak	145	288
7	16770.00	58.46	68.20	-9.74	42.48	15.98	Peak	100	316

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Horizontal		

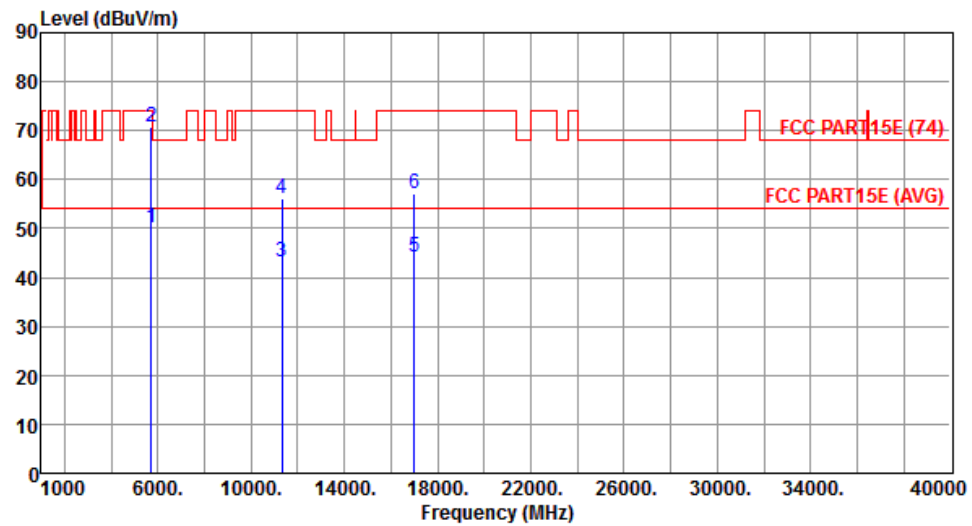


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	50.16	54.00	-3.84	44.35	5.81	Average	156	339
2	5725.00	70.73	74.00	-3.27	64.92	5.81	Peak	156	339
3	11340.00	43.04	54.00	-10.96	28.44	14.60	Average	168	45
4	11340.00	55.98	74.00	-18.02	41.38	14.60	Peak	168	45
5	17010.00	44.20	54.00	-9.80	28.05	16.15	Average	100	342
6	17010.00	57.28	74.00	-16.72	41.13	16.15	Peak	100	342

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Vertical		

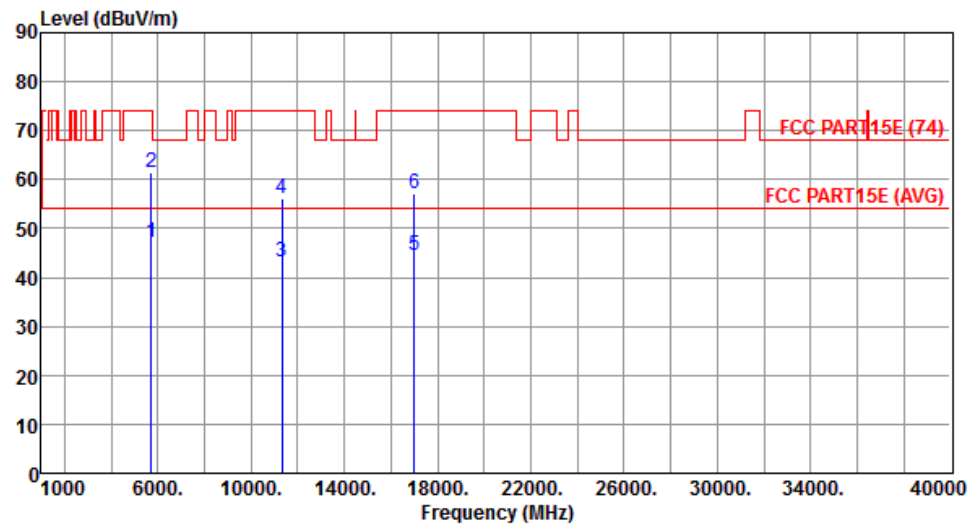


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	47.02	54.00	-6.98	41.21	5.81	Average	155	141
2	5725.00	61.31	74.00	-12.69	55.50	5.81	Peak	155	141
3	11340.00	43.01	54.00	-10.99	28.41	14.60	Average	100	165
4	11340.00	56.08	74.00	-17.92	41.48	14.60	Peak	100	165
5	17010.00	44.39	54.00	-9.61	28.24	16.15	Average	100	323
6	17010.00	57.20	74.00	-16.80	41.05	16.15	Peak	100	323

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		

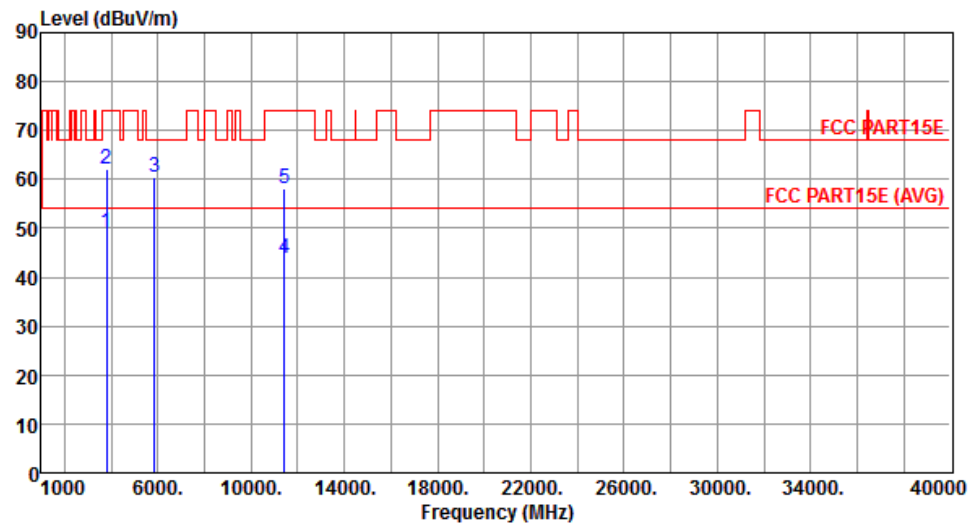


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3806.66	49.05	54.00	-4.95	47.17	1.88	Average	196	17
2	3806.66	62.00	74.00	-12.00	60.12	1.88	Peak	196	17
3	5850.00	60.53	68.20	-7.67	54.54	5.99	Peak	156	340
4	11420.00	43.83	54.00	-10.17	29.16	14.67	Average	188	41
5	11420.00	57.98	74.00	-16.02	43.31	14.67	Peak	188	41

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Vertical		

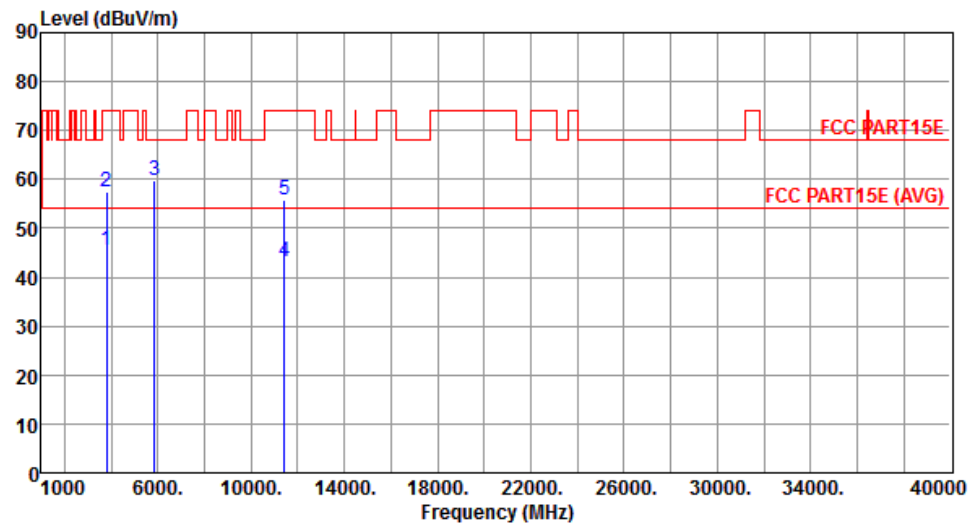


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3806.66	45.50	54.00	-8.50	43.62	1.88	Average	197	100
2	3806.66	57.38	74.00	-16.62	55.50	1.88	Peak	197	100
3	5850.00	59.81	68.20	-8.39	53.82	5.99	Peak	181	111
4	11420.00	43.29	54.00	-10.71	28.62	14.67	Average	151	295
5	11420.00	55.89	74.00	-18.11	41.22	14.67	Peak	151	295

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		

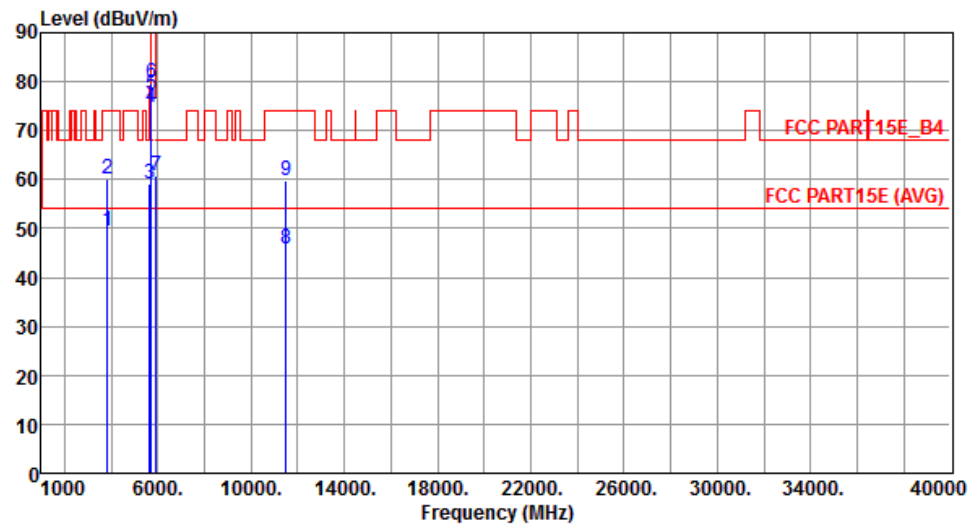


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3836.66	49.41	54.00	-4.59	47.43	1.98	Average	184	169
2	3836.66	60.26	74.00	-13.74	58.28	1.98	Peak	184	169
3	5650.00	59.24	68.20	-8.96	53.55	5.69	Peak	153	350
4	5700.00	74.75	105.20	-30.45	68.98	5.77	Peak	153	350
5	5720.00	77.35	110.80	-33.45	71.56	5.79	Peak	153	350
6	5725.00	79.67	122.20	-42.53	73.86	5.81	Peak	153	350
7	5925.00	60.68	68.20	-7.52	54.59	6.09	Peak	153	350
8	11510.00	45.85	54.00	-8.15	31.13	14.72	Average	188	342
9	11510.00	59.83	74.00	-14.17	45.11	14.72	Peak	188	342

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Vertical		

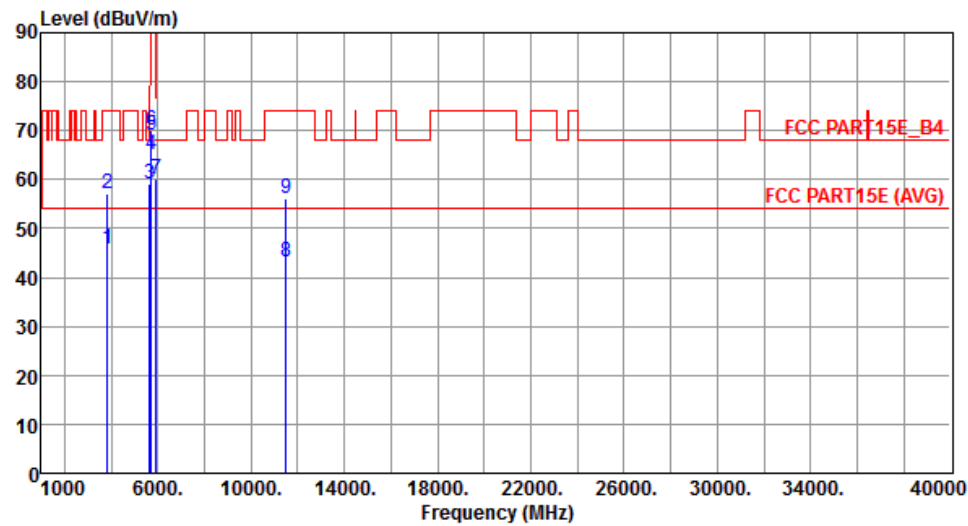


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3836.66	45.79	54.00	-8.21	43.81	1.98	Average	201	107
2	3836.66	57.09	74.00	-16.91	55.11	1.98	Peak	201	107
3	5650.00	59.15	68.20	-9.05	53.46	5.69	Peak	154	124
4	5700.00	65.09	105.20	-40.11	59.32	5.77	Peak	154	124
5	5720.00	69.09	110.80	-41.71	63.30	5.79	Peak	154	124
6	5725.00	69.94	122.20	-52.26	64.13	5.81	Peak	154	124
7	5925.00	59.96	68.20	-8.24	53.87	6.09	Peak	154	124
8	11510.00	43.07	54.00	-10.93	28.35	14.72	Average	177	162
9	11510.00	55.97	74.00	-18.03	41.25	14.72	Peak	177	162

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

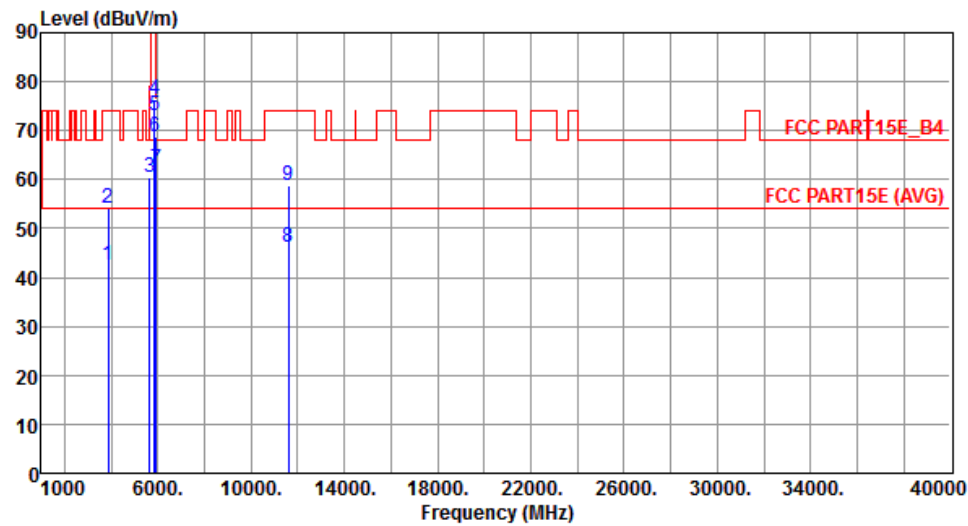

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3863.33	42.60	54.00	-11.40	40.53	2.07	Average	177	344
2	3863.33	54.08	74.00	-19.92	52.01	2.07	Peak	177	344
3	5650.00	60.52	68.20	-7.68	54.83	5.69	Peak	153	350
4	5850.00	76.23	122.20	-45.97	70.24	5.99	Peak	153	350
5	5855.00	73.11	110.80	-37.69	67.11	6.00	Peak	153	350
6	5875.00	68.68	105.20	-36.52	62.66	6.02	Peak	153	350
7	5925.00	61.98	68.20	-6.22	55.89	6.09	Peak	153	350
8	11590.00	46.09	54.00	-7.91	31.53	14.56	Average	155	341
9	11590.00	58.81	74.00	-15.19	44.25	14.56	Peak	155	341


Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

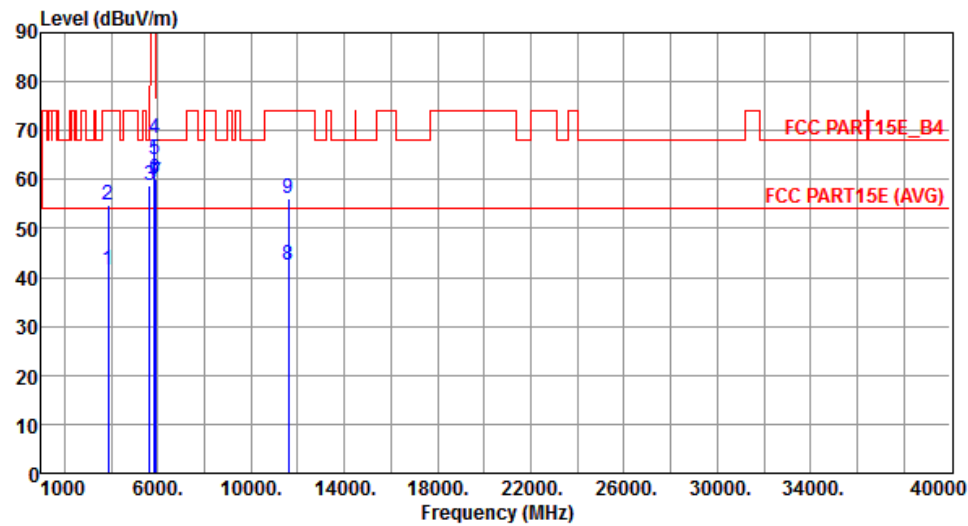

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3863.33	41.60	54.00	-12.40	39.53	2.07	Average	177	168
2	3863.33	54.67	74.00	-19.33	52.60	2.07	Peak	177	168
3	5650.00	58.90	68.20	-9.30	53.21	5.69	Peak	154	123
4	5850.00	68.30	122.20	-53.90	62.31	5.99	Peak	154	123
5	5855.00	64.21	110.80	-46.59	58.21	6.00	Peak	154	123
6	5875.00	60.17	105.20	-45.03	54.15	6.02	Peak	154	123
7	5925.00	59.41	68.20	-8.79	53.32	6.09	Peak	154	123
8	11590.00	42.61	54.00	-11.39	28.05	14.56	Average	148	18
9	11590.00	56.21	74.00	-17.79	41.65	14.56	Peak	148	18


3.5.13 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		

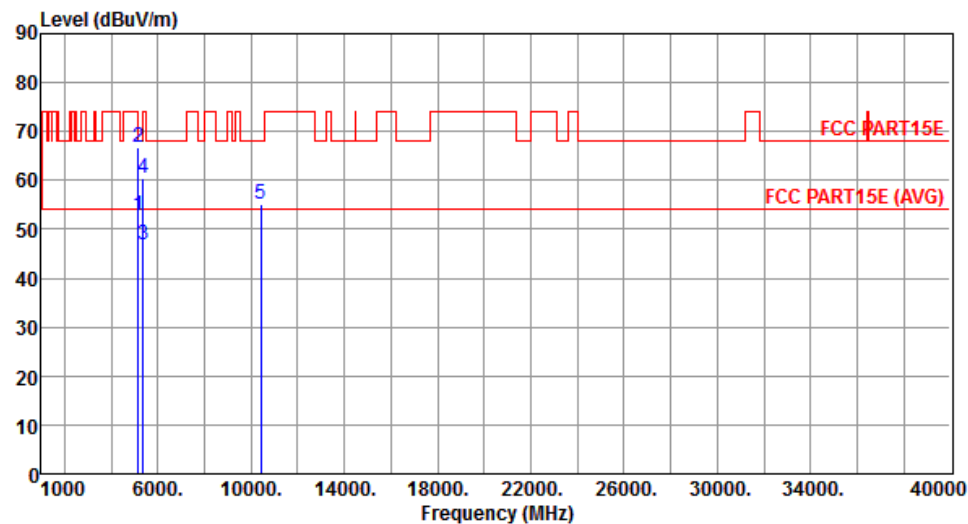


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.82	54.00	-1.18	47.80	5.02	Average	143	342
2	5150.00	66.87	74.00	-7.13	61.85	5.02	Peak	143	342
3	5350.00	46.85	54.00	-7.15	41.54	5.31	Average	143	342
4	5350.00	60.41	74.00	-13.59	55.10	5.31	Peak	143	342
5	10420.00	55.15	68.20	-13.05	41.37	13.78	Peak	176	46

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

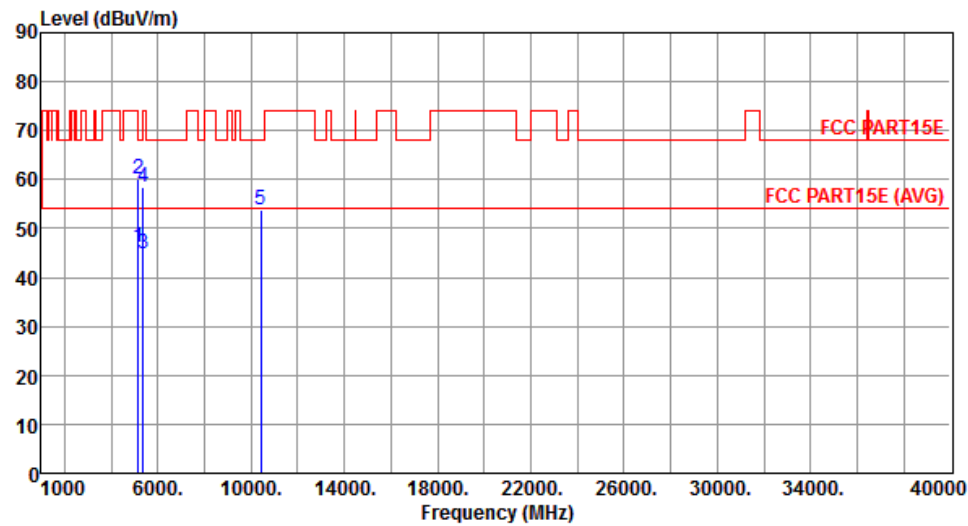


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.04	54.00	-7.96	41.02	5.02	Average	144	117
2	5150.00	60.01	74.00	-13.99	54.99	5.02	Peak	144	117
3	5350.00	44.87	54.00	-9.13	39.56	5.31	Average	144	117
4	5350.00	58.35	74.00	-15.65	53.04	5.31	Peak	144	117
5	10420.00	53.84	68.20	-14.36	40.06	13.78	Peak	135	314

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Horizontal		

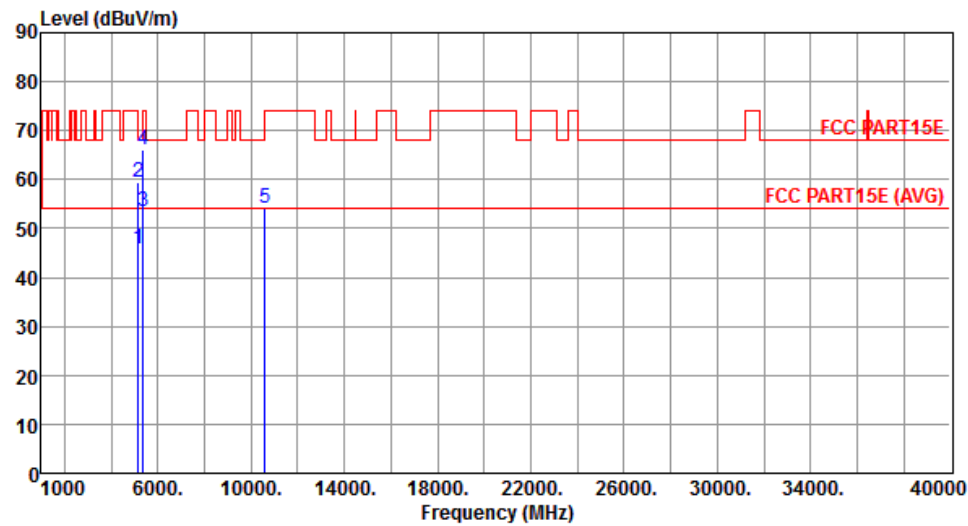


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.91	54.00	-8.09	40.89	5.02	Average	147	346
2	5150.00	59.48	74.00	-14.52	54.46	5.02	Peak	147	346
3	5350.00	53.43	54.00	-0.57	48.12	5.31	Average	147	346
4	5350.00	66.03	74.00	-7.97	60.72	5.31	Peak	147	346
5	10580.00	54.25	68.20	-13.95	40.35	13.90	Peak	185	52

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Vertical		

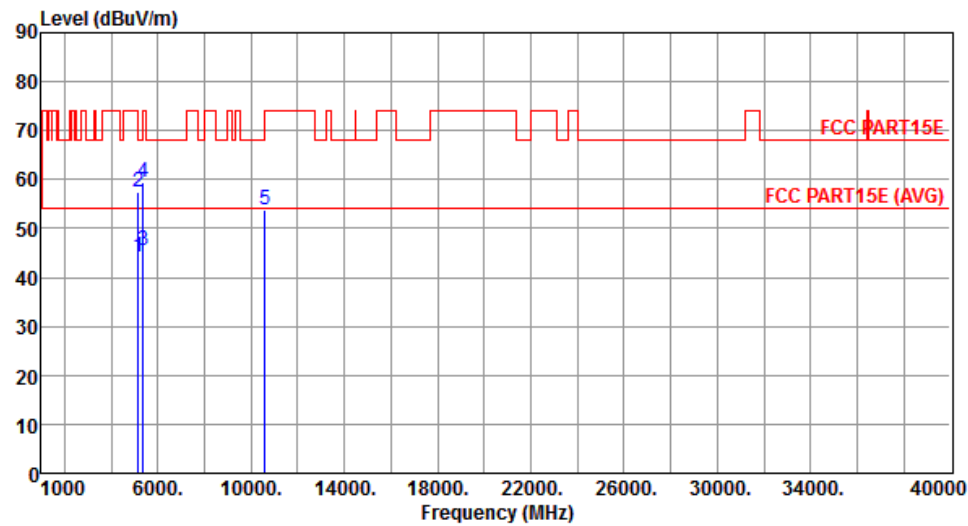


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.14	54.00	-9.86	39.12	5.02	Average	165	113
2	5150.00	57.44	74.00	-16.56	52.42	5.02	Peak	165	113
3	5350.00	45.54	54.00	-8.46	40.23	5.31	Average	165	113
4	5350.00	59.50	74.00	-14.50	54.19	5.31	Peak	165	113
5	10580.00	53.66	68.20	-14.54	39.76	13.90	Peak	161	302

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		

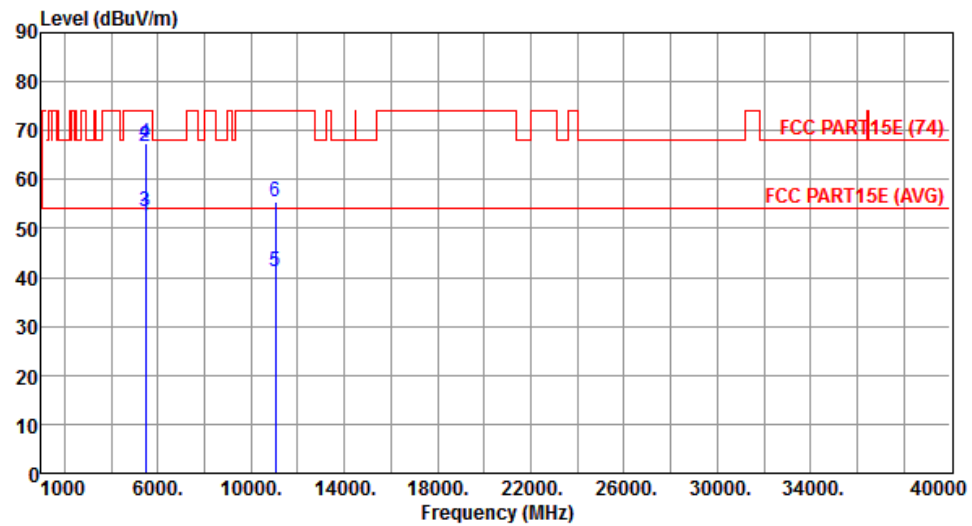


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	52.41	54.00	-1.59	46.95	5.46	Average	133	340
2	5460.00	66.66	74.00	-7.34	61.20	5.46	Peak	133	340
3	5470.00	53.37	54.00	-0.63	47.90	5.47	Average	133	340
4	5470.00	67.46	74.00	-6.54	61.99	5.47	Peak	133	340
5	11060.00	41.08	54.00	-12.92	26.73	14.35	Average	218	50
6	11060.00	55.58	74.00	-18.42	41.23	14.35	Peak	218	50

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Vertical		

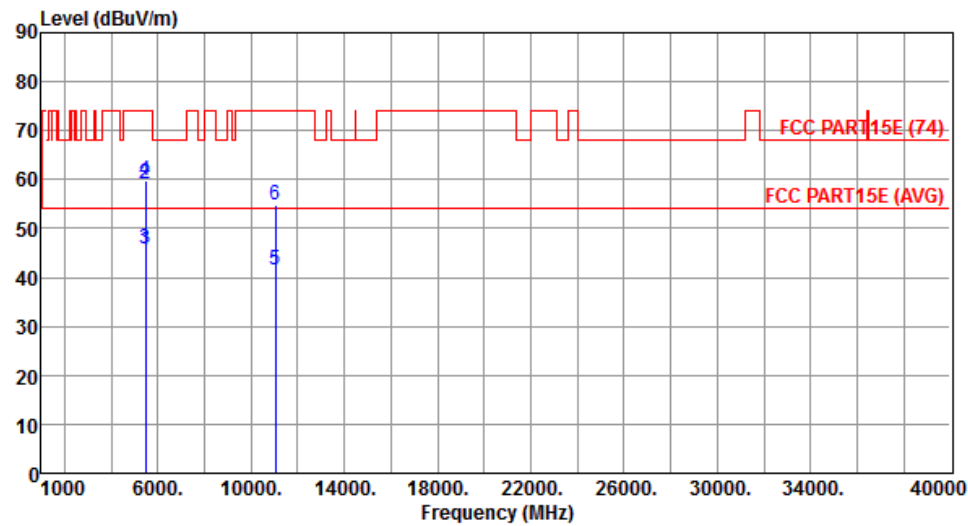


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m			dBuV			cm	deg
1	5460.00	45.59	54.00	-8.41	40.13	5.46	Average	172	118
2	5460.00	59.21	74.00	-14.79	53.75	5.46	Peak	172	118
3	5470.00	45.92	54.00	-8.08	40.45	5.47	Average	172	118
4	5470.00	59.66	74.00	-14.34	54.19	5.47	Peak	172	118
5	11060.00	41.40	54.00	-12.60	27.05	14.35	Average	100	308
6	11060.00	54.66	74.00	-19.34	40.31	14.35	Peak	100	308

Modulation	VHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		

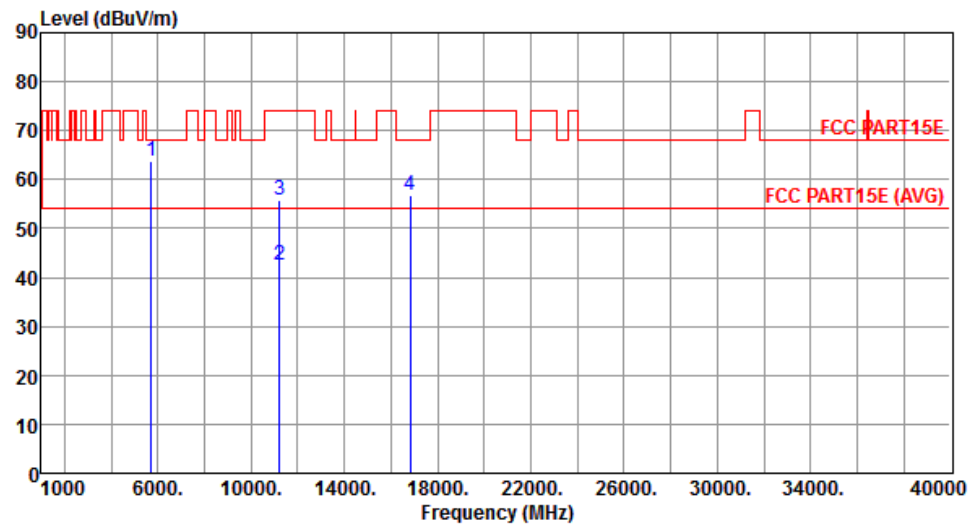


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	63.75	68.20	-4.45	57.94	5.81	Peak	139	345
2	11220.00	42.55	54.00	-11.45	28.06	14.49	Average	147	342
3	11220.00	55.74	74.00	-18.26	41.25	14.49	Peak	147	342
4	16830.00	56.63	68.20	-11.57	40.61	16.02	Peak	100	348

Modulation	VHT80	Test Freq. (MHz)	5610
Polarization	Vertical		

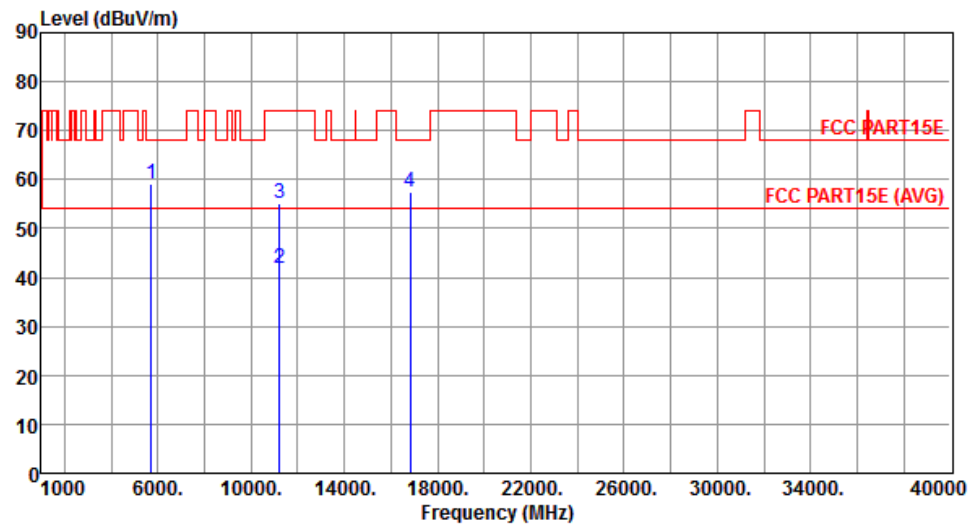


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	59.15	68.20	-9.05	53.34	5.81	Peak	165	136
2	11220.00	41.88	54.00	-12.12	27.39	14.49	Average	153	294
3	11220.00	55.10	74.00	-18.90	40.61	14.49	Peak	153	294
4	16830.00	57.54	68.20	-10.66	41.52	16.02	Peak	100	311

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		

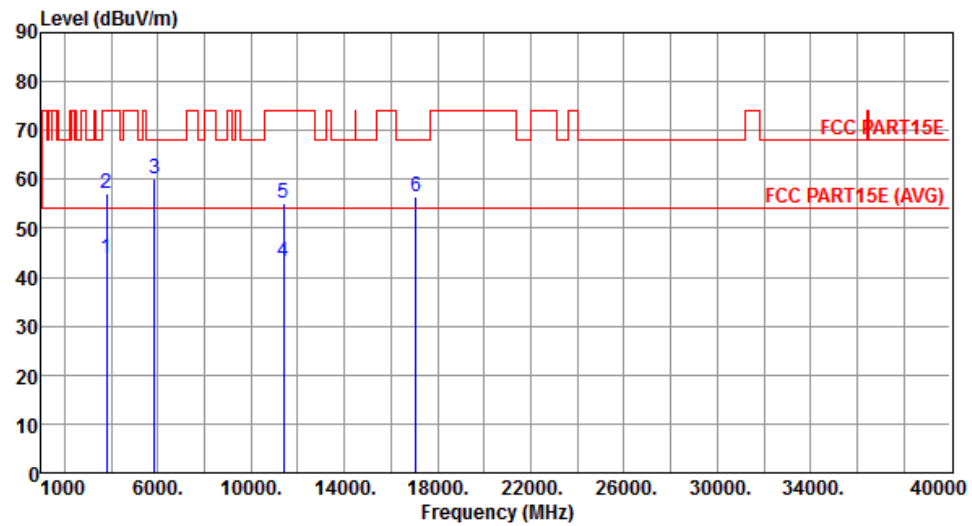


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3793.33	43.88	54.00	-10.12	42.04	1.84	Average	341	157
2	3793.33	57.22	74.00	-16.78	55.38	1.84	Peak	341	157
3	5850.00	60.03	68.20	-8.17	54.04	5.99	Peak	133	344
4	11380.00	43.05	54.00	-10.95	28.42	14.63	Average	163	47
5	11380.00	55.00	74.00	-19.00	40.37	14.63	Peak	163	47
6	17070.00	56.39	68.20	-11.81	40.00	16.39	Peak	100	339

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Vertical		

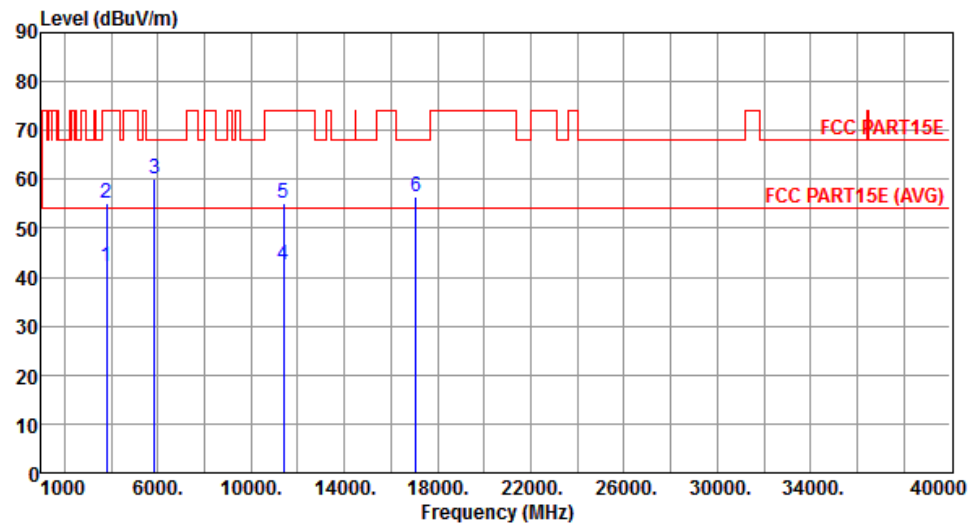


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3793.33	42.10	54.00	-11.90	40.26	1.84	Average	199	95
2	3793.33	55.05	74.00	-18.95	53.21	1.84	Peak	199	95
3	5850.00	60.19	68.20	-8.01	54.20	5.99	Peak	133	138
4	11380.00	42.49	54.00	-11.51	27.86	14.63	Average	100	170
5	11380.00	54.99	74.00	-19.01	40.36	14.63	Peak	100	170
6	17070.00	56.56	68.20	-11.64	40.17	16.39	Peak	100	332

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		

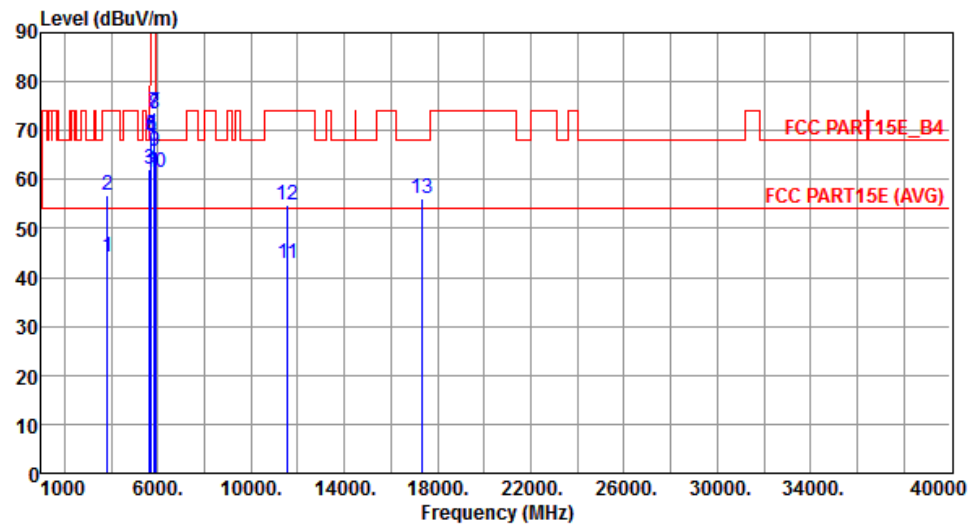

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3850.00	44.17	54.00	-9.83	42.15	2.02	Average	201	191
2	3850.00	56.83	74.00	-17.17	54.81	2.02	Peak	201	191
3	5650.00	61.95	68.20	-6.25	56.26	5.69	Peak	130	350
4	5700.00	68.25	105.20	-36.95	62.48	5.77	Peak	130	350
5	5720.00	69.07	110.80	-41.73	63.28	5.79	Peak	130	350
6	5725.00	68.89	122.20	-53.31	63.08	5.81	Peak	130	350
7	5850.00	73.56	122.20	-48.64	67.57	5.99	Peak	130	350
8	5855.00	73.35	110.80	-37.45	67.35	6.00	Peak	130	350
9	5875.00	65.62	105.20	-39.58	59.60	6.02	Peak	130	350
10	5925.00	61.58	68.20	-6.62	55.49	6.09	Peak	130	350
11	11550.00	42.93	54.00	-11.07	28.29	14.64	Average	160	52
12	11550.00	54.86	74.00	-19.14	40.22	14.64	Peak	160	52
13	17325.00	56.28	68.20	-11.92	38.85	17.43	Peak	100	343

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Vertical		

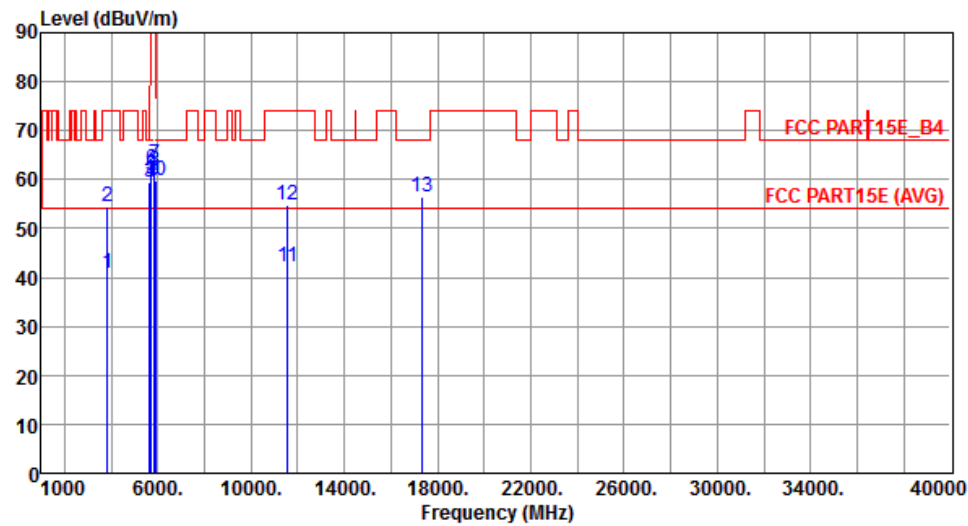


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3850.00	40.85	54.00	-13.15	38.83	2.02	Average	144	267
2	3850.00	54.30	74.00	-19.70	52.28	2.02	Peak	144	267
3	5650.00	59.32	68.20	-8.88	53.63	5.69	Peak	131	125
4	5700.00	59.45	105.20	-45.75	53.68	5.77	Peak	131	125
5	5720.00	60.65	110.80	-50.15	54.86	5.79	Peak	131	125
6	5725.00	62.04	122.20	-60.16	56.23	5.81	Peak	131	125
7	5850.00	63.09	122.20	-59.11	57.10	5.99	Peak	131	125
8	5855.00	61.79	110.80	-49.01	55.79	6.00	Peak	131	125
9	5875.00	59.90	105.20	-45.30	53.88	6.02	Peak	131	125
10	5925.00	59.64	68.20	-8.56	53.55	6.09	Peak	131	125
11	11550.00	42.32	54.00	-11.68	27.68	14.64	Average	100	166
12	11550.00	54.83	74.00	-19.17	40.19	14.64	Peak	100	166
13	17325.00	56.50	68.20	-11.70	39.07	17.43	Peak	100	338

Configuration 3 : PIFA Antenna


3.5.14 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

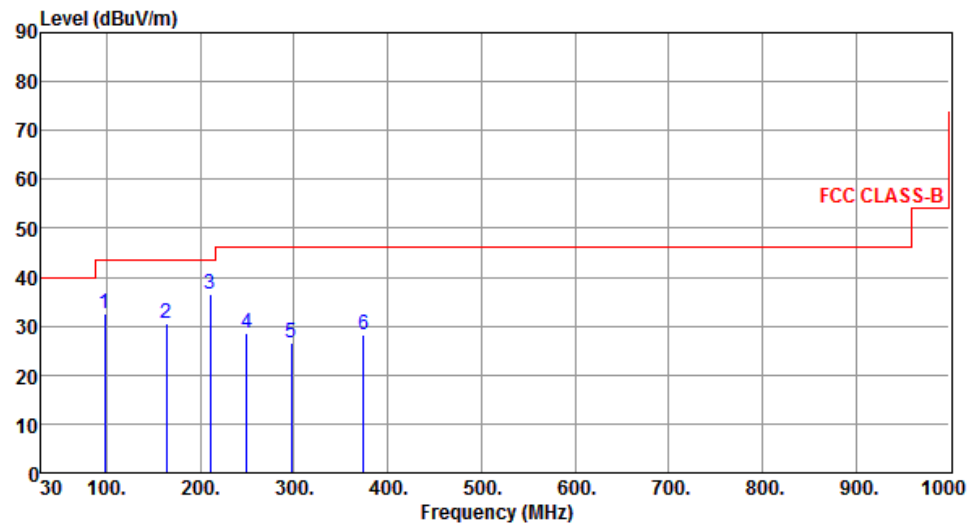


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	97.53	32.44	43.50	-11.06	46.25	-13.81	Peak	---	---
2	163.72	30.61	43.50	-12.89	39.13	-8.52	Peak	---	---
3	210.33	36.42	43.50	-7.08	47.70	-11.28	Peak	---	---
4	249.56	28.43	46.00	-17.57	38.05	-9.62	Peak	---	---
5	296.77	26.48	46.00	-19.52	34.49	-8.01	Peak	---	---
6	374.46	28.26	46.00	-17.74	34.18	-5.92	Peak	---	---

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

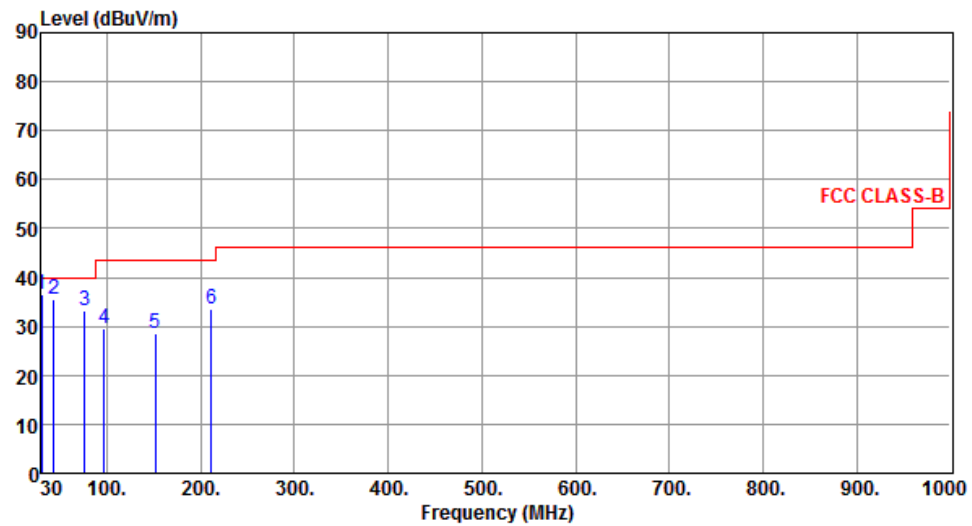


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.76	36.44	40.00	-3.56	45.79	-9.35	Peak	---	---
2	43.44	35.41	40.00	-4.59	43.80	-8.39	Peak	---	---
3	76.52	33.31	40.00	-6.69	45.74	-12.43	Peak	---	---
4	97.43	29.55	43.50	-13.95	43.38	-13.83	Peak	---	---
5	151.46	28.43	43.50	-15.07	36.93	-8.50	Peak	---	---
6	211.42	33.61	43.50	-9.89	44.88	-11.27	Peak	---	---

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

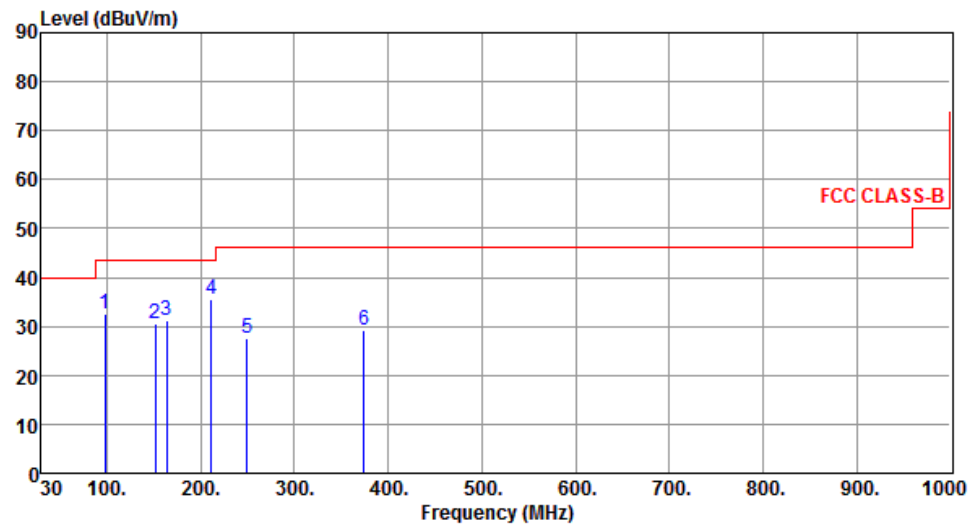

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	97.82	32.51	43.50	-10.99	46.29	-13.78	Peak	---	---
2	151.48	30.44	43.50	-13.06	38.94	-8.50	Peak	---	---
3	163.72	31.06	43.50	-12.44	39.58	-8.52	Peak	---	---
4	211.52	35.63	43.50	-7.87	46.89	-11.26	Peak	---	---
5	249.53	27.42	46.00	-18.58	37.04	-9.62	Peak	---	---
6	374.36	29.36	46.00	-16.64	35.29	-5.93	Peak	---	---


Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

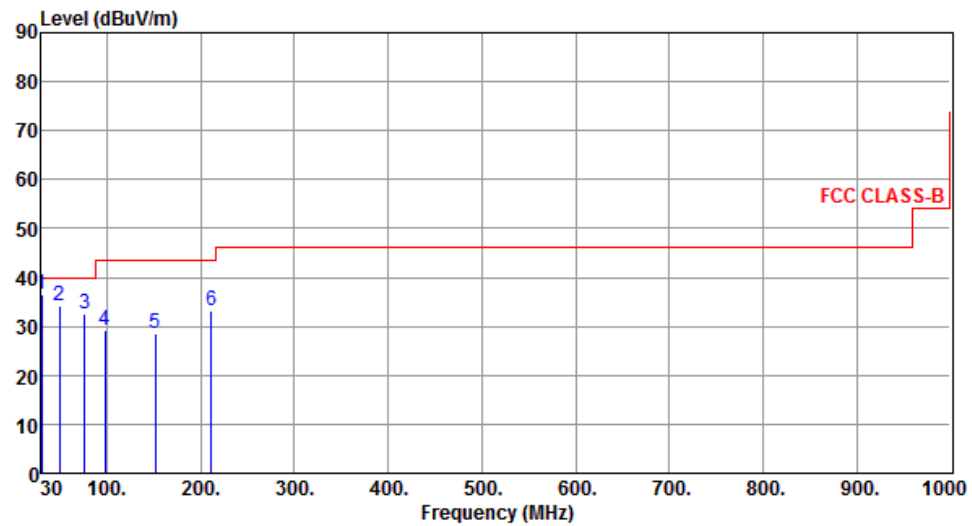

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.57	36.42	40.00	-3.58	45.78	-9.36	Peak	---	---
2	49.61	34.36	40.00	-5.64	42.51	-8.15	Peak	---	---
3	76.42	32.51	40.00	-7.49	44.92	-12.41	Peak	---	---
4	97.66	29.35	43.50	-14.15	43.15	-13.80	Peak	---	---
5	151.42	28.46	43.50	-15.04	36.96	-8.50	Peak	---	---
6	211.42	33.31	43.50	-10.19	44.58	-11.27	Peak	---	---


3.5.15 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		

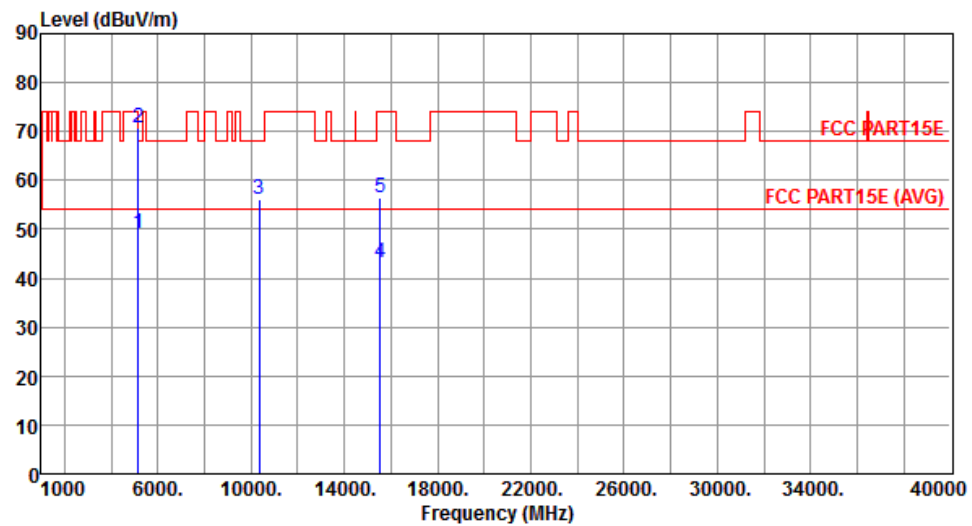


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	49.20	54.00	-4.80	44.18	5.02	Average	136	331
2	5150.00	70.83	74.00	-3.17	65.81	5.02	Peak	136	331
3	10360.00	56.10	68.20	-12.10	42.36	13.74	Peak	177	20
4	15540.00	43.21	54.00	-10.79	28.24	14.97	Average	165	322
5	15540.00	56.45	74.00	-17.55	41.48	14.97	Peak	165	322

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

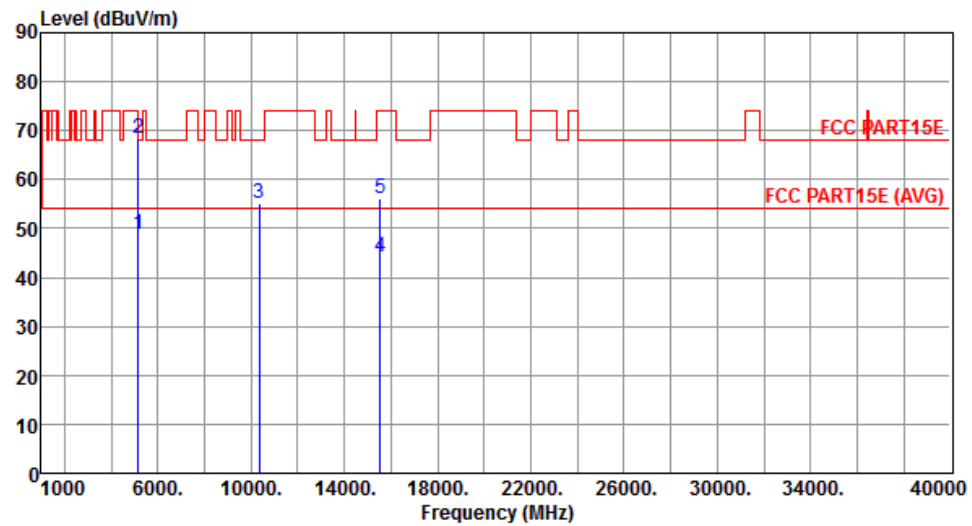


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	48.89	54.00	-5.11	43.87	5.02	Average	294	255
2	5150.00	68.26	74.00	-5.74	63.24	5.02	Peak	294	255
3	10360.00	55.12	68.20	-13.08	41.38	13.74	Peak	182	250
4	15540.00	44.28	54.00	-9.72	29.31	14.97	Average	162	320
5	15540.00	56.22	74.00	-17.78	41.25	14.97	Peak	162	320

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

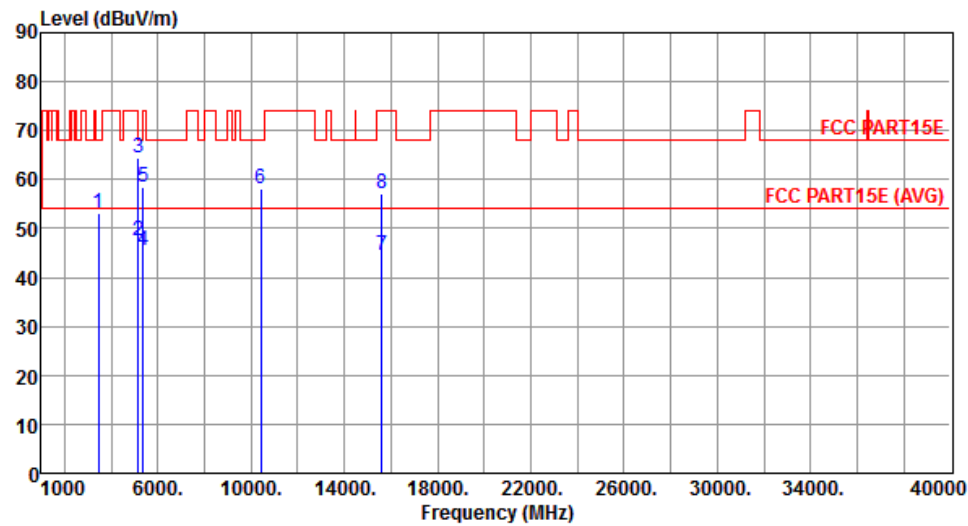


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.66	53.09	68.20	-15.11	52.23	0.86	Peak	100	144
2	5150.00	47.48	54.00	-6.52	42.46	5.02	Average	137	316
3	5150.00	64.51	74.00	-9.49	59.49	5.02	Peak	137	316
4	5350.00	45.60	54.00	-8.40	40.29	5.31	Average	137	316
5	5350.00	58.42	74.00	-15.58	53.11	5.31	Peak	137	316
6	10400.00	58.09	68.20	-10.11	44.32	13.77	Peak	178	19
7	15600.00	44.37	54.00	-9.63	29.43	14.94	Average	168	325
8	15600.00	57.07	74.00	-16.93	42.13	14.94	Peak	168	325

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

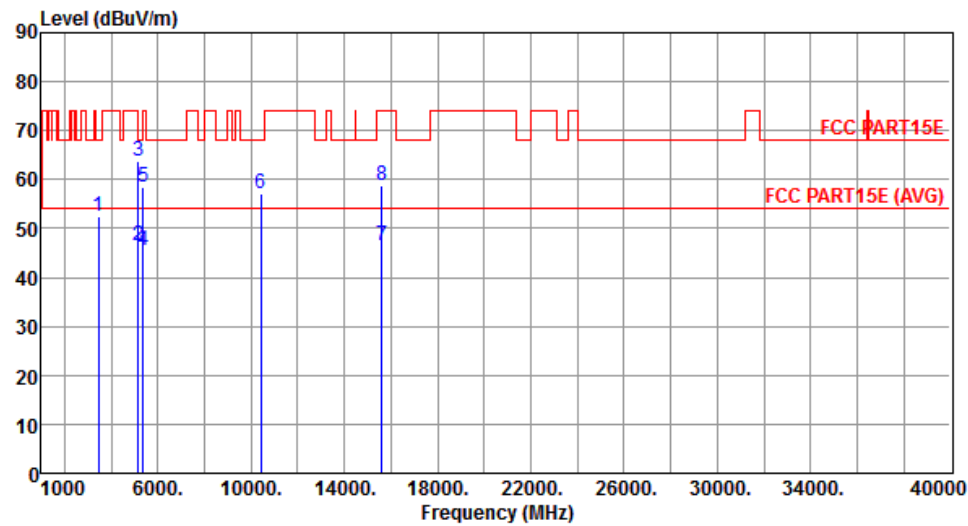


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	3466.66	52.54	68.20	-15.66	51.68	0.86	Peak	100	177
2	5150.00	46.59	54.00	-7.41	41.57	5.02	Average	293	255
3	5150.00	63.77	74.00	-10.23	58.75	5.02	Peak	293	255
4	5350.00	45.45	54.00	-8.55	40.14	5.31	Average	293	255
5	5350.00	58.35	74.00	-15.65	53.04	5.31	Peak	293	255
6	10400.00	57.22	68.20	-10.98	43.45	13.77	Peak	183	252
7	15600.00	46.34	54.00	-7.66	31.40	14.94	Average	169	323
8	15600.00	58.67	74.00	-15.33	43.73	14.94	Peak	169	323

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

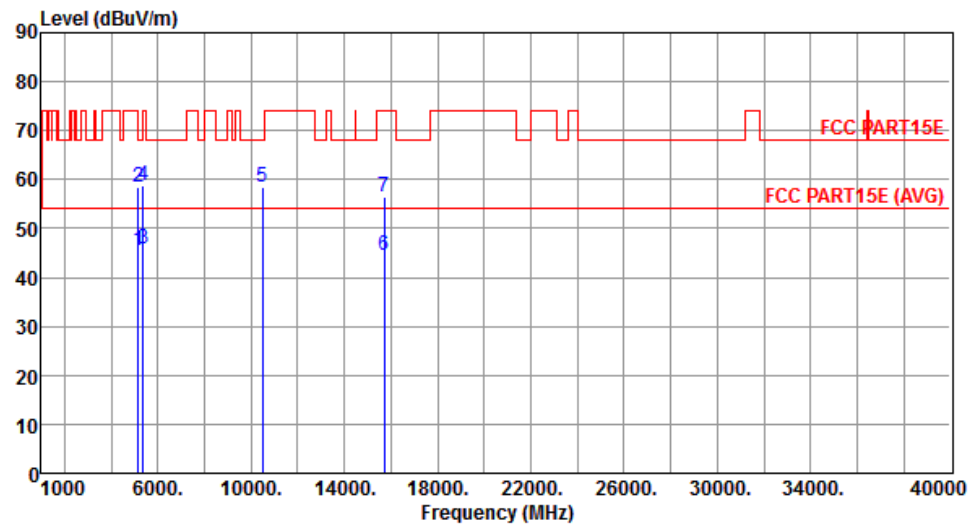


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.46	54.00	-8.54	40.44	5.02	Average	135	315
2	5150.00	58.56	74.00	-15.44	53.54	5.02	Peak	135	315
3	5350.00	45.75	54.00	-8.25	40.44	5.31	Average	135	315
4	5350.00	58.73	74.00	-15.27	53.42	5.31	Peak	135	315
5	10480.00	58.34	68.20	-9.86	44.53	13.81	Peak	175	21
6	15720.00	44.46	54.00	-9.54	29.55	14.91	Average	165	322
7	15720.00	56.40	74.00	-17.60	41.49	14.91	Peak	165	322

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

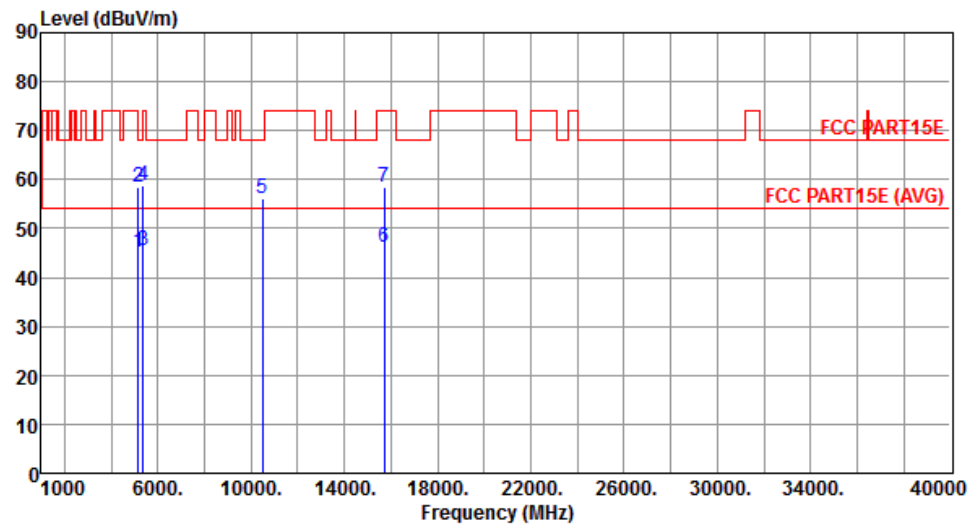


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.24	54.00	-8.76	40.22	5.02	Average	292	252
2	5150.00	58.33	74.00	-15.67	53.31	5.02	Peak	292	252
3	5350.00	45.59	54.00	-8.41	40.28	5.31	Average	292	252
4	5350.00	58.77	74.00	-15.23	53.46	5.31	Peak	292	252
5	10480.00	56.05	68.20	-12.15	42.24	13.81	Peak	181	251
6	15720.00	46.14	54.00	-7.86	31.23	14.91	Average	165	322
7	15720.00	58.33	74.00	-15.67	43.42	14.91	Peak	165	322

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		

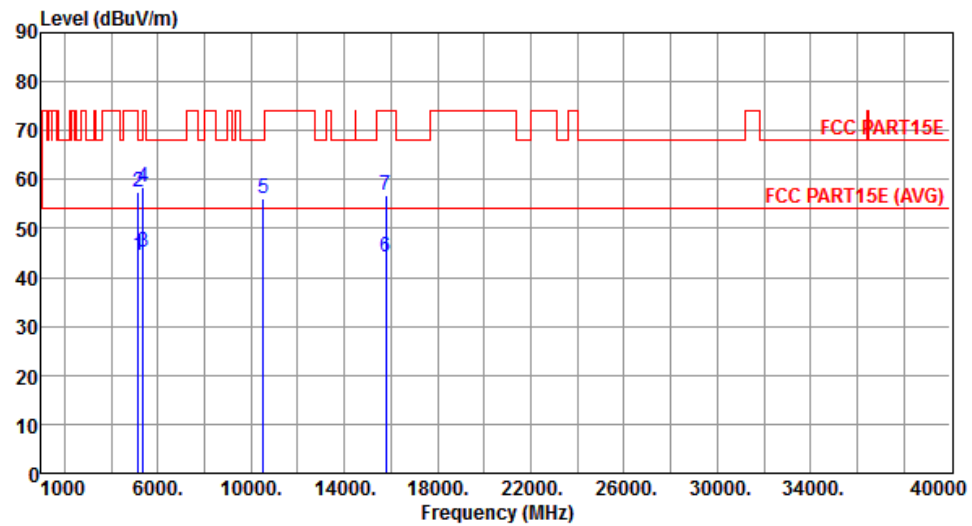


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.45	54.00	-9.55	39.43	5.02	Average	253	295
2	5150.00	57.46	74.00	-16.54	52.44	5.02	Peak	253	295
3	5350.00	45.19	54.00	-8.81	39.88	5.31	Average	253	295
4	5350.00	58.56	74.00	-15.44	53.25	5.31	Peak	253	295
5	10520.00	55.99	68.20	-12.21	42.15	13.84	Peak	238	61
6	15780.00	44.04	54.00	-9.96	29.17	14.87	Average	205	53
7	15780.00	56.71	74.00	-17.29	41.84	14.87	Peak	205	53

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical		

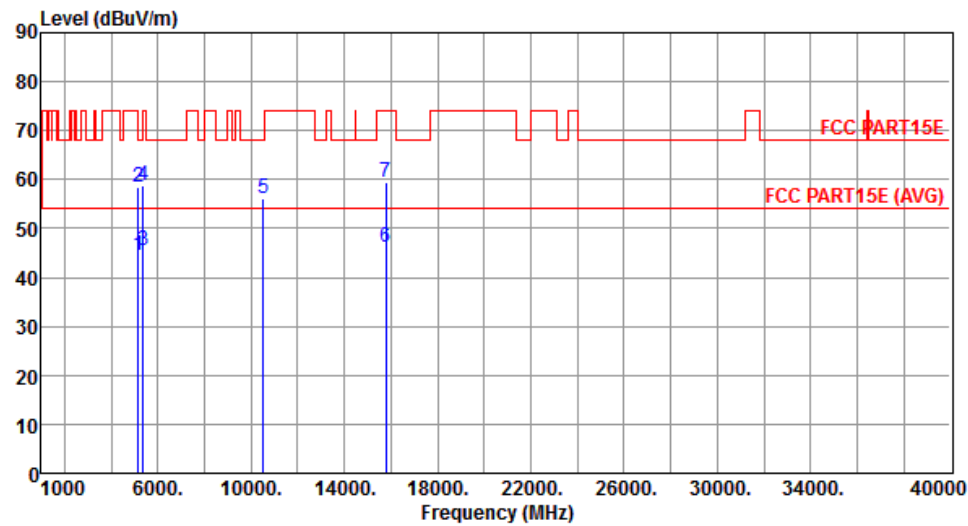


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.44	54.00	-9.56	39.42	5.02	Average	335	260
2	5150.00	58.53	74.00	-15.47	53.51	5.02	Peak	335	260
3	5350.00	45.59	54.00	-8.41	40.28	5.31	Average	335	260
4	5350.00	58.62	74.00	-15.38	53.31	5.31	Peak	335	260
5	10520.00	56.28	68.20	-11.92	42.44	13.84	Peak	115	262
6	15780.00	46.19	54.00	-7.81	31.32	14.87	Average	141	339
7	15780.00	59.60	74.00	-14.40	44.73	14.87	Peak	141	339

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal		

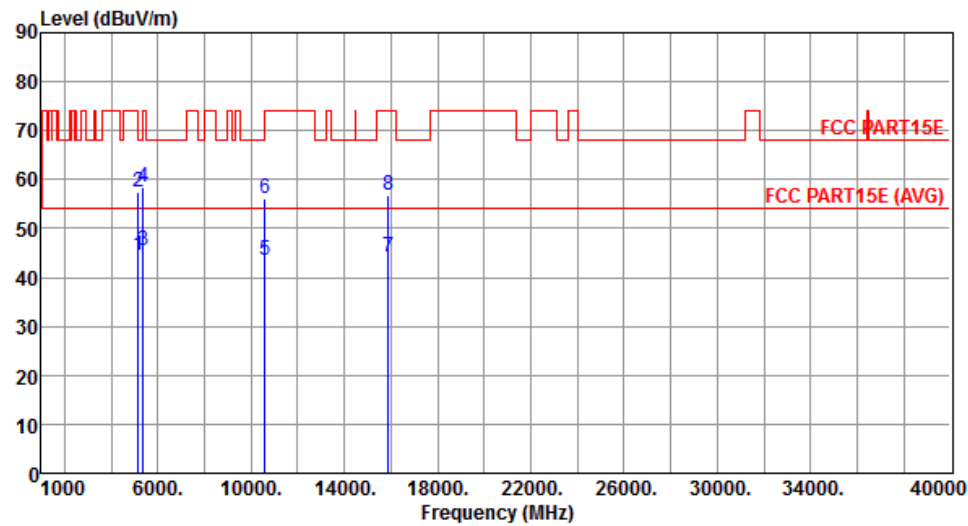


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.38	54.00	-9.62	39.36	5.02	Average	255	298
2	5150.00	57.59	74.00	-16.41	52.57	5.02	Peak	255	298
3	5350.00	45.58	54.00	-8.42	40.27	5.31	Average	255	298
4	5350.00	58.43	74.00	-15.57	53.12	5.31	Peak	255	298
5	10600.00	43.40	54.00	-10.60	29.48	13.92	Average	255	63
6	10600.00	56.27	74.00	-17.73	42.35	13.92	Peak	255	63
7	15900.00	44.30	54.00	-9.70	29.46	14.84	Average	216	54
8	15900.00	56.77	74.00	-17.23	41.93	14.84	Peak	216	54

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Vertical		

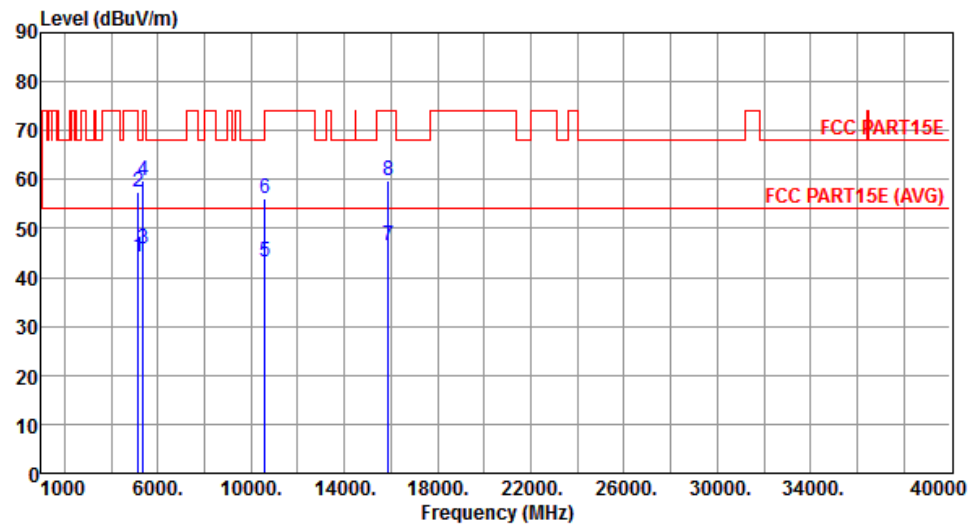


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.27	54.00	-9.73	39.25	5.02	Average	338	261
2	5150.00	57.33	74.00	-16.67	52.31	5.02	Peak	338	261
3	5350.00	45.76	54.00	-8.24	40.45	5.31	Average	338	261
4	5350.00	59.94	74.00	-14.06	54.63	5.31	Peak	338	261
5	10600.00	43.29	54.00	-10.71	29.37	13.92	Average	119	260
6	10600.00	56.22	74.00	-17.78	42.30	13.92	Peak	119	260
7	15900.00	46.34	54.00	-7.66	31.50	14.84	Average	143	340
8	15900.00	59.69	74.00	-14.31	44.85	14.84	Peak	143	340

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal		

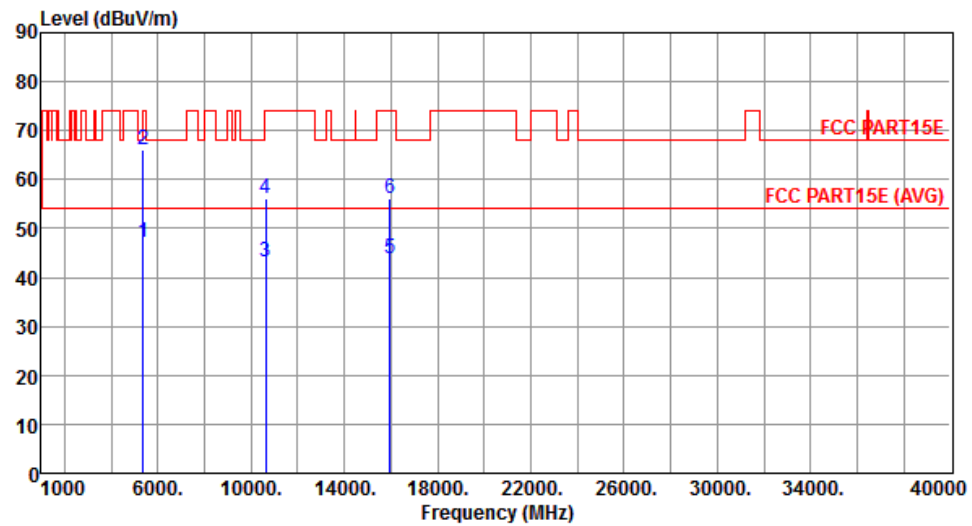


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.01	54.00	-6.99	41.70	5.31	Average	137	315
2	5350.00	66.25	74.00	-7.75	60.94	5.31	Peak	137	315
3	10640.00	43.19	54.00	-10.81	29.23	13.96	Average	242	61
4	10640.00	56.06	74.00	-17.94	42.10	13.96	Peak	242	61
5	15960.00	43.97	54.00	-10.03	29.16	14.81	Average	205	52
6	15960.00	56.25	74.00	-17.75	41.44	14.81	Peak	205	52

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical		

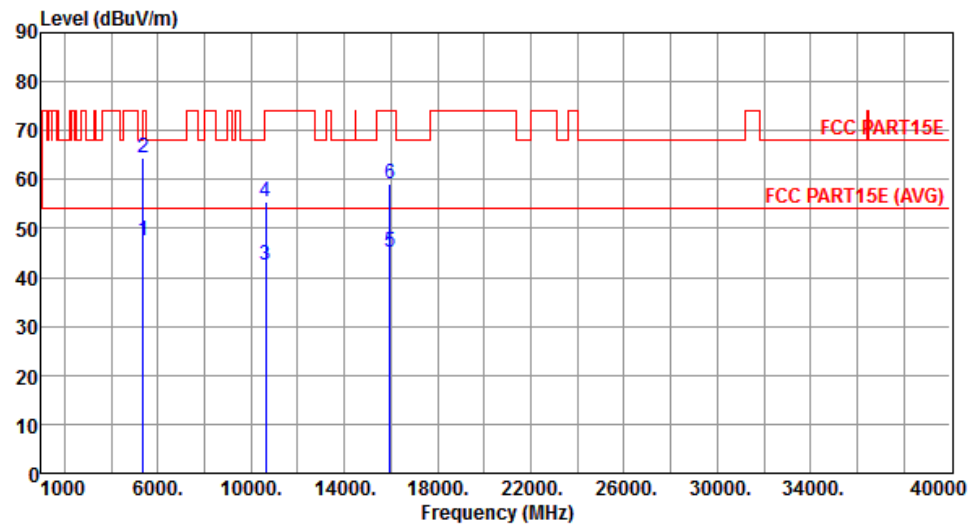


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.36	54.00	-6.64	42.05	5.31	Average	339	263
2	5350.00	64.26	74.00	-9.74	58.95	5.31	Peak	339	263
3	10640.00	42.60	54.00	-11.40	28.64	13.96	Average	120	258
4	10640.00	55.38	74.00	-18.62	41.42	13.96	Peak	120	258
5	15960.00	45.03	54.00	-8.97	30.22	14.81	Average	142	338
6	15960.00	59.05	74.00	-14.95	44.24	14.81	Peak	142	338

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Horizontal		

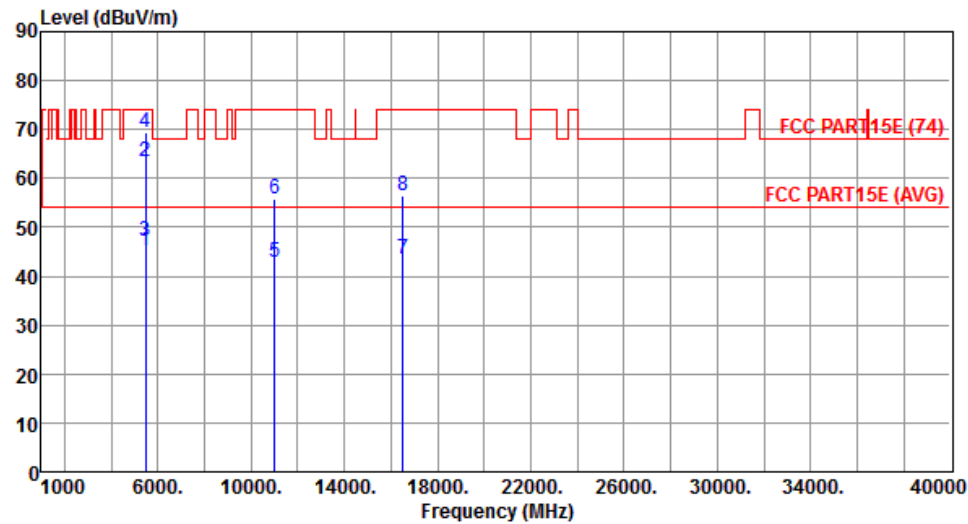


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.15	54.00	-8.85	39.69	5.46	Average	151	48
2	5460.00	63.35	74.00	-10.65	57.89	5.46	Peak	151	48
3	5470.00	47.21	54.00	-6.79	41.74	5.47	Average	151	48
4	5470.00	69.50	74.00	-4.50	64.03	5.47	Peak	151	48
5	11000.00	42.73	54.00	-11.27	28.43	14.30	Average	198	23
6	11000.00	55.87	74.00	-18.13	41.57	14.30	Peak	198	23
7	16500.00	43.49	54.00	-10.51	27.65	15.84	Average	100	328
8	16500.00	56.56	74.00	-17.44	40.72	15.84	Peak	100	328

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical		

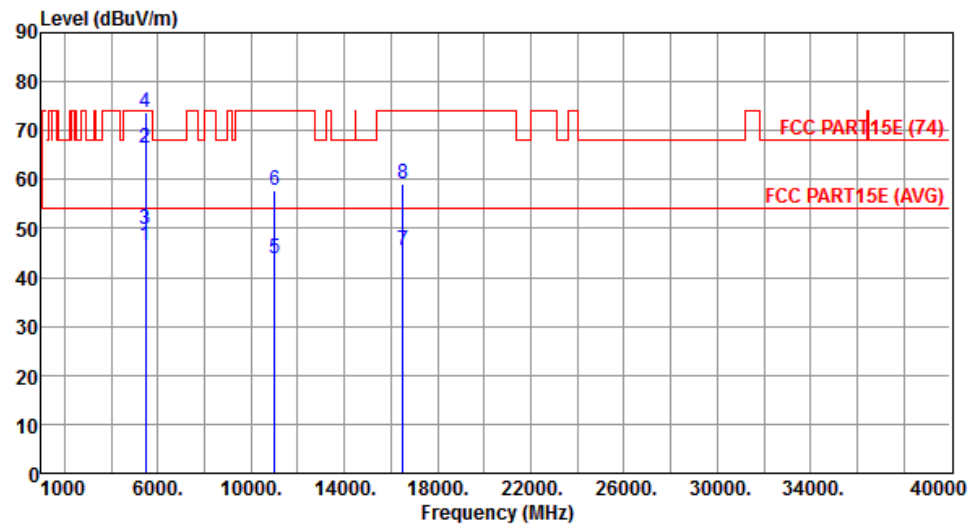


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.42	54.00	-7.58	40.96	5.46	Average	301	94
2	5460.00	66.36	74.00	-7.64	60.90	5.46	Peak	301	94
3	5470.00	49.75	54.00	-4.25	44.28	5.47	Average	301	94
4	5470.00	73.77	74.00	-0.23	68.30	5.47	Peak	301	94
5	11000.00	43.80	54.00	-10.20	29.50	14.30	Average	100	244
6	11000.00	57.67	74.00	-16.33	43.37	14.30	Peak	100	244
7	16500.00	45.52	54.00	-8.48	29.68	15.84	Average	100	260
8	16500.00	59.06	74.00	-14.94	43.22	15.84	Peak	100	260

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal		

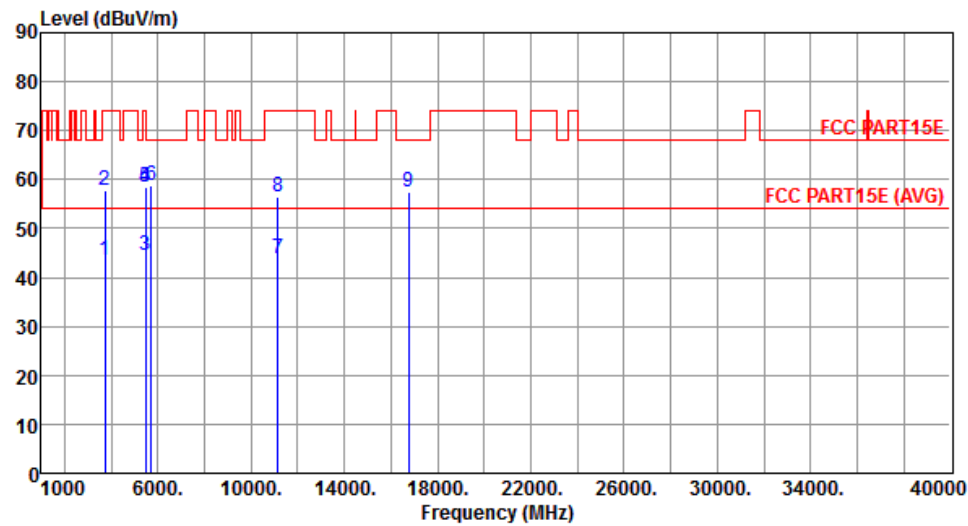


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	43.42	54.00	-10.58	41.82	1.60	Average	160	15
2	3720.00	57.82	74.00	-16.18	56.22	1.60	Peak	160	15
3	5460.00	44.54	54.00	-9.46	39.08	5.46	Average	149	46
4	5460.00	58.39	74.00	-15.61	52.93	5.46	Peak	149	46
5	5470.00	58.43	68.20	-9.77	52.96	5.47	Peak	149	46
6	5725.00	58.87	68.20	-9.33	53.06	5.81	Peak	149	46
7	11160.00	43.74	54.00	-10.26	29.30	14.44	Average	204	12
8	11160.00	56.58	74.00	-17.42	42.14	14.44	Peak	204	12
9	16740.00	57.49	68.20	-10.71	41.52	15.97	Peak	100	340

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		

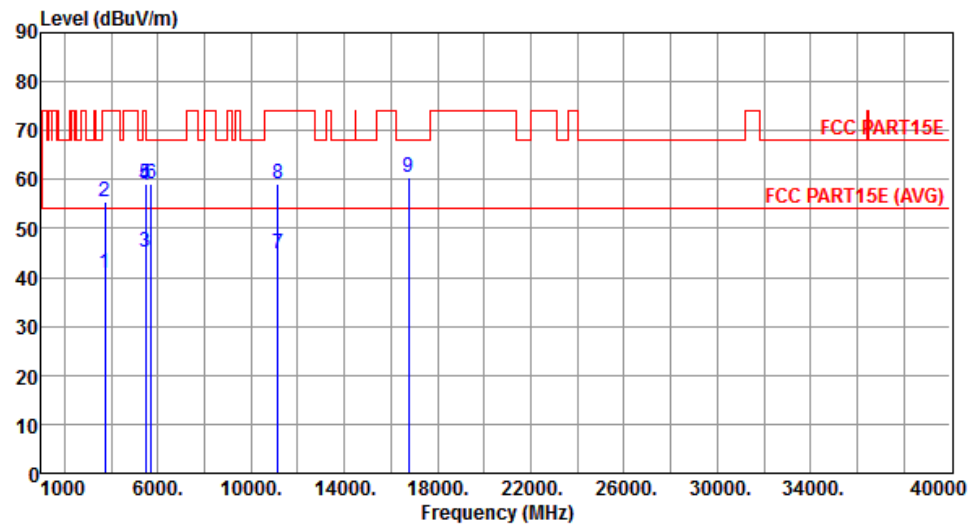


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	41.01	54.00	-12.99	39.41	1.60	Average	122	337
2	3720.00	55.45	74.00	-18.55	53.85	1.60	Peak	122	337
3	5460.00	45.12	54.00	-8.88	39.66	5.46	Average	304	96
4	5460.00	58.66	74.00	-15.34	53.20	5.46	Peak	304	96
5	5470.00	59.15	68.20	-9.05	53.68	5.47	Peak	304	96
6	5725.00	58.98	68.20	-9.22	53.17	5.81	Peak	304	96
7	11160.00	44.77	54.00	-9.23	30.33	14.44	Average	100	255
8	11160.00	58.99	74.00	-15.01	44.55	14.44	Peak	100	255
9	16740.00	60.38	68.20	-7.82	44.41	15.97	Peak	100	172

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		

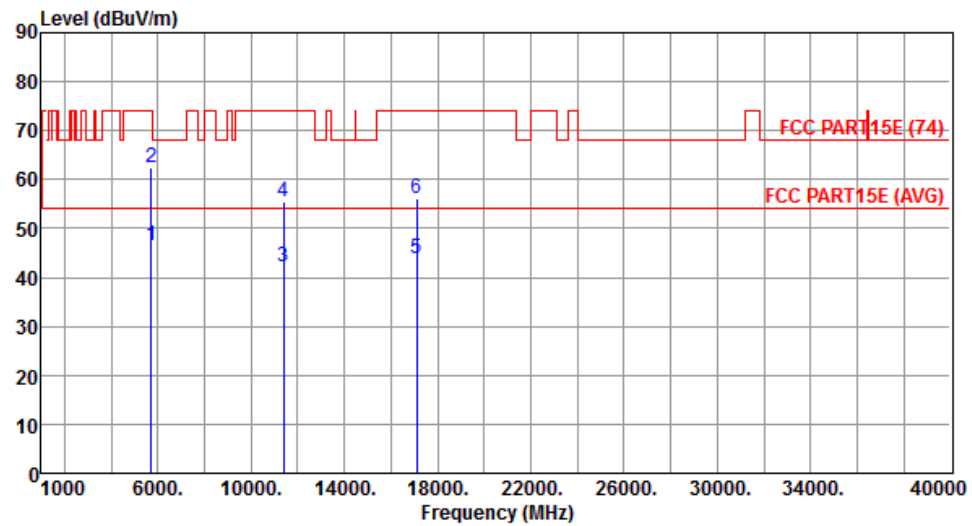


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	46.52	54.00	-7.48	40.71	5.81	Average	153	52
2	5725.00	62.47	74.00	-11.53	56.66	5.81	Peak	153	52
3	11400.00	42.25	54.00	-11.75	27.60	14.65	Average	195	42
4	11400.00	55.43	74.00	-18.57	40.78	14.65	Peak	195	42
5	17100.00	43.95	54.00	-10.05	27.44	16.51	Average	100	314
6	17100.00	56.04	74.00	-17.96	39.53	16.51	Peak	100	314

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		

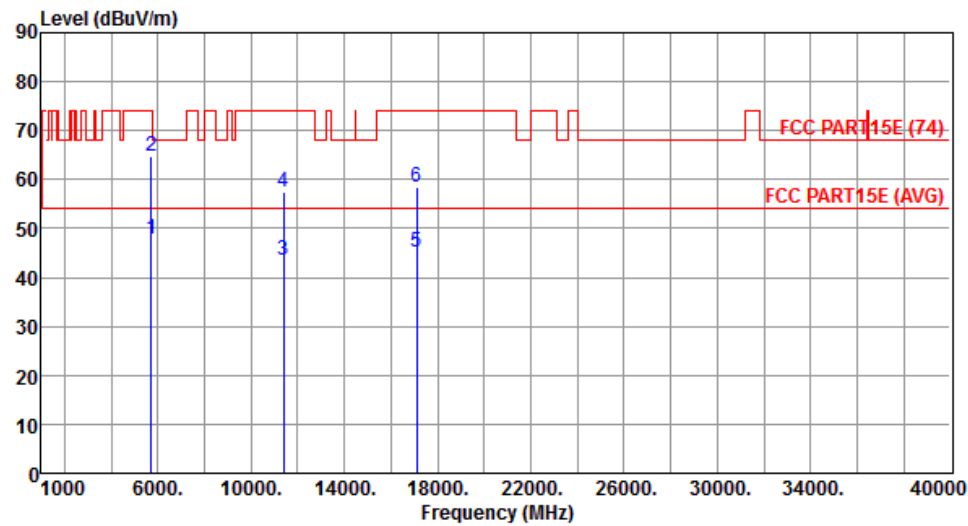


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	47.69	54.00	-6.31	41.88	5.81	Average	291	95
2	5725.00	64.83	74.00	-9.17	59.02	5.81	Peak	291	95
3	11400.00	43.39	54.00	-10.61	28.74	14.65	Average	100	253
4	11400.00	57.31	74.00	-16.69	42.66	14.65	Peak	100	253
5	17100.00	45.19	54.00	-8.81	28.68	16.51	Average	100	272
6	17100.00	58.55	74.00	-15.45	42.04	16.51	Peak	100	272

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal		

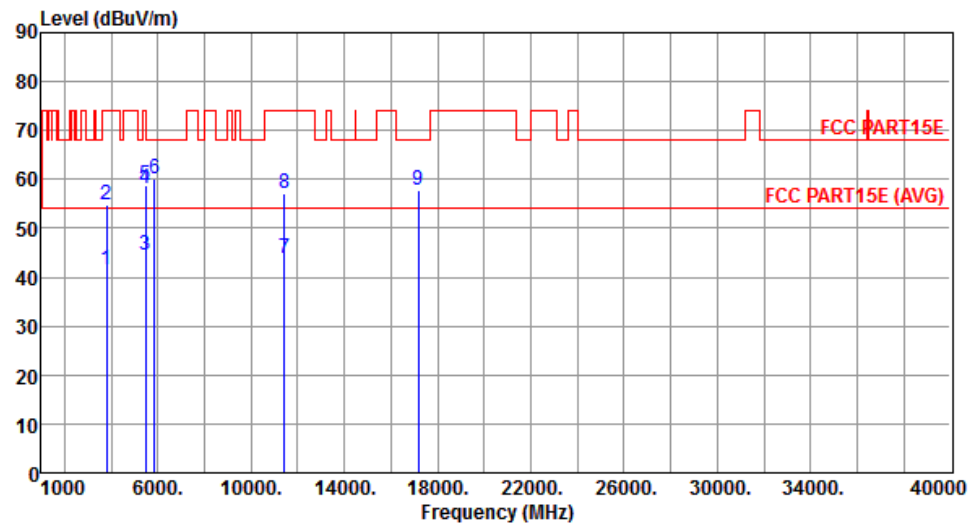


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	41.63	54.00	-12.37	39.73	1.90	Average	169	11
2	3813.33	54.88	74.00	-19.12	52.98	1.90	Peak	169	11
3	5460.00	44.55	54.00	-9.45	39.09	5.46	Average	150	51
4	5460.00	58.27	74.00	-15.73	52.81	5.46	Peak	150	51
5	5470.00	58.64	68.20	-9.56	53.17	5.47	Peak	150	51
6	5850.00	60.01	68.20	-8.19	54.02	5.99	Peak	150	51
7	11440.00	43.82	54.00	-10.18	29.13	14.69	Average	210	18
8	11440.00	56.96	74.00	-17.04	42.27	14.69	Peak	210	18
9	17160.00	57.73	68.20	-10.47	40.97	16.76	Peak	100	349

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Vertical		

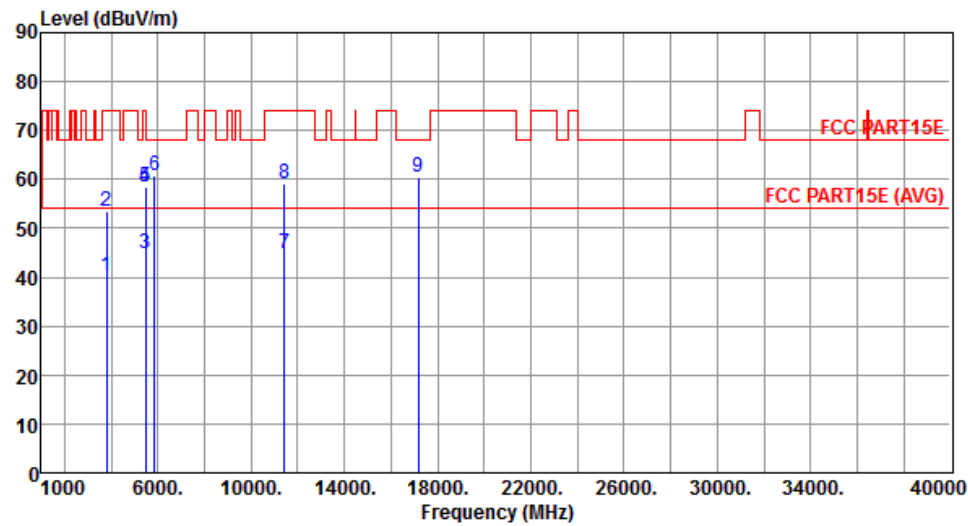


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	40.23	54.00	-13.77	38.33	1.90	Average	109	334
2	3813.33	53.55	74.00	-20.45	51.65	1.90	Peak	109	334
3	5460.00	44.84	54.00	-9.16	39.38	5.46	Average	301	93
4	5460.00	58.50	74.00	-15.50	53.04	5.46	Peak	301	93
5	5470.00	58.53	68.20	-9.67	53.06	5.47	Peak	301	93
6	5850.00	60.62	68.20	-7.58	54.63	5.99	Peak	301	93
7	11440.00	44.85	54.00	-9.15	30.16	14.69	Average	100	262
8	11440.00	59.11	74.00	-14.89	44.42	14.69	Peak	100	262
9	17160.00	60.46	68.20	-7.74	43.70	16.76	Peak	100	250

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

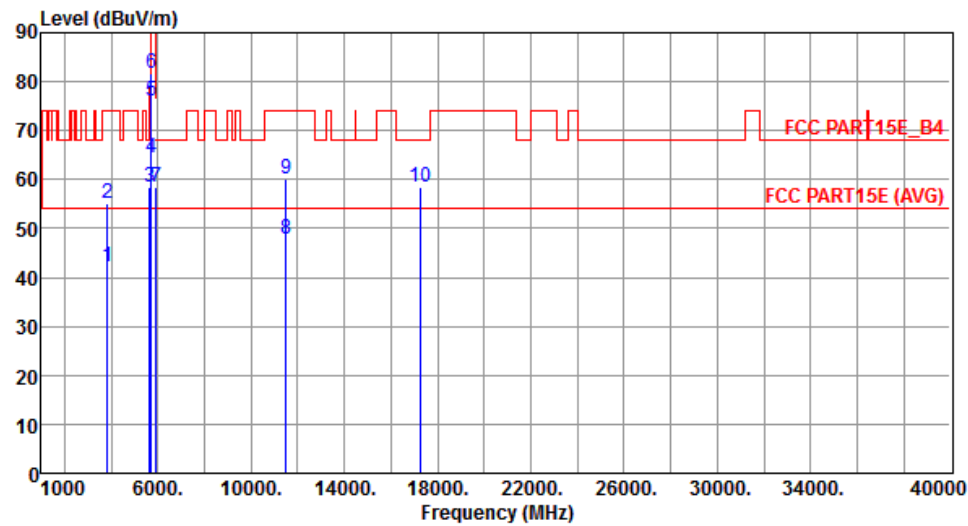


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	42.34	54.00	-11.66	40.38	1.96	Average	203	332
2	3830.00	55.25	74.00	-18.75	53.29	1.96	Peak	203	332
3	5650.00	58.46	68.20	-9.74	52.77	5.69	Peak	158	51
4	5700.00	64.34	105.20	-40.86	58.57	5.77	Peak	158	51
5	5720.00	76.05	110.80	-34.75	70.26	5.79	Peak	158	51
6	5725.00	81.71	122.20	-40.49	75.90	5.81	Peak	158	51
7	5925.00	58.42	68.20	-9.78	52.33	6.09	Peak	158	51
8	11490.00	47.92	54.00	-6.08	33.19	14.73	Average	175	302
9	11490.00	60.24	74.00	-13.76	45.51	14.73	Peak	175	302
10	17235.00	58.48	68.20	-9.72	41.41	17.07	Peak	175	32

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

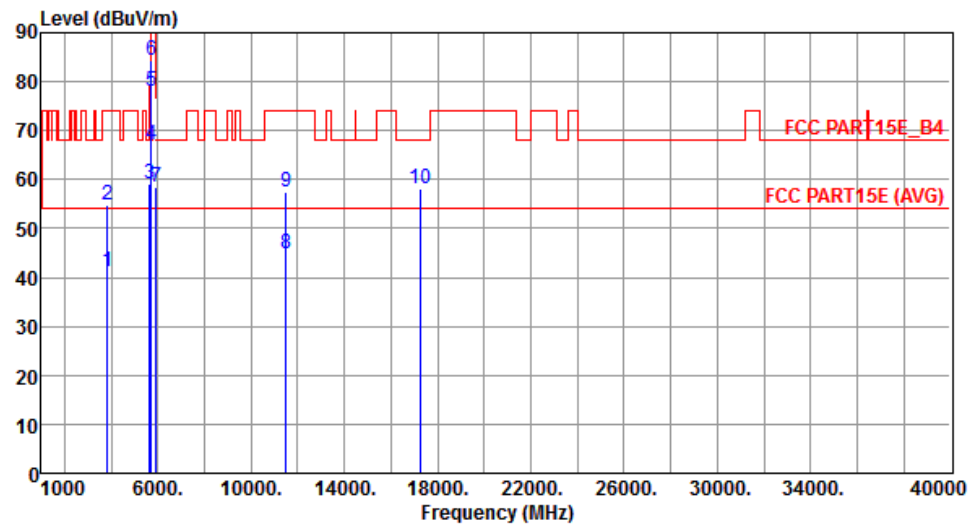


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	41.16	54.00	-12.84	39.20	1.96	Average	155	143
2	3830.00	54.64	74.00	-19.36	52.68	1.96	Peak	155	143
3	5650.00	59.04	68.20	-9.16	53.35	5.69	Peak	297	93
4	5700.00	67.22	105.20	-37.98	61.45	5.77	Peak	297	93
5	5720.00	78.07	110.80	-32.73	72.28	5.79	Peak	297	93
6	5725.00	84.31	122.20	-37.89	78.50	5.81	Peak	297	93
7	5925.00	58.48	68.20	-9.72	52.39	6.09	Peak	297	93
8	11490.00	44.78	54.00	-9.22	30.05	14.73	Average	182	337
9	11490.00	57.51	74.00	-16.49	42.78	14.73	Peak	182	337
10	17235.00	58.17	68.20	-10.03	41.10	17.07	Peak	172	325

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		

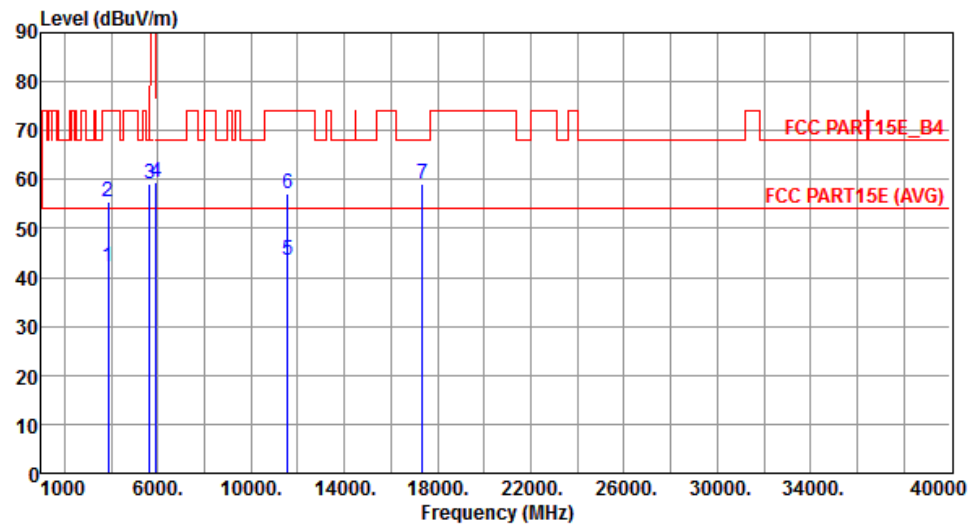


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	42.30	54.00	-11.70	40.25	2.05	Average	158	34
2	3856.66	55.36	74.00	-18.64	53.31	2.05	Peak	158	34
3	5650.00	59.00	68.20	-9.20	53.31	5.69	Peak	158	57
4	5925.00	59.52	68.20	-8.68	53.43	6.09	Peak	158	57
5	11570.00	43.50	54.00	-10.50	28.90	14.60	Average	100	250
6	11570.00	56.98	74.00	-17.02	42.38	14.60	Peak	100	250
7	17355.00	58.97	68.20	-9.23	41.42	17.55	Peak	100	168

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

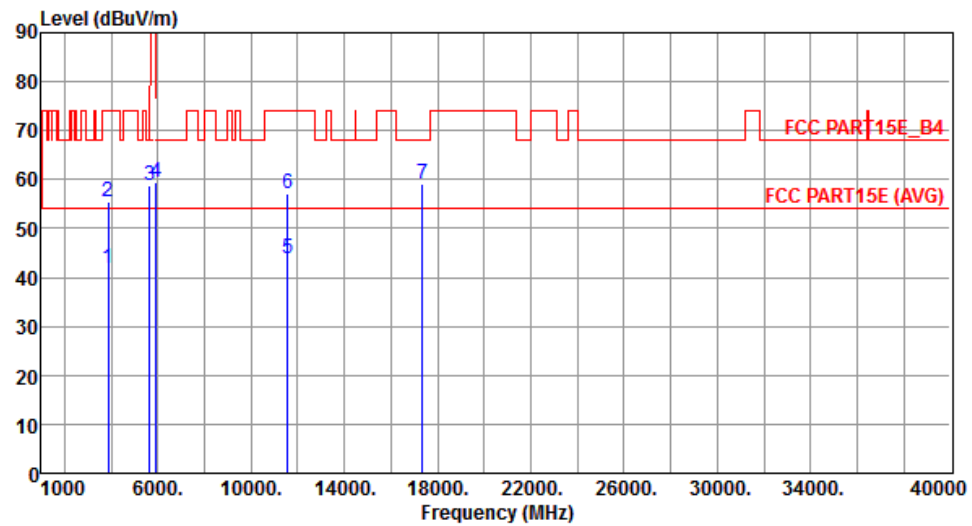


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	41.96	54.00	-12.04	39.91	2.05	Average	100	173
2	3856.66	55.31	74.00	-18.69	53.26	2.05	Peak	100	173
3	5650.00	58.84	68.20	-9.36	53.15	5.69	Peak	292	96
4	5925.00	59.39	68.20	-8.81	53.30	6.09	Peak	292	96
5	11570.00	43.79	54.00	-10.21	29.19	14.60	Average	100	254
6	11570.00	57.11	74.00	-16.89	42.51	14.60	Peak	100	254
7	17355.00	59.05	68.20	-9.15	41.50	17.55	Peak	100	358

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		

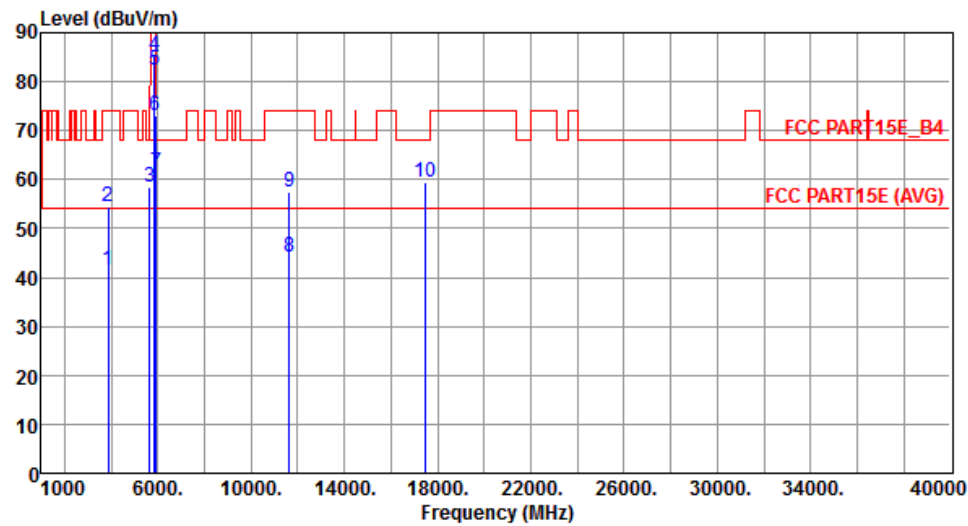

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	41.49	54.00	-12.51	39.35	2.14	Average	100	145
2	3883.33	54.42	74.00	-19.58	52.28	2.14	Peak	100	145
3	5650.00	58.52	68.20	-9.68	52.83	5.69	Peak	164	53
4	5850.00	85.39	122.20	-36.81	79.40	5.99	Peak	164	53
5	5855.00	82.34	110.80	-28.46	76.34	6.00	Peak	164	53
6	5875.00	73.15	105.20	-32.05	67.13	6.02	Peak	164	53
7	5925.00	61.52	68.20	-6.68	55.43	6.09	Peak	164	53
8	11650.00	44.05	54.00	-9.95	29.61	14.44	Average	175	304
9	11650.00	57.58	74.00	-16.42	43.14	14.44	Peak	175	304
10	17475.00	59.35	68.20	-8.85	41.31	18.04	Peak	100	144


Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		

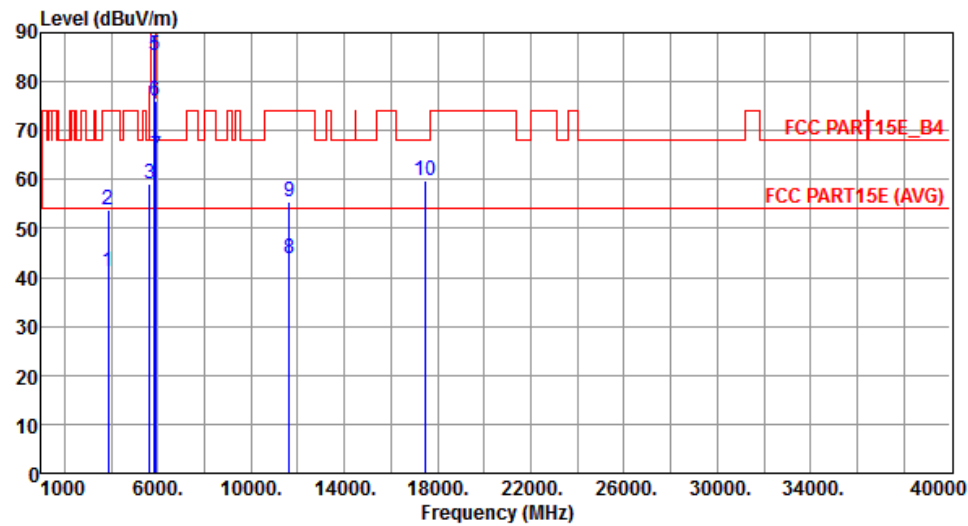

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	41.35	54.00	-12.65	39.21	2.14	Average	155	353
2	3883.33	53.75	74.00	-20.25	51.61	2.14	Peak	155	353
3	5650.00	59.02	68.20	-9.18	53.33	5.69	Peak	292	94
4	5850.00	89.55	122.20	-32.65	83.56	5.99	Peak	292	94
5	5855.00	85.49	110.80	-25.31	79.49	6.00	Peak	292	94
6	5875.00	75.89	105.20	-29.31	69.87	6.02	Peak	292	94
7	5925.00	64.78	68.20	-3.42	58.69	6.09	Peak	292	94
8	11650.00	43.89	54.00	-10.11	29.45	14.44	Average	100	260
9	11650.00	55.43	74.00	-18.57	40.99	14.44	Peak	100	260
10	17475.00	59.65	68.20	-8.55	41.61	18.04	Peak	100	143


3.5.16 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		

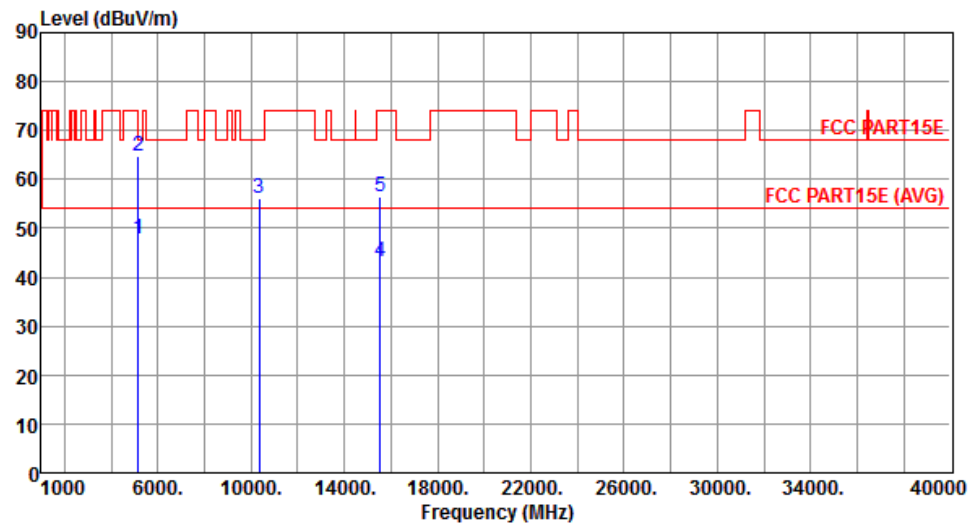


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.73	54.00	-6.27	42.71	5.02	Average	133	324
2	5150.00	64.87	74.00	-9.13	59.85	5.02	Peak	133	324
3	10360.00	56.19	68.20	-12.01	42.45	13.74	Peak	175	25
4	15540.00	43.13	54.00	-10.87	28.16	14.97	Average	162	321
5	15540.00	56.50	74.00	-17.50	41.53	14.97	Peak	162	321

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Vertical		

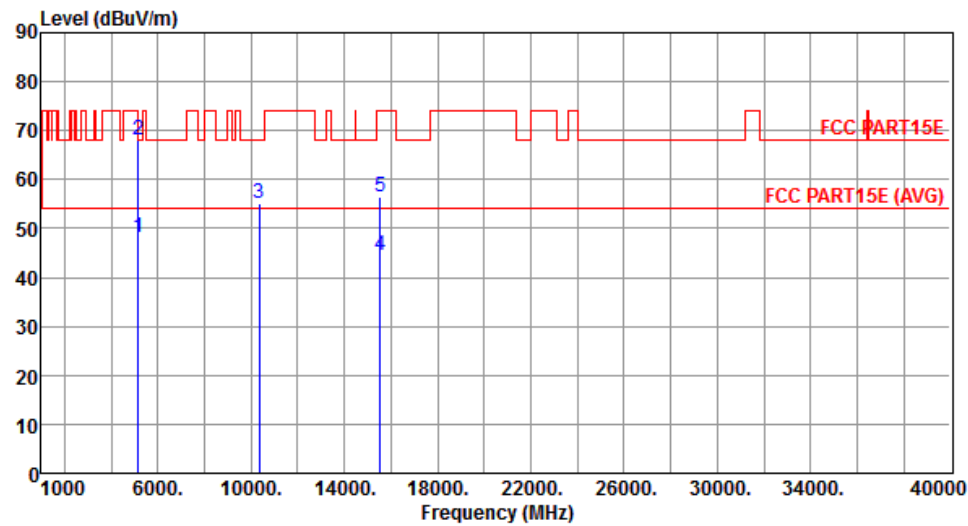


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	48.28	54.00	-5.72	43.26	5.02	Average	261	91
2	5150.00	68.00	74.00	-6.00	62.98	5.02	Peak	261	91
3	10360.00	55.23	68.20	-12.97	41.49	13.74	Peak	181	249
4	15540.00	44.40	54.00	-9.60	29.43	14.97	Average	160	319
5	15540.00	56.45	74.00	-17.55	41.48	14.97	Peak	160	319

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

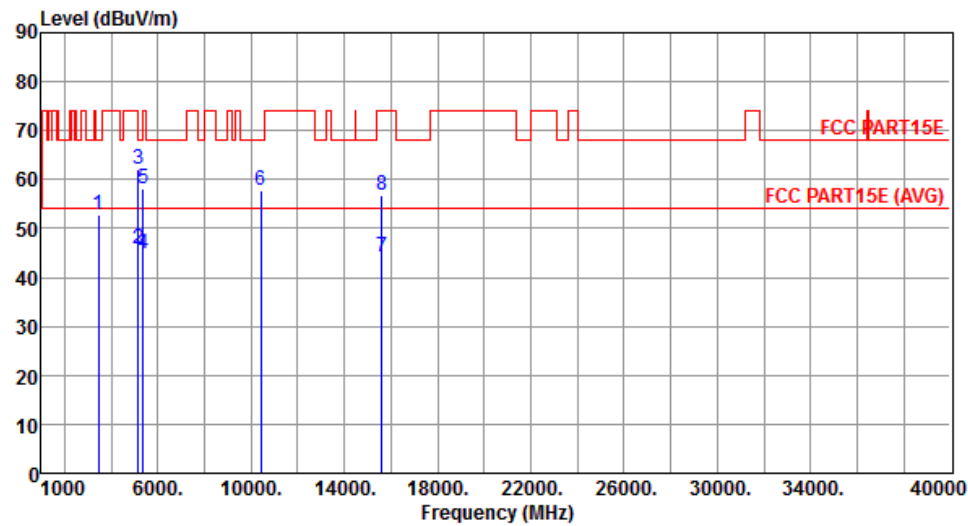


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.66	52.86	68.20	-15.34	52.00	0.86	Peak	100	153
2	5150.00	45.94	54.00	-8.06	40.92	5.02	Average	141	325
3	5150.00	62.18	74.00	-11.82	57.16	5.02	Peak	141	325
4	5350.00	44.73	54.00	-9.27	39.42	5.31	Average	141	325
5	5350.00	58.25	74.00	-15.75	52.94	5.31	Peak	141	325
6	10400.00	57.95	68.20	-10.25	44.18	13.77	Peak	184	26
7	15600.00	44.26	54.00	-9.74	29.32	14.94	Average	171	319
8	15600.00	56.94	74.00	-17.06	42.00	14.94	Peak	171	319

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

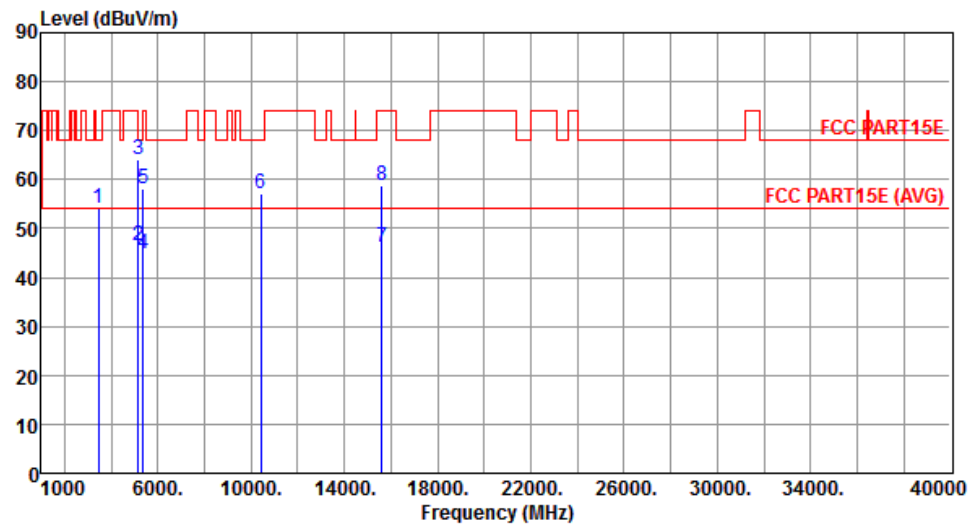


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.66	54.01	68.20	-14.19	53.15	0.86	Peak	100	173
2	5150.00	46.37	54.00	-7.63	41.35	5.02	Average	262	94
3	5150.00	64.25	74.00	-9.75	59.23	5.02	Peak	262	94
4	5350.00	44.93	54.00	-9.07	39.62	5.31	Average	262	94
5	5350.00	58.23	74.00	-15.77	52.92	5.31	Peak	262	94
6	10400.00	57.13	68.20	-11.07	43.36	13.77	Peak	167	250
7	15600.00	46.28	54.00	-7.72	31.34	14.94	Average	162	321
8	15600.00	58.63	74.00	-15.37	43.69	14.94	Peak	162	321

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

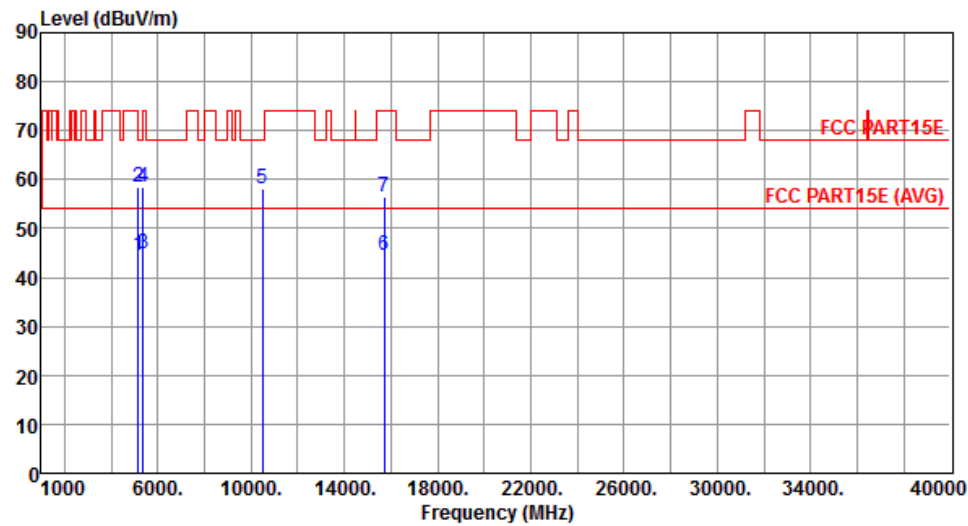


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.40	54.00	-9.60	39.38	5.02	Average	143	324
2	5150.00	58.54	74.00	-15.46	53.52	5.02	Peak	143	324
3	5350.00	44.96	54.00	-9.04	39.65	5.31	Average	143	324
4	5350.00	58.56	74.00	-15.44	53.25	5.31	Peak	143	324
5	10480.00	58.22	68.20	-9.98	44.41	13.81	Peak	143	35
6	15720.00	44.58	54.00	-9.42	29.67	14.91	Average	171	289
7	15720.00	56.59	74.00	-17.41	41.68	14.91	Peak	171	289

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

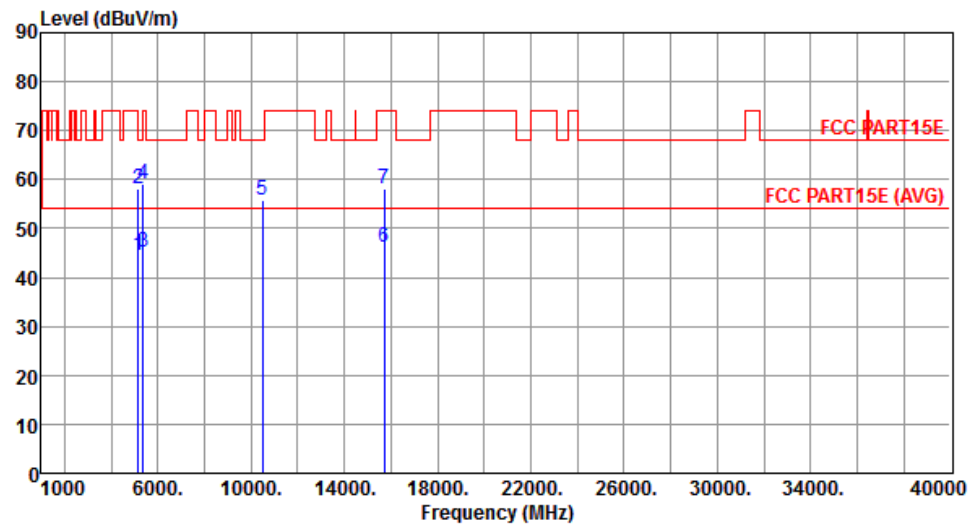


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.48	54.00	-9.52	39.46	5.02	Average	258	93
2	5150.00	57.97	74.00	-16.03	52.95	5.02	Peak	258	93
3	5350.00	45.30	54.00	-8.70	39.99	5.31	Average	258	93
4	5350.00	59.19	74.00	-14.81	53.88	5.31	Peak	258	93
5	10480.00	55.92	68.20	-12.28	42.11	13.81	Peak	173	247
6	15720.00	46.02	54.00	-7.98	31.11	14.91	Average	166	318
7	15720.00	58.26	74.00	-15.74	43.35	14.91	Peak	166	318

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		

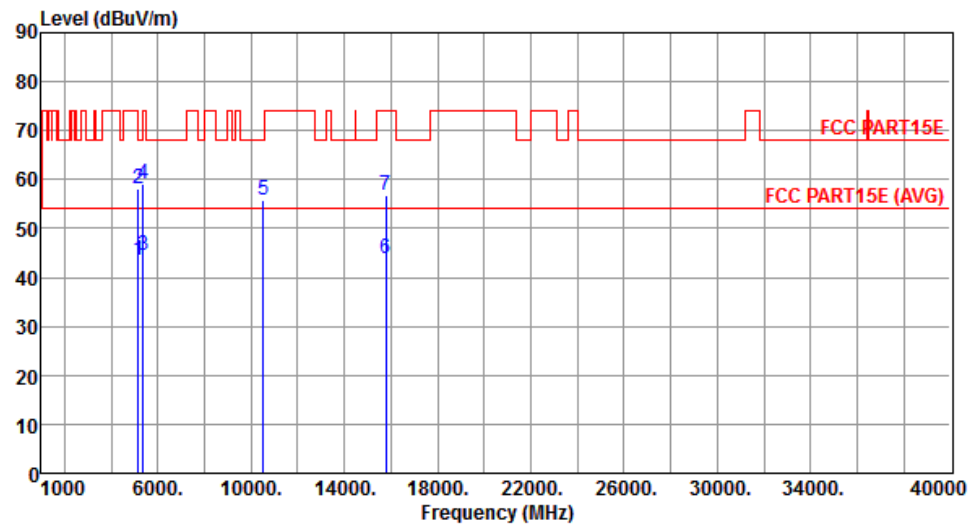


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.65	54.00	-10.35	38.63	5.02	Average	217	324
2	5150.00	58.05	74.00	-15.95	53.03	5.02	Peak	217	324
3	5350.00	44.59	54.00	-9.41	39.28	5.31	Average	217	324
4	5350.00	58.99	74.00	-15.01	53.68	5.31	Peak	217	324
5	10520.00	55.83	68.20	-12.37	41.99	13.84	Peak	207	35
6	15780.00	43.92	54.00	-10.08	29.05	14.87	Average	196	46
7	15780.00	56.63	74.00	-17.37	41.76	14.87	Peak	196	46

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Vertical		

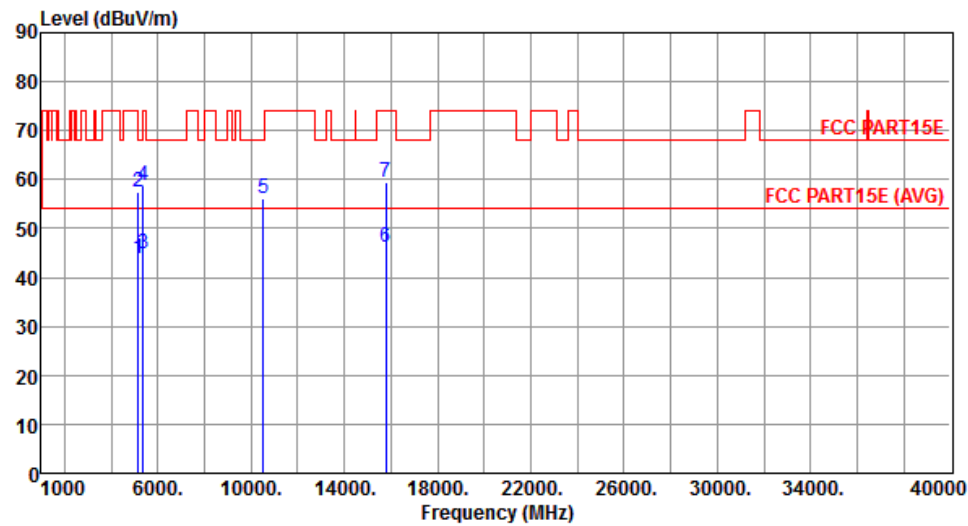


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.77	54.00	-10.23	38.75	5.02	Average	255	93
2	5150.00	57.47	74.00	-16.53	52.45	5.02	Peak	255	93
3	5350.00	44.78	54.00	-9.22	39.47	5.31	Average	255	93
4	5350.00	58.64	74.00	-15.36	53.33	5.31	Peak	255	93
5	10520.00	56.13	68.20	-12.07	42.29	13.84	Peak	106	245
6	15780.00	46.06	54.00	-7.94	31.19	14.87	Average	126	333
7	15780.00	59.34	74.00	-14.66	44.47	14.87	Peak	126	333

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Horizontal		

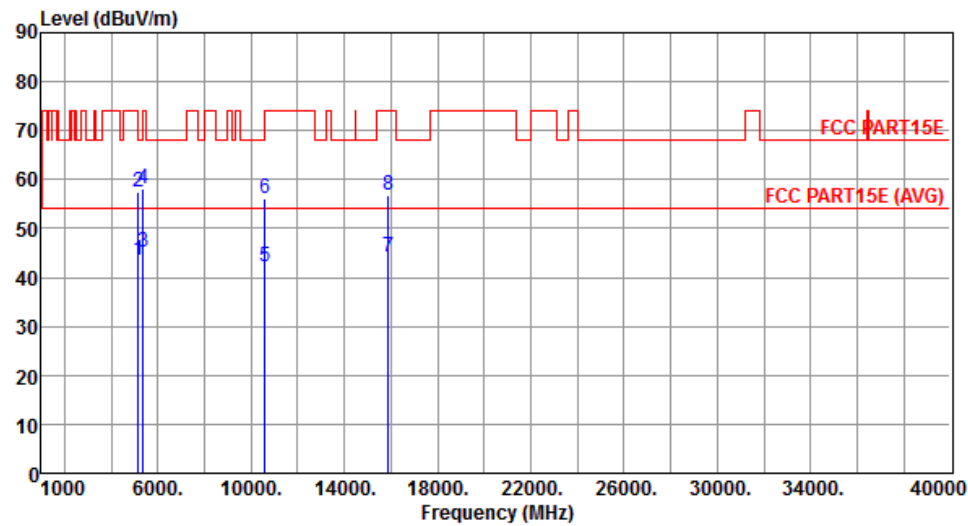


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.61	54.00	-10.39	38.59	5.02	Average	223	325
2	5150.00	57.38	74.00	-16.62	52.36	5.02	Peak	223	325
3	5350.00	45.07	54.00	-8.93	39.76	5.31	Average	223	325
4	5350.00	58.24	74.00	-15.76	52.93	5.31	Peak	223	325
5	10600.00	42.31	54.00	-11.69	28.39	13.92	Average	248	68
6	10600.00	56.11	74.00	-17.89	42.19	13.92	Peak	248	68
7	15900.00	44.19	54.00	-9.81	29.35	14.84	Average	202	45
8	15900.00	56.63	74.00	-17.37	41.79	14.84	Peak	202	45

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Vertical		

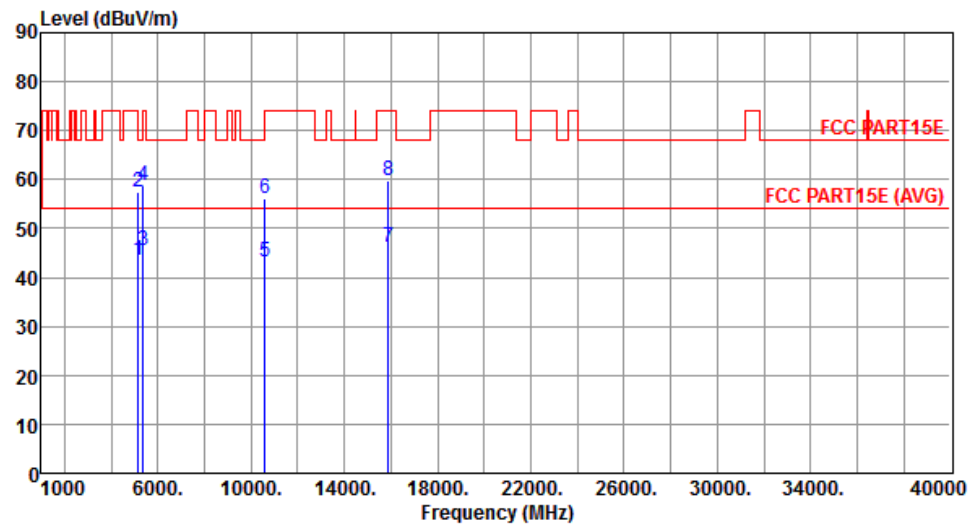


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.65	54.00	-10.35	38.63	5.02	Average	319	94
2	5150.00	57.36	74.00	-16.64	52.34	5.02	Peak	319	94
3	5350.00	45.40	54.00	-8.60	40.09	5.31	Average	319	94
4	5350.00	58.76	74.00	-15.24	53.45	5.31	Peak	319	94
5	10600.00	43.19	54.00	-10.81	29.27	13.92	Average	211	253
6	10600.00	56.08	74.00	-17.92	42.16	13.92	Peak	211	253
7	15900.00	46.29	54.00	-7.71	31.45	14.84	Average	133	327
8	15900.00	59.62	74.00	-14.38	44.78	14.84	Peak	133	327

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		

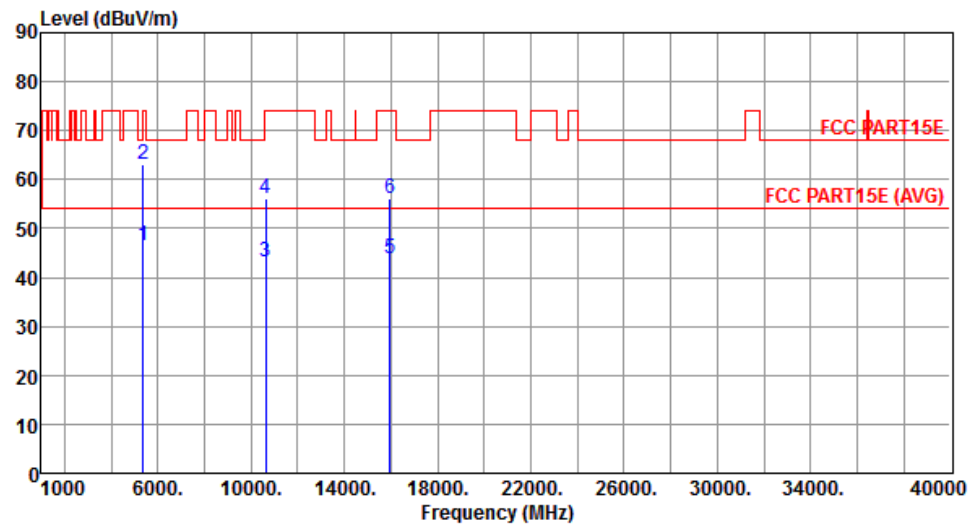


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.41	54.00	-7.59	41.10	5.31	Average	130	324
2	5350.00	63.07	74.00	-10.93	57.76	5.31	Peak	130	324
3	10640.00	43.06	54.00	-10.94	29.10	13.96	Average	233	54
4	10640.00	55.96	74.00	-18.04	42.00	13.96	Peak	233	54
5	15960.00	43.84	54.00	-10.16	29.03	14.81	Average	208	46
6	15960.00	56.18	74.00	-17.82	41.37	14.81	Peak	208	46

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Vertical		

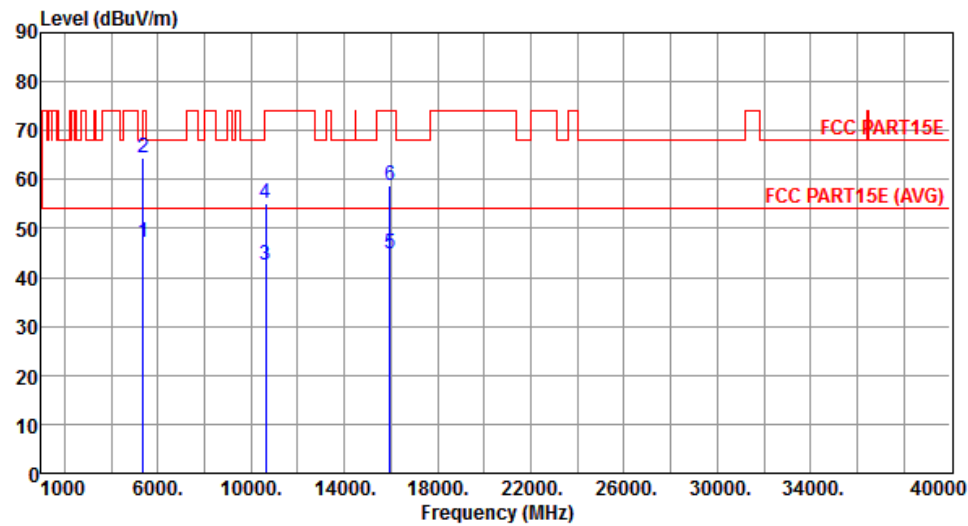


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.05	54.00	-6.95	41.74	5.31	Average	317	93
2	5350.00	64.42	74.00	-9.58	59.11	5.31	Peak	317	93
3	10640.00	42.53	54.00	-11.47	28.57	13.96	Average	116	242
4	10640.00	55.28	74.00	-18.72	41.32	13.96	Peak	116	242
5	15960.00	44.92	54.00	-9.08	30.11	14.81	Average	136	247
6	15960.00	58.82	74.00	-15.18	44.01	14.81	Peak	136	247

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		

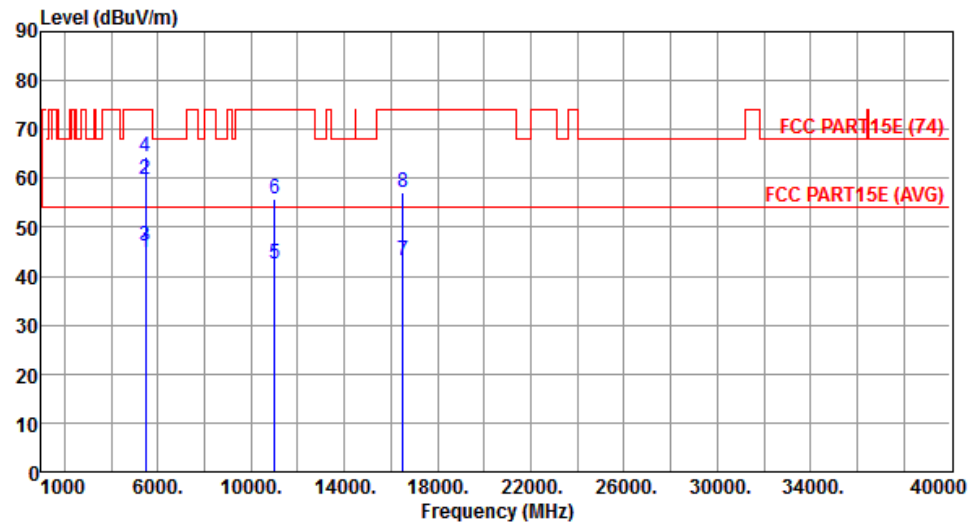


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	44.75	54.00	-9.25	39.29	5.46	Average	152	56
2	5460.00	59.71	74.00	-14.29	54.25	5.46	Peak	152	56
3	5470.00	46.00	54.00	-8.00	40.53	5.47	Average	152	56
4	5470.00	64.56	74.00	-9.44	59.09	5.47	Peak	152	56
5	11000.00	42.63	54.00	-11.37	28.33	14.30	Average	192	31
6	11000.00	55.74	74.00	-18.26	41.44	14.30	Peak	192	31
7	16500.00	43.28	54.00	-10.72	27.44	15.84	Average	100	310
8	16500.00	57.27	74.00	-16.73	41.43	15.84	Peak	100	310

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Vertical		

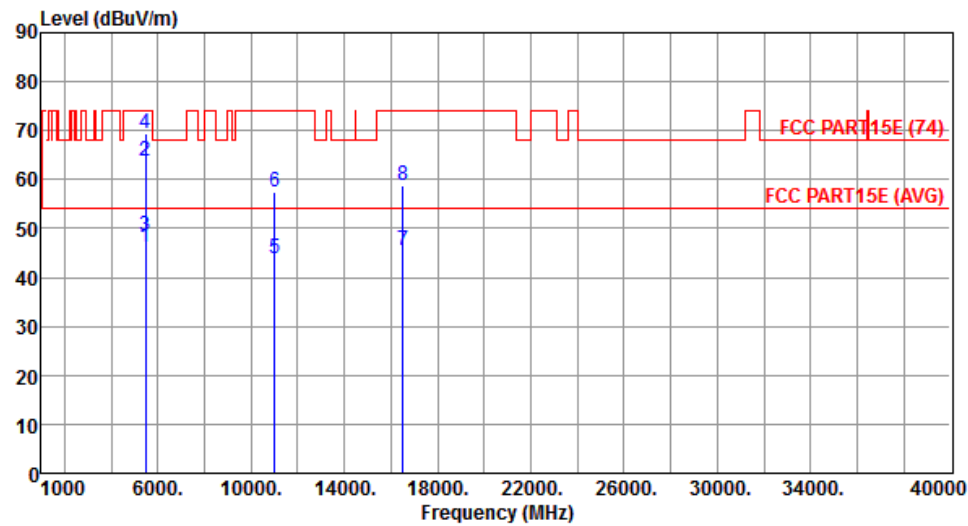


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.21	54.00	-7.79	40.75	5.46	Average	303	95
2	5460.00	63.67	74.00	-10.33	58.21	5.46	Peak	303	95
3	5470.00	48.47	54.00	-5.53	43.00	5.47	Average	303	95
4	5470.00	69.55	74.00	-4.45	64.08	5.47	Peak	303	95
5	11000.00	43.71	54.00	-10.29	29.41	14.30	Average	100	236
6	11000.00	57.58	74.00	-16.42	43.28	14.30	Peak	100	236
7	16500.00	45.52	54.00	-8.48	29.68	15.84	Average	100	252
8	16500.00	58.82	74.00	-15.18	42.98	15.84	Peak	100	252

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		

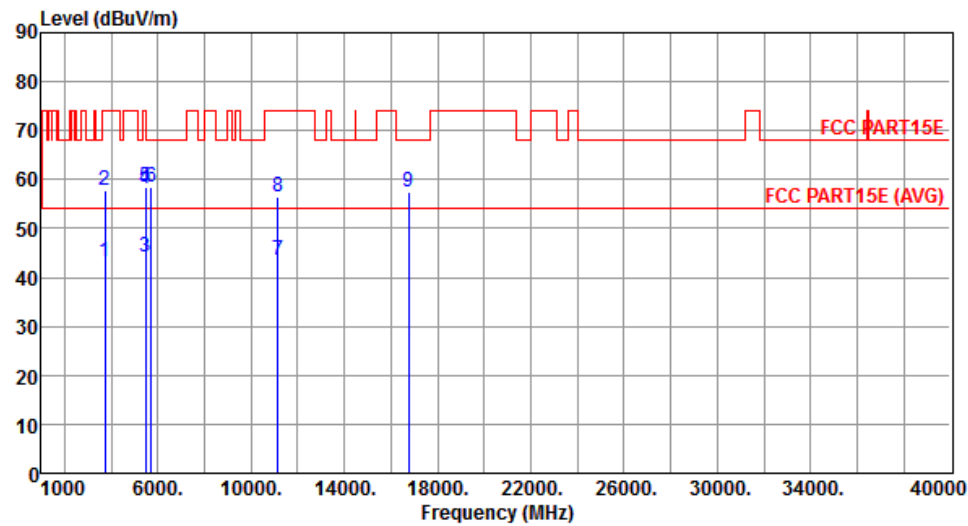


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	43.30	54.00	-10.70	41.70	1.60	Average	156	21
2	3720.00	57.68	74.00	-16.32	56.08	1.60	Peak	156	21
3	5460.00	44.31	54.00	-9.69	38.85	5.46	Average	151	44
4	5460.00	58.23	74.00	-15.77	52.77	5.46	Peak	151	44
5	5470.00	58.30	68.20	-9.90	52.83	5.47	Peak	151	44
6	5725.00	58.52	68.20	-9.68	52.71	5.81	Peak	151	44
7	11160.00	43.66	54.00	-10.34	29.22	14.44	Average	210	23
8	11160.00	56.52	74.00	-17.48	42.08	14.44	Peak	210	23
9	16740.00	57.41	68.20	-10.79	41.44	15.97	Peak	100	334

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Vertical		

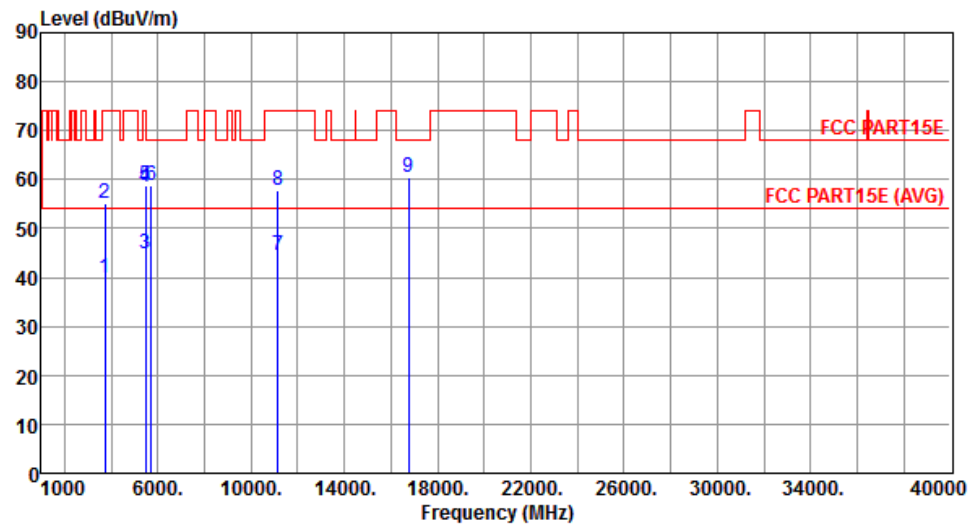


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m			dBuV			cm	deg
1	3720.00	39.88	54.00	-14.12	38.28	1.60	Average	117	341
2	3720.00	55.21	74.00	-18.79	53.61	1.60	Peak	117	341
3	5460.00	44.92	54.00	-9.08	39.46	5.46	Average	305	93
4	5460.00	58.50	74.00	-15.50	53.04	5.46	Peak	305	93
5	5470.00	58.94	68.20	-9.26	53.47	5.47	Peak	305	93
6	5725.00	58.83	68.20	-9.37	53.02	5.81	Peak	305	93
7	11160.00	44.63	54.00	-9.37	30.19	14.44	Average	100	247
8	11160.00	57.76	74.00	-16.24	43.32	14.44	Peak	100	247
9	16740.00	60.29	68.20	-7.91	44.32	15.97	Peak	100	265

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

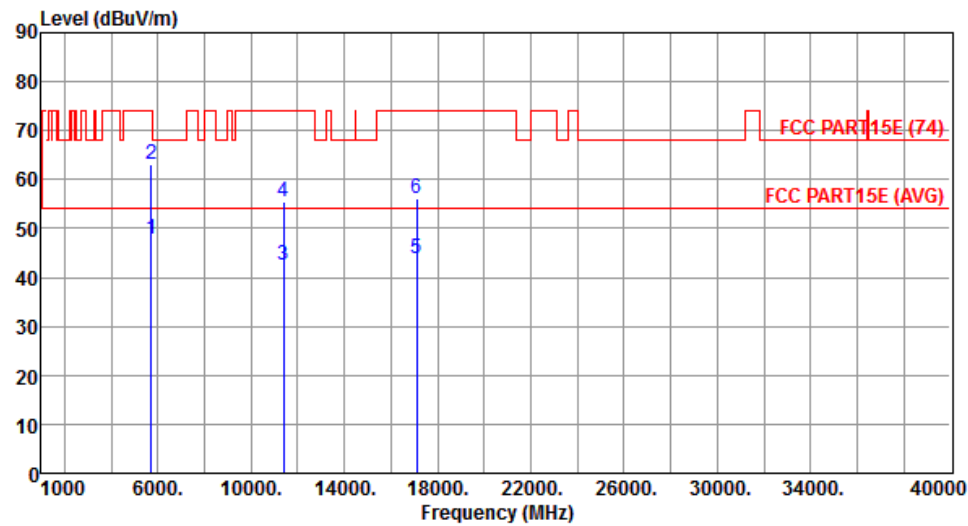


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	47.92	54.00	-6.08	42.11	5.81	Average	151	52
2	5725.00	63.01	74.00	-10.99	57.20	5.81	Peak	151	52
3	11400.00	42.46	54.00	-11.54	27.81	14.65	Average	191	36
4	11400.00	55.51	74.00	-18.49	40.86	14.65	Peak	191	36
5	17100.00	43.95	54.00	-10.05	27.44	16.51	Average	100	322
6	17100.00	56.19	74.00	-17.81	39.68	16.51	Peak	100	322

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Vertical		

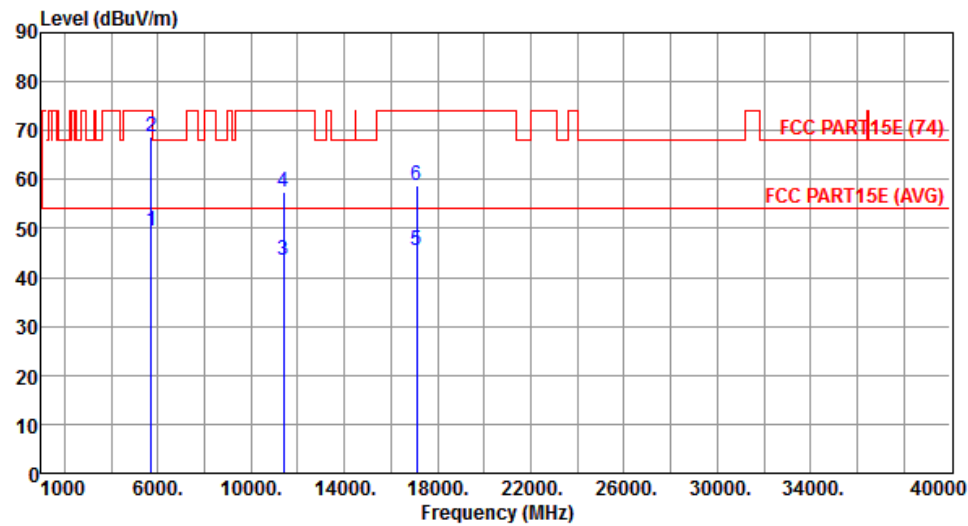


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	49.52	54.00	-4.48	43.71	5.81	Average	303	94
2	5725.00	68.78	74.00	-5.22	62.97	5.81	Peak	303	94
3	11400.00	43.58	54.00	-10.42	28.93	14.65	Average	100	262
4	11400.00	57.58	74.00	-16.42	42.93	14.65	Peak	100	262
5	17100.00	45.34	54.00	-8.66	28.83	16.51	Average	100	269
6	17100.00	58.63	74.00	-15.37	42.12	16.51	Peak	100	269

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		

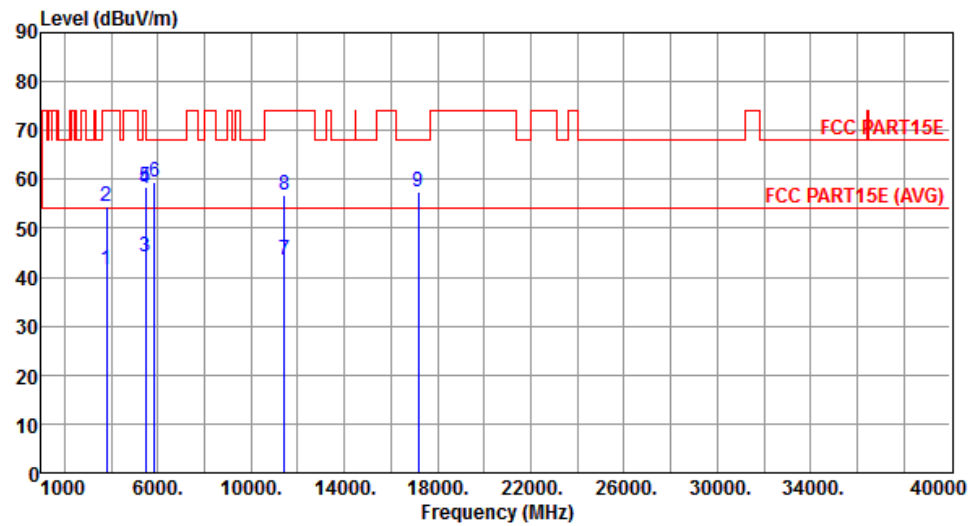


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	41.39	54.00	-12.61	39.49	1.90	Average	175	16
2	3813.33	54.63	74.00	-19.37	52.73	1.90	Peak	175	16
3	5460.00	44.31	54.00	-9.69	38.85	5.46	Average	148	55
4	5460.00	58.13	74.00	-15.87	52.67	5.46	Peak	148	55
5	5470.00	58.51	68.20	-9.69	53.04	5.47	Peak	148	55
6	5850.00	59.37	68.20	-8.83	53.38	5.99	Peak	148	55
7	11440.00	43.52	54.00	-10.48	28.83	14.69	Average	214	17
8	11440.00	56.68	74.00	-17.32	41.99	14.69	Peak	214	17
9	17160.00	57.59	68.20	-10.61	40.83	16.76	Peak	100	337

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Vertical		

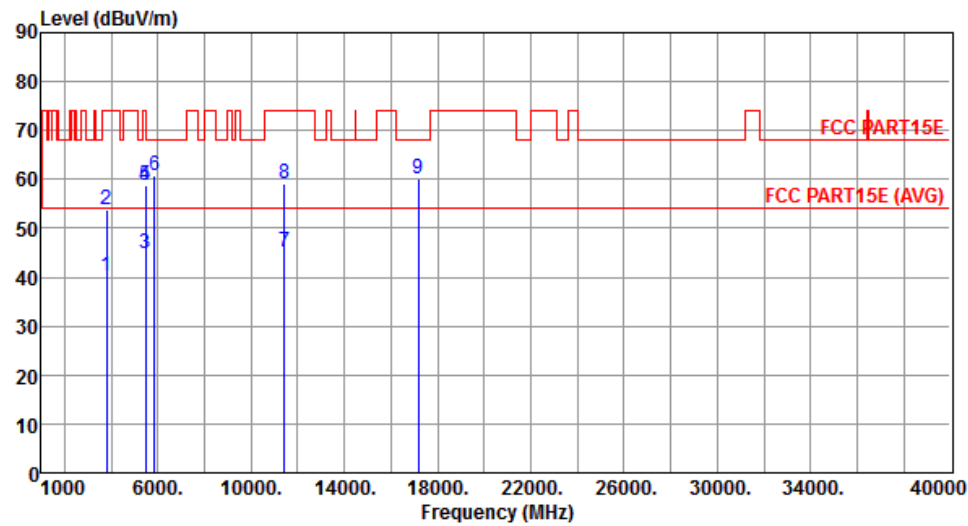


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	40.32	54.00	-13.68	38.42	1.90	Average	110	333
2	3813.33	53.75	74.00	-20.25	51.85	1.90	Peak	110	333
3	5460.00	44.98	54.00	-9.02	39.52	5.46	Average	300	90
4	5460.00	58.92	74.00	-15.08	53.46	5.46	Peak	300	90
5	5470.00	58.91	68.20	-9.29	53.44	5.47	Peak	300	90
6	5850.00	60.74	68.20	-7.46	54.75	5.99	Peak	300	90
7	11440.00	45.11	54.00	-8.89	30.42	14.69	Average	100	260
8	11440.00	58.97	74.00	-15.03	44.28	14.69	Peak	100	260
9	17160.00	60.21	68.20	-7.99	43.45	16.76	Peak	100	248

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

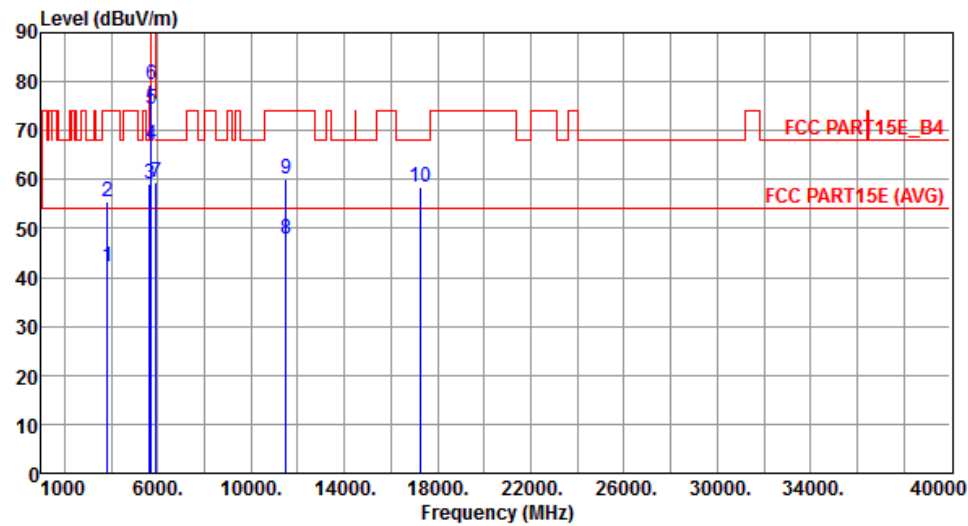


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	42.26	54.00	-11.74	40.30	1.96	Average	201	330
2	3830.00	55.30	74.00	-18.70	53.34	1.96	Peak	201	330
3	5650.00	59.01	68.20	-9.19	53.32	5.69	Peak	150	61
4	5700.00	67.22	105.20	-37.98	61.45	5.77	Peak	150	61
5	5720.00	74.52	110.80	-36.28	68.73	5.79	Peak	150	61
6	5725.00	79.21	122.20	-42.99	73.40	5.81	Peak	150	61
7	5925.00	59.54	68.20	-8.66	53.45	6.09	Peak	150	61
8	11490.00	47.82	54.00	-6.18	33.09	14.73	Average	172	298
9	11490.00	60.14	74.00	-13.86	45.41	14.73	Peak	172	298
10	17235.00	58.33	68.20	-9.87	41.26	17.07	Peak	168	36

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Vertical		

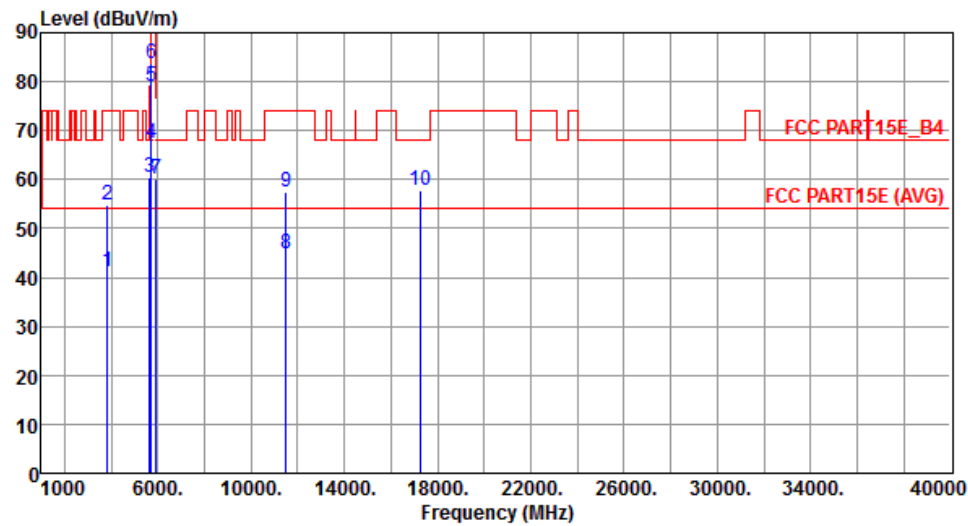


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	41.02	54.00	-12.98	39.06	1.96	Average	158	138
2	3830.00	54.72	74.00	-19.28	52.76	1.96	Peak	158	138
3	5650.00	60.37	68.20	-7.83	54.68	5.69	Peak	298	92
4	5700.00	67.43	105.20	-37.77	61.66	5.77	Peak	298	92
5	5720.00	79.08	110.80	-31.72	73.29	5.79	Peak	298	92
6	5725.00	83.83	122.20	-38.37	78.02	5.81	Peak	298	92
7	5925.00	59.99	68.20	-8.21	53.90	6.09	Peak	298	92
8	11490.00	44.69	54.00	-9.31	29.96	14.73	Average	176	333
9	11490.00	57.48	74.00	-16.52	42.75	14.73	Peak	176	333
10	17235.00	57.92	68.20	-10.28	40.85	17.07	Peak	170	341

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		

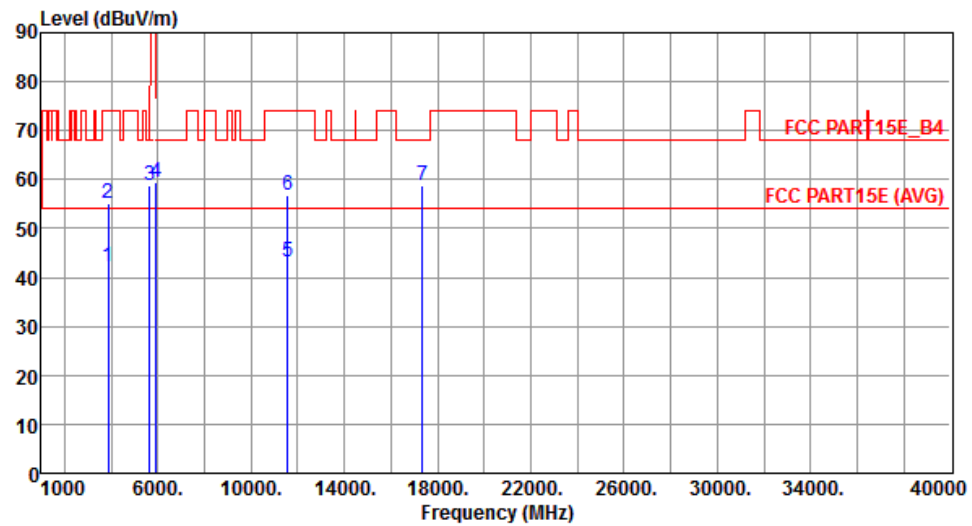


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	42.21	54.00	-11.79	40.16	2.05	Average	152	32
2	3856.66	55.18	74.00	-18.82	53.13	2.05	Peak	152	32
3	5650.00	58.90	68.20	-9.30	53.21	5.69	Peak	154	49
4	5925.00	59.57	68.20	-8.63	53.48	6.09	Peak	154	49
5	11570.00	43.20	54.00	-10.80	28.60	14.60	Average	100	244
6	11570.00	56.68	74.00	-17.32	42.08	14.60	Peak	100	244
7	17355.00	58.66	68.20	-9.54	41.11	17.55	Peak	100	175

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Vertical		

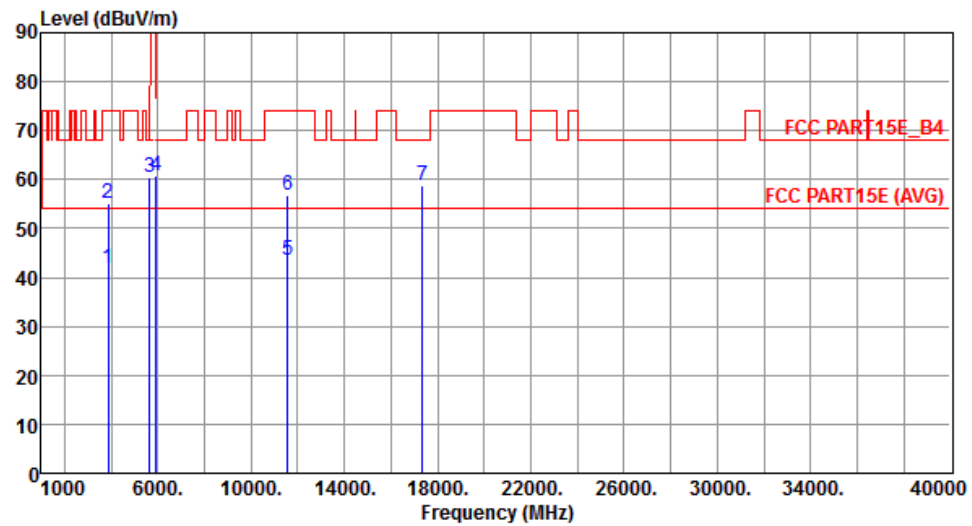


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	41.75	54.00	-12.25	39.70	2.05	Average	100	168
2	3856.66	55.16	74.00	-18.84	53.11	2.05	Peak	100	168
3	5650.00	60.32	68.20	-7.88	54.63	5.69	Peak	297	92
4	5925.00	60.84	68.20	-7.36	54.75	6.09	Peak	297	92
5	11570.00	43.52	54.00	-10.48	28.92	14.60	Average	100	263
6	11570.00	56.91	74.00	-17.09	42.31	14.60	Peak	100	263
7	17355.00	58.83	68.20	-9.37	41.28	17.55	Peak	100	364

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

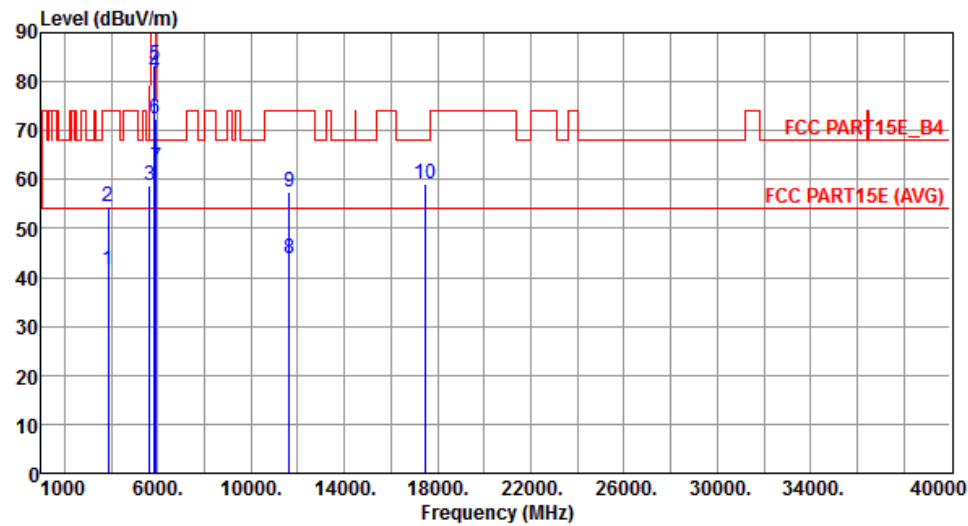

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	41.56	54.00	-12.44	39.42	2.14	Average	100	152
2	3883.33	54.52	74.00	-19.48	52.38	2.14	Peak	100	152
3	5650.00	58.65	68.20	-9.55	52.96	5.69	Peak	152	49
4	5850.00	81.64	122.20	-40.56	75.65	5.99	Peak	152	49
5	5855.00	83.24	110.80	-27.56	77.24	6.00	Peak	152	49
6	5875.00	72.44	105.20	-32.76	66.42	6.02	Peak	152	49
7	5925.00	62.50	68.20	-5.70	56.41	6.09	Peak	152	49
8	11650.00	43.92	54.00	-10.08	29.48	14.44	Average	171	301
9	11650.00	57.43	74.00	-16.57	42.99	14.44	Peak	171	301
10	17475.00	59.22	68.20	-8.98	41.18	18.04	Peak	100	156


Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

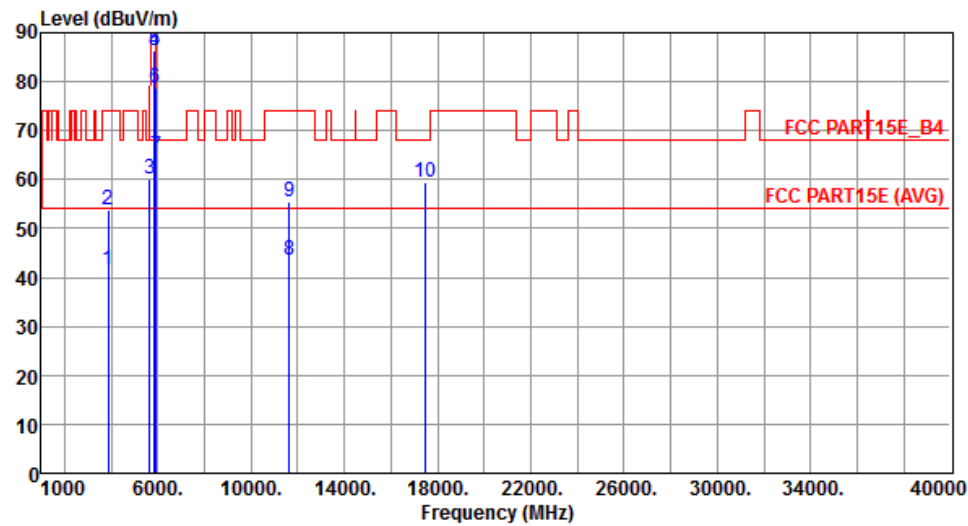

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m	dBuV/m	dB	dBuV			cm	deg
1	3883.33	41.41	54.00	-12.59	39.27	2.14	Average	161	348
2	3883.33	53.82	74.00	-20.18	51.68	2.14	Peak	161	348
3	5650.00	59.96	68.20	-8.24	54.27	5.69	Peak	292	91
4	5850.00	86.33	122.20	-35.87	80.34	5.99	Peak	292	91
5	5855.00	86.34	110.80	-24.46	80.34	6.00	Peak	292	91
6	5875.00	78.80	105.20	-26.40	72.78	6.02	Peak	292	91
7	5925.00	64.86	68.20	-3.34	58.77	6.09	Peak	292	91
8	11650.00	43.63	54.00	-10.37	29.19	14.44	Average	100	254
9	11650.00	55.32	74.00	-18.68	40.88	14.44	Peak	100	254
10	17475.00	59.51	68.20	-8.69	41.47	18.04	Peak	100	138


3.5.17 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		

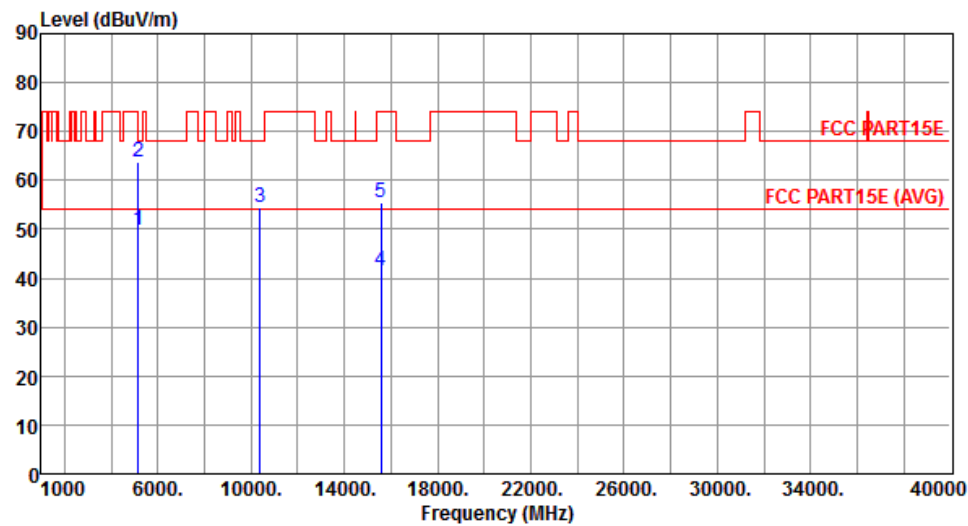


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	49.96	54.00	-4.04	44.94	5.02	Average	145	319
2	5150.00	63.62	74.00	-10.38	58.60	5.02	Peak	145	319
3	10380.00	54.39	68.20	-13.81	40.64	13.75	Peak	100	325
4	15570.00	41.52	54.00	-12.48	26.56	14.96	Average	100	352
5	15570.00	55.31	74.00	-18.69	40.35	14.96	Peak	100	352

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

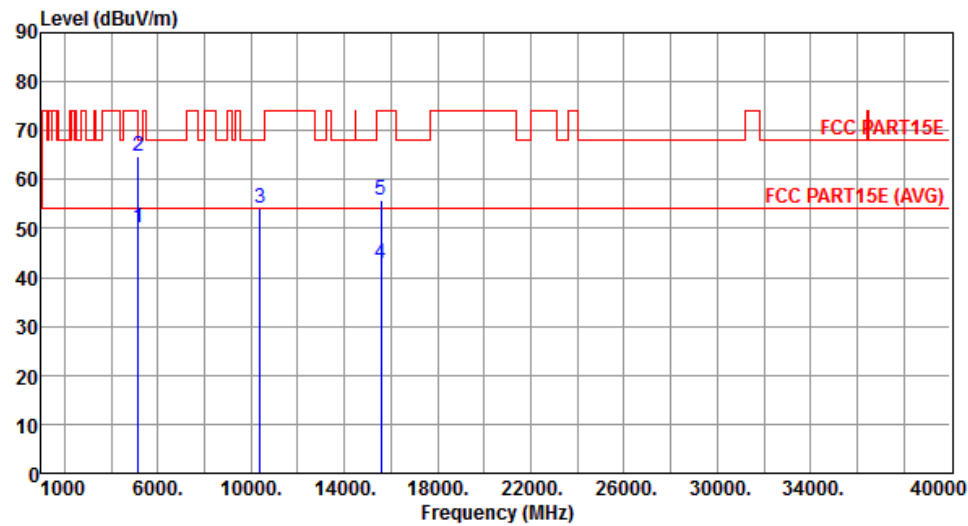


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	50.02	54.00	-3.98	45.00	5.02	Average	259	92
2	5150.00	64.84	74.00	-9.16	59.82	5.02	Peak	259	92
3	10380.00	54.09	68.20	-14.11	40.34	13.75	Peak	134	356
4	15570.00	42.77	54.00	-11.23	27.81	14.96	Average	162	336
5	15570.00	55.63	74.00	-18.37	40.67	14.96	Peak	162	336

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

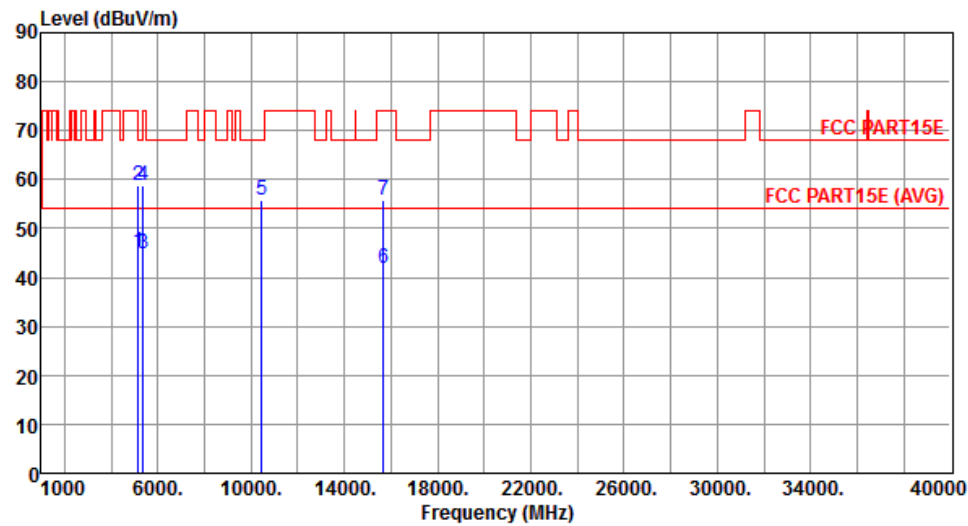


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.32	54.00	-8.68	40.30	5.02	Average	140	322
2	5150.00	58.93	74.00	-15.07	53.91	5.02	Peak	140	322
3	5350.00	44.71	54.00	-9.29	39.40	5.31	Average	140	322
4	5350.00	58.71	74.00	-15.29	53.40	5.31	Peak	140	322
5	10460.00	55.67	68.20	-12.53	41.88	13.79	Peak	100	321
6	15690.00	41.76	54.00	-12.24	26.84	14.92	Average	100	342
7	15690.00	55.69	74.00	-18.31	40.77	14.92	Peak	100	342

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

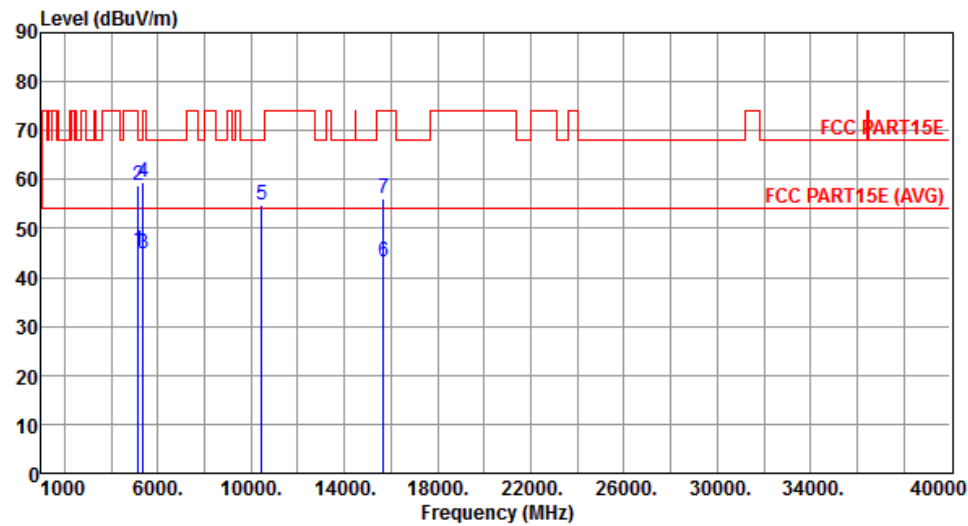


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.44	54.00	-8.56	40.42	5.02	Average	258	93
2	5150.00	58.71	74.00	-15.29	53.69	5.02	Peak	258	93
3	5350.00	44.94	54.00	-9.06	39.63	5.31	Average	258	93
4	5350.00	59.39	74.00	-14.61	54.08	5.31	Peak	258	93
5	10460.00	54.75	68.20	-13.45	40.96	13.79	Peak	136	252
6	15690.00	43.29	54.00	-10.71	28.37	14.92	Average	167	330
7	15690.00	56.04	74.00	-17.96	41.12	14.92	Peak	167	330

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		

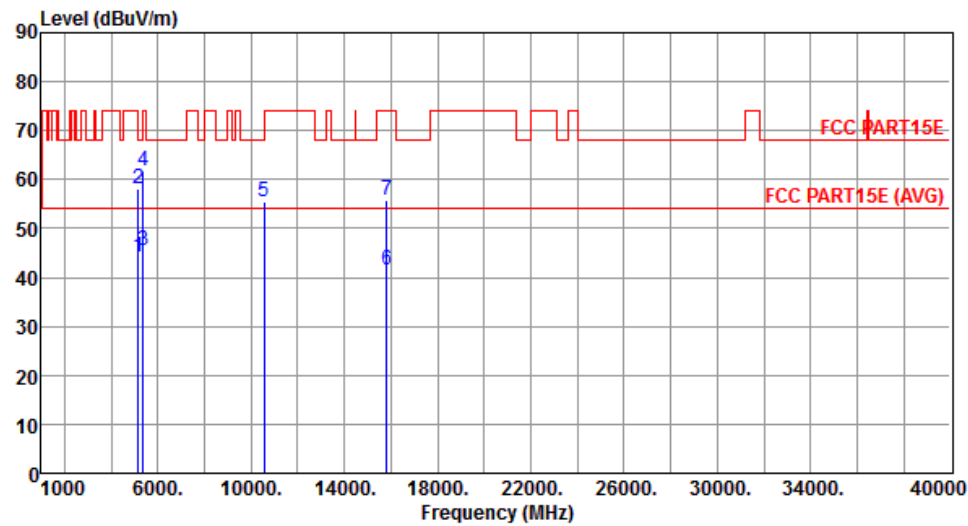


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.12	54.00	-9.88	39.10	5.02	Average	151	324
2	5150.00	58.03	74.00	-15.97	53.01	5.02	Peak	151	324
3	5350.00	45.40	54.00	-8.60	40.09	5.31	Average	151	324
4	5350.00	61.61	74.00	-12.39	56.30	5.31	Peak	151	324
5	10540.00	55.61	68.20	-12.59	41.75	13.86	Peak	100	318
6	15810.00	41.66	54.00	-12.34	26.80	14.86	Average	100	346
7	15810.00	55.74	74.00	-18.26	40.88	14.86	Peak	100	346

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Vertical		

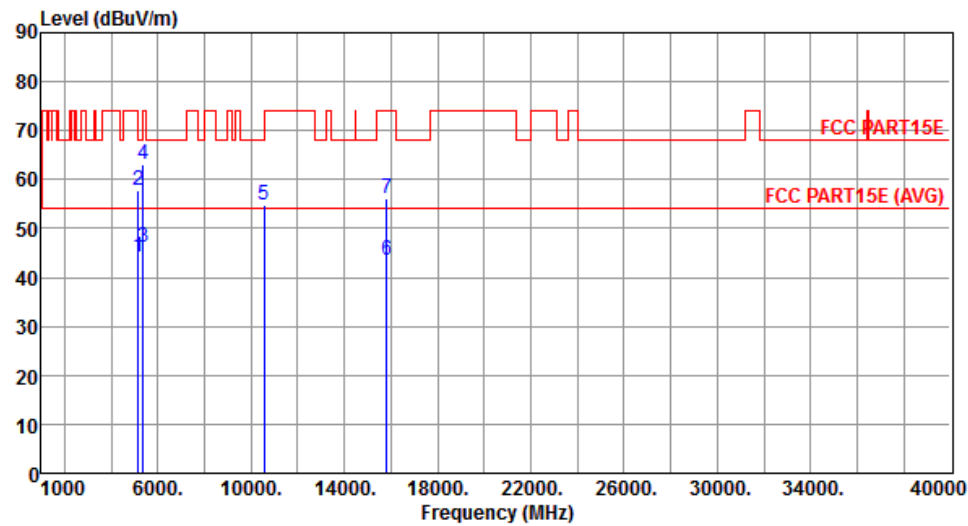


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.27	54.00	-9.73	39.25	5.02	Average	256	90
2	5150.00	57.77	74.00	-16.23	52.75	5.02	Peak	256	90
3	5350.00	46.07	54.00	-7.93	40.76	5.31	Average	256	90
4	5350.00	62.96	74.00	-11.04	57.65	5.31	Peak	256	90
5	10540.00	54.83	68.20	-13.37	40.97	13.86	Peak	140	358
6	15810.00	43.36	54.00	-10.64	28.50	14.86	Average	161	332
7	15810.00	56.21	74.00	-17.79	41.35	14.86	Peak	161	332

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		

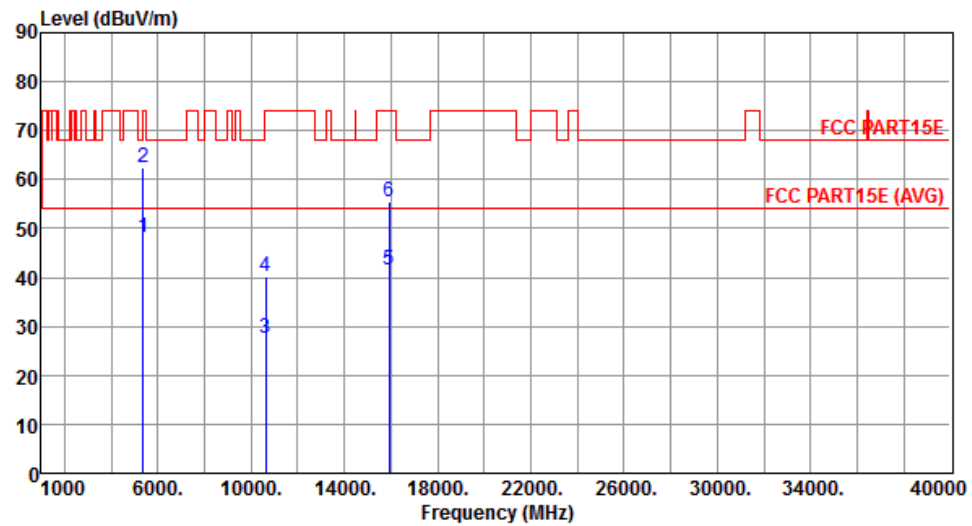


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	48.07	54.00	-5.93	42.76	5.31	Average	158	315
2	5350.00	62.39	74.00	-11.61	57.08	5.31	Peak	158	315
3	10620.00	27.60	54.00	-26.40	13.67	13.93	Average	100	321
4	10620.00	40.33	74.00	-33.67	26.40	13.93	Peak	100	321
5	15930.00	41.51	54.00	-12.49	26.69	14.82	Average	100	348
6	15930.00	55.35	74.00	-18.65	40.53	14.82	Peak	100	348

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Vertical		

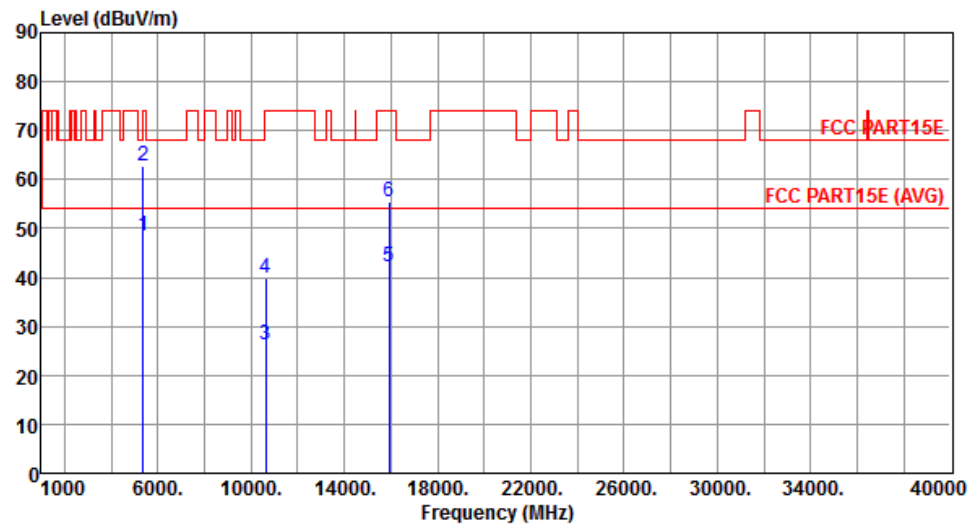


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	48.52	54.00	-5.48	43.21	5.31	Average	260	90
2	5350.00	62.77	74.00	-11.23	57.46	5.31	Peak	260	90
3	10620.00	26.38	54.00	-27.62	12.45	13.93	Average	130	351
4	10620.00	39.71	74.00	-34.29	25.78	13.93	Peak	130	351
5	15930.00	42.32	54.00	-11.68	27.50	14.82	Average	159	332
6	15930.00	55.34	74.00	-18.66	40.52	14.82	Peak	159	332

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		

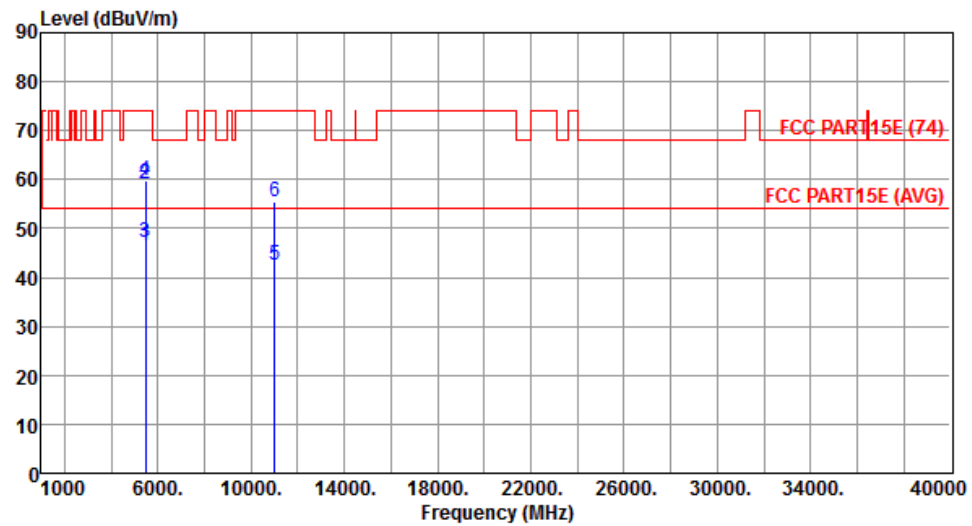


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.64	54.00	-7.36	41.18	5.46	Average	152	49
2	5460.00	59.04	74.00	-14.96	53.58	5.46	Peak	152	49
3	5470.00	47.18	54.00	-6.82	41.71	5.47	Average	152	49
4	5470.00	59.92	74.00	-14.08	54.45	5.47	Peak	152	49
5	11020.00	42.44	54.00	-11.56	28.12	14.32	Average	195	22
6	11020.00	55.53	74.00	-18.47	41.21	14.32	Peak	195	22

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Vertical		

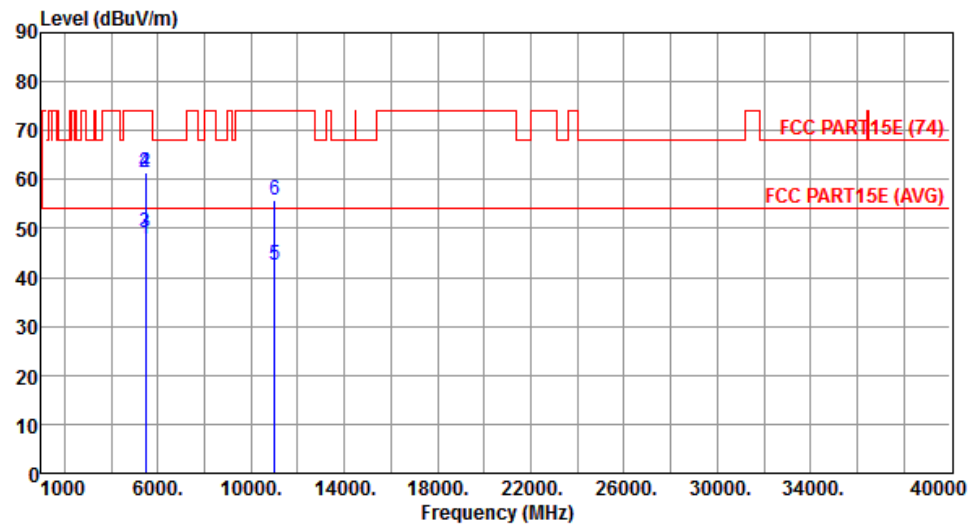


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.73	54.00	-6.27	42.27	5.46	Average	305	91
2	5460.00	61.38	74.00	-12.62	55.92	5.46	Peak	305	91
3	5470.00	49.12	54.00	-4.88	43.65	5.47	Average	305	91
4	5470.00	61.49	74.00	-12.51	56.02	5.47	Peak	305	91
5	11020.00	42.55	54.00	-11.45	28.23	14.32	Average	100	242
6	11020.00	55.88	74.00	-18.12	41.56	14.32	Peak	100	242

Modulation	VHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		

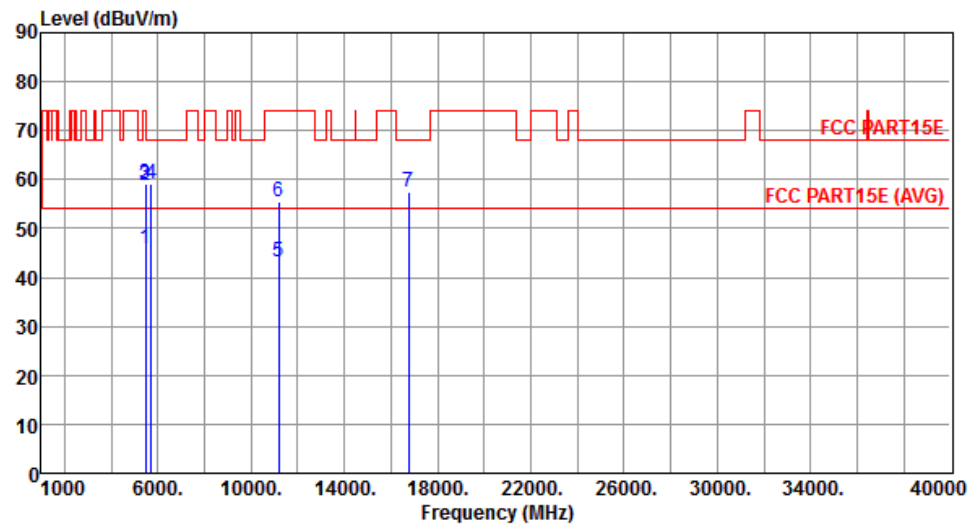


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.68	54.00	-8.32	40.22	5.46	Average	161	53
2	5460.00	58.90	74.00	-15.10	53.44	5.46	Peak	161	53
3	5470.00	59.24	68.20	-8.96	53.77	5.47	Peak	161	53
4	5725.00	59.25	68.20	-8.95	53.44	5.81	Peak	161	53
5	11180.00	43.01	54.00	-10.99	28.55	14.46	Average	200	18
6	11180.00	55.51	74.00	-18.49	41.05	14.46	Peak	200	18
7	16770.00	57.52	68.20	-10.68	41.54	15.98	Peak	100	325

Modulation	VHT40	Test Freq. (MHz)	5590
Polarization	Vertical		

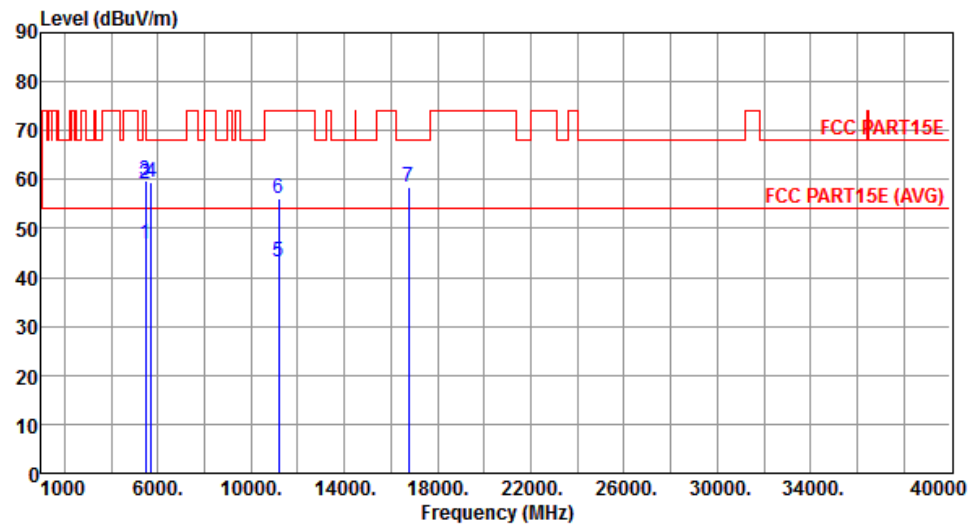


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.81	54.00	-7.19	41.35	5.46	Average	302	90
2	5460.00	59.23	74.00	-14.77	53.77	5.46	Peak	302	90
3	5470.00	59.72	68.20	-8.48	54.25	5.47	Peak	302	90
4	5725.00	59.56	68.20	-8.64	53.75	5.81	Peak	302	90
5	11180.00	43.02	54.00	-10.98	28.56	14.46	Average	100	241
6	11180.00	55.99	74.00	-18.01	41.53	14.46	Peak	100	241
7	16770.00	58.51	68.20	-9.69	42.53	15.98	Peak	100	165

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Horizontal		

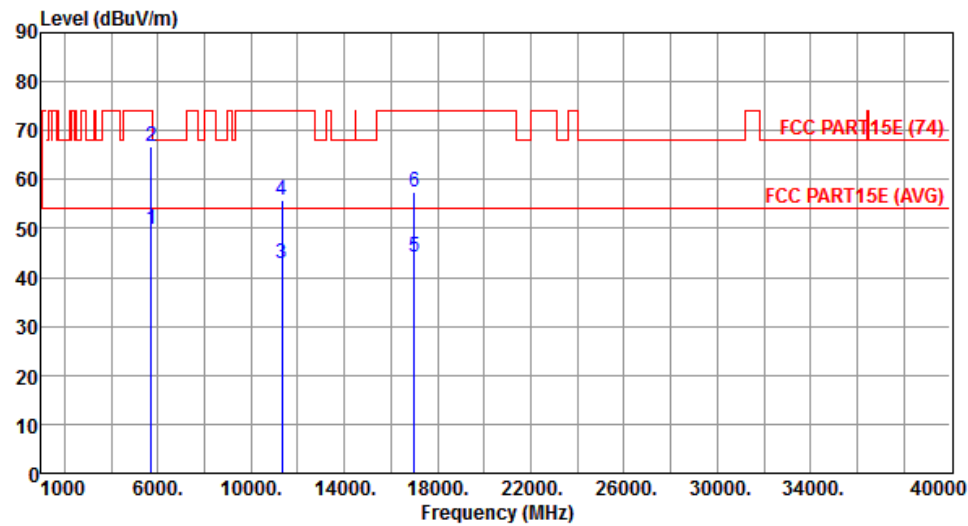


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	49.83	54.00	-4.17	44.02	5.81	Average	161	52
2	5725.00	66.89	74.00	-7.11	61.08	5.81	Peak	161	52
3	11340.00	42.84	54.00	-11.16	28.24	14.60	Average	192	40
4	11340.00	55.65	74.00	-18.35	41.05	14.60	Peak	192	40
5	17010.00	44.27	54.00	-9.73	28.12	16.15	Average	100	305
6	17010.00	57.40	74.00	-16.60	41.25	16.15	Peak	100	305

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Vertical		

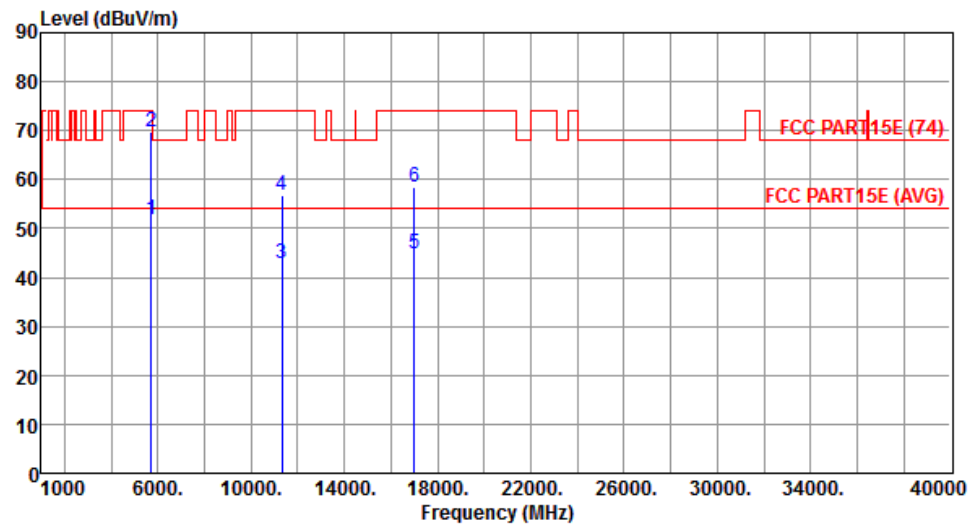


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	51.81	54.00	-2.19	46.00	5.81	Average	296	93
2	5725.00	69.87	74.00	-4.13	64.06	5.81	Peak	296	93
3	11340.00	42.95	54.00	-11.05	28.35	14.60	Average	100	252
4	11340.00	56.83	74.00	-17.17	42.23	14.60	Peak	100	252
5	17010.00	44.83	54.00	-9.17	28.68	16.15	Average	100	268
6	17010.00	58.59	74.00	-15.41	42.44	16.15	Peak	100	268

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		

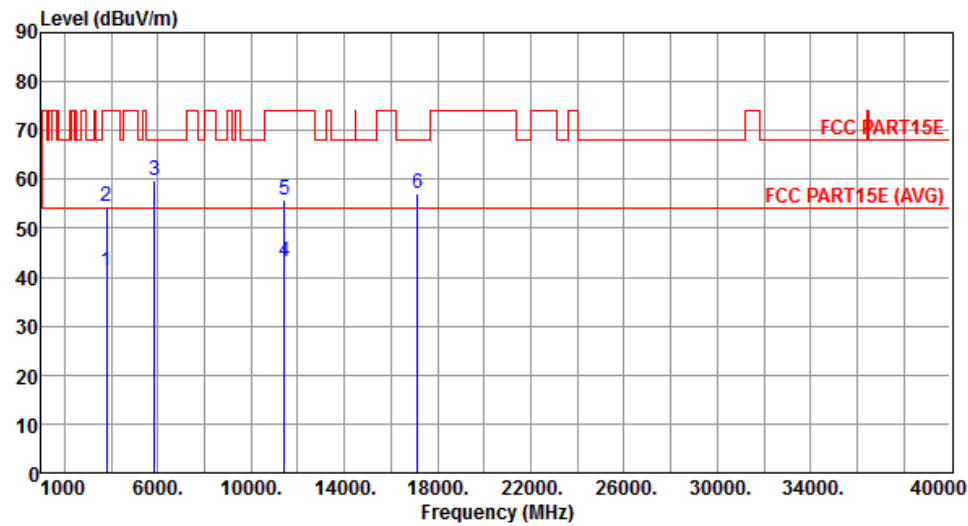


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3806.66	41.30	54.00	-12.70	39.42	1.88	Average	155	20
2	3806.66	54.36	74.00	-19.64	52.48	1.88	Peak	155	20
3	5850.00	59.77	68.20	-8.43	53.78	5.99	Peak	160	53
4	11420.00	43.02	54.00	-10.98	28.35	14.67	Average	190	38
5	11420.00	55.91	74.00	-18.09	41.24	14.67	Peak	190	38
6	17130.00	57.08	68.20	-11.12	40.44	16.64	Peak	100	302

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Vertical		

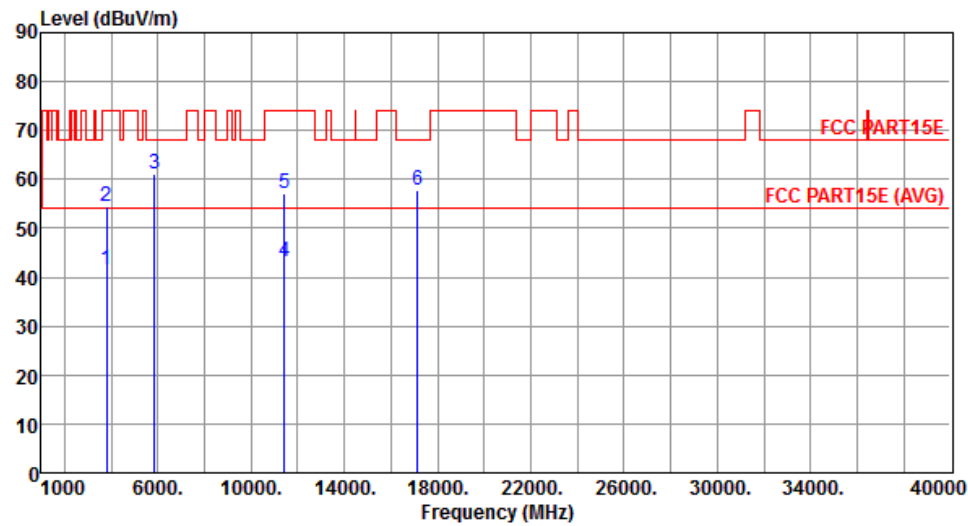


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3806.66	41.44	54.00	-12.56	39.56	1.88	Average	100	333
2	3806.66	54.41	74.00	-19.59	52.53	1.88	Peak	100	333
3	5850.00	61.20	68.20	-7.00	55.21	5.99	Peak	300	92
4	11420.00	43.09	54.00	-10.91	28.42	14.67	Average	100	250
5	11420.00	56.98	74.00	-17.02	42.31	14.67	Peak	100	250
6	17130.00	57.95	68.20	-10.25	41.31	16.64	Peak	100	265

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		

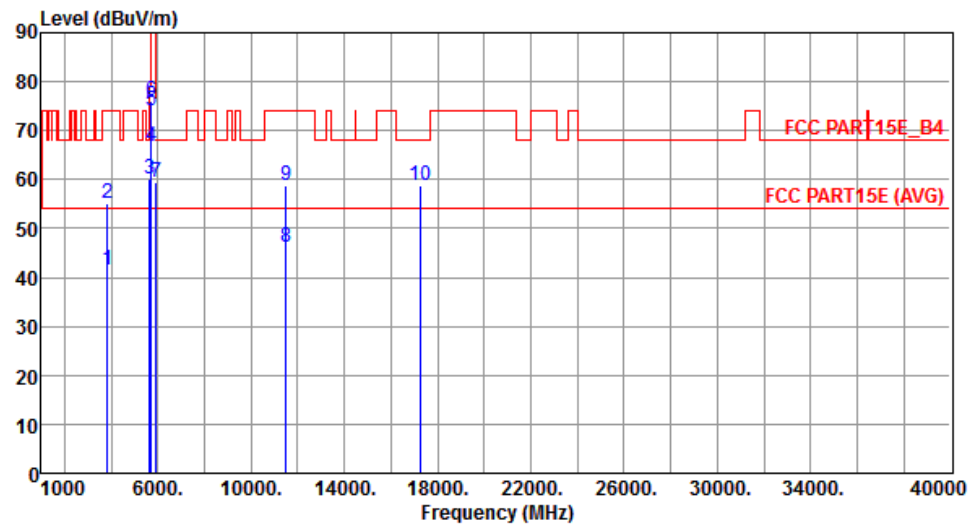


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3836.66	41.54	54.00	-12.46	39.56	1.98	Average	202	330
2	3836.66	55.09	74.00	-18.91	53.11	1.98	Peak	202	330
3	5650.00	60.24	68.20	-7.96	54.55	5.69	Peak	165	56
4	5700.00	66.89	105.20	-38.31	61.12	5.77	Peak	165	56
5	5720.00	74.11	110.80	-36.69	68.32	5.79	Peak	165	56
6	5725.00	76.20	122.20	-46.00	70.39	5.81	Peak	165	56
7	5925.00	59.46	68.20	-8.74	53.37	6.09	Peak	165	56
8	11510.00	46.25	54.00	-7.75	31.53	14.72	Average	168	300
9	11510.00	58.93	74.00	-15.07	44.21	14.72	Peak	168	300
10	17265.00	58.63	68.20	-9.57	41.46	17.17	Peak	172	30

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Vertical		

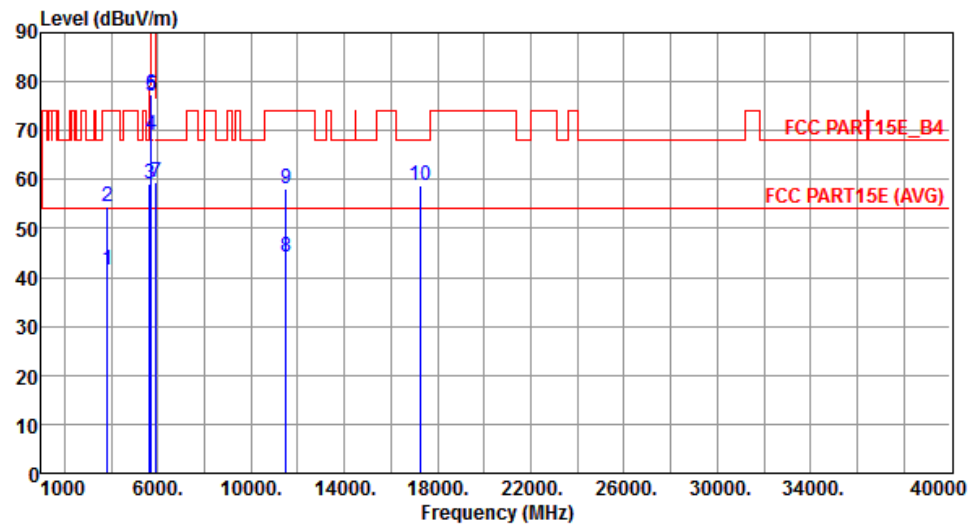


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3836.66	41.51	54.00	-12.49	39.53	1.98	Average	152	140
2	3836.66	54.46	74.00	-19.54	52.48	1.98	Peak	152	140
3	5650.00	59.22	68.20	-8.98	53.53	5.69	Peak	300	93
4	5700.00	69.24	105.20	-35.96	63.47	5.77	Peak	300	93
5	5720.00	77.03	110.80	-33.77	71.24	5.79	Peak	300	93
6	5725.00	77.46	122.20	-44.74	71.65	5.81	Peak	300	93
7	5925.00	59.39	68.20	-8.81	53.30	6.09	Peak	300	93
8	11510.00	44.15	54.00	-9.85	29.43	14.72	Average	181	335
9	11510.00	58.07	74.00	-15.93	43.35	14.72	Peak	181	335
10	17265.00	58.62	68.20	-9.58	41.45	17.17	Peak	175	322

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

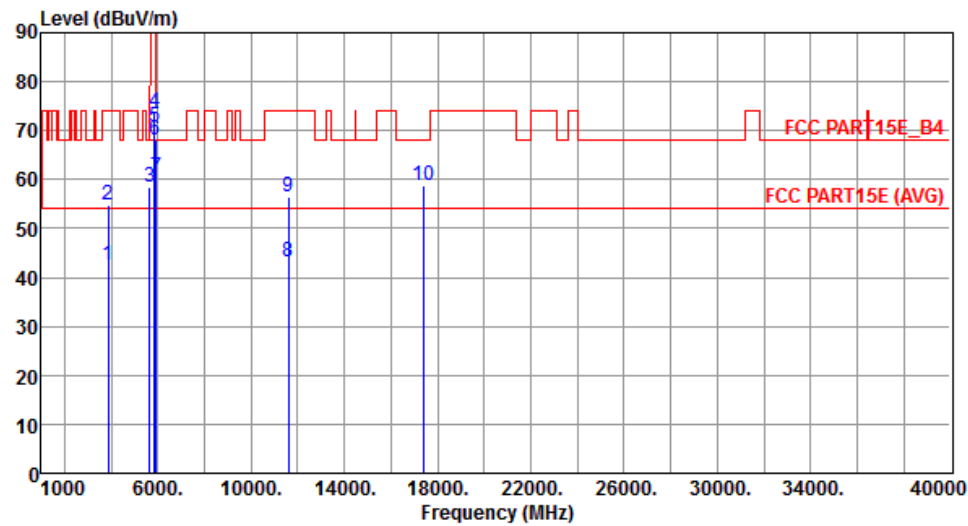

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3863.33	42.50	54.00	-11.50	40.43	2.07	Average	155	25
2	3863.33	54.82	74.00	-19.18	52.75	2.07	Peak	155	25
3	5650.00	58.46	68.20	-9.74	52.77	5.69	Peak	154	56
4	5850.00	73.78	122.20	-48.42	67.79	5.99	Peak	154	56
5	5855.00	70.63	110.80	-40.17	64.63	6.00	Peak	154	56
6	5875.00	68.21	105.20	-36.99	62.19	6.02	Peak	154	56
7	5925.00	60.29	68.20	-7.91	54.20	6.09	Peak	154	56
8	11590.00	43.12	54.00	-10.88	28.56	14.56	Average	100	244
9	11590.00	56.34	74.00	-17.66	41.78	14.56	Peak	100	244
10	17385.00	58.72	68.20	-9.48	41.05	17.67	Peak	100	165


Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

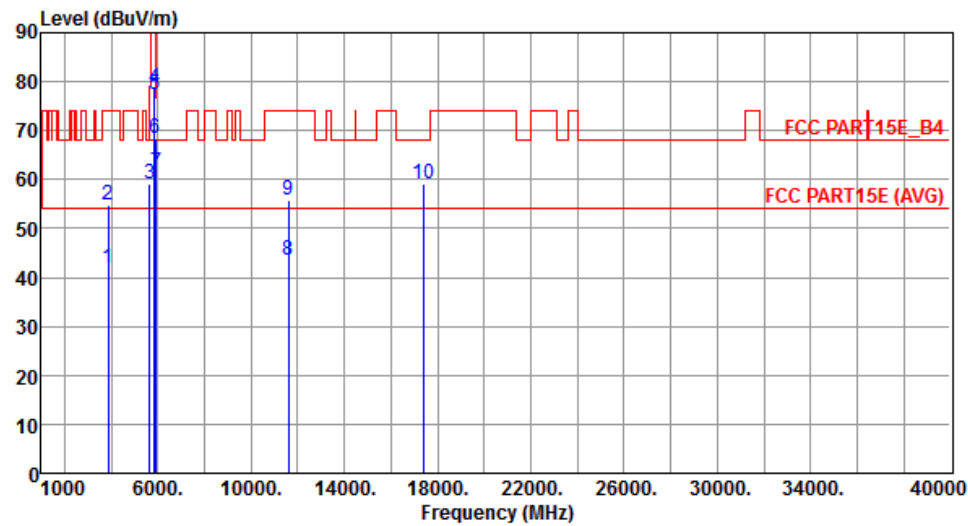

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3863.33	41.79	54.00	-12.21	39.72	2.07	Average	100	170
2	3863.33	54.85	74.00	-19.15	52.78	2.07	Peak	100	170
3	5650.00	59.23	68.20	-8.97	53.54	5.69	Peak	289	91
4	5850.00	78.73	122.20	-43.47	72.74	5.99	Peak	289	91
5	5855.00	77.26	110.80	-33.54	71.26	6.00	Peak	289	91
6	5875.00	68.49	105.20	-36.71	62.47	6.02	Peak	289	91
7	5925.00	61.35	68.20	-6.85	55.26	6.09	Peak	289	91
8	11590.00	43.52	54.00	-10.48	28.96	14.56	Average	100	253
9	11590.00	55.93	74.00	-18.07	41.37	14.56	Peak	100	253
10	17385.00	59.11	68.20	-9.09	41.44	17.67	Peak	100	344


3.5.18 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		

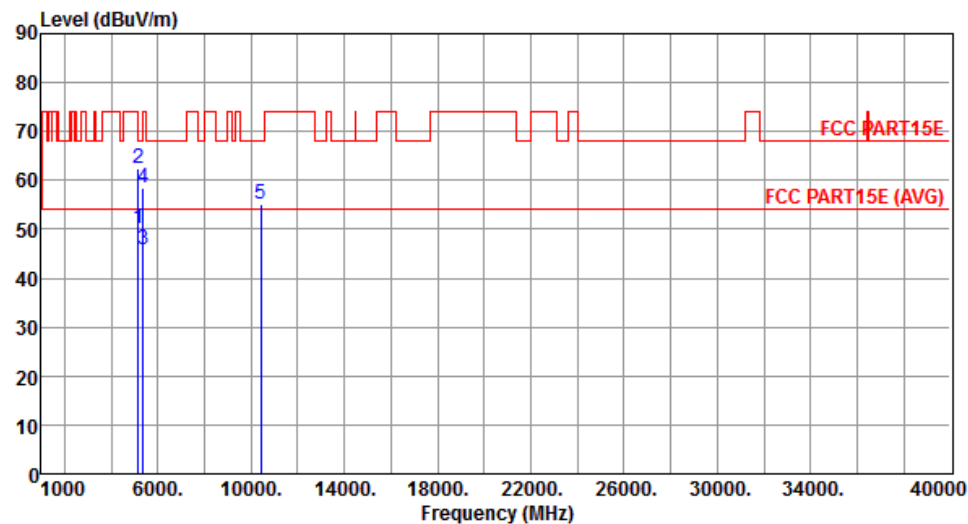


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	50.24	54.00	-3.76	45.22	5.02	Average	133	315
2	5150.00	62.33	74.00	-11.67	57.31	5.02	Peak	133	315
3	5350.00	45.95	54.00	-8.05	40.64	5.31	Average	133	315
4	5350.00	58.47	74.00	-15.53	53.16	5.31	Peak	133	315
5	10420.00	54.99	68.20	-13.21	41.21	13.78	Peak	100	166

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

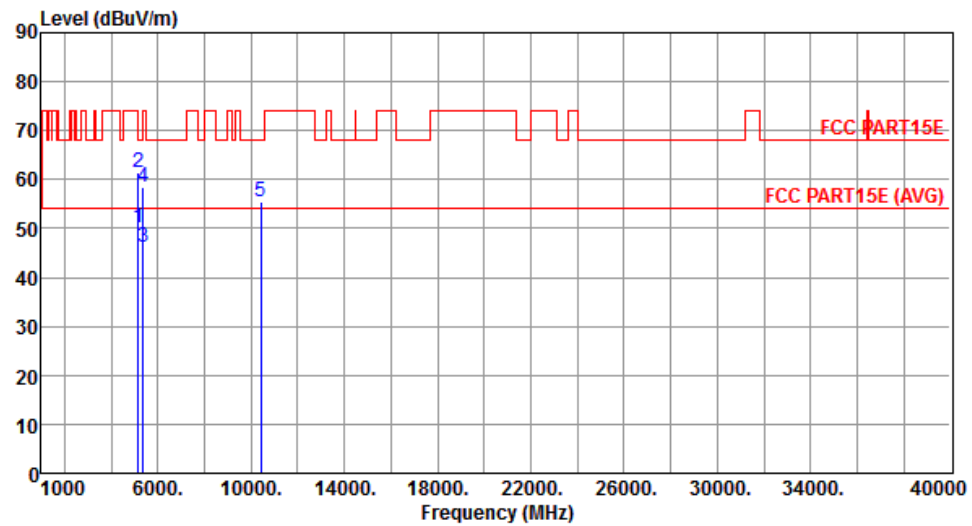


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	50.22	54.00	-3.78	45.20	5.02	Average	320	93
2	5150.00	61.48	74.00	-12.52	56.46	5.02	Peak	320	93
3	5350.00	46.04	54.00	-7.96	40.73	5.31	Average	320	93
4	5350.00	58.30	74.00	-15.70	52.99	5.31	Peak	320	93
5	10420.00	55.31	68.20	-12.89	41.53	13.78	Peak	100	196

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Horizontal		

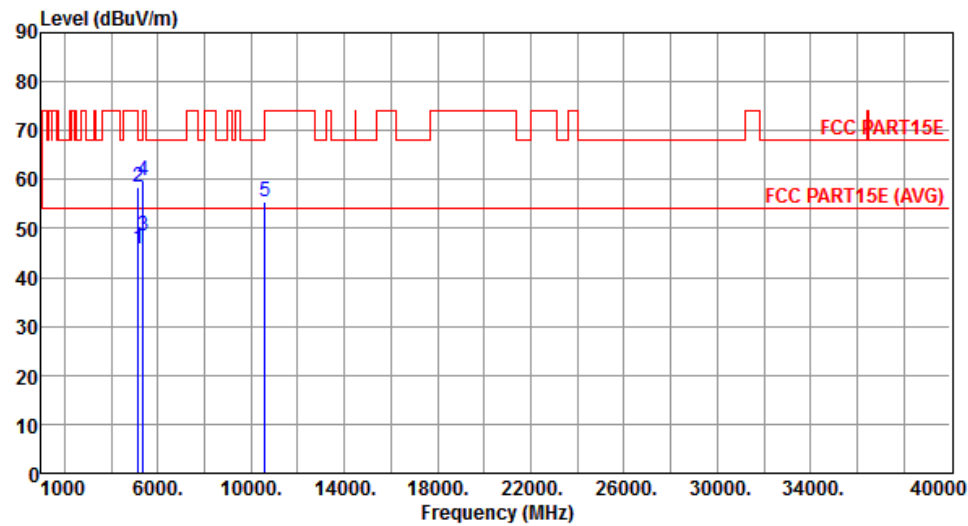


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.77	54.00	-8.23	40.75	5.02	Average	131	302
2	5150.00	58.59	74.00	-15.41	53.57	5.02	Peak	131	302
3	5350.00	48.61	54.00	-5.39	43.30	5.31	Average	131	302
4	5350.00	59.75	74.00	-14.25	54.44	5.31	Peak	131	302
5	10580.00	55.55	68.20	-12.65	41.65	13.90	Peak	100	177

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Vertical		

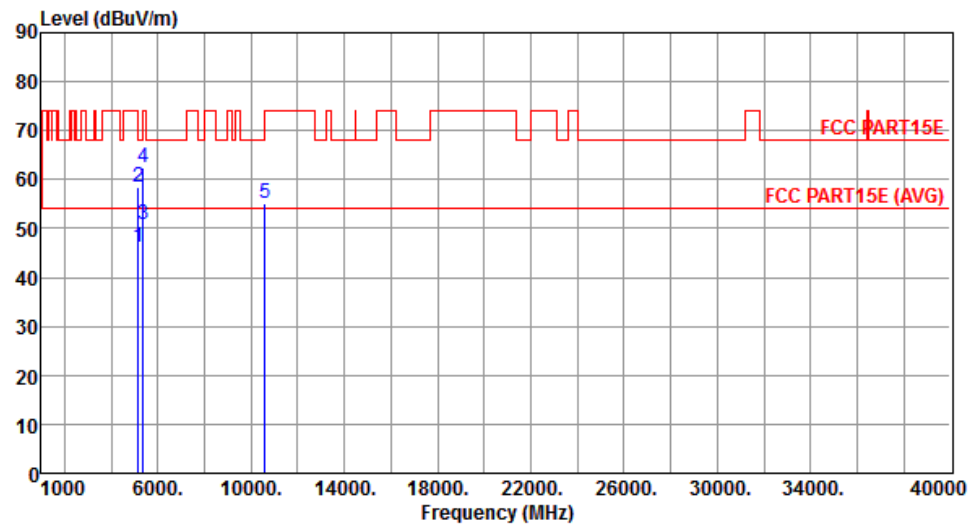


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5150.00	46.10	54.00	-7.90	41.08	5.02	Average	253	93
2	5150.00	58.36	74.00	-15.64	53.34	5.02	Peak	253	93
3	5350.00	50.73	54.00	-3.27	45.42	5.31	Average	253	93
4	5350.00	62.51	74.00	-11.49	57.20	5.31	Peak	253	93
5	10580.00	55.21	68.20	-12.99	41.31	13.90	Peak	100	56

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		

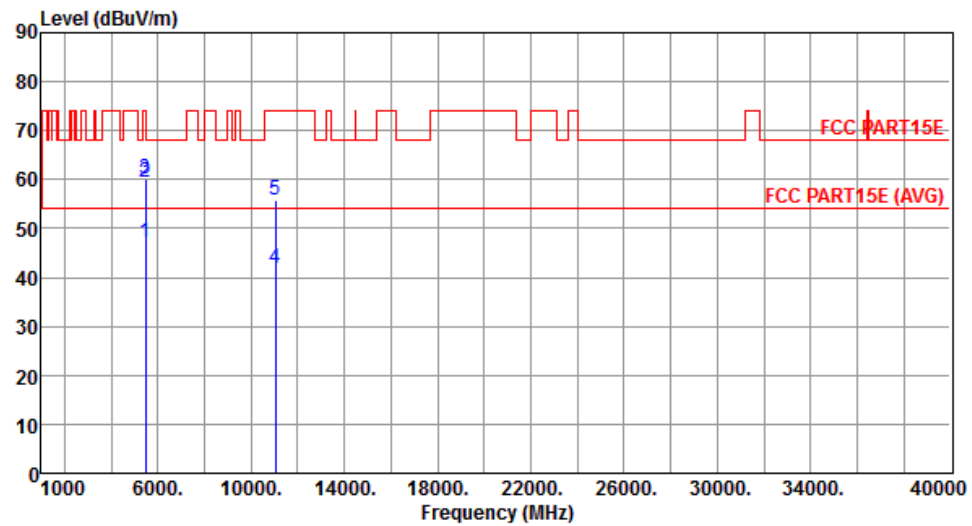


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.03	54.00	-6.97	41.57	5.46	Average	152	52
2	5460.00	59.32	74.00	-14.68	53.86	5.46	Peak	152	52
3	5470.00	60.25	68.20	-7.95	54.78	5.47	Peak	152	52
4	11060.00	41.91	54.00	-12.09	27.56	14.35	Average	100	137
5	11060.00	55.63	74.00	-18.37	41.28	14.35	Peak	100	137

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Vertical		

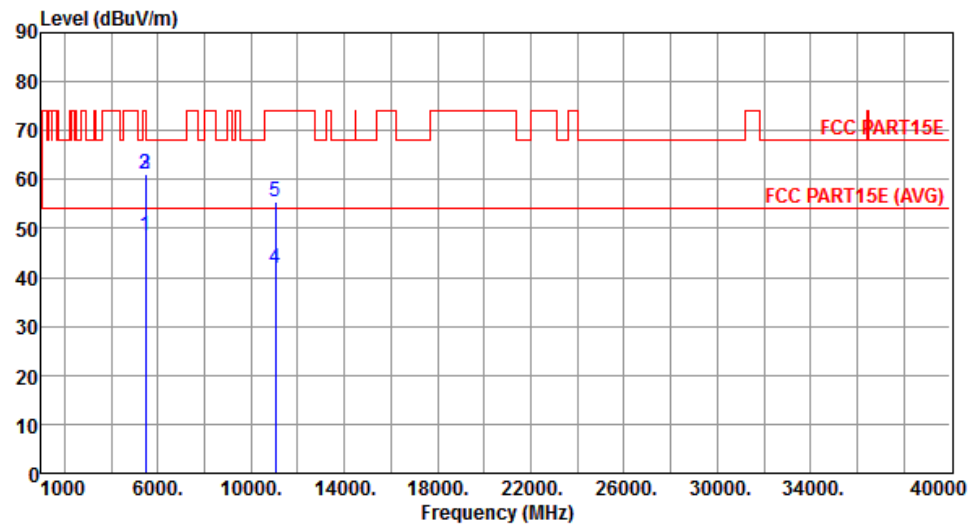


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	48.47	54.00	-5.53	43.01	5.46	Average	303	93
2	5460.00	61.04	74.00	-12.96	55.58	5.46	Peak	303	93
3	5470.00	61.19	68.20	-7.01	55.72	5.47	Peak	303	93
4	11060.00	41.91	54.00	-12.09	27.56	14.35	Average	100	236
5	11060.00	55.40	74.00	-18.60	41.05	14.35	Peak	100	236

Modulation	VHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		

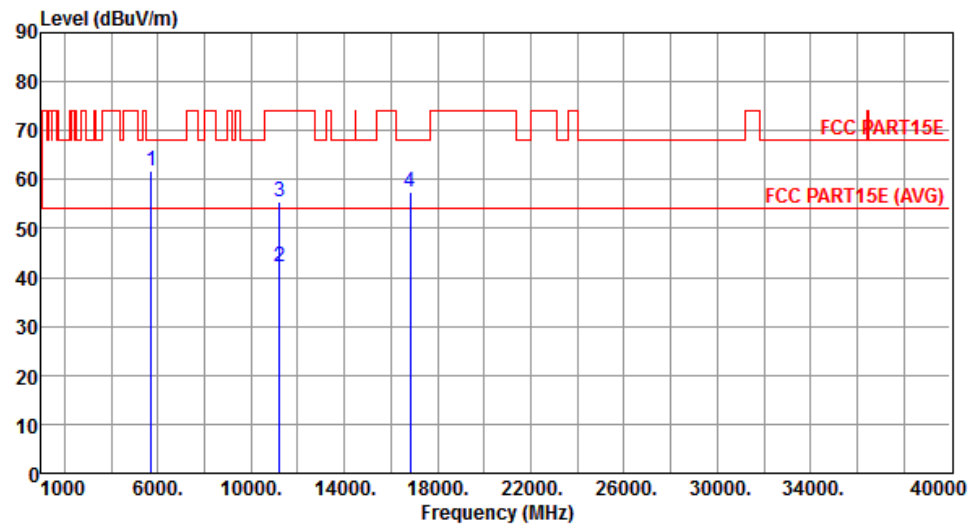


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	61.73	68.20	-6.47	55.92	5.81	Peak	158	54
2	11220.00	42.31	54.00	-11.69	27.82	14.49	Average	100	222
3	11220.00	55.62	74.00	-18.38	41.13	14.49	Peak	100	222
4	16830.00	57.46	68.20	-10.74	41.44	16.02	Peak	100	188

Modulation	VHT80	Test Freq. (MHz)	5610
Polarization	Vertical		

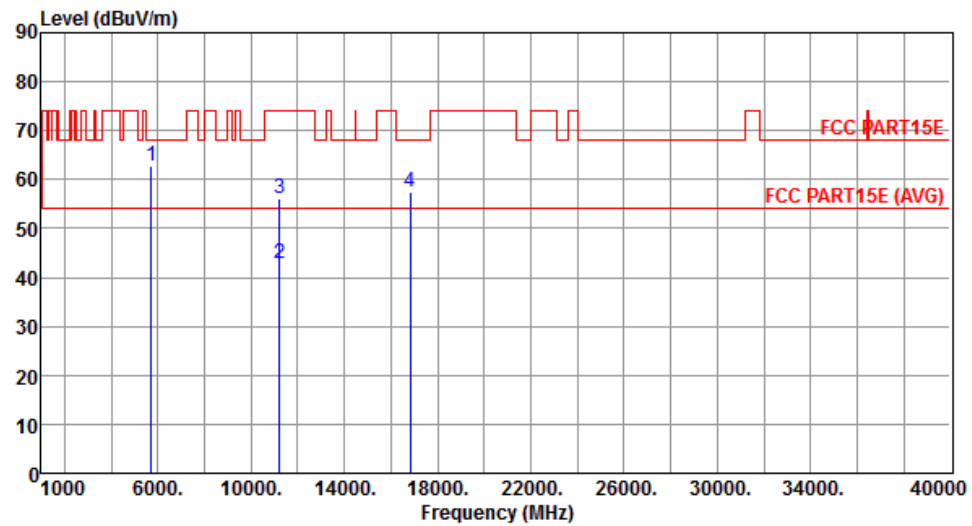


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	62.92	68.20	-5.28	57.11	5.81	Peak	294	93
2	11220.00	42.73	54.00	-11.27	28.24	14.49	Average	100	156
3	11220.00	56.02	74.00	-17.98	41.53	14.49	Peak	100	156
4	16830.00	57.46	68.20	-10.74	41.44	16.02	Peak	100	193

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		

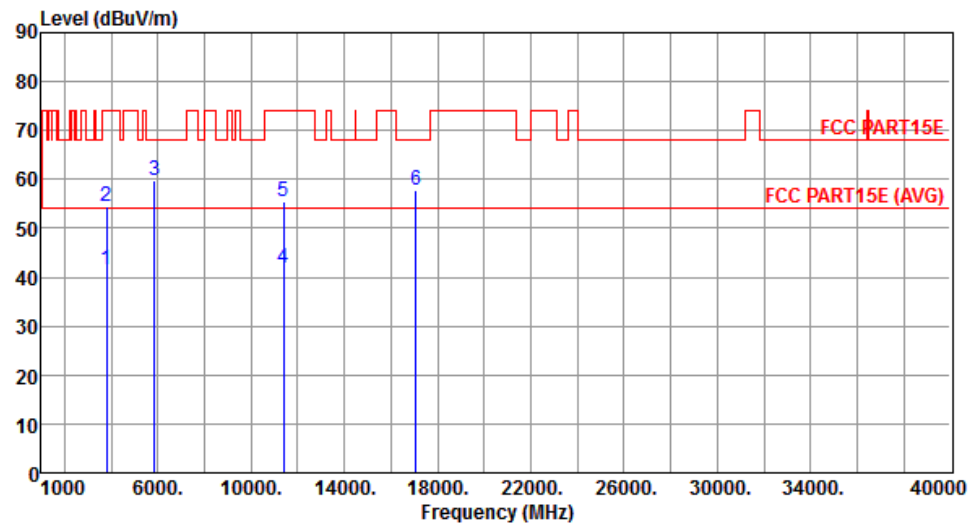


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3793.33	41.39	54.00	-12.61	39.55	1.84	Average	100	333
2	3793.33	54.61	74.00	-19.39	52.77	1.84	Peak	100	333
3	5850.00	59.64	68.20	-8.56	53.65	5.99	Peak	155	53
4	11380.00	41.91	54.00	-12.09	27.28	14.63	Average	100	205
5	11380.00	55.30	74.00	-18.70	40.67	14.63	Peak	100	205
6	17070.00	57.70	68.20	-10.50	41.31	16.39	Peak	100	181

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Vertical		

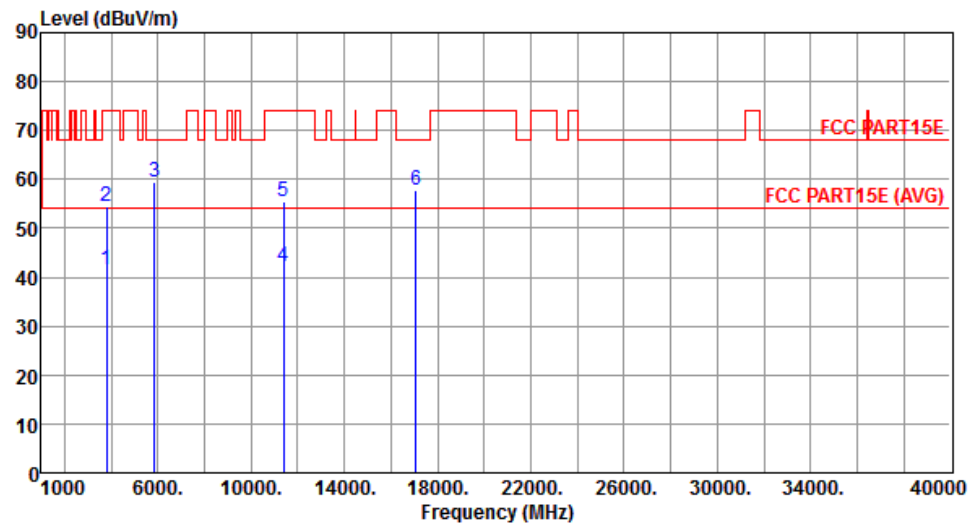


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3793.33	41.45	54.00	-12.55	39.61	1.84	Average	100	243
2	3793.33	54.44	74.00	-19.56	52.60	1.84	Peak	100	243
3	5850.00	59.30	68.20	-8.90	53.31	5.99	Peak	293	92
4	11380.00	42.31	54.00	-11.69	27.68	14.63	Average	100	148
5	11380.00	55.49	74.00	-18.51	40.86	14.63	Peak	100	148
6	17070.00	57.81	68.20	-10.39	41.42	16.39	Peak	100	199

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		

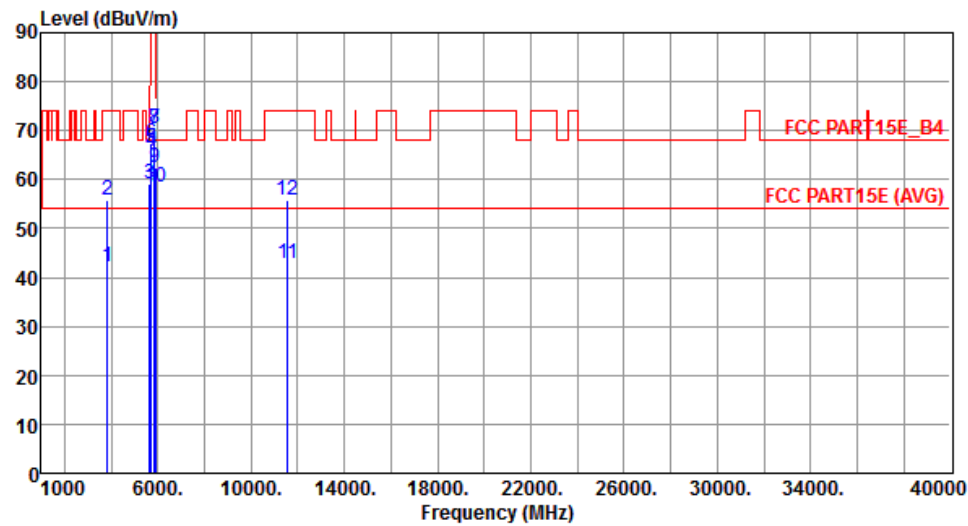

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3850.00	42.18	54.00	-11.82	40.16	2.02	Average	155	32
2	3850.00	55.63	74.00	-18.37	53.61	2.02	Peak	155	32
3	5650.00	59.00	68.20	-9.20	53.31	5.69	Peak	161	55
4	5700.00	65.83	105.20	-39.37	60.06	5.77	Peak	161	55
5	5720.00	66.32	110.80	-44.48	60.53	5.79	Peak	161	55
6	5725.00	67.37	122.20	-54.83	61.56	5.81	Peak	161	55
7	5850.00	70.43	122.20	-51.77	64.44	5.99	Peak	161	55
8	5855.00	70.25	110.80	-40.55	64.25	6.00	Peak	161	55
9	5875.00	62.54	105.20	-42.66	56.52	6.02	Peak	161	55
10	5925.00	58.56	68.20	-9.64	52.47	6.09	Peak	161	55
11	11550.00	42.69	54.00	-11.31	28.05	14.64	Average	100	245
12	11550.00	55.95	74.00	-18.05	41.31	14.64	Peak	100	245

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Vertical		

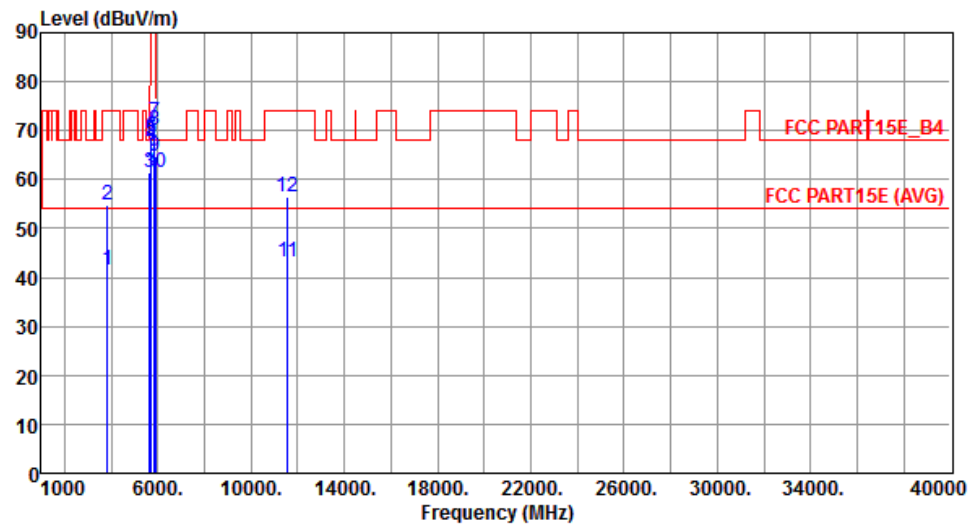


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3850.00	41.46	54.00	-12.54	39.44	2.02	Average	100	174
2	3850.00	54.84	74.00	-19.16	52.82	2.02	Peak	100	174
3	5650.00	61.53	68.20	-6.67	55.84	5.69	Peak	296	93
4	5700.00	67.00	105.20	-38.20	61.23	5.77	Peak	296	93
5	5720.00	67.92	110.80	-42.88	62.13	5.79	Peak	296	93
6	5725.00	68.67	122.20	-53.53	62.86	5.81	Peak	296	93
7	5850.00	71.83	122.20	-50.37	65.84	5.99	Peak	296	93
8	5855.00	70.01	110.80	-40.79	64.01	6.00	Peak	296	93
9	5875.00	64.67	105.20	-40.53	58.65	6.02	Peak	296	93
10	5925.00	61.36	68.20	-6.84	55.27	6.09	Peak	296	93
11	11550.00	43.08	54.00	-10.92	28.44	14.64	Average	100	253
12	11550.00	56.32	74.00	-17.68	41.68	14.64	Peak	100	253

Configuration 4 : Isolated Magnetic Dipole Antenna


3.5.19 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

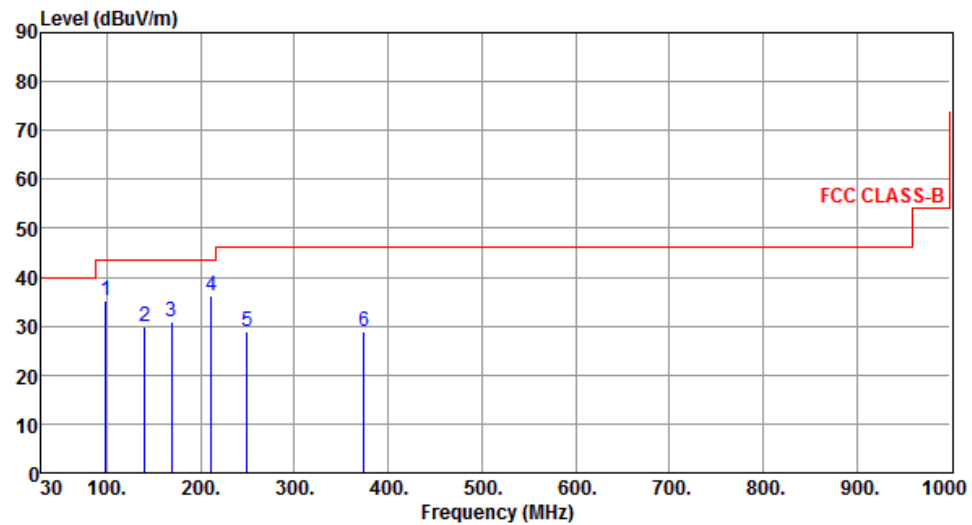


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	98.73	35.26	43.50	-8.24	48.94	-13.68	Peak	---	---
2	140.36	29.73	43.50	-13.77	38.56	-8.83	Peak	---	---
3	168.55	30.73	43.50	-12.77	39.43	-8.70	Peak	---	---
4	211.51	36.15	43.50	-7.35	47.41	-11.26	Peak	---	---
5	249.42	28.76	46.00	-17.24	38.38	-9.62	Peak	---	---
6	374.51	28.83	46.00	-17.17	34.75	-5.92	Peak	---	---

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

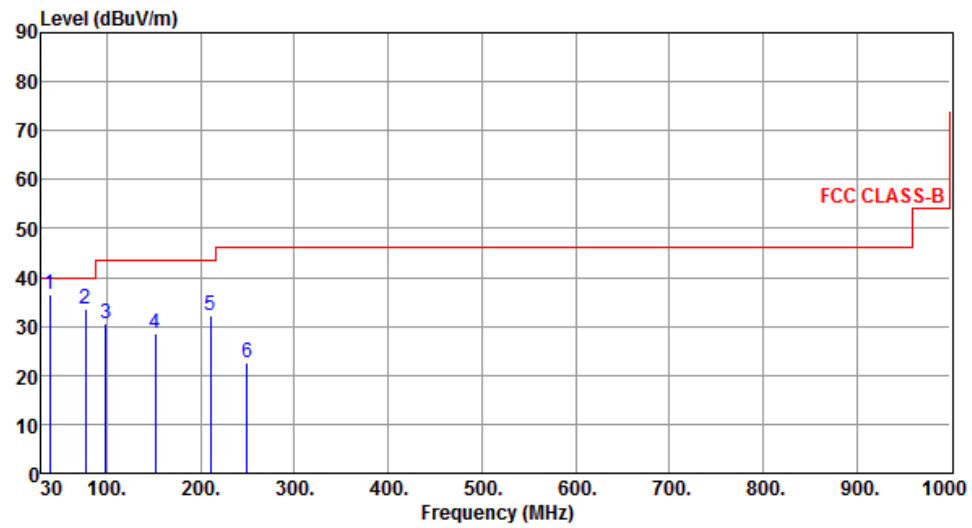


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.61	36.66	40.00	-3.34	45.52	-8.86	Peak	---	---
2	77.42	33.43	40.00	-6.57	46.06	-12.63	Peak	---	---
3	98.76	30.45	43.50	-13.05	44.13	-13.68	Peak	---	---
4	151.42	28.42	43.50	-15.08	36.92	-8.50	Peak	---	---
5	210.36	32.33	43.50	-11.17	43.61	-11.28	Peak	---	---
6	249.43	22.57	46.00	-23.43	32.19	-9.62	Peak	---	---

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

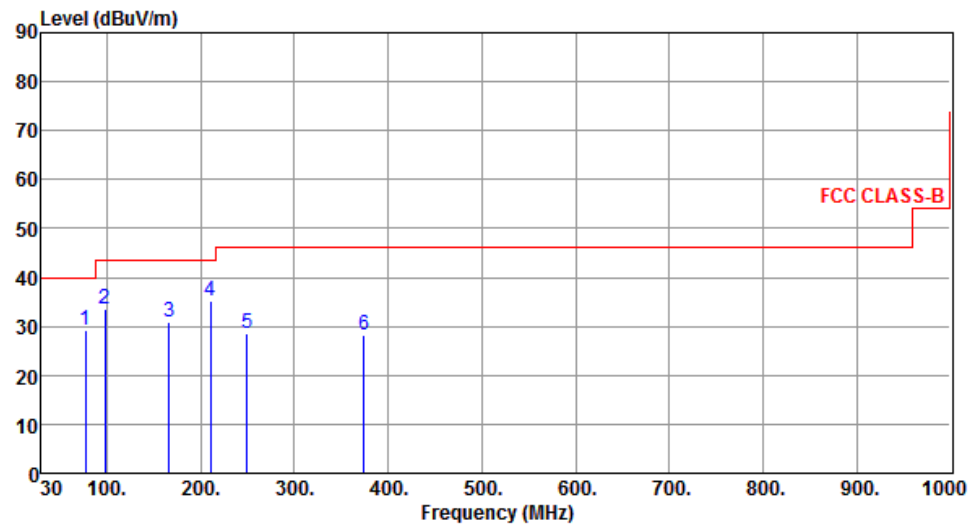

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	77.46	29.31	40.00	-10.69	41.95	-12.64	Peak	---	---
2	97.82	33.52	43.50	-9.98	47.30	-13.78	Peak	---	---
3	166.76	30.72	43.50	-12.78	39.36	-8.64	Peak	---	---
4	210.62	35.25	43.50	-8.25	46.52	-11.27	Peak	---	---
5	249.30	28.47	46.00	-17.53	38.09	-9.62	Peak	---	---
6	374.42	28.21	46.00	-17.79	34.13	-5.92	Peak	---	---


Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

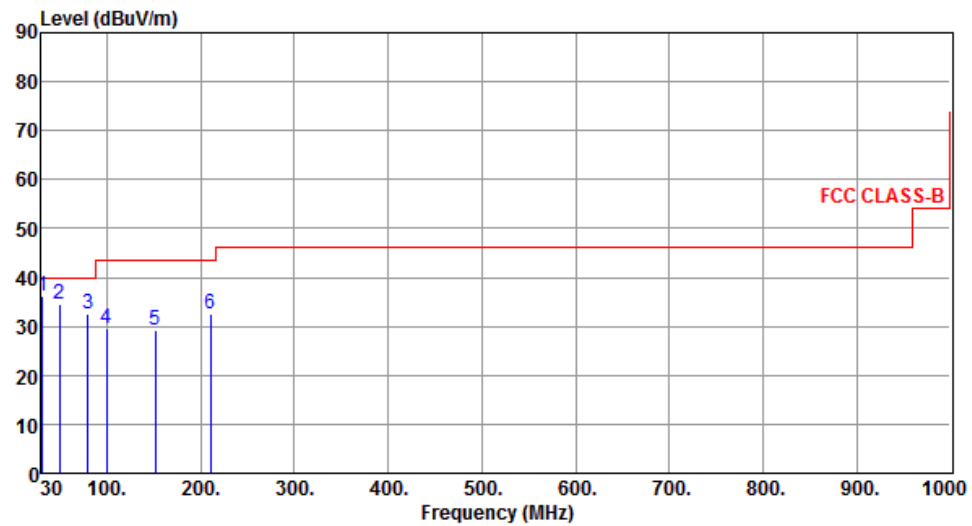

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.85	36.25	40.00	-3.75	45.60	-9.35	Peak	---	---
2	49.42	34.62	40.00	-5.38	42.77	-8.15	Peak	---	---
3	79.52	32.44	40.00	-7.56	45.51	-13.07	Peak	---	---
4	99.72	29.53	43.50	-13.97	43.10	-13.57	Peak	---	---
5	151.53	29.31	43.50	-14.19	37.80	-8.49	Peak	---	---
6	210.36	32.43	43.50	-11.07	43.71	-11.28	Peak	---	---


3.5.20 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		

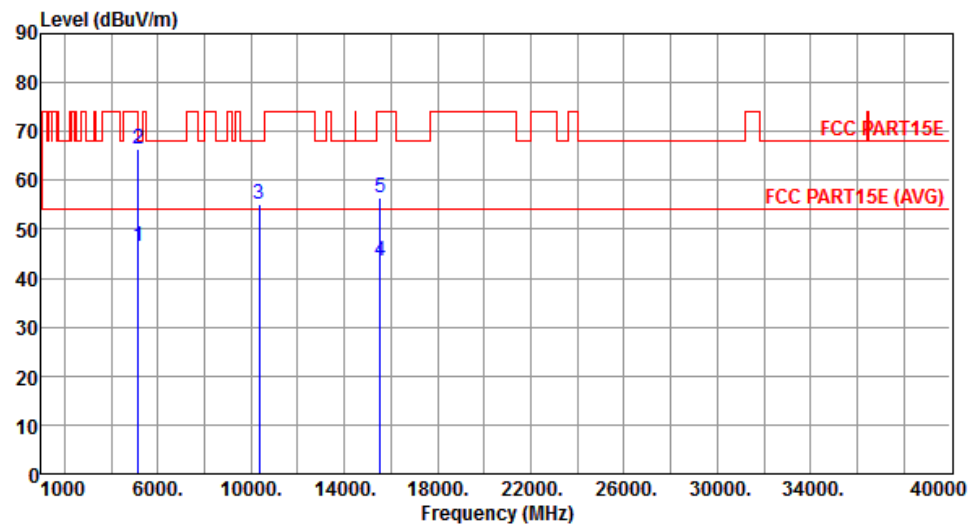


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.60	54.00	-7.40	41.58	5.02	Average	100	211
2	5150.00	66.31	74.00	-7.69	61.29	5.02	Peak	100	211
3	10360.00	54.97	68.20	-13.23	41.23	13.74	Peak	202	285
4	15540.00	43.39	54.00	-10.61	28.42	14.97	Average	144	302
5	15540.00	56.45	74.00	-17.55	41.48	14.97	Peak	144	302

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

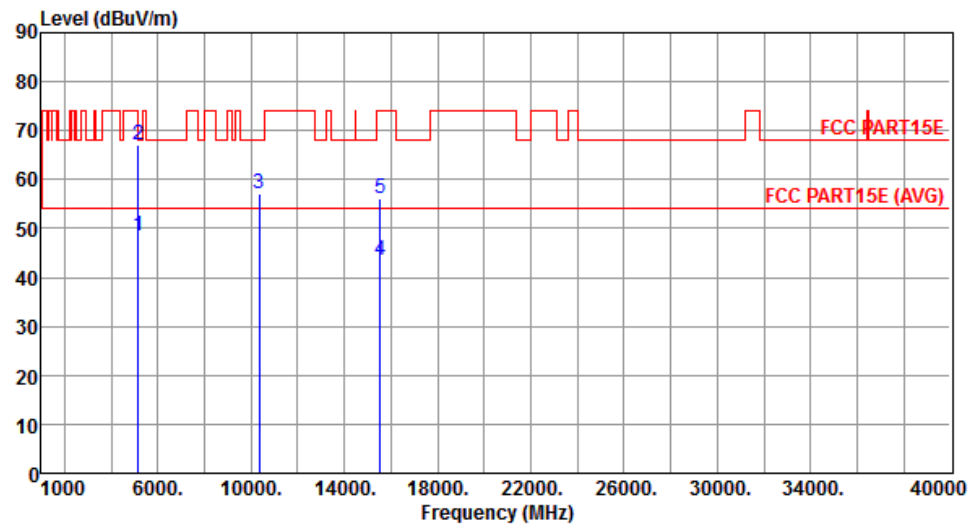


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	48.49	54.00	-5.51	43.47	5.02	Average	140	202
2	5150.00	67.24	74.00	-6.76	62.22	5.02	Peak	140	202
3	10360.00	57.00	68.20	-11.20	43.26	13.74	Peak	100	142
4	15540.00	43.62	54.00	-10.38	28.65	14.97	Average	150	7
5	15540.00	56.28	74.00	-17.72	41.31	14.97	Peak	150	7

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

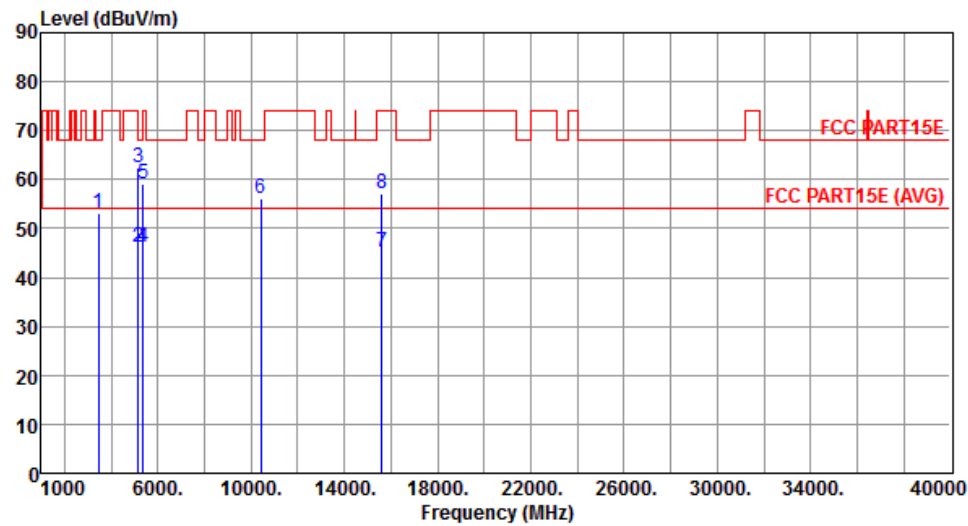


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.66	53.11	68.20	-15.09	52.25	0.86	Peak	100	166
2	5150.00	46.16	54.00	-7.84	41.14	5.02	Average	172	211
3	5150.00	62.30	74.00	-11.70	57.28	5.02	Peak	172	211
4	5350.00	46.13	54.00	-7.87	40.82	5.31	Average	172	211
5	5350.00	59.14	74.00	-14.86	53.83	5.31	Peak	172	211
6	10400.00	56.26	68.20	-11.94	42.49	13.77	Peak	206	287
7	15600.00	45.16	54.00	-8.84	30.22	14.94	Average	146	304
8	15600.00	57.28	74.00	-16.72	42.34	14.94	Peak	146	304

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

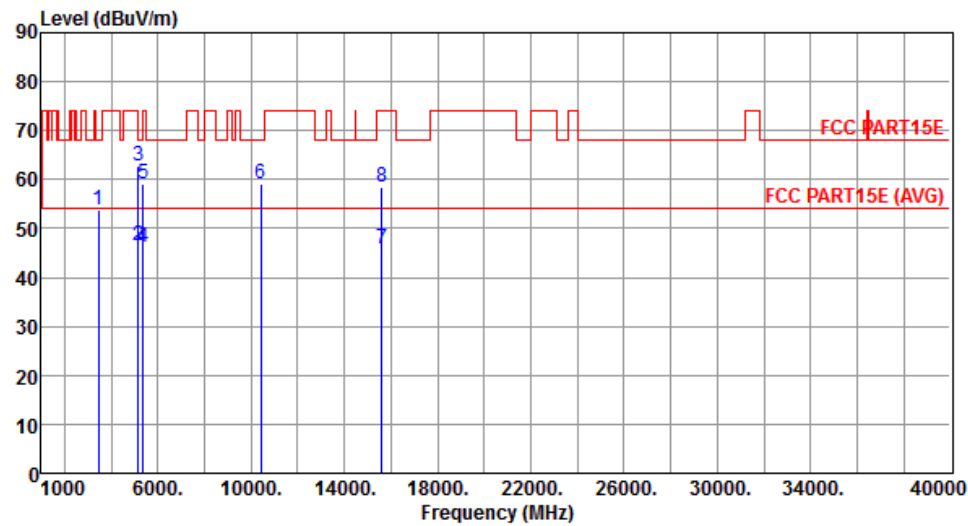


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.66	53.64	68.20	-14.56	52.78	0.86	Peak	100	156
2	5150.00	46.54	54.00	-7.46	41.52	5.02	Average	207	260
3	5150.00	62.81	74.00	-11.19	57.79	5.02	Peak	207	260
4	5350.00	46.22	54.00	-7.78	40.91	5.31	Average	207	260
5	5350.00	59.15	74.00	-14.85	53.84	5.31	Peak	207	260
6	10400.00	59.25	68.20	-8.95	45.48	13.77	Peak	100	145
7	15600.00	45.74	54.00	-8.26	30.80	14.94	Average	152	8
8	15600.00	58.40	74.00	-15.60	43.46	14.94	Peak	152	8

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

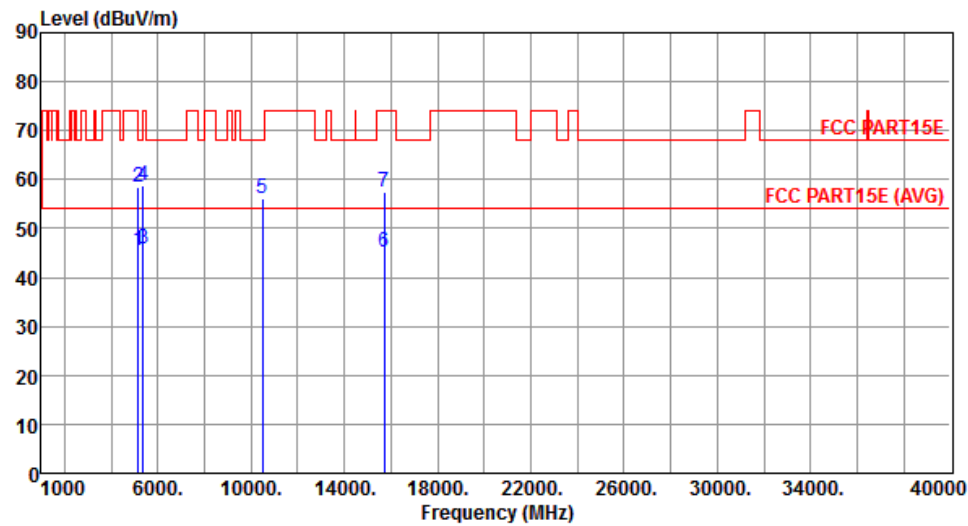


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.46	54.00	-8.54	40.44	5.02	Average	170	212
2	5150.00	58.37	74.00	-15.63	53.35	5.02	Peak	170	212
3	5350.00	45.87	54.00	-8.13	40.56	5.31	Average	170	212
4	5350.00	58.82	74.00	-15.18	53.51	5.31	Peak	170	212
5	10480.00	56.19	68.20	-12.01	42.38	13.81	Peak	205	288
6	15720.00	45.25	54.00	-8.75	30.34	14.91	Average	142	302
7	15720.00	57.36	74.00	-16.64	42.45	14.91	Peak	142	302

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

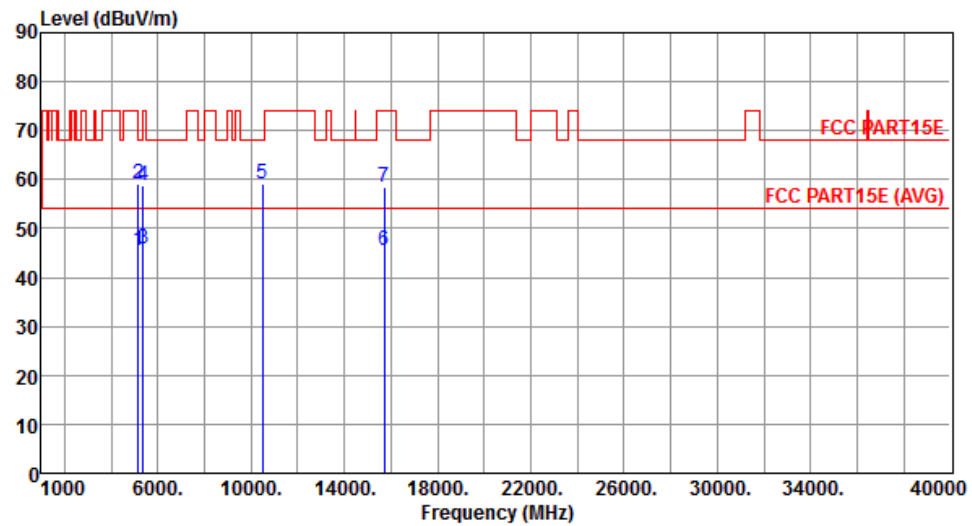


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.58	54.00	-8.42	40.56	5.02	Average	205	260
2	5150.00	59.23	74.00	-14.77	54.21	5.02	Peak	205	260
3	5350.00	45.87	54.00	-8.13	40.56	5.31	Average	205	260
4	5350.00	58.93	74.00	-15.07	53.62	5.31	Peak	205	260
5	10480.00	59.03	68.20	-9.17	45.22	13.81	Peak	100	141
6	15720.00	45.46	54.00	-8.54	30.55	14.91	Average	150	9
7	15720.00	58.45	74.00	-15.55	43.54	14.91	Peak	150	9

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		

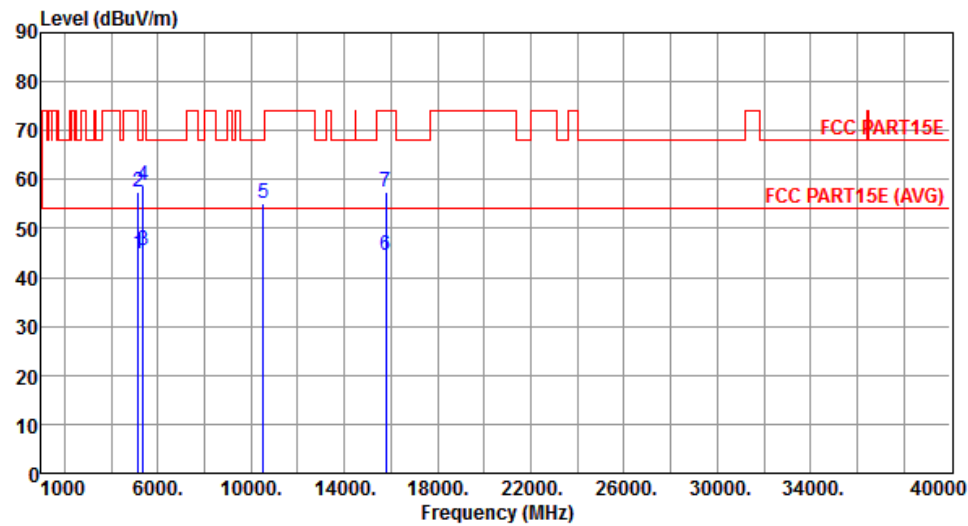


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.87	54.00	-9.13	39.85	5.02	Average	162	208
2	5150.00	57.46	74.00	-16.54	52.44	5.02	Peak	162	208
3	5350.00	45.65	54.00	-8.35	40.34	5.31	Average	162	208
4	5350.00	58.86	74.00	-15.14	53.55	5.31	Peak	162	208
5	10520.00	55.27	68.20	-12.93	41.43	13.84	Peak	182	48
6	15780.00	44.61	54.00	-9.39	29.74	14.87	Average	100	302
7	15780.00	57.31	74.00	-16.69	42.44	14.87	Peak	100	302

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical		

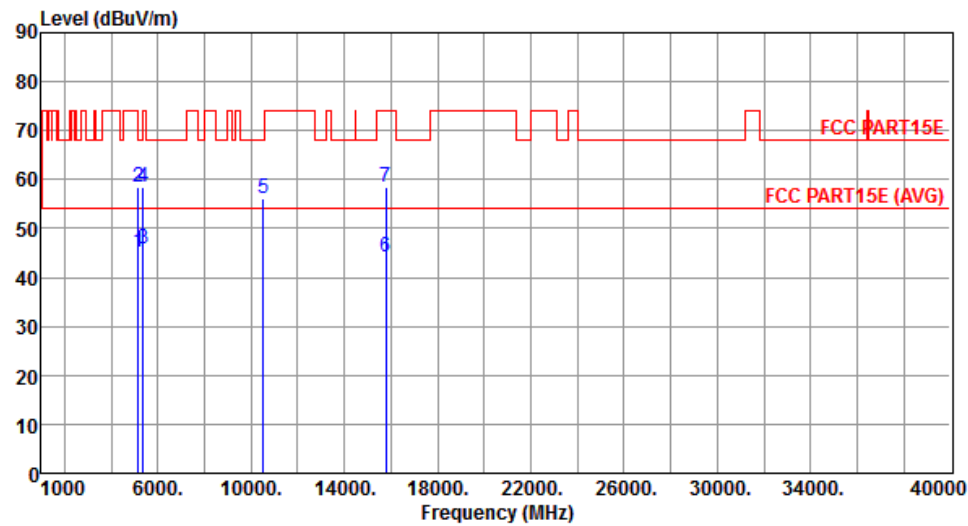


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.24	54.00	-8.76	40.22	5.02	Average	122	188
2	5150.00	58.49	74.00	-15.51	53.47	5.02	Peak	122	188
3	5350.00	45.84	54.00	-8.16	40.53	5.31	Average	122	188
4	5350.00	58.58	74.00	-15.42	53.27	5.31	Peak	122	188
5	10520.00	56.15	68.20	-12.05	42.31	13.84	Peak	100	135
6	15780.00	44.31	54.00	-9.69	29.44	14.87	Average	100	5
7	15780.00	58.44	74.00	-15.56	43.57	14.87	Peak	100	5

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal		

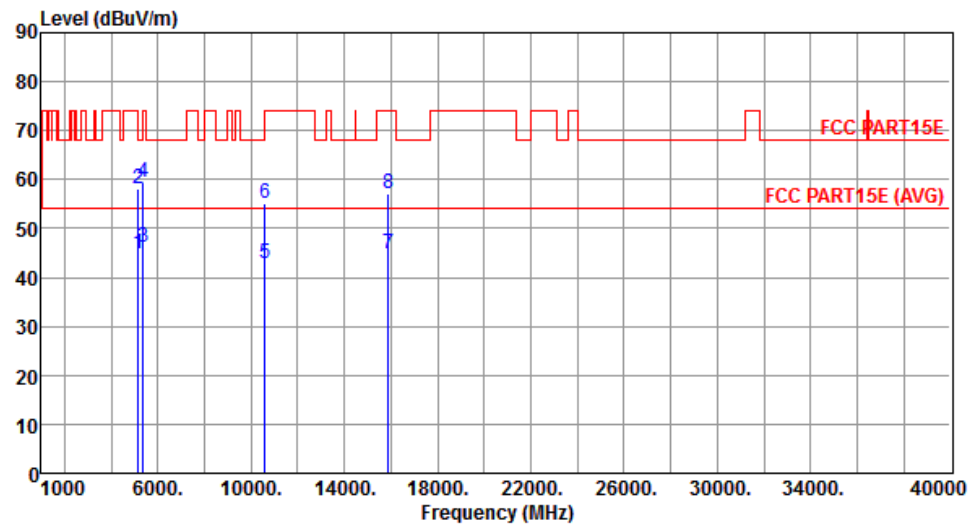


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.80	54.00	-9.20	39.78	5.02	Average	163	210
2	5150.00	57.97	74.00	-16.03	52.95	5.02	Peak	163	210
3	5350.00	46.21	54.00	-7.79	40.90	5.31	Average	163	210
4	5350.00	59.45	74.00	-14.55	54.14	5.31	Peak	163	210
5	10600.00	42.88	54.00	-11.12	28.96	13.92	Average	183	46
6	10600.00	55.13	74.00	-18.87	41.21	13.92	Peak	183	46
7	15900.00	44.74	54.00	-9.26	29.90	14.84	Average	100	300
8	15900.00	57.08	74.00	-16.92	42.24	14.84	Peak	100	300

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Vertical		

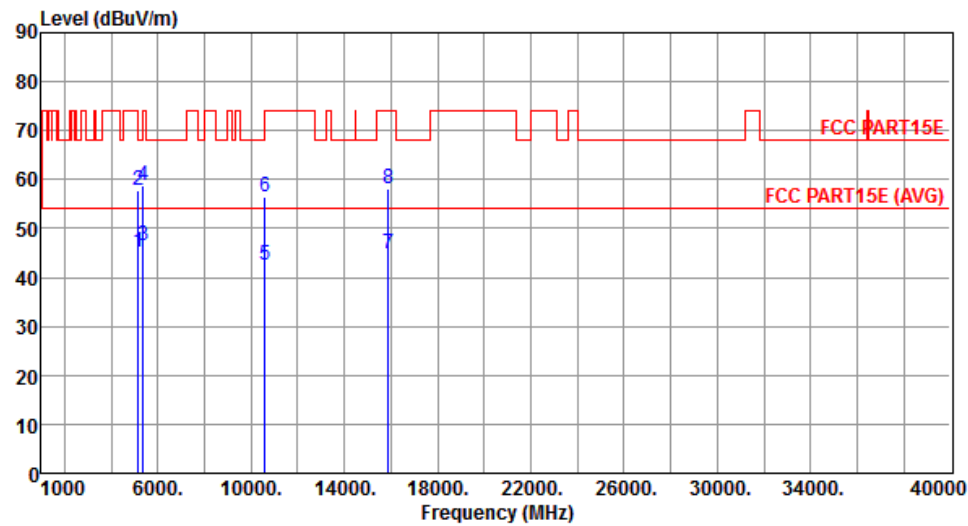


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m			dBuV			cm	deg
1	5150.00	45.06	54.00	-8.94	40.04	5.02	Average	124	190
2	5150.00	57.68	74.00	-16.32	52.66	5.02	Peak	124	190
3	5350.00	46.38	54.00	-7.62	41.07	5.31	Average	124	190
4	5350.00	58.70	74.00	-15.30	53.39	5.31	Peak	124	190
5	10600.00	42.48	54.00	-11.52	28.56	13.92	Average	100	138
6	10600.00	56.62	74.00	-17.38	42.70	13.92	Peak	100	138
7	15900.00	44.88	54.00	-9.12	30.04	14.84	Average	100	4
8	15900.00	57.98	74.00	-16.02	43.14	14.84	Peak	100	4

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal		

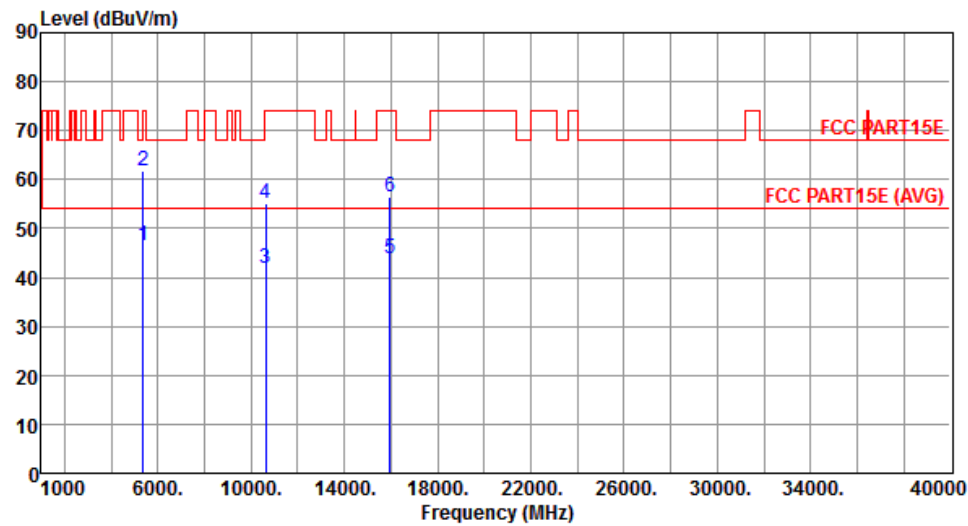


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.55	54.00	-7.45	41.24	5.31	Average	176	212
2	5350.00	61.62	74.00	-12.38	56.31	5.31	Peak	176	212
3	10640.00	41.97	54.00	-12.03	28.01	13.96	Average	182	45
4	10640.00	55.28	74.00	-18.72	41.32	13.96	Peak	182	45
5	15960.00	43.67	54.00	-10.33	28.86	14.81	Average	100	299
6	15960.00	56.43	74.00	-17.57	41.62	14.81	Peak	100	299

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical		

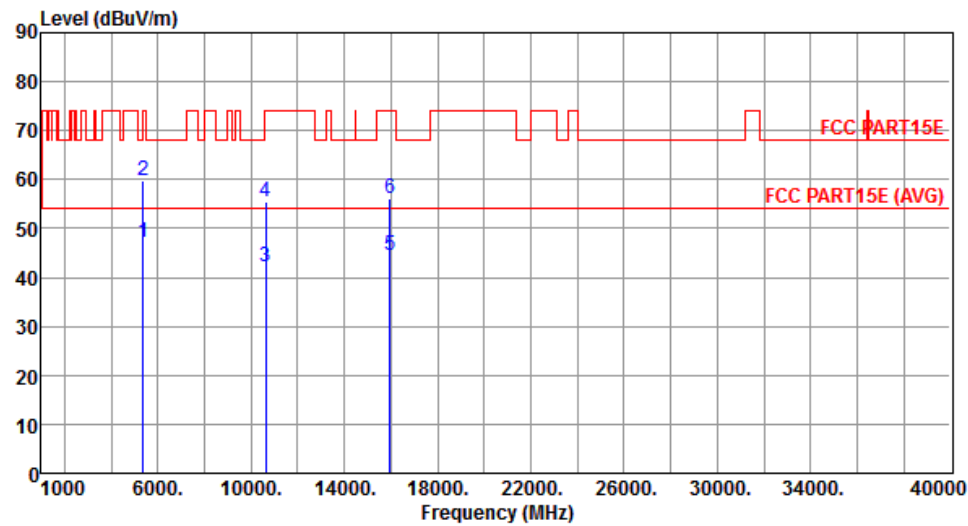


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.10	54.00	-6.90	41.79	5.31	Average	124	189
2	5350.00	59.62	74.00	-14.38	54.31	5.31	Peak	124	189
3	10640.00	42.07	54.00	-11.93	28.11	13.96	Average	100	136
4	10640.00	55.52	74.00	-18.48	41.56	13.96	Peak	100	136
5	15960.00	44.36	54.00	-9.64	29.55	14.81	Average	100	2
6	15960.00	56.25	74.00	-17.75	41.44	14.81	Peak	100	2

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Horizontal		

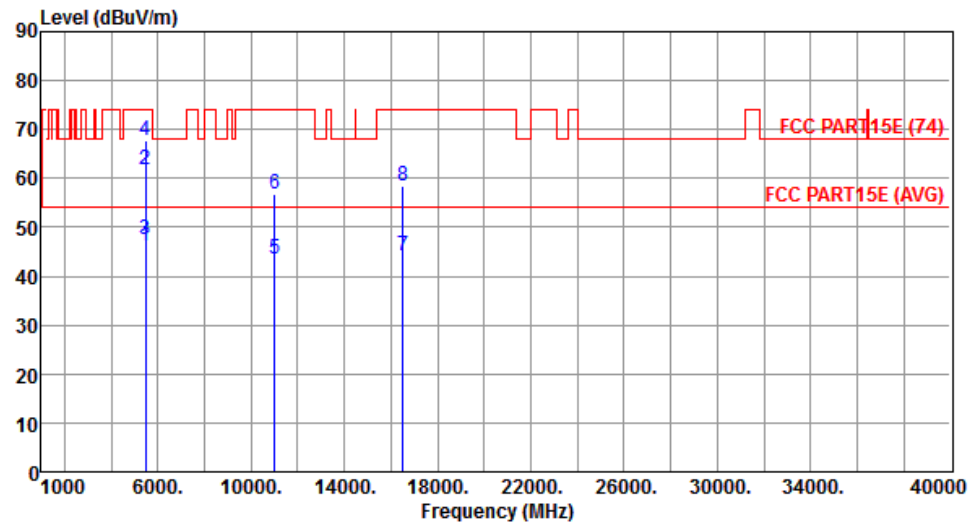


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.25	54.00	-7.75	40.79	5.46	Average	168	212
2	5460.00	61.93	74.00	-12.07	56.47	5.46	Peak	168	212
3	5470.00	47.58	54.00	-6.42	42.11	5.47	Average	168	212
4	5470.00	67.61	74.00	-6.39	62.14	5.47	Peak	168	212
5	11000.00	43.42	54.00	-10.58	29.12	14.30	Average	162	25
6	11000.00	56.75	74.00	-17.25	42.45	14.30	Peak	162	25
7	16500.00	44.05	54.00	-9.95	28.21	15.84	Average	100	146
8	16500.00	58.49	74.00	-15.51	42.65	15.84	Peak	100	146

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical		

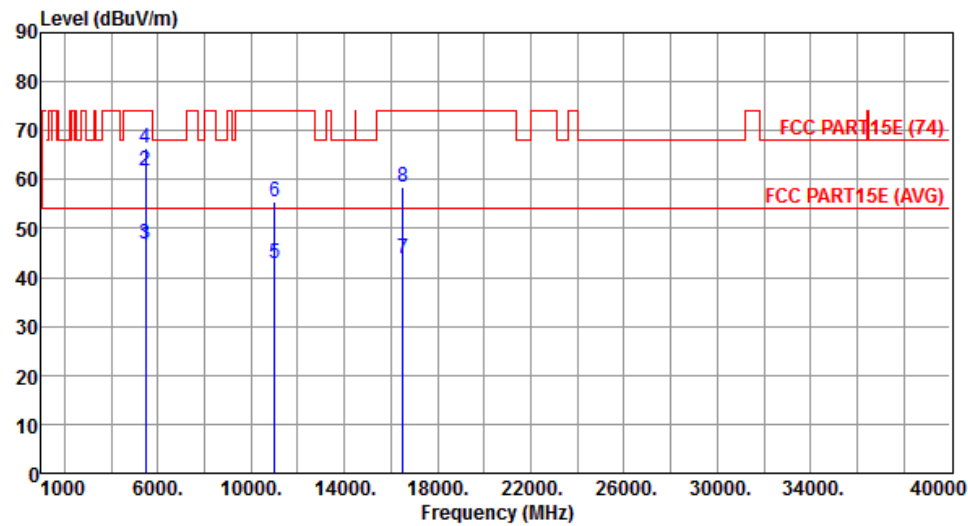


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.40	54.00	-7.60	40.94	5.46	Average	192	279
2	5460.00	61.73	74.00	-12.27	56.27	5.46	Peak	192	279
3	5470.00	46.97	54.00	-7.03	41.50	5.47	Average	192	279
4	5470.00	66.47	74.00	-7.53	61.00	5.47	Peak	192	279
5	11000.00	42.86	54.00	-11.14	28.56	14.30	Average	165	17
6	11000.00	55.52	74.00	-18.48	41.22	14.30	Peak	165	17
7	16500.00	44.00	54.00	-10.00	28.16	15.84	Average	100	330
8	16500.00	58.51	74.00	-15.49	42.67	15.84	Peak	100	330

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal		

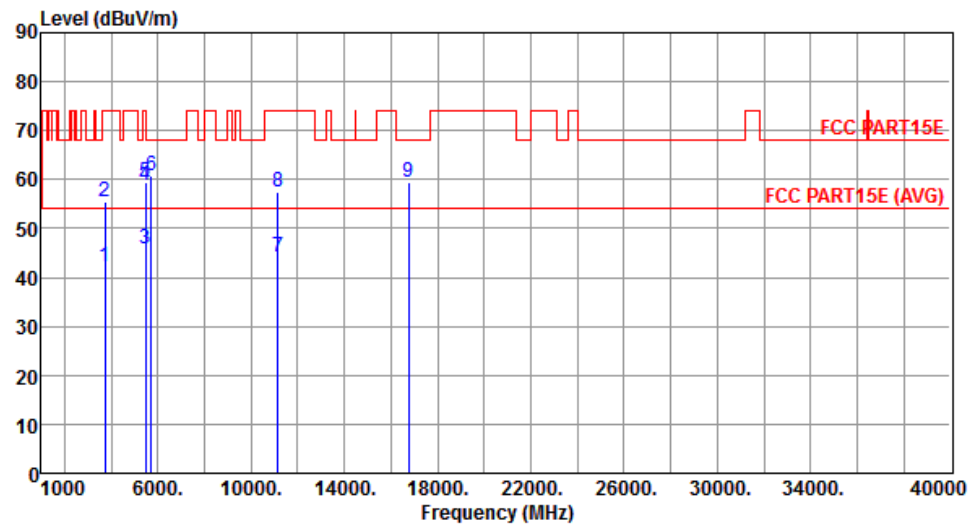


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	42.16	54.00	-11.84	40.56	1.60	Average	100	165
2	3720.00	55.33	74.00	-18.67	53.73	1.60	Peak	100	165
3	5460.00	45.86	54.00	-8.14	40.40	5.46	Average	146	211
4	5460.00	58.64	74.00	-15.36	53.18	5.46	Peak	146	211
5	5470.00	59.46	68.20	-8.74	53.99	5.47	Peak	146	211
6	5725.00	60.63	68.20	-7.57	54.82	5.81	Peak	146	211
7	11160.00	44.09	54.00	-9.91	29.65	14.44	Average	164	23
8	11160.00	57.54	74.00	-16.46	43.10	14.44	Peak	164	23
9	16740.00	59.30	68.20	-8.90	43.33	15.97	Peak	164	45

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		

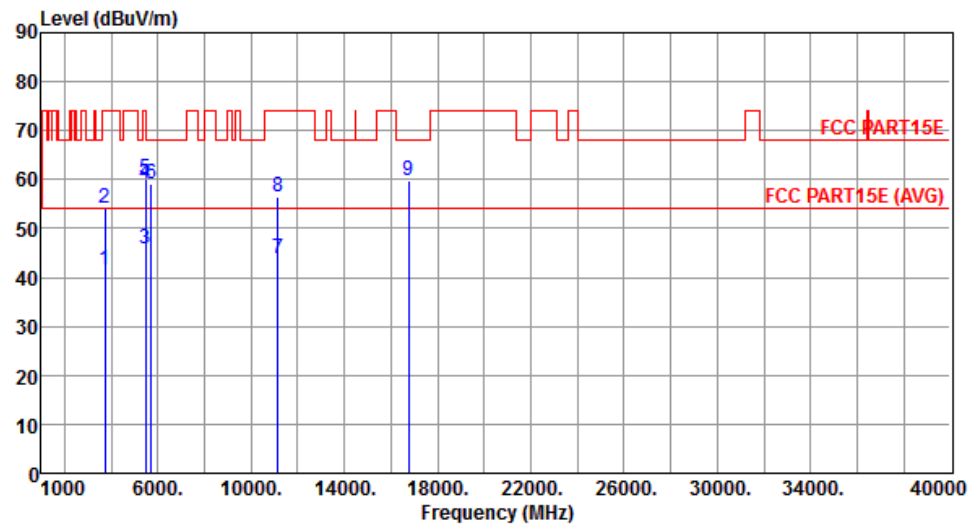


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	41.59	54.00	-12.41	39.99	1.60	Average	100	165
2	3720.00	54.06	74.00	-19.94	52.46	1.60	Peak	100	165
3	5460.00	45.69	54.00	-8.31	40.23	5.46	Average	145	258
4	5460.00	59.01	74.00	-14.99	53.55	5.46	Peak	145	258
5	5470.00	60.15	68.20	-8.05	54.68	5.47	Peak	145	258
6	5725.00	59.26	68.20	-8.94	53.45	5.81	Peak	145	258
7	11160.00	43.87	54.00	-10.13	29.43	14.44	Average	168	18
8	11160.00	56.37	74.00	-17.63	41.93	14.44	Peak	168	18
9	16740.00	59.75	68.20	-8.45	43.78	15.97	Peak	123	327

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		

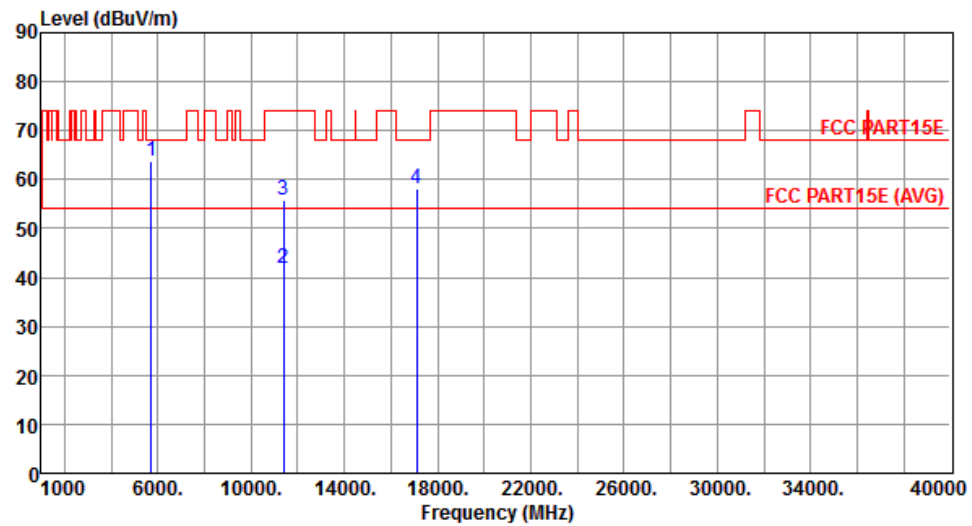


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	63.78	68.20	-4.42	57.97	5.81	Peak	101	206
2	11400.00	42.00	54.00	-12.00	27.35	14.65	Average	162	25
3	11400.00	55.87	74.00	-18.13	41.22	14.65	Peak	162	25
4	17100.00	58.06	68.20	-10.14	41.55	16.51	Peak	100	145

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		

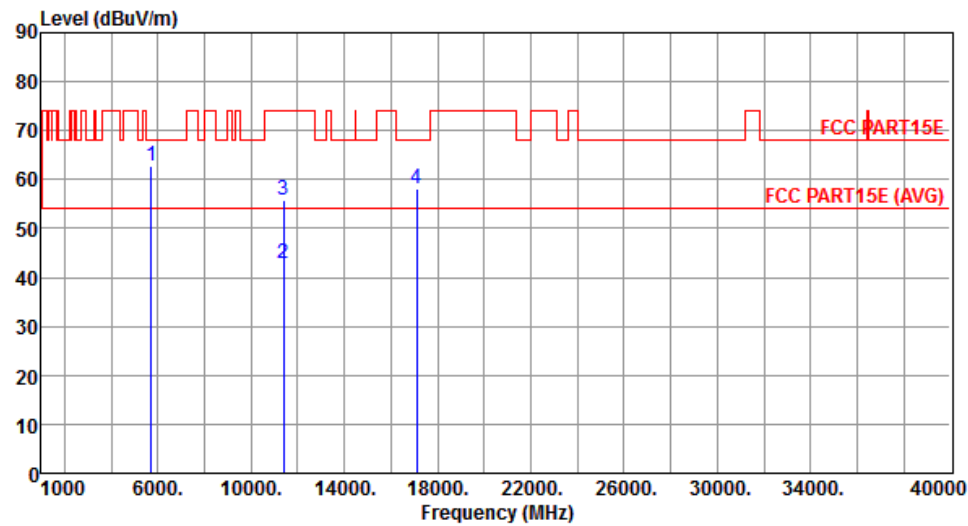


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	62.92	68.20	-5.28	57.11	5.81	Peak	257	258
2	11400.00	42.77	54.00	-11.23	28.12	14.65	Average	165	15
3	11400.00	55.67	74.00	-18.33	41.02	14.65	Peak	165	15
4	17100.00	57.95	68.20	-10.25	41.44	16.51	Peak	115	326

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal		

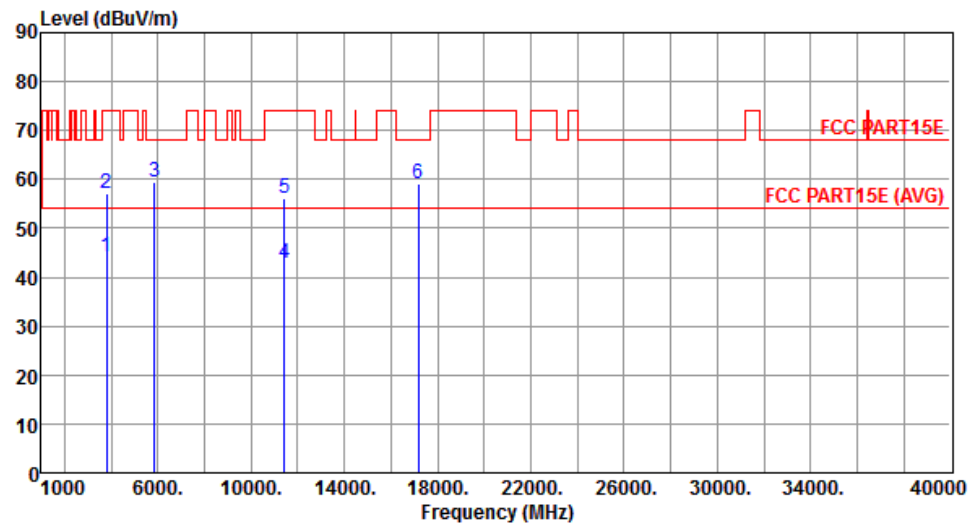


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	44.06	54.00	-9.94	42.16	1.90	Average	157	198
2	3813.33	57.27	74.00	-16.73	55.37	1.90	Peak	157	198
3	5850.00	59.32	68.20	-8.88	53.33	5.99	Peak	100	215
4	11440.00	42.98	54.00	-11.02	28.29	14.69	Average	159	30
5	11440.00	56.06	74.00	-17.94	41.37	14.69	Peak	159	30
6	17160.00	58.98	68.20	-9.22	42.22	16.76	Peak	100	293

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Vertical		

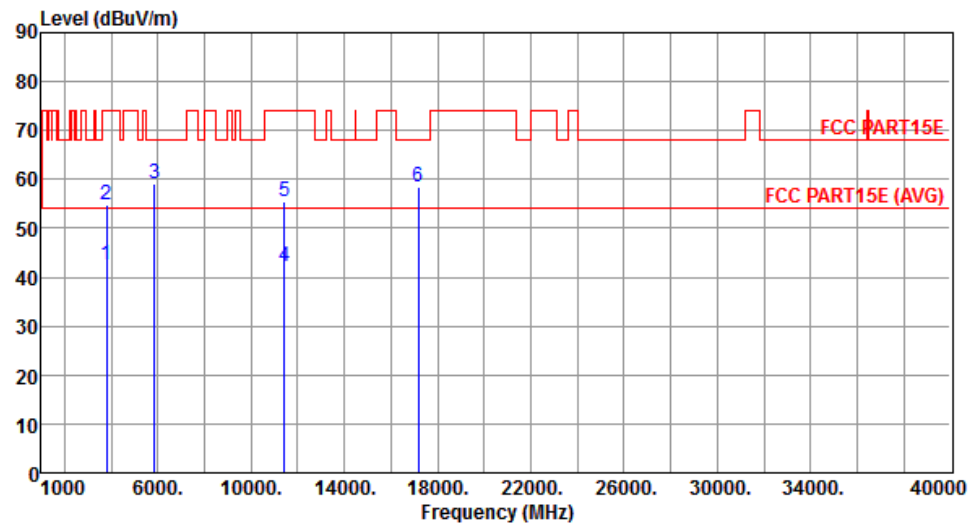


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	42.67	54.00	-11.33	40.77	1.90	Average	162	286
2	3813.33	54.64	74.00	-19.36	52.74	1.90	Peak	162	286
3	5850.00	59.17	68.20	-9.03	53.18	5.99	Peak	262	265
4	11440.00	42.19	54.00	-11.81	27.50	14.69	Average	100	168
5	11440.00	55.41	74.00	-18.59	40.72	14.69	Peak	100	168
6	17160.00	58.43	68.20	-9.77	41.67	16.76	Peak	112	2

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

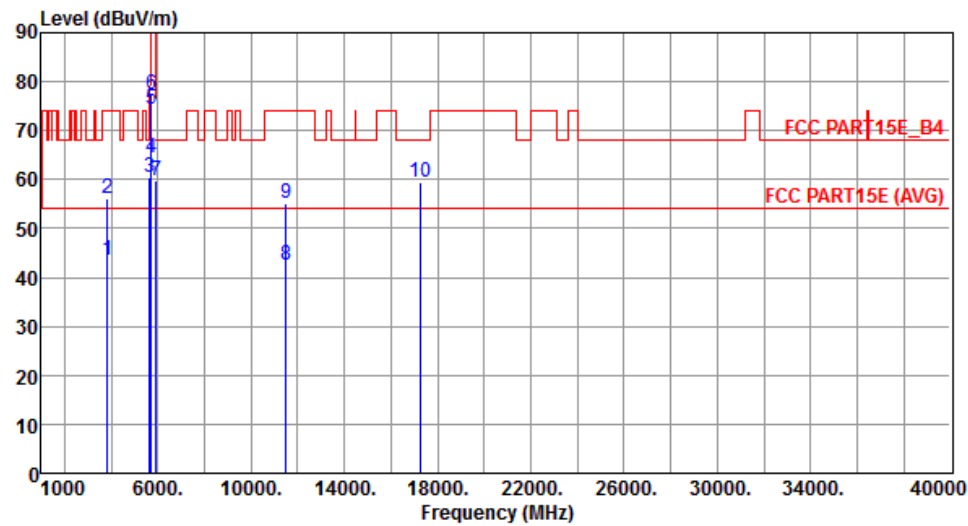


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	43.56	54.00	-10.44	41.60	1.96	Average	136	181
2	3830.00	56.25	74.00	-17.75	54.29	1.96	Peak	136	181
3	5650.00	60.37	68.20	-7.83	54.68	5.69	Peak	105	205
4	5700.00	64.43	105.20	-40.77	58.66	5.77	Peak	105	205
5	5720.00	74.24	110.80	-36.56	68.45	5.79	Peak	105	205
6	5725.00	77.54	122.20	-44.66	71.73	5.81	Peak	105	205
7	5925.00	59.87	68.20	-8.33	53.78	6.09	Peak	105	205
8	11490.00	42.36	54.00	-11.64	27.63	14.73	Average	100	39
9	11490.00	55.24	74.00	-18.76	40.51	14.73	Peak	100	39
10	17235.00	59.56	68.20	-8.64	42.49	17.07	Peak	100	291

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

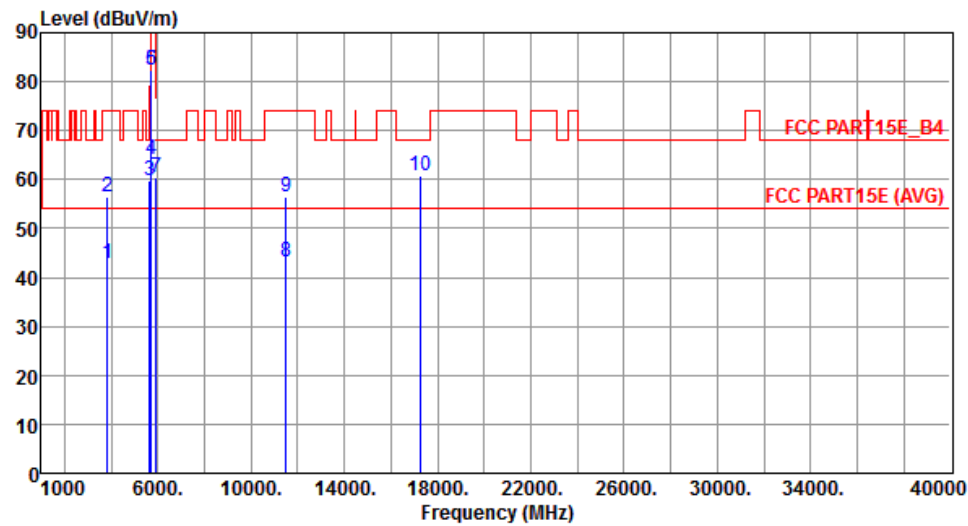


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	42.97	54.00	-11.03	41.01	1.96	Average	157	280
2	3830.00	56.36	74.00	-17.64	54.40	1.96	Peak	157	280
3	5650.00	59.82	68.20	-8.38	54.13	5.69	Peak	264	278
4	5700.00	64.17	105.20	-41.03	58.40	5.77	Peak	264	278
5	5720.00	82.20	110.80	-28.60	76.41	5.79	Peak	264	278
6	5725.00	82.37	122.20	-39.83	76.56	5.81	Peak	264	278
7	5925.00	60.48	68.20	-7.72	54.39	6.09	Peak	264	278
8	11490.00	43.19	54.00	-10.81	28.46	14.73	Average	100	275
9	11490.00	56.43	74.00	-17.57	41.70	14.73	Peak	100	275
10	17235.00	60.77	68.20	-7.43	43.70	17.07	Peak	108	0

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		

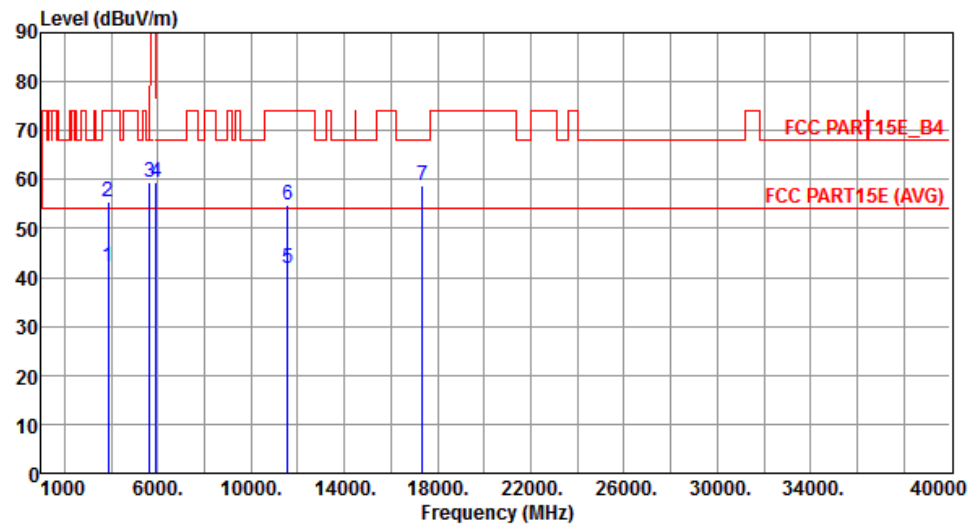


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	42.26	54.00	-11.74	40.21	2.05	Average	132	178
2	3856.66	55.36	74.00	-18.64	53.31	2.05	Peak	132	178
3	5650.00	59.58	68.20	-8.62	53.89	5.69	Peak	102	204
4	5925.00	59.29	68.20	-8.91	53.20	6.09	Peak	102	204
5	11570.00	41.73	54.00	-12.27	27.13	14.60	Average	100	45
6	11570.00	54.76	74.00	-19.24	40.16	14.60	Peak	100	45
7	17355.00	58.65	68.20	-9.55	41.10	17.55	Peak	100	45

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

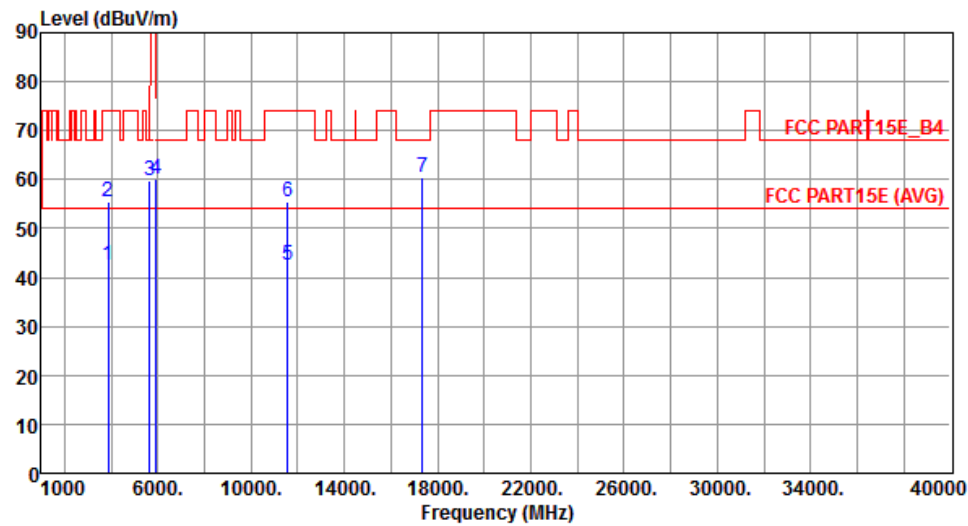


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	42.49	54.00	-11.51	40.44	2.05	Average	152	275
2	3856.66	55.43	74.00	-18.57	53.38	2.05	Peak	152	275
3	5650.00	59.78	68.20	-8.42	54.09	5.69	Peak	258	250
4	5925.00	60.06	68.20	-8.14	53.97	6.09	Peak	258	250
5	11570.00	42.56	54.00	-11.44	27.96	14.60	Average	100	271
6	11570.00	55.49	74.00	-18.51	40.89	14.60	Peak	100	271
7	17355.00	60.38	68.20	-7.82	42.83	17.55	Peak	100	2

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		

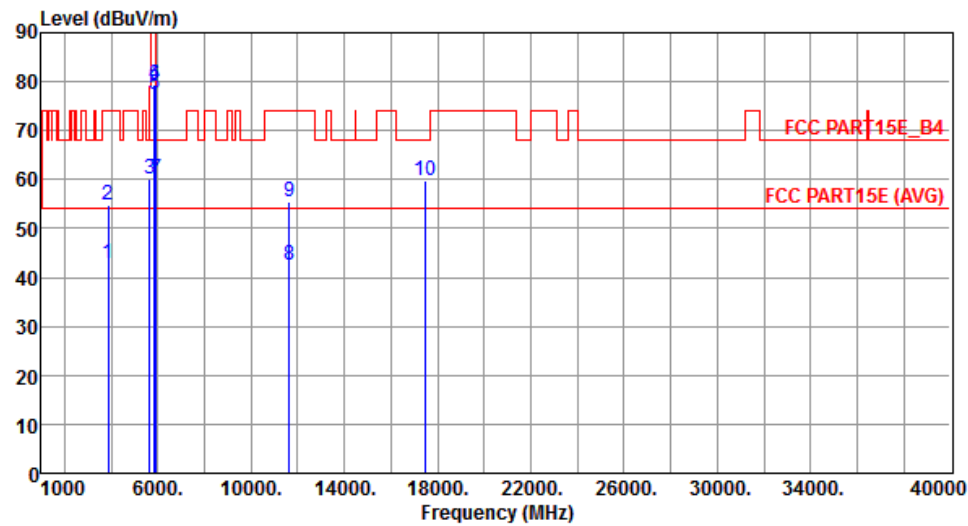

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	42.93	54.00	-11.07	40.79	2.14	Average	138	176
2	3883.33	54.85	74.00	-19.15	52.71	2.14	Peak	138	176
3	5650.00	60.06	68.20	-8.14	54.37	5.69	Peak	103	211
4	5850.00	79.39	122.20	-42.81	73.40	5.99	Peak	103	211
5	5855.00	77.31	110.80	-33.49	71.31	6.00	Peak	103	211
6	5875.00	79.41	105.20	-25.79	73.39	6.02	Peak	103	211
7	5925.00	60.01	68.20	-8.19	53.92	6.09	Peak	103	211
8	11650.00	42.40	54.00	-11.60	27.96	14.44	Average	100	45
9	11650.00	55.32	74.00	-18.68	40.88	14.44	Peak	100	45
10	17475.00	59.64	68.20	-8.56	41.60	18.04	Peak	100	288


Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		

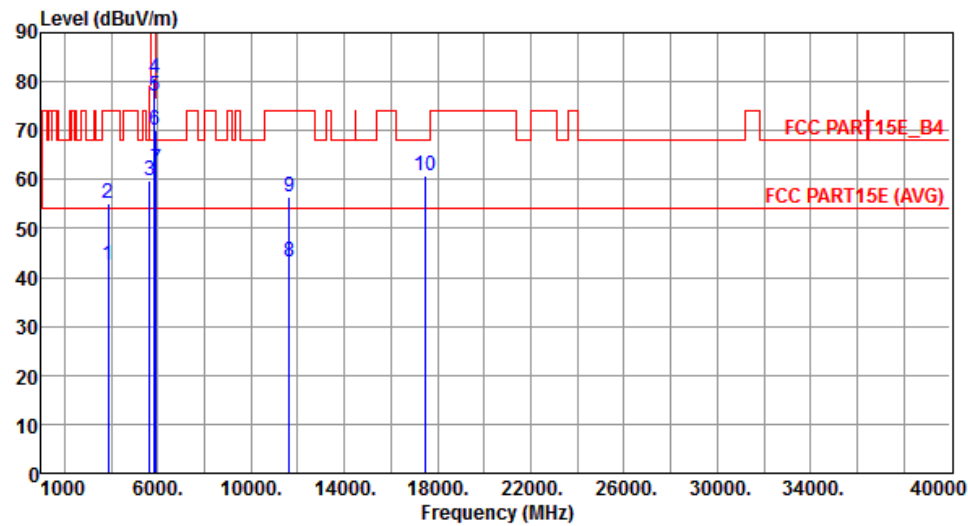

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	42.60	54.00	-11.40	40.46	2.14	Average	153	288
2	3883.33	55.02	74.00	-18.98	52.88	2.14	Peak	153	288
3	5650.00	59.77	68.20	-8.43	54.08	5.69	Peak	270	260
4	5850.00	80.63	122.20	-41.57	74.64	5.99	Peak	270	260
5	5855.00	77.13	110.80	-33.67	71.13	6.00	Peak	270	260
6	5875.00	70.15	105.20	-35.05	64.13	6.02	Peak	270	260
7	5925.00	62.04	68.20	-6.16	55.95	6.09	Peak	270	260
8	11650.00	43.26	54.00	-10.74	28.82	14.44	Average	100	270
9	11650.00	56.55	74.00	-17.45	42.11	14.44	Peak	100	270
10	17475.00	60.82	68.20	-7.38	42.78	18.04	Peak	106	2


3.5.21 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		

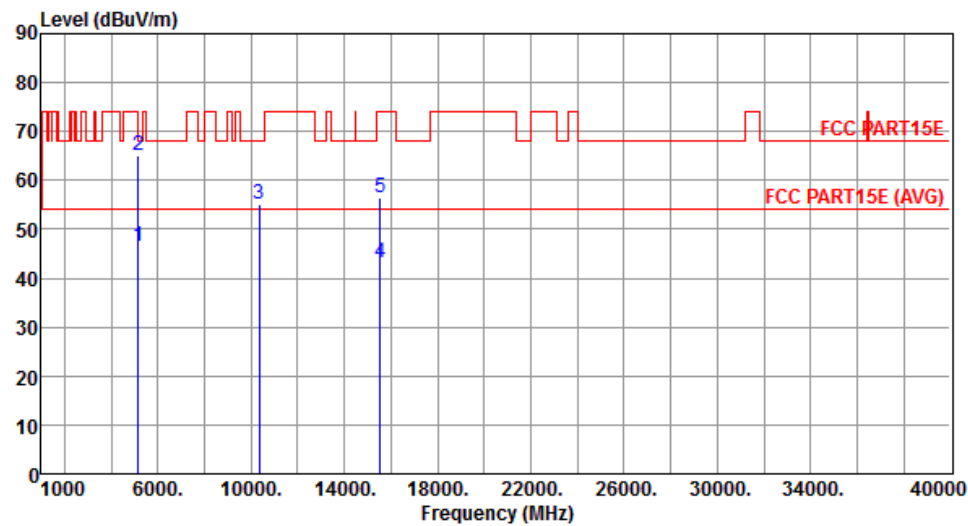


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.43	54.00	-7.57	41.41	5.02	Average	100	210
2	5150.00	65.24	74.00	-8.76	60.22	5.02	Peak	100	210
3	10360.00	55.21	68.20	-12.99	41.47	13.74	Peak	196	296
4	15540.00	43.26	54.00	-10.74	28.29	14.97	Average	134	309
5	15540.00	56.39	74.00	-17.61	41.42	14.97	Peak	134	309

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Vertical		

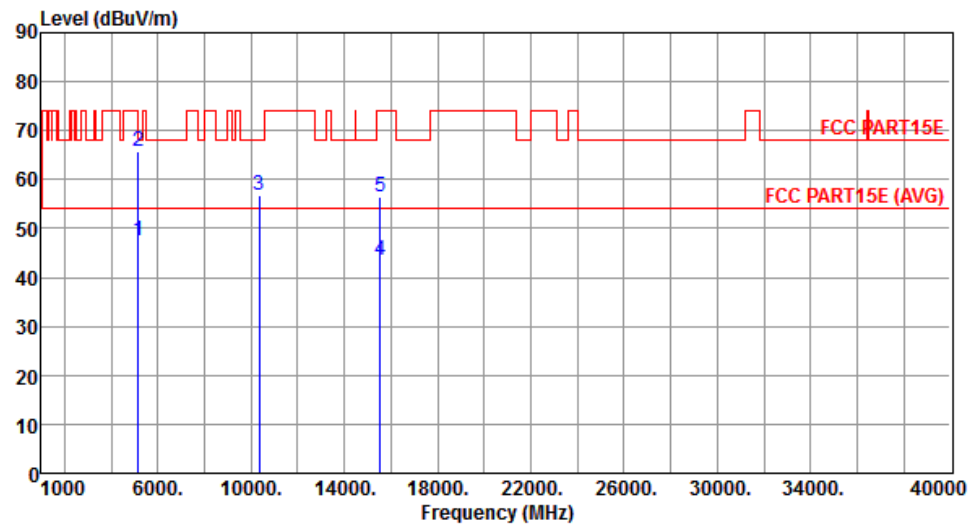


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.54	54.00	-6.46	42.52	5.02	Average	203	259
2	5150.00	65.61	74.00	-8.39	60.59	5.02	Peak	203	259
3	10360.00	56.92	68.20	-11.28	43.18	13.74	Peak	100	152
4	15540.00	43.55	54.00	-10.45	28.58	14.97	Average	145	8
5	15540.00	56.31	74.00	-17.69	41.34	14.97	Peak	145	8

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

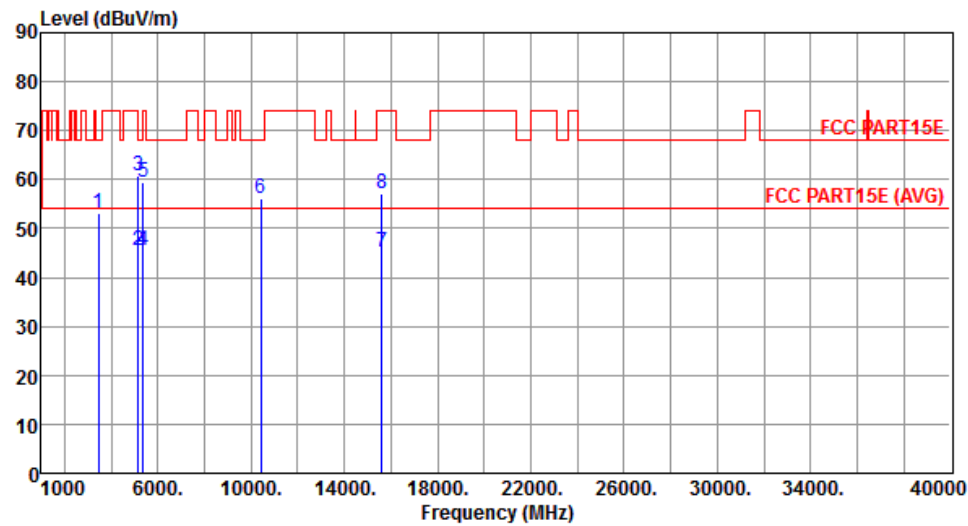


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.66	53.03	68.20	-15.17	52.17	0.86	Peak	100	168
2	5150.00	45.39	54.00	-8.61	40.37	5.02	Average	151	220
3	5150.00	60.70	74.00	-13.30	55.68	5.02	Peak	151	220
4	5350.00	45.48	54.00	-8.52	40.17	5.31	Average	151	220
5	5350.00	59.42	74.00	-14.58	54.11	5.31	Peak	151	220
6	10400.00	56.14	68.20	-12.06	42.37	13.77	Peak	203	275
7	15600.00	45.03	54.00	-8.97	30.09	14.94	Average	141	311
8	15600.00	57.09	74.00	-16.91	42.15	14.94	Peak	141	311

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

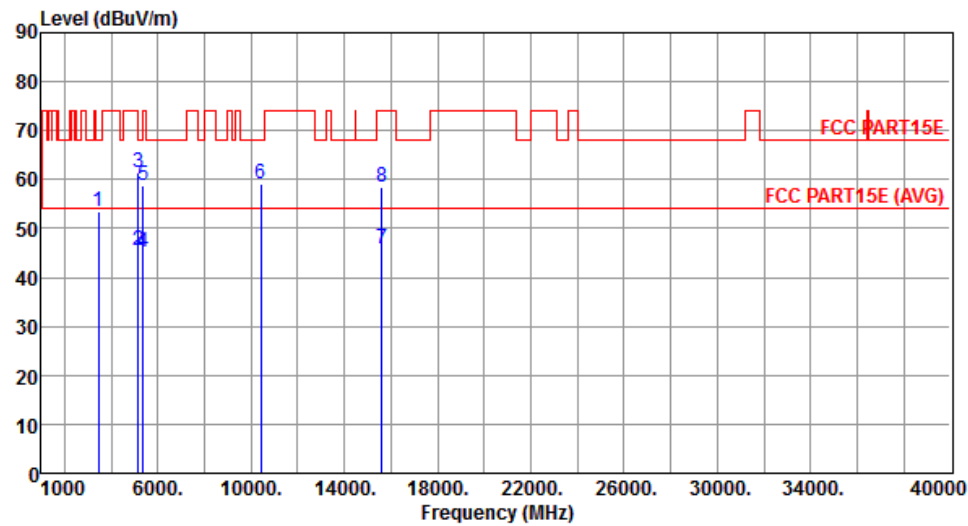


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3466.66	53.53	68.20	-14.67	52.67	0.86	Peak	100	153
2	5150.00	45.55	54.00	-8.45	40.53	5.02	Average	217	292
3	5150.00	61.40	74.00	-12.60	56.38	5.02	Peak	217	292
4	5350.00	45.33	54.00	-8.67	40.02	5.31	Average	217	292
5	5350.00	58.81	74.00	-15.19	53.50	5.31	Peak	217	292
6	10400.00	59.13	68.20	-9.07	45.36	13.77	Peak	100	142
7	15600.00	45.68	54.00	-8.32	30.74	14.94	Average	150	4
8	15600.00	58.51	74.00	-15.49	43.57	14.94	Peak	150	4

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

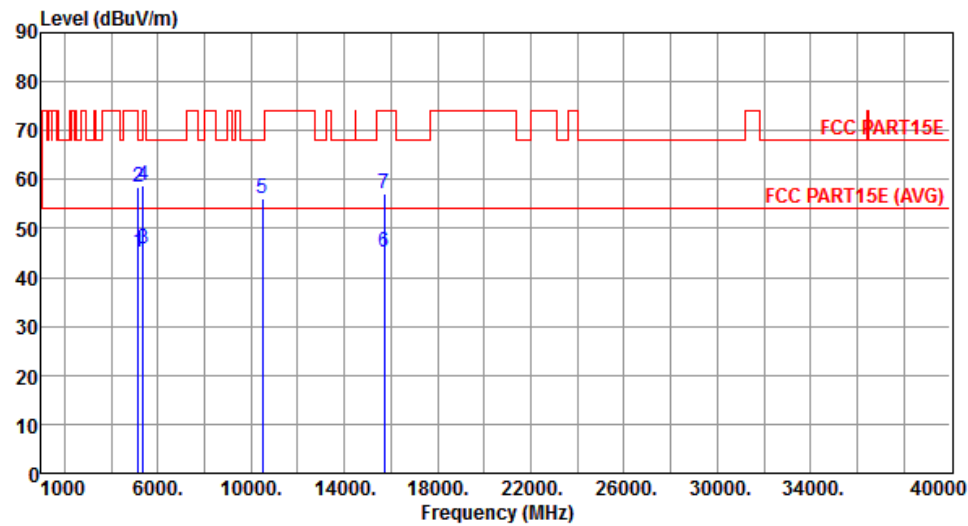


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.33	54.00	-8.67	40.31	5.02	Average	166	223
2	5150.00	58.29	74.00	-15.71	53.27	5.02	Peak	166	223
3	5350.00	45.93	54.00	-8.07	40.62	5.31	Average	166	223
4	5350.00	58.76	74.00	-15.24	53.45	5.31	Peak	166	223
5	10480.00	55.97	68.20	-12.23	42.16	13.81	Peak	201	297
6	15720.00	45.14	54.00	-8.86	30.23	14.91	Average	138	313
7	15720.00	57.28	74.00	-16.72	42.37	14.91	Peak	138	313

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

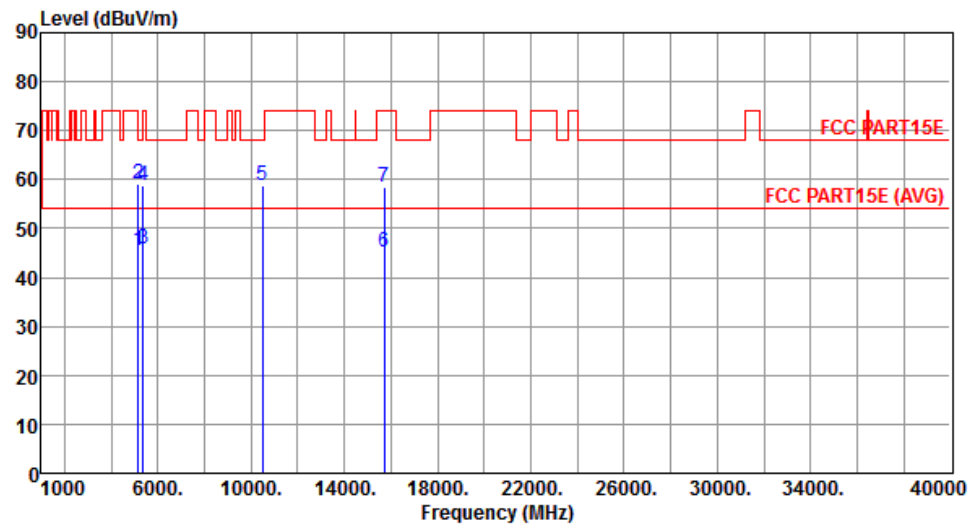


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.35	54.00	-8.65	40.33	5.02	Average	209	257
2	5150.00	59.14	74.00	-14.86	54.12	5.02	Peak	209	257
3	5350.00	45.70	54.00	-8.30	40.39	5.31	Average	209	257
4	5350.00	58.81	74.00	-15.19	53.50	5.31	Peak	209	257
5	10480.00	58.77	68.20	-9.43	44.96	13.81	Peak	100	136
6	15720.00	45.22	54.00	-8.78	30.31	14.91	Average	145	8
7	15720.00	58.31	74.00	-15.69	43.40	14.91	Peak	145	8

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		

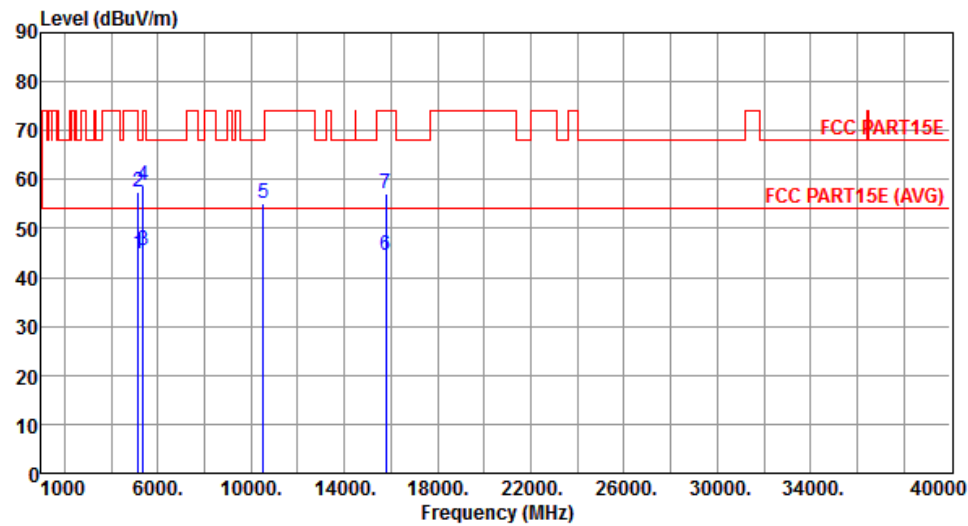


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.70	54.00	-9.30	39.68	5.02	Average	164	212
2	5150.00	57.30	74.00	-16.70	52.28	5.02	Peak	164	212
3	5350.00	45.53	54.00	-8.47	40.22	5.31	Average	164	212
4	5350.00	58.71	74.00	-15.29	53.40	5.31	Peak	164	212
5	10520.00	55.06	68.20	-13.14	41.22	13.84	Peak	180	56
6	15780.00	44.52	54.00	-9.48	29.65	14.87	Average	100	297
7	15780.00	57.26	74.00	-16.74	42.39	14.87	Peak	100	297

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Vertical		

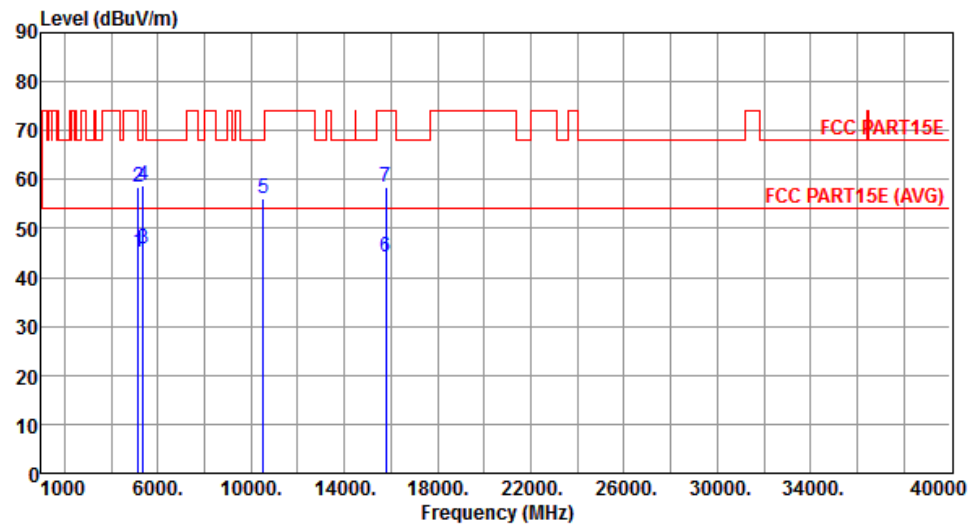


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.16	54.00	-8.84	40.14	5.02	Average	125	186
2	5150.00	58.39	74.00	-15.61	53.37	5.02	Peak	125	186
3	5350.00	45.92	54.00	-8.08	40.61	5.31	Average	125	186
4	5350.00	58.62	74.00	-15.38	53.31	5.31	Peak	125	186
5	10520.00	56.26	68.20	-11.94	42.42	13.84	Peak	100	131
6	15780.00	44.22	54.00	-9.78	29.35	14.87	Average	100	9
7	15780.00	58.31	74.00	-15.69	43.44	14.87	Peak	100	9

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Horizontal		

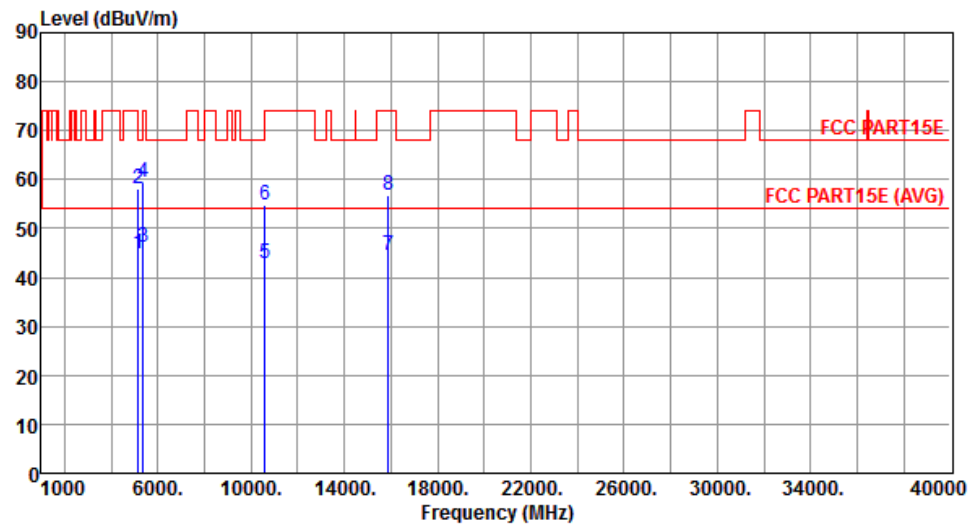


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
					dBuV			cm	deg
1	5150.00	44.72	54.00	-9.28	39.70	5.02	Average	165	218
2	5150.00	58.14	74.00	-15.86	53.12	5.02	Peak	165	218
3	5350.00	46.14	54.00	-7.86	40.83	5.31	Average	165	218
4	5350.00	59.33	74.00	-14.67	54.02	5.31	Peak	165	218
5	10600.00	42.73	54.00	-11.27	28.81	13.92	Average	181	40
6	10600.00	54.94	74.00	-19.06	41.02	13.92	Peak	181	40
7	15900.00	44.63	54.00	-9.37	29.79	14.84	Average	100	278
8	15900.00	56.88	74.00	-17.12	42.04	14.84	Peak	100	278

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Vertical		

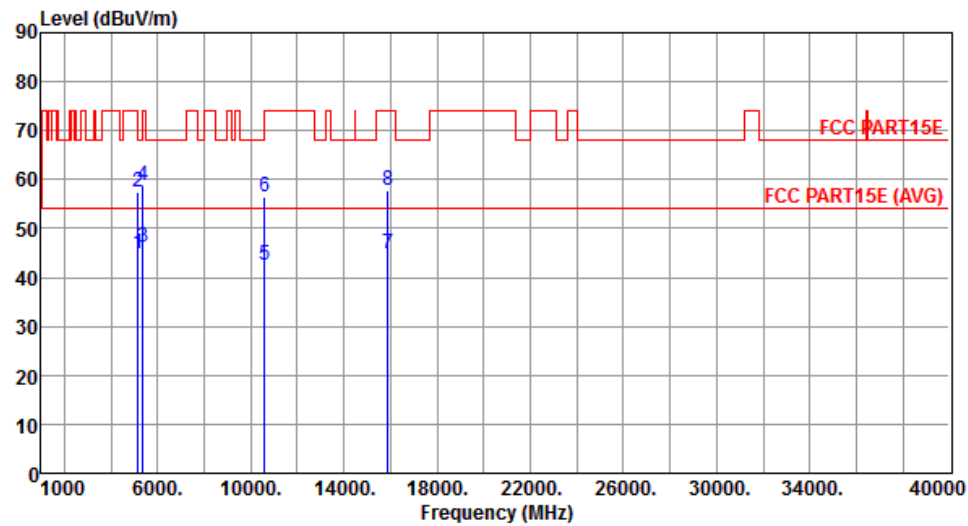


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.93	54.00	-9.07	39.91	5.02	Average	127	188
2	5150.00	57.56	74.00	-16.44	52.54	5.02	Peak	127	188
3	5350.00	46.31	54.00	-7.69	41.00	5.31	Average	127	188
4	5350.00	58.62	74.00	-15.38	53.31	5.31	Peak	127	188
5	10600.00	42.38	54.00	-11.62	28.46	13.92	Average	100	143
6	10600.00	56.54	74.00	-17.46	42.62	13.92	Peak	100	143
7	15900.00	44.69	54.00	-9.31	29.85	14.84	Average	100	11
8	15900.00	57.82	74.00	-16.18	42.98	14.84	Peak	100	11

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		

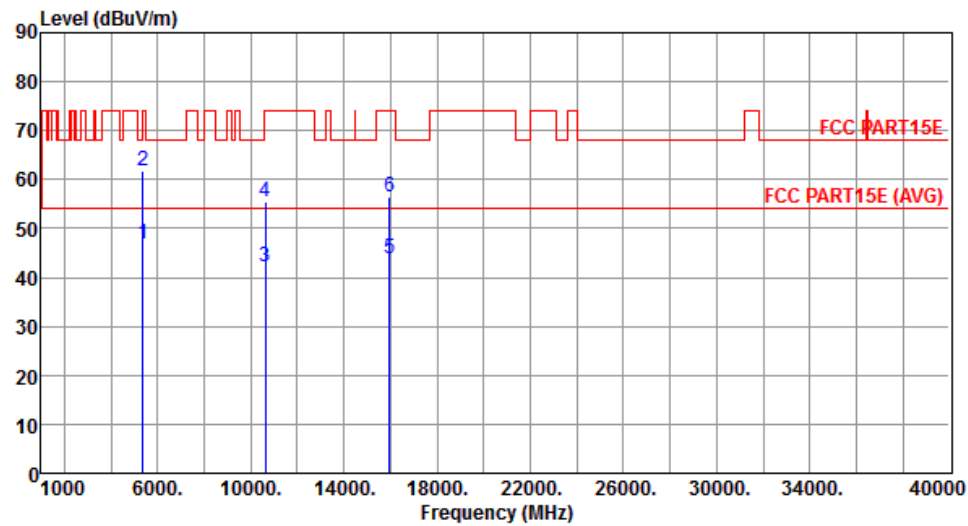


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.73	54.00	-7.27	41.42	5.31	Average	173	210
2	5350.00	61.75	74.00	-12.25	56.44	5.31	Peak	173	210
3	10640.00	42.17	54.00	-11.83	28.21	13.96	Average	179	40
4	10640.00	55.36	74.00	-18.64	41.40	13.96	Peak	179	40
5	15960.00	43.88	54.00	-10.12	29.07	14.81	Average	100	306
6	15960.00	56.59	74.00	-17.41	41.78	14.81	Peak	100	306

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Vertical		

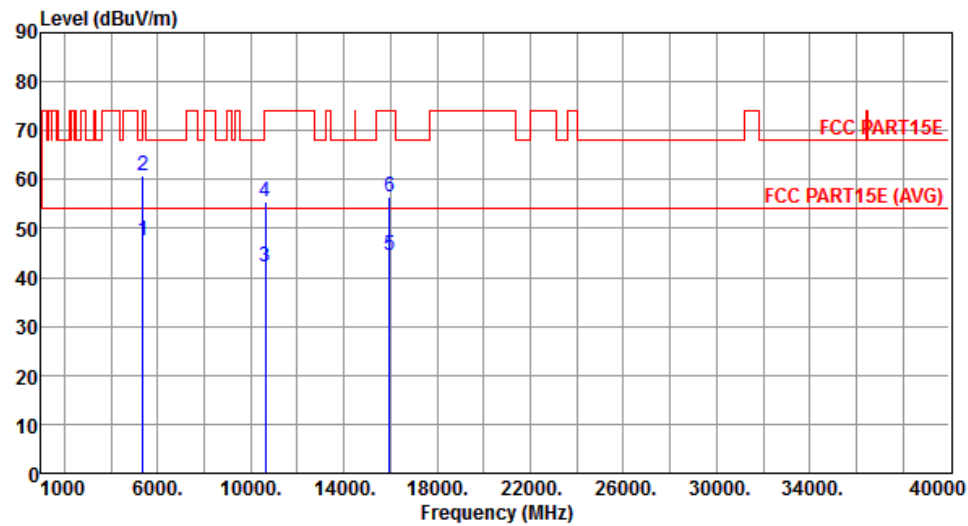


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.44	54.00	-6.56	42.13	5.31	Average	125	191
2	5350.00	60.93	74.00	-13.07	55.62	5.31	Peak	125	191
3	10640.00	42.15	54.00	-11.85	28.19	13.96	Average	100	133
4	10640.00	55.62	74.00	-18.38	41.66	13.96	Peak	100	133
5	15960.00	44.42	54.00	-9.58	29.61	14.81	Average	100	7
6	15960.00	56.40	74.00	-17.60	41.59	14.81	Peak	100	7

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		

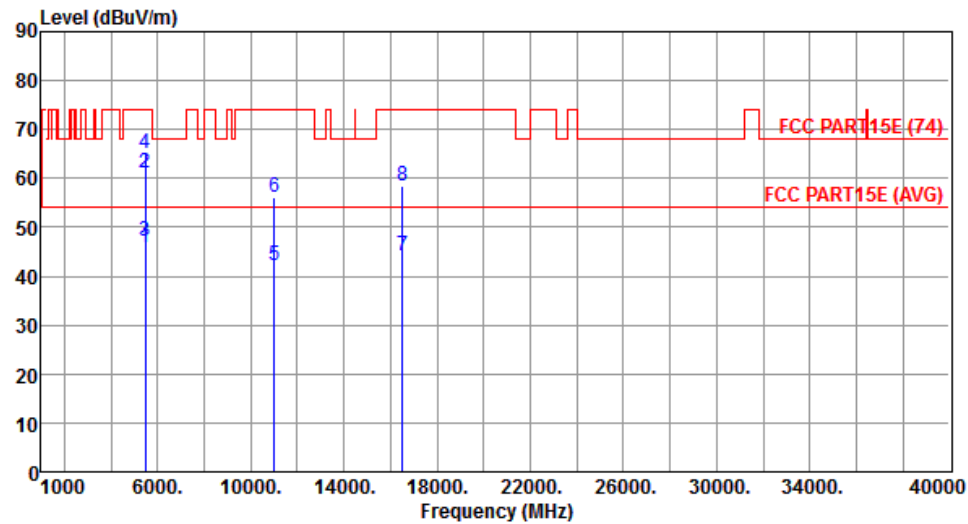


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.88	54.00	-8.12	40.42	5.46	Average	129	223
2	5460.00	61.07	74.00	-12.93	55.61	5.46	Peak	129	223
3	5470.00	47.19	54.00	-6.81	41.72	5.47	Average	129	223
4	5470.00	64.95	74.00	-9.05	59.48	5.47	Peak	129	223
5	11000.00	42.16	54.00	-11.84	27.86	14.30	Average	156	34
6	11000.00	56.13	74.00	-17.87	41.83	14.30	Peak	156	34
7	16500.00	44.27	54.00	-9.73	28.43	15.84	Average	100	142
8	16500.00	58.56	74.00	-15.44	42.72	15.84	Peak	100	142

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Vertical		

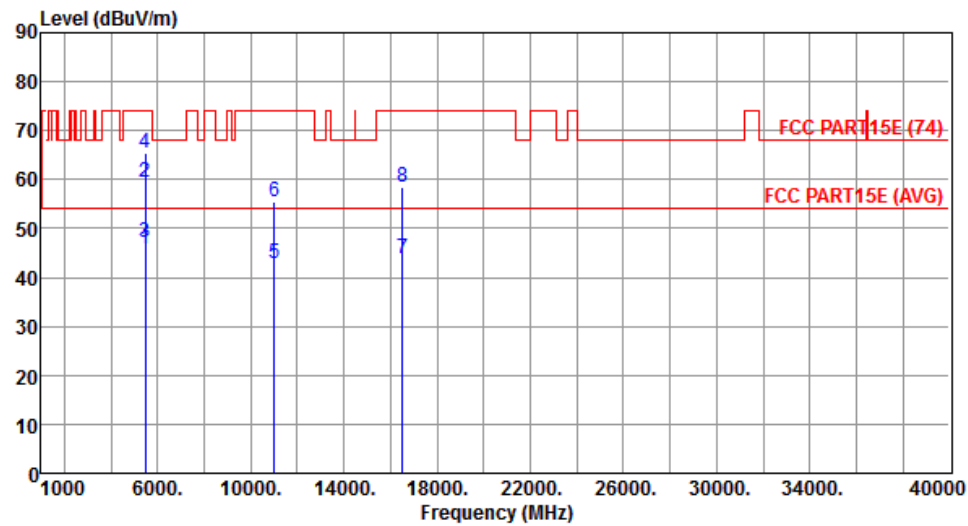


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.70	54.00	-8.30	40.24	5.46	Average	274	279
2	5460.00	59.34	74.00	-14.66	53.88	5.46	Peak	274	279
3	5470.00	47.12	54.00	-6.88	41.65	5.47	Average	274	279
4	5470.00	65.46	74.00	-8.54	59.99	5.47	Peak	274	279
5	11000.00	42.74	54.00	-11.26	28.44	14.30	Average	162	18
6	11000.00	55.47	74.00	-18.53	41.17	14.30	Peak	162	18
7	16500.00	43.94	54.00	-10.06	28.10	15.84	Average	100	335
8	16500.00	58.56	74.00	-15.44	42.72	15.84	Peak	100	335

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		

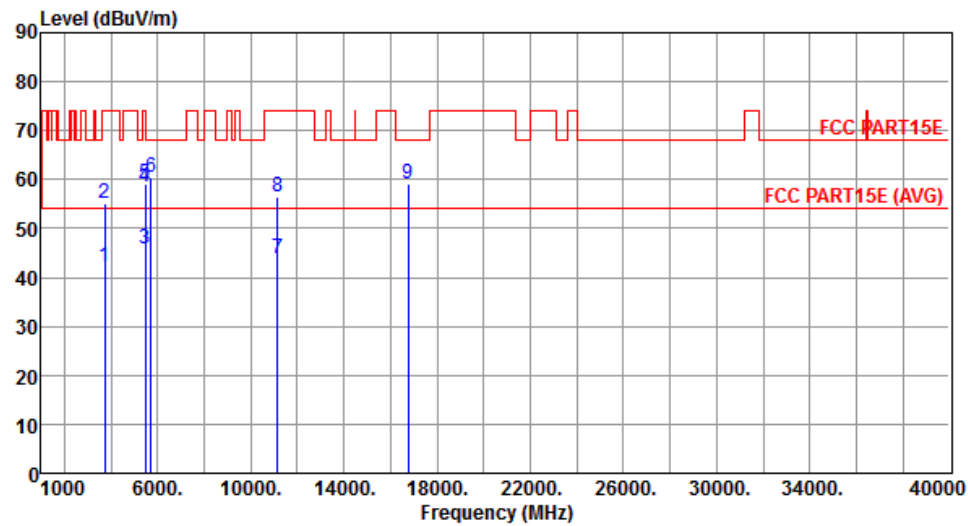


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	42.08	54.00	-11.92	40.48	1.60	Average	100	160
2	3720.00	55.23	74.00	-18.77	53.63	1.60	Peak	100	160
3	5460.00	45.69	54.00	-8.31	40.23	5.46	Average	148	206
4	5460.00	58.44	74.00	-15.56	52.98	5.46	Peak	148	206
5	5470.00	59.22	68.20	-8.98	53.75	5.47	Peak	148	206
6	5725.00	60.53	68.20	-7.67	54.72	5.81	Peak	148	206
7	11160.00	43.90	54.00	-10.10	29.46	14.44	Average	158	19
8	11160.00	56.38	74.00	-17.62	41.94	14.44	Peak	158	19
9	16740.00	59.10	68.20	-9.10	43.13	15.97	Peak	161	50

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Vertical		

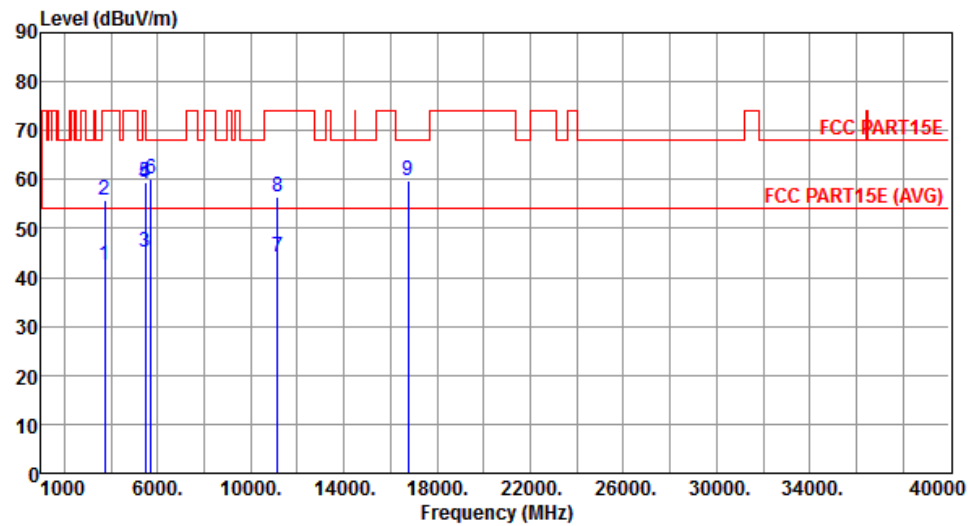


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3720.00	42.42	54.00	-11.58	40.82	1.60	Average	100	163
2	3720.00	55.88	74.00	-18.12	54.28	1.60	Peak	100	163
3	5460.00	45.02	54.00	-8.98	39.56	5.46	Average	313	249
4	5460.00	59.04	74.00	-14.96	53.58	5.46	Peak	313	249
5	5470.00	59.60	68.20	-8.60	54.13	5.47	Peak	313	249
6	5725.00	60.17	68.20	-8.03	54.36	5.81	Peak	313	249
7	11160.00	44.15	54.00	-9.85	29.71	14.44	Average	164	23
8	11160.00	56.41	74.00	-17.59	41.97	14.44	Peak	164	23
9	16740.00	59.83	68.20	-8.37	43.86	15.97	Peak	118	337

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

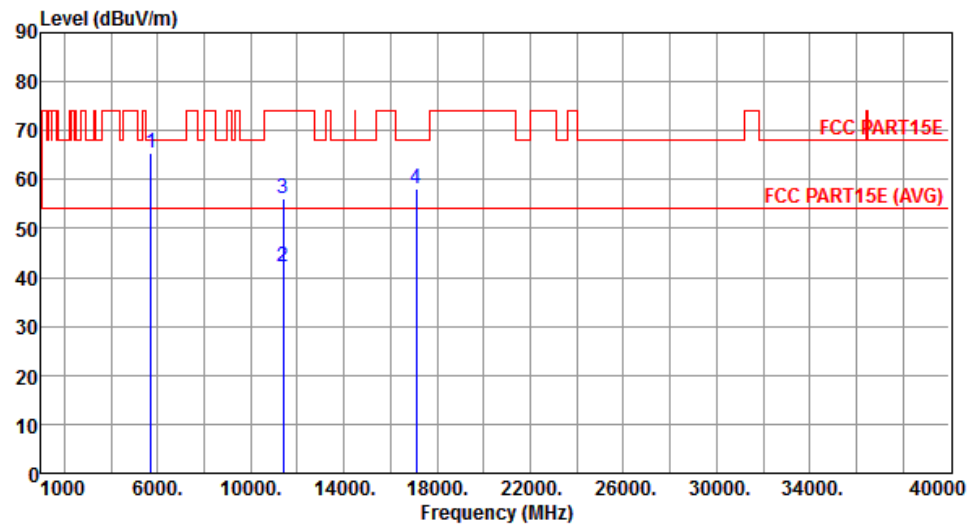


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	65.34	68.20	-2.86	59.53	5.81	Peak	116	218
2	11400.00	42.14	54.00	-11.86	27.49	14.65	Average	159	30
3	11400.00	56.21	74.00	-17.79	41.56	14.65	Peak	159	30
4	17100.00	58.22	68.20	-9.98	41.71	16.51	Peak	100	152

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Vertical		

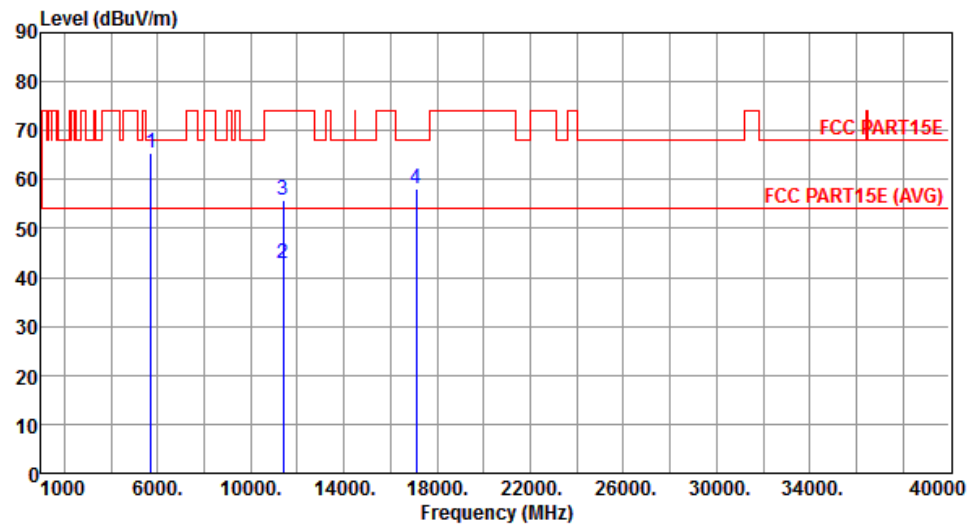


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	65.57	68.20	-2.63	59.76	5.81	Peak	250	238
2	11400.00	42.85	54.00	-11.15	28.20	14.65	Average	166	21
3	11400.00	55.74	74.00	-18.26	41.09	14.65	Peak	166	21
4	17100.00	58.23	68.20	-9.97	41.72	16.51	Peak	108	322

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		

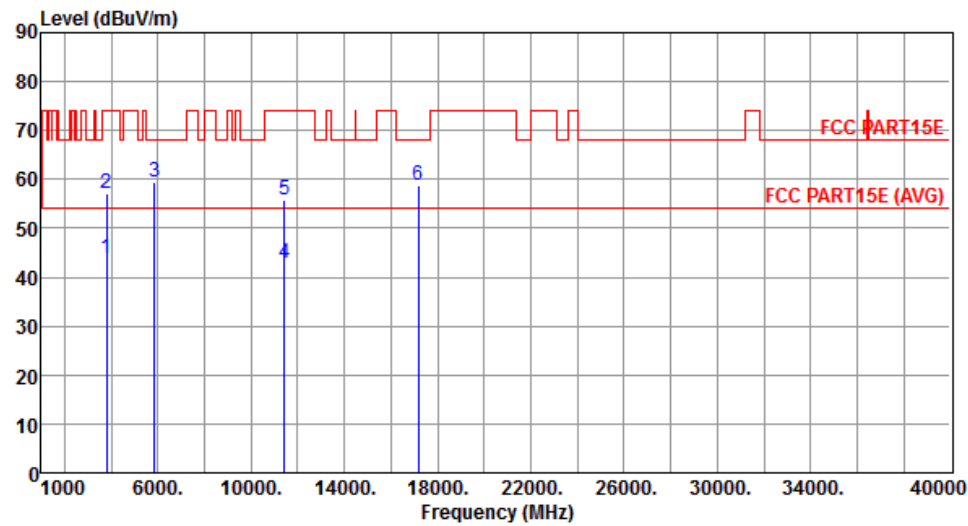


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	43.96	54.00	-10.04	42.06	1.90	Average	162	195
2	3813.33	57.11	74.00	-16.89	55.21	1.90	Peak	162	195
3	5850.00	59.39	68.20	-8.81	53.40	5.99	Peak	100	147
4	11440.00	42.71	54.00	-11.29	28.02	14.69	Average	164	26
5	11440.00	55.87	74.00	-18.13	41.18	14.69	Peak	164	26
6	17160.00	58.78	68.20	-9.42	42.02	16.76	Peak	100	298

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Vertical		

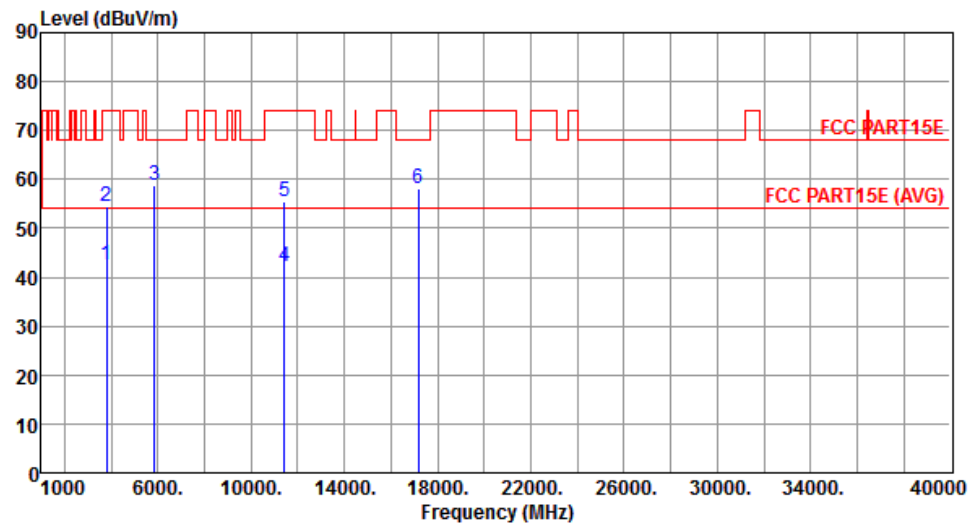


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3813.33	42.54	54.00	-11.46	40.64	1.90	Average	170	283
2	3813.33	54.50	74.00	-19.50	52.60	1.90	Peak	170	283
3	5850.00	58.86	68.20	-9.34	52.87	5.99	Peak	268	261
4	11440.00	42.07	54.00	-11.93	27.38	14.69	Average	100	173
5	11440.00	55.34	74.00	-18.66	40.65	14.69	Peak	100	173
6	17160.00	58.21	68.20	-9.99	41.45	16.76	Peak	104	0

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

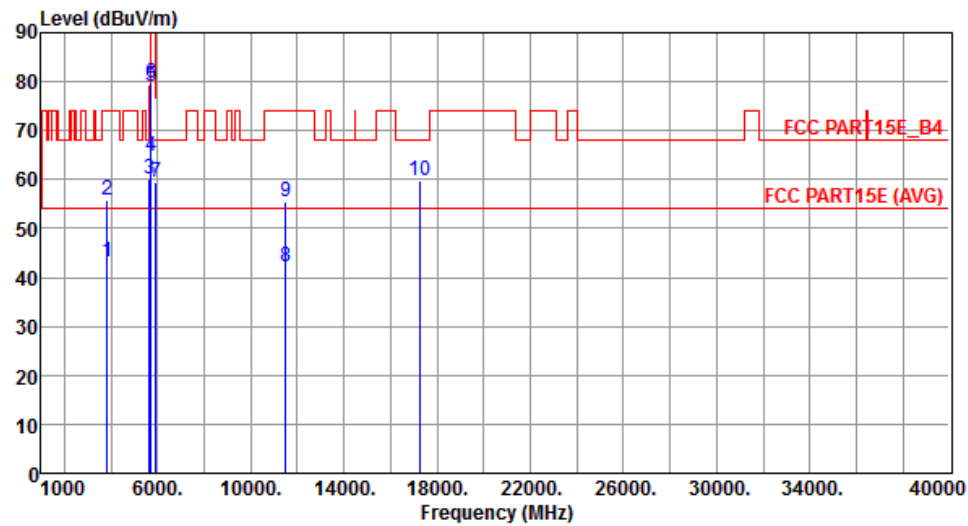


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	43.21	54.00	-10.79	41.25	1.96	Average	135	180
2	3830.00	55.73	74.00	-18.27	53.77	1.96	Peak	135	180
3	5650.00	60.14	68.20	-8.06	54.45	5.69	Peak	128	220
4	5700.00	64.78	105.20	-40.42	59.01	5.77	Peak	128	220
5	5720.00	79.19	110.80	-31.61	73.40	5.79	Peak	128	220
6	5725.00	79.84	122.20	-42.36	74.03	5.81	Peak	128	220
7	5925.00	59.49	68.20	-8.71	53.40	6.09	Peak	128	220
8	11490.00	42.32	54.00	-11.68	27.59	14.73	Average	100	41
9	11490.00	55.30	74.00	-18.70	40.57	14.73	Peak	100	41
10	17235.00	59.63	68.20	-8.57	42.56	17.07	Peak	100	297

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Vertical		

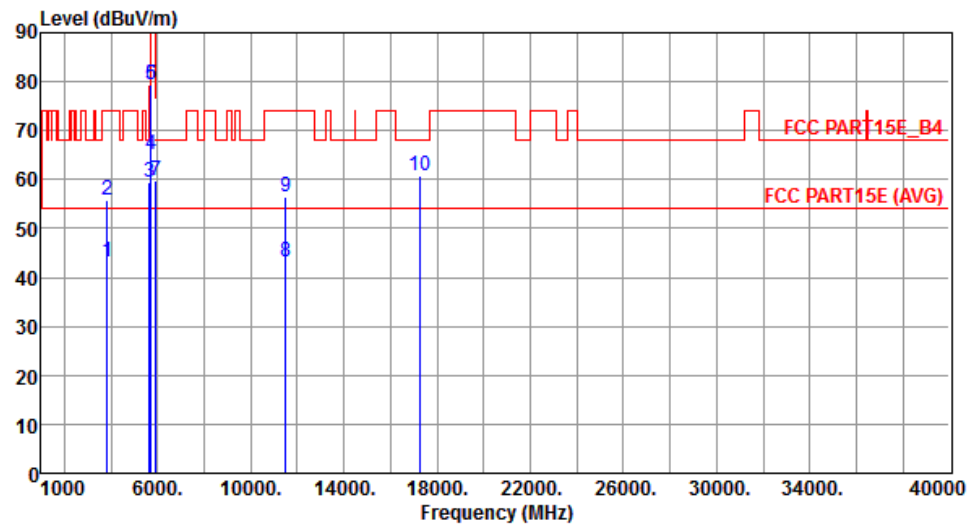


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	43.18	54.00	-10.82	41.22	1.96	Average	155	278
2	3830.00	55.73	74.00	-18.27	53.77	1.96	Peak	155	278
3	5650.00	59.50	68.20	-8.70	53.81	5.69	Peak	282	278
4	5700.00	65.17	105.20	-40.03	59.40	5.77	Peak	282	278
5	5720.00	79.44	110.80	-31.36	73.65	5.79	Peak	282	278
6	5725.00	79.50	122.20	-42.70	73.69	5.81	Peak	282	278
7	5925.00	59.89	68.20	-8.31	53.80	6.09	Peak	282	278
8	11490.00	43.24	54.00	-10.76	28.51	14.73	Average	100	290
9	11490.00	56.54	74.00	-17.46	41.81	14.73	Peak	100	290
10	17235.00	60.64	68.20	-7.56	43.57	17.07	Peak	111	0

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		

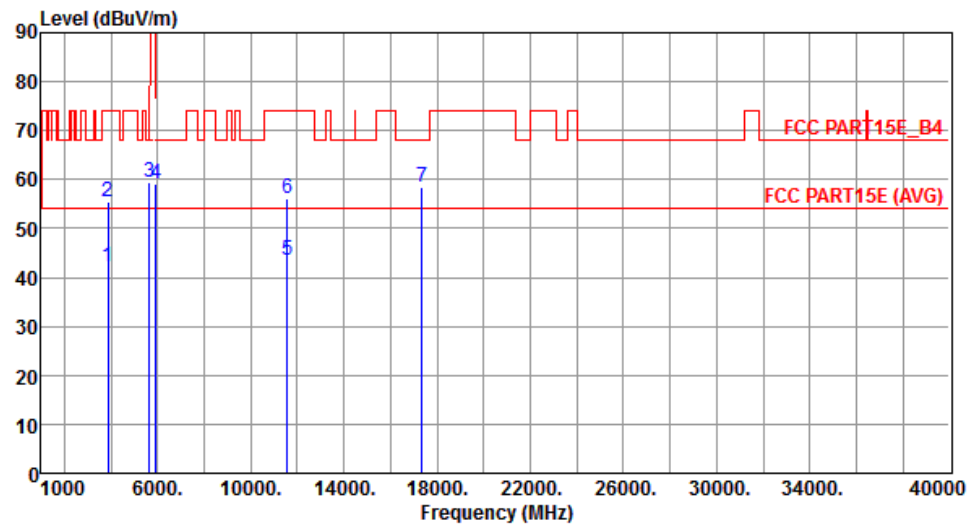


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	42.17	54.00	-11.83	40.12	2.05	Average	156	172
2	3856.66	55.43	74.00	-18.57	53.38	2.05	Peak	156	172
3	5650.00	59.36	68.20	-8.84	53.67	5.69	Peak	104	211
4	5925.00	59.17	68.20	-9.03	53.08	6.09	Peak	104	211
5	11570.00	43.48	54.00	-10.52	28.88	14.60	Average	100	42
6	11570.00	56.23	74.00	-17.77	41.63	14.60	Peak	100	42
7	17355.00	58.56	68.20	-9.64	41.01	17.55	Peak	100	48

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Vertical		

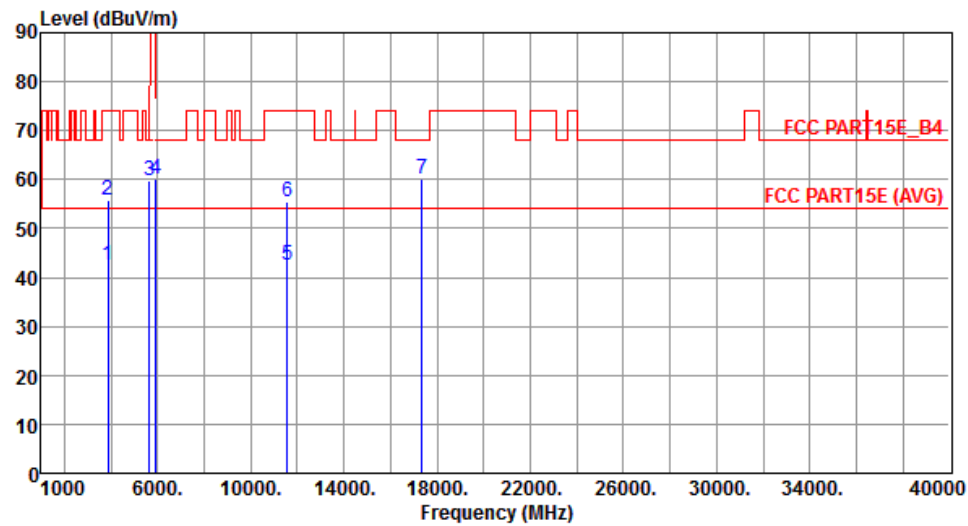


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.60	42.39	54.00	-11.61	40.34	2.05	Average	100	168
2	3856.60	55.82	74.00	-18.18	53.77	2.05	Peak	100	168
3	5650.00	59.65	68.20	-8.55	53.96	5.69	Peak	271	252
4	5925.00	60.01	68.20	-8.19	53.92	6.09	Peak	271	252
5	11570.00	42.49	54.00	-11.51	27.89	14.60	Average	100	276
6	11570.00	55.42	74.00	-18.58	40.82	14.60	Peak	100	276
7	17355.00	60.27	68.20	-7.93	42.72	17.55	Peak	100	5

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

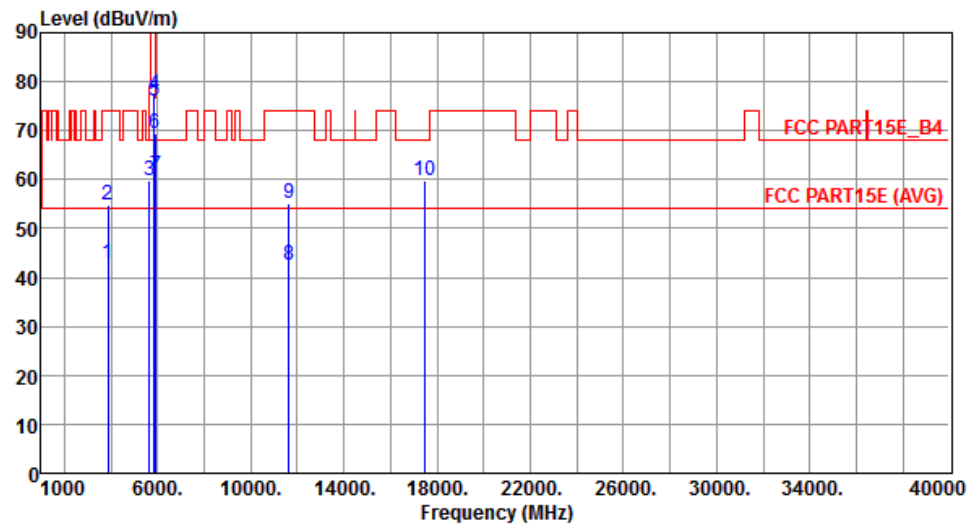

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	42.82	54.00	-11.18	40.68	2.14	Average	133	174
2	3883.33	54.77	74.00	-19.23	52.63	2.14	Peak	133	174
3	5650.00	59.66	68.20	-8.54	53.97	5.69	Peak	103	211
4	5850.00	77.23	122.20	-44.97	71.24	5.99	Peak	103	211
5	5855.00	76.21	110.80	-34.59	70.21	6.00	Peak	103	211
6	5875.00	69.35	105.20	-35.85	63.33	6.02	Peak	103	211
7	5925.00	60.93	68.20	-7.27	54.84	6.09	Peak	103	211
8	11650.00	42.35	54.00	-11.65	27.91	14.44	Average	100	42
9	11650.00	55.28	74.00	-18.72	40.84	14.44	Peak	100	42
10	17475.00	59.68	68.20	-8.52	41.64	18.04	Peak	100	276


Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

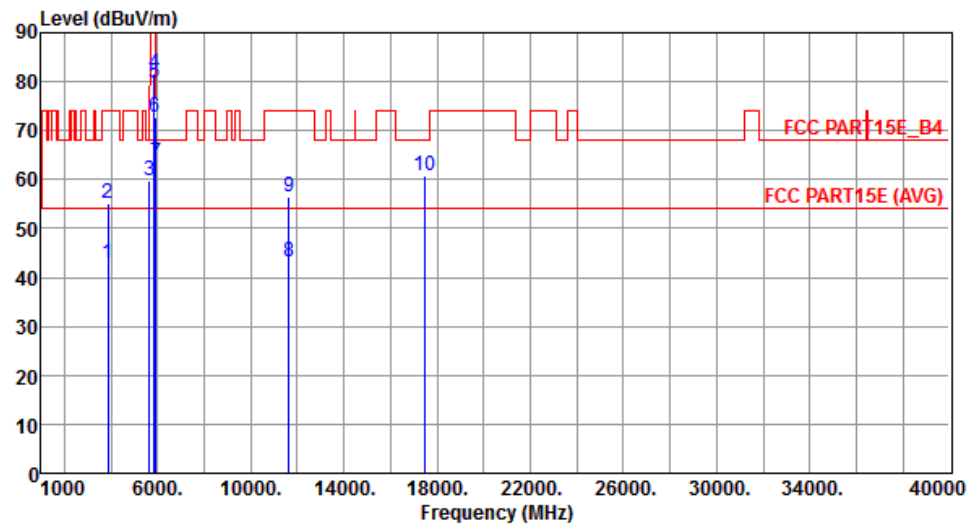

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.33	42.69	54.00	-11.31	40.55	2.14	Average	159	285
2	3883.33	55.20	74.00	-18.80	53.06	2.14	Peak	159	285
3	5650.00	59.70	68.20	-8.50	54.01	5.69	Peak	256	262
4	5850.00	81.59	122.20	-40.61	75.60	5.99	Peak	256	262
5	5855.00	79.63	110.80	-31.17	73.63	6.00	Peak	256	262
6	5875.00	72.78	105.20	-32.42	66.76	6.02	Peak	256	262
7	5925.00	63.40	68.20	-4.80	57.31	6.09	Peak	256	262
8	11650.00	43.18	54.00	-10.82	28.74	14.44	Average	100	262
9	11650.00	56.48	74.00	-17.52	42.04	14.44	Peak	100	262
10	17475.00	60.77	68.20	-7.43	42.73	18.04	Peak	106	0


3.5.22 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		

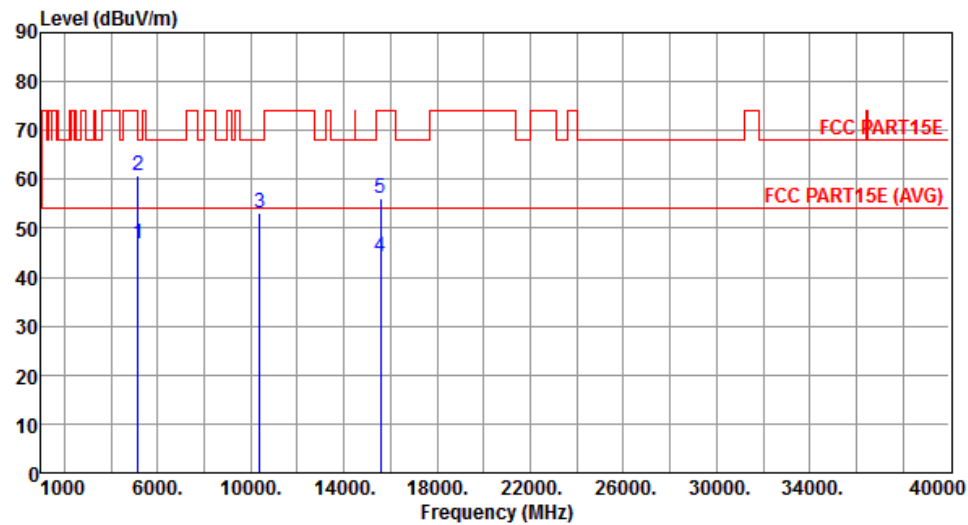


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.94	54.00	-7.06	41.92	5.02	Average	108	217
2	5150.00	60.80	74.00	-13.20	55.78	5.02	Peak	108	217
3	10380.00	53.22	68.20	-14.98	39.47	13.75	Peak	175	63
4	15570.00	44.22	54.00	-9.78	29.26	14.96	Average	100	305
5	15570.00	56.28	74.00	-17.72	41.32	14.96	Peak	100	305

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

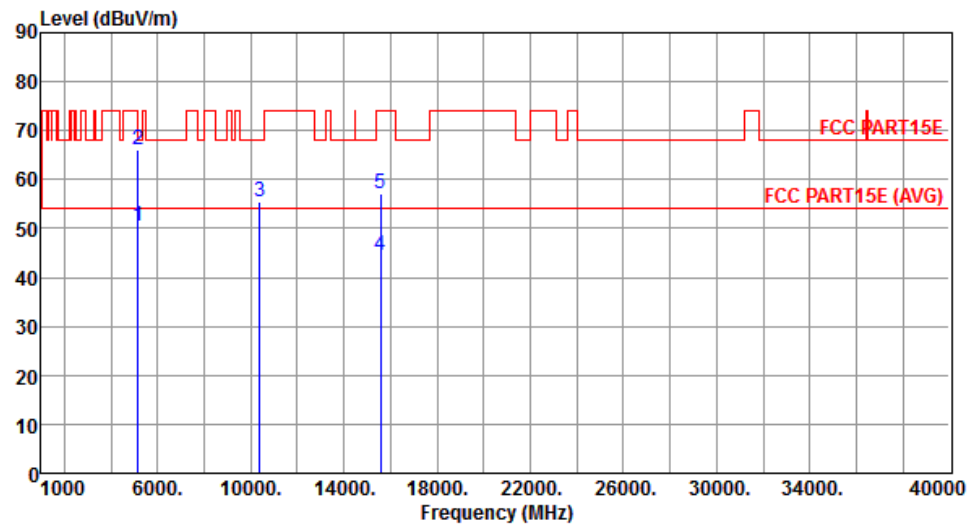


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	50.60	54.00	-3.40	45.58	5.02	Average	139	190
2	5150.00	66.03	74.00	-7.97	61.01	5.02	Peak	139	190
3	10380.00	55.62	68.20	-12.58	41.87	13.75	Peak	100	146
4	15570.00	44.53	54.00	-9.47	29.57	14.96	Average	100	18
5	15570.00	57.12	74.00	-16.88	42.16	14.96	Peak	100	18

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

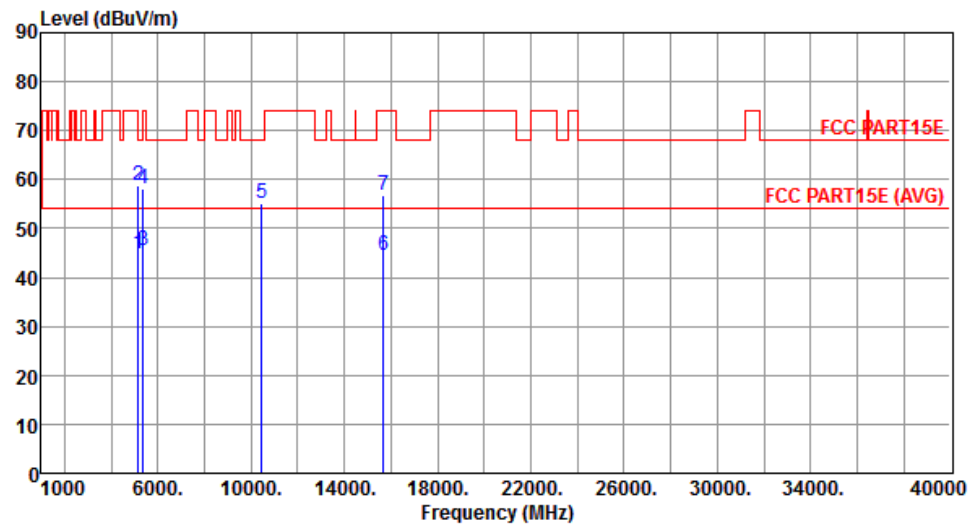


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.84	54.00	-9.16	39.82	5.02	Average	108	219
2	5150.00	58.70	74.00	-15.30	53.68	5.02	Peak	108	219
3	5350.00	45.49	54.00	-8.51	40.18	5.31	Average	108	219
4	5350.00	58.22	74.00	-15.78	52.91	5.31	Peak	108	219
5	10460.00	55.02	68.20	-13.18	41.23	13.79	Peak	164	59
6	15690.00	44.43	54.00	-9.57	29.51	14.92	Average	100	265
7	15690.00	56.70	74.00	-17.30	41.78	14.92	Peak	100	265

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

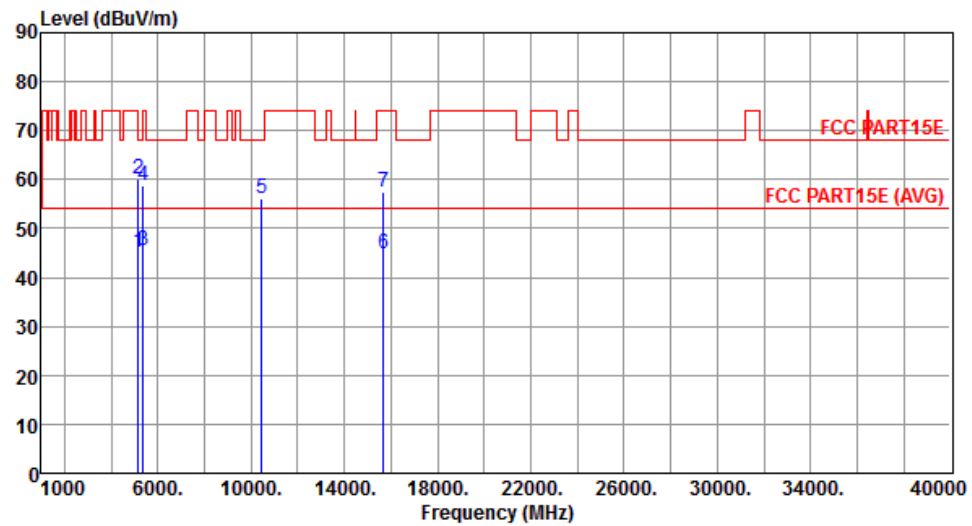


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.29	54.00	-8.71	40.27	5.02	Average	264	273
2	5150.00	60.07	74.00	-13.93	55.05	5.02	Peak	264	273
3	5350.00	45.37	54.00	-8.63	40.06	5.31	Average	264	273
4	5350.00	58.94	74.00	-15.06	53.63	5.31	Peak	264	273
5	10460.00	56.03	68.20	-12.17	42.24	13.79	Peak	100	161
6	15690.00	44.68	54.00	-9.32	29.76	14.92	Average	100	13
7	15690.00	57.54	74.00	-16.46	42.62	14.92	Peak	100	13

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		

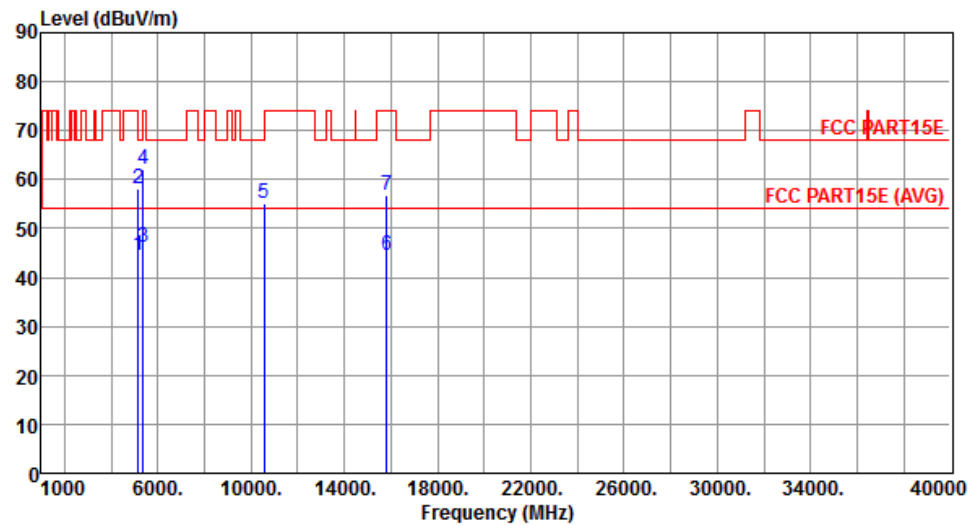


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.42	54.00	-9.58	39.40	5.02	Average	113	215
2	5150.00	58.24	74.00	-15.76	53.22	5.02	Peak	113	215
3	5350.00	46.14	54.00	-7.86	40.83	5.31	Average	113	215
4	5350.00	62.11	74.00	-11.89	56.80	5.31	Peak	113	215
5	10540.00	55.09	68.20	-13.11	41.23	13.86	Peak	166	58
6	15810.00	44.50	54.00	-9.50	29.64	14.86	Average	100	262
7	15810.00	56.73	74.00	-17.27	41.87	14.86	Peak	100	262

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Vertical		

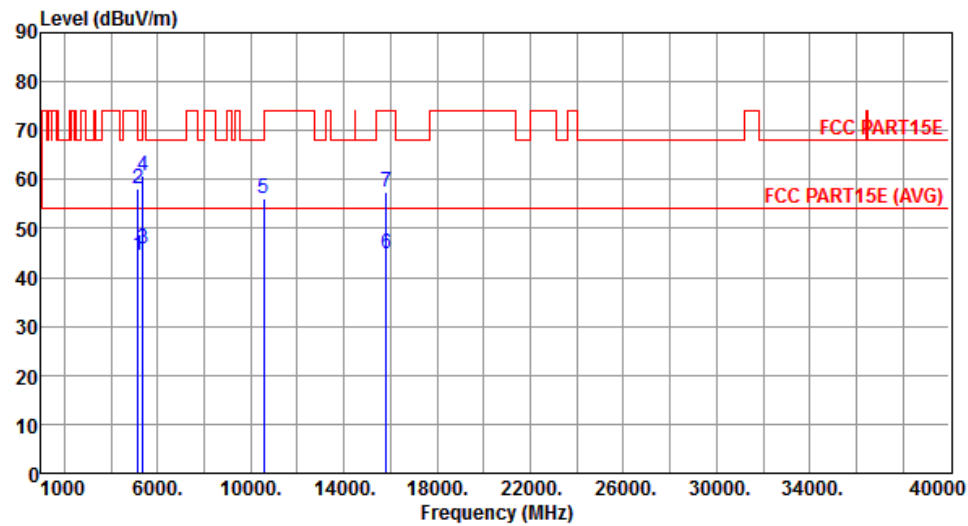


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.42	54.00	-9.58	39.40	5.02	Average	266	279
2	5150.00	58.00	74.00	-16.00	52.98	5.02	Peak	266	279
3	5350.00	45.89	54.00	-8.11	40.58	5.31	Average	266	279
4	5350.00	60.69	74.00	-13.31	55.38	5.31	Peak	266	279
5	10540.00	56.17	68.20	-12.03	42.31	13.86	Peak	100	155
6	15810.00	44.73	54.00	-9.27	29.87	14.86	Average	100	6
7	15810.00	57.61	74.00	-16.39	42.75	14.86	Peak	100	6

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		

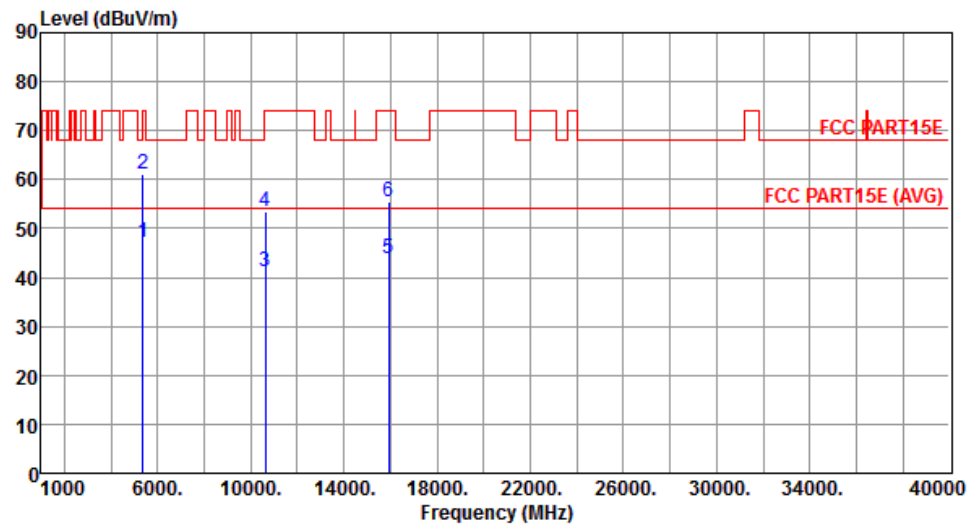


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.16	54.00	-6.84	41.85	5.31	Average	114	217
2	5350.00	60.94	74.00	-13.06	55.63	5.31	Peak	114	217
3	10620.00	41.10	54.00	-12.90	27.17	13.93	Average	171	62
4	10620.00	53.48	74.00	-20.52	39.55	13.93	Peak	171	62
5	15930.00	43.69	54.00	-10.31	28.87	14.82	Average	100	297
6	15930.00	55.35	74.00	-18.65	40.53	14.82	Peak	100	297

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Vertical		

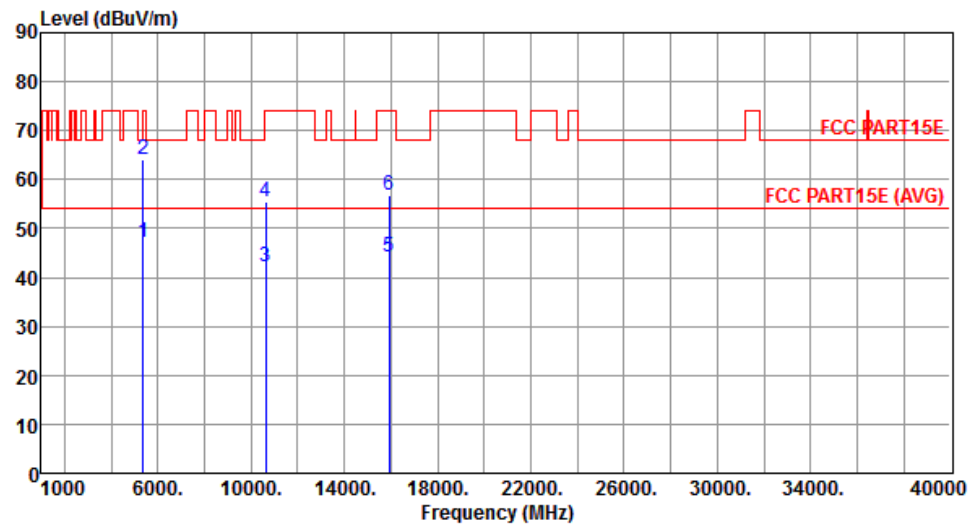


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.09	54.00	-6.91	41.78	5.31	Average	263	279
2	5350.00	64.23	74.00	-9.77	58.92	5.31	Peak	263	279
3	10620.00	42.33	54.00	-11.67	28.40	13.93	Average	100	158
4	10620.00	55.31	74.00	-18.69	41.38	13.93	Peak	100	158
5	15930.00	44.14	54.00	-9.86	29.32	14.82	Average	100	26
6	15930.00	56.67	74.00	-17.33	41.85	14.82	Peak	100	26

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		

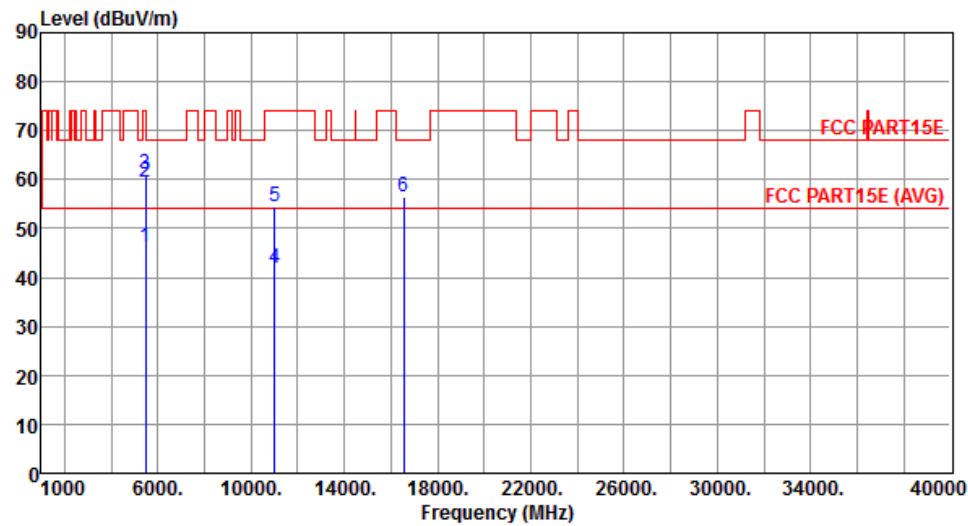


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.07	54.00	-7.93	40.61	5.46	Average	139	225
2	5460.00	59.38	74.00	-14.62	53.92	5.46	Peak	139	225
3	5470.00	60.95	68.20	-7.25	55.48	5.47	Peak	139	225
4	11020.00	41.91	54.00	-12.09	27.59	14.32	Average	162	48
5	11020.00	54.48	74.00	-19.52	40.16	14.32	Peak	162	48
6	16530.00	56.49	68.20	-11.71	40.64	15.85	Peak	100	310

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Vertical		

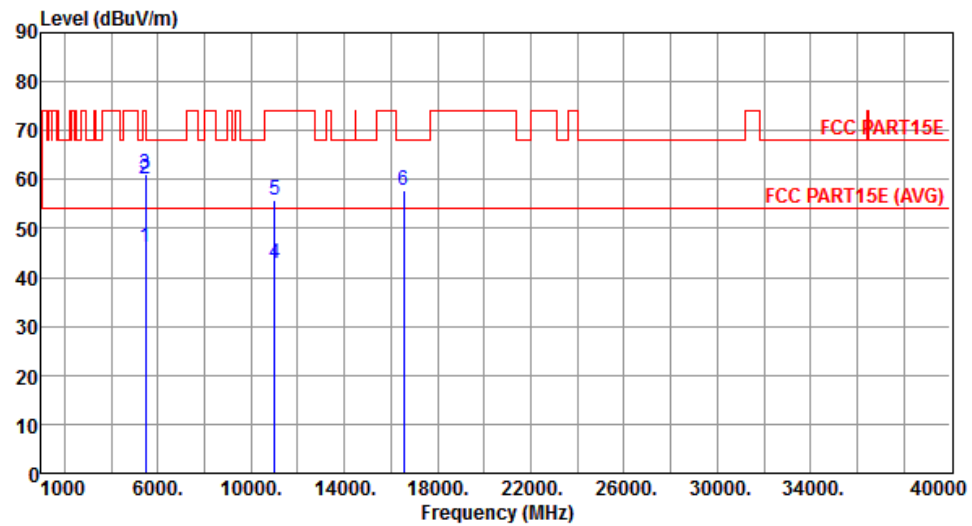


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.29	54.00	-7.71	40.83	5.46	Average	274	276
2	5460.00	59.96	74.00	-14.04	54.50	5.46	Peak	274	276
3	5470.00	61.25	68.20	-6.95	55.78	5.47	Peak	274	276
4	11020.00	43.00	54.00	-11.00	28.68	14.32	Average	100	170
5	11020.00	55.82	74.00	-18.18	41.50	14.32	Peak	100	170
6	16530.00	57.73	68.20	-10.47	41.88	15.85	Peak	100	31

Modulation	VHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		

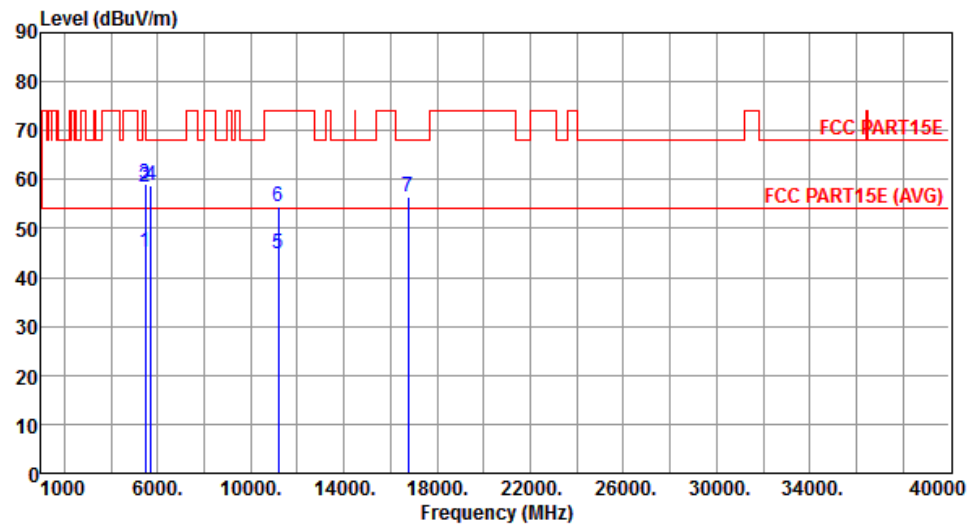


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.16	54.00	-8.84	39.70	5.46	Average	110	206
2	5460.00	58.59	74.00	-15.41	53.13	5.46	Peak	110	206
3	5470.00	59.02	68.20	-9.18	53.55	5.47	Peak	110	206
4	5725.00	58.91	68.20	-9.29	53.10	5.81	Peak	110	206
5	11180.00	44.72	54.00	-9.28	30.26	14.46	Average	165	52
6	11180.00	54.54	74.00	-19.46	40.08	14.46	Peak	165	52
7	16770.00	56.53	68.20	-11.67	40.55	15.98	Peak	100	258

Modulation	VHT40	Test Freq. (MHz)	5590
Polarization	Vertical		

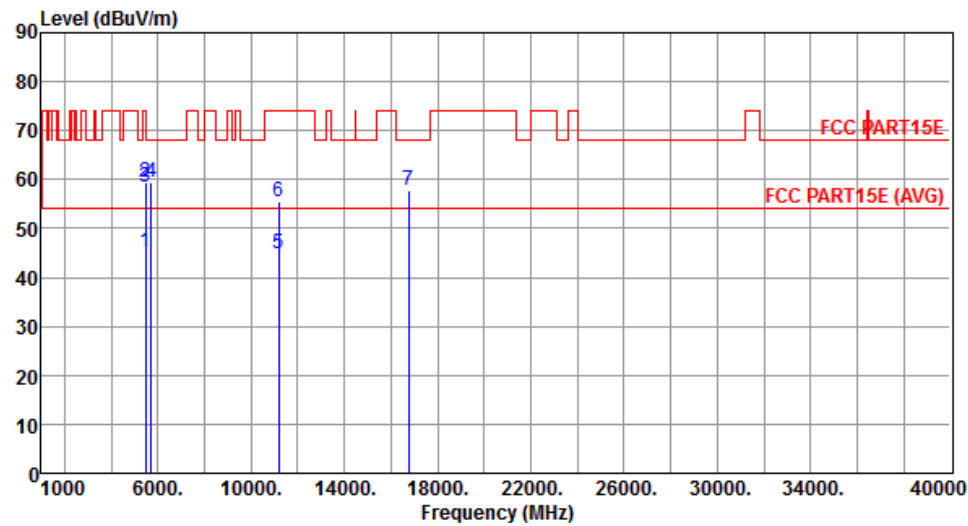


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.11	54.00	-8.89	39.65	5.46	Average	263	247
2	5460.00	59.43	74.00	-14.57	53.97	5.46	Peak	263	247
3	5470.00	58.33	68.20	-9.87	52.86	5.47	Peak	263	247
4	5725.00	59.52	68.20	-8.68	53.71	5.81	Peak	263	247
5	11180.00	44.97	54.00	-9.03	30.51	14.46	Average	100	163
6	11180.00	55.62	74.00	-18.38	41.16	14.46	Peak	100	163
7	16770.00	57.81	68.20	-10.39	41.83	15.98	Peak	100	10

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Horizontal		

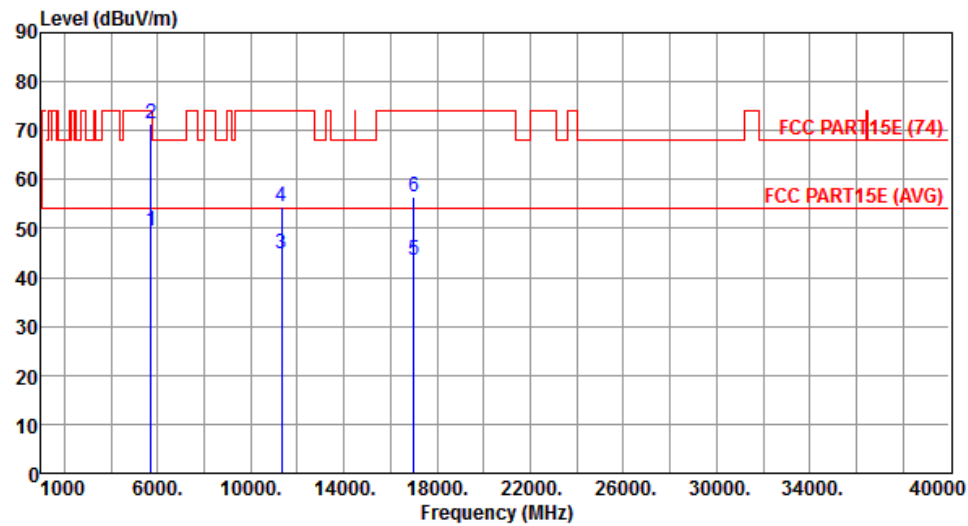


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	49.40	54.00	-4.60	43.59	5.81	Average	131	211
2	5725.00	71.30	74.00	-2.70	65.49	5.81	Peak	131	211
3	11340.00	44.68	54.00	-9.32	30.08	14.60	Average	161	50
4	11340.00	54.51	74.00	-19.49	39.91	14.60	Peak	161	50
5	17010.00	43.53	54.00	-10.47	27.38	16.15	Average	100	264
6	17010.00	56.43	74.00	-17.57	40.28	16.15	Peak	100	264

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Vertical		

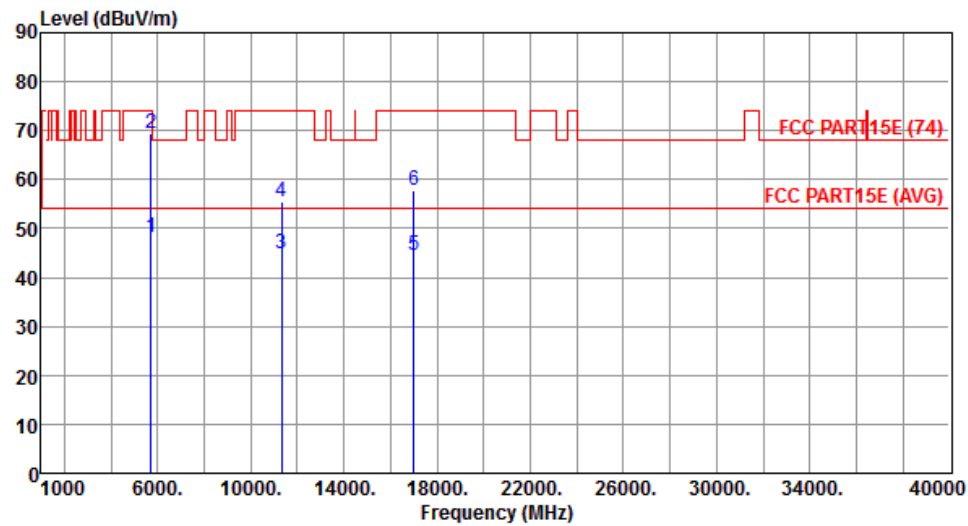


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	48.11	54.00	-5.89	42.30	5.81	Average	261	253
2	5725.00	69.26	74.00	-4.74	63.45	5.81	Peak	261	253
3	11340.00	44.86	54.00	-9.14	30.26	14.60	Average	100	161
4	11340.00	55.56	74.00	-18.44	40.96	14.60	Peak	100	161
5	17010.00	44.48	54.00	-9.52	28.33	16.15	Average	100	23
6	17010.00	57.75	74.00	-16.25	41.60	16.15	Peak	100	23

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		

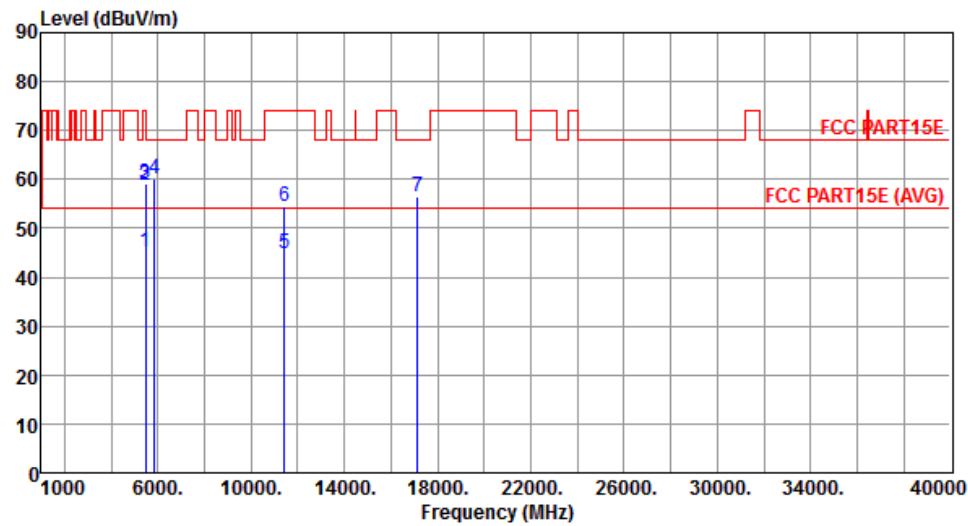


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.32	54.00	-8.68	39.86	5.46	Average	146	209
2	5460.00	58.80	74.00	-15.20	53.34	5.46	Peak	146	209
3	5470.00	59.16	68.20	-9.04	53.69	5.47	Peak	146	209
4	5850.00	60.12	68.20	-8.08	54.13	5.99	Peak	146	209
5	11420.00	44.67	54.00	-9.33	30.00	14.67	Average	161	44
6	11420.00	54.48	74.00	-19.52	39.81	14.67	Peak	161	44
7	17130.00	56.41	68.20	-11.79	39.77	16.64	Peak	100	252

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Vertical		

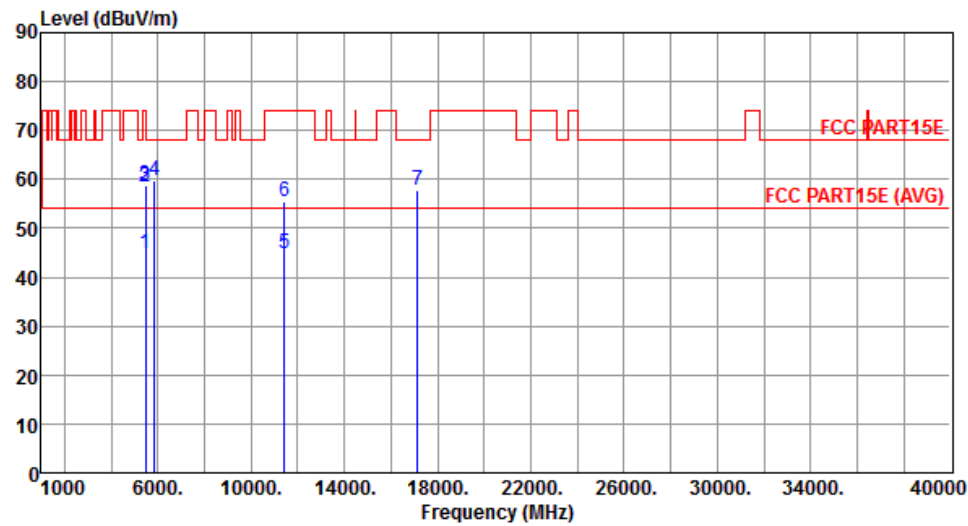


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	44.72	54.00	-9.28	39.26	5.46	Average	263	264
2	5460.00	58.51	74.00	-15.49	53.05	5.46	Peak	263	264
3	5470.00	58.71	68.20	-9.49	53.24	5.47	Peak	263	264
4	5850.00	59.75	68.20	-8.45	53.76	5.99	Peak	263	264
5	11420.00	44.92	54.00	-9.08	30.25	14.67	Average	100	156
6	11420.00	55.54	74.00	-18.46	40.87	14.67	Peak	100	156
7	17130.00	57.79	68.20	-10.41	41.15	16.64	Peak	100	18

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		

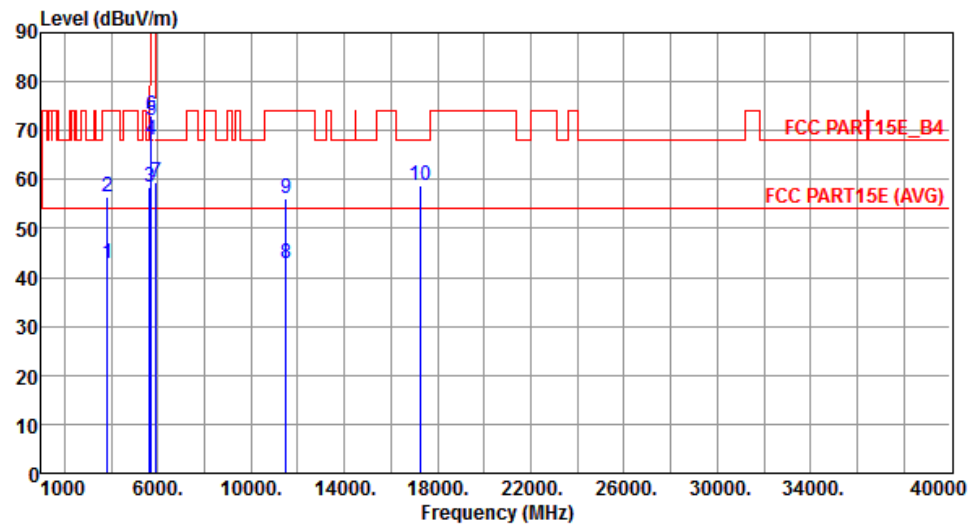


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3836.66	42.99	54.00	-11.01	41.01	1.98	Average	112	20
2	3836.66	56.46	74.00	-17.54	54.48	1.98	Peak	112	20
3	5650.00	58.46	68.20	-9.74	52.77	5.69	Peak	112	217
4	5700.00	68.16	105.20	-37.04	62.39	5.77	Peak	112	217
5	5720.00	72.15	110.80	-38.65	66.36	5.79	Peak	112	217
6	5725.00	73.21	122.20	-48.99	67.40	5.81	Peak	112	217
7	5925.00	59.53	68.20	-8.67	53.44	6.09	Peak	112	217
8	11510.00	42.68	54.00	-11.32	27.96	14.72	Average	100	173
9	11510.00	56.16	74.00	-17.84	41.44	14.72	Peak	100	173
10	17265.00	58.62	68.20	-9.58	41.45	17.17	Peak	100	38

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Vertical		

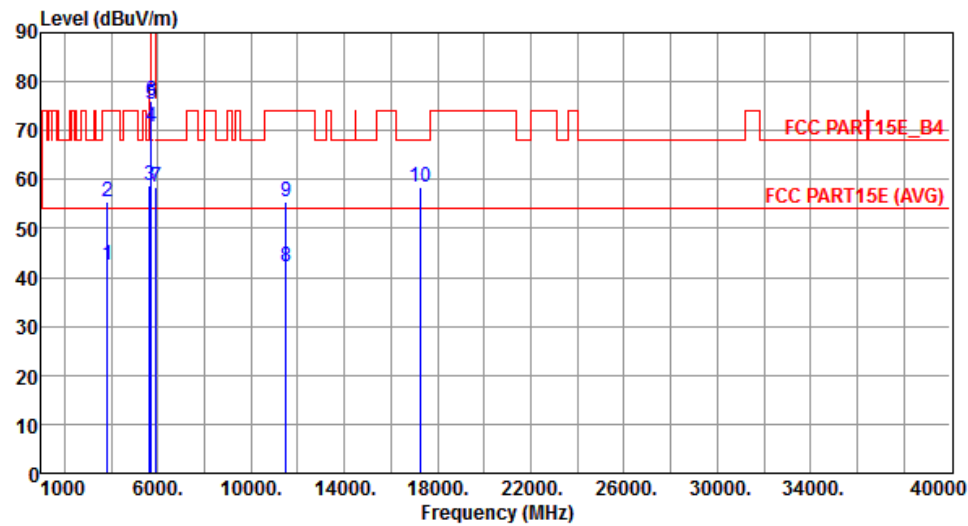


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3836.66	42.43	54.00	-11.57	40.45	1.98	Average	100	155
2	3836.66	55.43	74.00	-18.57	53.45	1.98	Peak	100	155
3	5650.00	58.83	68.20	-9.37	53.14	5.69	Peak	152	270
4	5700.00	70.85	105.20	-34.35	65.08	5.77	Peak	152	270
5	5720.00	75.50	110.80	-35.30	69.71	5.79	Peak	152	270
6	5725.00	75.92	122.20	-46.28	70.11	5.81	Peak	152	270
7	5925.00	58.41	68.20	-9.79	52.32	6.09	Peak	152	270
8	11510.00	42.27	54.00	-11.73	27.55	14.72	Average	100	165
9	11510.00	55.44	74.00	-18.56	40.72	14.72	Peak	100	165
10	17265.00	58.56	68.20	-9.64	41.39	17.17	Peak	100	196

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

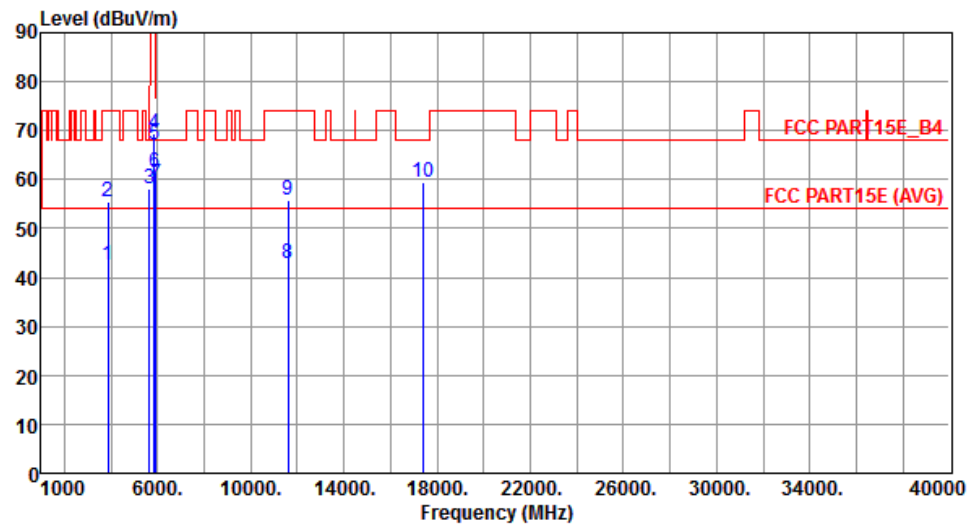

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3863.33	42.51	54.00	-11.49	40.44	2.07	Average	100	165
2	3863.33	55.34	74.00	-18.66	53.27	2.07	Peak	100	165
3	5650.00	57.97	68.20	-10.23	52.28	5.69	Peak	135	222
4	5850.00	69.45	122.20	-52.75	63.46	5.99	Peak	135	222
5	5855.00	67.23	110.80	-43.57	61.23	6.00	Peak	135	222
6	5875.00	61.54	105.20	-43.66	55.52	6.02	Peak	135	222
7	5925.00	58.97	68.20	-9.23	52.88	6.09	Peak	135	222
8	11590.00	42.80	54.00	-11.20	28.24	14.56	Average	100	142
9	11590.00	55.92	74.00	-18.08	41.36	14.56	Peak	100	142
10	17385.00	59.35	68.20	-8.85	41.68	17.67	Peak	100	192


Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

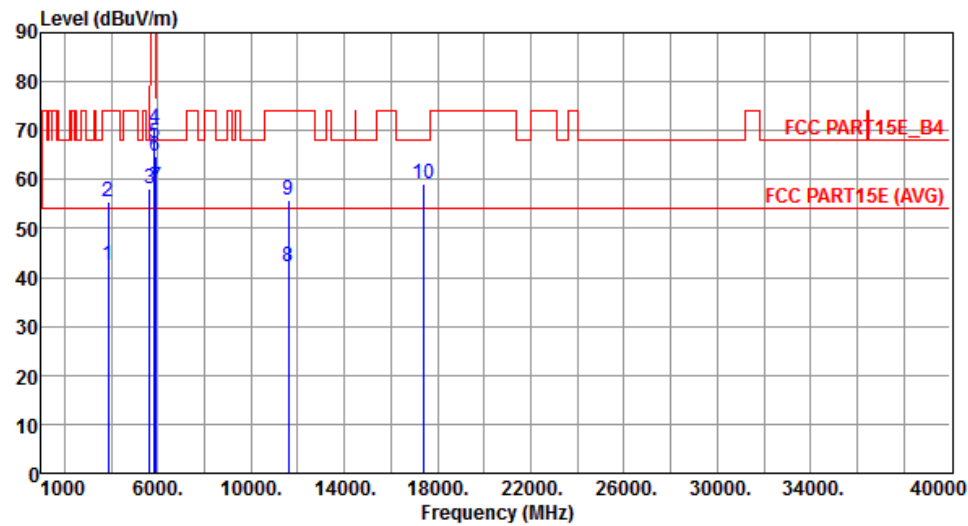

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3863.33	42.51	54.00	-11.49	40.44	2.07	Average	100	196
2	3863.33	55.45	74.00	-18.55	53.38	2.07	Peak	100	196
3	5650.00	58.13	68.20	-10.07	52.44	5.69	Peak	152	272
4	5850.00	70.43	122.20	-51.77	64.44	5.99	Peak	152	272
5	5855.00	67.43	110.80	-43.37	61.43	6.00	Peak	152	272
6	5875.00	64.67	105.20	-40.53	58.65	6.02	Peak	152	272
7	5925.00	58.48	68.20	-9.72	52.39	6.09	Peak	152	272
8	11590.00	42.24	54.00	-11.76	27.68	14.56	Average	100	212
9	11590.00	55.94	74.00	-18.06	41.38	14.56	Peak	100	212
10	17385.00	59.11	68.20	-9.09	41.44	17.67	Peak	100	263


3.5.23 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		

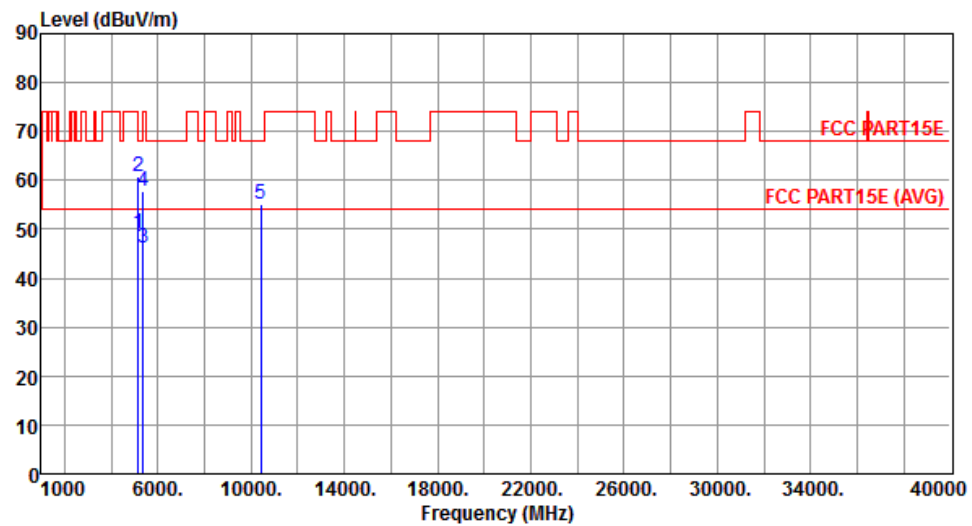


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	49.19	54.00	-4.81	44.17	5.02	Average	100	213
2	5150.00	60.80	74.00	-13.20	55.78	5.02	Peak	100	213
3	5350.00	46.02	54.00	-7.98	40.71	5.31	Average	100	213
4	5350.00	57.80	74.00	-16.20	52.49	5.31	Peak	100	213
5	10420.00	55.16	68.20	-13.04	41.38	13.78	Peak	100	174

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

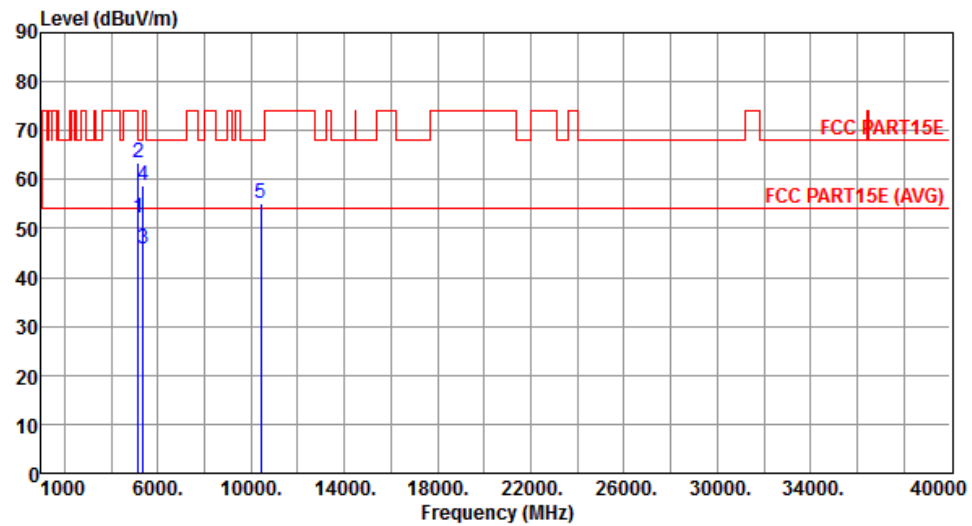


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.03	54.00	-1.97	47.01	5.02	Average	160	197
2	5150.00	63.56	74.00	-10.44	58.54	5.02	Peak	160	197
3	5350.00	45.94	54.00	-8.06	40.63	5.31	Average	160	197
4	5350.00	58.86	74.00	-15.14	53.55	5.31	Peak	160	197
5	10420.00	55.23	68.20	-12.97	41.45	13.78	Peak	100	156

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Horizontal		

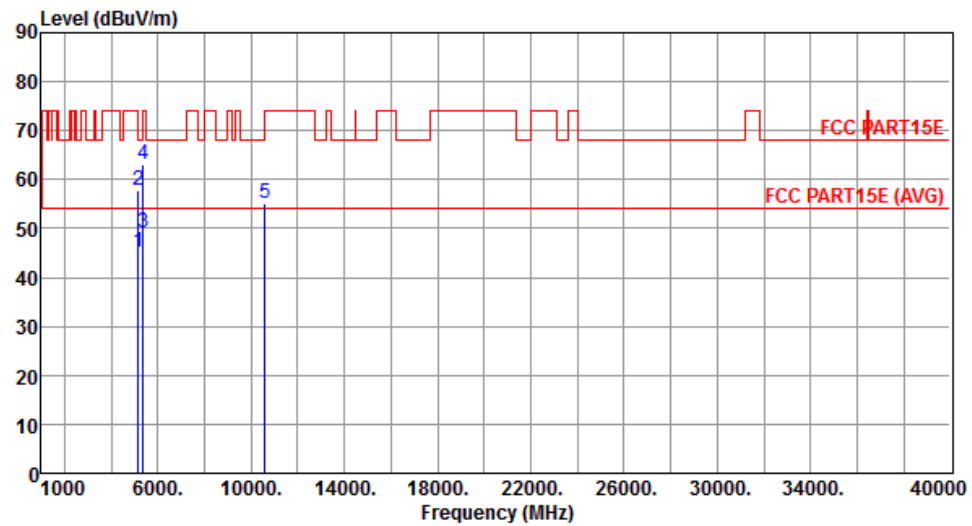


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.29	54.00	-8.71	40.27	5.02	Average	159	214
2	5150.00	57.79	74.00	-16.21	52.77	5.02	Peak	159	214
3	5350.00	49.31	54.00	-4.69	44.00	5.31	Average	159	214
4	5350.00	63.14	74.00	-10.86	57.83	5.31	Peak	159	214
5	10580.00	55.15	68.20	-13.05	41.25	13.90	Peak	100	166

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Vertical		

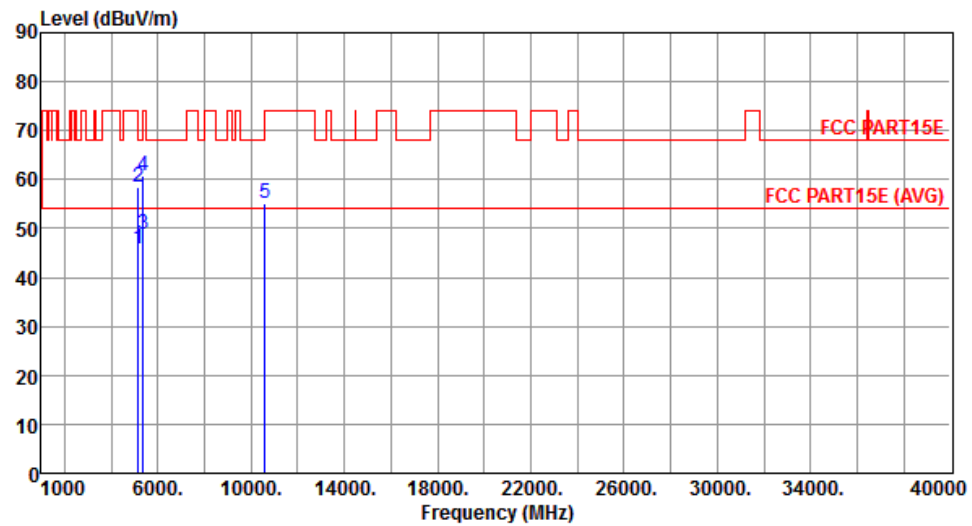


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.68	54.00	-8.32	40.66	5.02	Average	124	191
2	5150.00	58.50	74.00	-15.50	53.48	5.02	Peak	124	191
3	5350.00	48.74	54.00	-5.26	43.43	5.31	Average	124	191
4	5350.00	60.84	74.00	-13.16	55.53	5.31	Peak	124	191
5	10580.00	55.22	68.20	-12.98	41.32	13.90	Peak	100	173

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		

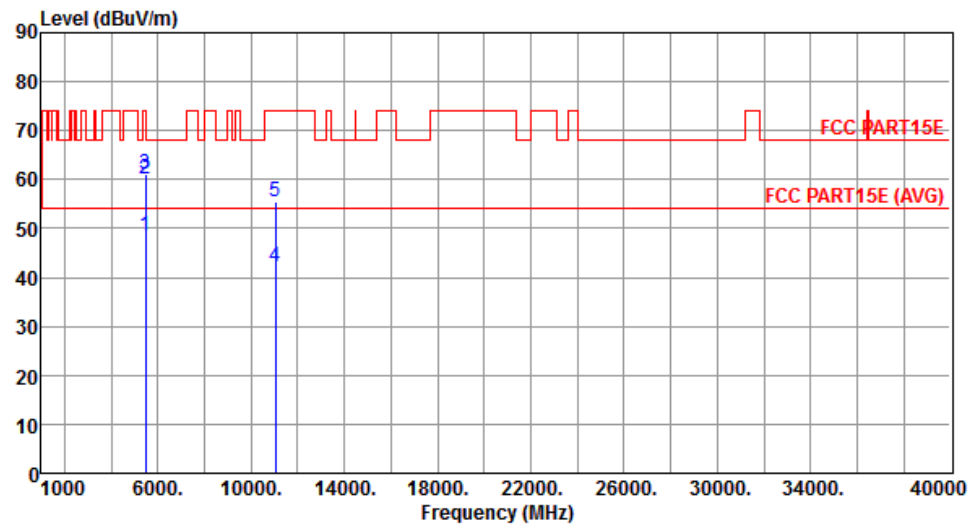


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	48.55	54.00	-5.45	43.09	5.46	Average	152	215
2	5460.00	59.97	74.00	-14.03	54.51	5.46	Peak	152	215
3	5470.00	61.09	68.20	-7.11	55.62	5.47	Peak	152	215
4	11060.00	42.11	54.00	-11.89	27.76	14.35	Average	100	183
5	11060.00	55.60	74.00	-18.40	41.25	14.35	Peak	100	183

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Vertical		

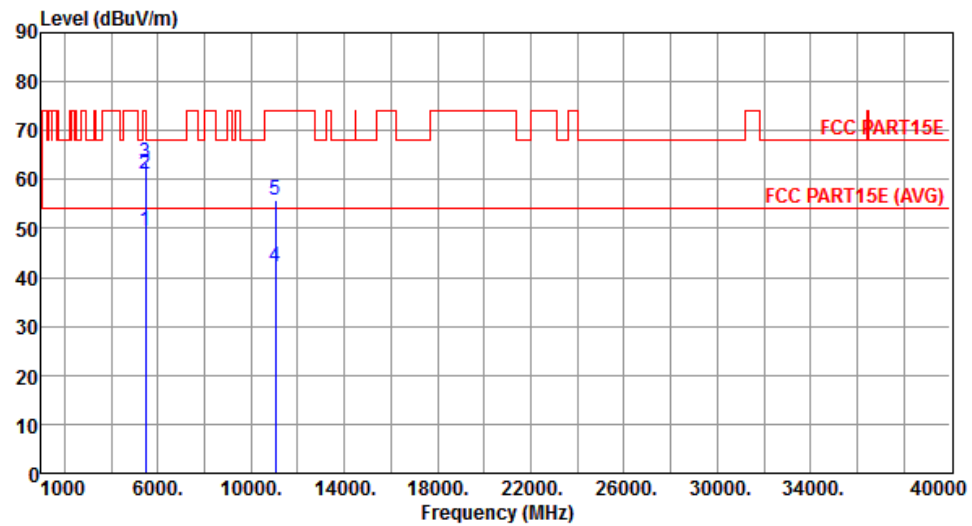


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	49.40	54.00	-4.60	43.94	5.46	Average	191	280
2	5460.00	61.14	74.00	-12.86	55.68	5.46	Peak	191	280
3	5470.00	63.54	68.20	-4.66	58.07	5.47	Peak	191	280
4	11060.00	42.17	54.00	-11.83	27.82	14.35	Average	100	185
5	11060.00	55.80	74.00	-18.20	41.45	14.35	Peak	100	185

Modulation	VHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		

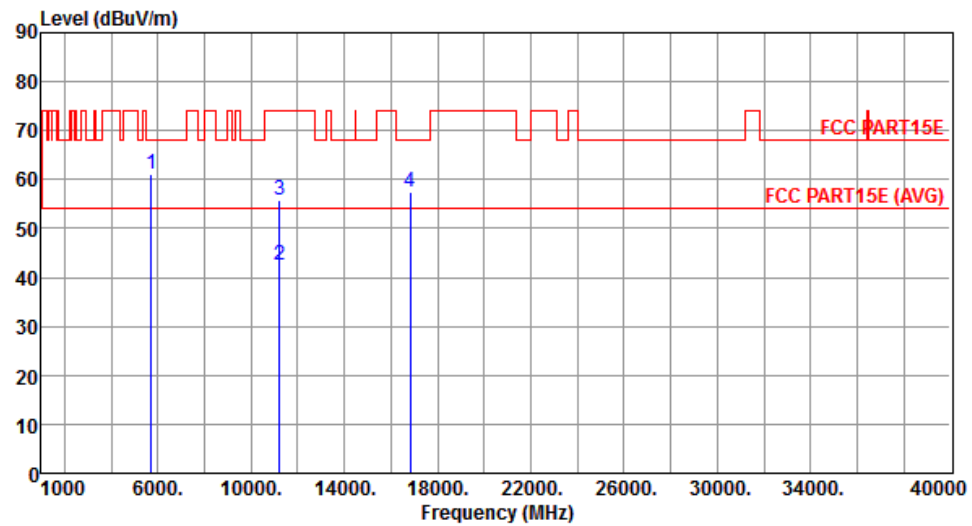


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	61.27	68.20	-6.93	55.46	5.81	Peak	157	217
2	11220.00	42.34	54.00	-11.66	27.85	14.49	Average	100	165
3	11220.00	55.70	74.00	-18.30	41.21	14.49	Peak	100	165
4	16830.00	57.39	68.20	-10.81	41.37	16.02	Peak	100	125

Modulation	VHT80	Test Freq. (MHz)	5610
Polarization	Vertical		

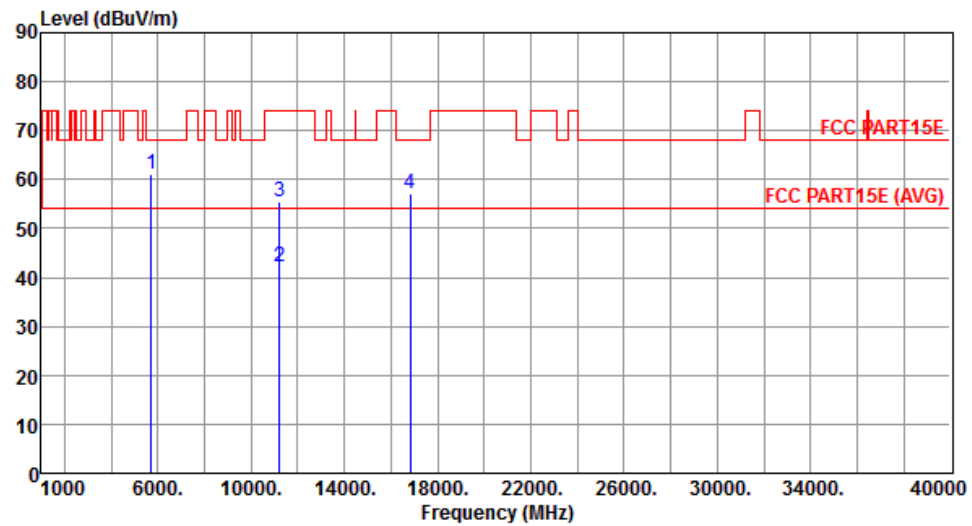


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	61.08	68.20	-7.12	55.27	5.81	Peak	165	261
2	11220.00	42.05	54.00	-11.95	27.56	14.49	Average	100	138
3	11220.00	55.31	74.00	-18.69	40.82	14.49	Peak	100	138
4	16830.00	57.18	68.20	-11.02	41.16	16.02	Peak	100	205

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		

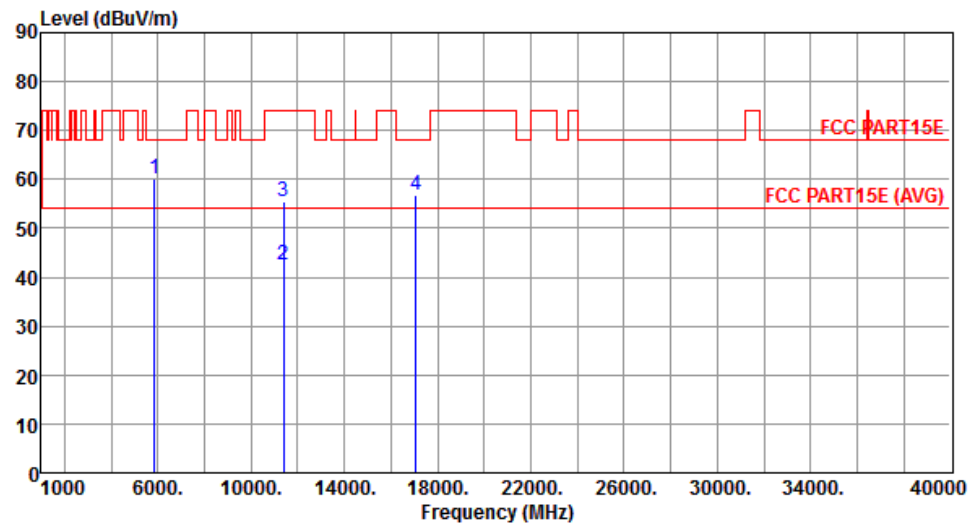


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	59.96	68.20	-8.24	53.97	5.99	Peak	141	211
2	11380.00	42.36	54.00	-11.64	27.73	14.63	Average	100	163
3	11380.00	55.35	74.00	-18.65	40.72	14.63	Peak	100	163
4	17070.00	56.83	68.20	-11.37	40.44	16.39	Peak	100	105

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Vertical		

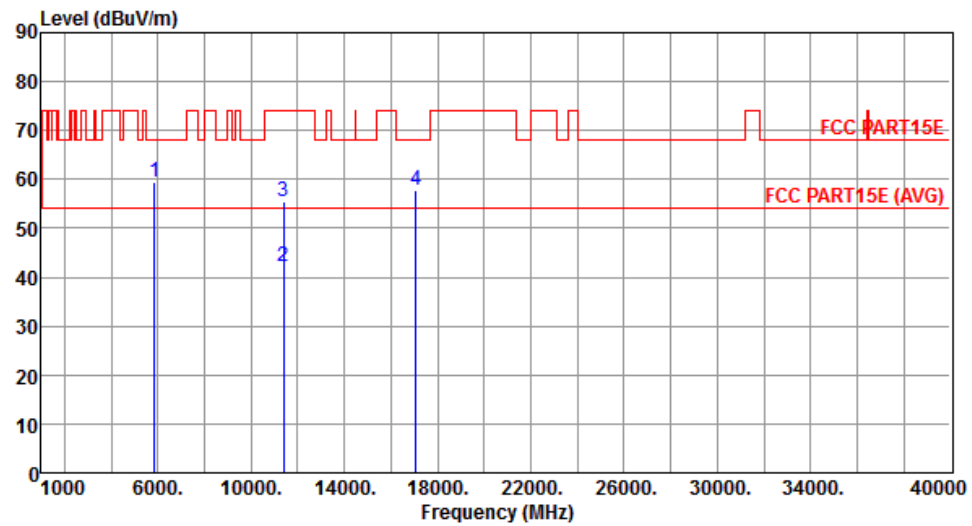


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	59.45	68.20	-8.75	53.46	5.99	Peak	203	261
2	11380.00	42.25	54.00	-11.75	27.62	14.63	Average	100	192
3	11380.00	55.48	74.00	-18.52	40.85	14.63	Peak	100	192
4	17070.00	57.83	68.20	-10.37	41.44	16.39	Peak	100	155

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		

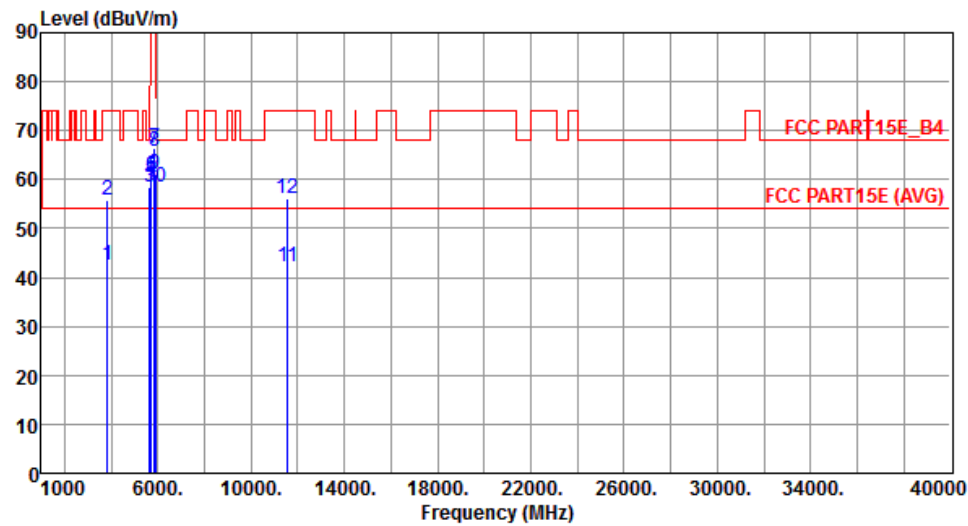

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3850.00	42.46	54.00	-11.54	40.44	2.02	Average	100	165
2	3850.00	55.80	74.00	-18.20	53.78	2.02	Peak	100	165
3	5650.00	58.59	68.20	-9.61	52.90	5.69	Peak	135	216
4	5700.00	59.89	105.20	-45.31	54.12	5.77	Peak	135	216
5	5720.00	60.48	110.80	-50.32	54.69	5.79	Peak	135	216
6	5725.00	60.77	122.20	-61.43	54.96	5.81	Peak	135	216
7	5850.00	66.26	122.20	-55.94	60.27	5.99	Peak	135	216
8	5855.00	65.63	110.80	-45.17	59.63	6.00	Peak	135	216
9	5875.00	61.10	105.20	-44.10	55.08	6.02	Peak	135	216
10	5925.00	58.36	68.20	-9.84	52.27	6.09	Peak	135	216
11	11550.00	42.27	54.00	-11.73	27.63	14.64	Average	100	205
12	11550.00	56.08	74.00	-17.92	41.44	14.64	Peak	100	205

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Vertical		

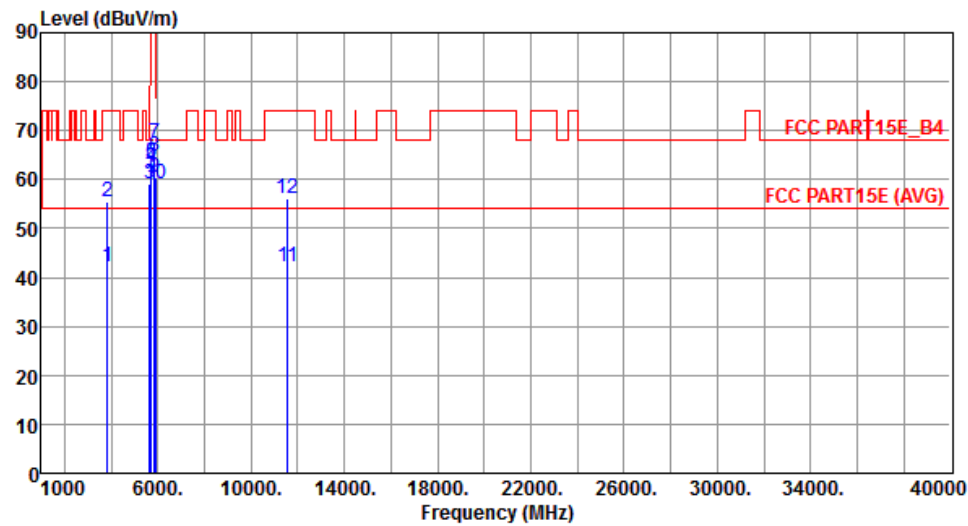

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3850.00	42.17	54.00	-11.83	40.15	2.02	Average	100	172
2	3850.00	55.30	74.00	-18.70	53.28	2.02	Peak	100	172
3	5650.00	59.04	68.20	-9.16	53.35	5.69	Peak	153	271
4	5700.00	62.48	105.20	-42.72	56.71	5.77	Peak	153	271
5	5720.00	63.43	110.80	-47.37	57.64	5.79	Peak	153	271
6	5725.00	63.35	122.20	-58.85	57.54	5.81	Peak	153	271
7	5850.00	67.34	122.20	-54.86	61.35	5.99	Peak	153	271
8	5855.00	64.68	110.80	-46.12	58.68	6.00	Peak	153	271
9	5875.00	60.60	105.20	-44.60	54.58	6.02	Peak	153	271
10	5925.00	59.23	68.20	-8.97	53.14	6.09	Peak	153	271
11	11550.00	42.20	54.00	-11.80	27.56	14.64	Average	100	162
12	11550.00	55.97	74.00	-18.03	41.33	14.64	Peak	100	162

3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabilized, measure the frequency stability.
5. The test shall be performed under -30 to 85 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.6.3 Test Setup

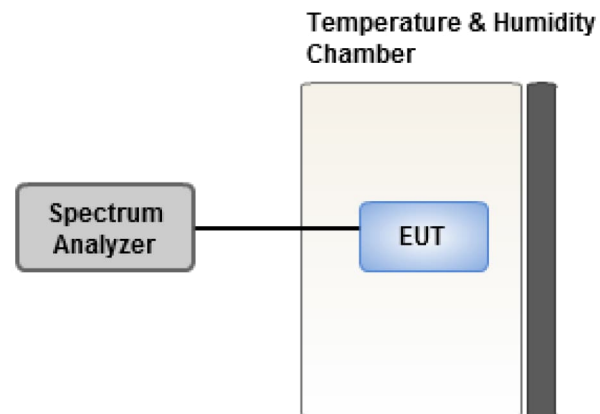

3.6.4 Test Result of Frequency Stability

Frequency: 5320 MHz	Frequency Drift (ppm)				
	Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax		15.83	16.17	16.30	15.87
T20°CVmin		13.23	13.29	13.69	13.43
T85°CVnom		13.51	14.34	13.64	13.86
T80°CVnom		11.46	12.06	11.81	11.28
T70°CVnom		11.44	11.91	11.40	11.20
T60°CVnom		10.72	11.33	10.76	11.17
T50°C Vnom		11.63	11.76	11.25	11.90
T40°CVnom		8.52	8.20	8.35	9.09
T30°CVnom		8.66	9.02	9.07	9.14
T20°CVnom		9.47	9.77	9.63	9.13
T10°CVnom		7.42	8.03	7.64	7.67
T0°CVnom		9.67	10.01	10.03	9.58
T-10°CVnom		7.47	7.42	7.14	7.55
T-20°CVnom		7.84	8.49	7.96	8.08
T-30°CVnom		7.30	8.14	7.82	7.76
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102	
Tnom [°C]: 20		Tmax [°C]: 85		Tmin [°C]: -30	

Frequency: 5785 MHz	Frequency Drift (ppm)			
	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	14.54	14.84	14.91	15.11
T20°C Vmin	12.32	12.03	11.69	12.53
T85°C Vnom	12.76	12.40	12.68	12.16
T80°C Vnom	11.28	11.48	11.05	11.07
T70°C Vnom	10.64	11.29	11.30	10.57
T60°C Vnom	10.24	9.63	9.85	10.14
T50°C Vnom	11.05	10.77	10.80	11.39
T40°C Vnom	8.44	8.24	8.48	8.06
T30°C Vnom	8.61	8.72	8.72	8.64
T20°C Vnom	9.85	10.11	9.41	9.72
T10°C Vnom	7.17	7.41	7.53	7.41
T0°C Vnom	8.99	8.46	8.45	8.67
T-10°C Vnom	6.77	6.58	7.41	7.30
T-20°C Vnom	7.83	7.91	7.40	7.97
T-30°C Vnom	7.06	7.50	7.60	7.07
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 85		Tmin [°C]: -30

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==