

FCC Test Report

Applicant : Stark Future SL

Address : Carrer Batan 6, Sant Boi, 08830, Spain

Product Name : Rugged Handheld

Report Date : Sept. 06, 2024



Shenzhen Anbotek Compliance Laboratory Limited



Contents

- 1. General Information 6
 - 1.1. Client Information 6
 - 1.2. Description of Device (EUT) 6
 - 1.3. Auxiliary Equipment Used During Test 7
 - 1.4. Operation State 7
 - 1.5. Environmental Conditions 9
 - 1.6. Test Equipment List 10
 - 1.7. Measurement Uncertainty 11
 - 1.8. Description of Test Facility 11
 - 1.9. Disclaimer 12
- 2. Summary of Test 13
 - 2.1. Summary of test result 13
- 3. Conducted Output Power Test 15
 - 3.1. Test Standard and Limit 15
 - 3.2. Test Setup 15
 - 3.3. Test Procedure 15
 - 3.4. Test Data 15
- 4. Peak-Average Ratio 16
 - 4.1. Test Standard and Limit 16
 - 4.2. Test Setup 16
 - 4.3. Test Procedure 16
 - 4.4. Test Data 16
- 5. Modulation Characteristic 17
- 6. 99% Occupied Bandwidth & 26 dB Bandwidth 18
 - 6.1. Test Standard and Limit 18
 - 6.2. Test Setup 18
 - 6.3. Test Procedure 18
 - 6.4. Test Data 18
- 7. Conducted Spurious Emission 19
 - 7.1. Test Standard and Limit 19
 - 7.2. Test Setup 19
 - 7.3. Test Procedure 19
 - 7.4. Test Data 19
- 8. Band Edge 20
 - 8.1. Test Standard and Limit 20
 - 8.2. Test Setup 20
 - 8.3. Test Procedure 20
 - 8.4. Test Data 21



- 9. Radiated Spurious Emission 22
 - 9.1. Test Standard and Limit 22
 - 9.2. Test Setup 22
 - 9.3. Test Procedure 22
 - 9.4. Test Data 24
- 10. ERP and EIRP 41
 - 10.1. Test Standard and Limit 41
 - 10.2. Test Setup 41
 - 10.3. Test Procedure 41
 - 10.4. Test Data 43
- 11. Frequency stability VS Voltage measurement 50
 - 11.1. Test Standard and Limit 50
 - 11.2. Test Setup 50
 - 11.3. Test Procedure 50
 - 11.4. Test Data 50
- 12. Frequency stability VS Temperature measurement 51
 - 12.1. Test Standard and Limit 51
 - 12.2. Test Setup 51
 - 12.3. Test Procedure 51
 - 12.4. Test Data 51
- APPENDIX I -- TEST SETUP PHOTOGRAPH 52
- APPENDIX II -- EXTERNAL PHOTOGRAPH 52
- APPENDIX III -- INTERNAL PHOTOGRAPH 52



TEST REPORT

Applicant : Stark Future SL
Manufacturer : Emdoor Information Co.,Ltd.
Product Name : Rugged Handheld
Model No. : ARKENSTONE-EEA, ARKENSTONE-RW
Trade Mark : StarkFuture
Rating(s) : Input: 3.6-6V \Rightarrow 3A, 6-9V \Rightarrow 2.0A, 9-12V \Rightarrow 1.5A
Battery capacity: DC 3.8V, 4000mAh
Test Standard(s) : 47 CFR Part 2, 47 CFR Part 22(H), 47 CFR Part 24(E), 47 CFR Part 27(C)
ANSI C63.26-2015
Test Method(s) : KDB 971168 D01 Power Meas License Digital Systems v03r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 22, 47 CFR Part 24, 47 CFR Part 27 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of receipt

Jun. 27, 2024

Date of Test

Jun. 27, 2024 ~ Jul. 19, 2024

Prepared by

Nian xiu Chen

(Nianxiu Chen)

Approved & Authorized Signer

Edward Pan

(Edward Pan)



Revision History

Report Version	Description	Issued Date
R00	Original Issue	Sept. 06, 2024



1. General Information

1.1. Client Information

Applicant	:	Stark Future SL
Address	:	Carrer Batan 6, Sant Boi, 08830, Spain
Manufacturer	:	Emdoor Information Co.,Ltd.
Address	:	4th Floor, Block B, Haina Baichuan Headquarters Building, No. 6 Baoxing Road, Haibin Community, Xin'an Street, Bao'an District, Shenzhen City, Guangdong Province, China.
Factory	:	Emdoor Information Co.,Ltd.
Address	:	4th Floor, Building C, Chaojie Industrial Park, Danzi Middle Road, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China

1.2. Description of Device (EUT)

Product Name	:	Rugged Handheld
Model No.	:	ARKENSTONE-EEA, ARKENSTONE-RW (Note: All samples are the same except the model number and sales area, so we prepare "ARKENSTONE-EEA" for test only.)
Trade Mark	:	StarkFuture
Test Power Supply	:	DC 3.8V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A

RF Specification

Support Band	:	<input checked="" type="checkbox"/> FDD Band 2 <input checked="" type="checkbox"/> FDD Band 4 <input checked="" type="checkbox"/> FDD Band 5 <input checked="" type="checkbox"/> FDD Band 7 <input type="checkbox"/> FDD Band 12 <input type="checkbox"/> FDD Band 13 <input type="checkbox"/> FDD Band 14 <input checked="" type="checkbox"/> FDD Band 17 <input type="checkbox"/> FDD Band 25 <input type="checkbox"/> FDD Band 26 <input checked="" type="checkbox"/> TDD Band 38 <input checked="" type="checkbox"/> TDD Band 41 <input type="checkbox"/> FDD Band 66 <input type="checkbox"/> FDD Band 71
Transmit Frequency	:	FDD Band 2: 1850.7 MHz – 1909.3 MHz FDD Band 4: 1710.7 MHz – 1754.3 MHz FDD Band 5: 824.7 MHz – 848.3 MHz FDD Band 7: 2502.5 MHz – 2567.5 MHz FDD Band 17: 706.5 MHz – 713.5 MHz TDD Band 38: 2572.5 MHz – 2617.5 MHz TDD Band 41: 2537.5 MHz~2652.5 MHz
Receive Frequency	:	FDD Band 2: 1930.7 MHz – 1989.3 MHz FDD Band 4: 2110.7 MHz – 2154.3 MHz FDD Band 5: 869.7 MHz – 893.3 MHz



	FDD Band 7: 2622.5 MHz – 2687.5 MHz FDD Band 17: 736.5 MHz – 743.5 MHz TDD Band 38: 2572.5 MHz – 2617.5 MHz TDD Band 41: 2537.5 MHz~2652.5 MHz
Modulation Type	: QPSK, 16QAM
Power Class	: Class 3
Antenna Type	: FPC Antenna
Antenna Gain(Peak):	FDD Band 2: -1.54dBi FDD Band 4: -2.60dBi FDD Band 5: -0.08dBi FDD Band 7: -1.39dBi FDD Band 17: -4.31dBi TDD Band 38: -1.39dBi TDD Band 41: -1.39dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.	

1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
--	--

1.4. Operation State

Test frequency list:

Band	Frequency (MHz)					
	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NdL	Frequency of Downlink [MHz]
FDD Band 2	Low Range	1.4	18607	1850.7	607	1930.7
		3	18615	1851.5	615	1931.5
		5	18625	1852.5	625	1932.5
		10	18650	1855	650	1935
		15 [1]	18675	1857.5	675	1937.5
	20 [1]	18700	1860	700	1940	
	Mid Range	1.4/3/5/10 15 [1]/20 [1]	18900	1880	900	1960
	High Range	1.4	19193	1909.3	1193	1989.3
		3	19185	1908.5	1185	1988.5
		5	19175	1907.5	1175	1987.5
		10	19150	1905	1150	1985
15 [1]		19125	1902.5	1125	1982.5	
20 [1]	19100	1900	1100	1980		



FDD Band 4		Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	1.4	19957	1710.7	1957	2110.7		
	3	19965	1711.5	1965	2111.5		
	5	19975	1712.5	1975	2112.5		
	10	20000	1715	2000	2115		
	15	20025	1717.5	2025	2117.5		
Mid Range	20	20050	1720	2050	2120		
	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5		
High Range	1.4	20393	1754.3	2393	2154.3		
	3	20385	1753.5	2385	2153.5		
	5	20375	1752.5	2375	2152.5		
	10	20350	1750	2350	2150		
	15	20325	1747.5	2325	2147.5		
	20	20300	1745	2300	2145		

FDD Band 5		Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	1.4	20407	824.7	2407	869.7		
	3	20415	825.5	2415	870.5		
	5	20425	826.5	2425	871.5		
	10 ⁽¹⁾	20450	829	2450	874		
Mid Range	1.4/3/5	20525	836.5	2525	881.5		
	10 ⁽¹⁾						
High Range	1.4	20643	848.3	2643	893.3		
	3	20635	847.5	2635	892.5		
	5	20625	846.5	2625	891.5		
	10 ⁽¹⁾	20600	844	2600	889		

FDD Band 7		Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	5	20775	2502.5	2775	2622.5		
	10	20800	2505	2800	2625		
	15	20825	2507.5	2825	2627.5		
	20 ⁽¹⁾	20850	2510	2850	2630		
Mid Range	5/10/15	21100	2535	3100	2655		
	20 ⁽¹⁾						
High Range	5	21425	2567.5	3425	2687.5		
	10	21400	2565	3400	2685		
	15	21375	2562.5	3375	2682.5		
	20 ⁽¹⁾	21350	2560	3350	2680		

FDD Band 17		Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	5 ⁽¹⁾	23755	706.5	5755	736.5		
	10 ⁽¹⁾	23780	709	5780	739		
Mid Range	5 ⁽¹⁾ /10 ⁽¹⁾	23790	710	5790	740		
	5 ⁽¹⁾	23825	713.5	5825	743.5		
High Range	10 ⁽¹⁾	23800	711	5800	741		

TDD Band 38		Test Frequency ID	Bandwidth [MHz]	EARFCN	Frequency (UL and DL) [MHz]
Low Range	5	37775	2572.5		
	10	37800	2575		
	15	37825	2577.5		
	20	37850	2580		
Mid Range	5/10/15/20	38000	2595		
	5	38225	2617.5		
High Range	10	38200	2615		
	15	38175	2612.5		
	20	38150	2610		



TDD Band 41 (2535-2655MHz)	Test Frequency ID	Bandwidth (MHz)	EARFCN	Frequency	
	Low Range	5	5	40065	2537.5
		10	10	40090	2540
		15	15	40115	2542.5
		20	20	40140	2545
	Mid Range	5/10/15/20	40590	2590	
	High Range	5	5	41215	2652.5
		10	10	41190	2650
		15	15	41165	2647.5
		20	20	41140	2645

1.5. Environmental Conditions

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa



1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	SKET-PA-002	Jan. 17, 2024	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Jan. 23, 2024	1 Year
3.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
4.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	Oct. 23, 2022	3 Year
5.	Pre-amplifier	SONOMA	310N	186860	Jan. 17, 2024	1 Year
6.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
7.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 12, 2023	1 Year
8.	DC Power Supply	LW	TPR-6420D	374470	Oct. 20, 2023	1 Year
9.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 16, 2023	1 Year
10.	Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	167336	Feb. 04, 2024	1 Year
11.	High-Pass Filter	CDKMV	ZHPF-BM1100-4000-0730	B2015094550	Oct. 20, 2023	1 Year
12.	High-Pass Filter	CDKMV	ZHPF-M3.5-18G-3834	1307006523	Oct. 20, 2023	1 Year
13.	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	Oct. 16, 2022	3 Year
14.	Double Ridged Horn Antenna	Chengyi Electronics Co., Ltd.	GTH-0118	351600	Nov. 02, 2022	2 Year
15.	Signal Generator	Anritsu	MG3690A	MY48180749	Oct. 12, 2023	1 Year



1.7. Measurement Uncertainty

Parameter	Uncertainty
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.78dB; 6G-18GHz: 4.88dB

The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032.
This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.



1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



2. Summary of Test

2.1. Summary of test result

Description of Test	FCC Rules	Requirements	Result
Conducted Output Power	Part 2.1046 Part 22.913(a) Part 24.232(b) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h)	N/A	Compliance
Peak-Average Ratio	Part 22.913 Part 24.232 Part 27.50	≤13dB	Compliance
Modulation Characteristics	§ 2.1047	Digital modulation	N/A
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049	OBW: No limit EBW: No limit	Compliance
Conducted Spurious Emission	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(g) Part 27.53(h) Part 27.53(m)	≤ -13dBm(LTE Band5) ≤ -13dBm(LTE Band2) ≤ -13dBm(LTE Band17) ≤ -13dBm(LTE Band4) ≤ -25dBm(LTE Band7,38,41)	Compliance
Band Edge	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(g) Part 27.53(h) Part 27.53(m)	≤ -13dBm (LTE Band5) ≤ -13dBm (LTE Band2) ≤ -13dBm (LTE Band17) ≤ -13dBm (LTE Band4) Refer to clause 8.1 for LTE Band7,38, 41)	Compliance
Frequency stability VS. temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54	≤ ±2.5ppm	Compliance
Frequency stability VS. voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54	≤ ±2.5ppm	Compliance



ERP and EIRP	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50(c) Part 27.50(d) Part 27.50(h)	ERP ≤ 7W(LTE Band 5) EIRP ≤ 2W(LTE Band 2) ERP ≤ 3W(LTE Band17) EIRP ≤ 1W(LTE Band 4) EIRP ≤ 2W(LTE Band 7,38,41)	Compliance
Radiated Spurious Emission	Part 2.1053 Part 22.917 Part 24.238 Part 27.53(g) Part 27.53(h) Part 27.53(m)	≤ -13dBm(LTE Band5) ≤ -13dBm(LTE Band2) ≤ -13dBm(LTE Band17) ≤ -13dBm(LTE Band4) ≤ -25dBm(LTE Band7,38,41)	Compliance

Note:

1. "N/A" is an abbreviation for Not Applicable.

2. Testing was performed by configuring EUT to maximum output power status, the declared output power class for different




3. Conducted Output Power Test

3.1. Test Standard and Limit

Applicable Standard:	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h)
Limit:	N/A

3.2. Test Setup

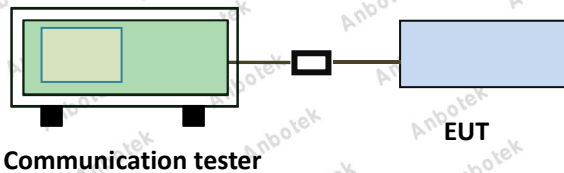

3.3. Test Procedure

1. The EUT output port was connected to communication tester.
2. Set EUT at maximum power through communication tester.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power.

3.4. Test Data

Pass

Please refer to Appendix A of the Appendix Test Data.




4. Peak-Average Ratio

4.1. Test Standard and Limit

Applicable Standard:	Part 22.913 Part 24.232 Part 27.50
Limit:	≤13dB

4.2. Test Setup

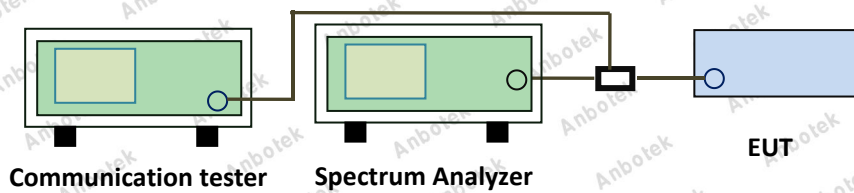

4.3. Test Procedure

According with KDB 971168 D01 Section 5.7:

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed.
 - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
 - ii. For burst transmissions, the spectrum analyzer is set to use an internal " RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power
6. Record the maximum PAPR level associated with a probability of 0.1%.

4.4. Test Data

Pass

Please refer to Appendix B of the Appendix Test Data.



5. Modulation Characteristic

According to FCC § 2.1047, Part 22H, Part 24E, Part 27C there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.




6. 99% Occupied Bandwidth & 26 dB Bandwidth

6.1. Test Standard and Limit

Applicable Standard:	Part 2.1049
Limit:	N/A

6.2. Test Setup

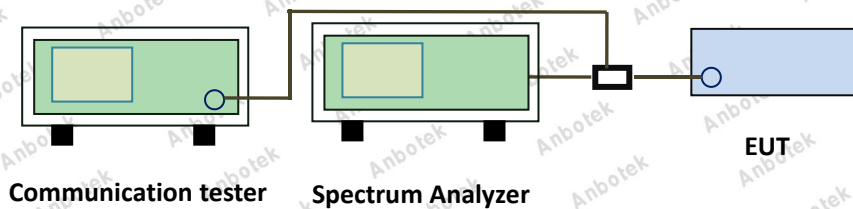

6.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Center Frequency= Carrier frequency, RBW=1% to 5% of anticipated OBW, VBW= 3 * RBW,
Detector=Peak,
Trace maximum hold.
4. Record the value of 99% Occupied bandwidth and -26dB bandwidth.

6.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.




7. Conducted Spurious Emission

7.1. Test Standard and Limit

Applicable Standard:	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(g) Part 27.53(h) Part 27.53(m)
Limit:	≤ -13dBm(LTE Band 5) ≤ -13dBm(LTE Band 2) ≤ -13dBm(LTE Band 17) ≤ -13dBm(LTE Band 4) ≤ -25dBm(LTE Band 7,38,41)

7.2. Test Setup

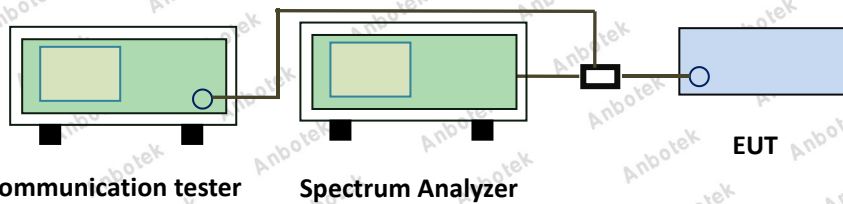

7.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Below 1GHz, RBW=100KHz, VBW = 300KHz, Detector=Peak, Sweep time= Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time= Auto
Scan frequency range up to 10th harmonic.
4. Record the test plot.

7.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.




8. Band Edge

8.1. Test Standard and Limit

Applicable Standard:	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(g) Part 27.53(h) Part 27.53(m)
Limit:	<p>≤ -13dBm (LTE Band 5) ≤ -13dBm (LTE Band 2) ≤ -13dBm (LTE Band 17) ≤ -13dBm (LTE Band 4)</p> <p>For LTE Band 7, 38, 41: For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.</p>

8.2. Test Setup

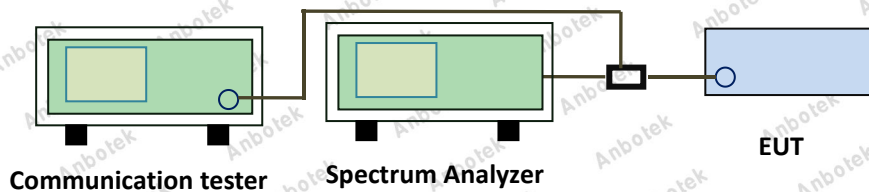

8.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. The band edges of low and high channels were measured.
4. Spectrum analyzer setting as follow:



RBW=3KHz, VBW = 10KHz, Sweep time= Auto

5. Record the test plot.

8.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.




9. Radiated Spurious Emission

9.1. Test Standard and Limit

Applicable Standard:	Part 2.1053 Part 22.917 Part 24.238 Part 27.53(g) Part 27.53(h) Part 27.53(m)
Limit:	$\leq -13\text{dBm}$ (LTE Band 5) $\leq -13\text{dBm}$ (LTE Band 2) $\leq -13\text{dBm}$ (LTE Band 17) $\leq -13\text{dBm}$ (LTE Band 4) $\leq -25\text{dBm}$ (LTE Band 7, 38, 41)

9.2. Test Setup

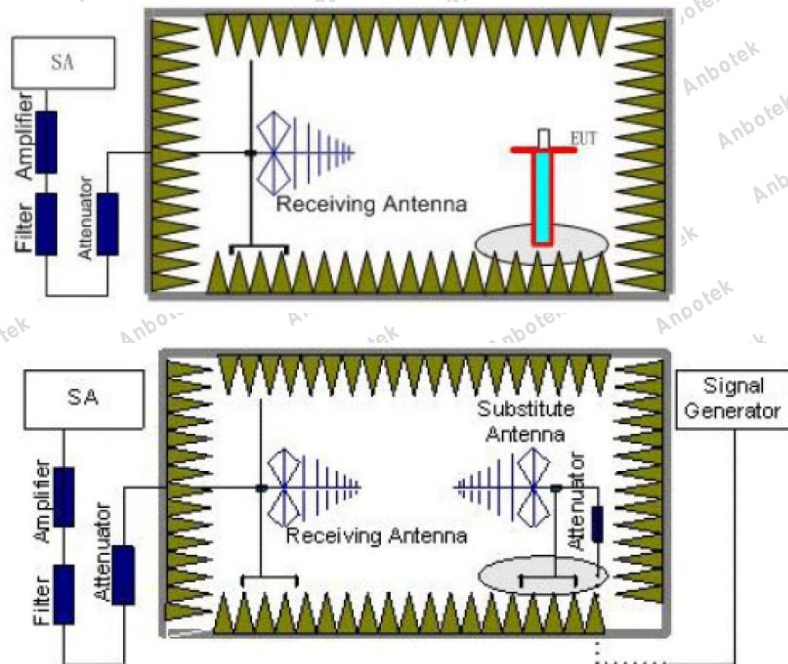

9.3. Test Procedure

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating



- transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
 4. Receiver or Spectrum set as follow:
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
 5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
 6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
 7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
 8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
 9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
 10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
 11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
 12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
 13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:



gain (dBd) = gain (dBi) – 2.15 dB.

If necessary, the antenna gain can be calculated from calibrated antenna factor information

14. Provide the complete measurement results as a part of the test report.

9.4. Test Data

Pass

Please to see the following pages

Note: All mode are tested, and the report only shows the worst is QPSK, others are background and not reflected in the data.



LTE Band 2								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	3701.40	Vertical	-48.68	13.21	-35.47	-13.00	PASS
		5552.10	V	-55.73	16.61	-39.12		
		7402.80	V	-58.29	18.03	-40.26		
		3701.40	Horizontal	-50.36	13.21	-37.15		
		5552.10	H	-57.31	16.61	-40.70		
		7402.80	H	-59.63	18.03	-41.60		
	Mid	3760.00	Vertical	-46.57	12.36	-34.21	-13.00	PASS
		5640.00	V	-54.97	17.03	-37.94		
		7520.00	V	-57.00	17.85	-39.15		
		3760.00	Horizontal	-47.97	12.36	-35.61		
		5640.00	H	-56.48	17.03	-39.45		
		7520.00	H	-58.27	17.85	-40.42		
	High	3818.60	Vertical	-44.84	12.78	-32.06	-13.00	PASS
		5727.90	V	-53.84	17.86	-35.98		
		7637.20	V	-55.85	18.56	-37.29		
		3818.60	Horizontal	-47.64	12.78	-34.86		
		5727.90	H	-56.60	17.86	-38.74		
		7637.20	H	-58.38	18.56	-39.82		
3MHz	Low	3703.00	Vertical	-43.45	12.78	-30.67	-13.00	PASS
		5554.50	V	-48.74	16.69	-32.05		
		7406.00	V	-52.61	18.18	-34.43		
		3703.00	Horizontal	-44.24	12.78	-31.46		
		5554.50	H	-51.40	16.69	-34.71		
		7406.00	H	-55.89	18.18	-37.71		
	Mid	3760.00	Vertical	-39.62	12.79	-26.83	-13.00	PASS
		5640.00	V	-45.15	16.72	-28.43		
		7520.00	V	-48.70	18.22	-30.48		
		3760.00	Horizontal	-41.04	12.79	-28.25		
		5640.00	H	-49.19	16.72	-32.47		
		7520.00	H	-53.35	18.22	-35.13		
	High	3817.00	Vertical	-36.24	12.93	-23.31	-13.00	PASS
		5725.50	V	-42.89	17.01	-25.88		
		7634.00	V	-47.22	18.41	-28.81		



5MHz		3817.00	Horizontal	-37.81	12.93	-24.88	-13.00	PASS		
		5725.50	H	-46.91	17.01	-29.90				
		7634.00	H	-49.02	18.41	-30.61				
	Low		3705.00	Vertical	-32.78	13.25	-19.53	-13.00	PASS	
			5557.50	V	-36.73	16.59	-20.14			
			7410.00	V	-42.63	18.12	-24.51			
			Horizontal	3705.00		-41.00	13.25	-27.75	-13.00	PASS
				5557.50	H	-51.61	16.59	-35.02		
				7410.00	H	-51.24	18.12	-33.12		
		Mid	Vertical	3760.00		-33.69	12.31	-21.38	-13.00	PASS
				5640.00	V	-40.71	17.14	-23.57		
				7520.00	V	-45.43	17.96	-27.47		
			Horizontal	3760.00		-44.33	12.31	-32.02	-13.00	PASS
				5640.00	H	-55.06	17.14	-37.92		
				7520.00	H	-53.30	17.96	-35.34		
	High	Vertical	3815.00		-38.81	12.77	-26.04	-13.00	PASS	
			5722.50	V	-44.71	17.82	-26.89			
			7630.00	V	-48.92	18.59	-30.33			
		Horizontal	3815.00		-48.13	12.77	-35.36	-13.00	PASS	
			5722.50	H	-58.84	17.82	-41.02			
			7630.00	H	-56.29	18.59	-37.70			
10MHz	Low	3710.00	Vertical	-35.53	12.59	-22.94	-13.00	PASS		
		5565.00	V	-41.83	16.61	-25.22				
		7420.00	V	-46.67	18.35	-28.32				
		3710.00	Horizontal	-52.69	12.59	-40.10				
		5565.00	H	-60.87	16.61	-44.26				
		7420.00	H	-59.78	18.35	-41.43				
	Mid	Vertical	3760.00		-39.32	12.71	-26.61	-13.00	PASS	
			5640.00	V	-44.95	16.65	-28.30			
			7520.00	V	-50.29	18.27	-32.02			
		Horizontal	3760.00		-55.23	12.71	-42.52	-13.00	PASS	
			5640.00	H	-64.52	16.65	-47.87			
			7520.00	H	-62.55	18.27	-44.28			
	High	Vertical	3810.00		-40.89	12.91	-27.98	-13.00	PASS	
			5715.00	V	-48.60	17.23	-31.37			
		7620.00	V	-54.17	18.59	-35.58				
3810.00		Horizontal	-52.50	12.91	-39.59					



		5715.00	H	-63.40	17.23	-46.17		
		7620.00	H	-60.60	18.59	-42.01		
15MHz	Low	3715.00	Vertical	-38.70	13.21	-25.49	-13.00	PASS
		5572.50	V	-45.77	16.65	-29.12		
		7430.00	V	-51.46	18.29	-33.17		
		3715.00	Horizontal	-55.16	13.21	-41.95		
		5572.50	H	-65.04	16.65	-48.39		
		7430.00	H	-62.19	18.29	-43.90		
	Mid	3760.00	Vertical	-39.66	12.39	-27.27	-13.00	PASS
		5640.00	V	-47.97	17.18	-30.79		
		7520.00	V	-52.73	17.99	-34.74		
		3760.00	Horizontal	-52.10	12.39	-39.71		
		5640.00	H	-63.24	17.18	-46.06		
		7520.00	H	-60.57	17.99	-42.58		
	High	3805.00	Vertical	-38.28	12.86	-25.42	-13.00	PASS
		5707.50	V	-45.22	17.89	-27.33		
		7610.00	V	-50.00	18.69	-31.31		
		3805.00	Horizontal	-55.51	12.86	-42.65		
		5707.50	H	-68.71	17.89	-50.82		
		7610.00	H	-66.16	18.69	-47.47		
20MHz	Low	3720.00	Vertical	-40.90	12.57	-28.33	-13.00	PASS
		5580.00	V	-47.23	16.59	-30.64		
		7440.00	V	-52.48	18.67	-33.81		
		3720.00	Horizontal	-55.66	12.57	-43.09		
		5580.00	H	-67.83	16.59	-51.24		
		7440.00	H	-66.49	18.67	-47.82		
	Mid	3760.00	Vertical	-41.42	12.76	-28.66	-13.00	PASS
		5640.00	V	-47.64	16.69	-30.95		
		7520.00	V	-52.48	18.38	-34.10		
		3760.00	Horizontal	-56.14	12.76	-43.38		
		5640.00	H	-68.17	16.69	-51.48		
		7520.00	H	-66.42	18.38	-48.04		
	High	3800.00	Vertical	-39.51	12.97	-26.54	-13.00	PASS
		5700.00	V	-45.29	17.19	-28.10		
		7600.00	V	-50.33	18.28	-32.05		
		3800.00	Horizontal	-56.66	12.97	-43.69		
		5700.00	H	-68.96	17.19	-51.77		



		7600.00	H	-66.57	18.28	-48.29		
--	--	---------	---	--------	-------	--------	--	--

LTE Band 4								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	3421.40	Vertical	-46.77	12.89	-33.88	-13.00	PASS
		5132.10	V	-54.97	15.86	-39.11		
		6842.80	V	-58.06	18.92	-39.14		
		3421.40	Horizontal	-47.82	12.89	-34.93		
		5132.10	H	-55.96	15.86	-40.10		
		6842.80	H	-58.90	18.92	-39.98		
	Mid	3465.00	Vertical	-45.58	12.49	-33.09	-13.00	PASS
		5197.50	V	-54.08	15.71	-38.37		
		6930.00	V	-56.70	18.26	-38.44		
		3465.00	Horizontal	-46.46	12.49	-33.97		
		5197.50	H	-55.03	15.71	-39.32		
		6930.00	H	-57.50	18.26	-39.24		
	High	3508.60	Vertical	-44.76	13.01	-31.75	-13.00	PASS
		5262.90	V	-53.04	15.89	-37.15		
		7017.20	V	-55.95	18.67	-37.28		
		3508.60	Horizontal	-45.88	13.01	-32.87		
		5262.90	H	-54.16	15.89	-38.27		
		7017.20	H	-56.91	18.67	-38.24		
3MHz	Low	3423.00	Vertical	-46.17	12.74	-33.43	-13.00	PASS
		5134.50	V	-54.33	15.68	-38.65		
		6846.00	V	-57.36	18.59	-38.77		
		3423.00	Horizontal	-46.95	12.74	-34.21		
		5134.50	H	-56.07	15.68	-40.39		
		6846.00	H	-58.44	18.59	-39.85		
	Mid	3465.00	Vertical	-47.68	12.49	-35.19	-13.00	PASS
		5197.50	V	-56.30	15.89	-40.41		
		6930.00	V	-58.79	18.66	-40.13		
		3465.00	Horizontal	-50.07	12.49	-37.58		
		5197.50	H	-58.66	15.89	-42.77		
		6930.00	H	-61.27	18.66	-42.61		
High	3507.00	Vertical	-49.81	13.44	-36.37	-13.00	PASS	



		5260.50	V	-57.38	15.89	-41.49		PASS
		7014.00	V	-59.54	18.39	-41.15		
		3507.00	Horizontal	-52.65	13.44	-39.21		
		5260.50	H	-60.50	15.89	-44.61		
		7014.00	H	-62.34	18.39	-43.95		
5MHz	Low	3425.00	Vertical	-47.08	12.87	-34.21	-13.00	PASS
		5137.50	V	-55.75	15.85	-39.90		
		6850.00	V	-57.93	18.93	-39.00		
		3425.00	Horizontal	-51.22	12.87	-38.35		
		5137.50	H	-61.27	15.85	-45.42		
		6850.00	H	-62.19	18.93	-43.26		
	Mid	3465.00	Vertical	-47.33	12.47	-34.86	-13.00	PASS
		5197.50	V	-54.99	15.7	-39.29		
		6930.00	V	-57.86	18.29	-39.57		
		3465.00	Horizontal	-51.58	12.47	-39.11		
		5197.50	H	-60.51	15.7	-44.81		
		6930.00	H	-61.34	18.29	-43.05		
	High	3505.00	Vertical	-47.22	13.29	-33.93	-13.00	PASS
		5257.50	V	-56.00	15.86	-40.14		
		7010.00	V	-57.39	18.63	-38.76		
3505.00		Horizontal	-51.79	13.29	-38.50			
5257.50		H	-60.10	15.86	-44.24			
7010.00		H	-61.19	18.63	-42.56			
10MHz	Low	3430.00	Vertical	-45.00	12.72	-32.28	-13.00	PASS
		5145.00	V	-56.76	15.61	-41.15		
		6860.00	V	-56.77	18.62	-38.15		
		3430.00	Horizontal	-51.48	12.72	-38.76		
		5145.00	H	-60.09	15.61	-44.48		
	6860.00	H	-61.39	18.62	-42.77			
	Mid	3465.00	Vertical	-44.88	12.41	-32.47	-13.00	PASS
		5197.50	V	-57.25	15.92	-41.33		
		6930.00	V	-57.31	18.63	-38.68		
		3465.00	Horizontal	-51.38	12.41	-38.97		
		5197.50	H	-60.57	15.92	-44.65		
		6930.00	H	-61.56	18.63	-42.93		
High	3500.00	Vertical	-46.14	13.41	-32.73	-13.00	PASS	
	5250.00	V	-57.16	15.59	-41.57			



		7000.00	V	-57.22	18.31	-38.91	-13.00	PASS	
		3500.00	Horizontal	-52.58	13.41	-39.17			
		5250.00	H	-60.43	15.59	-44.84			
15MHz	Low	7000.00	H	-61.40	18.31	-43.09	-13.00	PASS	
		3435.00	Vertical	-46.31	12.89	-33.42			
		5152.50	V	-56.73	15.86	-40.87			
		6870.00	V	-58.41	18.95	-39.46			
		3435.00	Horizontal	-50.74	12.89	-37.85			
		5152.50	H	-61.94	15.86	-46.08			
	Mid	6870.00	H	-59.75	18.95	-40.80	-13.00	PASS	
		3465.00	Vertical	-48.06	12.49	-35.57			
		5197.50	V	-54.58	15.73	-38.85			
		6930.00	V	-59.67	18.31	-41.36			
		3465.00	Horizontal	-48.67	12.49	-36.18			
		5197.50	H	-63.17	15.73	-47.44			
	High	6930.00	H	-57.82	18.31	-39.51	-13.00	PASS	
		3495.00	Vertical	-50.47	13.32	-37.15			
		5242.50	V	-53.29	15.88	-37.41			
		6990.00	V	-58.64	18.65	-39.99			
		3495.00	Horizontal	-48.00	13.32	-34.68			
		5242.50	H	-60.42	15.88	-44.54			
20MHz	Low	6990.00	H	-57.43	18.65	-38.78	-13.00	PASS	
		3440.00	Vertical	-47.59	12.74	-34.85			
		5160.00	V	-52.54	15.65	-36.89			
		6880.00	V	-58.18	18.64	-39.54			
		3440.00	Horizontal	-48.92	12.74	-36.18			
		5160.00	H	-61.38	15.65	-45.73			
	Mid	6880.00	H	-57.77	18.64	-39.13	-13.00	PASS	
		3465.00	Vertical	-47.67	12.44	-35.23			
		5197.50	V	-53.00	15.93	-37.07			
		6930.00	V	-58.35	18.64	-39.71			
		3465.00	Horizontal	-48.86	12.44	-36.42			
		5197.50	H	-61.90	15.93	-45.97			
	High	6930.00	H	-60.20	18.64	-41.56	-13.00	PASS	
		3490.00	Vertical	-50.23	13.43	-36.80			
		5235.00	V	-53.96	15.61	-38.35			
			6980.00	V	-59.21	18.34	-40.87		



		3490.00	Horizontal	-50.95	13.43	-37.52	-13.00	PASS
		5235.00	H	-61.86	15.61	-46.25		
		6980.00	H	-60.90	18.34	-42.56		

LTE Band 5								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
1.4MHz	Low	1649.40	Vertical	-42.88	7.29	-35.59	-13.00	PASS
		2474.10	V	-52.57	9.41	-43.16		
		3298.80	V	-56.40	12.69	-43.71		
		1649.40	Horizontal	-45.88	7.29	-38.59		
		2474.10	H	-56.10	9.41	-46.69		
		3298.80	H	-59.62	12.69	-46.93		
	Mid	1673.00	Vertical	-42.02	7.32	-34.70	-13.00	PASS
		2509.50	V	-51.71	9.39	-42.32		
		3346.00	V	-55.52	12.78	-42.74		
		1673.00	Horizontal	-45.00	7.32	-37.68		
		2509.50	H	-55.22	9.39	-45.83		
		3346.00	H	-58.90	12.78	-46.12		
	High	1696.60	Vertical	-41.01	7.33	-33.68	-13.00	PASS
		2544.90	V	-50.95	9.46	-41.49		
		3393.20	V	-54.67	12.71	-41.96		
		1696.60	Horizontal	-41.46	7.33	-34.13		
		2544.90	H	-50.53	9.46	-41.07		
		3393.20	H	-55.40	12.71	-42.69		
3MHz	Low	1651.00	Vertical	-39.19	7.36	-31.83	-13.00	PASS
		2476.50	V	-49.26	9.51	-39.75		
		3302.00	V	-53.20	12.72	-40.48		
		1651.00	Horizontal	-40.27	7.36	-32.91		
		2476.50	H	-49.44	9.51	-39.93		
	Mid	3302.00	H	-54.44	12.72	-41.72	-13.00	PASS
		1673.00	Vertical	-38.33	7.41	-30.92		
		2509.50	V	-48.41	9.52	-38.89		
		3346.00	V	-52.40	12.73	-39.67		
		1673.00	Horizontal	-38.69	7.41	-31.28		
2509.50	H	-48.13	9.52	-38.61	-13.00	PASS		



5MHz	High	3346.00	H	-53.20	12.73	-40.47	-13.00	PASS
		1695.00	Vertical	-36.44	7.52	-28.92		
		2542.50	V	-46.53	9.46	-37.07		
		3390.00	V	-50.75	12.81	-37.94		
		1695.00	Horizontal	-37.31	7.52	-29.79		
		2542.50	H	-46.67	9.46	-37.21		
	3390.00	H	-52.09	12.81	-39.28	-13.00	PASS	
	Low	1653.00	Vertical	-32.82	7.61			-25.21
		2479.50	V	-44.25	9.49			-34.76
		3306.00	V	-47.76	12.86			-34.90
		1653.00	Horizontal	-38.29	7.61			-30.68
		2479.50	H	-47.54	9.49			-38.05
3306.00		H	-52.85	12.86	-39.99			
10MHz	Mid	1673.00	Vertical	-33.60	7.72	-25.88	-13.00	PASS
		2509.50	V	-44.92	9.53	-35.39		
		3346.00	V	-48.33	12.84	-35.49		
		1673.00	Horizontal	-38.55	7.72	-30.83		
		2509.50	H	-47.70	9.53	-38.17		
		3346.00	H	-52.95	12.84	-40.11		
	High	1693.00	Vertical	-34.49	7.79	-26.70	-13.00	PASS
		2539.50	V	-45.67	9.53	-36.14		
		3386.00	V	-49.09	12.89	-36.20		
		1693.00	Horizontal	-37.08	7.79	-29.29		
		2539.50	H	-46.25	9.53	-36.72		
		3386.00	H	-51.77	12.89	-38.88		
5MHz	Low	1658.00	Vertical	-33.46	7.81	-25.65	-13.00	PASS
		2487.00	V	-44.81	9.56	-35.25		
		3316.00	V	-48.35	12.91	-35.44		
		1658.00	Horizontal	-38.29	7.81	-30.48		
		2487.00	H	-47.40	9.56	-37.84		
		3316.00	H	-52.74	12.91	-39.83		
	Mid	1673.00	Vertical	-34.38	7.83	-26.55	-13.00	PASS
		2509.50	V	-45.68	9.59	-36.09		
		3346.00	V	-49.17	12.94	-36.23		
		1673.00	Horizontal	-38.50	7.83	-30.67		
		2509.50	H	-47.58	9.59	-37.99		
		3346.00	H	-52.92	12.94	-39.98		



High	1688.00	Vertical	-34.67	7.89	-26.78	-13.00	PASS
	2532.00	V	-45.92	9.62	-36.30		
	3376.00	V	-49.39	12.96	-36.43		
	1688.00	Horizontal	-38.74	7.89	-30.85	-13.00	PASS
	2532.00	H	-47.78	9.62	-38.16		
	3376.00	H	-53.08	12.96	-40.12		

LTE Band 7								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission			Limit (dBm)	Result	
			Polarization	reading (dBm)	factor (dB)			Level (dBm)
5MHz	Low	5005.00	Vertical	-55	15.62	-39.38	-25.00	PASS
		7507.50	V	-57.36	17.86	-39.50		
		10010.00	V	-64.87	23.84	-41.03		
		5005.00	Horizontal	-58.25	15.62	-42.63	-25.00	PASS
		7507.50	H	-61.35	17.86	-43.49		
		10010.00	H	-67.22	23.84	-43.38		
	Mid	5070.00	Vertical	-53.39	15.66	-37.73	-25.00	PASS
		7605.00	V	-54.94	17.87	-37.07		
		10140.00	V	-62.88	23.88	-39.00		
		5070.00	Horizontal	-53.82	15.66	-38.16	-25.00	PASS
		7605.00	H	-57.56	17.87	-39.69		
		10140.00	H	-64.72	23.88	-40.84		
	High	5135.00	Vertical	-48.8	15.69	-33.11	-25.00	PASS
		7702.50	V	-50.75	17.88	-32.87		
		10270.00	V	-58.92	23.91	-35.01		
		5135.00	Horizontal	-50.78	15.69	-35.09	-25.00	PASS
		7702.50	H	-54.68	17.88	-36.80		
		10270.00	H	-62.29	23.91	-38.38		
10MHz	Low	5010.00	Vertical	-46.73	15.71	-31.02	-25.00	PASS
		7515.00	V	-49.02	17.92	-31.10		
		10020.00	V	-57.44	23.94	-33.50	-25.00	PASS
		5010.00	Horizontal	-52.54	15.71	-36.83		
	7515.00	H	-56.35	17.92	-38.43	-25.00	PASS	
	10020.00	H	-63.71	23.94	-39.77			
	Mid	5070.00	Vertical	-47.99	15.66	-32.33	-25.00	PASS
		7605.00	V	-50.2	17.87	-32.33		



		10140.00	V	-58.53	23.88	-34.65		PASS
		5070.00	Horizontal	-54.59	15.66	-38.93		
		7605.00	H	-58	17.87	-40.13		
		10140.00	H	-65.27	23.88	-41.39		
	High	5130.00	Vertical	-50.26	15.79	-34.47	-25.00	PASS
		7695.00	V	-52.26	17.98	-34.28		
		10260.00	V	-60.52	24.02	-36.50		
		5130.00	Horizontal	-56.11	15.79	-40.32		
		7695.00	H	-59.41	17.98	-41.43		
		10260.00	H	-66.52	24.02	-42.50		
15MHz	Low	5015.00	Vertical	-42.88	15.81	-27.07	-25.00	PASS
		7522.50	V	-54.55	17.96	-36.59		
		10030.00	V	-54.09	24.11	-29.98		
		5015.00	Horizontal	-55.64	15.81	-39.83		
		7522.50	H	-51.49	17.96	-33.53		
		10030.00	H	-65.93	24.11	-41.82		
	Mid	5070.00	Vertical	-44.03	15.66	-28.37	-25.00	PASS
		7605.00	V	-44.12	17.87	-26.25		
		10140.00	V	-53.27	23.88	-29.39		
		5070.00	Horizontal	-59.06	15.66	-43.40		
		7605.00	H	-61.03	17.87	-43.16		
		10140.00	H	-67.59	23.88	-43.71		
	High	5125.00	Vertical	-42.08	15.88	-26.20	-25.00	PASS
		7687.50	V	-46.43	18.03	-28.40		
		10250.00	V	-55.59	24.16	-31.43		
		5125.00	Horizontal	-50.27	15.88	-34.39		
		7687.50	H	-53.96	18.03	-35.93		
		10250.00	H	-62.48	24.16	-38.32		
20MHz	Low	5020.00	Vertical	-46.07	16.03	-30.04	-25.00	PASS
		7530.00	V	-56.30	18.11	-38.19		
		10040.00	V	-54.62	24.19	-30.43		
		5020.00	Horizontal	-51.32	16.03	-35.29		
		7530.00	H	-48.54	18.11	-30.43		
		10040.00	H	-62.44	24.19	-38.25		
	Mid	5070.00	Vertical	-43.51	15.66	-27.85	-25.00	PASS
		7605.00	V	-43.68	17.87	-25.81		
		10140.00	V	-53.02	23.88	-29.14		



High	5070.00	Horizontal	-56.74	15.66	-41.08	-25.00	PASS
	7605.00	H	-57.57	17.87	-39.70		
	10140.00	H	-64.86	23.88	-40.98		
	5120.00	Vertical	-41.72	16.15	-25.57	-25.00	PASS
	7680.00	V	-46.46	18.19	-28.27		
	10240.00	V	-55.53	24.26	-31.27		
	5120.00	Horizontal	-53.34	16.15	-37.19	-25.00	PASS
	7680.00	H	-55.75	18.19	-37.56		
	10240.00	H	-64.75	24.26	-40.49		

LTE Band 17									
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result	
			Polarization	reading (dBm)	factor (dB)	Level (dBm)			
5MHz	Low	1413.00	Vertical	-39.77	4.26	-35.51	-13.00	PASS	
		2119.50	V	-48.05	8.72	-39.33			
		2826.00	V	-51.78	11.36	-40.42			
		1413.00	Horizontal	-41.26	4.26	-37.00			
		2119.50	H	-49.45	8.72	-40.73			
		2826.00	H	-52.97	11.36	-41.61			
	Mid	1420.00	Vertical	-38.60	4.21	-34.39	-13.00	PASS	
		2130.00	V	-47.54	9.26	-38.28			
		2840.00	V	-50.81	11.38	-39.43			
		1420.00	Horizontal	-39.84	4.21	-35.63			
		2130.00	H	-48.88	9.26	-39.62			
		2840.00	H	-51.94	11.38	-40.56			
	High	1427.00	Vertical	-36.74	4.26	-32.48	-13.00	PASS	
		2140.50	V	-45.67	9.13	-36.54			
		2854.00	V	-49.13	11.35	-37.78			
		1427.00	Horizontal	-39.22	4.26	-34.96			
		2140.50	H	-48.12	9.13	-38.99			
		2854.00	H	-51.38	11.35	-40.03			
	10MHz	Low	1418.00	Vertical	-35.38	4.13	-31.25	-13.00	PASS
			2127.00	V	-42.28	9.23	-33.05		
			2836.00	V	-47.09	11.85	-35.24		
			1418.00	Horizontal	-36.07	4.13	-31.94		
			2127.00	H	-44.64	9.23	-35.41		



	Mid	2836.00	H	-50.01	11.85	-38.16	-13.00	PASS
		1420.00	Vertical	-32.05	4.21	-27.84		
		2130.00	V	-39.09	9.26	-29.83		
		2840.00	V	-43.11	11.38	-31.73		
		1420.00	Horizontal	-33.30	4.21	-29.09		
		2130.00	H	-42.68	9.26	-33.42		
	High	2840.00	H	-47.25	11.38	-35.87	-13.00	PASS
		1422.00	Vertical	-28.90	4.18	-24.72		
		2133.00	V	-36.80	9.24	-27.56		
		2844.00	V	-42.07	11.82	-30.25		
		1422.00	Horizontal	-30.27	4.18	-26.09		
		2133.00	H	-40.38	9.24	-31.14		
2844.00	H	-43.68	11.82	-31.86	-13.00	PASS		

LTE Band 38								
Bandwidth	Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
			Polarization	reading (dBm)	factor (dB)	Level (dBm)		
5MHz	Low	5145.00	Vertical	-56.08	15.71	-40.37	-25.00	PASS
		7717.50	V	-58.99	17.88	-41.11		
		10290.00	V	-62.74	24.11	-38.63		
		5145.00	Horizontal	-56.69	15.71	-40.98		
		7717.50	H	-59.57	17.88	-41.69		
		10290.00	H	-63.23	24.11	-39.12		
	Mid	5190.00	Vertical	-55.6	15.69	-39.91	-25.00	PASS
		7785.00	V	-58.58	17.90	-40.68		
		10380.00	V	-63.15	24.93	-38.22		
		5190.00	Horizontal	-56.11	15.69	-40.42		
		7785.00	H	-59.13	17.90	-41.23		
		10380.00	H	-63.62	24.93	-38.69		
	High	5235.00	Vertical	-54.85	15.73	-39.12	-25.00	PASS
		7852.50	V	-57.92	17.96	-39.96		
		10470.00	V	-61.74	24.20	-37.54		
		5235.00	Horizontal	-55.87	15.73	-40.14		
		7852.50	H	-58.93	17.96	-40.97		
		10470.00	H	-62.67	24.20	-38.47		
10MHz	Low	5150.00	Vertical	-54.37	15.76	-38.61	-25.00	PASS



15MHz		7725.00	V	-56.42	17.90	-38.52		PASS	
		10300.00	V	-60.58	24.09	-36.49			
		5150.00	Horizontal	-54.66	15.76	-38.90			
		7725.00	H	-57.4	17.90	-39.50			
		10300.00	H	-61.79	24.09	-37.70			
	Mid	5190.00	Vertical	-52.9	15.69	-37.21		PASS	
		7785.00	V	-55.1	17.90	-37.20			
		10380.00	V	-59.97	24.93	-35.04			
		5190.00	Horizontal	-53.42	15.69	-37.73			
		7785.00	H	-56.58	17.90	-38.68			
		10380.00	H	-61.69	24.93	-36.76			
	High	5230.00	Vertical	-51.72	15.80	-35.92		PASS	
		7845.00	V	-55.18	17.98	-37.20			
		10460.00	V	-59.16	24.15	-35.01			
		5230.00	Horizontal	-52.57	15.80	-36.77			
		7845.00	H	-55.93	17.98	-37.95			
	20MHz	Low	5155.00	Vertical	-52.99	15.76	-37.23		PASS
			7732.50	V	-54.38	17.96	-36.42		
10310.00			V	-59.84	24.92	-34.92			
5155.00			Horizontal	-55.71	15.76	-39.95			
7732.50			H	-59.33	17.96	-41.37			
Mid		10310.00	H	-63.54	24.92	-38.62		PASS	
		5190.00	Vertical	-53.58	15.69	-37.89			
		7785.00	V	-56.35	17.90	-38.45			
		10380.00	V	-60.03	24.93	-35.10			
		5190.00	Horizontal	-54.98	15.69	-39.29			
High	7785.00	H	-57.64	17.90	-39.74		PASS		
	10380.00	H	-62.50	24.93	-37.57				
	5225.00	Vertical	-51.76	15.75	-36.01				
	7837.50	V	-55.21	17.94	-37.27				
	10450.00	V	-59.18	24.11	-35.07				
	5225.00	Horizontal	-53.74	15.75	-37.99				
20MHz	Low	7837.50	H	-57.02	17.94	-39.08		PASS	
		10450.00	H	-60.44	24.11	-36.33			
		5160.00	Vertical	-51.74	15.64	-36.10			
		7740.00	V	-53.66	17.85	-35.81		PASS	



		10320.00	V	-59.62	24.87	-34.75		PASS	
		5160.00	Horizontal	-57.32	15.64	-41.68			
		7740.00	H	-60.40	17.85	-42.55			
		Mid	10320.00	H	-64.85	24.87	-39.98	-25.00	PASS
	5190.00		Vertical	-54.92	15.69	-39.23			
	7785.00		V	-57.48	17.90	-39.58			
	10380.00		V	-61.38	24.93	-36.45			
	5190.00		Horizontal	-55.87	15.69	-40.18			
	7785.00		H	-58.96	17.90	-41.06			
		High	10380.00	H	-63.54	24.93	-38.61	-25.00	PASS
	5220.00		Vertical	-52.21	15.70	-36.51			
	7830.00		V	-56.27	17.88	-38.39			
	10440.00		V	-60.37	24.00	-36.37			
	5220.00		Horizontal	-52.62	15.70	-36.92			
	7830.00		H	-56.34	17.88	-38.46			
		10440.00	H	-59.50	24.00	-35.50	-25.00	PASS	

LTE Band 41									
Bandwidth	Channel	Frequency (MHz)	Spurious Emission			Limit (dBm)	Result		
			Polarization	reading (dBm)	factor (dB)			Level (dBm)	
5MHz	Low	5075.00	Vertical	-55.32	15.64	-39.68	-25.00	PASS	
		7612.50	V	-58.18	17.82	-40.36			
		10150.00	V	-61.26	23.83	-37.43			
		5075.00	Horizontal	-56.74	15.64	-41.10			
		7612.50	H	-59.51	17.82	-41.69			
		10150.00	H	-62.39	23.83	-38.56			
		Mid	5180.00	Vertical	-54.3	15.69	-38.61	-25.00	PASS
	7770.00		V	-57.32	17.96	-39.36			
	10360.00		V	-60.69	24.20	-36.49			
	5180.00		Horizontal	-55.49	15.69	-39.80			
	7770.00		H	-58.6	17.96	-40.64			
	10360.00		H	-61.76	24.20	-37.56			
		High	5305.00	Vertical	-52.75	15.96	-36.79	-25.00	PASS
	7957.50		V	-56.35	18.64	-37.71			
	10610.00		V	-59.21	24.29	-34.92			
5305.00	Horizontal		-55.12	15.96	-39.16				



		7957.50	H	-58.68	18.64	-40.04		
		10610.00	H	-61.34	24.29	-37.05		
10MHz	Low	5080.00	Vertical	-51.27	15.65	-35.62	-25.00	PASS
		7620.00	V	-52.22	17.83	-34.39		
		10160.00	V	-56.35	23.85	-32.50		
		5080.00	Horizontal	-51.94	15.65	-36.29		
		7620.00	H	-54.46	17.83	-36.63		
		10160.00	H	-59.12	23.85	-35.27		
	Mid	5180.00	Vertical	-48.06	15.69	-32.37	-25.00	PASS
		7770.00	V	-49.29	17.96	-31.33		
		10360.00	V	-53.36	24.20	-29.16		
		5180.00	Horizontal	-49.27	15.69	-33.58		
		7770.00	H	-52.69	17.96	-34.73		
		10360.00	H	-57.29	24.20	-33.09		
	High	5300.00	Vertical	-45.2	15.80	-29.40	-25.00	PASS
		7950.00	V	-49.96	18.64	-31.32		
		10600.00	V	-53.37	24.29	-29.08		
		5300.00	Horizontal	-47.16	15.80	-31.36		
		7950.00	H	-51.68	18.64	-33.04		
		10600.00	H	-54.4	24.29	-30.11		
15MHz	Low	5085.00	Vertical	-48.10	15.67	-32.43	-25.00	PASS
		7627.50	V	-47.38	17.84	-29.54		
		10170.00	V	-52.71	23.85	-28.86		
		5085.00	Horizontal	-54.39	15.67	-38.72		
		7627.50	H	-58.80	17.84	-40.96		
		10170.00	H	-61.25	23.85	-37.40		
	Mid	5180.00	Vertical	-49.62	15.69	-33.93	-25.00	PASS
		7770.00	V	-52.19	17.96	-34.23		
		10360.00	V	-53.50	24.20	-29.30		
		5180.00	Horizontal	-52.88	15.69	-37.19		
		7770.00	H	-55.14	17.96	-37.18		
		10360.00	H	-59.16	24.20	-34.96		
	High	5295.00	Vertical	-45.13	15.51	-29.62	-25.00	PASS
		7942.50	V	-50.13	18.66	-31.47		
		10590.00	V	-53.51	24.30	-29.21		
		5295.00	Horizontal	-49.69	15.51	-34.18		
		7942.50	H	-54.32	18.66	-35.66		



		10590.00	H	-56.40	24.30	-32.10		
20MHz	Low	5090.00	Vertical	-45.48	15.67	-29.81	-25.00	PASS
		7635.00	V	-45.97	17.84	-28.13		
		10180.00	V	-52.32	23.86	-28.46		
		5090.00	Horizontal	-58.40	15.67	-42.73	-25.00	PASS
		7635.00	H	-61.54	17.84	-43.70		
		10180.00	H	-64.41	23.86	-40.55		
	Mid	5180.00	Vertical	-52.73	15.69	-37.04	-25.00	PASS
		7770.00	V	-54.79	17.96	-36.83		
		10360.00	V	-56.63	24.20	-32.43		
		5180.00	Horizontal	-54.93	15.69	-39.24	-25.00	PASS
		7770.00	H	-58.19	17.96	-40.23		
		10360.00	H	-61.57	24.20	-37.37		
	High	5290.00	Vertical	-46.76	15.98	-30.78	-25.00	PASS
		7935.00	V	-52.71	18.65	-34.06		
		10580.00	V	-56.56	24.34	-32.22		
		5290.00	Horizontal	-47.69	15.98	-31.71	-25.00	PASS
		7935.00	H	-52.87	18.65	-34.22		
		10580.00	H	-54.52	24.34	-30.18		




10. ERP and EIRP

10.1. Test Standard and Limit

Applicable Standard:	Part 2.1046 Part 22.913(a) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h)
Limit:	ERP ≤ 7W(38.45dBm) (LTE Band 5) EIRP ≤ 2W(33.00dBm) (LTE Band 2) ERP ≤ 3W(34.77dBm) (LTE Band 17) EIRP ≤ 1W(30.00dBm) (LTE Band 4) EIRP ≤ 2W(33.00dBm) (LTE Band 7,38,41)

10.2. Test Setup

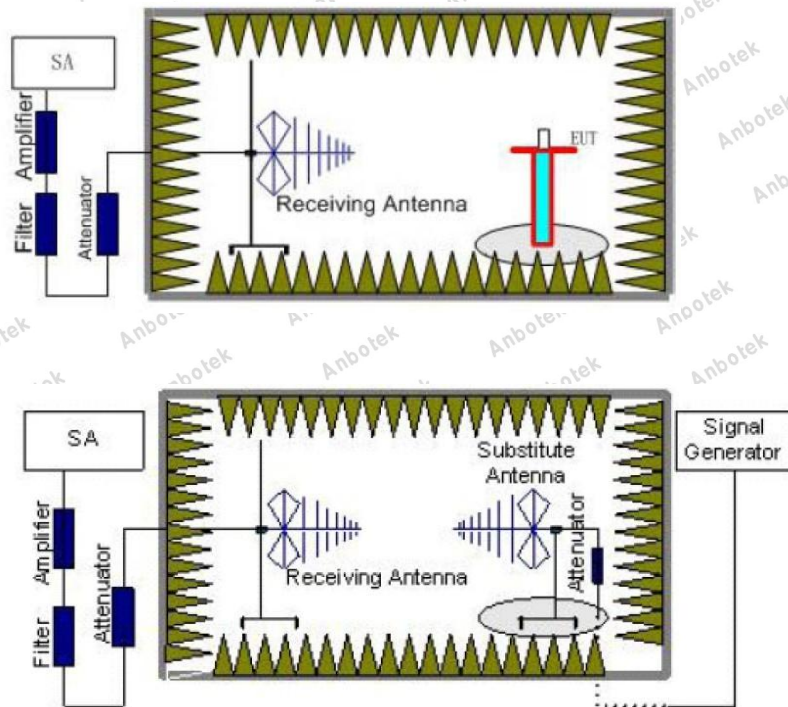

10.3. Test Procedure

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.



2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$Pe = Ps(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
Pe = equivalent emission power in dBm
Ps = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.



13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:

$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB.}$$

If necessary, the antenna gain can be calculated from calibrated antenna factor information

14. Provide the complete measurement results as a part of the test report.

10.4. Test Data

Pass

Please to see the following pages



LTE Band 2						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	23.69	20.75	33.00	PASS
		Mid	24.19	20.60		
		High	24.39	20.94		
	16QAM	Low	16.30	14.22		PASS
		Mid	17.07	14.83		
		High	16.90	15.55		
3MHz	QPSK	Low	22.78	19.03	33.00	PASS
		Mid	23.60	20.55		
		High	23.42	20.24		
	16QAM	Low	18.72	16.70		PASS
		Mid	18.41	16.09		
		High	17.00	16.11		
5MHz	QPSK	Low	26.74	22.79	33.00	PASS
		Mid	27.17	22.30		
		High	28.02	22.83		
	16QAM	Low	19.71	16.17		PASS
		Mid	19.97	16.60		
		High	19.63	17.14		
10MHz	QPSK	Low	26.58	23.12	33.00	PASS
		Mid	27.02	22.64		
		High	27.84	23.53		
	16QAM	Low	19.54	16.69		PASS
		Mid	19.83	17.37		
		High	19.49	17.67		
15MHz	QPSK	Low	25.30	21.10	33.00	PASS
		Mid	26.06	22.32		
		High	26.42	22.50		
	16QAM	Low	21.54	18.85		PASS
		Mid	20.81	18.30		
		High	19.25	17.96		
20MHz	QPSK	Low	25.98	21.72	33.00	PASS
		Mid	27.11	23.15		
		High	27.48	23.17		
	16QAM	Low	22.54	20.22		PASS



		Mid	21.66	18.98		
		High	20.05	18.31		

LTE Band 4						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	24.79	22.37	30.00	PASS
		Mid	25.92	23.33		
		High	26.47	22.89		
	16QAM	Low	16.60	16.35		PASS
		Mid	17.53	17.45		
		High	17.63	17.51		
3MHz	QPSK	Low	26.32	22.37	30.00	PASS
		Mid	25.61	22.44		
		High	25.32	22.34		
	16QAM	Low	17.64	17.95		PASS
		Mid	18.30	15.58		
		High	18.71	18.26		
5MHz	QPSK	Low	28.52	24.32	30.00	PASS
		Mid	28.96	25.19		
		High	29.40	24.89		
	16QAM	Low	19.38	17.72		PASS
		Mid	19.98	20.73		
		High	19.66	18.57		
10MHz	QPSK	Low	26.92	23.74	30.00	PASS
		Mid	27.65	24.58		
		High	28.14	24.14		
	16QAM	Low	18.18	17.43		PASS
		Mid	18.92	18.40		
		High	18.79	18.30		
15MHz	QPSK	Low	28.56	23.54	30.00	PASS
		Mid	27.43	23.56		
		High	27.08	23.54		
	16QAM	Low	19.31	18.77		PASS
		Mid	19.77	17.55		
		High	19.93	18.90		



20MHz	QPSK	Low	28.77	23.74	30.00	PASS
		Mid	28.29	23.94		
		High	27.81	23.73		
	16QAM	Low	19.23	19.05		PASS
		Mid	20.58	17.31		
		High	20.82	19.48		

LTE Band 5						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
1.4MHz	QPSK	Low	23.33	22.22	38.45	PASS
		Mid	24.17	22.50		
		High	24.11	22.56		
	16QAM	Low	19.02	17.94		PASS
		Mid	19.28	18.71		
		High	19.40	18.24		
3MHz	QPSK	Low	26.12	21.01	38.45	PASS
		Mid	25.42	21.22		
		High	24.35	20.85		
	16QAM	Low	18.76	19.40		PASS
		Mid	19.26	18.13		
		High	19.38	17.75		
5MHz	QPSK	Low	25.07	21.68	38.45	PASS
		Mid	24.70	21.90		
		High	23.68	21.27		
	16QAM	Low	20.24	19.46		PASS
		Mid	19.97	19.65		
		High	19.85	19.45		
10MHz	QPSK	Low	24.89	21.75	38.45	PASS
		Mid	24.54	21.96		
		High	23.56	21.32		
	16QAM	Low	20.26	18.59		PASS
		Mid	20.66	19.43		
		High	20.89	19.02		

LTE Band 7					
Bandwidth	Modulation	Channel	EIRP (dBm)	Limit (dBm)	Result



			Vertical	Horizontal		
5MHz	QPSK	Low	25.85	22.74	33.00	PASS
		Mid	26.71	22.59		
		High	26.53	22.53		
	16QAM	Low	14.52	12.75		
		Mid	15.44	13.49		
		High	15.48	14.58		
10MHz	QPSK	Low	25.02	20.27	33.00	PASS
		Mid	25.32	22.15		
		High	25.29	21.64		
	16QAM	Low	17.16	15.70		
		Mid	16.74	14.79		
		High	17.06	16.22		
15MHz	QPSK	Low	30.44	25.81	33.00	PASS
		Mid	32.00	25.61		
		High	31.89	25.32		
	16QAM	Low	19.56	15.63		
		Mid	19.73	16.10		
		High	19.51	16.93		
20MHz	QPSK	Low	30.19	26.30	33.00	PASS
		Mid	31.31	25.90		
		High	31.34	26.15		
	16QAM	Low	17.65	15.13		
		Mid	18.99	16.76		
		High	18.48	17.04		

LTE Band 17						
Bandwidth	Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	24.28	21.87	34.77	PASS
		Mid	24.90	21.36		
		High	23.91	22.81		
	16QAM	Low	17.50	16.82		
		Mid	18.28	17.37		
		High	18.04	17.41		
10MHz	QPSK	Low	24.10	20.39	34.77	PASS



		Mid	24.71	20.77	PASS
		High	23.75	20.36	
	16QAM	Low	17.65	17.09	
		Mid	18.41	17.55	
		High	18.17	17.50	

LTE Band 38						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		
5MHz	QPSK	Low	23.72	20.83	33.00	PASS
		Mid	24.20	20.64		
		High	24.40	20.97		
	16QAM	Low	16.33	14.31		PASS
		Mid	17.10	14.87		
		High	16.92	15.58		
10MHz	QPSK	Low	22.81	19.11	33.00	PASS
		Mid	23.62	20.59		
		High	23.43	20.27		
	16QAM	Low	18.75	16.78		PASS
		Mid	18.43	16.13		
		High	17.03	16.15		
15MHz	QPSK	Low	26.76	22.87	33.00	PASS
		Mid	27.18	22.34		
		High	28.02	22.85		
	16QAM	Low	19.74	16.26		PASS
		Mid	20.00	16.64		
		High	19.64	17.16		
20MHz	QPSK	Low	26.61	23.20	33.00	PASS
		Mid	27.03	22.68		
		High	27.84	23.56		
	16QAM	Low	19.57	16.78		PASS
		Mid	19.85	17.40		
		High	19.51	17.70		

LTE Band 41						
Bandwidth	Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
			Vertical	Horizontal		



5MHz	QPSK	Low	23.82	20.86	33.00	PASS
		Mid	24.33	20.71		
		High	24.55	21.06		
	16QAM	Low	16.14	14.08		PASS
		Mid	16.94	14.71		
		High	16.77	15.46		
10MHz	QPSK	Low	22.88	19.07	33.00	PASS
		Mid	23.72	20.66		
		High	23.54	20.33		
	16QAM	Low	18.66	16.65		PASS
		Mid	18.32	16.02		
		High	16.88	16.05		
15MHz	QPSK	Low	26.99	22.98	33.00	PASS
		Mid	27.43	22.48		
		High	28.32	23.02		
	16QAM	Low	19.69	16.11		PASS
		Mid	19.95	16.55		
		High	19.60	17.11		
20MHz	QPSK	Low	26.83	23.33	33.00	PASS
		Mid	27.27	22.83		
		High	28.13	23.75		
	16QAM	Low	19.51	16.65		PASS
		Mid	19.80	17.34		
		High	19.46	17.67		




11. Frequency stability VS Voltage measurement

11.1. Test Standard and Limit

Applicable Standard:	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54
Limit:	≤ ±2.5ppm

11.2. Test Setup

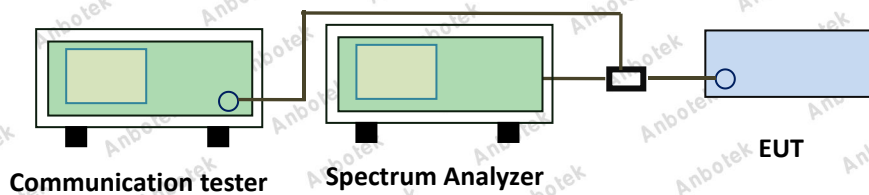

11.3. Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber at 25°C.
4. The power supply voltage to the EUT was varied ±15% of the nominal value measured at the input to the EUT.
5. Record the maximum frequency change.

11.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.




12. Frequency stability VS Temperature measurement

12.1. Test Standard and Limit

Applicable Standard:	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54
Limit:	≤ ±2.5ppm

12.2. Test Setup

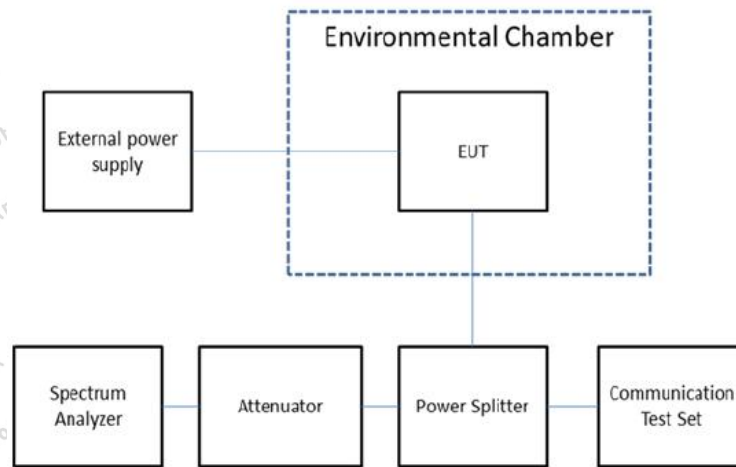

12.3. Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber.
4. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
5. Repeat step 4 measure with 10°C increased per stage until the highest temperature of +50°C reached.

12.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_Licensed

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

