

TEST REPORT

Applicant: Xuancheng Luxshare Precision Industry Co., Ltd.
Address: No.5, Baishou Road, Hi - Tech Industrial
Development Zone, Xuancheng, Anhui Province,
P.R. China
Equipment Type: Wireless Charging Module
Model Name: WCM
Brand Name: LuXshare
FCC ID: 2BBAQ-WCM
Test Standard: 47 CFR Part 15 Subpart C
ANSI C63.10-2013
Sample Arrival Date: Oct. 16, 2024
Test Date: Oct. 21, 2024 - Oct. 25, 2024
Date of Issue: Nov. 27, 2024

ISSUED BY:

Shanghai Tejet Communications Technology Co., Ltd. Testing Center

Tested by: Chai Yong

Checked by: Huang Chengkun

Approved by: Chen Zidong
(Technical Director)

Chai Yong

Huang Chengkun

Chen Zidong

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Nov. 27, 2024</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1 Test Laboratory	4
1.2 Test Location	4
2 PRODUCT INFORMATION	5
2.1 Applicant Information	5
2.2 Manufacturer Information	5
2.3 General Description for Equipment under Test (EUT)	5
2.4 Technical Information	5
3 SUMMARY OF TEST RESULTS	6
3.1 Test Standards	6
3.2 Verdict	6
3.3 Decision Rule	6
3.4 Test Uncertainty	6
4 GENERAL TEST CONFIGURATIONS	7
4.1 Test Environments	7
4.2 Test Setups	7
5 TEST ITEMS	9
5.1 Antenna Requirements	9
5.2 Emission Tests	10
ANNEX A TEST RESULTS	14
A.1 Radiated Emission	14
A.2 Conducted Emission	19
A.3 20 dB Bandwidth	20
ANNEX B TEST SETUP PHOTOS	22
ANNEX C EUT EXTERNAL PHOTOS	22

ANNEX D EUT INTERNAL PHOTOS 22

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Address	1st to 2nd floors, Building 1, No. 222 Xuanlan Road, Xuanqiao Town, Pudong New District, Shanghai

1.2 Test Location

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Location	1st to 2nd floors, Building 1, No. 222 Xuanlan Road, Xuanqiao Town, Pudong New District, Shanghai
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1352.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Xuancheng Luxshare Precision Industry Co., Ltd.
Address	No.5, Baishou Road, Hi - Tech Industrial Development Zone, Xuancheng, Anhui Province, P.R. China

2.2 Manufacturer Information

Manufacturer	Xuancheng Luxshare Precision Industry Co., Ltd.
Address	No.5, Baishou Road, Hi - Tech Industrial Development Zone, Xuancheng, Anhui Province, P.R. China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Wireless Charging Module
Model Name Under Test	WCM
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	WPT
--------------------------------------	-----

The requirement for the following technical information of the EUT was tested in this report:

Modulation Type	Qi
Operating Frequency	122~132 kHz
Product Type	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location
Antenna Type	Coil Antenna
About Product	The EUT support the Qi, and they have the same operating frequency.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Verdict
1	Antenna Requirement	15.203	Pass ^{Note1}
2	Radiated Emission	15.209,15.215(b)	Pass
3	Conducted Emission, AC Ports	15.207	N/A ^{Note2}
4	20 dB Bandwidth	15.215(c)	Pass

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note 2: The EUT is only used in vehicle environment. So the Conducted Emission test is not applicable.

Note 3: WCM has two configuration. The configuration 1 has fan component, configuration 2 has no fan component. And others hardware circuit and software were all the same. configuration 1 is considered as worst case after evaluation on both configurations, thus all tests are performed on configuration 1.

3.3 Decision Rule

- ☐ No Need
- ☒ Use General conformity decision rule (Consider uncertainty or not ☒ No ☐ Yes)
- ☐ Use Special Conformity Decision Rule (Consider uncertainty or not ☐ No ☐ Yes)

3.4 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (9 kHz-30 MHz)	4.3 dB
Radiated emissions (30 MHz-1 GHz)	4.4 dB


4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Relative Humidity	53% to 59%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+23.1℃ to +23.6℃
Working Voltage of the EUT	NV (Normal Voltage)	13.5 V


4.2 Test Setups

4.2.1 For Radiated Test (Below 30 MHz)

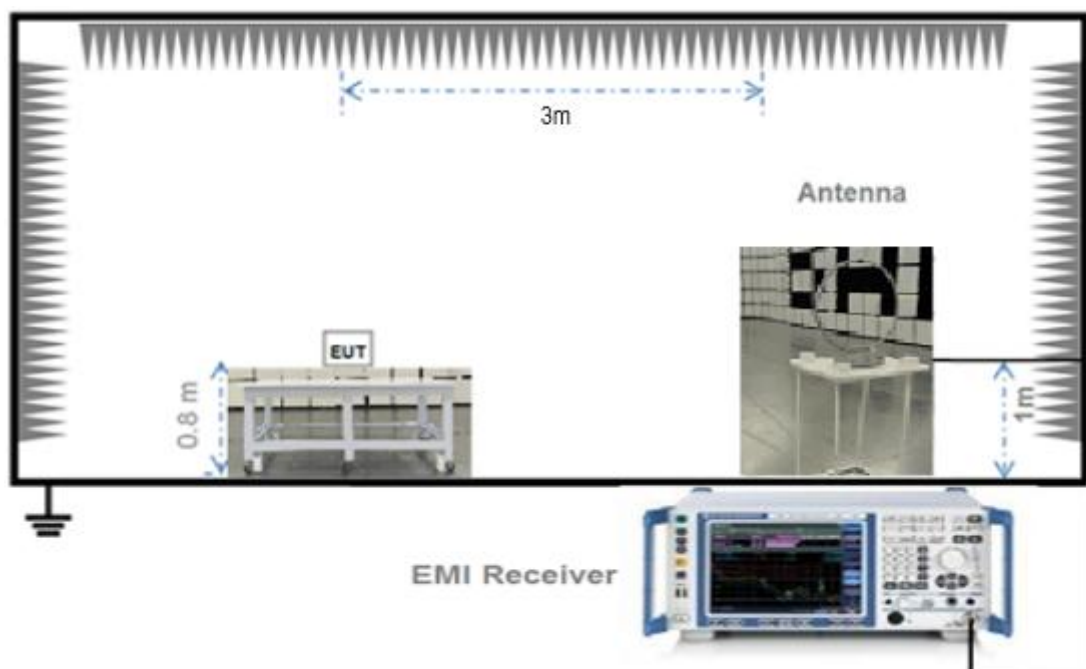


(Diagram 1)

4.2.2 For Radiated Test (30 MHz-1 GHz)

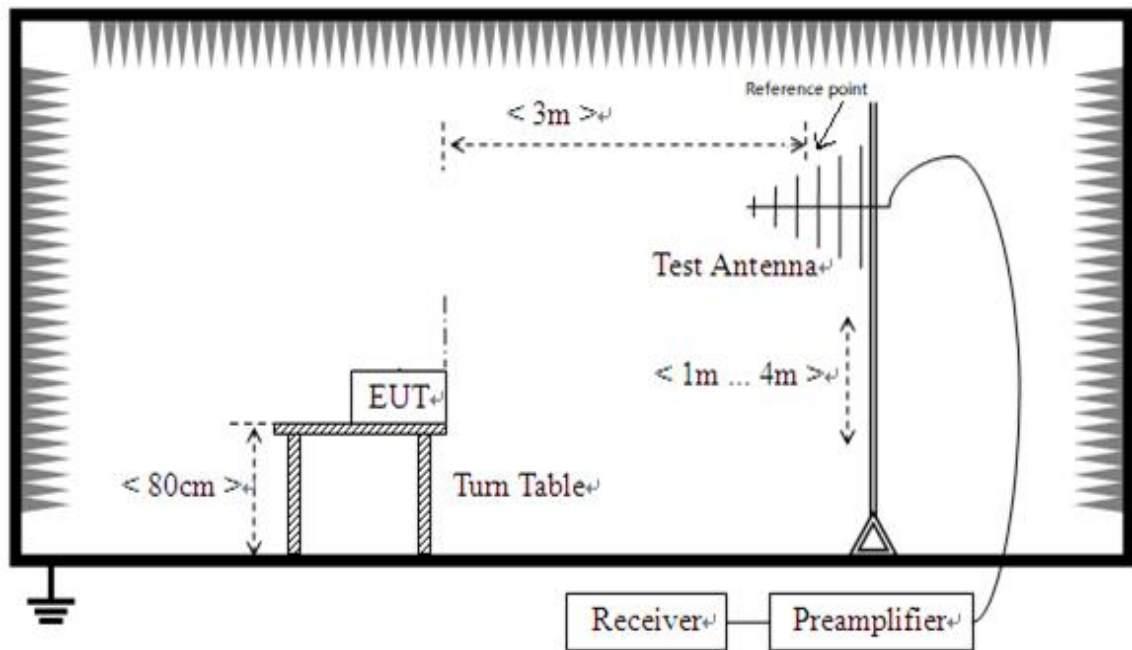

(Diagram 2)

4.2.3 For AC Power Supply Port Test

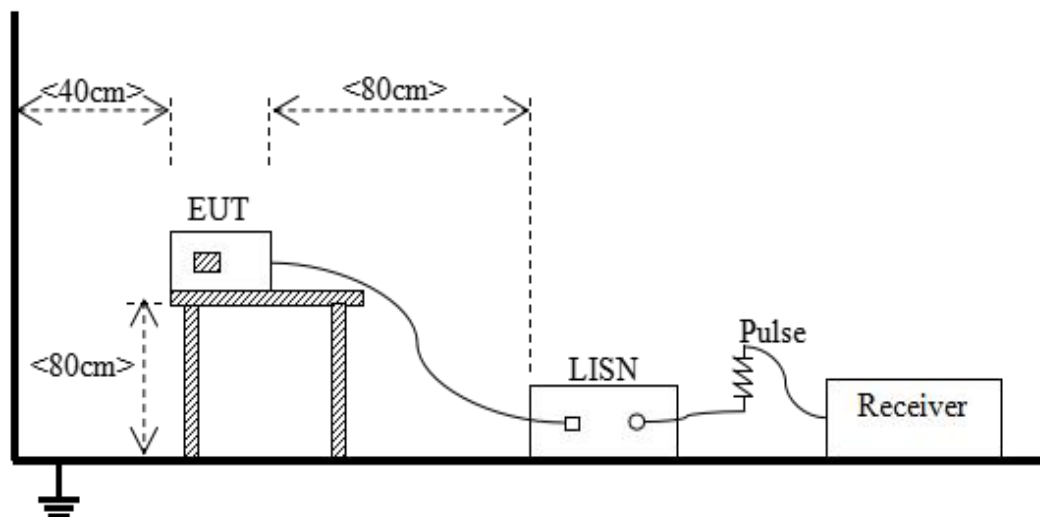

(Diagram 3)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer EUT internal photos.

5.2 Emission Tests

5.2.1 Radiated Emission

5.2.1.1 Limit

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1) Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For above 1000 MHz, limit field strength of harmonics: $54 \text{ dB}\mu\text{V/m}@3 \text{ m (AV)}$ and $74 \text{ dB}\mu\text{V/m}@3 \text{ m (PK)}$
- 4) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). For example, at the frequency 9 kHz, limit @10m = $20 \cdot \log (2400/f) + 40 \log (d_{\text{limit}}/d_{\text{measure}})$ where limit = 300m, $d_{\text{measure}}=10\text{m}$. limit @10m = $20 \cdot \log (2400/9) + 40 \log (300/10) = 107.5 \text{ (dB}\mu\text{V/m)}$.
- 5) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided, When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements). For example, at the frequency 30 MHz, limit @10m = $20 \cdot \log (100) + 20 \log (d_{\text{limit}}/d_{\text{measure}})$ where limit = 3m, $d_{\text{measure}}=10\text{m}$. limit @10m = $20 \cdot \log (100) + 20 \log (3/10) = 29.5 \text{ (dB}\mu\text{V/m)}$.

5.2.1.2 Test Setup

Refer to 4.2 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.2.1.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented. The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $30 \text{ MHz} < f < 1 \text{ GHz}$, 10 kHz for $150 \text{ kHz} < f < 30 \text{ MHz}$,
300 Hz for $f < 150 \text{ kHz}$

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.2.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit – Results

5.2.2 Conduct Emission

5.2.2.1 Test Limit

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The limit is applicable to Class B ITE.
- 2) The lower limit shall apply at the band edges.
- 3) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.2.2.2 Test Setup

Refer to 4.2 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.2.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.2.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss
3. Margin = Limit – Results

5.2.3 20 dB Bandwidth

5.2.3.1 Limit

FCC §15.215(c)

The 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20$ dB) taking the total RF output power.

5.2.3.2 Test Setup

Refer to 4.2 section test (test setup 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3.3 Test Procedure

The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while the EUT is operating in transmission mode.

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW

RBW = 1% to 5% the OBW

VBW \geq 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

The 99% emission bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while the EUT is operating in transmission mode.

Use the following spectrum analyzer settings:

Span = between 1.5 to 5 times the OBW

RBW = 1% to 5% OBW

VBW \geq 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.2.3.4 Test Result and Test Equipment List

Please refer to ANNEX A.3.

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: This frequency which near 0.128 kHz with circle should be ignored because they are Qi carrier frequency.

Note 2: All Radiated Emissions tests were performed in X, Y, Z axis direction of EUT. And only the worst X axis test condition was recorded in this test report.

Sample No.	S09	Temperature	23.1℃
Humidity	59%RH	Pressure	101kPa
Test Engineer	Chai Yong	Test Date	2024.10.21

Test Data and Plot

9 kHz to 30 MHz, ANT-V

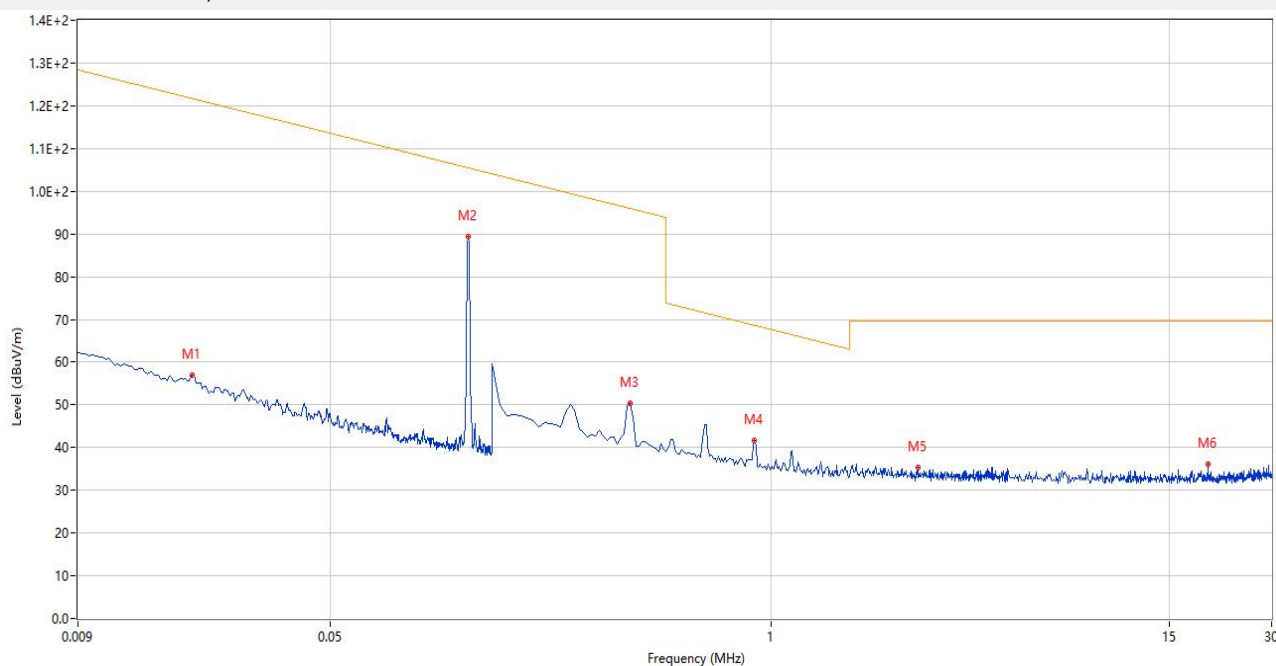


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	0.020	56.92	19.41	121.8	64.88	Peak	104.00	100	Vertical	Pass
2	0.128	89.30	19.07	105.5	16.20	Peak	104.00	100	Vertical	N/A
3	0.384	50.34	18.98	95.9	45.56	Peak	91.00	100	Vertical	Pass
4	0.894	41.72	19.04	68.6	26.88	Peak	255.00	100	Vertical	Pass
5	2.712	35.38	19.25	69.5	34.12	Peak	356.00	100	Vertical	Pass
6	19.500	36.08	19.34	69.5	33.42	Peak	288.00	100	Vertical	Pass

Equipment Information						
Description	Manufacturer	Model	Equipment No	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2024.07.09	2025.07.08	<input checked="" type="checkbox"/>
Test Antenna- Loop	SCHWARZBECK	FMZB 1519B	BH-EMC-L067	2024.03.11	2027.03.10	<input checked="" type="checkbox"/>
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	<input checked="" type="checkbox"/>
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		<input checked="" type="checkbox"/>

Sample No.	S09	Temperature	23.1℃
Humidity	59%RH	Pressure	101kPa
Test Engineer	Chai Yong	Test Date	2024.10.21


Test Data and Plot

30 MHz to 1 GHz, ANT-V

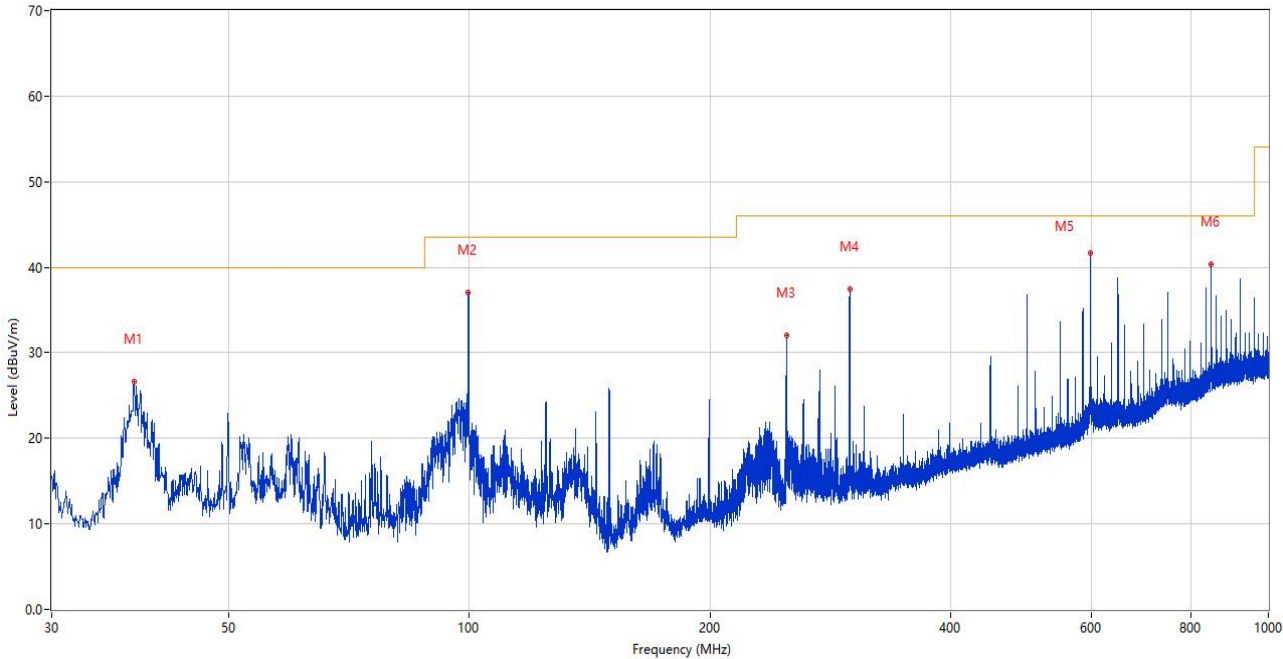

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.002	26.61	-26.60	40.0	13.39	Peak	199.00	100	Vertical	Pass
2	99.695	37.08	-26.12	43.5	6.42	Peak	78.00	100	Vertical	Pass
3	249.317	32.00	-24.07	46.0	14.00	Peak	228.00	200	Vertical	Pass
4	299.175	37.39	-23.21	46.0	8.61	Peak	242.00	100	Vertical	Pass
5	598.323	41.65	-15.00	46.0	4.35	Peak	338.00	100	Vertical	Pass
6	847.807	40.29	-10.50	46.0	5.71	Peak	156.00	100	Vertical	Pass

30 MHz to 1 GHz, ANT-H

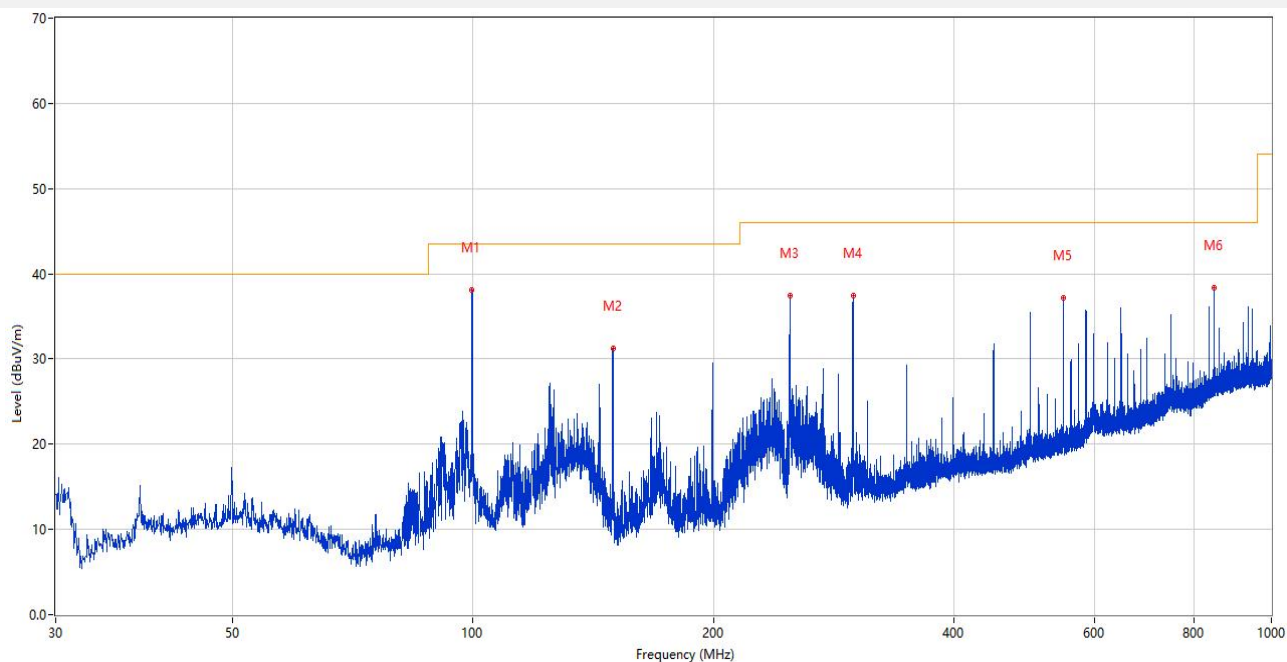

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	99.695	38.06	-26.12	43.5	5.44	Peak	262.00	200	Horizontal	Pass
2	149.650	31.29	-29.59	43.5	12.21	Peak	249.00	100	Horizontal	Pass
3	249.317	37.46	-24.07	46.0	8.54	Peak	249.00	100	Horizontal	Pass
4	299.126	37.48	-23.21	46.0	8.52	Peak	145.00	100	Horizontal	Pass
5	548.465	37.17	-16.95	46.0	8.83	Peak	152.00	100	Horizontal	Pass
6	847.613	38.35	-10.51	46.0	7.65	Peak	106.00	200	Horizontal	Pass

Equipment Information						
Description	Manufacturer	Model	Equipment No	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2024.07.09	2025.07.08	<input checked="" type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	BH-EMC-L008	2024.03.11	2027.03.10	<input checked="" type="checkbox"/>
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	<input checked="" type="checkbox"/>
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		<input checked="" type="checkbox"/>

A.2 Conducted Emission

Note: Not applicable.

A.3 20 dB Bandwidth

Note: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.


Sample No.	S09	Temperature	23.6℃
Humidity	53%RH	Pressure	101kPa
Test Engineer	Chai Yong	Test Date	2024.10.25

Test Data

Frequency (MHz)	Emission Bandwidth (20dB down) (kHz)	Occupied Bandwidth (99%) (kHz)
0.128	24.90	30.68


Test Plots

Emission Bandwidth

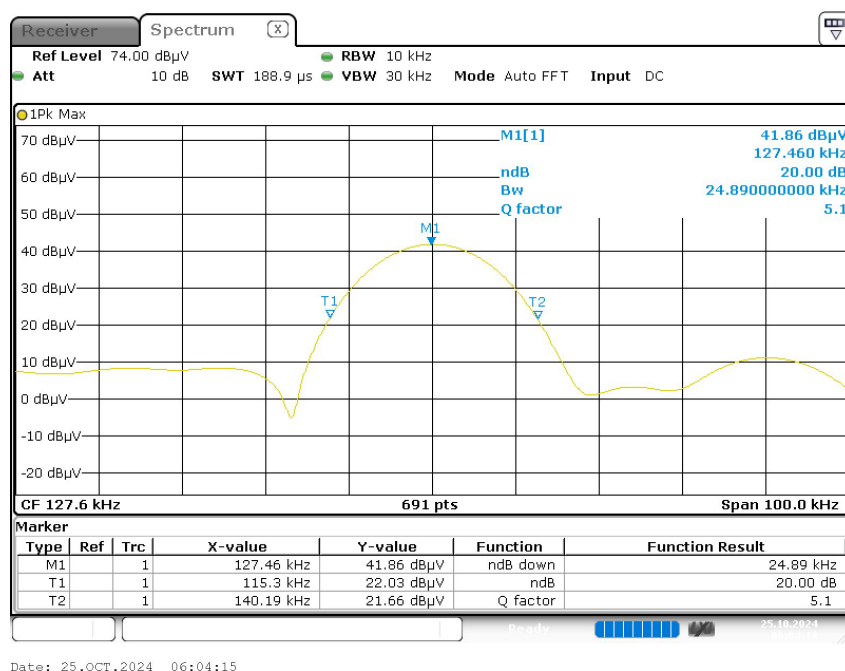

99% Occupied Bandwidth

9

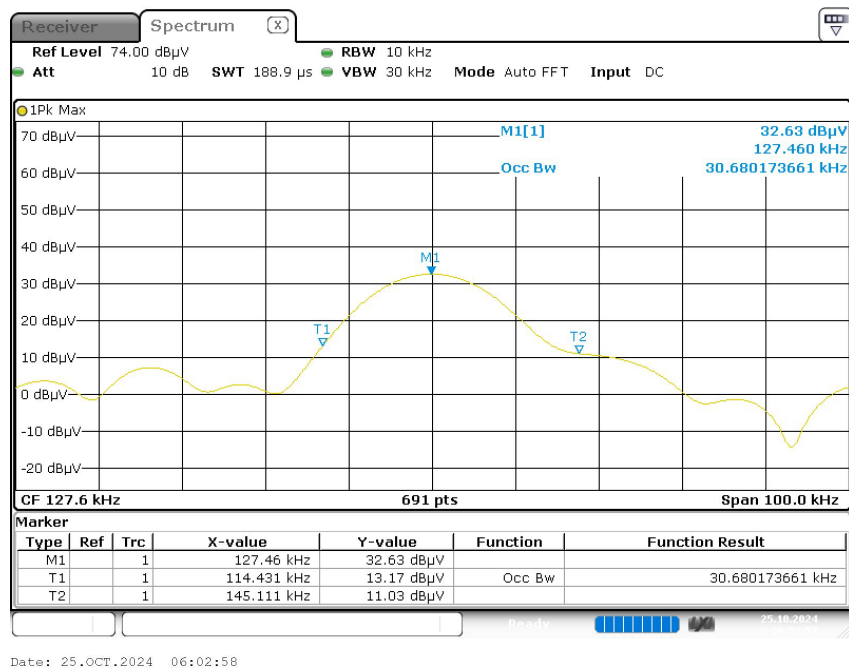

Equipment Information						
Description	Manufacturer	Model	Equipment No	Cal. Date	Cal. Due	Use
EMI Receiver	R&S	ESRP3	BH-EMC-L010	2024.02.19	2025.02.18	☑
Test Antenna-Loop	SCHWARZBECK	FMZB 1519B	BH-EMC-L067	2024.03.11	2027.03.10	☑
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	☑

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SH24A0776-AE-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SH24A0776-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SH24A0776-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--