

# TEST REPORT

**Applicant:** Xuancheng Luxshare Precision Industry Co., Ltd.  
**Address:** No.5, Baishou Road,  
Hi - Tech Industrial Development Zone,  
Xuancheng, Anhui Province, P.R. China  
**Equipment Type:** Wireless Charging Module  
**Model Name:** WCM\_NFC\_Int  
**Brand Name:** LuXshare  
**FCC ID:** 2BBAQ-WCMNFCINT  
**Test Standard:** 47 CFR Part 1  
(refer section 3.1)  
**Sample Arrival Date:** Oct. 22, 2024  
**Test Date:** Nov. 13, 2024  
**Date of Issue:** Nov. 27, 2024

**ISSUED BY:**

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Xu Rui

**Checked by:** Liyao Zong

**Approved by:** Tolan Tu  
(Testing Director)

*Xu Rui*

*Liyao Zong*

*Tolan Tu*

**Revision History**

| <u>Version</u> | <u>Issue Date</u>    | <u>Revisions Content</u> |
|----------------|----------------------|--------------------------|
| <u>Rev. 01</u> | <u>Nov. 27, 2024</u> | <u>Initial Issue</u>     |

**TABLE OF CONTENTS**

|     |  |    |
|-----|--|----|
| 1   | GENERAL INFORMATION .....  | 4  |
| 1.1 | Test Laboratory .....  | 4  |
| 1.2 | Test Location.....   | 4  |
| 2   | PRODUCT INFORMATION.....   | 5  |
| 2.1 | Applicant Information.....   | 5  |
| 2.2 | Manufacturer Information .....   | 5  |
| 2.3 | General Description for Equipment under Test (EUT) .....               | 5  |
| 2.4 | Ancillary Equipment.....   | 5  |
| 2.5 | Technical Information .....  | 6  |
| 3   | SUMMARY OF TEST RESULT .....   | 7  |
| 3.1 | Test Standards .....   | 7  |
| 3.2 | Radiofrequency Radiation Exposure Limit .....                          | 8  |
| 3.3 | Measurement Uncertainty .....  | 9  |
| 4   | DEVICE CATEGORY AND LEVELS LIMITS .....                                | 10 |
| 4.1 | Test Setup Photo.....  | 10 |
| 4.2 | Measurement procedure .....  | 10 |
| 4.3 | Mobile Condition.....  | 10 |
| 4.4 | Equipment Approval Considerations item 5.2 of KDB 680106 D01 v04. .... | 11 |
| 4.5 | Test Equipment .....   | 11 |
| 4.6 | Test Configuration .....   | 12 |
| 5   | TEST RESULT .....  | 13 |
| 5.1 | E-field .....  | 13 |
| 5.2 | H-field .....  | 13 |
| 6   | Test Conclusion .....  | 13 |

|     |               |    |
|-----|---------------|----|
| 6.1 | E-field ..... | 13 |
| 6.2 | H-field ..... | 13 |

# 1 GENERAL INFORMATION

## 1.1 Test Laboratory

|              |  |
|--------------|--|
| Name         | Shenzhen BALUN Technology Co., Ltd.  |
| Address      | Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China |
| Phone Number | +86 755 6685 0100  |

## 1.2 Test Location

|          |  |
|----------|--|
| Name     | Shenzhen BALUN Technology Co., Ltd.  |
| Location | <input type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China  |
|          | <input checked="" type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China |

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

|           |  |
|-----------|--|
| Applicant | Xuancheng Luxshare Precision Industry Co., Ltd.  |
| Address   | No.5, Baishou Road,<br>Hi - Tech Industrial Development Zone,<br>Xuancheng, Anhui Province, P.R. China |

### 2.2 Manufacturer Information

|              |  |
|--------------|--|
| Manufacturer | Xuancheng Luxshare Precision Industry Co., Ltd.  |
| Address      | No.5, Baishou Road,<br>Hi - Tech Industrial Development Zone,<br>Xuancheng, Anhui Province, P.R. China |

### 2.3 General Description for Equipment under Test (EUT)

|   |                          |
|---|--------------------------|
| EUT Name                                  | Wireless Charging Module |
| Model Name Under Test                     | WCM_NFC_Int              |
| Series Model Name                         | N/A                      |
| Description of Model name differentiation | N/A                      |
| Hardware Version                          | N/A                      |
| Software Version                          | N/A                      |
| Dimensions (Approx.)                      | N/A                      |
| Weight (Approx.)                          | N/A                      |

### 2.4 Ancillary Equipment

Note: Not applicable.

## 2.5 Technical Information

|                                   |         |
|-----------------------------------|---------|
| Network and Wireless connectivity | Qi, NFC |
|-----------------------------------|---------|

The requirement for the following technical information of the EUT was tested in this report:

|                     |   |  |
|---------------------|---|--|
| Modulation Type     | ASK   |  |
| Operating Frequency | 122 kHz -132 kHz                                    |  |
| Antenna Type        | Coil Antenna  |  |
| Exposure Category   | Mobile Device                                       |  |
| Product Type        | ASK   |  |
| EUT Type            | <input checked="" type="checkbox"/> Production unit | <input type="checkbox"/> Identical prototype |

### 3 SUMMARY OF TEST RESULT

#### 3.1 Test Standards

| No. | Identity           | Document Title   |
|-----|--------------------|--|
| 1   | 47 CFR Part 1      | Practice and Procedure                                     |
| 2   | KDB 680106 D01 v04 | EQUIPMENT AUTHORIZATION OF WIRELESS POWER TRANSFER DEVICES |
| 3   | KDB 447498 D04 v01 | 447498 D04 Interim General RF Exposure Guidance v01        |

### 3.2 Radiofrequency Radiation Exposure Limit

| Frequency range (MHz)   | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW / cm <sup>2</sup> ) | Averaging time (minutes) |
|---|-------------------------------|-------------------------------|---------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposure                     |                               |                               |                                       |                          |
| 0.3-3.0   | 614                           | 1.63                          | *100                                  | 6                        |
| 3.0-30  | 1842/f                        | 4.89/f                        | *900/f <sup>2</sup>                   | 6                        |
| 30-300  | 61.4                          | 0.163                         | 1.0                                   | 6                        |
| 300-1,500   |                               |                               | f/300                                 | 6                        |
| 1,500-100,000   |                               |                               | 5                                     | 6                        |
| (B) Limits for General Population/Uncontrolled Exposure             |                               |                               |                                       |                          |
| 0.3-1.34  | 614                           | 1.63                          | *100                                  | 30                       |
| 1.34-30   | 824/f                         | 2.19/f                        | *180/f <sup>2</sup>                   | 30                       |
| 30-300  | 27.5                          | 0.073                         | 0.2                                   | 30                       |
| 300-1,500   |                               |                               | f/1500                                | 30                       |
| 1,500-100,000   |                               |                               | 1.0                                   | 30                       |
| <i>f = frequency in MHz * = Plane-wave equivalent power density</i> |                               |                               |                                       |                          |

**NOTE:**

**Limits:** According KDB 680106 D01, emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m.

**General Population/Uncontrolled Exposure:** Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Occupational/Controlled Exposure:** Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.



### 3.3 Measurement Uncertainly

Measurement uncertainly evaluation for electric filed strength and magnetic filed strength test


This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| Measurement             | Value   |
|-------------------------|---------|
| Magnetic Filed Strength | 1.18 dB |
| Electric Filed Strength | 1.13 dB |

## 4 DEVICE CATEGORY AND LEVELS LIMITS

### 4.1 Test Setup Photo

Maximum H-field and E-field measurements were made on each of five sides of the EUT that could come in contact with a user. The five sides are defined as follows: A, B, C, D, E. Refer to the test position diagram below.

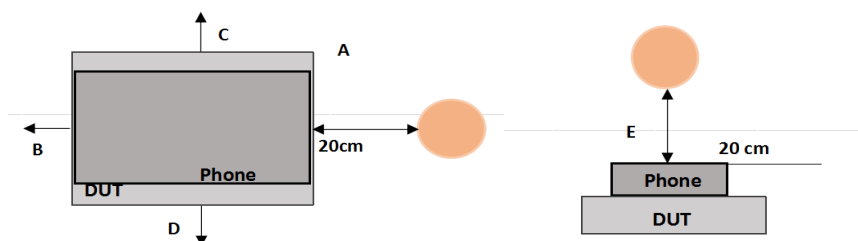

### 4.2 Measurement procedure

1. The RF exposure test was performed in anechoic chamber.
2. The measurement probe was placed at test distance 20 cm for A, B, C, D and E which is between the edge of the charger and the geometric edge of probe.
3. The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
4. The EUT was measured according the dictates of KDB 680106 D01v04.

### 4.3 Mobile Condition

| Probe     | Condition | Test Distance (cm)<br>A, B, C, D, E |
|-----------|-----------|-------------------------------------|
| E&H-field | Mobile    | 20                                  |

#### 4.4 Equipment Approval Considerations item 5.2 of KDB 680106 D01 v04.

1. Power transfer frequency is less than 1 MHz.  
- The device operates at a frequency 122 kHz ~ 132 kHz
2. Output power from each primary coil is less than or equal to 15 watts.  
- Output power from primary coil 15 watts.
3. Client device is placed directly in contact with the transmitter.  
- Client device is placed directly in contact with the transmitter.
4. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).  
- According safety guide, on the wireless power sharing function this this DUT should be operate with a minimum distance of 20cm between the DUT and human body, so this EUT only support mobile exposure condition.
5. The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit.  
- Refer to following test results.  
The EUT E-Field Strength levels at 20 cm < 50 % of the MPE E-Field Strength limit  
17.953 V/m (Max. at 20 cm) < 307 V/m  
The EUT H-Field Strength levels at 20 cm < 50 % of the MPE H-Field Strength limit  
0.447 A/m (Max. at 20 cm) < 0.815 A/m

#### 4.5 Test Equipment

| Description      | Manufacturer | Model    | Serial No. | Cal. Date  | Cal. Due   |
|------------------|--------------|----------|------------|------------|------------|
| PC               | Lonovo       | E4-ARR   | MP1K4PCW   | N/A        | N/A        |
| Test Software    | Narda        | WinEP600 | N/A        | N/A        | N/A        |
| E-Field Probe    | Narda        | EP 602   | 611WX80276 | 2024/10/15 | 2025/10/14 |
| E&H-field Probe  | Wavecontrol  | WP400    | 22WP100980 | 2024/09/02 | 2025/09/01 |
| Anechoic Chamber | Yiheng       | 9m*6m*6m | N/A        | 2024/05/12 | 2027/05/11 |
| Phone            | huawei       | Mate-40E | N/A        | N/A        | N/A        |

## 4.6 Test Configuration

To check all kinds of possible modes, the EUT was support reverse charging function, so the EUT was evaluated in reverse charge mode with appropriate client and under each charging condition as the below table:

| Test Mode No. | Description   |
|---------------|---|
| 1             | EUT(reverse charging mode) + Mobile Phone which has Less than 10 % of battery |
| 2             | EUT(reverse charging mode) + Mobile Phone which has Less than 50 % of battery |
| 3             | EUT(reverse charging mode) + Mobile Phone which has 90 % of battery           |

## 5 TEST RESULT

### 5.1 E-field

| Distance<br>(cm) | Test<br>Mode | EUT Edges  |            |            |            |            | Limit<br>(V/m) |
|------------------|--------------|------------|------------|------------|------------|------------|----------------|
|                  |              | A<br>(V/m) | B<br>(V/m) | C<br>(V/m) | D<br>(V/m) | E<br>(V/m) |                |
| 20               | 1            | 16.432     | 17.022     | 17.226     | 17.347     | 17.953     | 614            |
| 20               | 2            | 16.232     | 16.847     | 17.064     | 17.077     | 17.421     | 614            |
| 20               | 3            | 16.331     | 16.956     | 17.147     | 17.223     | 17.656     | 614            |

### 5.2 H-field

| Distance<br>(cm) | Test<br>Mode | EUT Edges  |            |            |            |            | Limit<br>(A/m) |
|------------------|--------------|------------|------------|------------|------------|------------|----------------|
|                  |              | A<br>(A/m) | B<br>(A/m) | C<br>(A/m) | D<br>(A/m) | E<br>(A/m) |                |
| 20               | 1            | 0.385      | 0.401      | 0.416      | 0.433      | 0.447      | 1.63           |
| 20               | 2            | 0.353      | 0.388      | 0.402      | 0.412      | 0.427      | 1.63           |
| 20               | 3            | 0.369      | 0.392      | 0.411      | 0.424      | 0.437      | 1.63           |

## 6 Test Conclusion

### 6.1 E-field

| Distance<br>(cm) | Worst-case<br>Test Mode | EUT Edge E | Limit<br>(V/m) | 50% Limit<br>(V/m) | Verdict |
|------------------|-------------------------|------------|----------------|--------------------|---------|
|                  |                         | (V/m)      |                |                    |         |
| 20               | 1                       | 17.953     | 614            | 307                | Pass    |

### 6.2 H-field

| Distance<br>(cm) | Worst-case<br>Test Mode | EUT Edge E | Limit<br>(A/m) | 50% Limit<br>(A/m) | Verdict |
|------------------|-------------------------|------------|----------------|--------------------|---------|
|                  |                         | (A/m)      |                |                    |         |
| 20               | 1                       | 0.447      | 1.63           | 0.815              | Pass    |

According KDB 680106 D01v04, the EUT is compliant with the 50% of the MPE limits, And this confirmed that the device comply with FCC KDB 447498 D04.

Note: Test setup photos please refer the document “BL-SH2460269-AS SAR test setup photo.pdf”.

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--