6.10 Radiated emissions (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`
Test Limit:	

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.
In the emission table above, the tighter limit applies at the band edges.
The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013 section 6.6.4

6.10.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25.4 °C	Humidity:	42.25 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode2) is recorded in the report				
Note: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported.					

6.10.2 Test Setup Diagram:

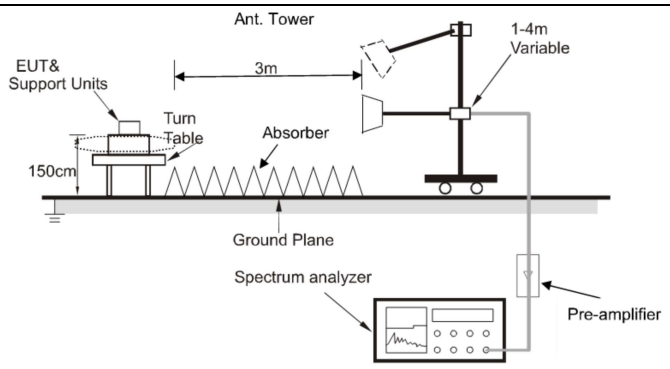

6.10.3 Test Data:

Mode2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4804.000	51.68	-7.70	43.98	74.00	-30.02	peak
2		4804.000	47.87	-7.70	40.17	54.00	-13.83	AVG
3		7206.000	46.47	0.84	47.31	74.00	-26.69	peak
4		7206.000	42.45	0.84	43.29	54.00	-10.71	AVG
5		9608.000	51.62	1.81	53.43	74.00	-20.57	peak
6	*	9608.000	47.44	1.81	49.25	54.00	-4.75	AVG

Mode2 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4804.000	52.29	-7.70	44.59	74.00	-29.41	peak
2		4804.000	48.93	-7.70	41.23	54.00	-12.77	AVG
3		7206.000	46.91	0.84	47.75	74.00	-26.25	peak
4		7206.000	41.41	0.84	42.25	54.00	-11.75	AVG
5		9608.000	53.00	1.81	54.81	74.00	-19.19	peak
6	*	9608.000	47.47	1.81	49.28	54.00	-4.72	AVG

Mode2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4882.000	53.39	-7.84	45.55	74.00	-28.45	peak
2		4882.000	49.20	-7.84	41.36	54.00	-12.64	AVG
3		7323.000	47.16	0.61	47.77	74.00	-26.23	peak
4		7323.000	41.66	0.61	42.27	54.00	-11.73	AVG
5		9764.000	51.66	2.61	54.27	74.00	-19.73	peak
6	*	9764.000	46.76	2.61	49.37	54.00	-4.63	AVG

Mode2 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4882.000	52.96	-7.84	45.12	74.00	-28.88	peak
2		4882.000	49.99	-7.84	42.15	54.00	-11.85	AVG
3		7323.000	46.62	0.61	47.23	74.00	-26.77	peak
4		7323.000	41.75	0.61	42.36	54.00	-11.64	AVG
5		9764.000	53.51	2.61	56.12	74.00	-17.88	peak
6	*	9764.000	49.53	2.61	52.14	54.00	-1.86	AVG

Mode2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4960.000	52.75	-7.73	45.02	74.00	-28.98	peak
2		4960.000	49.00	-7.73	41.27	54.00	-12.73	AVG
3		7440.000	46.83	0.78	47.61	74.00	-26.39	peak
4		7440.000	41.60	0.78	42.38	54.00	-11.62	AVG
5		9920.000	52.35	2.47	54.82	74.00	-19.18	peak
6	*	9920.000	47.67	2.47	50.14	54.00	-3.86	AVG

Mode2 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4960.000	52.39	-7.73	44.66	74.00	-29.34	peak
2		4960.000	47.88	-7.73	40.15	54.00	-13.85	AVG
3		7440.000	46.49	0.78	47.27	74.00	-26.73	peak
4		7440.000	42.60	0.78	43.38	54.00	-10.62	AVG
5		9920.000	53.41	2.47	55.88	74.00	-18.12	peak
6	*	9920.000	48.82	2.47	51.29	54.00	-2.71	AVG

Photographs of the test setup

Refer to Appendix - Test Setup Photos

Photographs of the EUT

Refer to Appendix - EUT Photos

Appendix

Appendix A: 20dB Emission Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	20db EBW [MHz]
DH5	Ant1	2402	0.957
		2441	0.960
		2480	0.945
2DH5	Ant1	2402	1.347
		2441	1.401
		2480	1.350

Test Graphs

DH5_Ant1_2402

DH5_Ant1_2441

DH5_Ant1_2480

2DH5_Ant1_2402

2DH5_Ant1_2441

2DH5_Ant1_2480

Appendix B: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	-16.35	≤30	PASS
		2441	-16.92	≤30	PASS
		2480	-16.30	≤30	PASS
2DH5	Ant1	2402	-16.42	≤20.97	PASS
		2441	-16.54	≤20.97	PASS
		2480	-16.03	≤20.97	PASS

Test Graphs

DH5_Ant1_2402

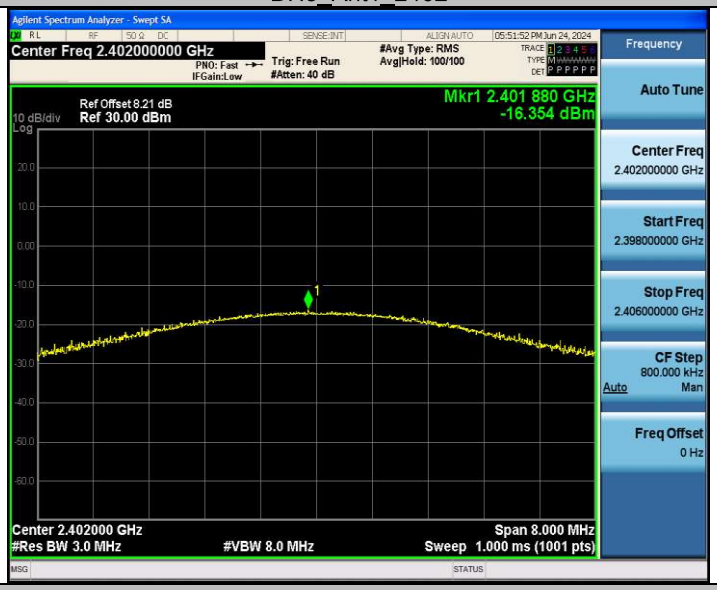

DH5_Ant1_2441

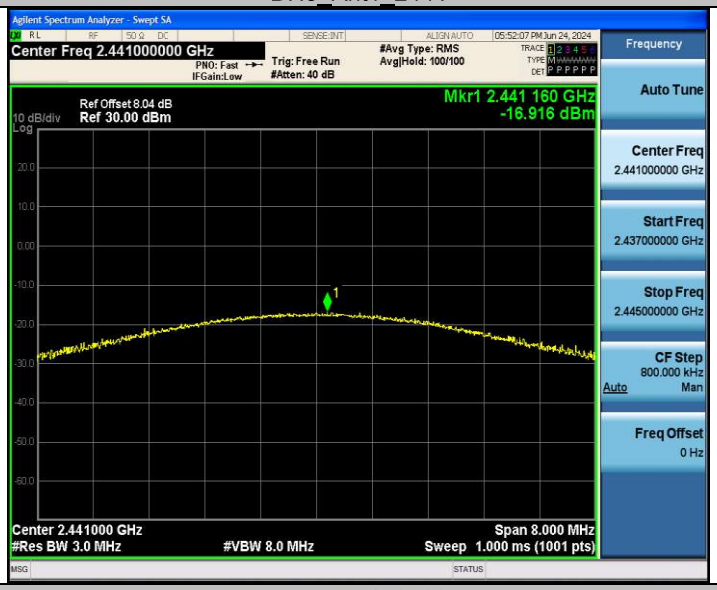

DH5_Ant1_2480

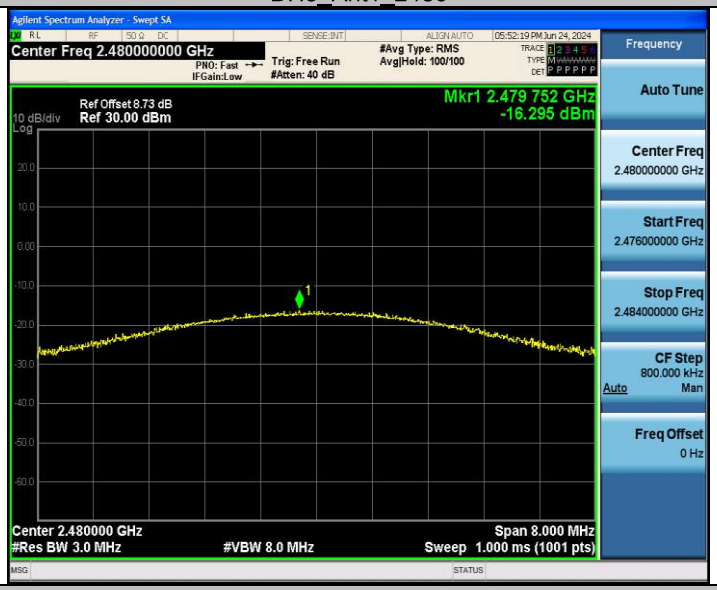

2DH5_Ant1_2402

2DH5_Ant1_2441

2DH5_Ant1_2480

Appendix C: Carrier frequency separation

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1	≥0.960	PASS
2DH5	Ant1	Hop	0.996	≥0.934	PASS

Test Graphs

DH5_Ant1_Hop

2DH5_Ant1_Hop

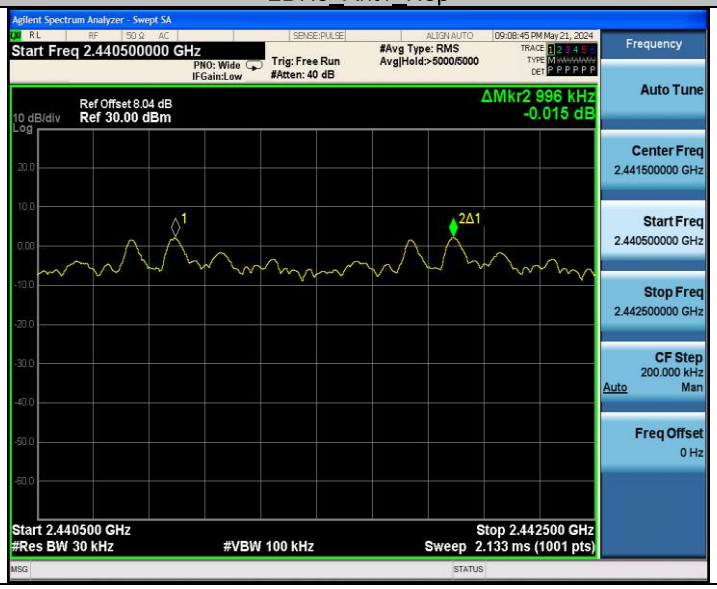

Appendix D: Time of occupancy

Test Result

Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	Hops in 31.6s [Num]	Result [s]	Limit [s]	Verdict
DH1	Ant1	Hop	0.385	316	0.122	≤0.4	PASS
DH3	Ant1	Hop	1.638	159	0.26	≤0.4	PASS
DH5	Ant1	Hop	2.885	119	0.343	≤0.4	PASS
2DH1	Ant1	Hop	0.390	317	0.124	≤0.4	PASS
2DH3	Ant1	Hop	1.643	163	0.268	≤0.4	PASS
2DH5	Ant1	Hop	2.891	119	0.344	≤0.4	PASS

Notes:

1. Period time = 0.4s * 79 = 31.6s
2. Result (Time of occupancy) = BurstWidth[ms] * Hops in 31.6s [Num]

Test Graphs

DH1_Ant1_Hop
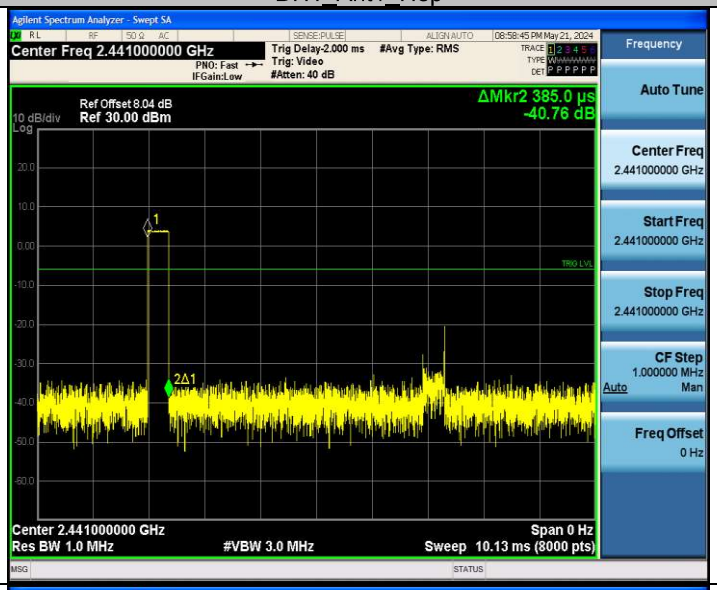
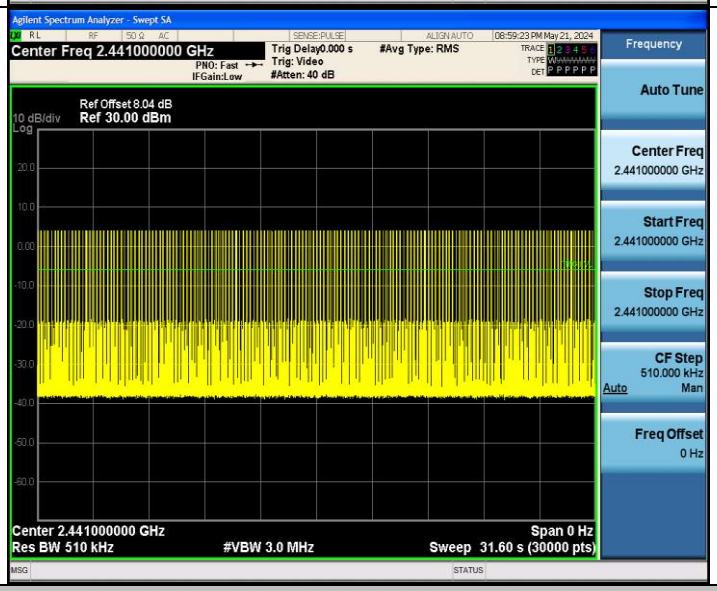
DH3_Ant1_Hop
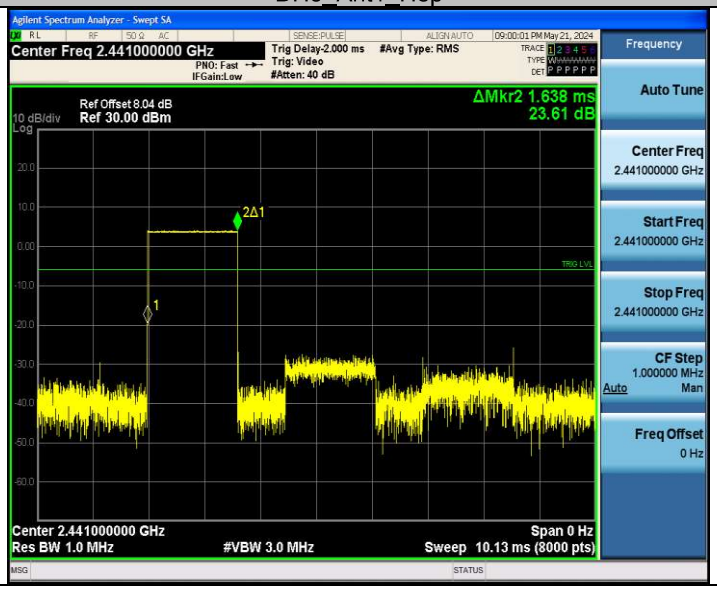

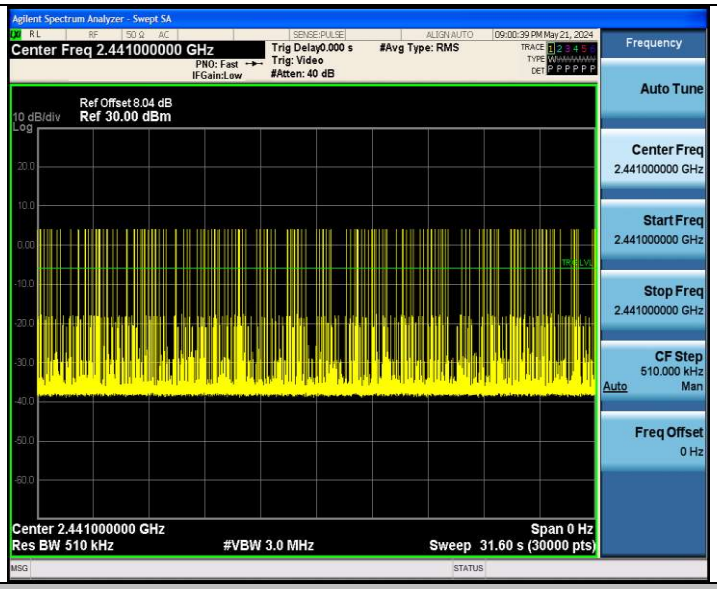

DH5_Ant1_Hop

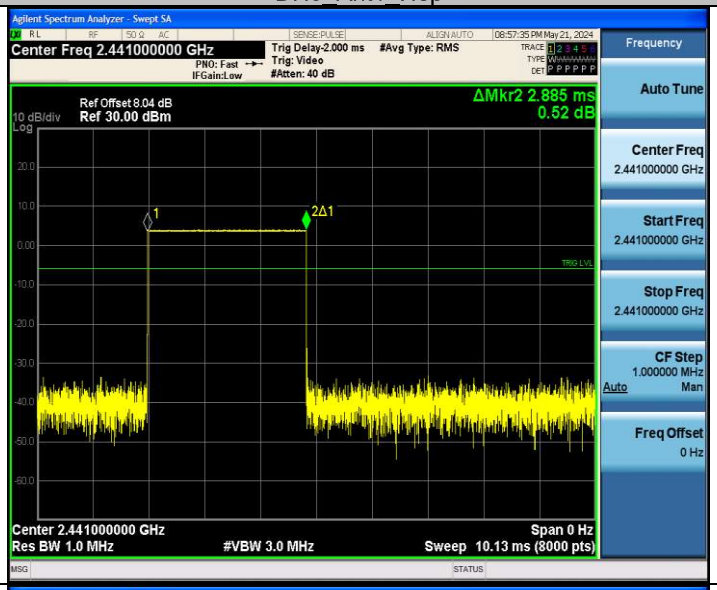

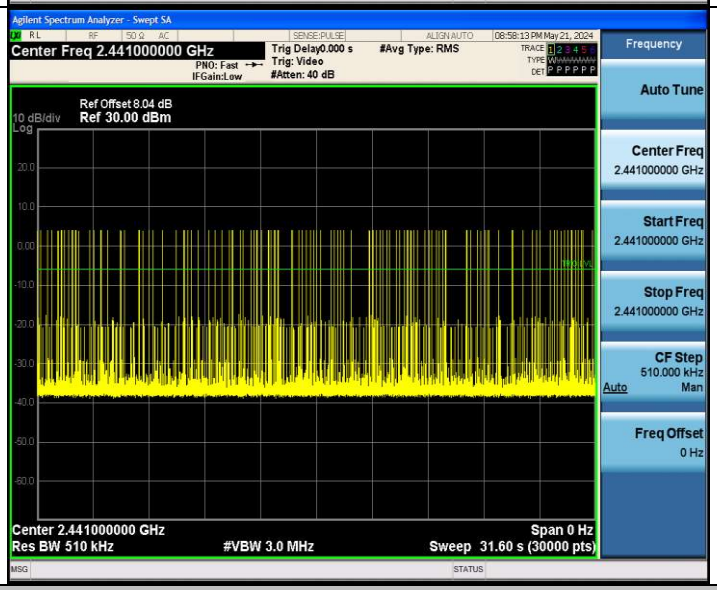

2DH1_Ant1_Hop

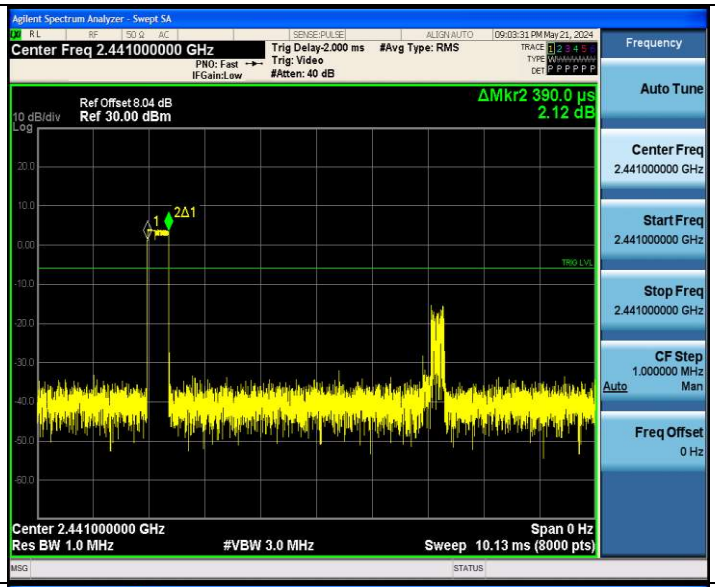

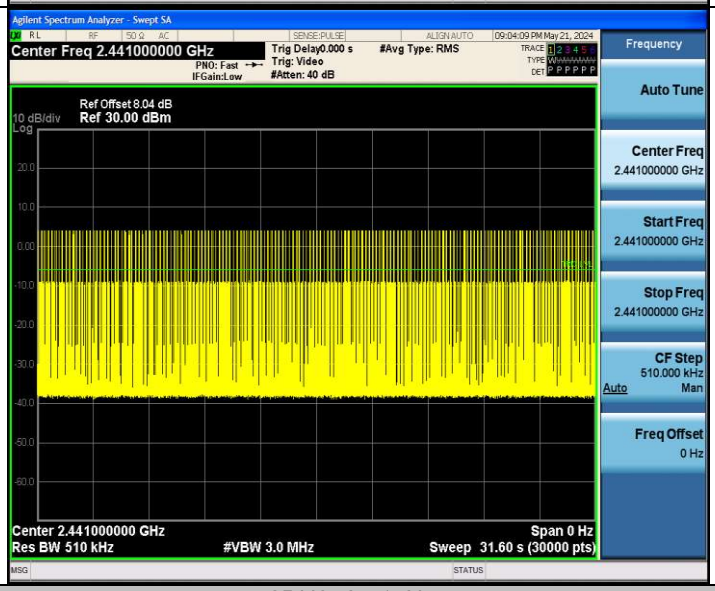

2DH3_Ant1_Hop

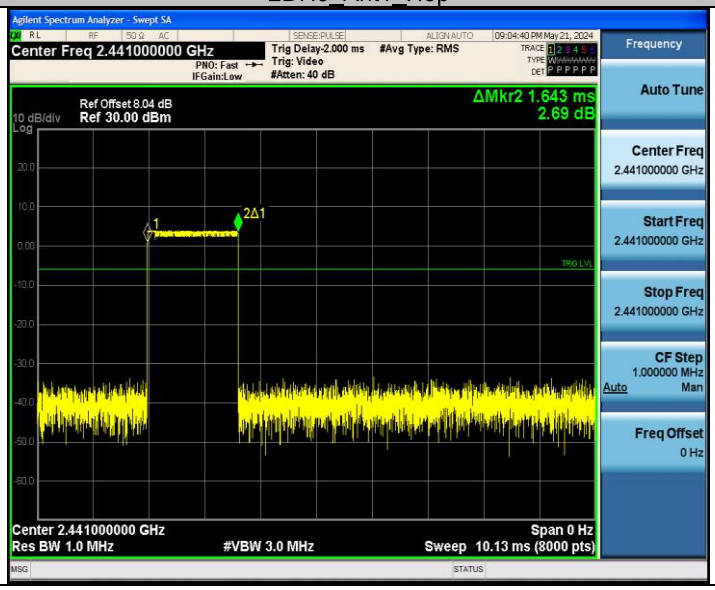

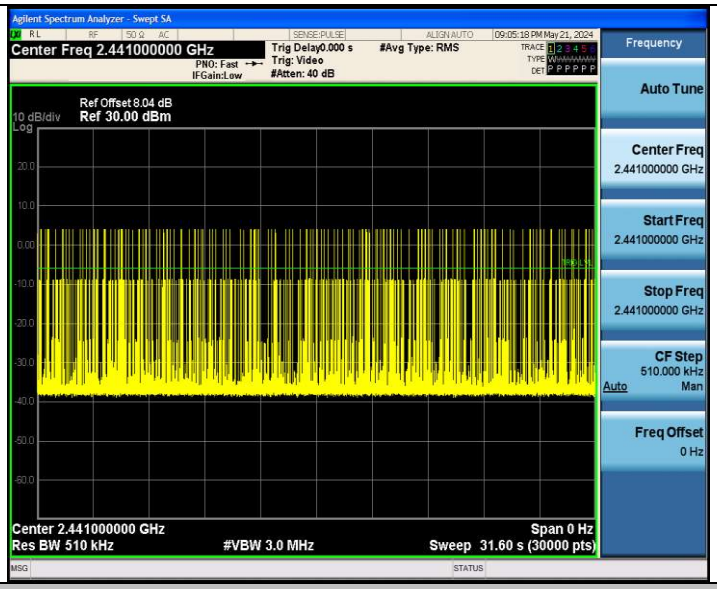

2DH5_Ant1_Hop

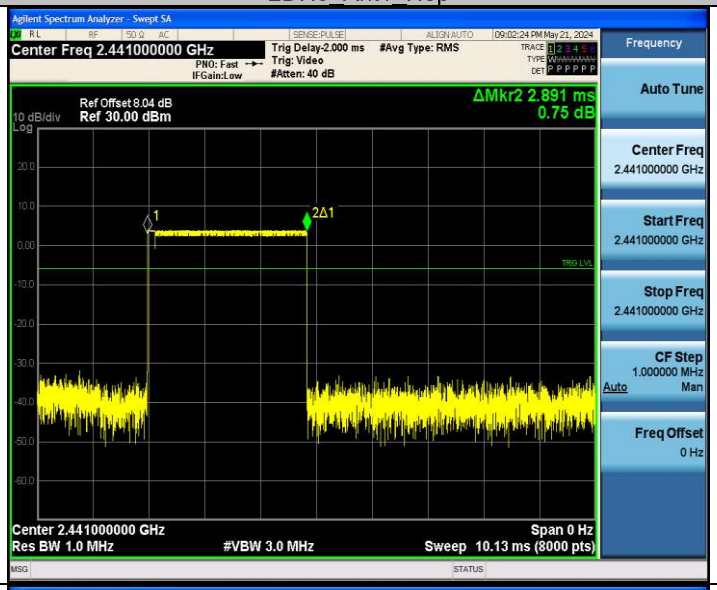

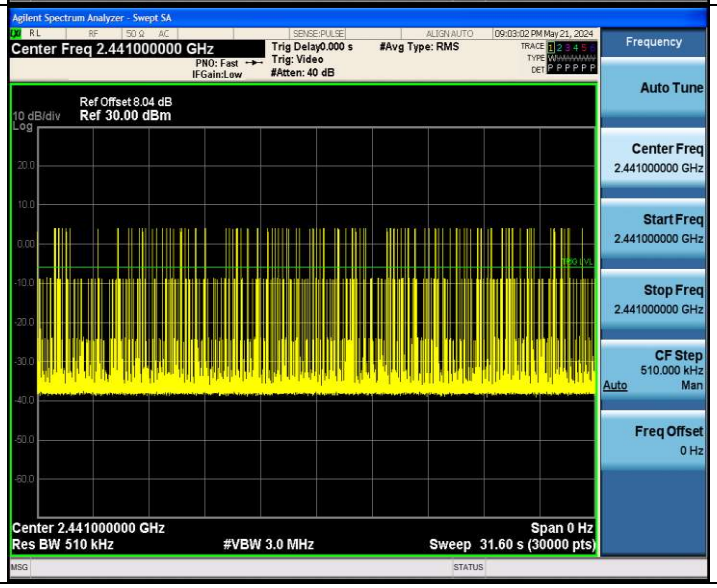

Appendix E: Number of hopping channels

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS