

TEST REPORT

Product Name: REMOTE CONTROL CAR SERIES
FCC ID: 2BBCL591-318
Trademark: JIA HENG
Model Number: 858-21, See the next page for other models.
Prepared For: SHANTOU CHENGHAI DISTRICT JIA HENG PLASTIC TOYS FACTORY
Address: QIANXI LAKE SLICE, LIANXIA TOWN, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, China
Manufacturer: SHANTOU CHENGHAI DISTRICT JIA HENG PLASTIC TOYS FACTORY
Address: QIANXI LAKE SLICE, LIANXIA TOWN, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: May. 23, 2023
Sample tested Date: May. 23, 2023 to Jun. 01, 2023
Issue Date: Jun. 01, 2023
Report No.: CTB230601029RFX
Test Standards: FCC Part15.249
ANSI C63.10:2013
Test Results: PASS
Remark: This is 2.4GHz radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

Other models:

858-22, 858-23, 858-01, 858-02, 858-03, 858-04, 858-05, 858-06, 858-07, 858-08, 858-09, 858-10, 858-11, 858-12, 858-13, 858-14, 858-15, 858-16, 858-17, 858-18, 858-19, 858-20, 858-24, 858-25, 858-26, 858-27, 858-28, 858-29, 858-30, 858-31, 858-32, 858-33, 858-34, 858-35, 858-36, 858-37, 858-38, 858-39, 858-40, 858-01A, 858-02A, 858-03A, 858-04A, 858-05A, 858-06A, 858-07A, 858-08A, 858-09A, 858-10A, 858-11A, 858-12A, 858-13A, 858-14A, 858-15A, 858-16A, 858-17A, 858-18A, 858-19A, 858-20A, 858-21A, 858-22A, 858-23A, 858-24A, 858-25A, 858-26A, 858-27A, 858-28A, 858-29A, 858-30A, 858-31A, 858-32A, 858-33A, 858-34A, 858-35A, 858-36A, 858-37A, 858-38A, 858-39A, 858-40A, 858-41, 858-42, 858-43, 858-44, 858-45, 858-46, 858-47, 858-48, 858-49, 858-50, 858-51, 858-52, 858-53, 858-54, 858-55, 858-56, 858-57, 858-58, 858-59, 858-60, 858-61, 858-62, 858-63, 858-64, 858-65, 858-66, 858-67, 858-68, 858-69, 858-70, 858-71, 858-72, 858-73, 858-74, 858-75, 858-76, 858-77, 858-78, 858-79, 858-80, 858-41A, 858-42A, 858-43A, 858-44A, 858-45A, 858-46A, 858-47A, 858-48A, 858-49A, 858-50A, 858-51A, 858-52A, 858-53A, 858-54A, 858-55A, 858-56A, 858-57A, 858-58A, 858-59A, 858-60A, 858-61A, 858-62A, 858-63A, 858-64A, 858-65A, 858-66A, 858-67A, 858-68A, 858-69A, 858-70A, 858-71A, 858-72A, 858-73A, 858-74A, 858-75A, 858-76A, 858-77A, 858-78A, 858-79A, 858-80A, 859-01, 859-02, 859-03, 859-04, 859-05, 859-06, 859-07, 859-08, 859-09, 859-10, 859-11, 859-12, 859-13, 859-14, 859-15, 859-16, 859-17, 859-18, 859-19, 859-20, 859-21, 859-22, 859-23, 859-24, 859-25, 859-26, 859-27, 859-28, 859-29, 859-30, 859-31, 859-32, 859-33, 859-34, 859-35, 859-36, 859-37, 859-38, 859-39, 98082M-FR, 859-01A, 859-02A, 859-03A, 859-04A, 859-05A, 859-06A, 859-07A, 859-08A, 859-09A, 859-10A, 859-11A, 859-12A, 859-13A, 859-14A, 859-15A, 859-16A, 859-17A, 859-18A, 859-19A, 859-20A, 859-21A, 859-22A, 859-23A, 859-24A, 859-25A, 859-26A, 859-27A, 859-28A, 859-29A, 859-30A, 859-31A, 859-32A, 859-33A, 859-34A, 859-35A, 859-36A, 859-37A, 859-38A, 859-39A, 9802M-SB, 859-50, 859-51, 859-52, 859-53, 859-54, 859-55, 859-56, 859-57, 859-58, 859-59, 859-60, 2838, 2838-1, 2838-2, 9808M-B10, 9808M-DR, 9808M-AB, 9808M-FF, 9808M-FR, 9802M-B10, 2838-CH, 2838-DR, 2838-me2, 2838-S, 2838-PL, 2838-AB, 2838-SP, 2838-MQ, 2838-DO, 2838-TF, 9802M-FF, 0909-ZZ, 927, 927A, 928A, 2834A, 333, 333A, 2833A, 2833B, 859-50A, 859-51A, 859-52A, 859-53A, 859-54A, 859-55A, 859-56A, 859-57A, 859-58A, 859-59A, 859-60A, 860-01, 860-02, 860-03, 860-04, 860-05, 860-06, 860-07, 860-08, 860-09, 860-10, 860-11, 860-12, 860-13, 860-14, 860-15, 860-16, 860-17, 860-18, 860-19, 860-20, 0909, 0909-CH, 0909-SM2, 0909-PL, 0909-SP, 0909-DO, 0909-AB, 0909-B10, 0909-D3, 860-21, 860-22, 860-23, 860-24, 860-25, 860-26, 860-27, 860-28, 860-29, 860-30, 860-31, 860-32, 860-33, 860-34, 860-35, 860-36, 860-37, 860-38, 860-39, 860-40, 860-51, 2833C, 2835A, 2835B, 2835C, 2836A, 2836B, 2836C, 2833D, 2834B, 0909-YX, G03005R, G03006R, 2831, 2839, 2832, 2832A, 2832B, H.Q239-B10, H.Q239, PT2953, T7045, T7046, 1315813

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	14
7.1 Block Diagram Of Test Setup	14
7.2 Limit	14
7.3 Test procedure	15
7.4 Test Result	16
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	21
8.1 Block Diagram Of Test Setup	21
8.2 Limit	21
8.3 Test procedure	22
8.4 Test Result	23
9. BANDWIDTH TEST	24
9.1 Block Diagram Of Test Setup	24
9.2 Limit	24
9.3 Test procedure	24
9.4 Test Result	24
10. ANTENNA REQUIREMENT	26
11. EUT PHOTOGRAPHS	27
12. EUT TEST SETUP PHOTOGRAPHS	30

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB230601029RFX	Jun. 01, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.215	20dB Bandwidth	PASS	
15.249	Fundamental & Radiated Spurious Emission Measurement	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9kHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150kHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): 858-21, See page 2 for other models
 Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: 858-21
 Hardware Version: V1.0
 Software Version: V1.0
 Operation Frequency: 2405-2475MHz
 Type of Modulation: GFSK
 Antenna installation: Internal antenna
 Antenna Gain: 0dBi
 Ratings: DC 1.5V*2 AA by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series	Note
/	/	/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer’s requirements and conditions for the intended use.

4.4 Channel List

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
1	2405	8	2422	15	2452	22	2472
2	2407	9	2425	16	2453	23	2473
3	2408	10	2427	17	2454	24	2474
4	2410	11	2428	18	2462	25	2475
5	2411	12	2435	19	2469		
6	2414	13	2445	20	2470		
7	2418	14	2451	21	2471		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting GFSK	2405MHz	2435MHz	2475MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

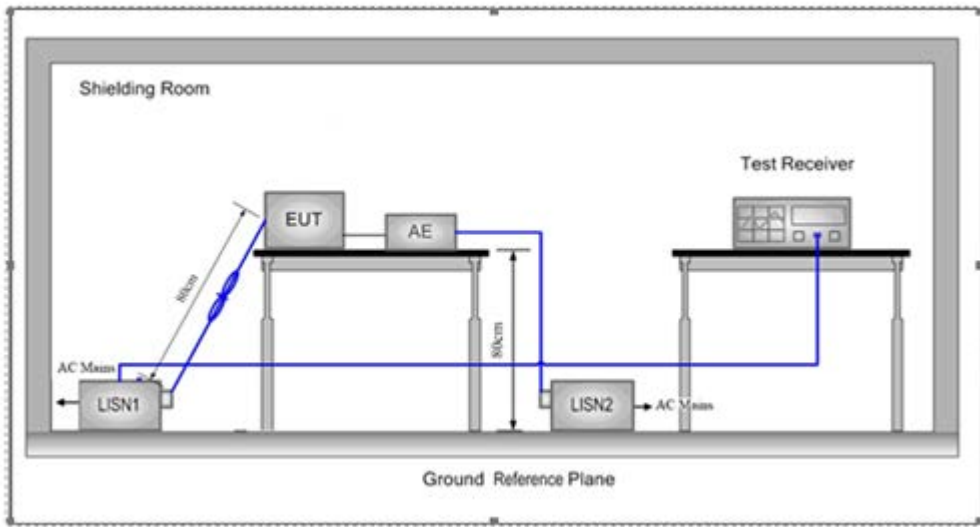

6.2 Limit

Table 4 - AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

N/A

NOTE: This EUT is powered by DC power only, this test item is not applicable.

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

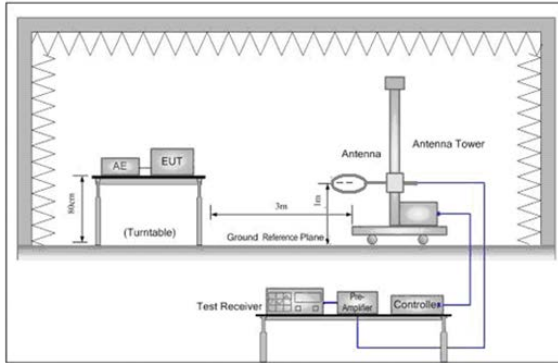


Figure 1. Below 30MHz


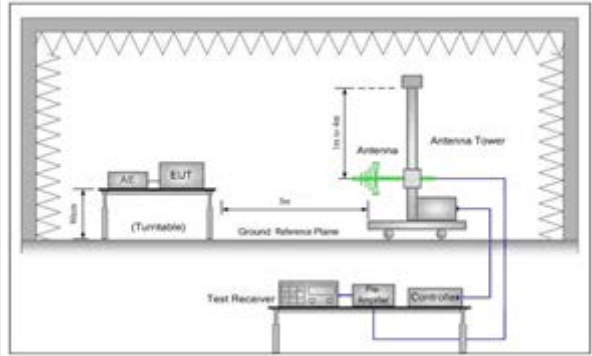


Figure 2. 30MHz to 1GHz

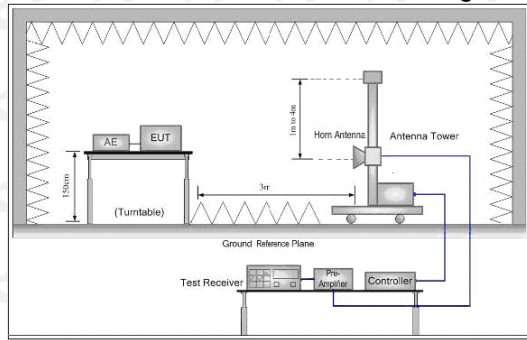

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

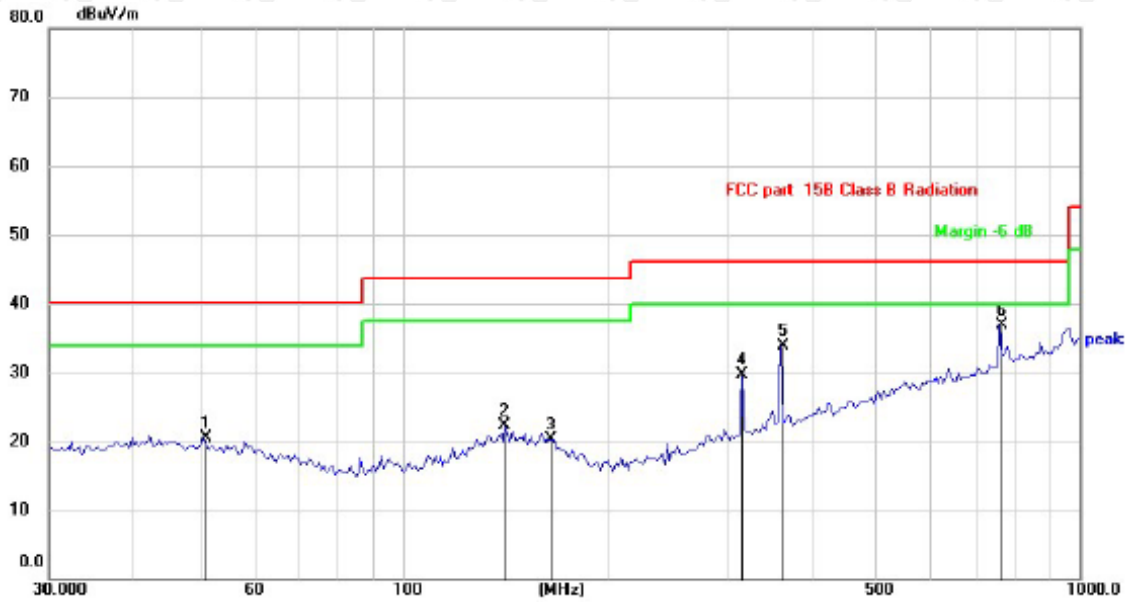

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dB/m	Over dB	Detector
1		50.7637	27.18	-6.69	20.49	40.00	-19.51	QP
2		141.5777	27.71	-5.50	22.21	43.50	-21.29	QP
3		165.7771	26.48	-6.16	20.32	43.50	-23.18	QP
4		317.1445	34.60	-4.98	29.62	46.00	-16.38	QP
5		361.7139	37.55	-3.72	33.83	46.00	-12.17	QP
6	*	762.0385	31.78	5.05	36.83	46.00	-9.17	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

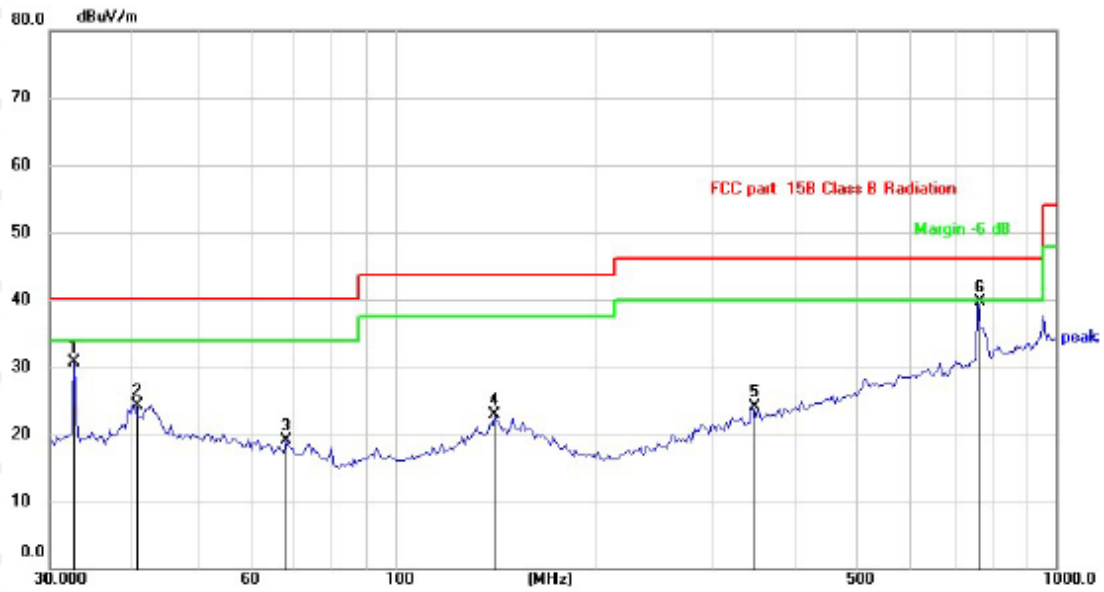

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		32.7486	37.45	-6.76	30.69	40.00	-9.31	QP
2		40.4172	30.88	-6.48	24.40	40.00	-15.60	QP
3		68.3908	28.01	-8.83	19.18	40.00	-20.82	QP
4		141.5777	28.41	-5.50	22.91	43.50	-20.59	QP
5		346.2017	28.18	-4.16	24.02	46.00	-21.98	QP
6	*	762.0385	34.59	5.05	39.64	46.00	-6.36	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

CH Low (2405MHz)
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2405	108.46	-5.84	102.62	114	-11.38	peak
2405	92.27	-5.84	86.43	94	-7.57	AVG
4810	57.37	-3.64	53.73	74	-20.27	peak
4810	47.31	-3.64	43.67	54	-10.33	AVG
7215	59.24	-0.95	58.29	74	-15.71	peak
7215	48.39	-0.95	47.44	54	-6.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2405	110.29	-5.84	104.45	114	-9.55	peak
2405	92.33	-5.84	86.49	94	-7.51	AVG
4810	58.38	-3.64	54.74	74	-19.26	peak
4810	49.05	-3.64	45.41	54	-8.59	AVG
7215	59.54	-0.95	58.59	74	-15.41	peak
7215	50.27	-0.95	49.32	54	-4.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle (2435MHz)
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2435	107.61	-5.71	101.90	114	-12.10	peak
2435	92.13	-5.71	86.42	94	-7.58	AVG
4870	55.88	-3.51	52.37	74	-21.63	peak
4870	45.96	-3.51	42.45	54	-11.55	AVG
7305	57.62	-0.82	56.80	74	-17.20	peak
7305	45.97	-0.82	45.15	54	-8.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2435	107.00	-5.71	101.29	114	-12.71	peak
2435	91.88	-5.71	86.17	94	-7.83	AVG
4870	55.12	-3.51	51.61	74	-22.39	peak
4870	46.99	-3.51	43.48	54	-10.52	AVG
7305	57.85	-0.82	57.03	74	-16.97	peak
7305	47.61	-0.82	46.79	54	-7.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH High (2475MHz)
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2475	107.88	-5.65	102.23	114	-11.77	peak
2475	92.38	-5.65	86.73	94	-7.27	AVG
4950	54.91	-3.43	51.48	74	-22.52	peak
4950	47.18	-3.43	43.75	54	-10.25	AVG
7425	56.46	-0.75	55.71	74	-18.29	peak
7425	46.11	-0.75	45.36	54	-8.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2475	105.58	-5.65	99.93	114	-14.07	peak
2475	92.31	-5.65	86.66	94	-7.34	AVG
4950	55.80	-3.43	52.37	74	-21.63	peak
4950	45.58	-3.43	42.15	54	-11.85	AVG
7425	55.97	-0.75	55.22	74	-18.78	peak
7425	45.77	-0.75	45.02	54	-8.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 9KHz to the 25 GHz.
- (2) All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
- (3) For BT above 1GHz test all modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.
- (4) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5) Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

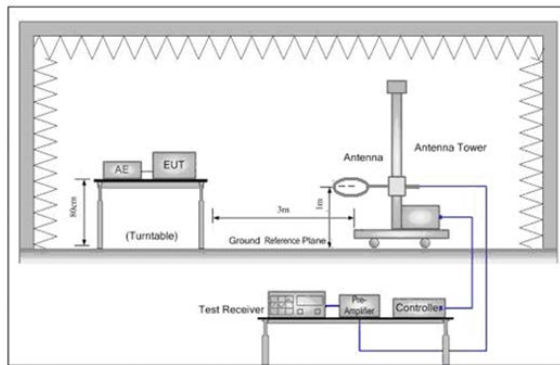


Figure 1. Below 30MHz


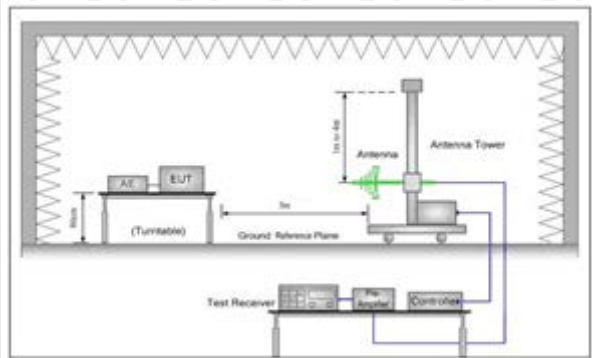


Figure 2. 30MHz to 1GHz

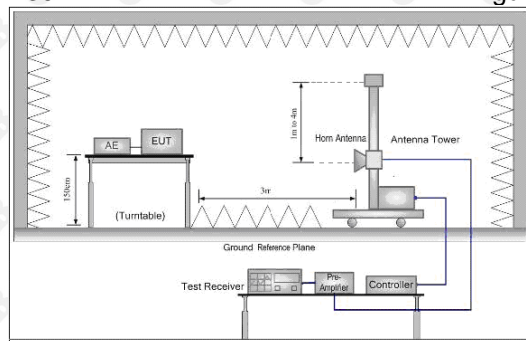

8.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

8.3 Test procedure

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Frequency	Detector	RBW	VBW	Remark
2310MHz-2400MHz	peak	1MHz	3MHz	peak
2483.5MHz-2500MHz	peak	1MHz	3MHz	peak

8.4 Test Result

 CH Low:
 Horizontal:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2309.7965	27.60	-4.32	23.28	54	-30.72	peak
2	2343.9919	27.81	-4.27	23.53	54	-30.47	peak
3	2378.166	31.33	-4.51	26.83	54	-27.17	peak
4	2389.9291	25.65	-4.89	20.76	54	-33.24	peak
5	2440.1858	28.33	-3.94	24.39	54	-29.61	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2309.9241	29.77	-4.30	25.47	54	-28.53	peak
2	2343.9822	29.33	-4.27	25.05	54	-28.95	peak
3	2378.0165	29.44	-4.45	25.00	54	-29.00	peak
4	2390.027	27.35	-4.94	22.41	54	-31.59	peak
5	2439.7582	27.36	-3.97	23.39	54	-30.61	peak

 CH High:
 Horizontal:


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.7068	30.55	-4.28	26.27	54	-27.73	peak
2	2488.6868	34.41	-4.33	30.08	54	-23.92	peak
3	2490.5284	31.73	-4.45	27.28	54	-26.72	peak
4	2493.476	30.86	-4.88	25.98	54	-28.02	peak
5	2496.0708	30.55	-3.95	26.60	54	-27.40	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2484.1721	31.06	-4.34	26.72	54	-27.28	peak
2	2488.7355	31.32	-4.28	27.04	54	-26.96	peak
3	2490.3701	31.74	-4.50	27.24	54	-26.76	peak
4	2493.3077	32.89	-4.93	27.96	54	-26.04	peak
5	2496.0662	28.89	-4.00	24.89	54	-29.11	peak

9. BANDWIDTH TEST

9.1 Block Diagram Of Test Setup

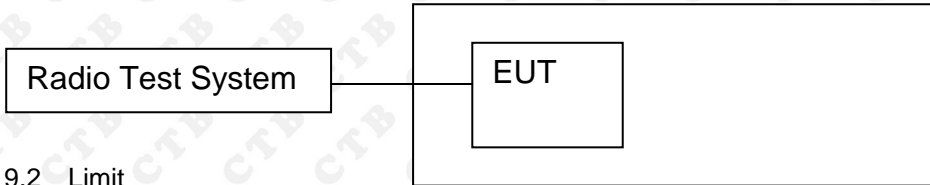

9.2 Limit

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.249	Bandwidth	2402-2483.5	PASS

9.3 Test procedure

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

9.4 Test Result

Test Mode	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	Low channel	1.195	PASS
	Mid channel	1.192	PASS
	High channel	1.199	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.405000000 GHz</p> <p>Center Freq: 2.405000000 GHz</p> <p>Trig: Free Run</p> <p>#IF Gain: Low</p> <p>#Atten: 30 dB</p> <p>Avg: Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.71 dB</p> <p>Ref: 26.71 dBm</p> <p>Center 2.405 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1092 MHz</p> <p>Total Power 3.82 dBm</p> <p>Transmit Freq Error -12.905 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.195 MHz</p> <p>x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.435000000 GHz</p> <p>Center Freq: 2.435000000 GHz</p> <p>Trig: Free Run</p> <p>#IF Gain: Low</p> <p>#Atten: 30 dB</p> <p>Avg: Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.71 dB</p> <p>Ref: 26.71 dBm</p> <p>Center 2.435 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1138 MHz</p> <p>Total Power 4.12 dBm</p> <p>Transmit Freq Error -11.659 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.192 MHz</p> <p>x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.475000000 GHz</p> <p>Center Freq: 2.475000000 GHz</p> <p>Trig: Free Run</p> <p>#IF Gain: Low</p> <p>#Atten: 30 dB</p> <p>Avg: Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Center 2.475 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1200 MHz</p> <p>Total Power 3.86 dBm</p> <p>Transmit Freq Error -9.770 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.199 MHz</p> <p>x dB -20.00 dB</p>

10. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal antenna. The best case gain of the antenna is 0dBi.

11. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2



EUT Photo 3



EUT Photo 4



EUT Photo 5




EUT Photo 6



12. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions

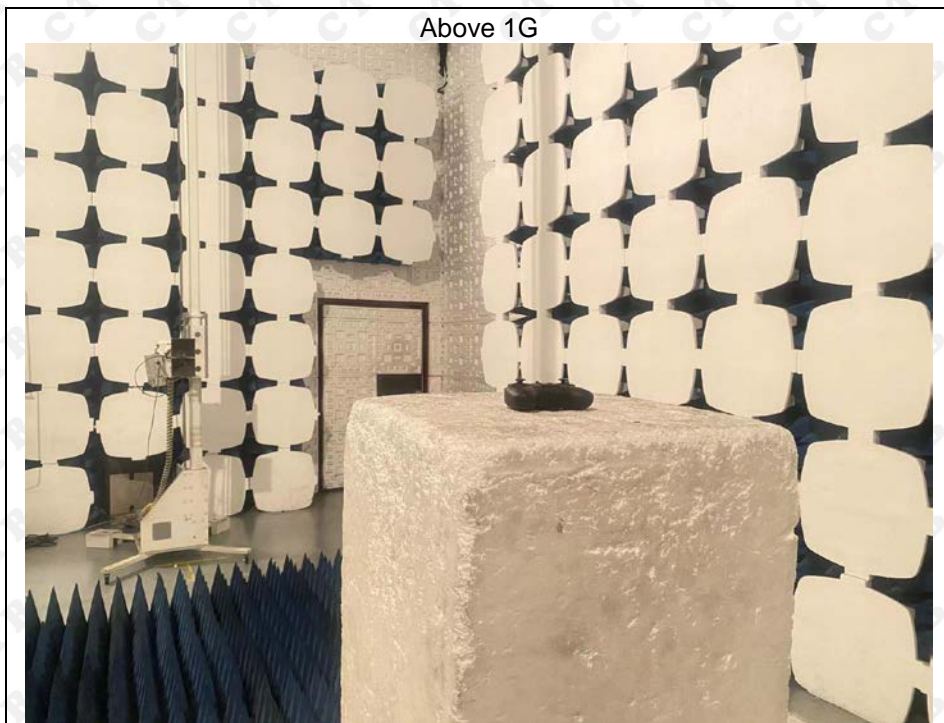

***** END OF REPORT *****