



**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

*OF*

**Wireless Charger**

**Model No.: PW0062**

**FCC ID: 2BBEH-PW0062**

**Report No.: E04A23070215F00401**

**Issue Date: August 16, 2023**

*Prepared for*

**Jiangxi Kingtron Technology Co., Ltd.**

**Luoxin Tech. Industrial Park, 2nd District, Quannan Industrial Park,  
Ganzhou, Jiangxi, China, 341800**

*Prepared by*

**Guangdong Global Testing Technology Co., Ltd.**

**Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan  
Lake Park, Dongguan city, Guangdong, People's Republic of China,  
523808**

**This report shall not be reproduced, except in full, without the written approval of  
Guangdong Global Testing Technology Co., Ltd.**

**VERIFICATION OF COMPLIANCE**

Applicant:	Jiangxi Kingtron Technology Co., Ltd. Luoxin Tech. Industrial Park, 2nd District, Quannan Industrial Park, Ganzhou, Jiangxi, China, 341800
Manufacturer:	Jiangxi Kingtron Technology Co., Ltd. Luoxin Tech. Industrial Park, 2nd District, Quannan Industrial Park, Ganzhou, Jiangxi, China, 341800
Factory:	Jiangxi Kingtron Technology Co., Ltd. Luoxin Tech. Industrial Park, 2nd District, Quannan Industrial Park, Ganzhou, Jiangxi, China, 341800
Product Description:	Wireless Charger
Trade Mark:	/
Model Number:	PW0062

**We hereby certify that:**

The above equipment was tested by Guangdong Global Testing Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.209(2022).

Date of Test : July 13, 2023 to August 15, 2023

Prepared by : \_\_\_\_\_



Reviewer & Authorized Signer : \_\_\_\_\_

Shawn Wen/ General Manager

## Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	E04A23070215F00401

## Table of Contents

<b>1 GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION .....	4
1.2 RELATED SUBMITTAL(S) / GRANT(S) .....	5
1.3 TEST METHODOLOGY .....	5
1.4 SPECIAL ACCESSORIES .....	5
1.5 EQUIPMENT MODIFICATIONS .....	5
1.6 TEST FACILITY.....	5
<b>2 SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1 EUT CONFIGURATION .....	6
2.2 EUT EXERCISE .....	6
2.3 TEST PROCEDURE .....	6
2.4 CONFIGURATION OF TESTED SYSTEM.....	7
<b>3 SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4 TEST SYSTEM UNCERTAINTY.....</b>	<b>8</b>
<b>5 CONDUCTED EMISSIONS TEST .....</b>	<b>9</b>
5.1 MEASUREMENT PROCEDURE .....	9
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	9
5.3 MEASUREMENT EQUIPMENT USED.....	9
5.4 CONDUCTED EMISSION LIMIT .....	9
5.5 MEASUREMENT RESULT .....	10
5.6 CONDUCTED MEASUREMENT PHOTO.....	13
<b>6 RADIATED EMISSION TEST.....</b>	<b>14</b>
6.1 MEASUREMENT PROCEDURE .....	14
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	14
6.3 MEASUREMENT EQUIPMENT USED.....	15
6.4 RADIATED EMISSION LIMIT .....	15
6.5 MEASUREMENT RESULT .....	17
6.6 RADIATED MEASUREMENT PHOTOS.....	23
<b>7 20DB BANDWIDTH.....</b>	<b>24</b>
7.1 20DB BANDWIDTH LIMIT .....	24
7.2 TEST INSTRUMENTS.....	24
7.3 TEST PROCEDURE .....	24
7.4 TEST SETUP.....	24
7.5 TEST RESULT .....	24
<b>8 ANTENNA APPLICATION .....</b>	<b>27</b>
8.1 ANTENNA REQUIREMENT .....	27
8.2 RESULT .....	27

## 1 General Information

### 1.1 Product Description

Characteristics	Description
Product Name	Wireless Charger
Model number	PW0062
Operation Mode	Wireless Charging
Input Rating	USB-C:5V===3A/9V===2A/12V===2.5A
Power Supply	DC 5V/9V/12V
Operating Frequency	110-205KHz for phone 325.8KHz for Watch 110-205KHz for Earphone
Wireless Charging Power	10W(Max) for phone charging 2.5W for Watch charging 3W for Earphone charging
Modulation Technique	FSK for phone charging ASK for Watch charging ASK for Earphone charging
Antenna Type	Coil Antenna
Sample receipt date	July 10, 2023

## 1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: 2BBEH-PW0062 filing to comply with the FCC Part 15, Subpart C Rules.

## 1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

## 1.4 Special Accessories

Not available for this EUT intended for grant.

## 1.5 Equipment Modifications

Not available for this EUT intended for grant.

## 1.6 Test Facility

Site Description  
Name of Firm : Guangdong Global Testing Technology Co., Ltd.  
Site Location : Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park, Dongguan city, Guangdong, People' s Republic of China, 523808

## 2 System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions


The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

## 2.4 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**

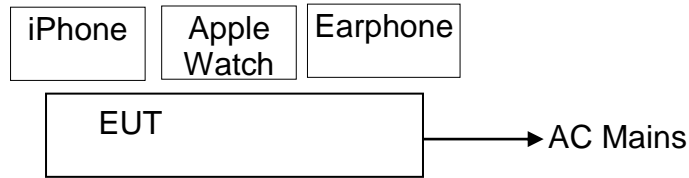

**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	Wireless Charger	/	PW0062	2BBEH-PW0062	<b>EUT</b>
2.	Adapter	/	580245A087	N/A	<b>Support Equipment</b>
3.	iphone	Apple	A2176	N/A	<b>Support Equipment</b>
4.	Earphone	momax	X5	N/A	<b>Support Equipment</b>
5.	Apple Watch	Apple	A1859	N/A	<b>Support Equipment</b>

**Note:**

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

## 3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.209	Radiated Emission	Compliant
§2.1049	20dB Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant



## 4 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor ( $k=2$ ), and measurement Uncertainty for a level of Confidence of 95%

## 5 Conducted Emissions Test

### 5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 5.2 Test SET-UP (Block Diagram of Configuration)

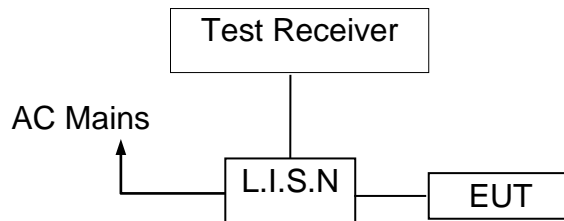

### 5.3 Measurement Equipment Used

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Shielded Room	CHENG YU	8m*5m*4m	N/A	2022/10/29	2025/10/28
EMI Test Receiver	Rohde & Schwarz	ESR3	102647	2022/12/03	2023/12/02
LISN/AMN	Rohde & Schwarz	ENV216	102843	2022/10/08	2023/10/07
NNLK 8129 RC	Schwarzbeck	NNLK 8129 RC	5046	2023/03/30	2024/03/29
Test Software	Farad	EZ-EMC (Ver. EMC-con-3A1 1+)	N/A	N/A	N/A

### 5.4 Conducted Emission Limit

#### Conducted Emission

#### Frequency(MHz)

#### Quasi-peak

#### Average

0.15-0.5

66-56

56-46

0.5-5.0

56

46

5.0-30.0

60

50

**Note:** 1. The lower limit shall apply at the transition frequencies


2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

## 5.5 Measurement Result

Operation Mode:	TX	Test Date :	2023/07/13
Frequency Range:	0.15MHz~30MHz	Temperature :	26°C
Test Result:	PASS	Humidity :	54.3 %RH
Test By:	Aiden		


We pretested modes (Wireless Charging(10W+3W+2.5W), Wireless Charging (7.5W+3W+2.5W),Wireless Charging(5W+3W+2.5W)) for EUT. The worst test data see follow the table.

**Test mode: Wireless Charging 10W+3W+2.5W**

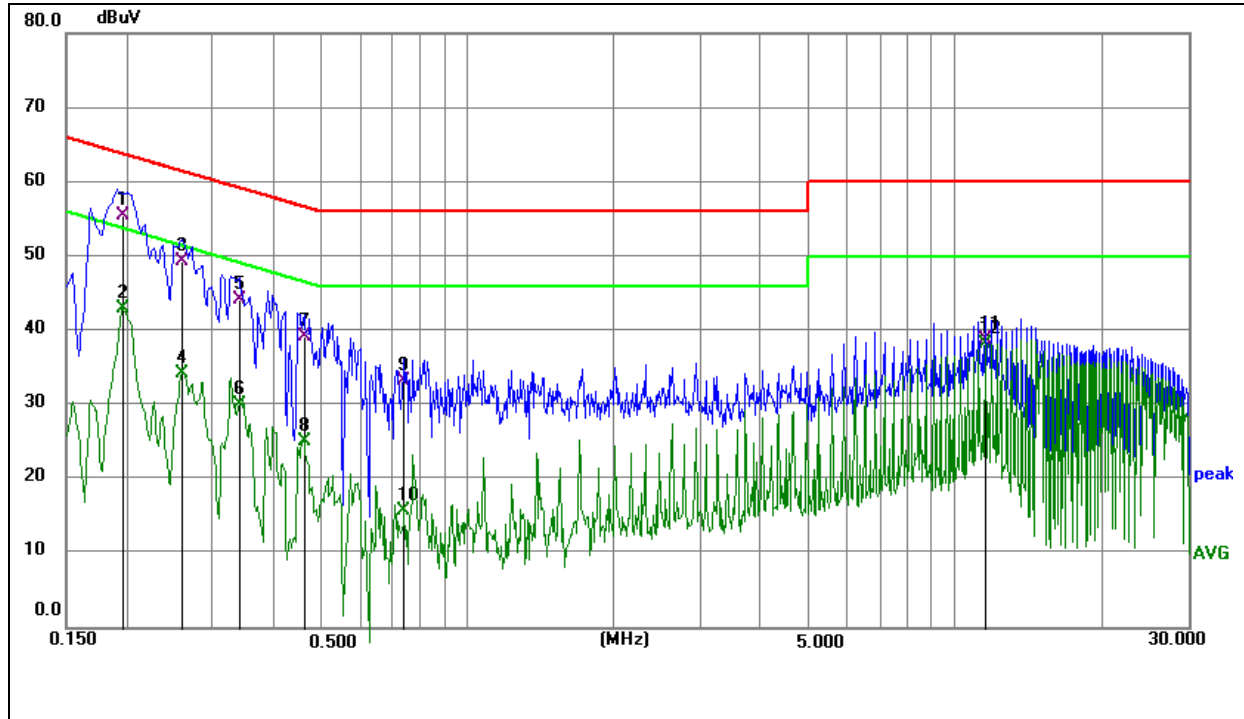

<b>Limit:</b>	<b>FCC Part 15 C Conduction(QP)</b>	<b>Phase:</b>	<b>L1</b>
<b>EUT:</b>	<b>Wireless Charger</b>	<b>Test Time:</b>	<b>2023/7/13</b>
<b>M/N.:</b>	<b>PW0062</b>	<b>Power Rating:</b>	<b>AC120V/60Hz</b>
<b>Mode:</b>	<b>Wireless Charging 10W+3W+2.5W</b>	<b>Test Engineer:</b>	<b>Aiden</b>

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1965	45.55	9.95	55.50	63.76	-8.26	QP	
2	0.1965	33.03	9.95	42.98	53.76	-10.78	AVG	
3	0.2580	39.49	9.81	49.30	61.50	-12.20	QP	
4	0.2580	24.35	9.81	34.16	51.50	-17.34	AVG	
5	0.3390	34.26	9.94	44.20	59.23	-15.03	QP	
6	0.3390	20.19	9.94	30.13	49.23	-19.10	AVG	
7	0.4605	29.37	9.83	39.20	56.68	-17.48	QP	
8	0.4605	15.35	9.83	25.18	46.68	-21.50	AVG	
9	0.7395	23.33	9.97	33.30	56.00	-22.70	QP	
10	0.7395	5.81	9.97	15.78	46.00	-30.22	AVG	
11	11.5080	27.81	10.99	38.80	60.00	-21.20	QP	
12	11.5080	27.26	10.99	38.25	50.00	-11.75	AVG	

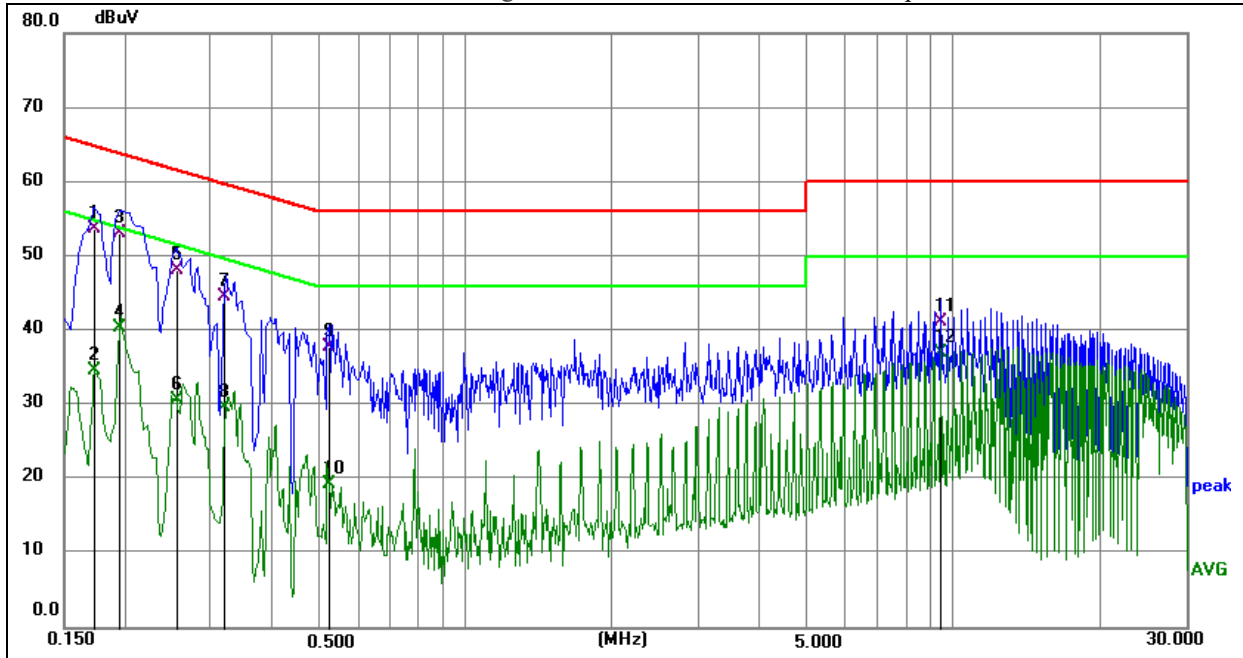

<b>Limit:</b>	<b>FCC Part 15 C Conduction(QP)</b>	<b>Phase:</b>	<b>L1</b>
<b>EUT:</b>	<b>Wireless Charger</b>	<b>Test Time:</b>	<b>2023/7/13</b>
<b>M/N.:</b>	<b>PW0062</b>	<b>Power Rating:</b>	<b>AC120V/60Hz</b>
<b>Mode:</b>	<b>Wireless Charging 10W+3W+2.5W</b>	<b>Test Engineer:</b>	<b>Aiden</b>

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1725	43.76	9.94	53.70	64.84	-11.14	QP	
2	0.1725	24.73	9.94	34.67	54.84	-20.17	AVG	
3	0.1945	43.16	9.94	53.10	63.84	-10.74	QP	
4	0.1945	30.41	9.94	40.35	53.84	-13.49	AVG	
5	0.2535	38.19	9.91	48.10	61.64	-13.54	QP	
6	0.2535	20.70	9.91	30.61	51.64	-21.03	AVG	
7	0.3209	34.61	9.89	44.50	59.68	-15.18	QP	
8	0.3209	19.78	9.89	29.67	49.68	-20.01	AVG	
9	0.5235	27.82	9.98	37.80	56.00	-18.20	QP	
10	0.5235	9.36	9.98	19.34	46.00	-26.66	AVG	
11	9.4335	30.33	10.87	41.20	60.00	-18.80	QP	
12	9.4335	26.11	10.87	36.98	50.00	-13.02	AVG	

### 5.6 Conducted Measurement Photo




## 6 Radiated Emission Test

### 6.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

### 6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

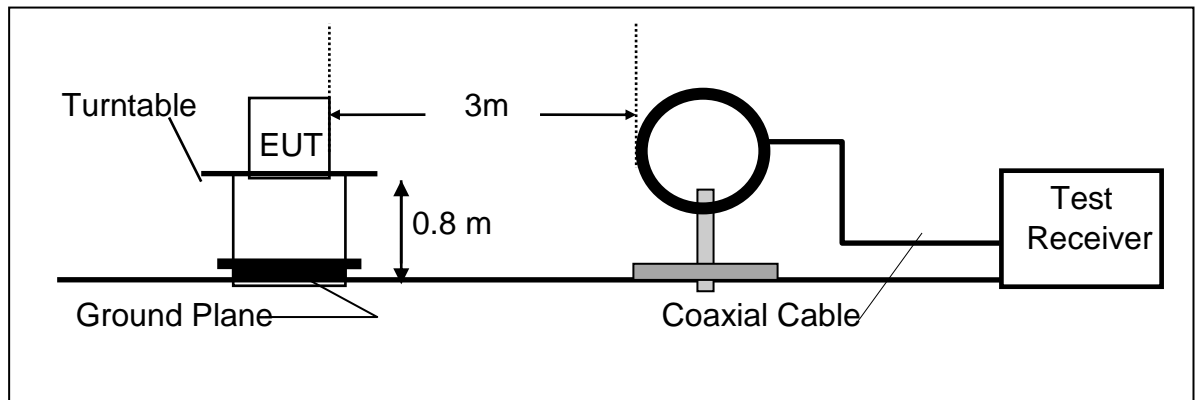

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

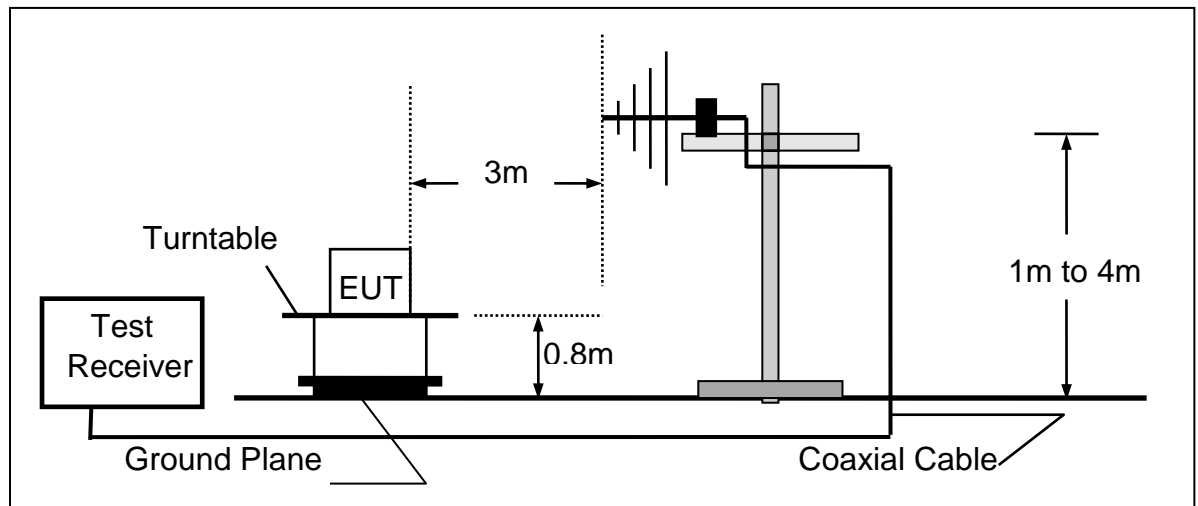

### 6.3 Measurement Equipment Used

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2146	2022/08/30	2025/08/29
EMI Test Receiver	Rohde & Schwarz	ESCI3	101409	2022/10/08	2023/10/07
Spectrum Analyzer	KEYSIGHT	N9020A	MY51283932	2022/10/08	2023/10/07
Pre-Amplifier	HzEMC	HPA-9K0130	HYP A21001	2022/10/29	2023/10/28
Biconilog Antenna	Schwarzbeck	VULB 9168	01315	2022/10/10	2025/10/09
Biconilog Antenna	ETS	3142E	00243646	2022/03/23	2025/03/22
Loop Antenna	ETS	6502	243668	2022/03/30	2025/03/29
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE)	N/A	N/A	N/A

### 6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500




## 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
  2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
  3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$  15.205, and the emissions located in restricted bands also comply with 15.209 limit.


### 6.5 Measurement Result

We pretested modes (Wireless Charging(10W+3W+2.5W), Wireless Charging(7.5W +3W +2.5W),Wireless Charging(5W+3W+2.5W)) for EUT. The worst mode (Wireless Charging(10W +3W+2.5W))test data see follow the table.

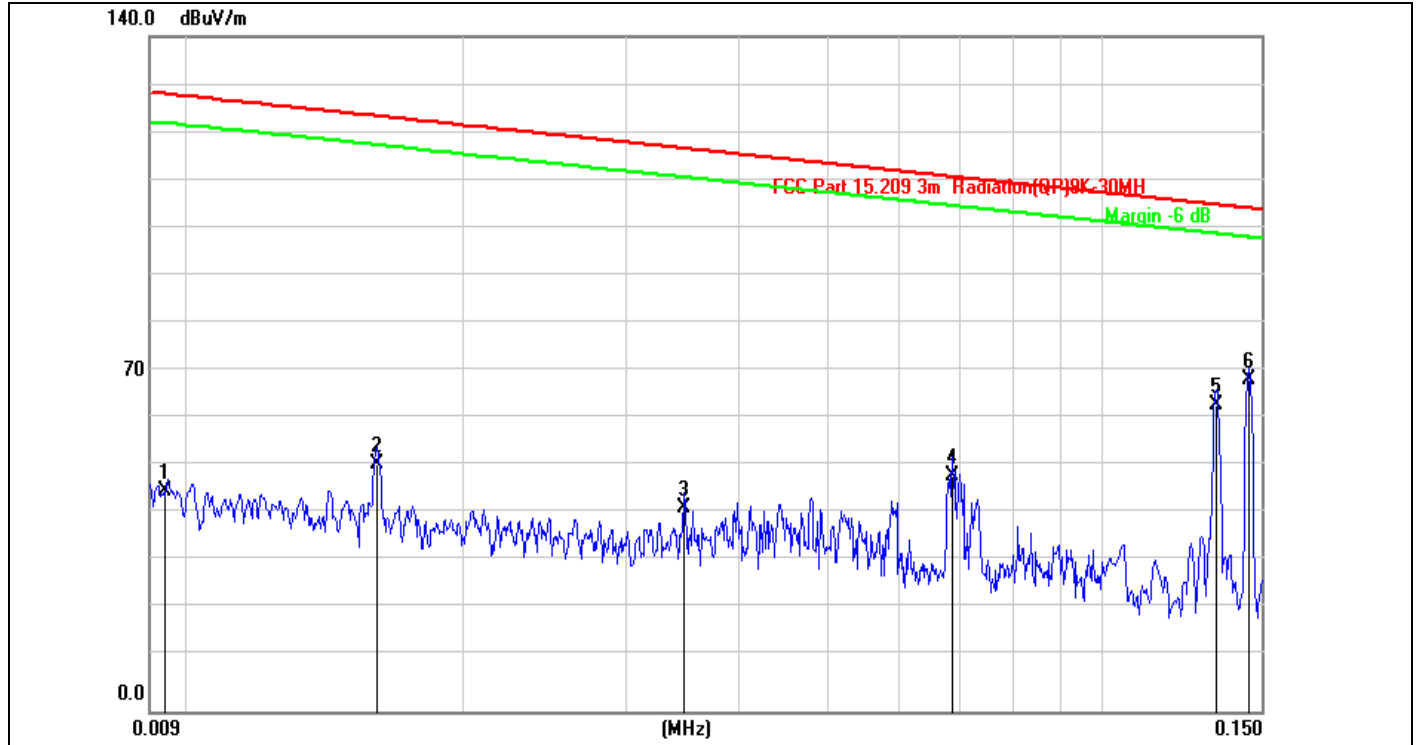

<b>Limit:</b>	FCC Part 15C 3m Radiation(QP)	<b>Antenna:</b>	Horizontal
<b>EUT:</b>	Wireless Charger	<b>Temperature:</b>	24.3°C
<b>M/N.:</b>	PW0062	<b>Humidity:</b>	53.2%RH
<b>Mode:</b>	Wireless Charging 10W+3W+2.5W	<b>Power Rating:</b>	AC 120V/60Hz
<b>Test Engineer:</b>	Milo	<b>Test Time:</b>	2023/7/14


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0094	25.42	20.43	45.85	128.12	-82.27	QP	100	236	
2	0.0160	31.01	20.35	51.36	123.51	-72.15	QP	100	254	
3	0.0348	22.08	20.09	42.17	116.76	-74.59	QP	100	120	
4	0.0686	29.30	19.66	48.96	110.87	-61.91	QP	100	103	
5	0.1337	43.92	19.64	63.56	105.08	-41.52	QP	100	271	
6 *	0.1450	49.10	19.64	68.74	104.37	-35.63	QP	100	152	

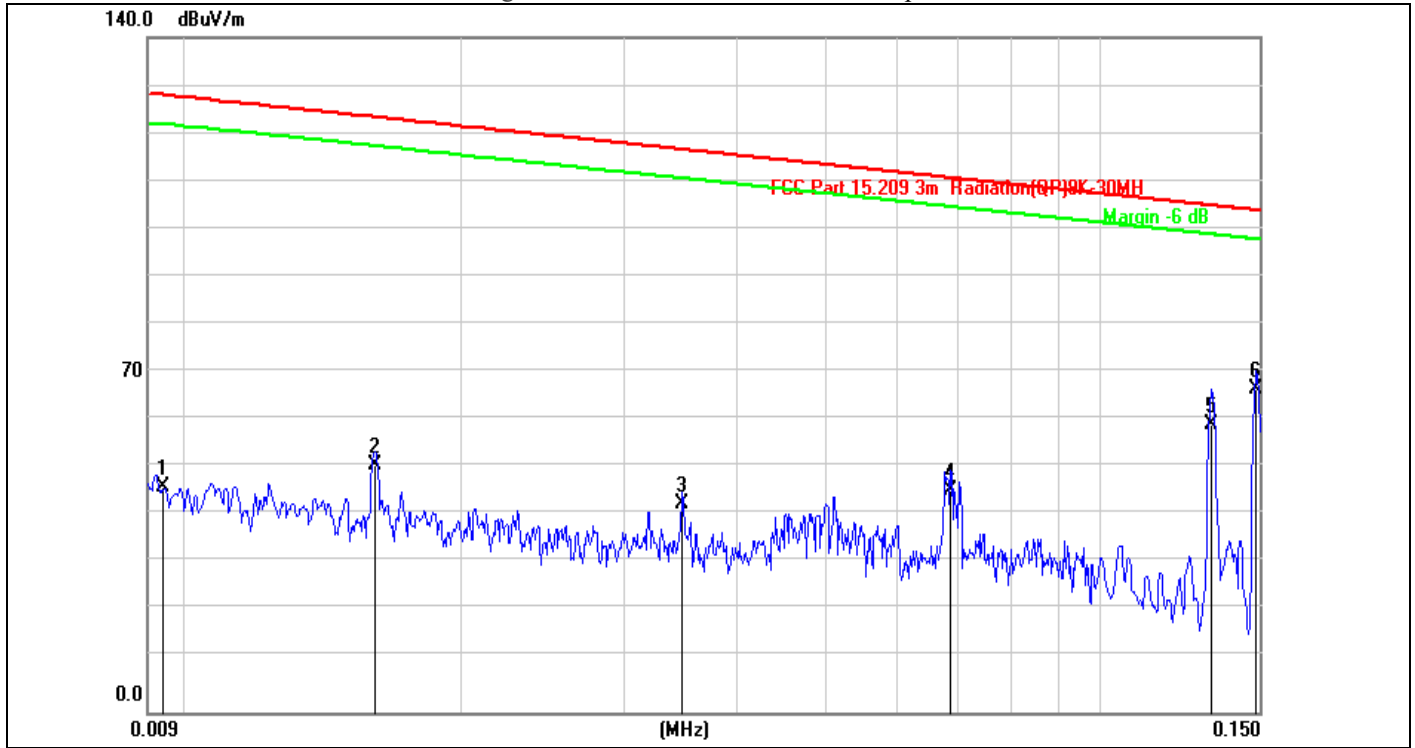

<b>Limit:</b>	FCC Part 15C 3m Radiation(QP)	<b>Antenna:</b>	Vertical
<b>EUT:</b>	Wireless Charger	<b>Temperature:</b>	24.3°C
<b>M/N.:</b>	PW0062	<b>Humidity:</b>	53.2%RH
<b>Mode:</b>	Wireless Charging 10W+3W+2.5W	<b>Power Rating:</b>	AC 120V/60Hz
<b>Test Engineer:</b>	Milo	<b>Test Time:</b>	2023/7/14


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0092	26.42	20.43	46.85	128.31	-81.46	QP	100	236	
2	0.0160	30.89	20.35	51.24	123.51	-72.27	QP	100	254	
3	0.0348	23.11	20.09	43.20	116.76	-73.56	QP	100	120	
4	0.0686	26.32	19.66	45.98	110.87	-64.89	QP	100	103	
5	0.1329	40.21	19.64	59.85	105.13	-45.28	QP	100	271	
6 *	0.1487	47.32	19.64	66.96	104.15	-37.19	QP	100	152	

- Note:**
- (1) All Readings are Peak Value.
  - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
  - (4) EUT lying on the table position is the worst case result in the report.

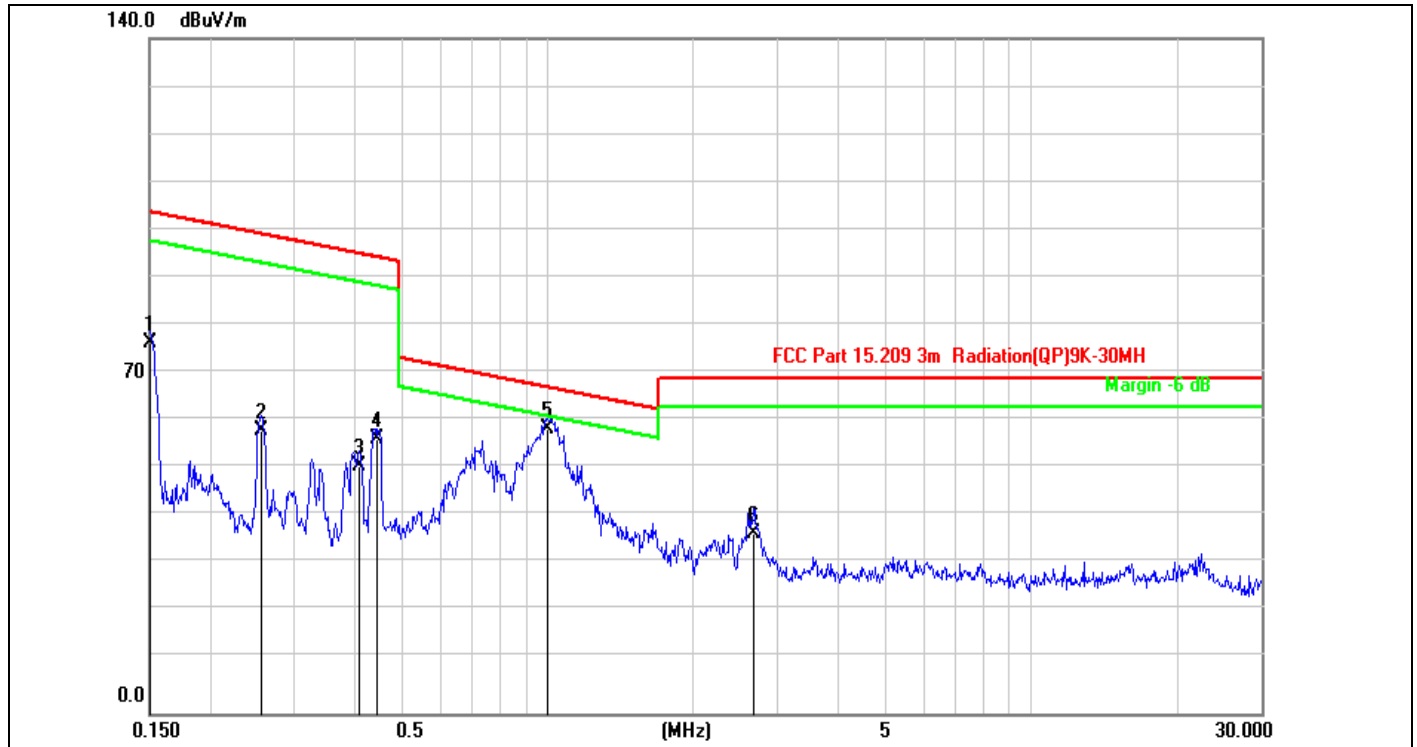

<b>Limit:</b>	FCC Part 15C 3m Radiation(QP)	<b>Antenna:</b>	Horizontal
<b>EUT:</b>	Wireless Charger	<b>Temperature:</b>	24.3°C
<b>M/N.:</b>	PW0062	<b>Humidity:</b>	53.2%RH
<b>Mode:</b>	Wireless Charging 10W+3W+2.5W	<b>Power Rating:</b>	AC 120V/60Hz
<b>Test Engineer:</b>	Milo	<b>Test Time:</b>	2023/7/14

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.1500	57.25	19.64	76.89	104.08	-27.19	QP	100	236	
2	0.2548	39.11	19.63	58.74	99.48	-40.74	QP	100	254	
3	0.4083	31.81	19.61	51.42	95.38	-43.96	QP	100	120	
4	0.4444	37.36	19.60	56.96	94.65	-37.69	QP	100	103	
5 *	0.9997	39.52	19.44	58.96	67.62	-8.66	QP	100	271	
6	2.6641	17.85	19.59	37.44	69.50	-32.06	QP	100	152	

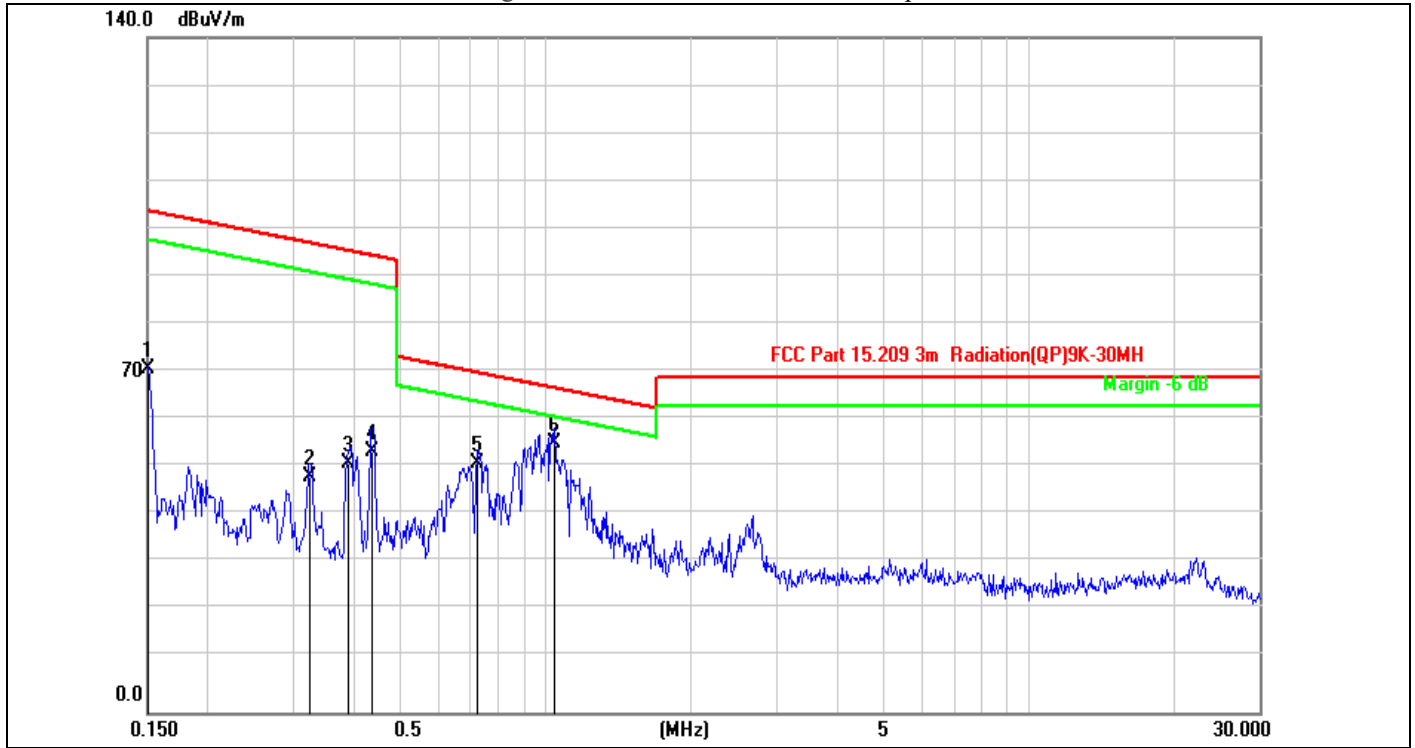


<b>Limit:</b>	FCC Part 15C 3m Radiation(QP)	<b>Antenna:</b>	Vertical
<b>EUT:</b>	Wireless Charger	<b>Temperature:</b>	24.3°C
<b>M/N.:</b>	PW0062	<b>Humidity:</b>	53.2%RH
<b>Mode:</b>	Wireless Charging 10W+3W+2.5W	<b>Power Rating:</b>	AC 120V/60Hz
<b>Test Engineer:</b>	Milo	<b>Test Time:</b>	2023/7/14

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.1500	51.61	19.64	71.25	104.08	-32.83	QP	100	236	
2	0.3251	29.34	19.62	48.96	97.36	-48.40	QP	100	254	
3	0.3893	31.86	19.61	51.47	95.80	-44.33	QP	100	120	
4	0.4374	34.36	19.60	53.96	94.79	-40.83	QP	100	103	
5	0.7198	31.95	19.52	51.47	70.47	-19.00	QP	100	271	
6 *	1.0430	36.23	19.44	55.67	67.26	-11.59	QP	100	152	


- Note:**
- (1) All Readings are Peak Value.
  - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
  - (4) EUT lying on the table position is the worst case result in the report.

We pretested modes (Wireless Charging(10W+3W+2.5W),Wireless Charging (7.5W+3W+2.5W),Wireless Charging(5W+3W+2.5W)) for EUT. The worst test data(Wireless Charging(10W+3W+2.5W)) see follow the table.

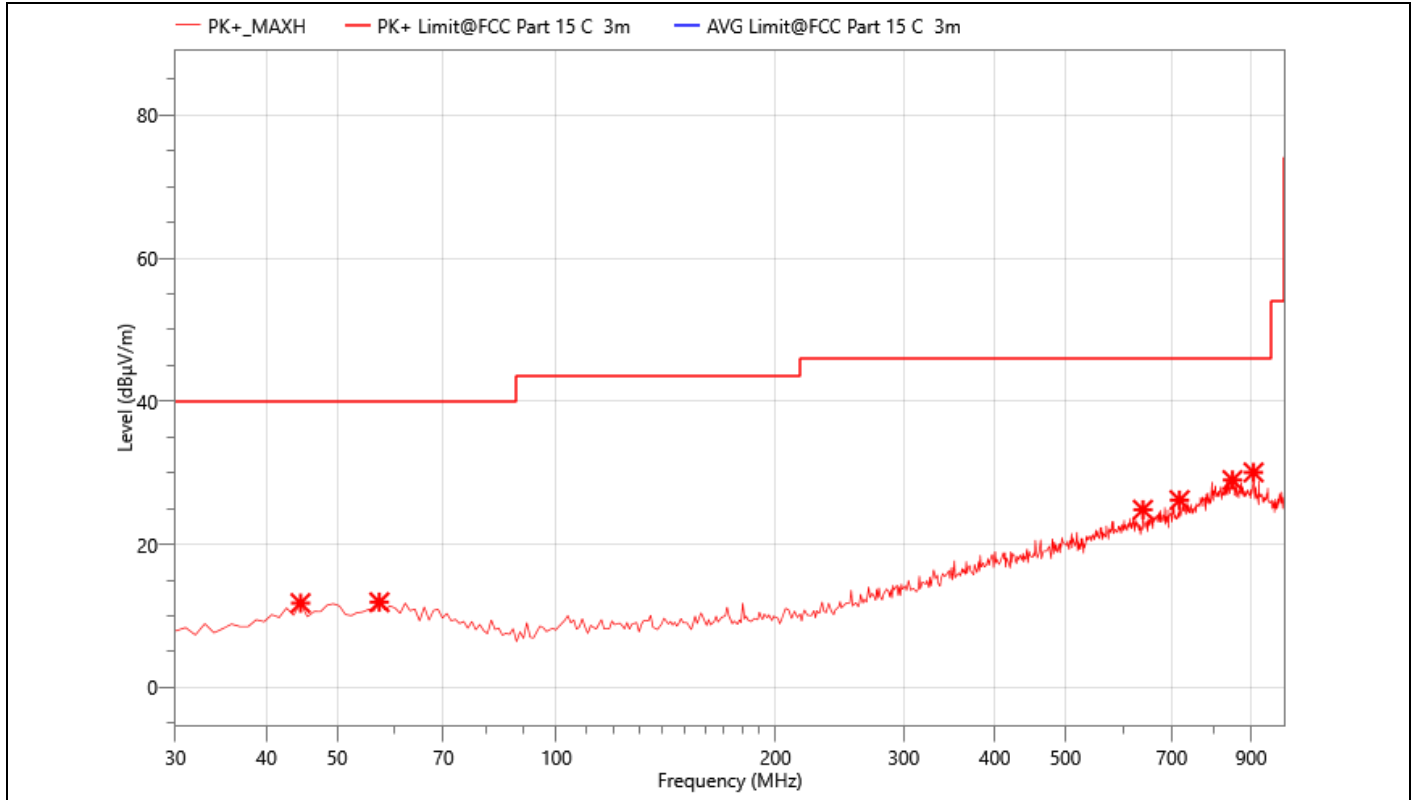

<b>Limit:</b>	<b>FCC Part 15C 3m Radiation(QP)</b>	<b>Antenna:</b>	<b>Horizontal</b>
<b>EUT:</b>	<b>Wireless Charger</b>	<b>Temperature:</b>	<b>24.3°C</b>
<b>M/N.:</b>	<b>PW0062</b>	<b>Humidity:</b>	<b>54%RH</b>
<b>Mode:</b>	<b>Wireless Charging 10W+3W+2.5W</b>	<b>Power Rating:</b>	<b>AC 120V/60Hz</b>
<b>Test Engineer:</b>	<b>Big</b>	<b>Test Time:</b>	<b>2023/7/14</b>

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	44.550	16.01	-4.22	11.79	40.00	28.21	QP	150.0	360.0	
2	57.160	15.48	-3.57	11.91	40.00	28.09	QP	150.0	360.0	
3	639.160	16.10	8.75	24.85	46.00	21.15	QP	150.0	360.0	
4	717.730	15.90	10.29	26.19	46.00	19.81	QP	150.0	360.0	
5	848.680	15.04	13.95	28.99	46.00	17.01	QP	150.0	360.0	
6	906.880	17.40	12.66	30.06	46.00	15.94	QP	150.0	360.0	

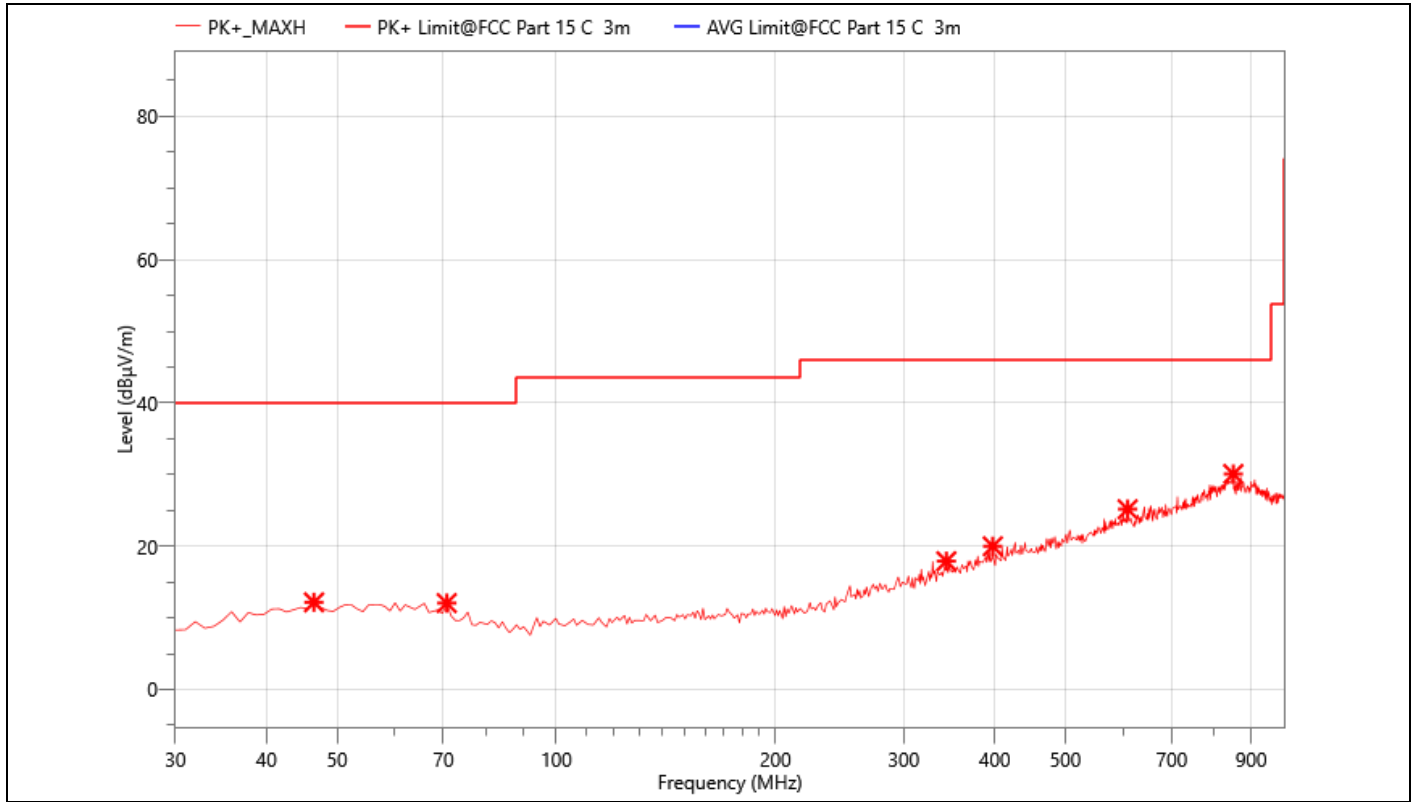

<b>Limit:</b>	<b>FCC Part 15C 3m Radiation(QP)</b>	<b>Antenna:</b>	<b>Vertical</b>
<b>EUT:</b>	<b>Wireless Charger</b>	<b>Temperature:</b>	<b>24.3°C</b>
<b>M/N.:</b>	<b>PW0062</b>	<b>Humidity:</b>	<b>54%RH</b>
<b>Mode:</b>	<b>Wireless Charging 10W+3W+2.5W</b>	<b>Power Rating:</b>	<b>AC 120V/60Hz</b>
<b>Test Engineer:</b>	<b>Big</b>	<b>Test Time:</b>	<b>2023/7/14</b>


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	46.490	16.26	-4.08	12.18	40.00	27.82	QP	150.0	360.0	
2	70.740	16.78	-4.71	12.07	40.00	27.93	QP	150.0	360.0	
3	343.310	17.02	0.89	17.91	46.00	28.09	QP	150.0	360.0	
4	397.630	17.14	2.86	20.00	46.00	26.00	QP	150.0	360.0	
5	609.090	16.78	8.39	25.17	46.00	20.83	QP	150.0	360.0	
6	850.620	16.28	13.81	30.09	46.00	15.91	QP	150.0	360.0	

### 6.6 Radiated Measurement Photos

9kHz-30MHz



30MHz-1GHz

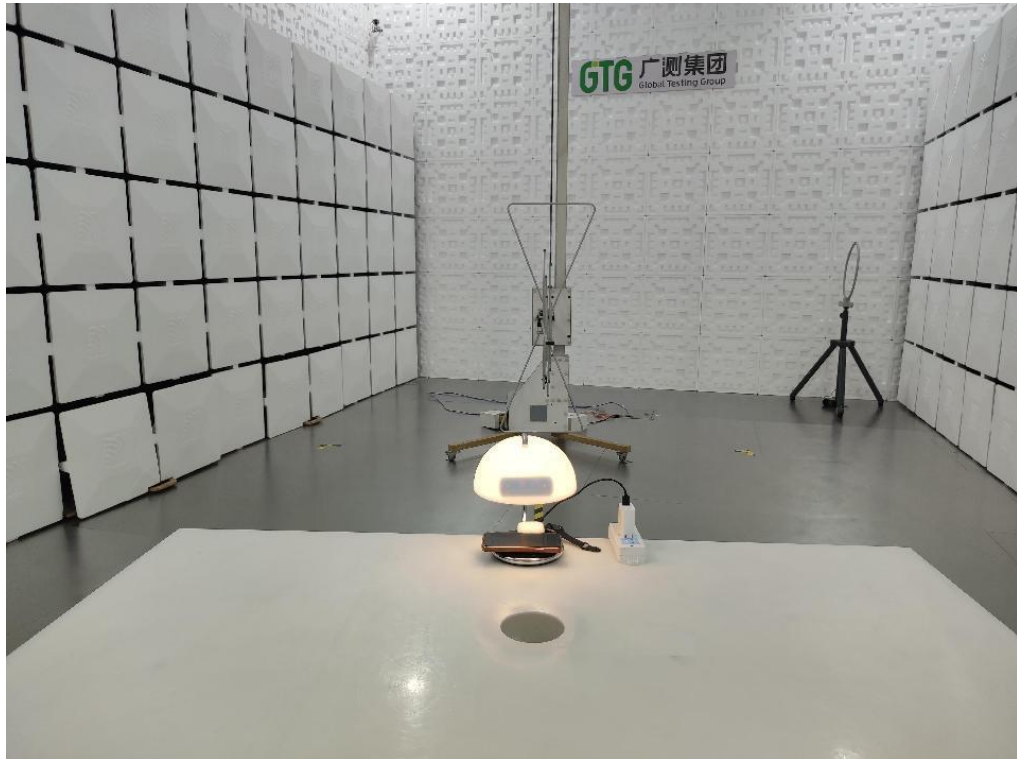



## 7 20db Bandwidth

### 7.1 20dB Bandwidth Limit

None: for reporting purposed only.


### 7.2 Test Instruments

Refer a test equipment and calibration data table in this test report.

### 7.3 Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1KHz RBW and 3KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 7.4 Test Setup



### 7.5 Test Result

iphone charging

Frequency (KHz)	20dB Bandwidth (KHz)	Results
125.8	2.695	PASS


Apple Watch charging

Frequency (KHz)	20dB Bandwidth (KHz)	Results
325.8	2.703	PASS


Earphone charging

Frequency (KHz)	20dB Bandwidth (KHz)	Results
159.9	2.707	PASS


20 dB Bandwidth Test plot  
iphone charging

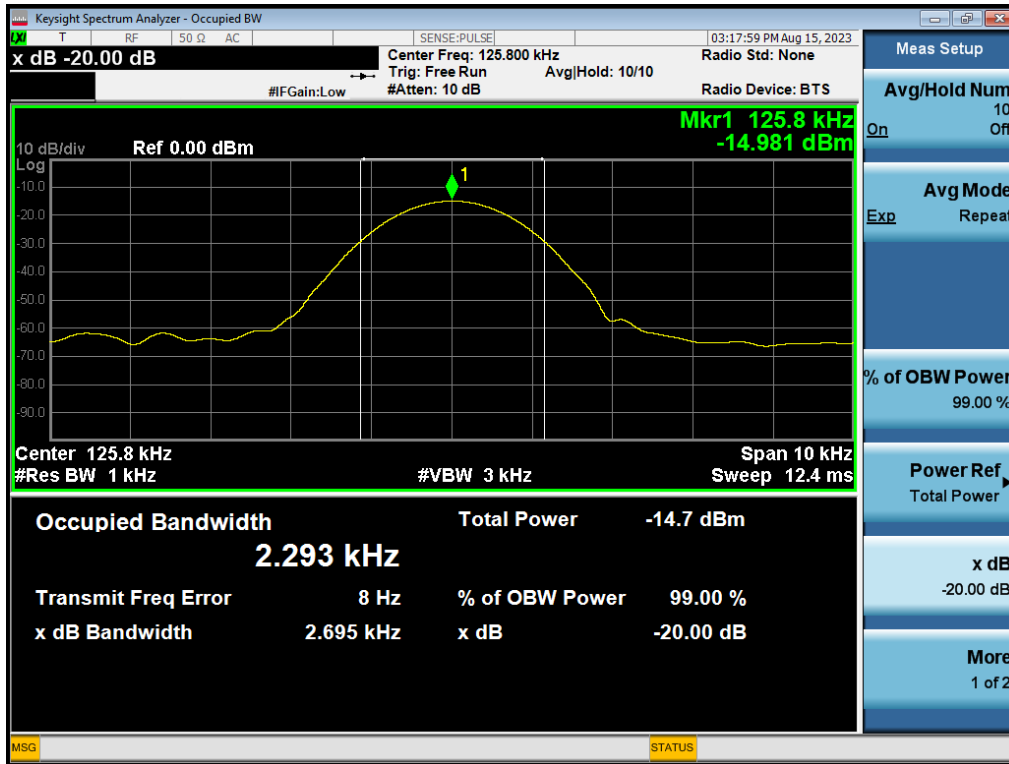

Apple Watch charging

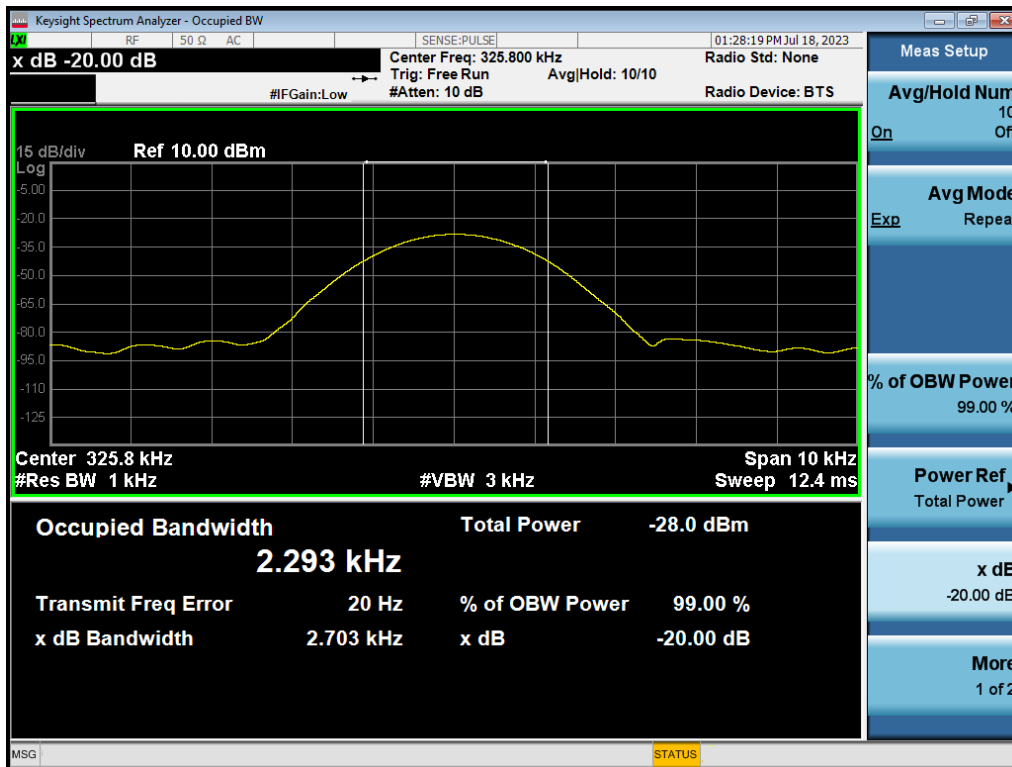

### Earphone charging

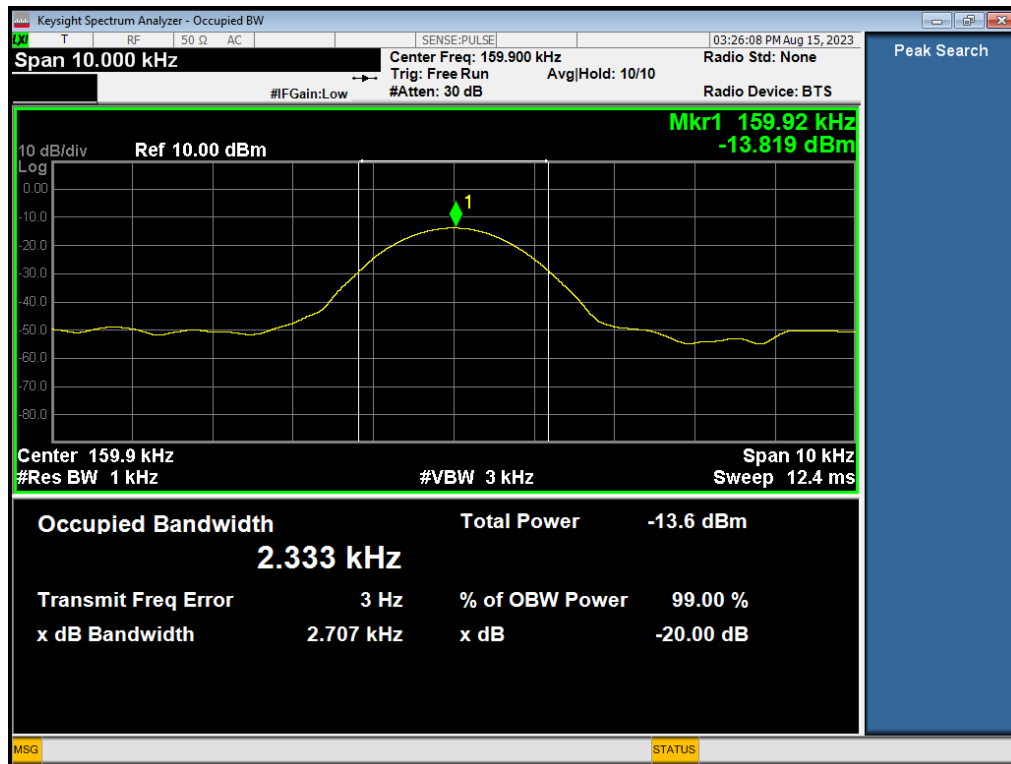

## **8 Antenna Application**

### **8.1 Antenna requirement**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **8.2 Result**

The EUT's antenna, permanent attached antenna, used an Induction coil and integrated on PCB, The antenna's gain meets the requirement.

## APPENDIX (Photos of EUT)

**External-1**



**External-2**



**External-3**




**External-4**





**External-5**

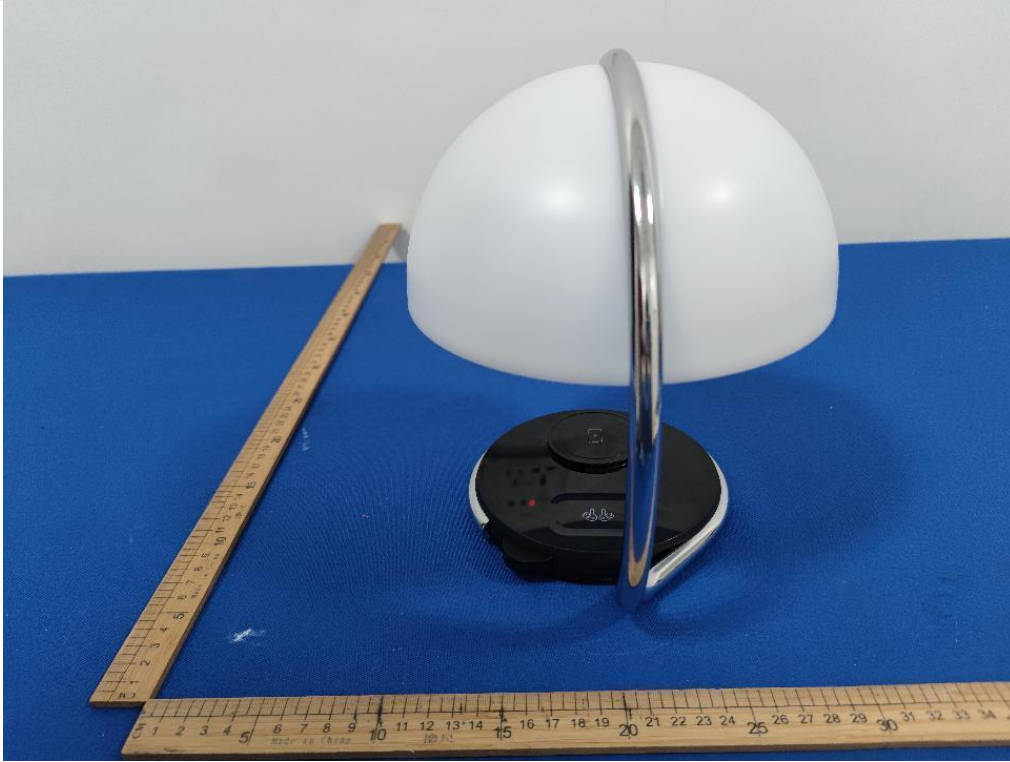


**External-6**






**Internal-1**

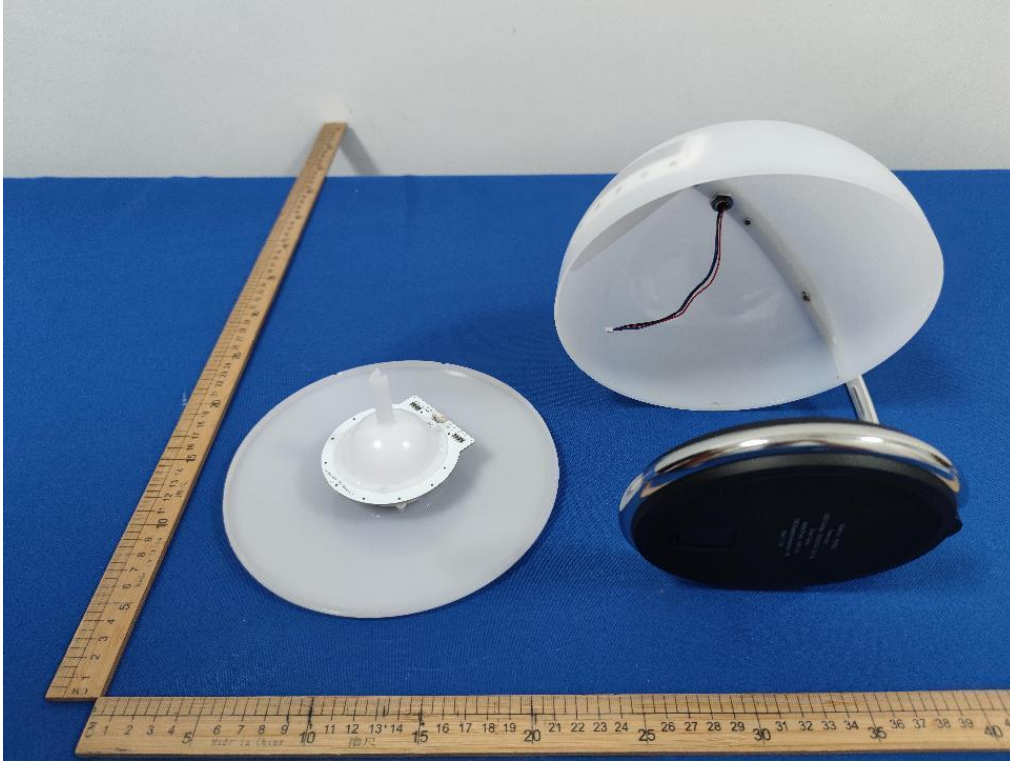


**Internal-2**

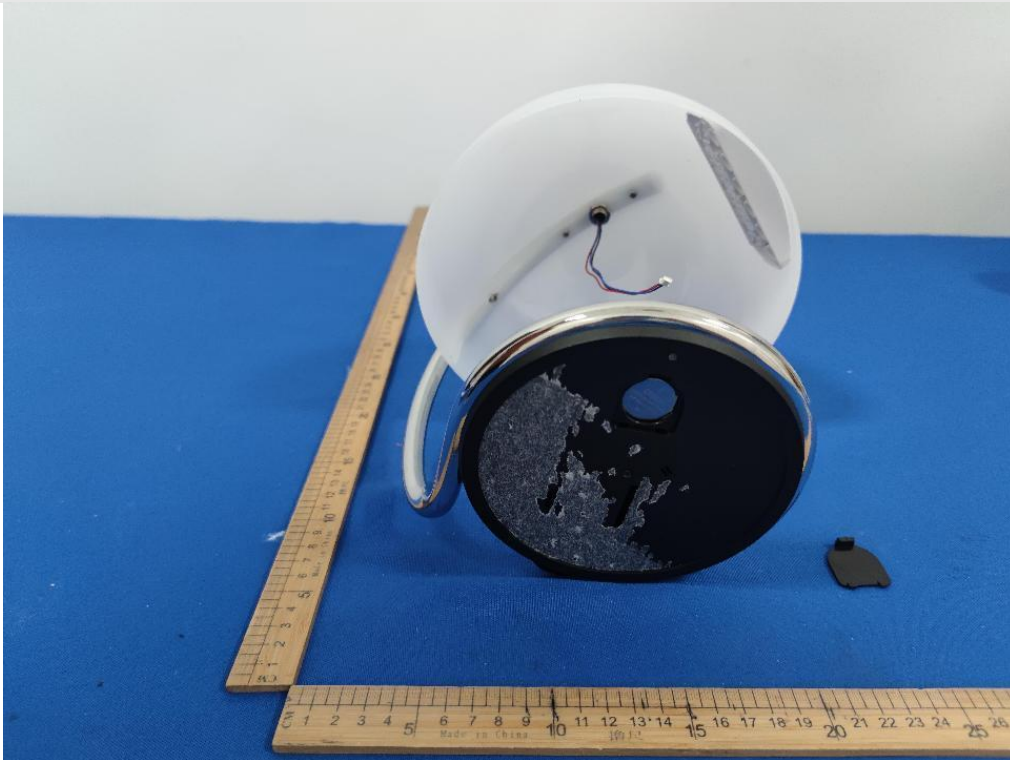




**Internal-3**

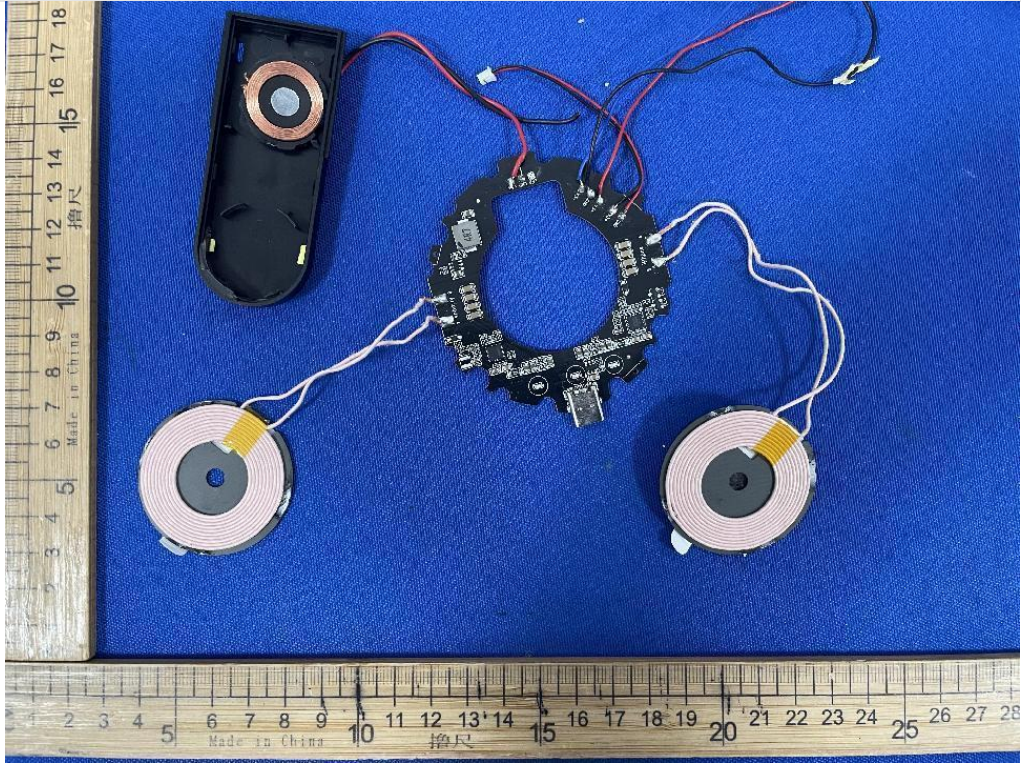


**Internal-4**

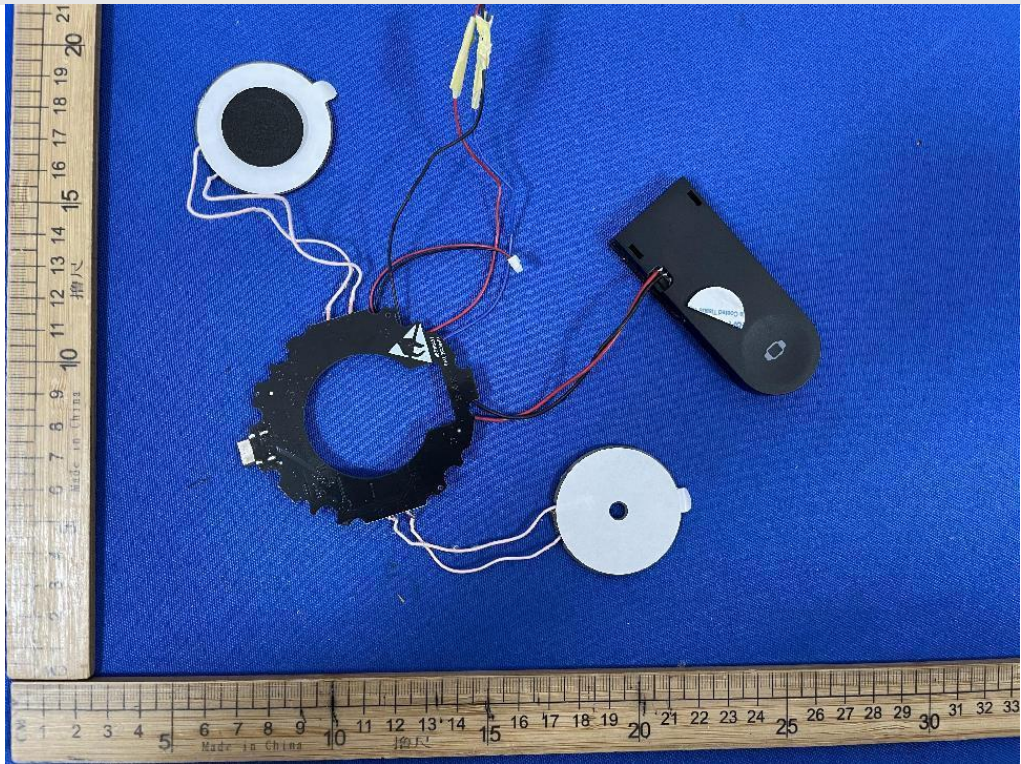





**Internal-5**

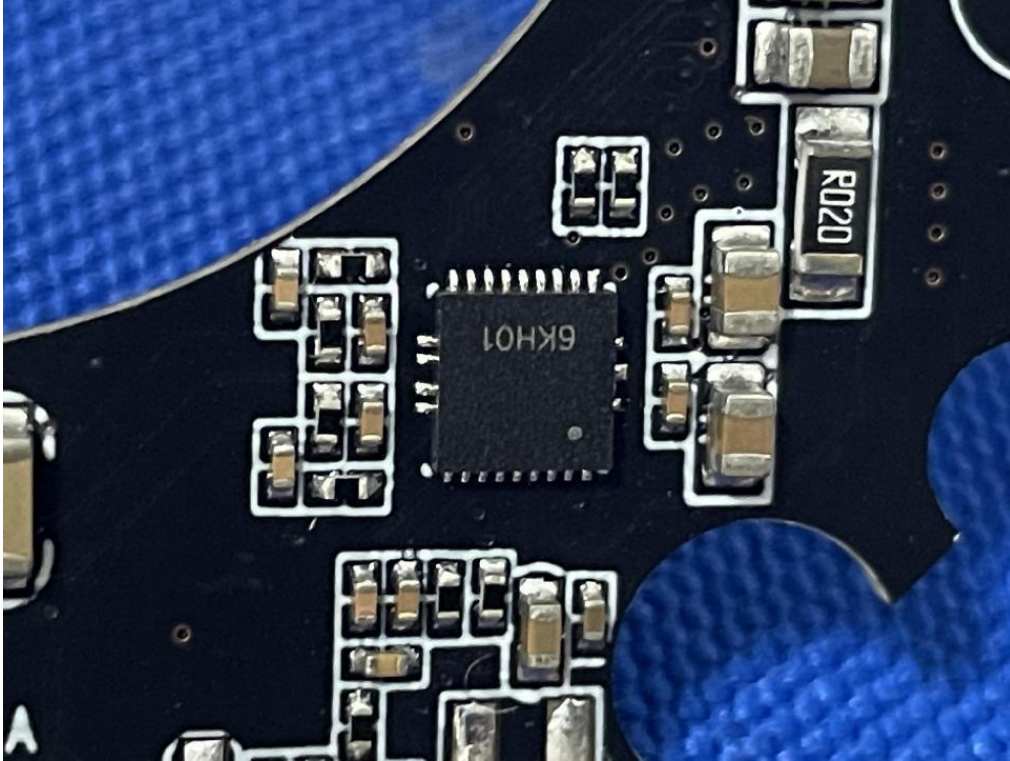


**Internal-6**

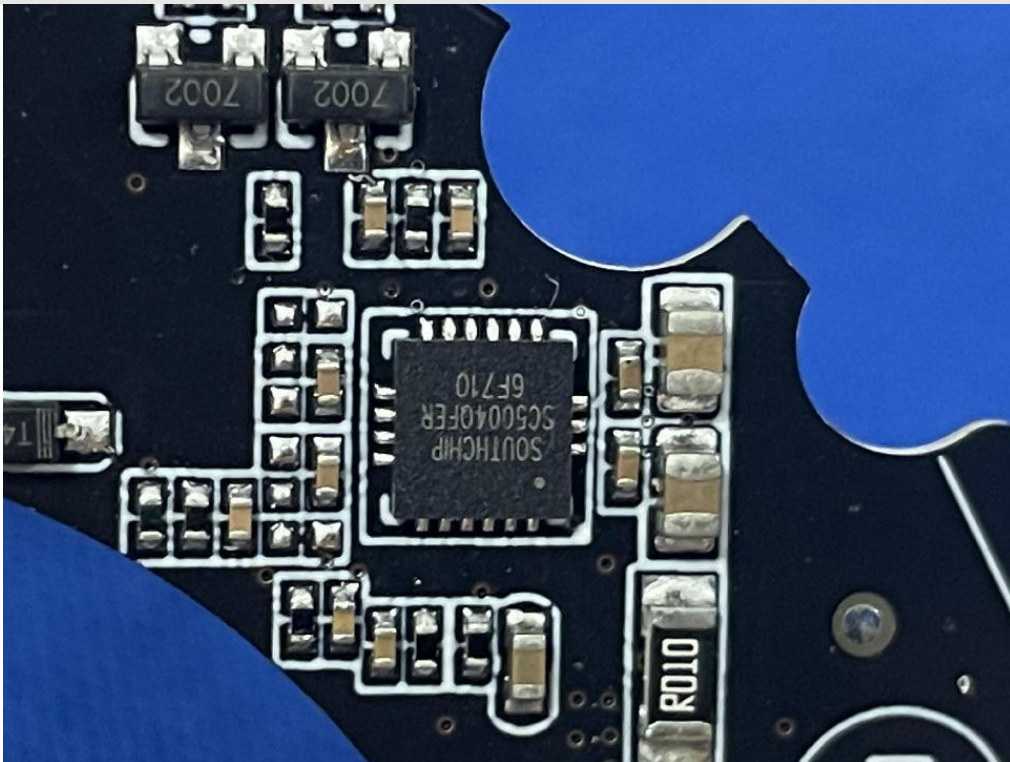

**Internal-7**

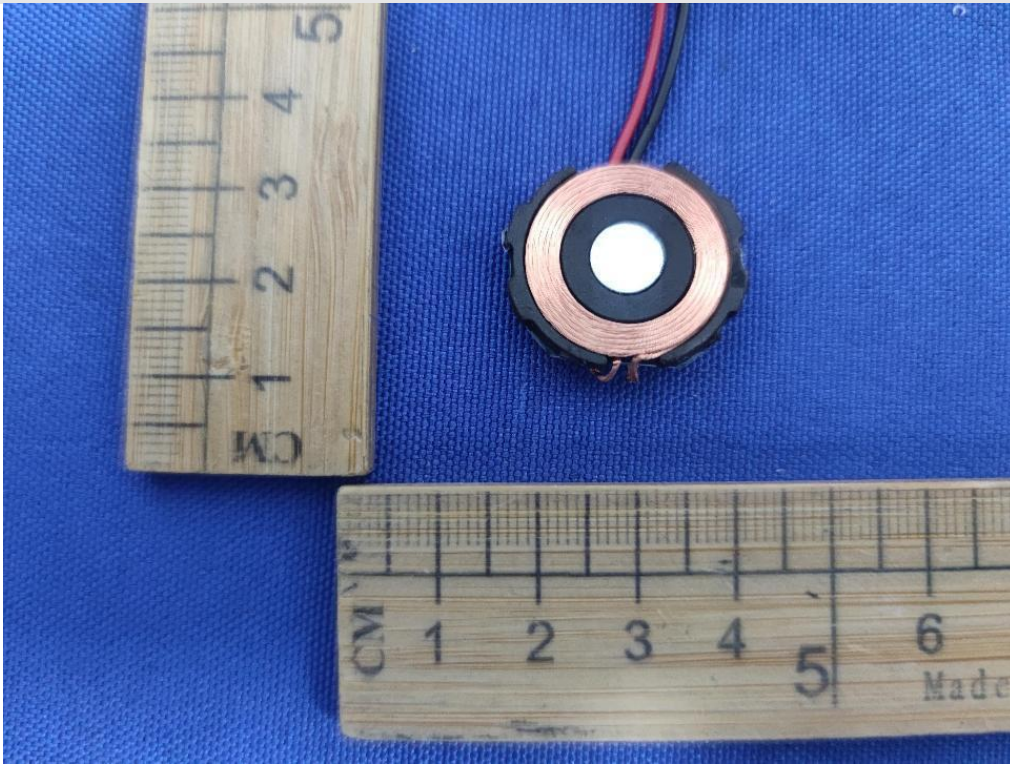


**Internal-8**

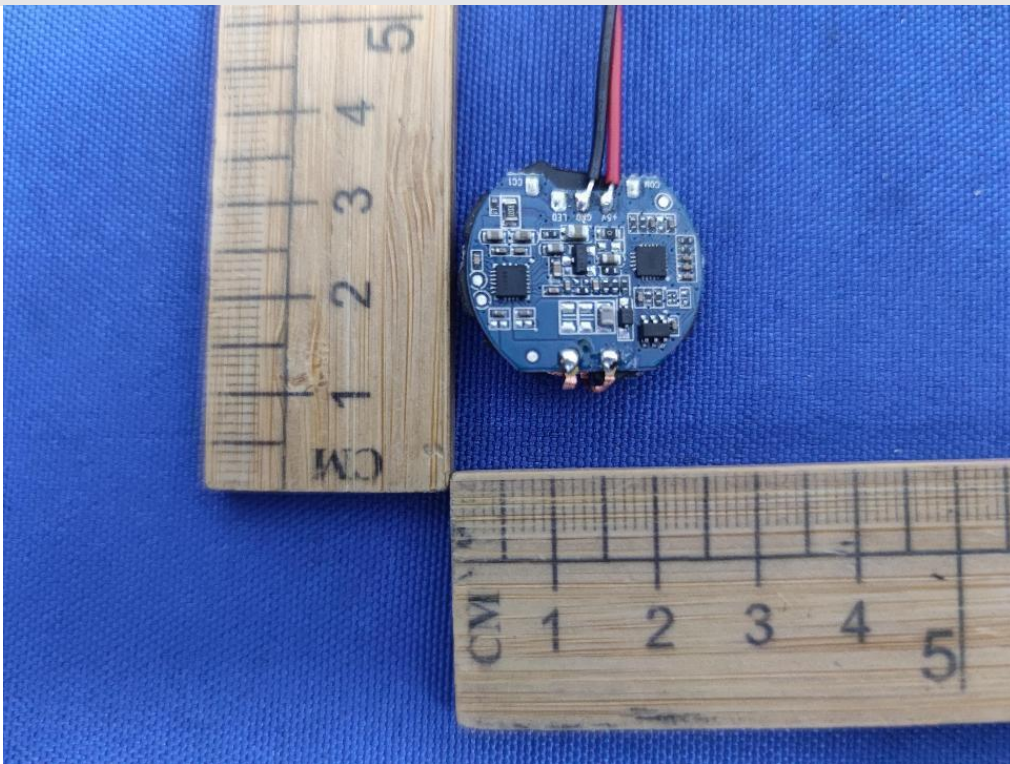




Internal-9

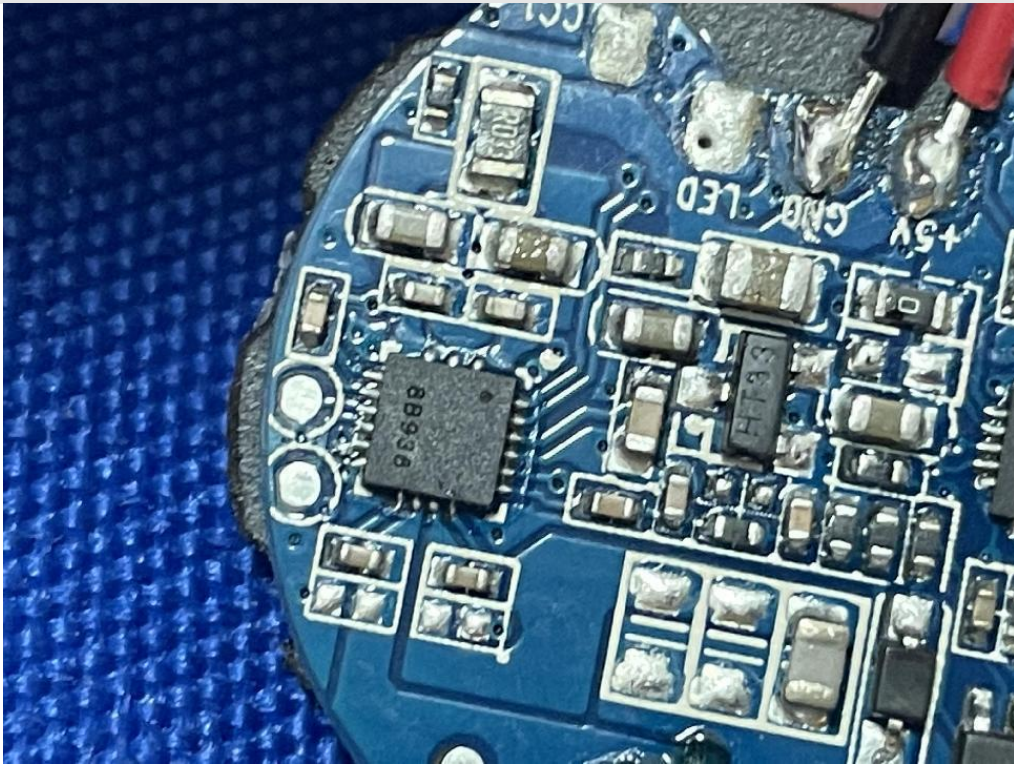

Internal-10

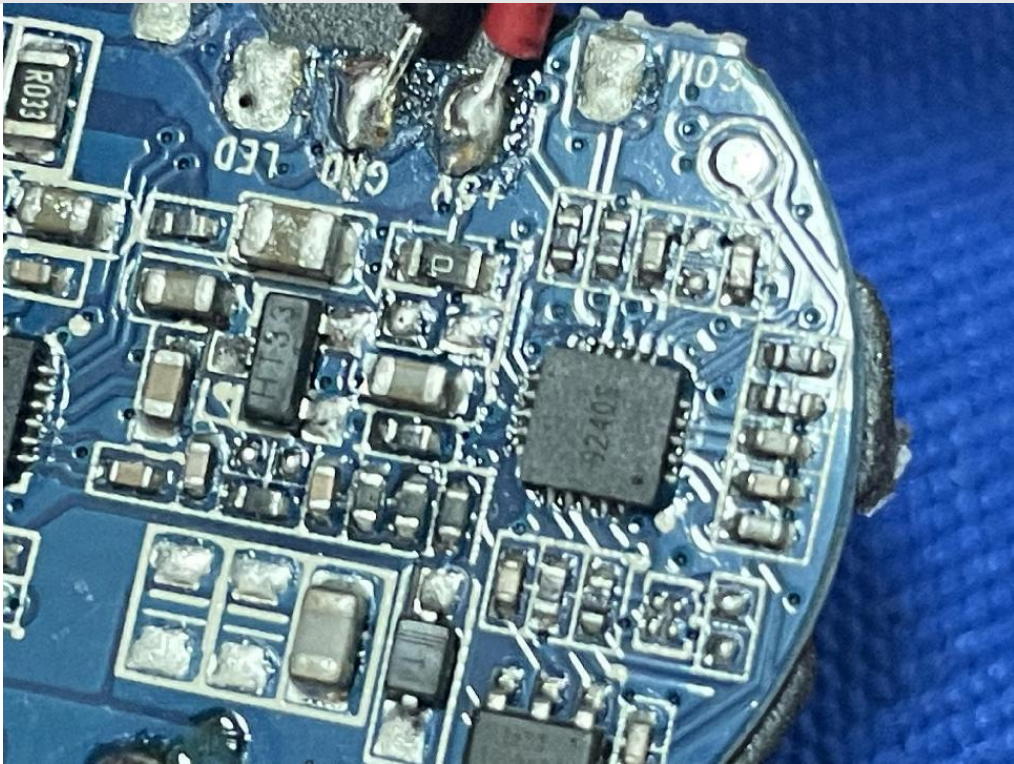




**Internal-11**



**Internal-12**



**Internal-13**

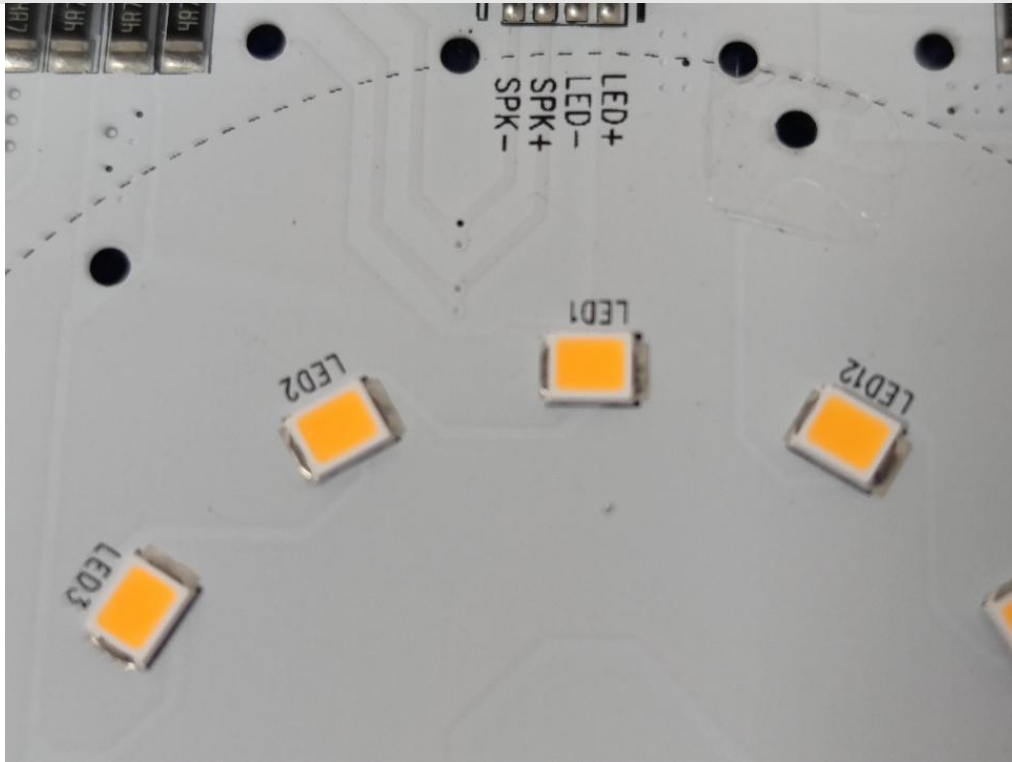

**Internal-14**



**--- END OF REPORT---**