

## TEST REPORT


### FCC Rules Part 15.247

**Report Reference No.....: MTEB23100063-R**

**FCC ID..... : 2BBGK-IK2**

Compiled by

( position+printed name+signature)..: File administrators Alisa Luo




Supervised by

( position+printed name+signature)..: Test Engineer Sunny Deng



Approved by

( position+printed name+signature)..: Manager Yvette Zhou



Date of issue.....: **October 11,2023**

**Representative Laboratory Name. : Shenzhen Most Technology Service Co., Ltd.**

Address.....: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,  
Nanshan, Shenzhen, Guangdong, China.

**Applicant's name.....: Shenzhen Xincheng Times Technology Co.,Ltd**

Address.....: 104-105, Block C, Donghai Wang Building, No. 369 Bulong Road,  
Ma'antang Community, Bantian Street, Longgang District,  
Shenzhen

**Test specification/ Standard.....: FCC Rules Part 15.247**

TRF Originator.....: Shenzhen Most Technology Service Co., Ltd.

**Shenzhen Most Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description.....: Electric Kids Scooter**

Trade Mark.....: iScooter

Model/Type reference.....: iK2

Listed Models .....: iK1、iK1Pro、iK2Pro、iK3、iK3Pro、iK4、iK4Pro、iK5、iK5Pro、  
iK6、iK6Pro

Modulation Type.....: GFSK,  $\pi/4$ DQPSK, 8DPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Hardware Version.....: V-1.0

Software Version.....: V5.0

Rating.....: DC 21V by Adapter

DC 18V by Battery

Result.....: **PASS**

## TEST REPORT

Equipment under Test : Electric Kids Scooter

Model /Type : iK2

Listed Models : iK1、iK1Pro、iK2Pro、iK3、iK3Pro、iK4、iK4Pro、iK5、iK5Pro、iK6、iK6Pro

Remark 1 : Only the model name and appearance color are different.

Applicant : **Shenzhen Xincheng Times Technology Co.,Ltd**

Address : 104-105, Block C, Donghai Wang Building, No. 369 Bulong Road, Ma'antang Community, Bantian Street, Longgang District, Shenzhen

Manufacturer : **Shenzhen Xincheng Times Technology Co.,Ltd**

Address : 104-105, Block C, Donghai Wang Building, No. 369 Bulong Road, Ma'antang Community, Bantian Street, Longgang District, Shenzhen

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1</b>	<b>REVISION HISTORY .....</b>	<b>4</b>
<b>2</b>	<b>TEST STANDARDS .....</b>	<b>5</b>
<b>3</b>	<b>SUMMARY .....</b>	<b>6</b>
<b>3.1</b>	<b>General Remarks</b>	<b>6</b>
<b>3.2</b>	<b>Product Description</b>	<b>6</b>
<b>3.3</b>	<b>Equipment Under Test</b>	<b>6</b>
<b>3.4</b>	<b>Short description of the Equipment under Test (EUT)</b>	<b>6</b>
<b>3.5</b>	<b>EUT operation mode</b>	<b>7</b>
<b>3.6</b>	<b>Block Diagram of Test Setup</b>	<b>7</b>
<b>3.7</b>	<b>Test Item (Equipment Under Test) Description*</b>	<b>7</b>
<b>3.8</b>	<b>Auxiliary Equipment (AE) Description</b>	<b>7</b>
<b>3.9</b>	<b>Antenna Information*</b>	<b>7</b>
<b>3.10</b>	<b>Related Submittal(s) / Grant (s)</b>	<b>8</b>
<b>3.11</b>	<b>Modifications</b>	<b>8</b>
<b>3.12</b>	<b>EUT configuration</b>	<b>8</b>
<b>4</b>	<b>TEST ENVIRONMENT .....</b>	<b>9</b>
<b>4.1</b>	<b>Address of the test laboratory</b>	<b>9</b>
<b>4.2</b>	<b>Environmental conditions</b>	<b>9</b>
<b>4.3</b>	<b>Summary of measurement results</b>	<b>10</b>
<b>4.4</b>	<b>Statement of the measurement uncertainty</b>	<b>10</b>
<b>4.5</b>	<b>Equipments Used during the Test</b>	<b>11</b>
<b>5</b>	<b>TEST CONDITIONS AND RESULTS .....</b>	<b>12</b>
<b>5.1</b>	<b>AC Power Conducted Emission</b>	<b>12</b>
<b>5.2</b>	<b>Radiated Emission</b>	<b>15</b>
<b>5.3</b>	<b>Maximum Peak Output Power</b>	<b>21</b>
<b>5.4</b>	<b>20dB Bandwidth</b>	<b>22</b>
<b>5.5</b>	<b>Frequency Separation</b>	<b>23</b>
<b>5.6</b>	<b>Number of hopping frequency</b>	<b>24</b>
<b>5.7</b>	<b>Time of Occupancy (Dwell Time)</b>	<b>25</b>
<b>5.8</b>	<b>Spurious RF Conducted Emission</b>	<b>26</b>
<b>5.9</b>	<b>Pseudorandom Frequency Hopping Sequence</b>	<b>27</b>
<b>5.10</b>	<b>Antenna Requirement</b>	<b>28</b>
<b>6</b>	<b>TEST SETUP PHOTOS OF THE EUT .....</b>	<b>29</b>
<b>7</b>	<b>PHOTOS OF THE EUT .....</b>	<b>30</b>
	<b>APPENDIX I. Conducted Peak Output Power</b>	<b>31</b>
	<b>APPENDIX II. 99% Bandwidth</b>	<b>32</b>
	<b>APPENDIX III. 20dB Bandwidth</b>	<b>34</b>
	<b>APPENDIX IV. Carrier Frequencies Separation</b>	<b>36</b>
	<b>APPENDIX V. Conducted Out Of Band Emission</b>	<b>38</b>
	<b>APPENDIX VI. Duty Cycle</b>	<b>43</b>
	<b>APPENDIX VII. Dwell Time</b>	<b>48</b>
	<b>APPENDIX VIII. Number Of Hopping Channel</b>	<b>52</b>

## 1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2023-10-11	Initial Issue	Alisa Luo

## **2 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

### 3 SUMMARY

#### 3.1 General Remarks

Date of receipt of test sample	:	2023.10.07
Testing commenced on	:	2023.10.07
Testing concluded on	:	2023.10.11

#### 3.2 Product Description

Product Name:	Electric Kids Scooter
Model/Type reference:	iK2
Power Supply:	DC 21V by Adapter DC 18V by Battery
Testing sample ID:	MTYP03062
<b>Bluetooth :</b>	
Supported Type:	Bluetooth BR/EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	0.07dBi

#### 3.3 Equipment Under Test

##### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

**DC 21V by Adapter**  
**DC 18V by Battery**

#### 3.4 Short description of the Equipment under Test (EUT)

This is a Electric Kids Scooter Device For more details, refer to the user's manual of the EUT.


### 3.5 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

**Operation Frequency:**

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

### 3.6 Block Diagram of Test Setup

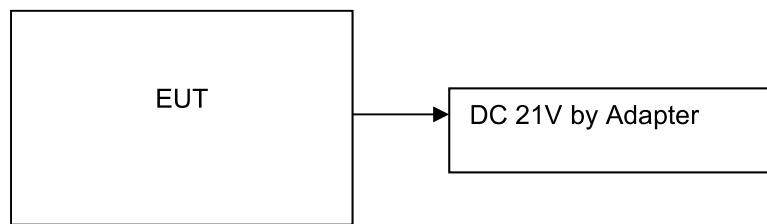

### 3.7 Test Item (Equipment Under Test) Description\*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A	Adapter	FY0132100500			
EUT B					

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

### 3.8 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1				
AE 2	-			

### 3.9 Antenna Information\*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	PCB antenna	2.4 – 2.5 GHz	---	0.07dBi
Antenna 2					

\*: declared by the applicant.

### 3.10 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### 3.11 Modifications

No modifications were implemented to meet testing criteria.

### 3.12 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - Supplied by the lab

●	ADAPTER	M/N:	FY0132100500
		Manufacturer:	Shenzhen Fuyuan Power Co., Ltd.



## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

#### **Shenzhen Most Technology Service Co., Ltd.**

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.  
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### **Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC-Designation No.: CN1315**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### **A2LA-Lab Cert. No.: 6343.01**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

#### Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

#### AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

#### Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

### 4.3 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(a)(1)	Carrier Frequency separation	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.247(a)(1)	Number of Hopping channels	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Full	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	Compliant
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.247(a)(1)	Spectrum bandwidth of aFHSS system 20dB bandwidth	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(b)(1)	Maximum output power	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	Band edge compliance conducted	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Compliant
§15.205	Band edge compliance radiated	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	TX spurious emissions conducted	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	TX spurious emissions radiated	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.107(a) §15.207	Conducted Emissions 9KHz-30 MHz	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Middle	Compliant

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

### 4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.5 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	/	2023/03/17	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	/	2023/03/17	1 Year
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2023/03/17	1 Year
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2023/03/17	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2023/03/17	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2023/03/17	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2023/03/17	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2023/03/17	1 Year
9	Horn antenna	R&S	OBH100400	26999002	/	2023/03/17	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2023/03/17	1 Year
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2023/03/17	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2023/03/17	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2023/03/17	1 Year
14	Pre-amplifier	EMCI	EMC051845SE	MT-E391	/	2023/03/17	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2023/03/17	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2023/03/17	1 Year
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2023/03/17	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2023/03/17	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2023/03/17	1 Year

Note: The Cal.Interval was one year.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 AC Power Conducted Emission

#### TEST CONFIGURATION

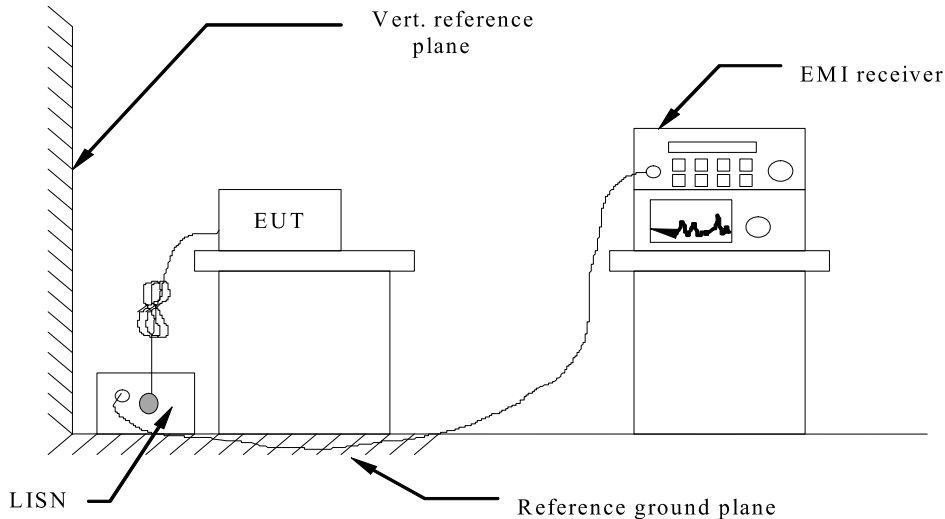

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

Remark:

1. GFSK,  $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel; only the worst result of 8DPSK Middle Channel was reported as below:

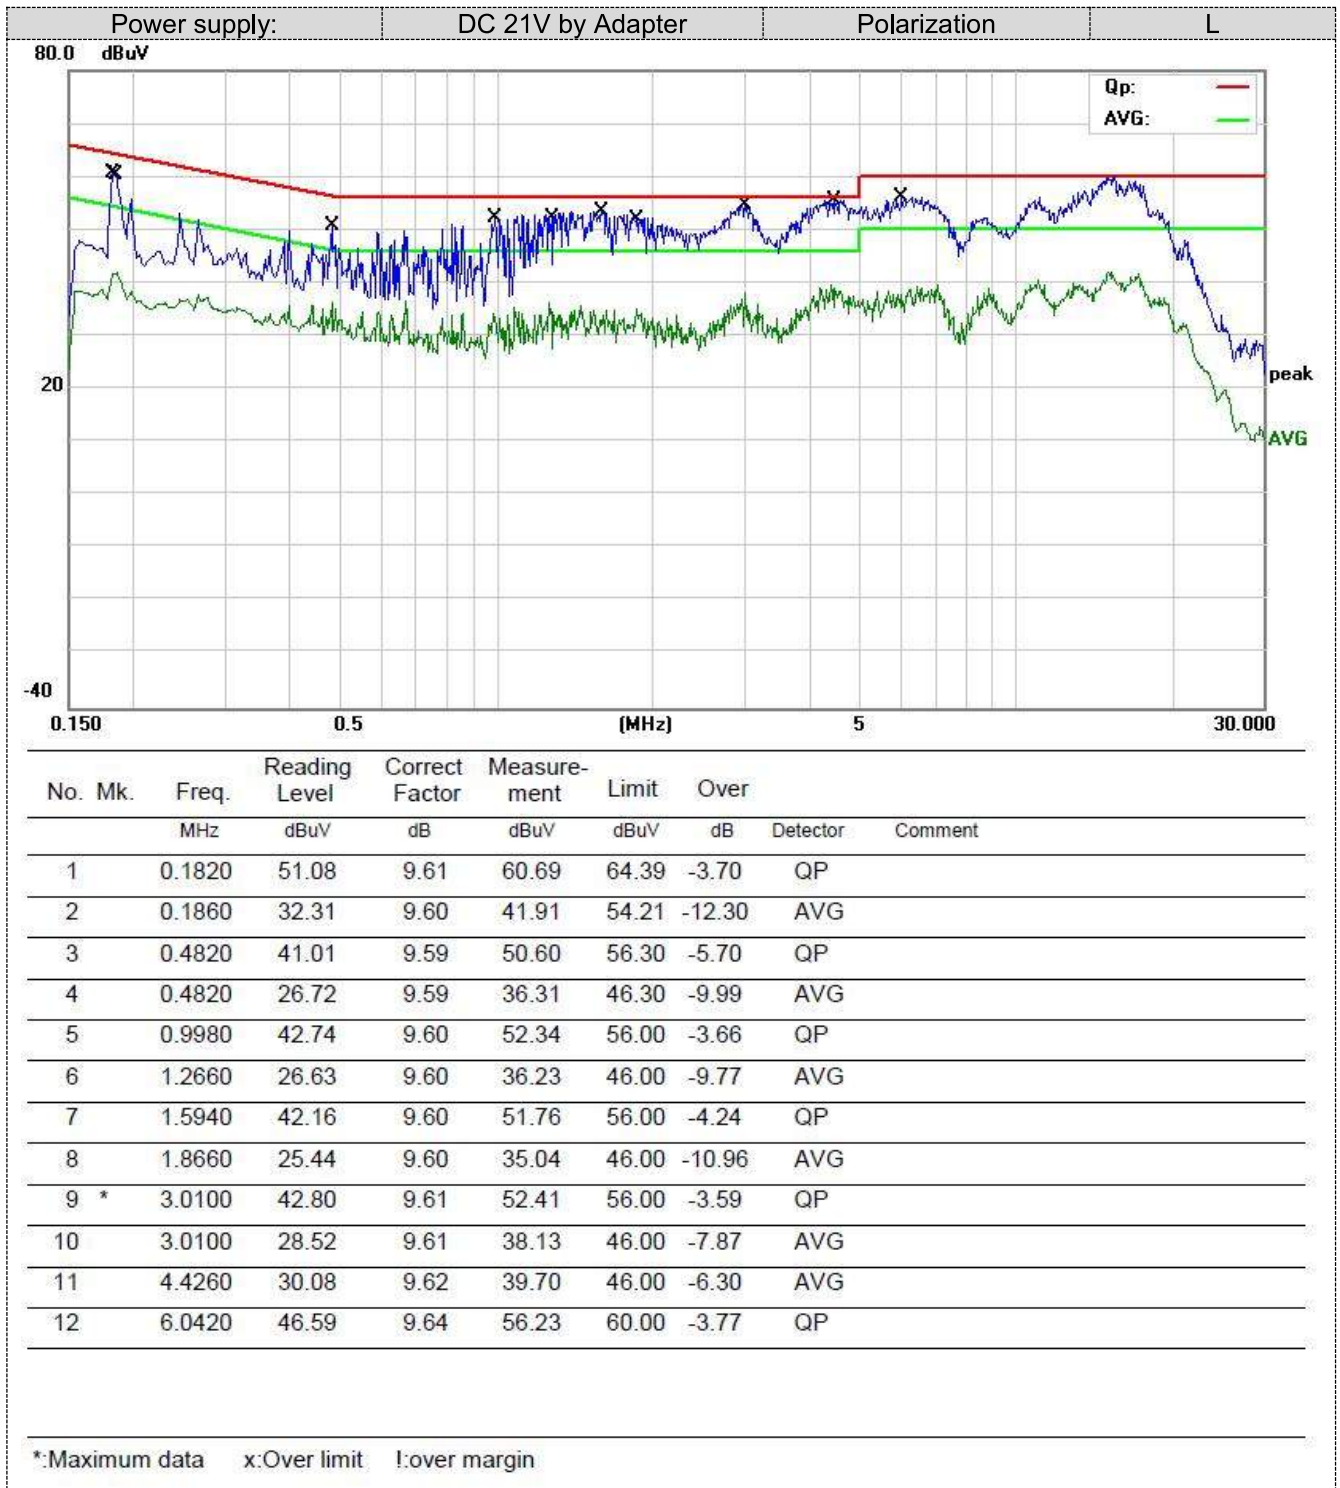


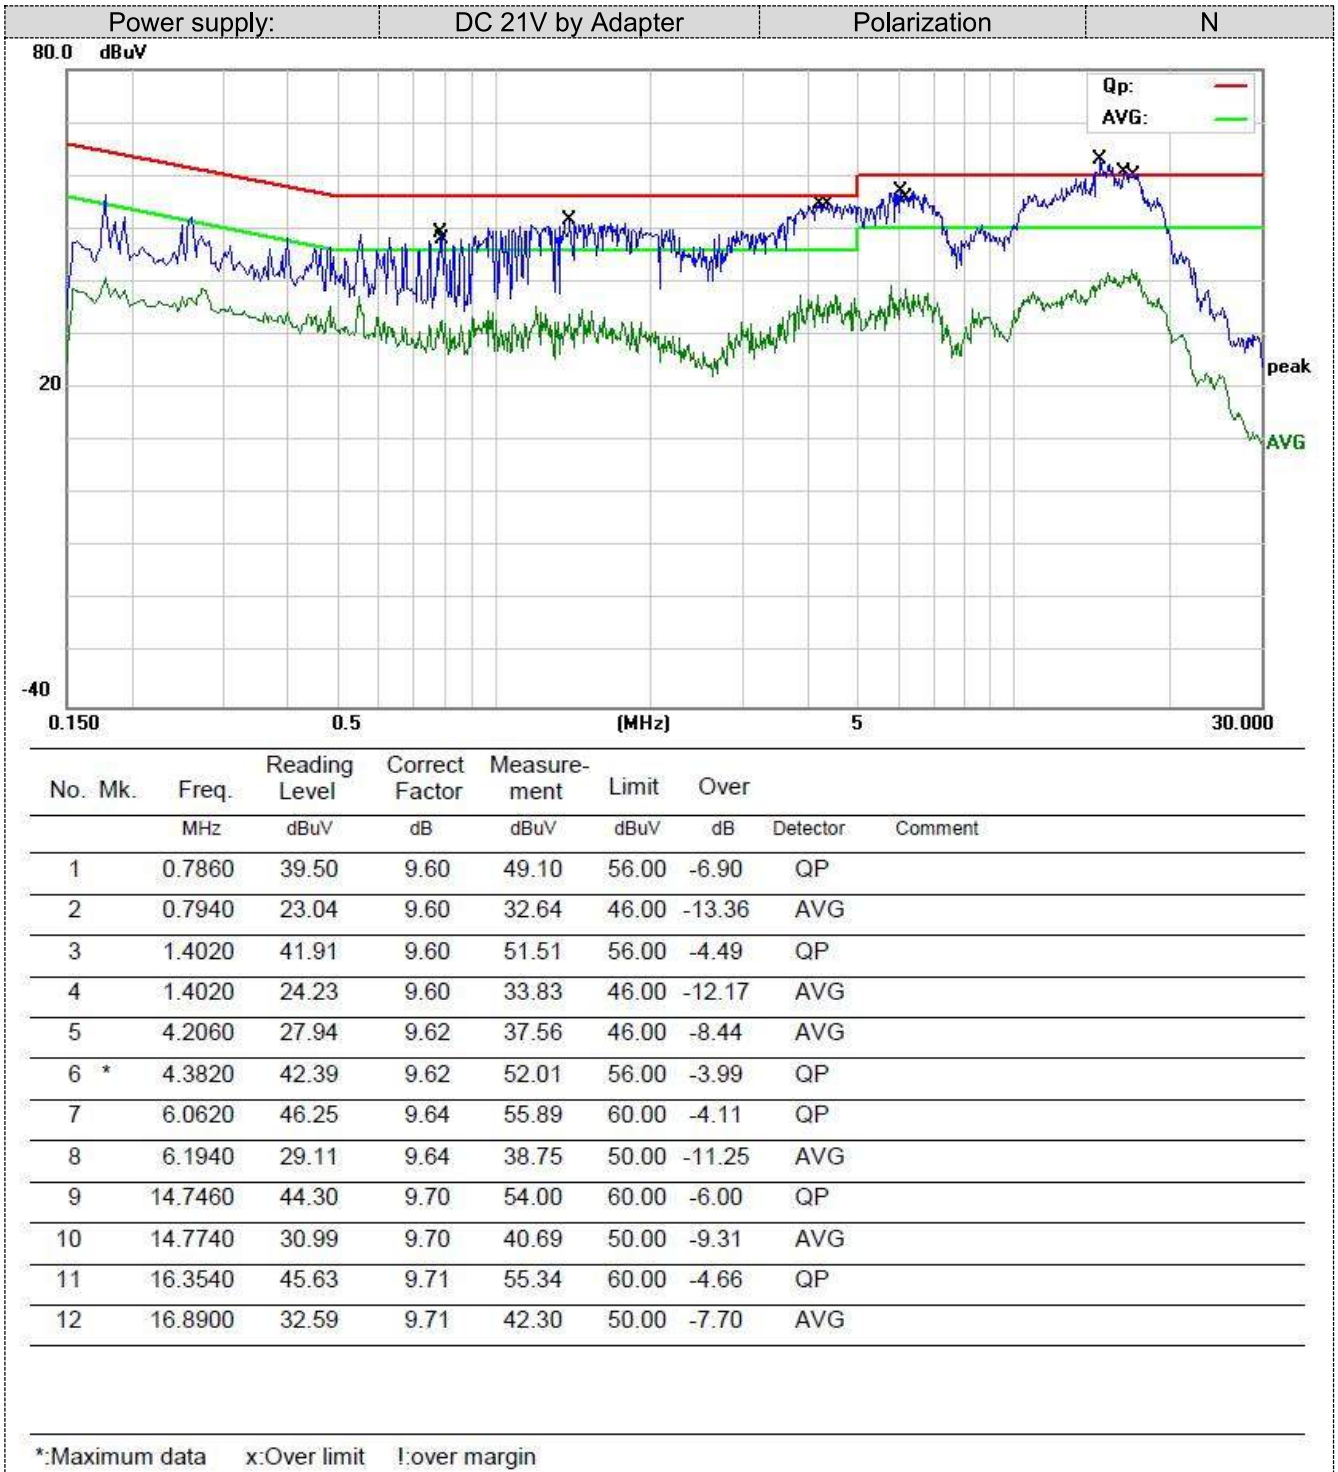


## 5.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

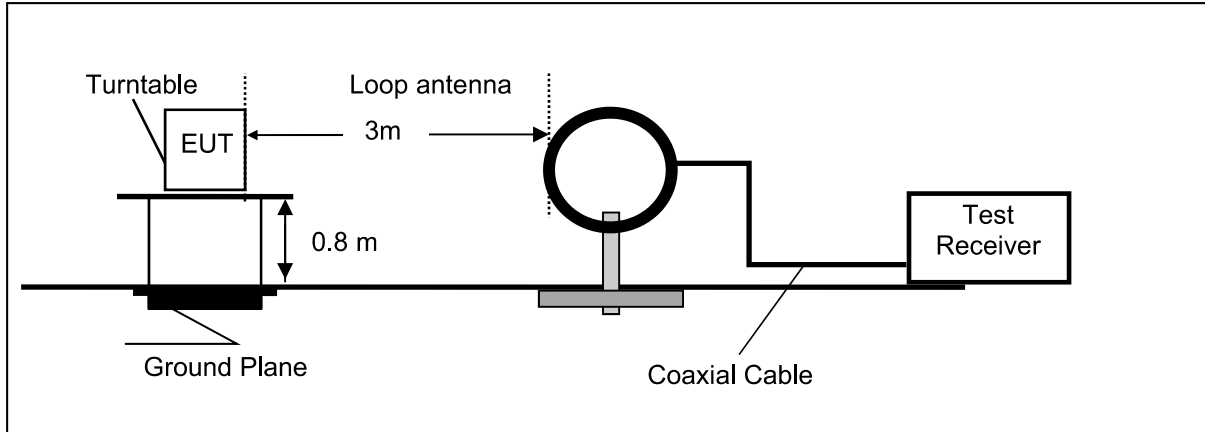

Frequency range 30MHz – 1000MHz

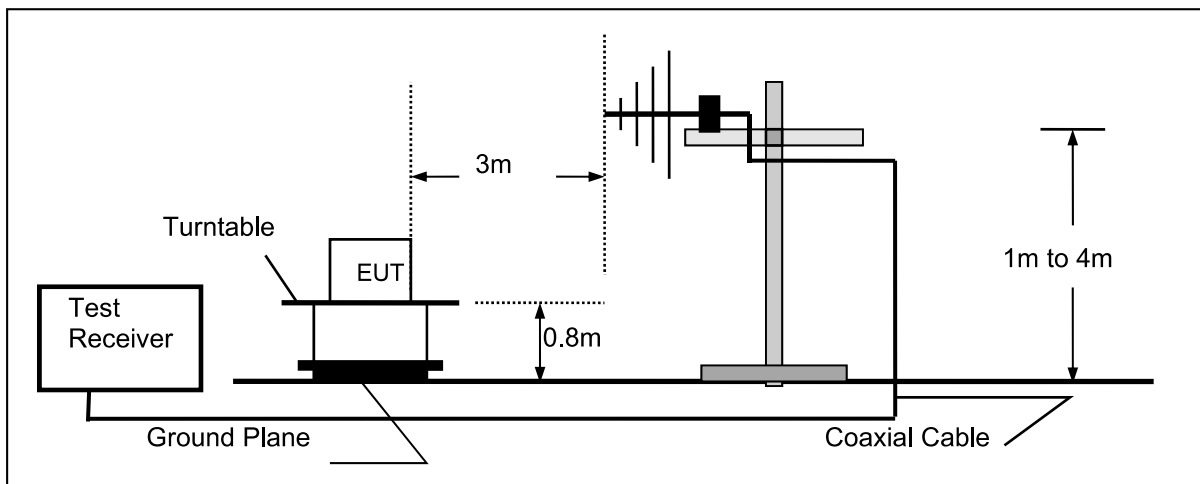

Frequency range above 1GHz-25GHz

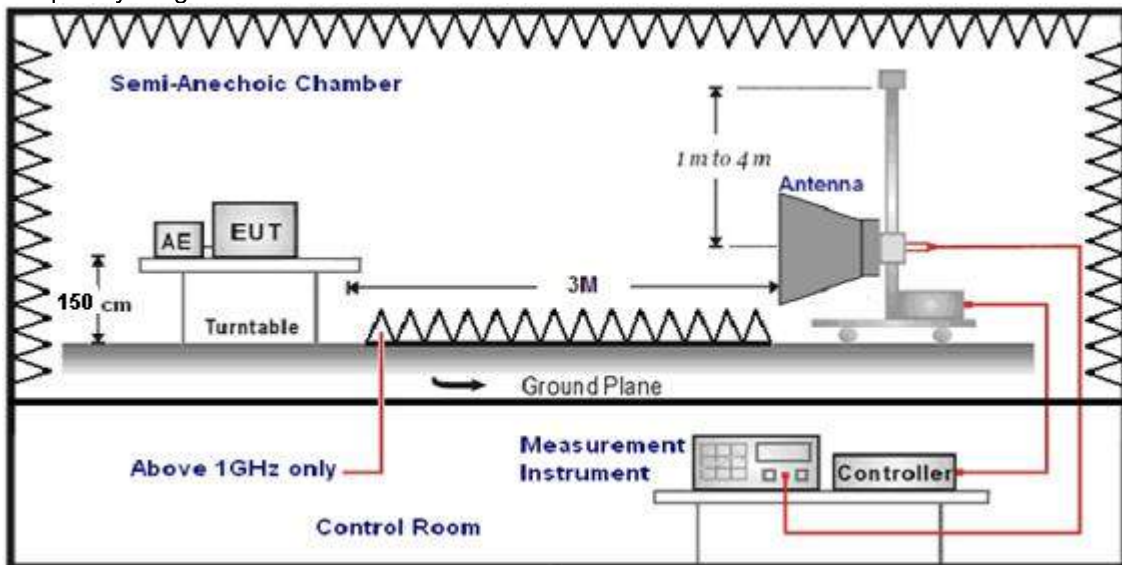

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

**FS = RA + AF + CL - AG**

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Transd=AF +CL-AG

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500





**TEST RESULTS**

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. We measured Radiated Emission at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
3. For below 1GHz testing recorded worst at GFSK DH5 middle channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
5. Remark: Result=Reading value+Factor

**For 30MHz-1GHz**

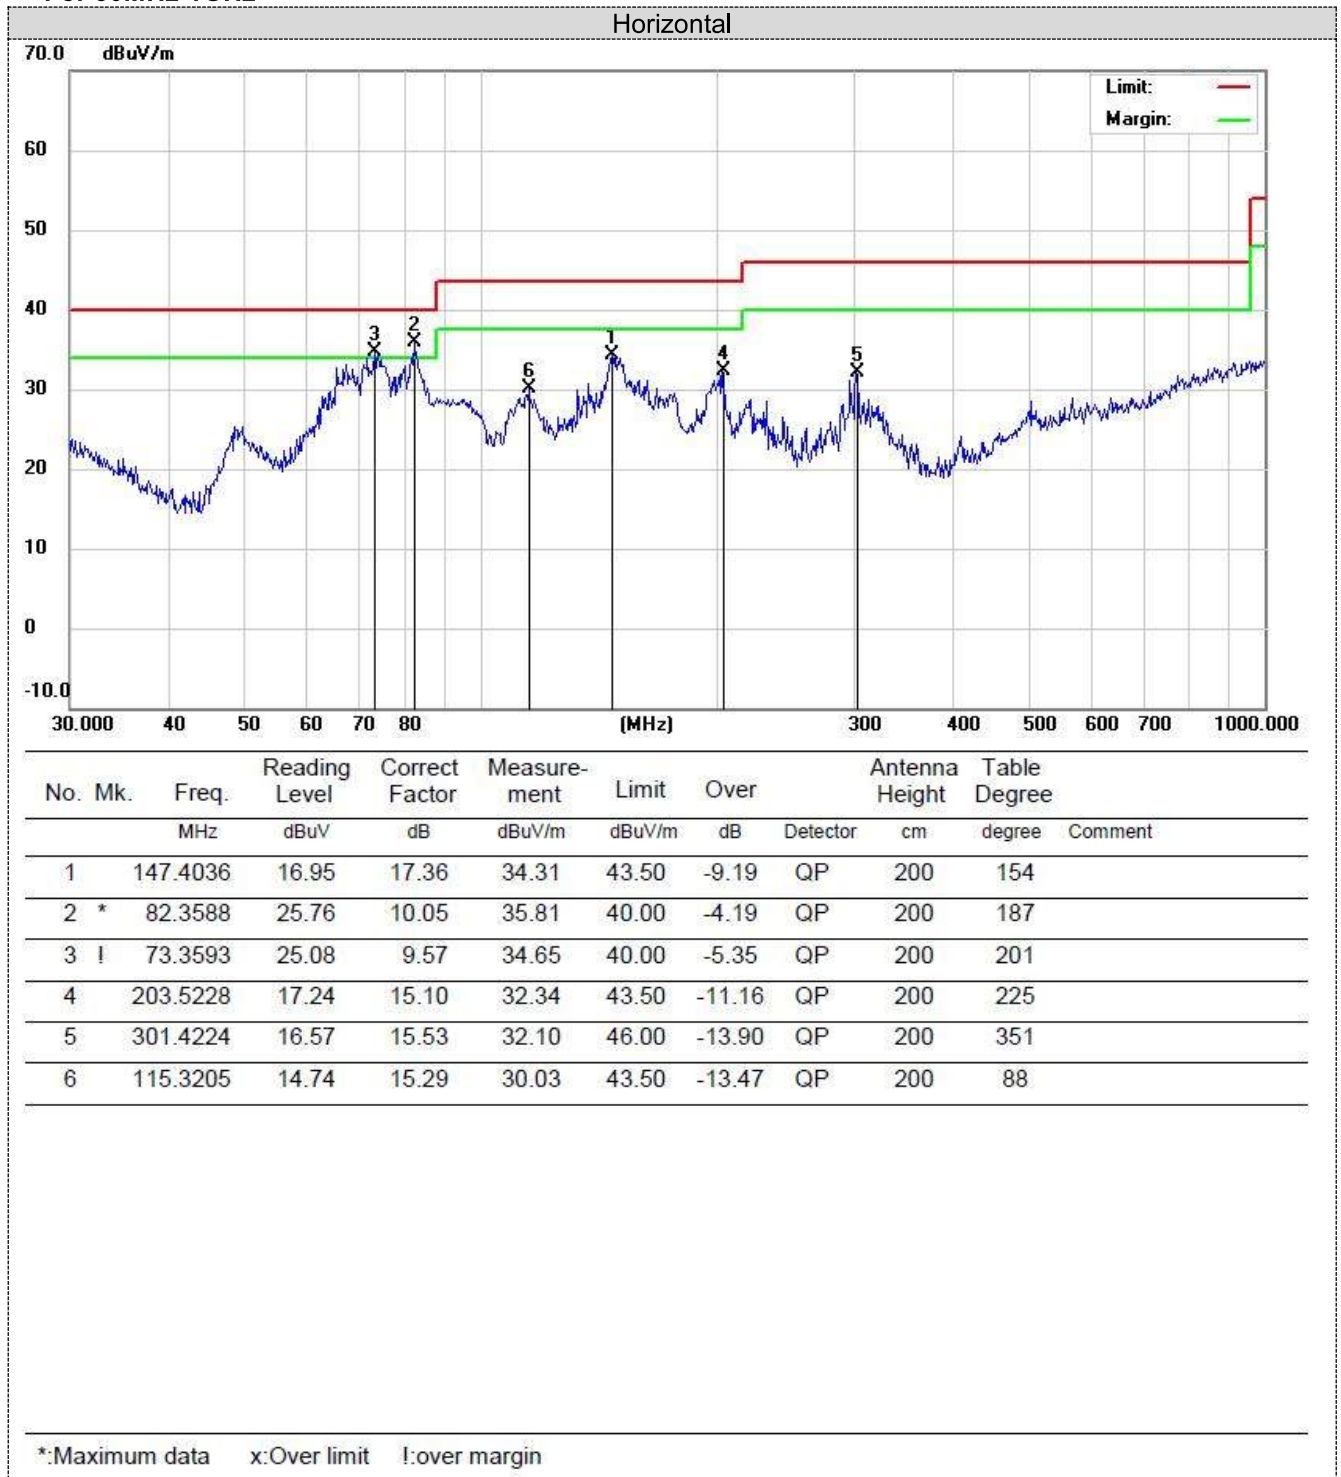

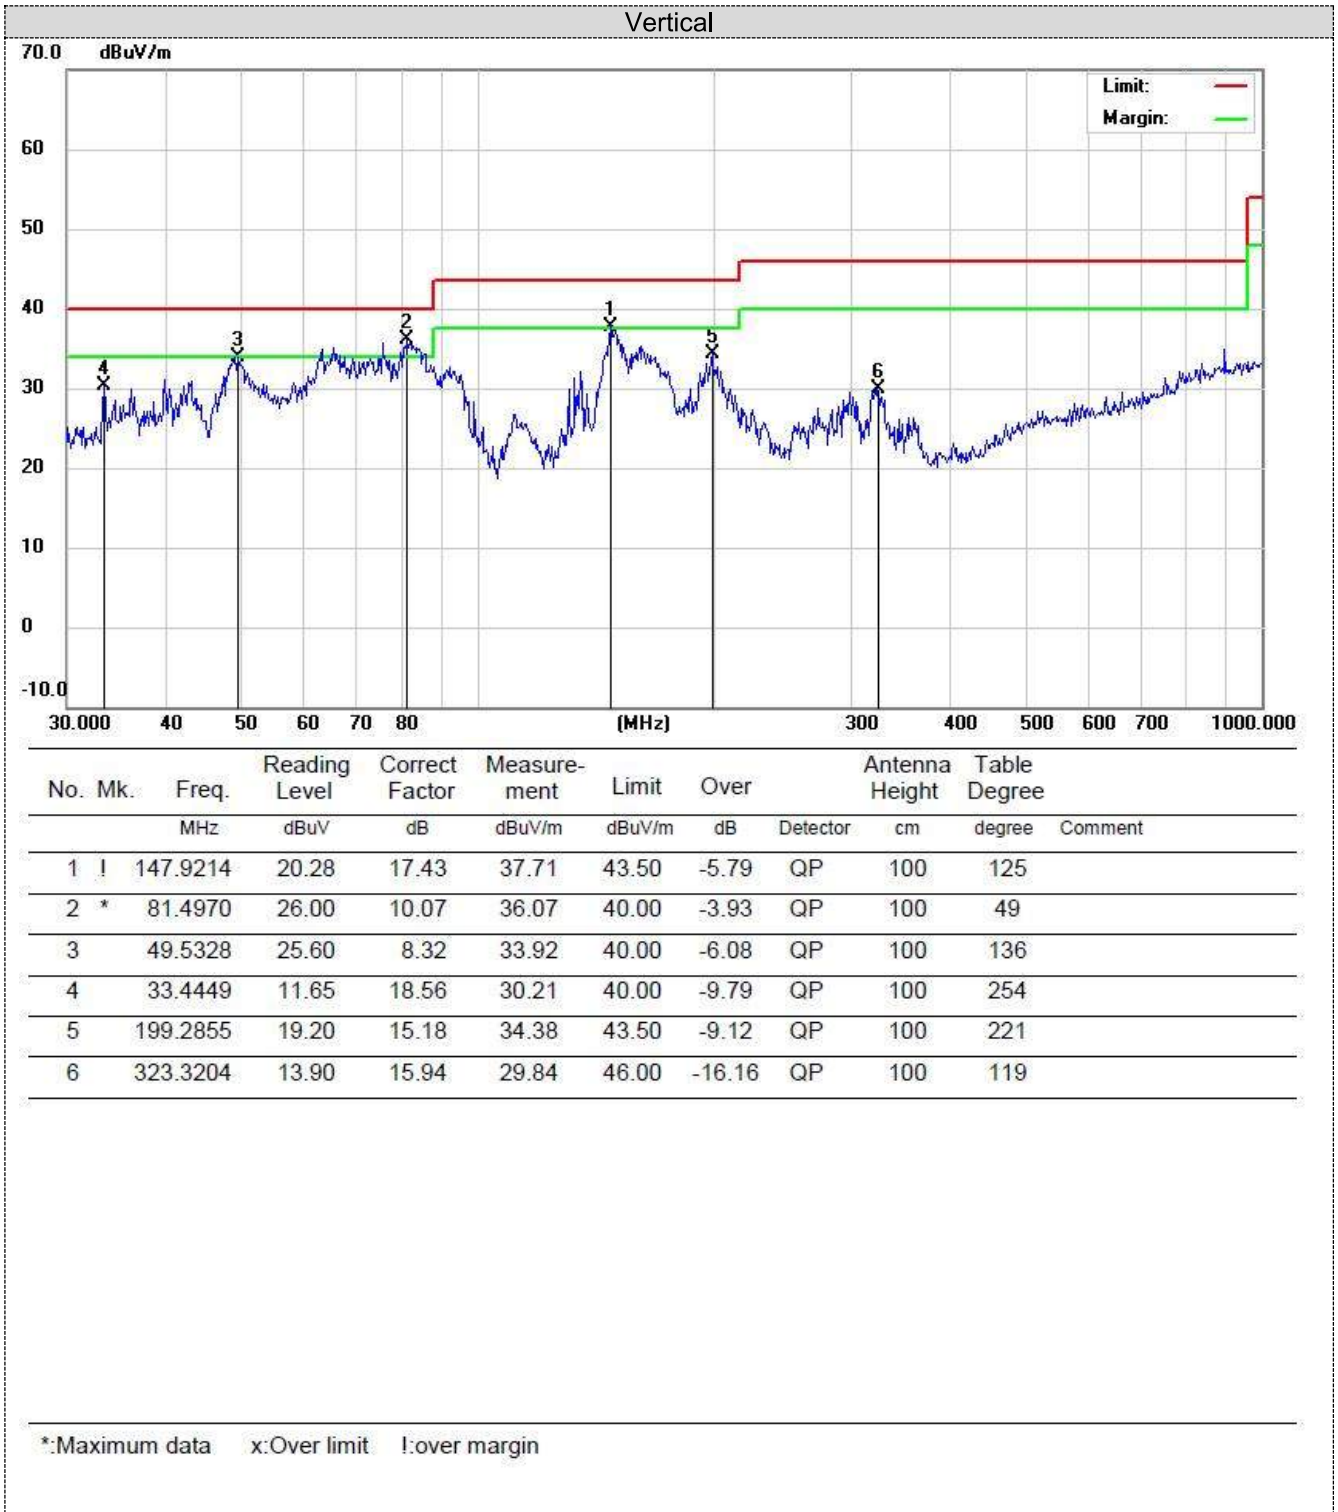

**For 1GHz to 25GHz**

Note: GFSK,  $\pi/4$  DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK (above 1GHz)**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	53.02	PK	74	20.98	51.12	31.42	6.98	36.5	1.9
4804	42.01	AV	54	11.99	40.11	31.42	6.98	36.5	1.9
7206	54.11	PK	74	19.89	43.51	37.03	8.87	35.3	10.6
7206	41.07	AV	54	12.93	30.47	37.03	8.87	35.3	10.6

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	54.58	PK	74	19.42	52.68	31.42	6.98	36.5	1.9
4804	42.98	AV	54	11.02	41.08	31.42	6.98	36.5	1.9
7206	53.97	PK	74	20.03	43.37	37.03	8.87	35.3	10.6
7206	42.04	AV	54	11.96	31.44	37.03	8.87	35.3	10.6

Frequency(MHz):			2441		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	54.17	PK	74	19.83	52.11	30.98	7.58	36.5	2.06
4882	44.79	AV	54	9.21	42.73	30.98	7.58	36.5	2.06
7323	51.65	PK	74	22.35	40.73	37.66	8.56	35.3	10.92
7323	41.49	AV	54	12.51	30.57	37.66	8.56	35.3	10.92

Frequency(MHz):			2441		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	56.85	PK	74	17.15	54.79	30.98	7.58	36.5	2.06
4882	42.7	AV	54	11.3	40.64	30.98	7.58	36.5	2.06
7323	52.48	PK	74	21.52	41.56	37.66	8.56	35.3	10.92
7323	42.42	AV	54	11.58	31.5	37.66	8.56	35.3	10.92

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	57.85	PK	74	16.15	54.78	31.47	7.8	36.2	3.07
4960	44.84	AV	54	9.16	41.77	31.47	7.8	36.2	3.07
7440	52.83	PK	74	21.17	41.09	38.32	8.72	35.3	11.74
7440	43.37	AV	54	10.63	31.63	38.32	8.72	35.3	11.74

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	54.69	PK	74	19.31	51.62	31.47	7.8	36.2	3.07
4960	44.8	AV	54	9.2	41.73	31.47	7.8	36.2	3.07
7440	55.53	PK	74	18.47	43.79	38.32	8.72	35.3	11.74
7440	43.23	AV	54	10.77	31.49	38.32	8.72	35.3	11.74

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier

3. Margin value = Limit value- Emission level.
4. – Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

**Results of Band Edges Test (Radiated)**

Note: GFSK,  $\pi/4$  DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390	58.02	PK	74	15.98	63.43	27.49	3.32	36.22	-5.41
2390	41.43	AV	54	12.57	46.84	27.49	3.32	36.22	-5.41
Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390	57.01	PK	74	16.99	62.42	27.49	3.32	36.22	-5.41
2390	40.71	AV	54	13.29	46.12	27.49	3.32	36.22	-5.41
Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.5	56.86	PK	74	17.14	62.37	27.45	3.38	36.34	-5.51
2483.5	39.4	AV	54	14.6	44.91	27.45	3.38	36.34	-5.51
Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.5	57.15	PK	74	16.85	62.66	27.45	3.38	36.34	-5.51
2483.5	42.06	AV	54	11.94	47.57	27.45	3.38	36.34	-5.51

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)- Pre-amplifier
3. Margin value = Limit value- Emission level.
4. – Mean the PK detector measured value is below average limit.

### 5.3 Maximum Peak Output Power


#### Limit

The Maximum Peak Output Power Measurement is 125mW (20.97).

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the powersensor.

#### Test Configuration

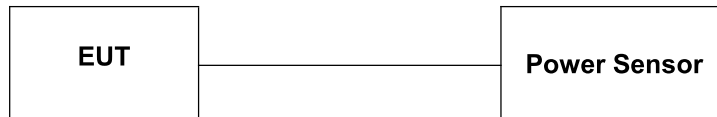

#### Test Results

See Appendix I

## 5.4 20dB Bandwidth

### Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### Test Configuration



### Test Results

See Appendix III

## 5.5 Frequency Separation

### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $\frac{2}{3} * 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

### TEST CONFIGURATION



### TEST RESULTS

See Appendix IV

## 5.6 Number of hopping frequency

### Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

### Test Configuration



### Test Results

See Appendix VIII



## 5.7 Time of Occupancy (Dwell Time)

### Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

### Test Configuration



### Test Results

See Appendix VII

## 5.8 Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### Test Results

See Appendix V

### 5.9 Pseudorandom Frequency Hopping Sequence

#### TEST APPLICABLE


**For 47 CFR Part 15C section 15.247 (a) (1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

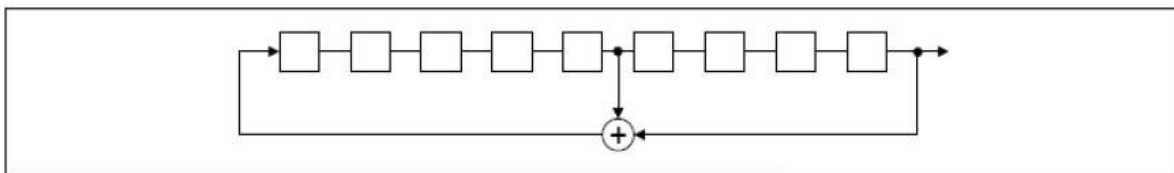

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

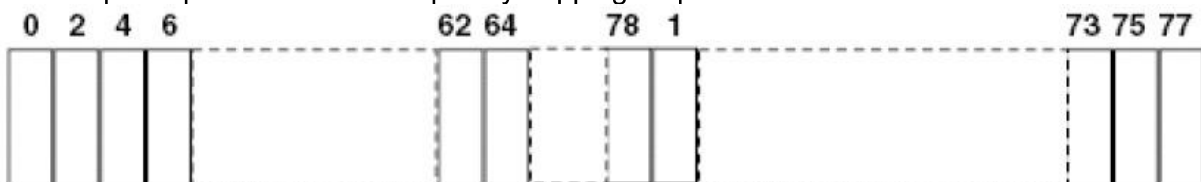

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

## 5.10 Antenna Requirement

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **Refer to statement below for compliance**



The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Antenna Connected Construction**

The directional gains of antenna used for transmitting is 0.07dBi, and the antenna is an PCB Antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

Results: Compliance.

## 6 Test Setup Photos of the EUT

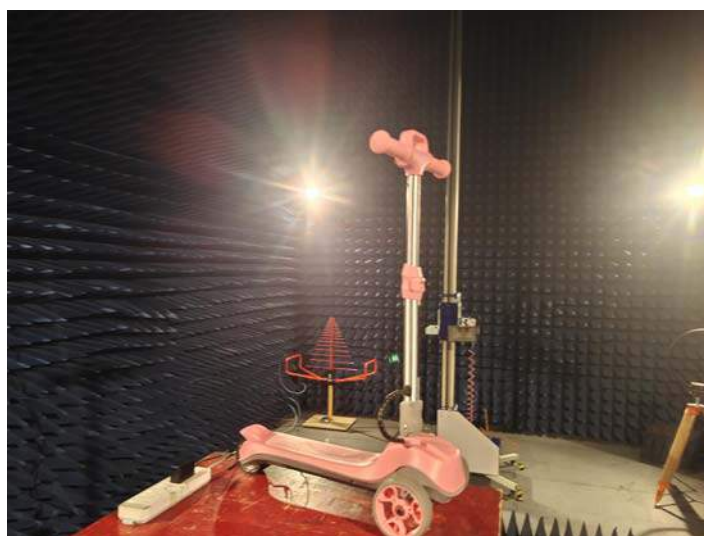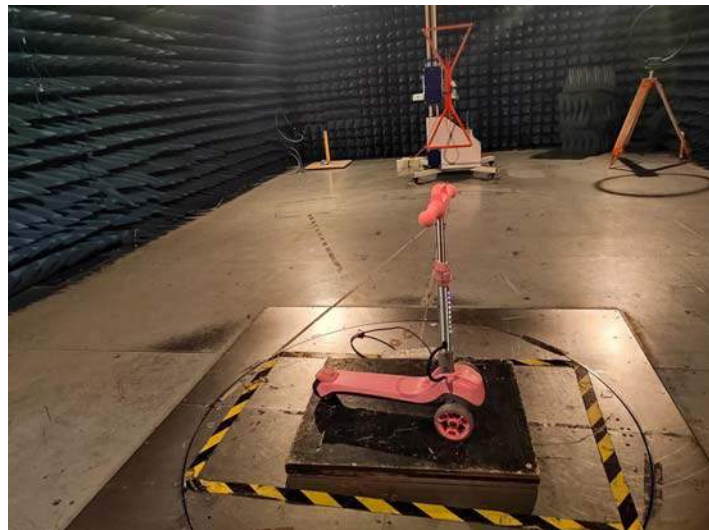

## **7 Photos of the EUT**

See related photo report.

## APPENDIX I. Conducted Peak Output Power

## Test Result

Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
GFSK	DH5	0	-0.702	0.851	None	30	PASS
		39	1.091	1.286	None		PASS
		78	-0.834	0.825	None		PASS
$\pi/4$ DQPSK	2-DH5	0	1.271	1.340	None	20.97	PASS
		39	-0.197	0.956	None		PASS
		78	0.950	1.245	None		PASS
8DPSK	3-DH5	0	1.410	1.384	None		PASS
		39	-0.183	0.959	None		PASS
		78	-1.813	0.659	None		PASS

## APPENDIX II. 99% Bandwidth

### Test Result

Modulation	Channel	99% BW (MHz)
GFSK	0	0.99908
	39	0.99778
	78	0.99703
$\pi$ /4DQPSK	0	1.0426
	39	1.0691
	78	1.0548
8DPSK	0	1.1081
	39	1.1163
	78	1.1147

### Test Graphs



GFSK\_DH5\_Channel 0



$\pi$ /4DQPSK\_2-DH5\_Channel 0



GFSK\_DH5\_Channel 39



$\pi$ /4DQPSK\_2-DH5\_Channel 39





GFSK\_DH5\_Channel 78



π/4DQPSK\_2-DH5\_Channel 78



8DPSK\_3-DH5\_Channel 0



8DPSK\_3-DH5\_Channel 39



8DPSK\_3-DH5\_Channel 78


Void

### APPENDIX III. 20dB Bandwidth

#### Test Result

Modulation	Channel	Center Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK	0	2402 MHz	1.031
	39	2441 MHz	1.031
	78	2480 MHz	1.031
$\pi/4$ DQPSK	0	2402 MHz	1.140
	39	2441 MHz	1.147
	78	2480 MHz	1.145
8DPSK	0	2402 MHz	1.196
	39	2441 MHz	1.200
	78	2480 MHz	1.180

#### Test Graphs

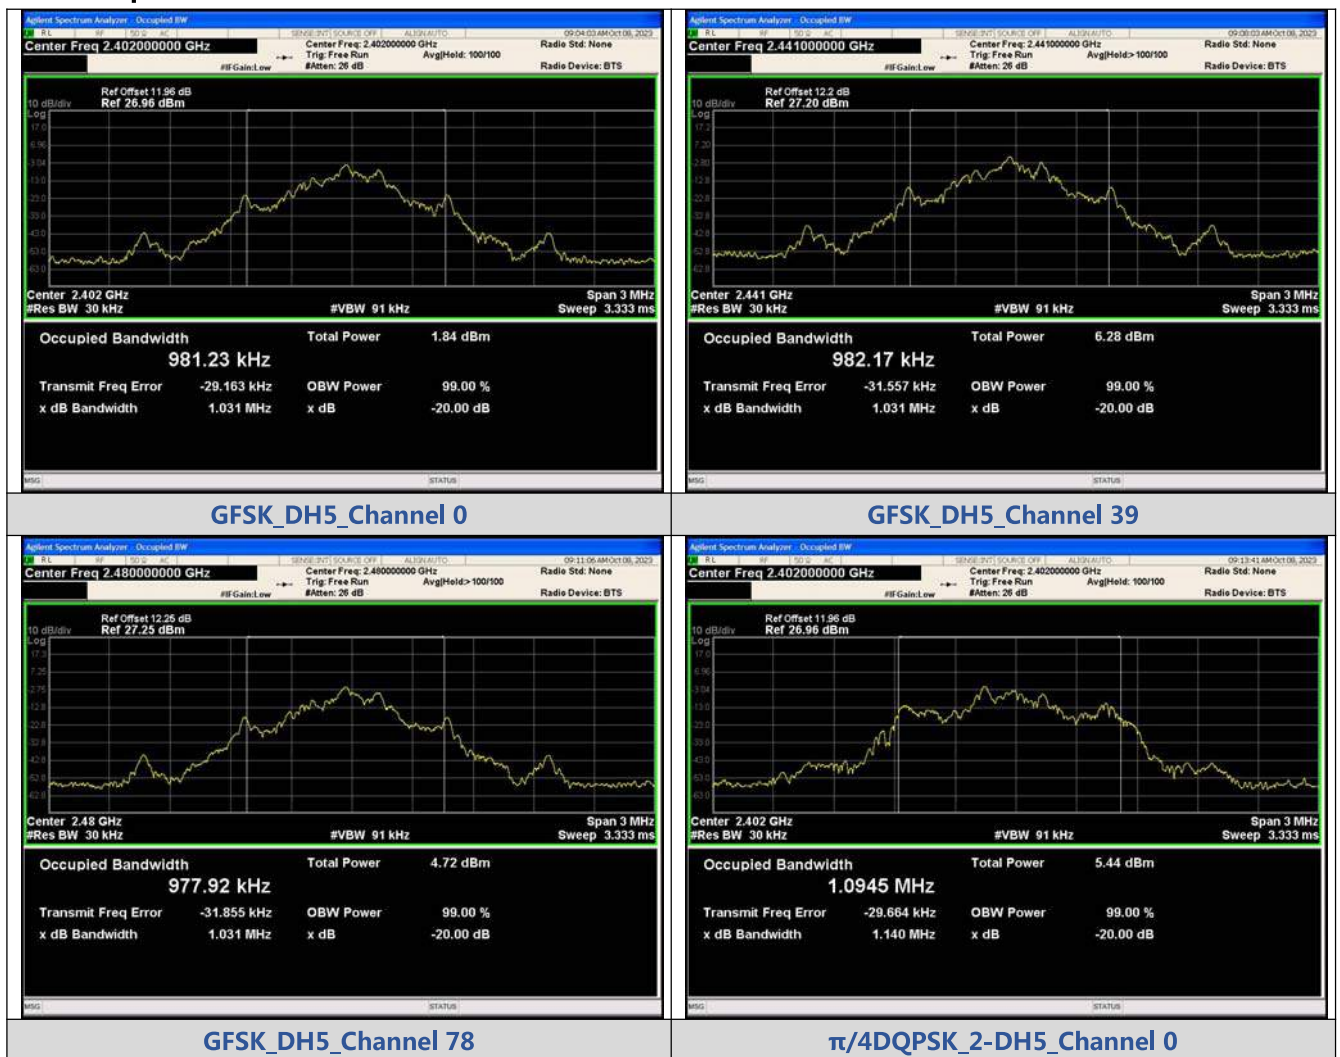



$\pi/4$ DQPSK\_2-DH5\_Channel 39



$\pi/4$ DQPSK\_2-DH5\_Channel 78



8DPSK\_3-DH5\_Channel 0



8DPSK\_3-DH5\_Channel 39



8DPSK\_3-DH5\_Channel 78

Void

## APPENDIX IV. Carrier Frequencies Separation

### Test Result

Modulation	Packet	Left Center frequency (MHz)	Right Center frequency (MHz)	Hopping Frequency Separation (MHz)	Limit (MHz)	Result
GFSK	DH5	2439.97	2440.9706	1.0006	0.687	PASS
GFSK	DH5	2439.9718	2440.9724	1.0006	0.687	PASS
GFSK	DH5	2439.9703	2440.9733	1.0030	0.687	PASS
$\pi/4$ DQPSK	2-DH5	2439.8464	2440.8452	0.9988	0.76	PASS
$\pi/4$ DQPSK	2-DH5	2439.8476	2440.85	1.0024	0.765	PASS
$\pi/4$ DQPSK	2-DH5	2439.9799	2440.8479	0.8680	0.763	PASS
8DPSK	3-DH5	2439.9694	2440.9772	1.0078	0.797	PASS
8DPSK	3-DH5	2439.9928	2441.1344	1.1416	0.8	PASS
8DPSK	3-DH5	2439.9898	2440.9871	0.9973	0.787	PASS

### Test Graphs





$\pi/4$ DQPSK



$\pi/4$ DQPSK



8DPSK



8DPSK



8DPSK

Void

## APPENDIX V. Conducted Out Of Band Emission

## Test Result

## Non-Hopping


Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	0	2400.00	-52.773	-23.84	-28.933	PASS
			2398.31	-50.807	-23.84	-26.967	PASS
			4803.80	-62.789	-23.84	-38.949	PASS
			7205.30	-63.005	-23.84	-39.165	PASS
			9607.50	-64.062	-23.84	-40.222	PASS
			24993.1	-46.183	-23.84	-22.343	PASS
		39	4881.79	-61.450	-19.29	-42.160	PASS
			7322.67	-64.009	-19.29	-44.719	PASS
			9764.80	-64.303	-19.29	-45.013	PASS
			24990.6	-46.333	-19.29	-27.043	PASS
		78	2483.50	-52.083	-20.75	-31.333	PASS
			4959.83	-59.751	-20.75	-39.001	PASS
			7440.66	-63.587	-20.75	-42.837	PASS
			9920.86	-64.564	-20.75	-43.814	PASS
			24932.0	-46.779	-20.75	-26.029	PASS
$\pi/4$ DQPSK	2-DH5	0	2400.00	-51.692	-20.84	-30.852	PASS
			2397.29	-50.471	-20.84	-29.631	PASS
			4803.80	-58.310	-20.84	-37.470	PASS
			7206.60	-63.989	-20.84	-43.149	PASS
			9607.50	-62.319	-20.84	-41.479	PASS
			23830.1	-47.559	-20.84	-26.719	PASS
		39	4881.79	-60.954	-22.45	-38.504	PASS
			7322.05	-62.670	-22.45	-40.220	PASS
			9764.80	-63.669	-22.45	-41.219	PASS
			24853.9	-46.672	-22.45	-24.222	PASS
		78	2483.50	-52.861	-21.08	-31.781	PASS
			4959.83	-59.942	-21.08	-38.862	PASS
			7440.66	-62.817	-21.08	-41.737	PASS
			9920.24	-63.387	-21.08	-42.307	PASS
			24952.6	-46.242	-21.08	-25.162	PASS
8DPSK	3-DH5	0	2400.00	-51.511	-20.5	-31.011	PASS
			2398.60	-50.488	-20.5	-29.988	PASS
			4803.80	-60.748	-20.5	-40.248	PASS
			7205.30	-63.305	-20.5	-42.805	PASS
			9607.50	-63.230	-20.5	-42.730	PASS

		39	24991.3	-46.221	-20.5	-25.721	PASS
			4881.17	-62.841	-22.88	-39.961	PASS
			7322.67	-63.129	-22.88	-40.249	PASS
			9763.55	-63.509	-22.88	-40.629	PASS
			24988.8	-46.385	-22.88	-23.505	PASS
		78	2483.50	-52.784	-23.63	-29.154	PASS
			4959.83	-62.337	-23.63	-38.707	PASS
			7440.66	-63.056	-23.63	-39.426	PASS
			9920.24	-62.941	-23.63	-39.311	PASS
			24915.7	-45.761	-23.63	-22.131	PASS


Test Graphs




Out Of Band Emission  
GFSK\_DH5\_Channel 0

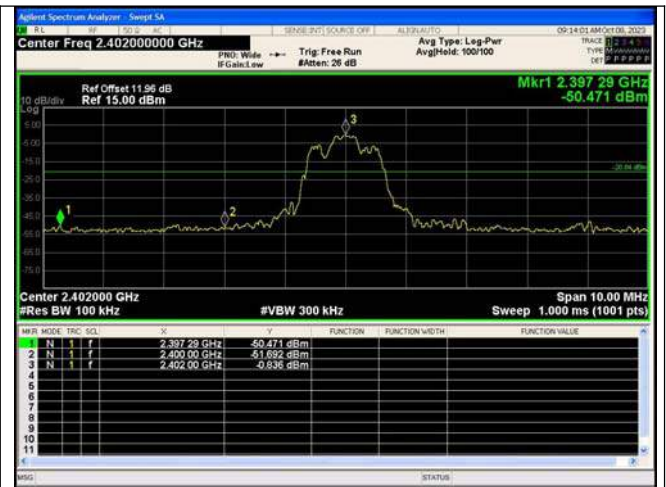


Out Of Band Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 0

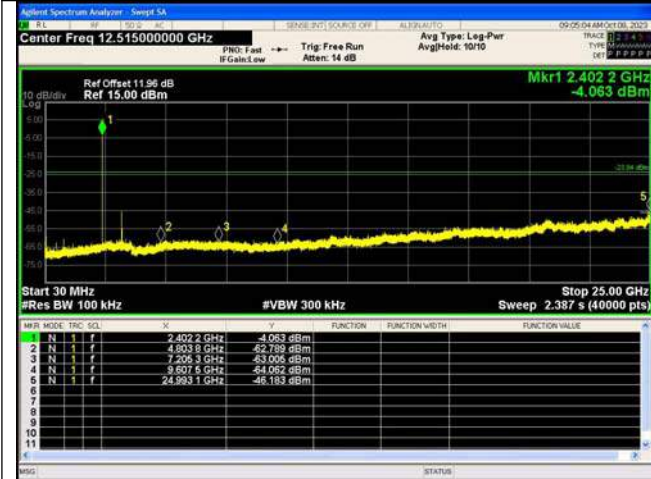


Spurious Emission  
GFSK\_DH5\_Channel 0

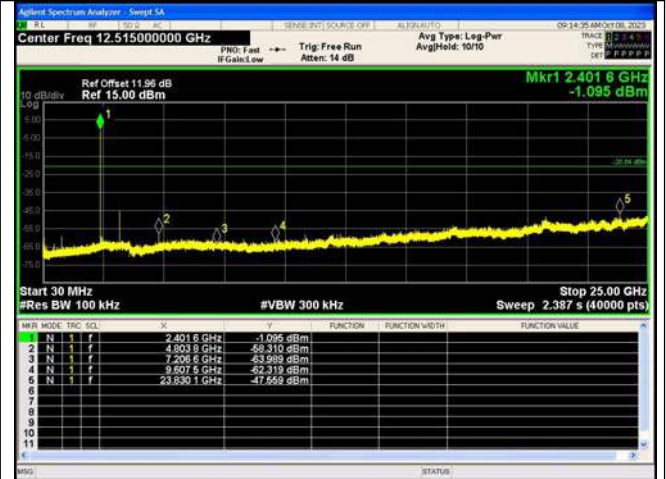


Spurious Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 0

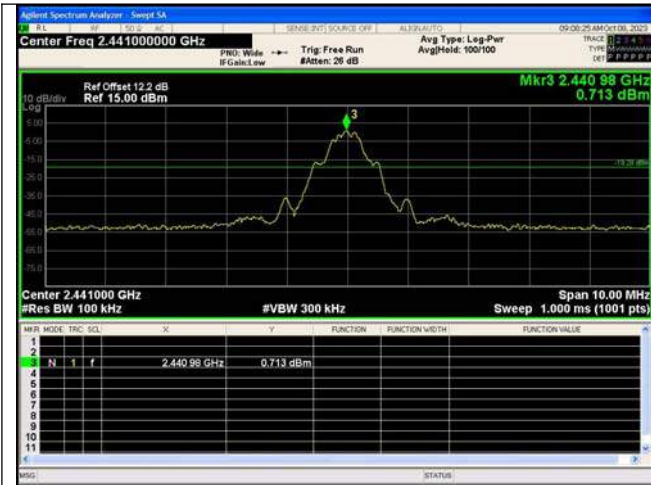


Out Of Band Emission  
 GFSK\_DH5\_Channel 39

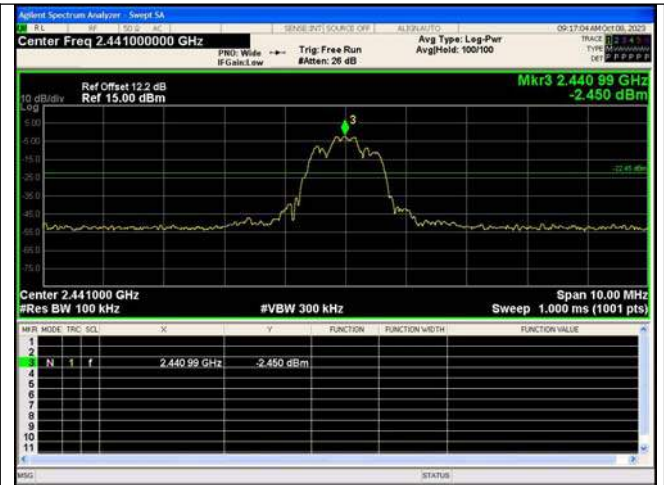


Out Of Band Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 39

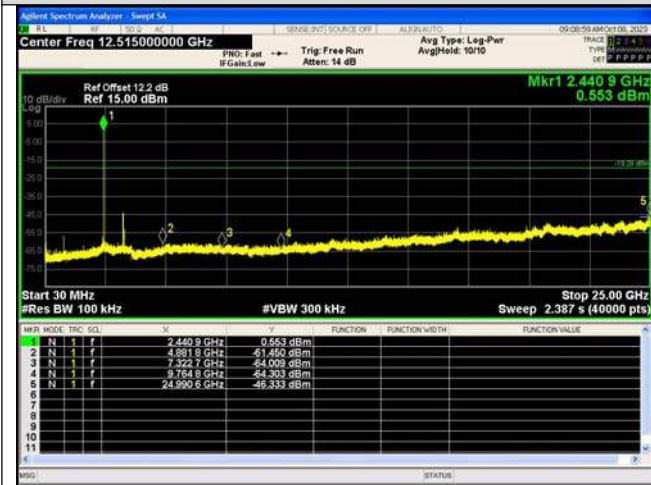


Spurious Emissions  
 GFSK\_DH5\_Channel 39

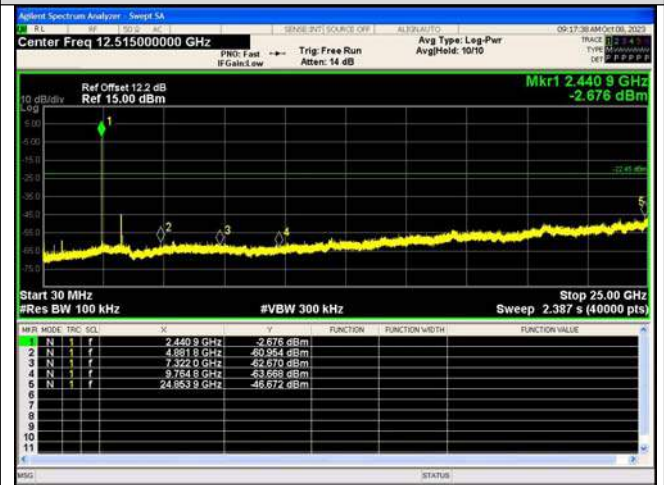

Spurious Emissions  
 $\pi/4$ DQPSK\_2-DH5\_Channel 39

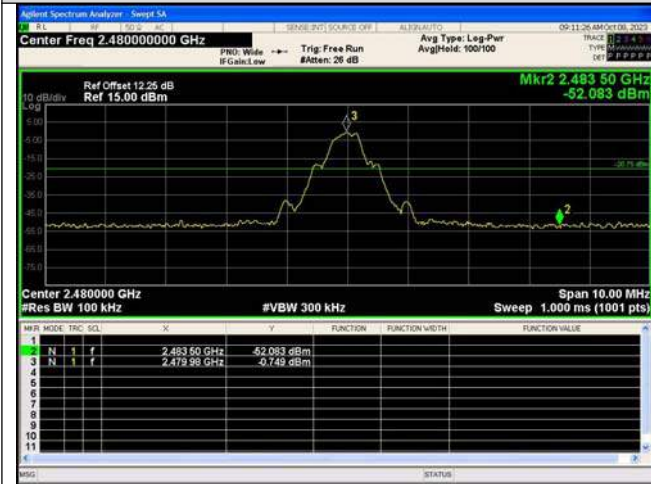


Out Of Band Emission  
 GFSK\_DH5\_Channel 78

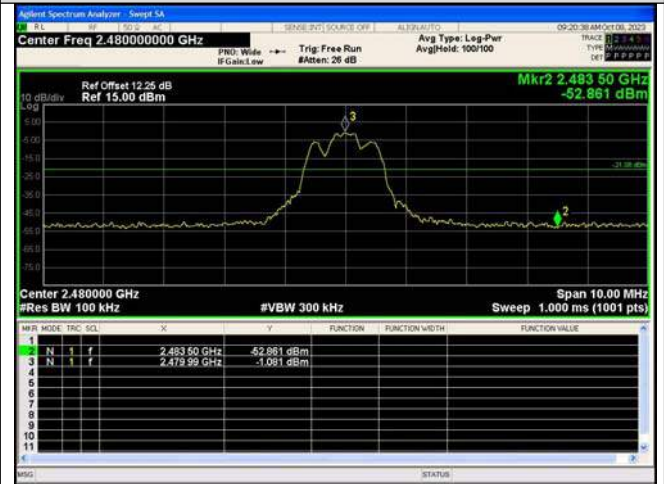


Out Of Band Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 78



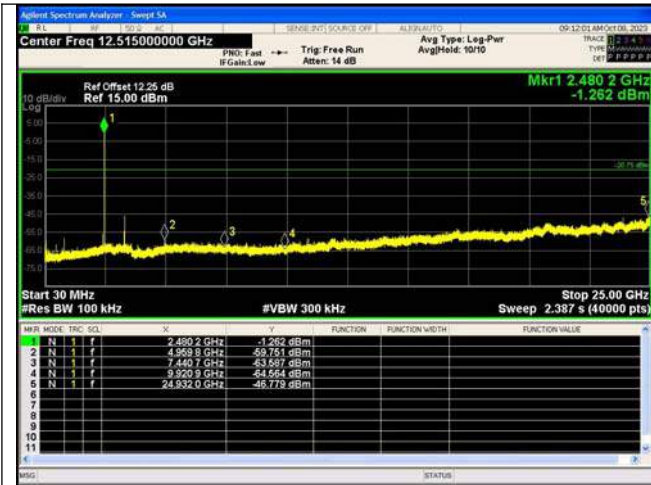


Spurrious Emission  
GFSK\_DH5\_Channel 78

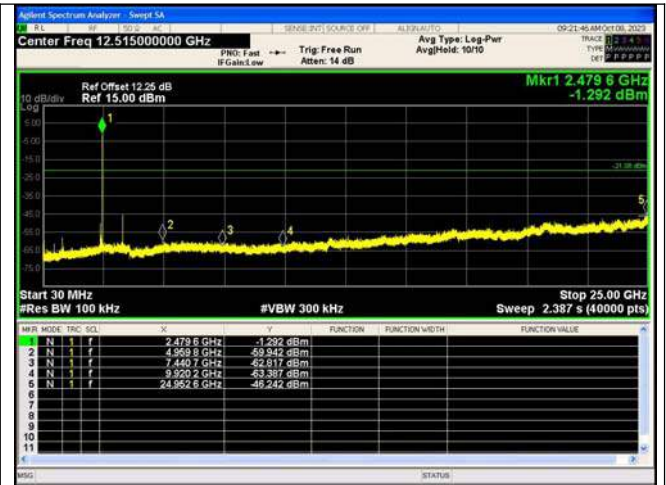


Spurrious Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 78




Out Of Band Emission  
8DPSK\_3-DH5\_Channel 0

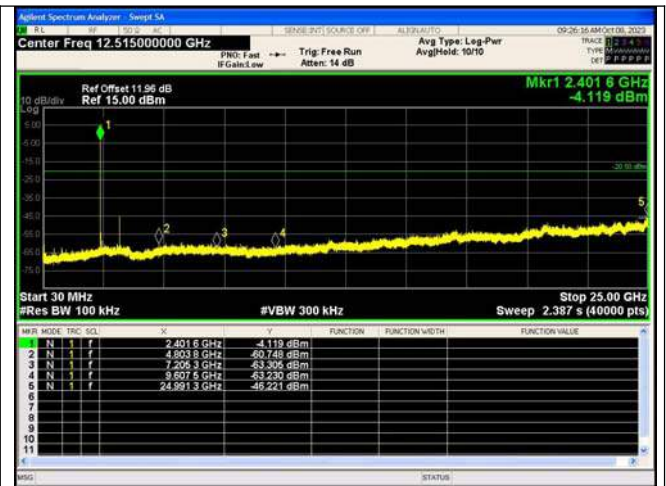


Spurrious Emission  
8DPSK\_3-DH5\_Channel 0

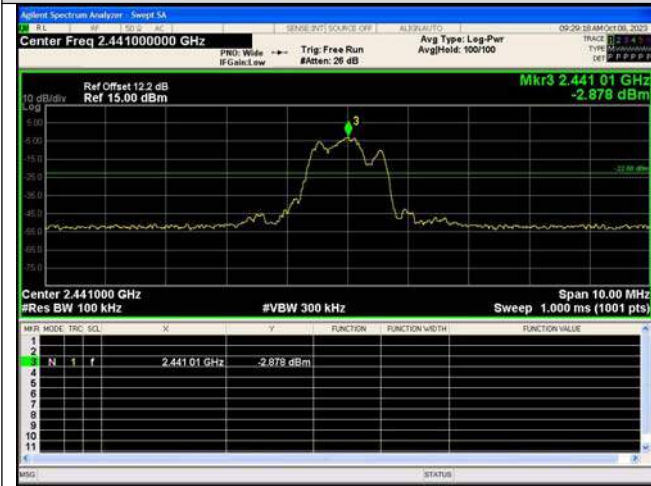


Out Of Band Emission  
8DPSK\_3-DH5\_Channel 39

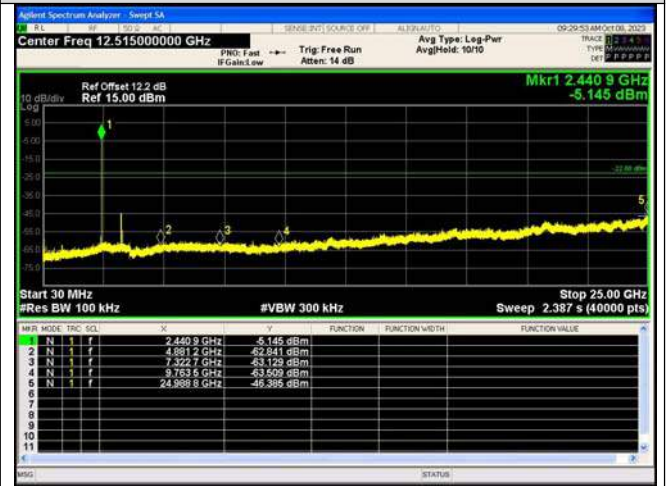

Spurrious Emissions  
8DPSK\_3-DH5\_Channel 39

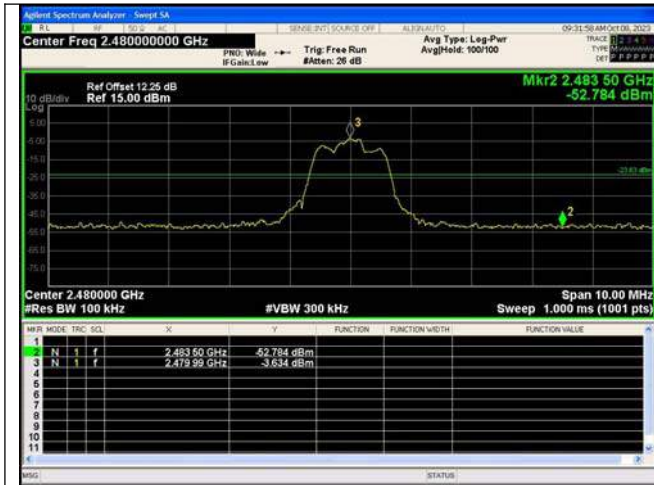

**Out Of Band Emission**  
8DPSK\_3-DH5\_Channel 78

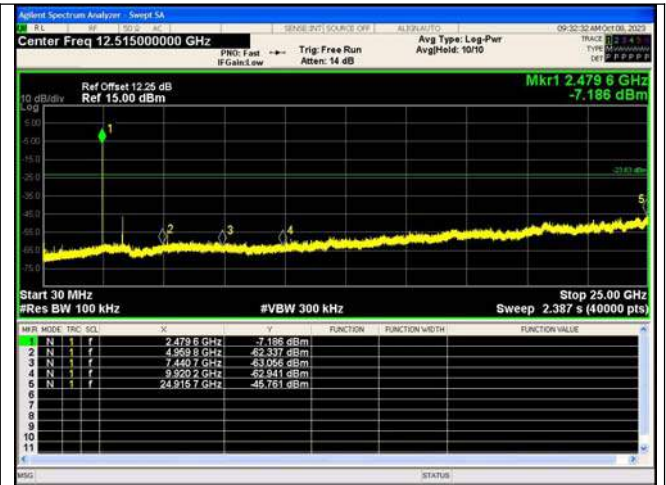


**Spurious Emission**  
8DPSK\_3-DH5\_Channel 78


## APPENDIX VI. Duty Cycle

### Test Result


Modulation	Packets	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
GFSK	DH5	0	2.879	3.735	77.09	0.7709	1.13
		39	2.869	3.735	76.82	0.7682	1.1453
		78	2.879	3.745	76.88	0.7688	1.1419
$\pi/4$ DQPSK	2-DH5	0	2.889	3.735	77.36	0.7736	1.1148
		39	2.889	3.745	77.15	0.7715	1.1266
		78	2.889	3.745	77.15	0.7715	1.1266
8DPSK	3-DH5	0	2.889	3.745	77.15	0.7715	1.1266
		39	2.879	3.735	77.09	0.7709	1.13
		78	2.889	3.745	77.15	0.7715	1.1266

### Test Graphs

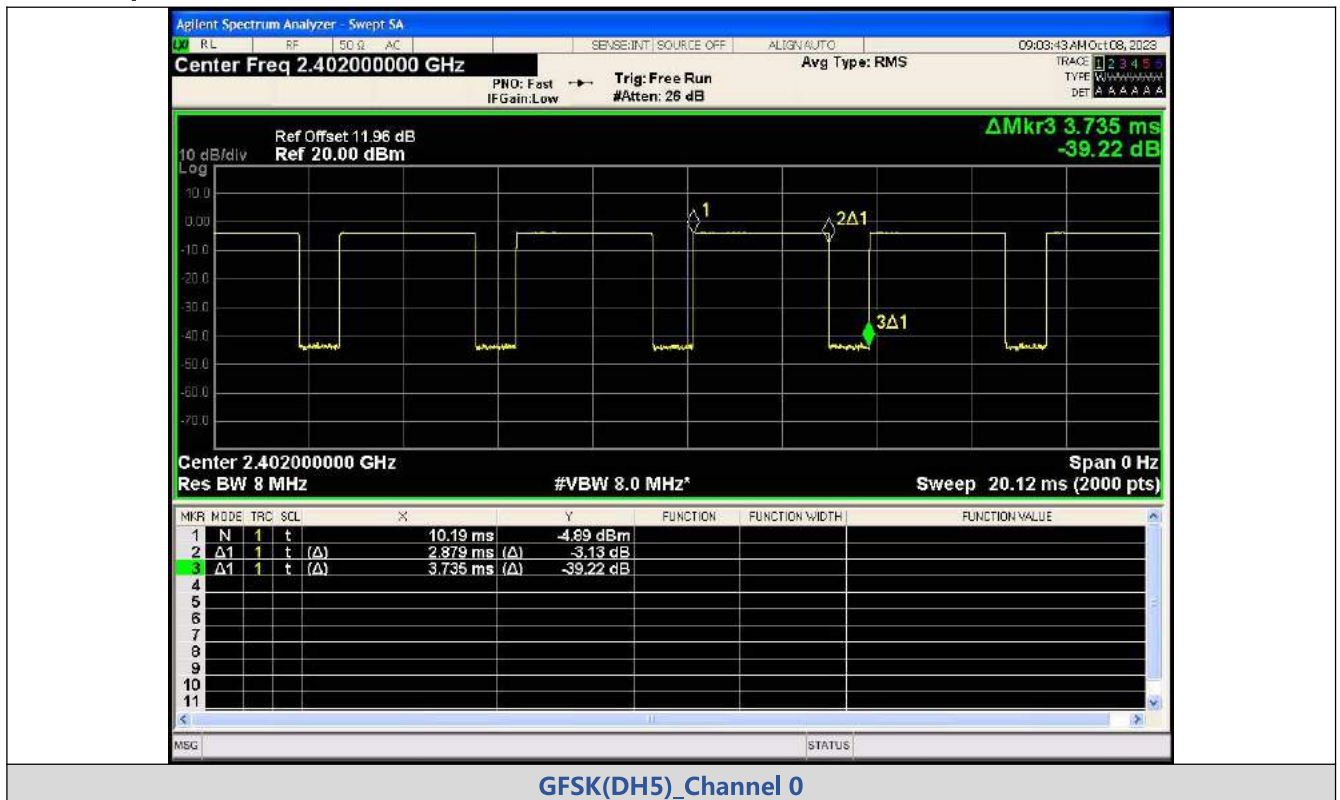


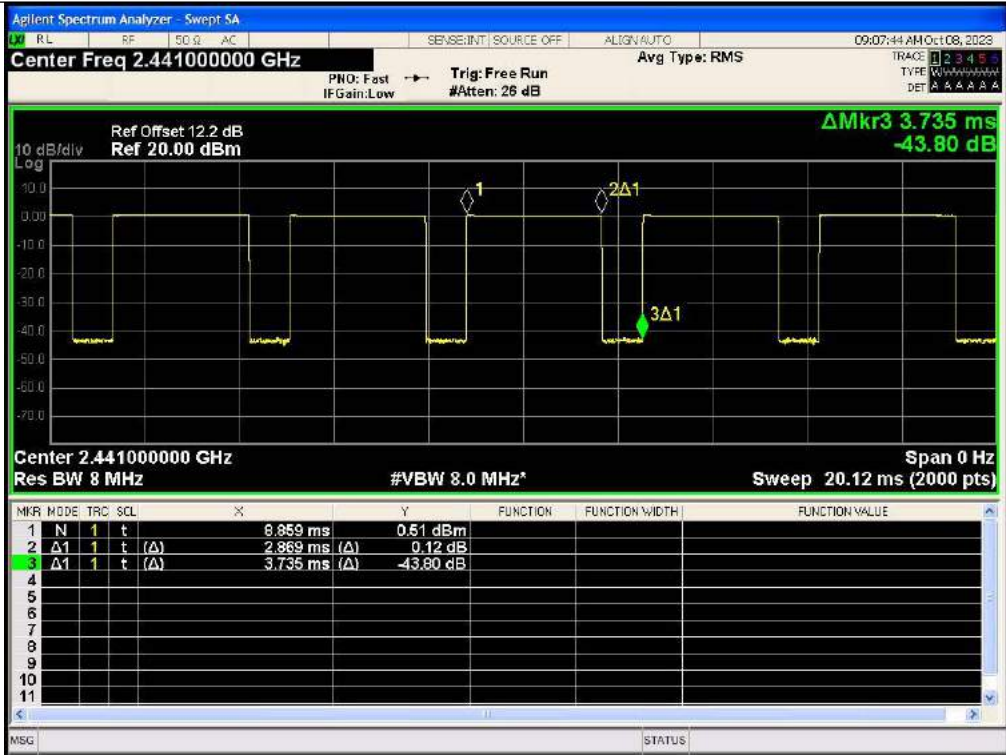


GFSK(DH5)\_Channel 39

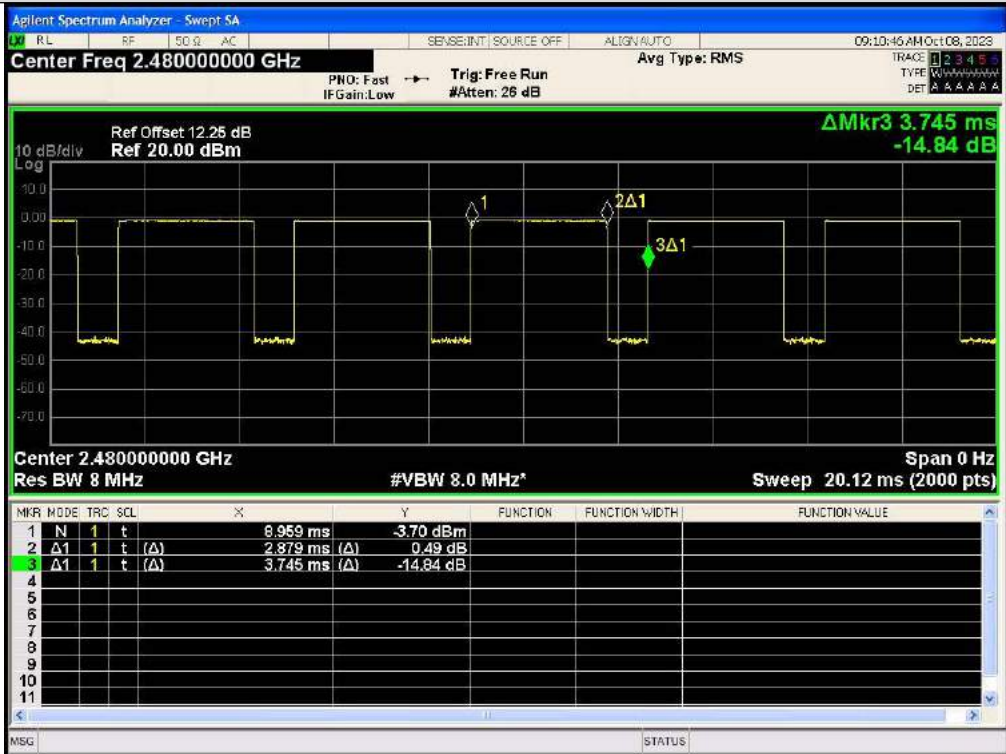


GFSK(DH5)\_Channel 78

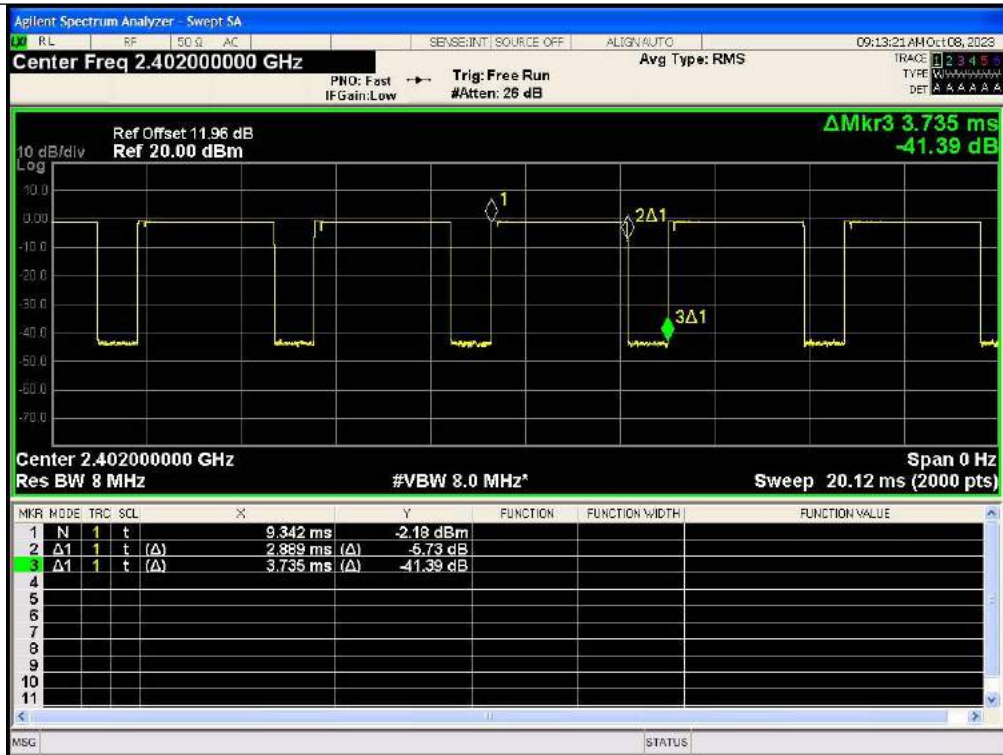


π/4DQPSK(2-DH5)\_Channel 0

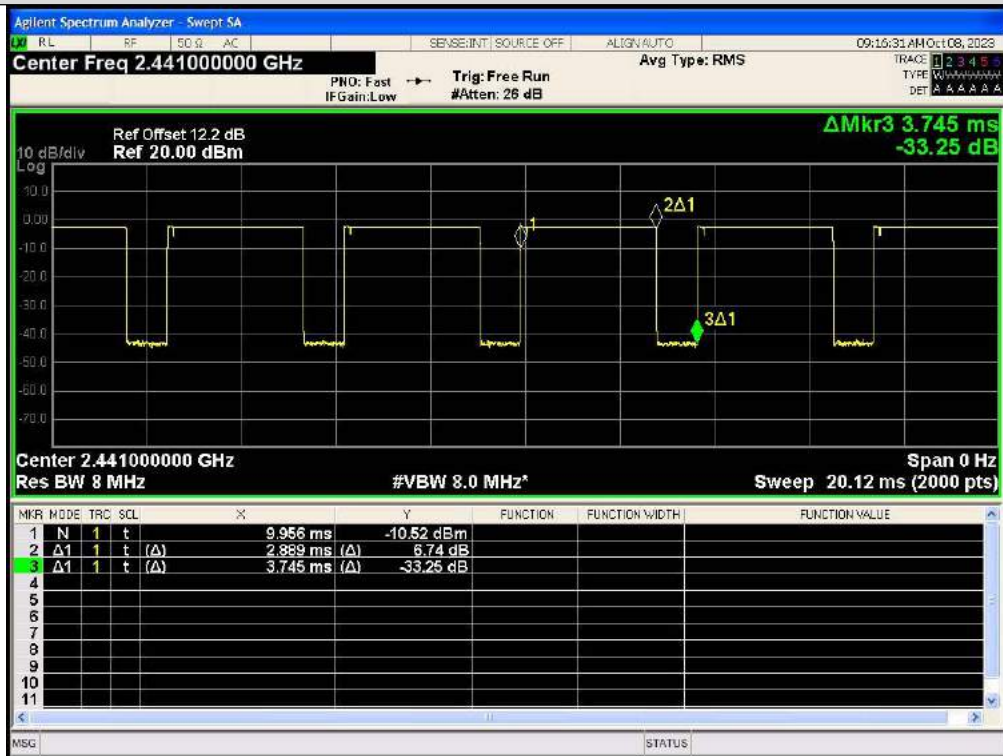


π/4DQPSK(2-DH5)\_Channel 39

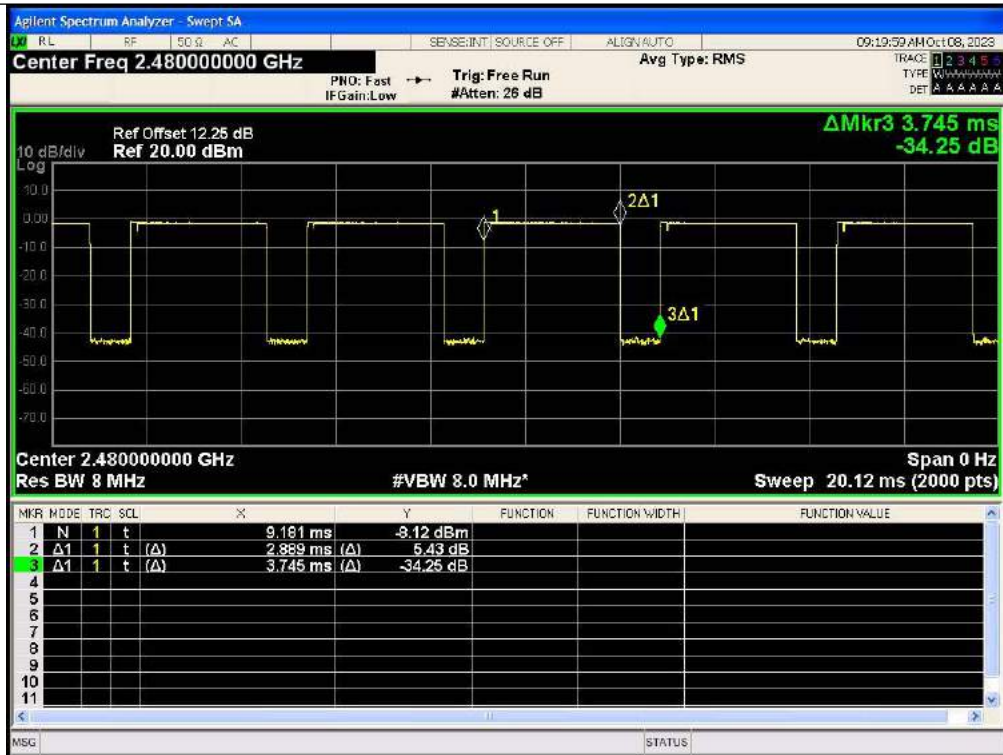


$\pi/4$ DQPSK(2-DH5)\_Channel 78

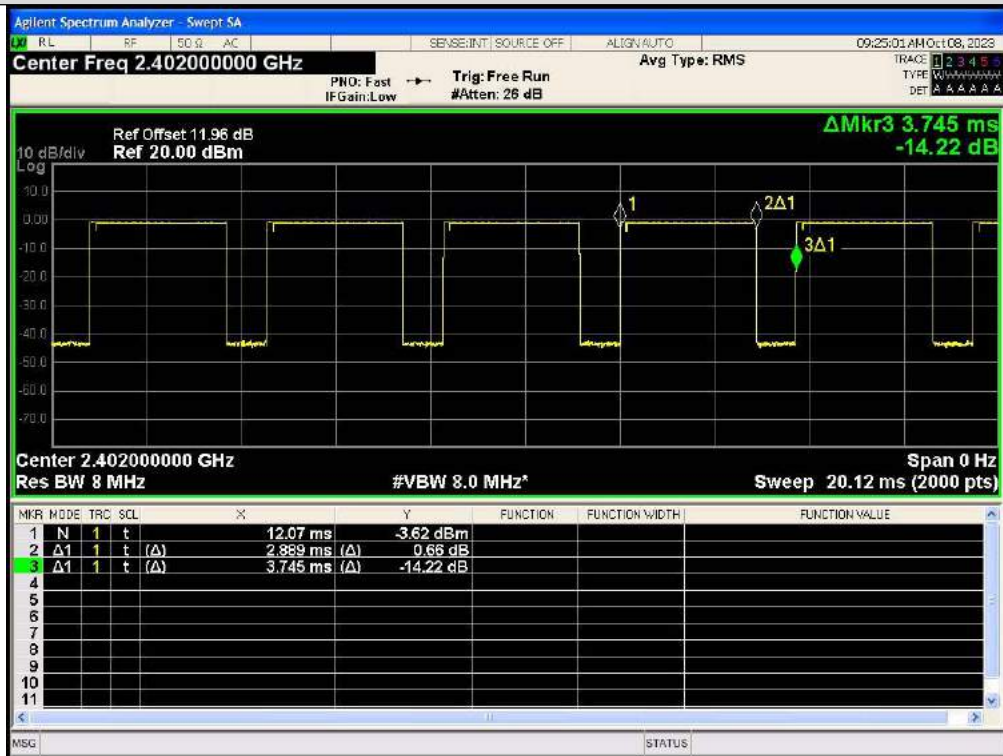

8DPSK(3-DH5)\_Channel 0

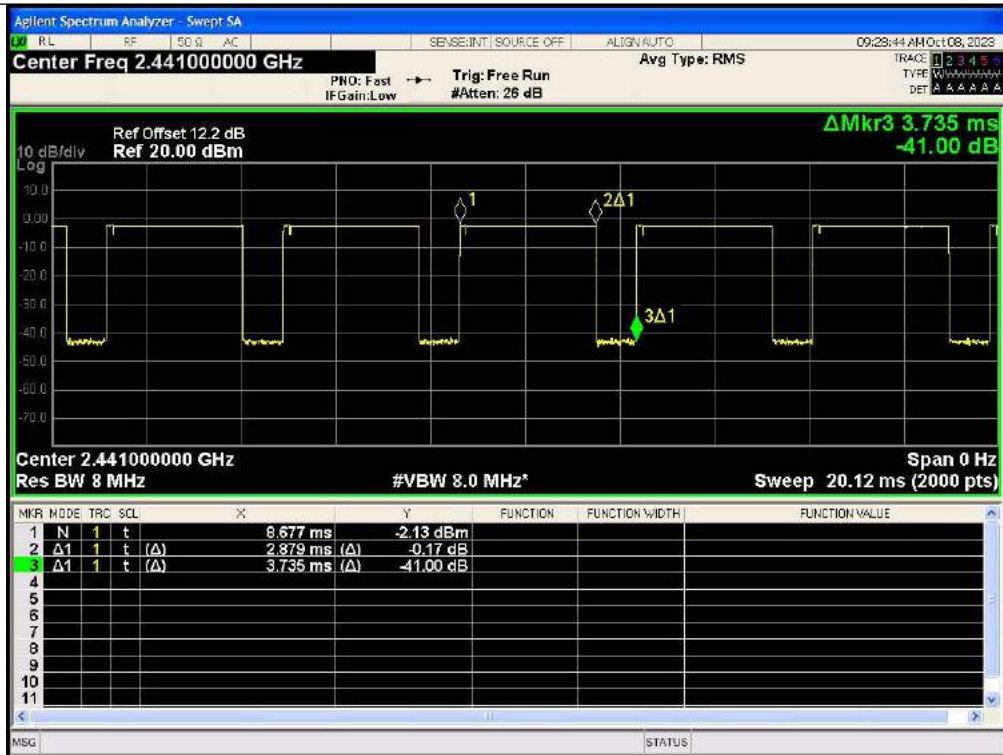

8DPSK(3-DH5)\_Channel 39

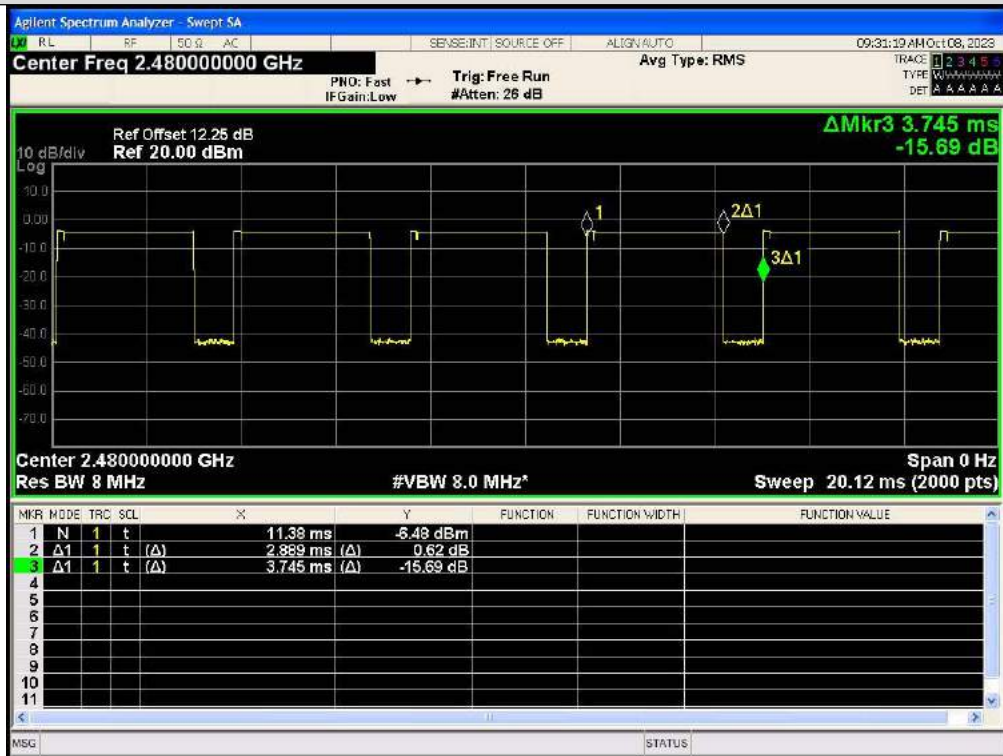


8DPSK(3-DH5)\_Channel 78

# APPENDIX VII. Dwell Time

## Test Result


Modulation	Packet	Channel	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH1	CH39 (2441MHz)	0.3756	318	119.44	< 400	PASS
	DH3		1.632	163	266.02		PASS
	DH5		2.880	112	322.56		PASS
$\pi$ /4DQPSK	2-DH1		0.3072	318	97.69		PASS
	2-DH3		1.644	150	246.6		PASS
	2-DH5		2.896	106	306.98		PASS
8DPSK	3-DH1		0.3888	320	124.42		PASS
	3-DH3		1.632	153	249.7		PASS
	3-DH5		2.896	92	266.43		PASS

## Test Graphs

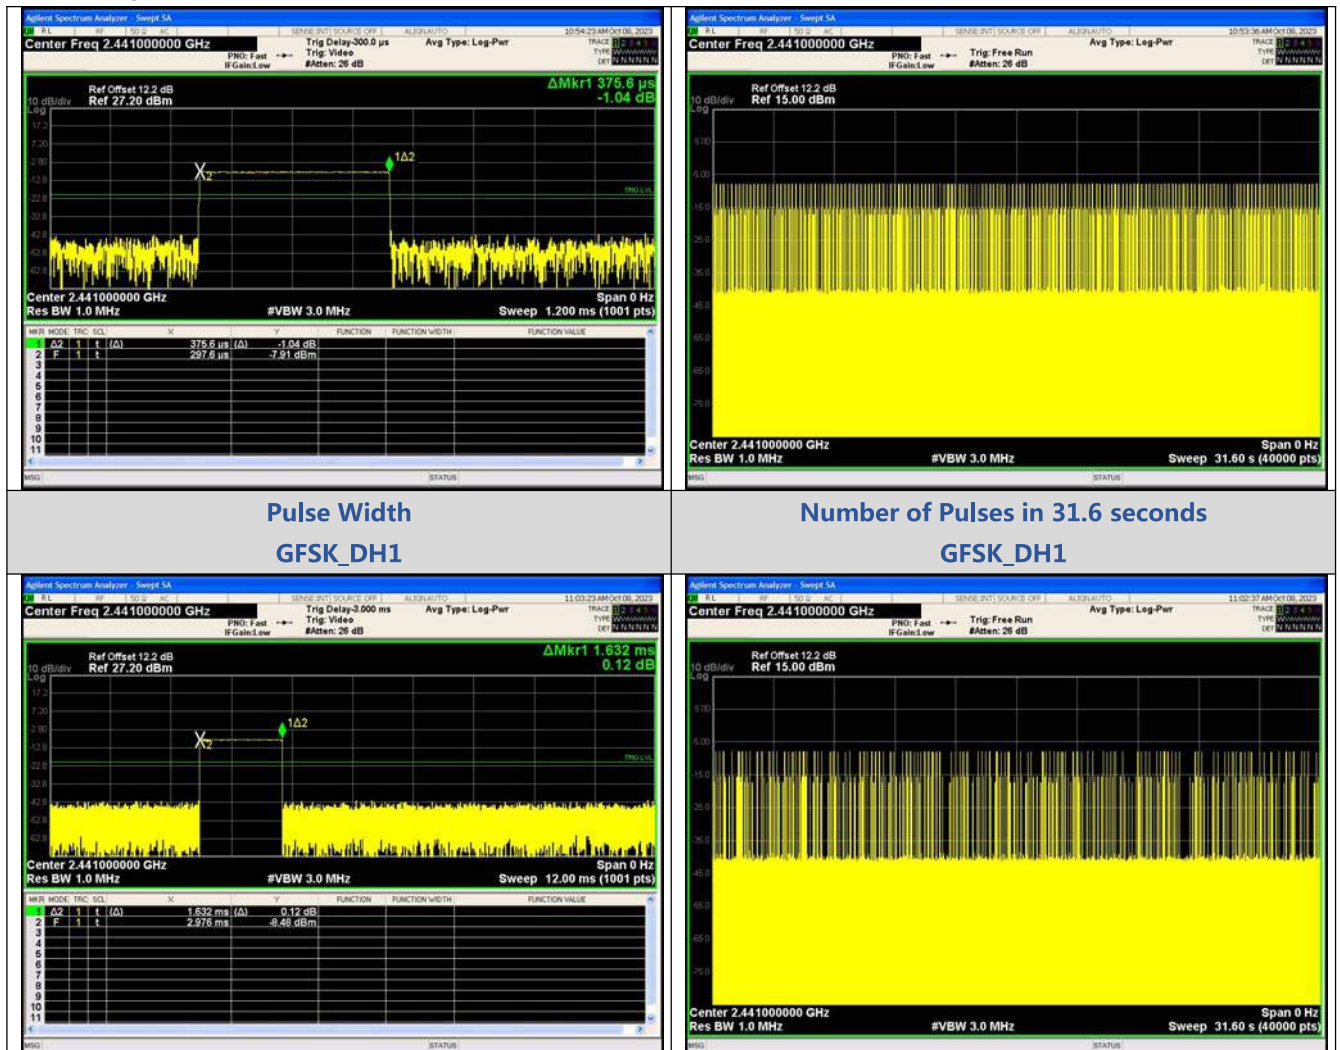





Pulse Width  
GFSK\_DH3

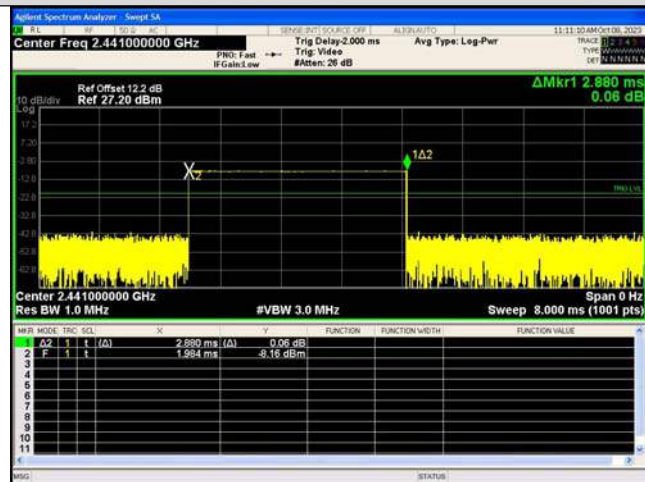


Number of Pulses in 31.6 seconds  
GFSK\_DH3

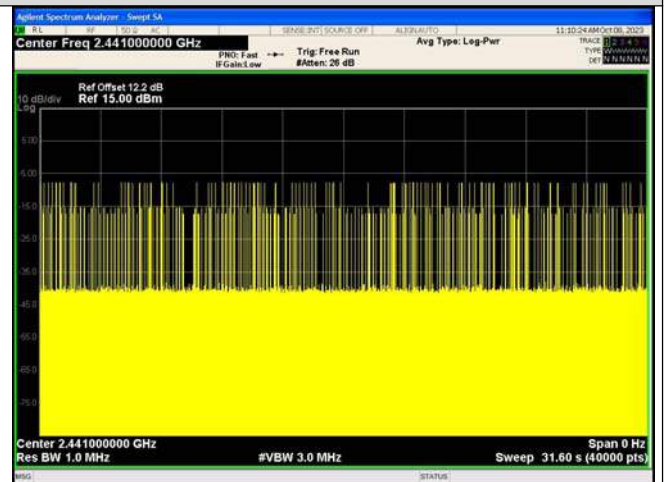


Pulse Width  
GFSK\_DH5

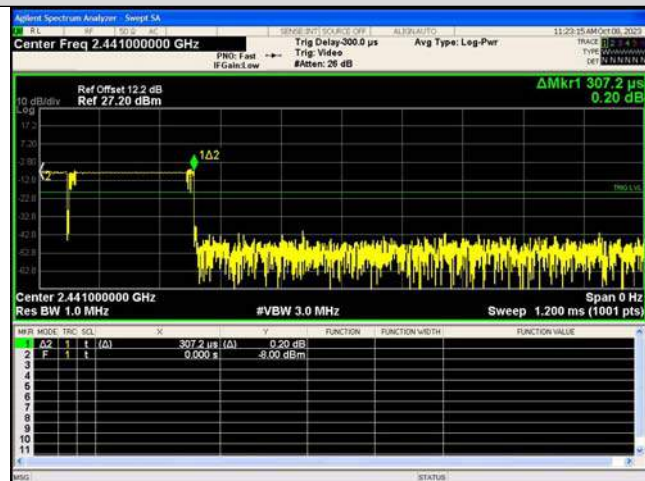


Number of Pulses in 31.6 seconds  
GFSK\_DH5

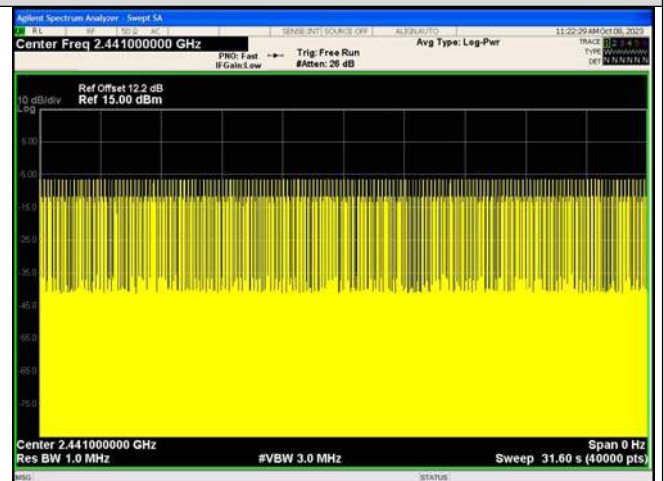

Pulse Width  
 $\pi/4$ DQPSK\_2-DH1

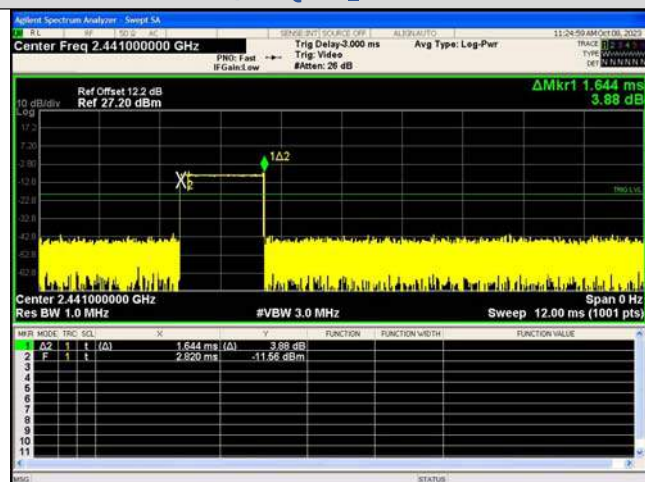

Number of Pulses in 31.6 seconds  
 $\pi/4$ DQPSK\_2-DH1

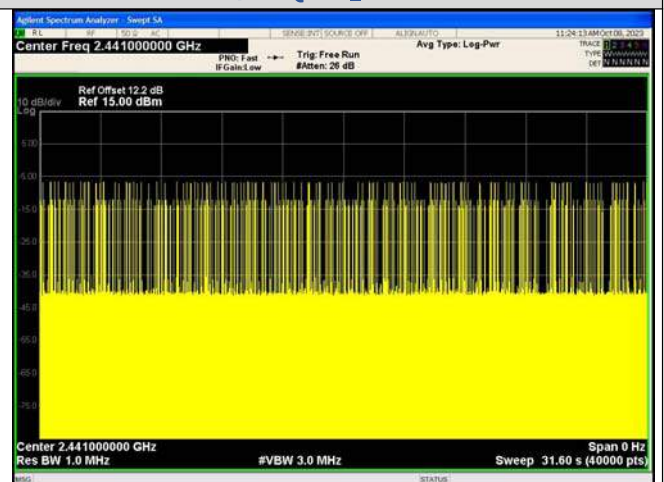


Pulse Width  
 $\pi/4$ DQPSK\_2-DH3





Number of Pulses in 31.6 seconds  
 $\pi/4$ DQPSK\_2-DH3



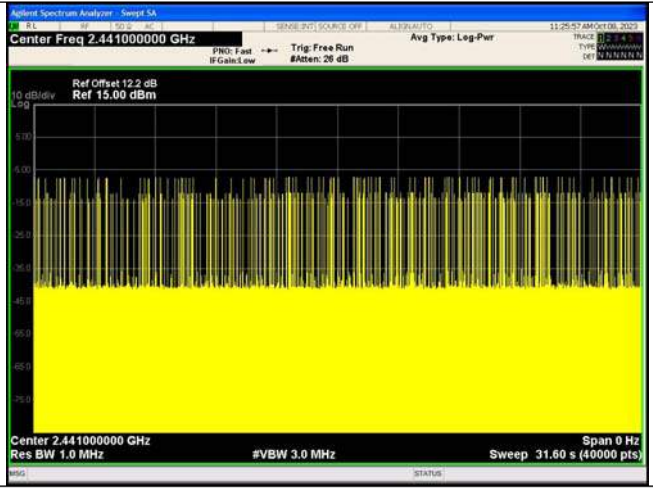



**Pulse Width**  
 $\pi/4$ DQPSK\_2-DH5

**Number of Pulses in 31.6 seconds**  
 $\pi/4$ DQPSK\_2-DH5

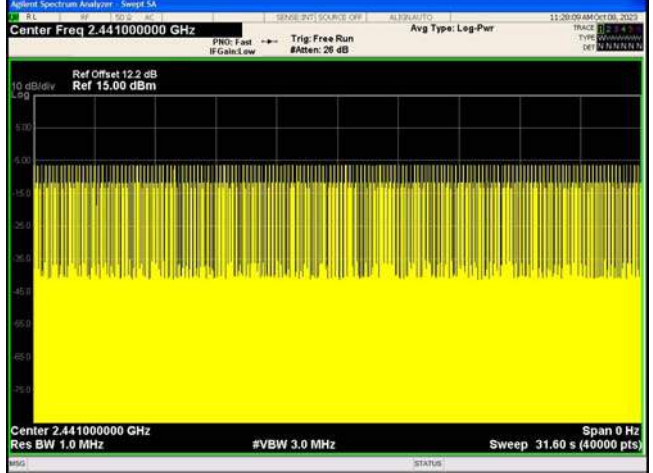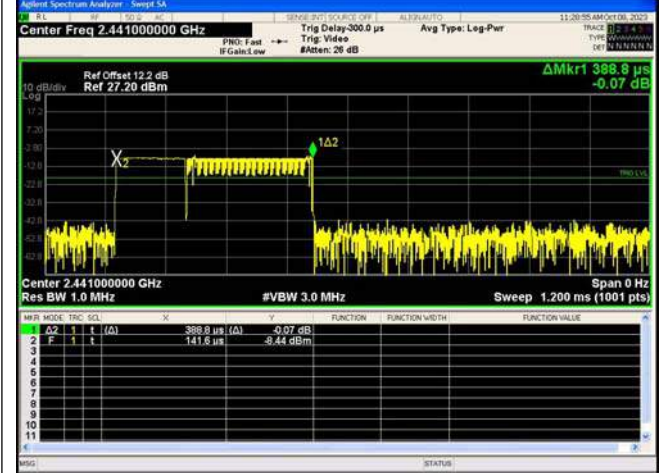


**Pulse Width**  
8DPSK\_3-DH1

**Number of Pulses in 31.6 seconds**  
8DPSK\_3-DH1

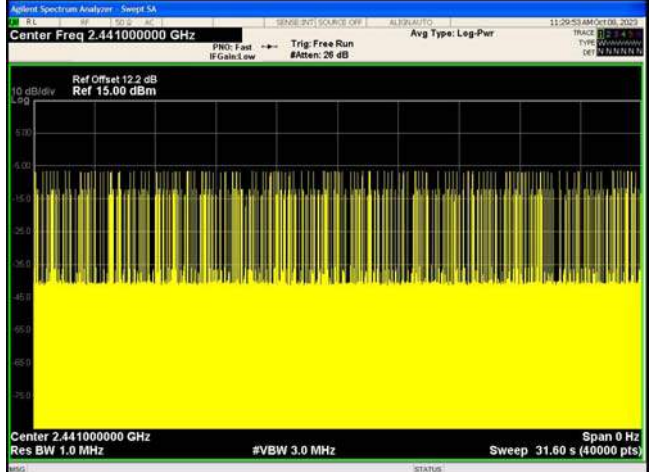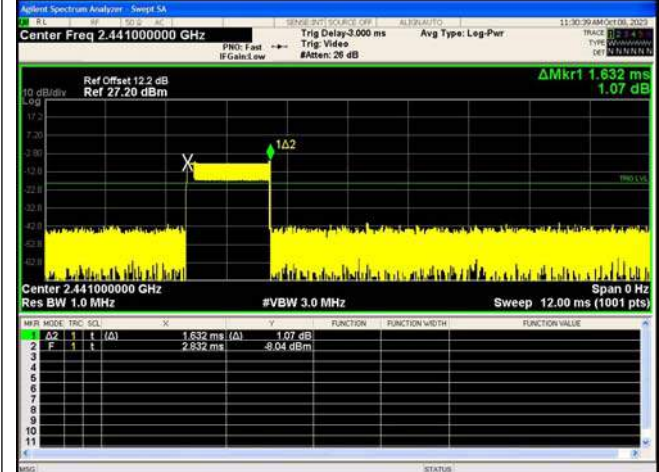


**Pulse Width**  
8DPSK\_3-DH3

**Number of Pulses in 31.6 seconds**  
8DPSK\_3-DH3

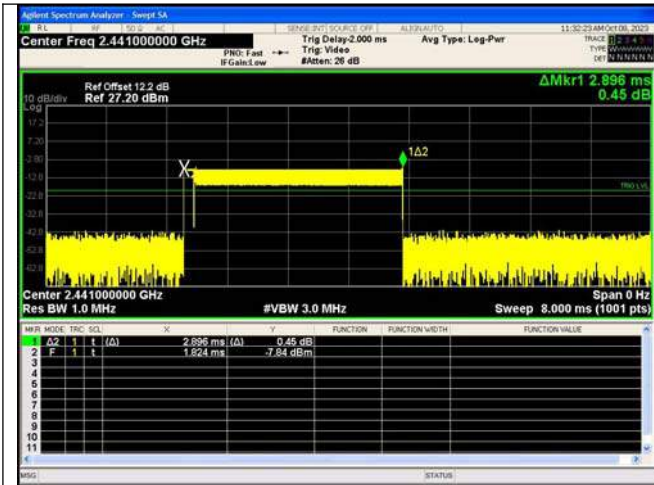

Pulse Width  
8DPSK\_3-DH5

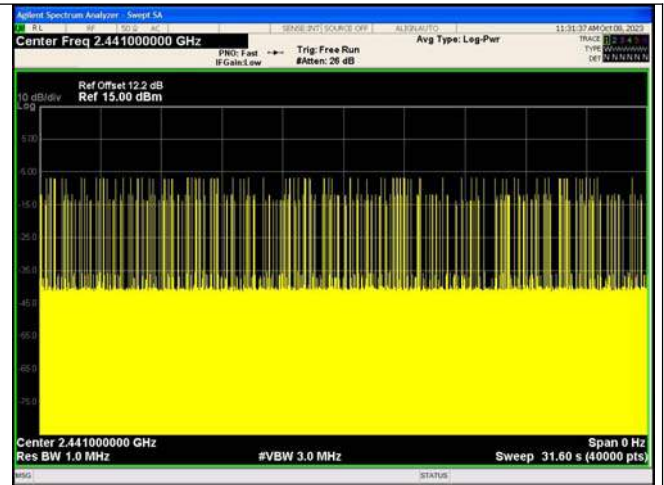


Number of Pulses in 31.6 seconds  
8DPSK\_3-DH5

## APPENDIX VIII. Number Of Hopping Channel

### Test Result


Modulation	Packet	Number of Hopping Channel	Limit	Result
GFSK	DH5	79	15	PASS
GFSK	DH5	79	15	PASS
GFSK	DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS

### Test Graphs

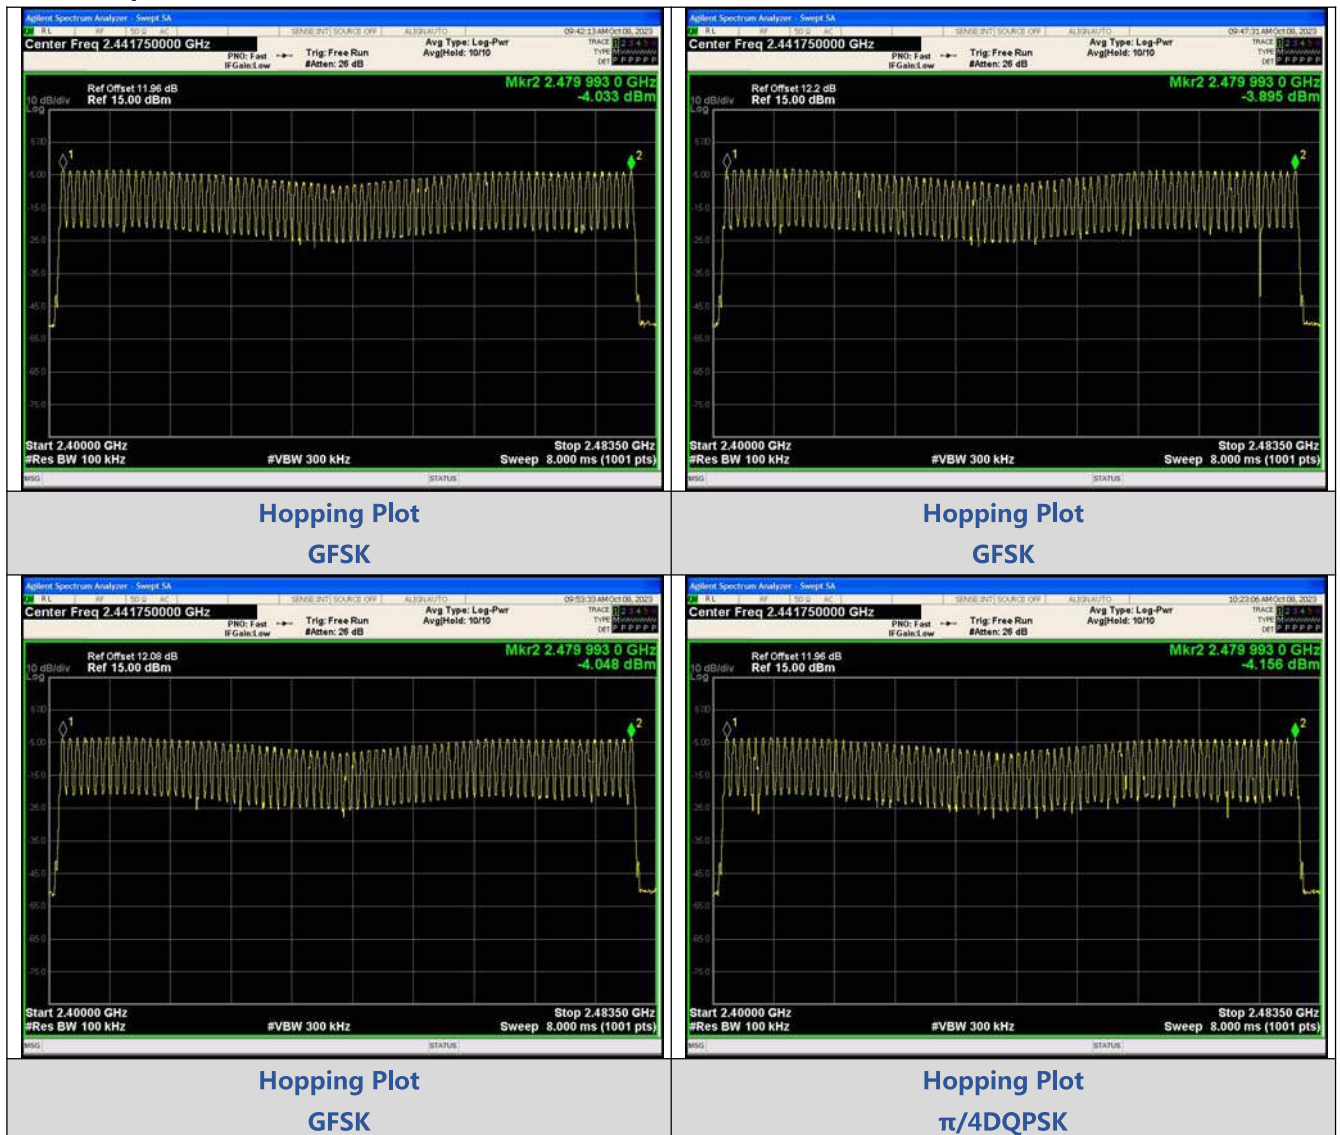





Hopping Plot  
 $\pi/4$ DQPSK

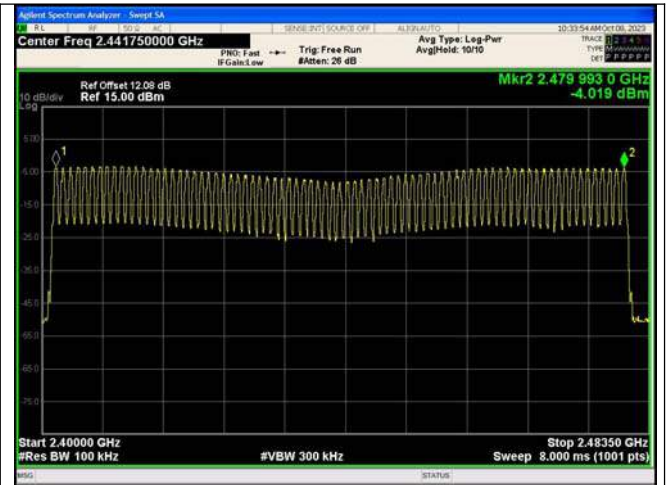

Hopping Plot  
 $\pi/4$ DQPSK

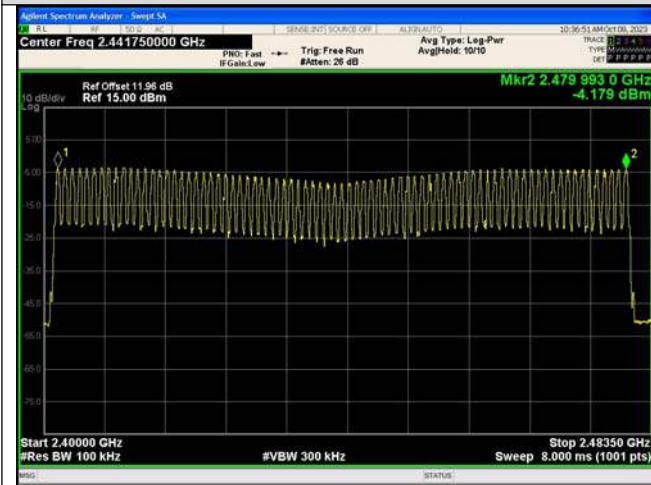

Hopping Plot  
8DPSK

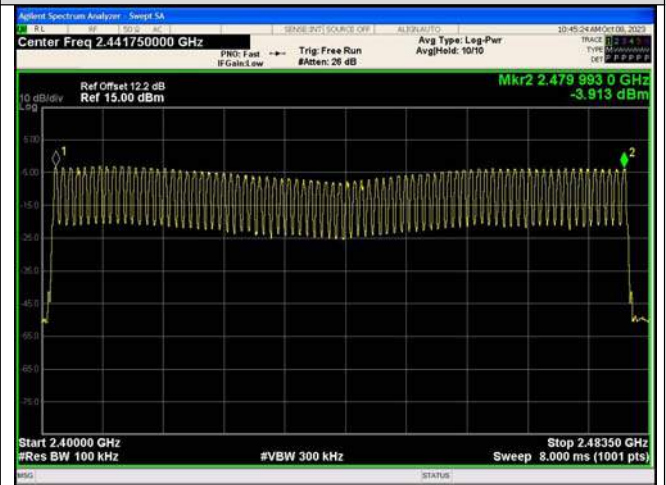

Hopping Plot  
8DPSK



Hopping Plot  
8DPSK

Void