
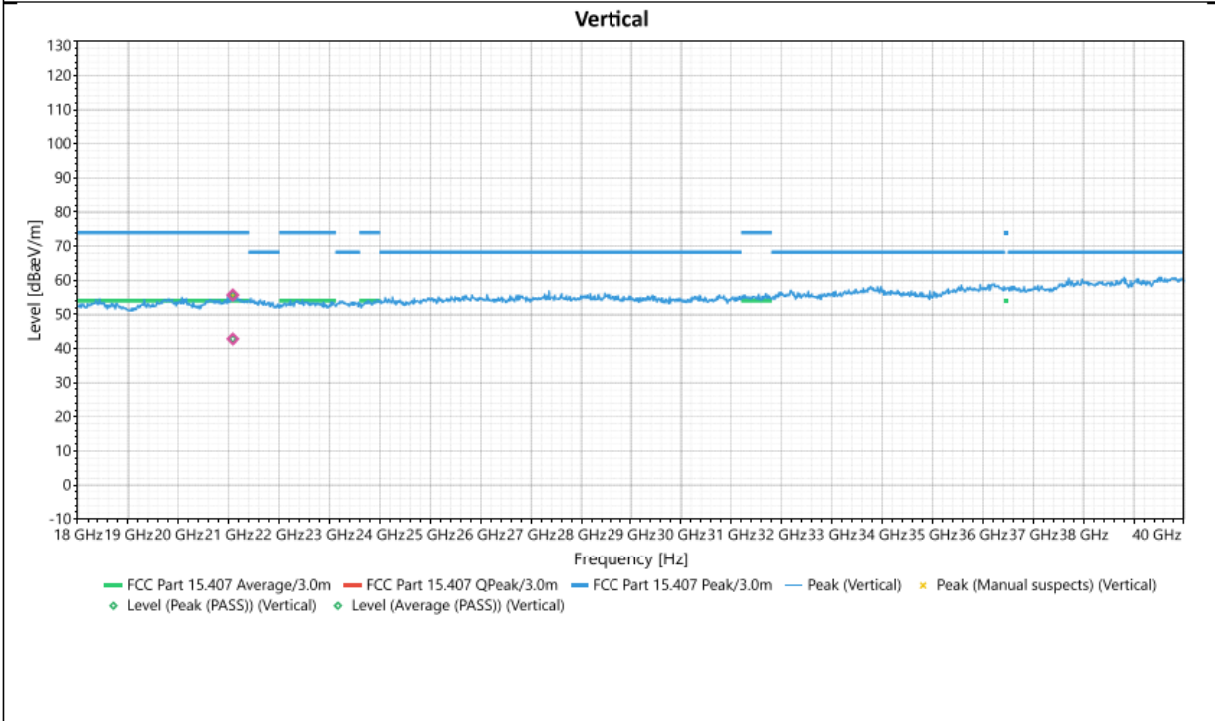


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11201.6	Horizontal	43.384	74	-30.616	3.14	233	6.49	Peak (PASS)
2	11201.6	Horizontal	30.766	54	-23.234	3.14	233	6.49	Average (PASS)
3	11934.3	Horizontal	45.657	74	-28.343	3.36	192	7.46	Peak (PASS)
4	11934.3	Horizontal	32.903	54	-21.097	3.36	192	7.46	Average (PASS)
5	14486	Horizontal	44.194	74	-29.806	1.83	37	6.83	Peak (PASS)
6	14486	Horizontal	31.607	54	-22.393	1.83	37	6.83	Average (PASS)
7	21216.3	Horizontal	55.757	74	-18.243	2	216	8.35	Peak (PASS)
8	21216.3	Horizontal	43.242	54	-10.758	2	216	8.35	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5270 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

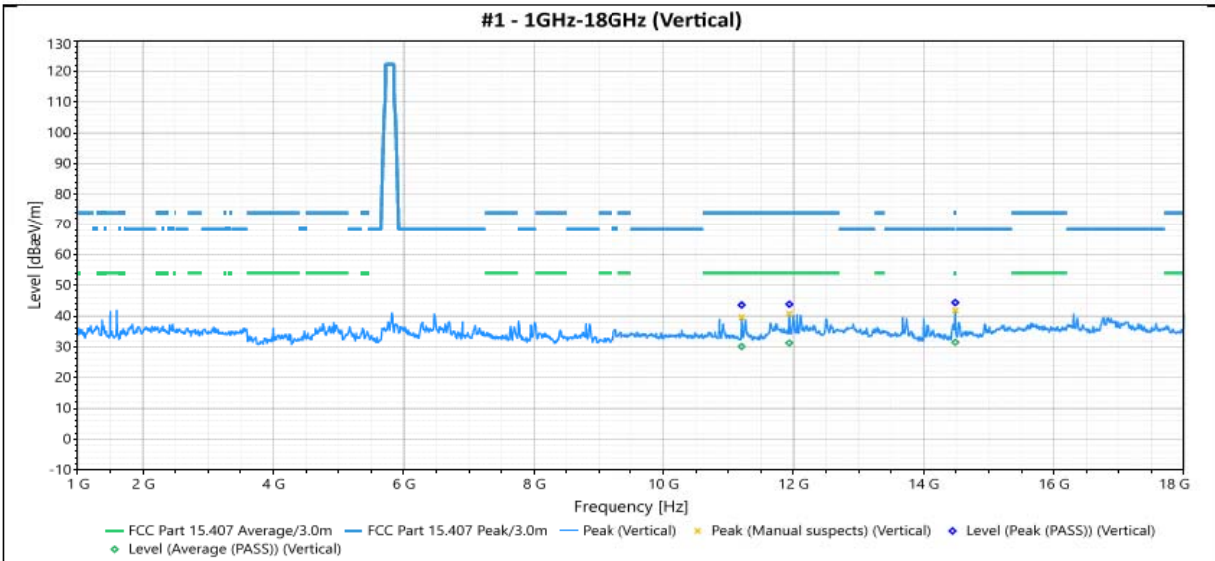


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11203.3	Vertical	43.578	74	-30.422	1.28	163	6.51	Peak (PASS)
2	11203.3	Vertical	30.1	54	-23.9	1.28	163	6.51	Average (PASS)
3	11936	Vertical	43.813	74	-30.187	1.22	229	7.43	Peak (PASS)
4	11936	Vertical	31.211	54	-22.789	1.22	229	7.43	Average (PASS)
5	14486	Vertical	44.351	74	-29.649	2.73	238	6.7	Peak (PASS)
6	14486	Vertical	31.467	54	-22.533	2.73	238	6.7	Average (PASS)
7	21079.98	Vertical	55.665	74	-18.335	1.67	25	8.63	Peak (PASS)
8	21079.98	Vertical	42.819	54	-11.181	1.67	25	8.63	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5270 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		


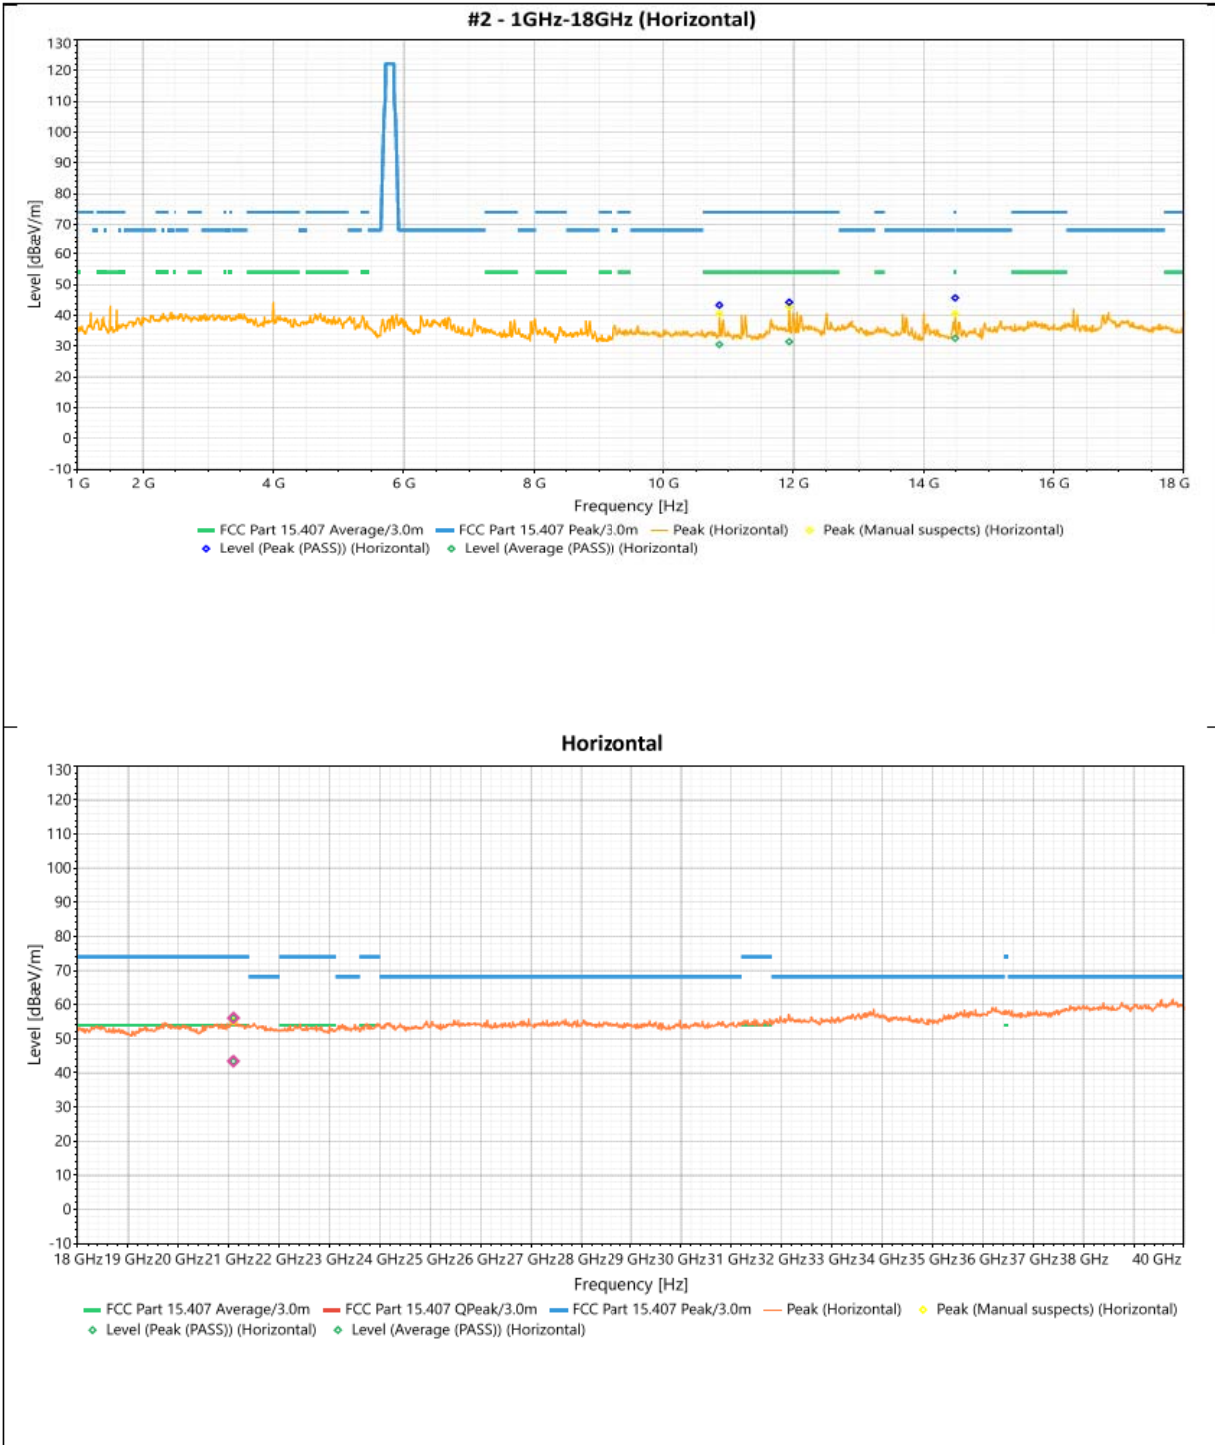


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	7636.7	Horizontal	38.229	74	-35.771	1.39	244	5.84	Peak (PASS)
2	7636.7	Horizontal	25.053	54	-28.947	1.39	244	5.84	Average (PASS)
3	12106	Horizontal	44.174	74	-29.826	2.12	244	7.54	Peak (PASS)
4	12106	Horizontal	31.312	54	-22.688	2.12	244	7.54	Average (PASS)
5	14487.7	Horizontal	46.673	74	-27.327	3.26	269	6.71	Peak (PASS)
6	14487.7	Horizontal	33.347	54	-20.653	3.26	269	6.71	Average (PASS)
7	21090.9	Horizontal	56.108	74	-17.892	1.58	183	8.49	Peak (PASS)
8	21090.9	Horizontal	43.431	54	-10.569	1.58	183	8.49	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5310 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

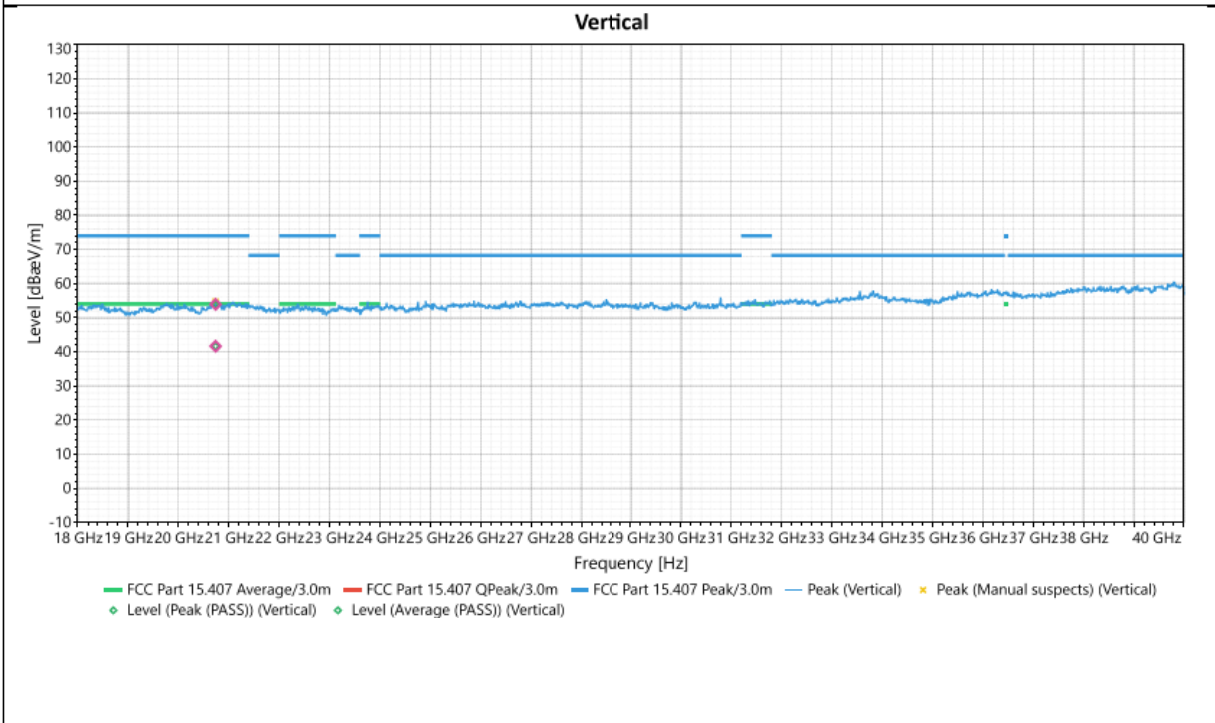
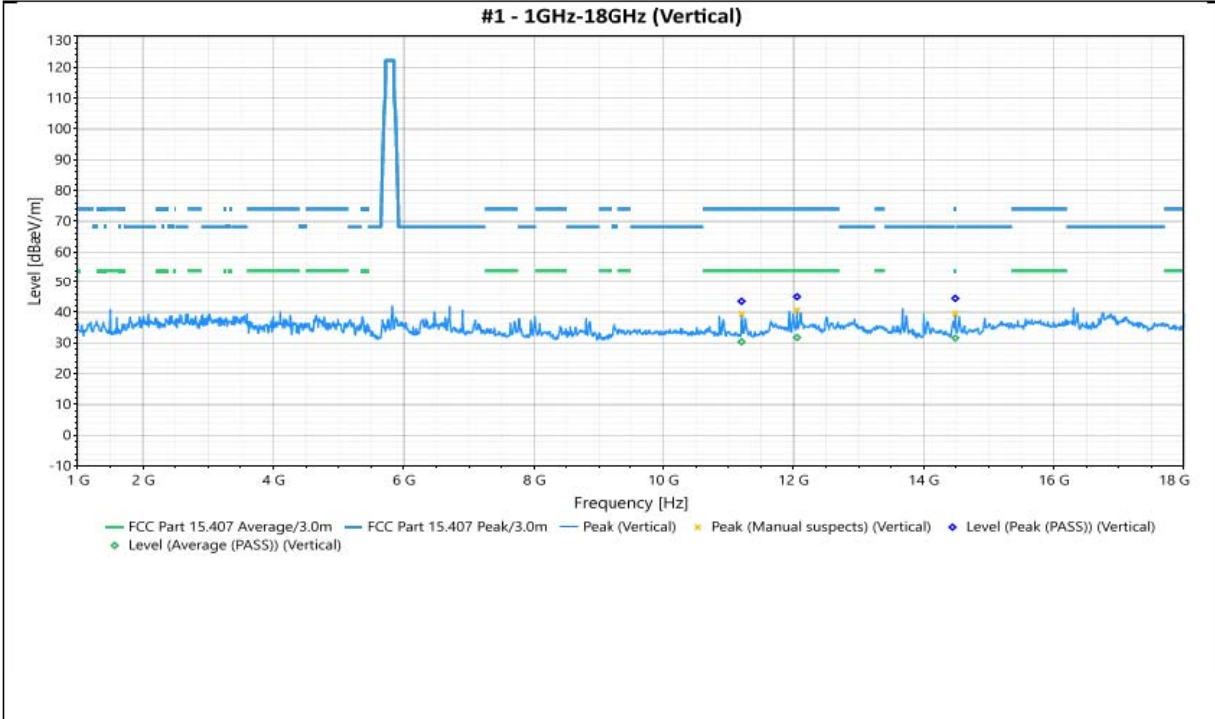


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11201.6	Vertical	24.44	74	-30.456	1.62	0	6.51	Peak (PASS)
2	11201.6	Vertical	18.749	54	-23.629	1.62	0	6.51	Average (PASS)
3	12055	Vertical	25.642	74	-28.98	2.22	266	7.48	Peak (PASS)
4	12055	Vertical	28.531	54	-22.229	2.22	266	7.48	Average (PASS)
5	14486	Vertical	24.857	74	-29.5	2.17	1	6.7	Peak (PASS)
6	14486	Vertical	29.633	54	-22.411	2.17	1	6.7	Average (PASS)
7	20736.81	Vertical	53.89	74	-20.11	1.82	4	8.51	Peak (PASS)
8	20736.81	Vertical	41.618	54	-12.382	1.82	4	8.51	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5310 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

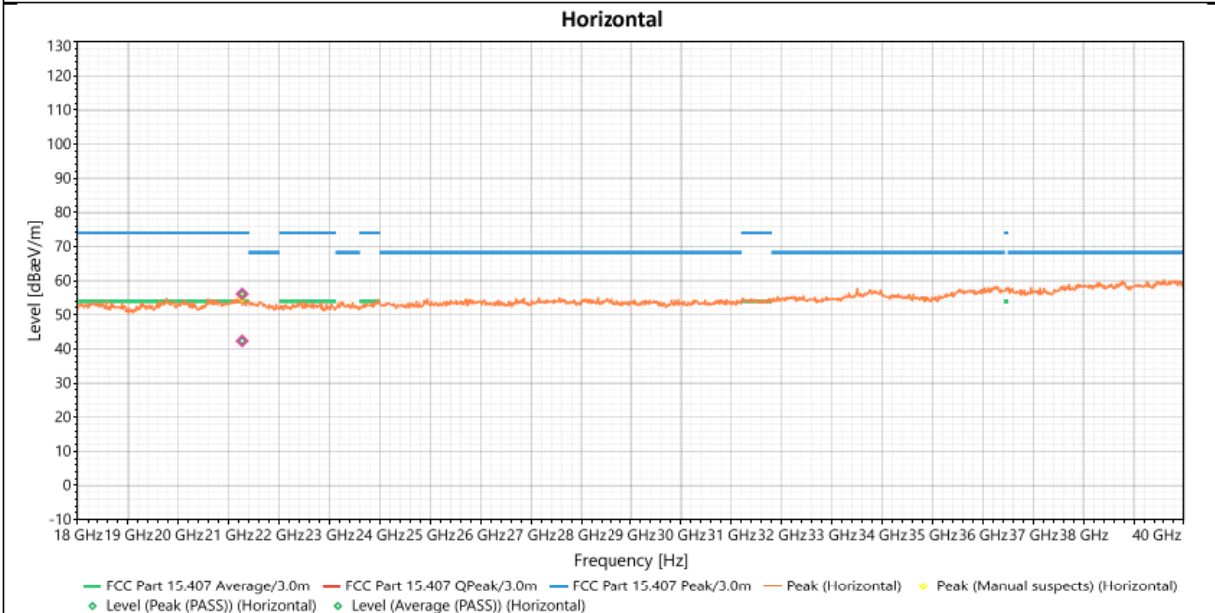
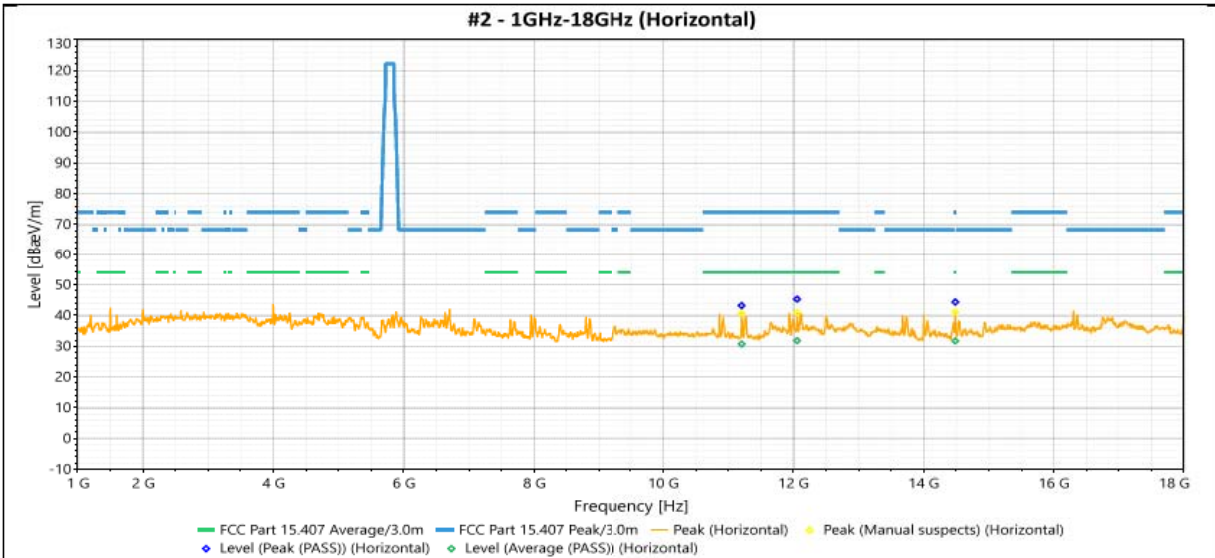


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11203.3	Horizontal	43.192	74	-30.808	3.06	198	6.49	Peak (PASS)
2	11203.3	Horizontal	30.667	54	-23.333	3.06	198	6.49	Average (PASS)
3	12055	Horizontal	45.28	74	-28.72	1.23	4	7.51	Peak (PASS)
4	12055	Horizontal	31.767	54	-22.233	1.23	4	7.51	Average (PASS)
5	14486	Horizontal	44.34	74	-29.66	2.5	9	6.83	Peak (PASS)
6	14486	Horizontal	31.685	54	-22.315	2.5	9	6.83	Average (PASS)
7	21264.7	Horizontal	56.103	74	-17.897	1.4	66	8.29	Peak (PASS)
8	21264.7	Horizontal	42.363	54	-11.637	1.4	66	8.29	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5510 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

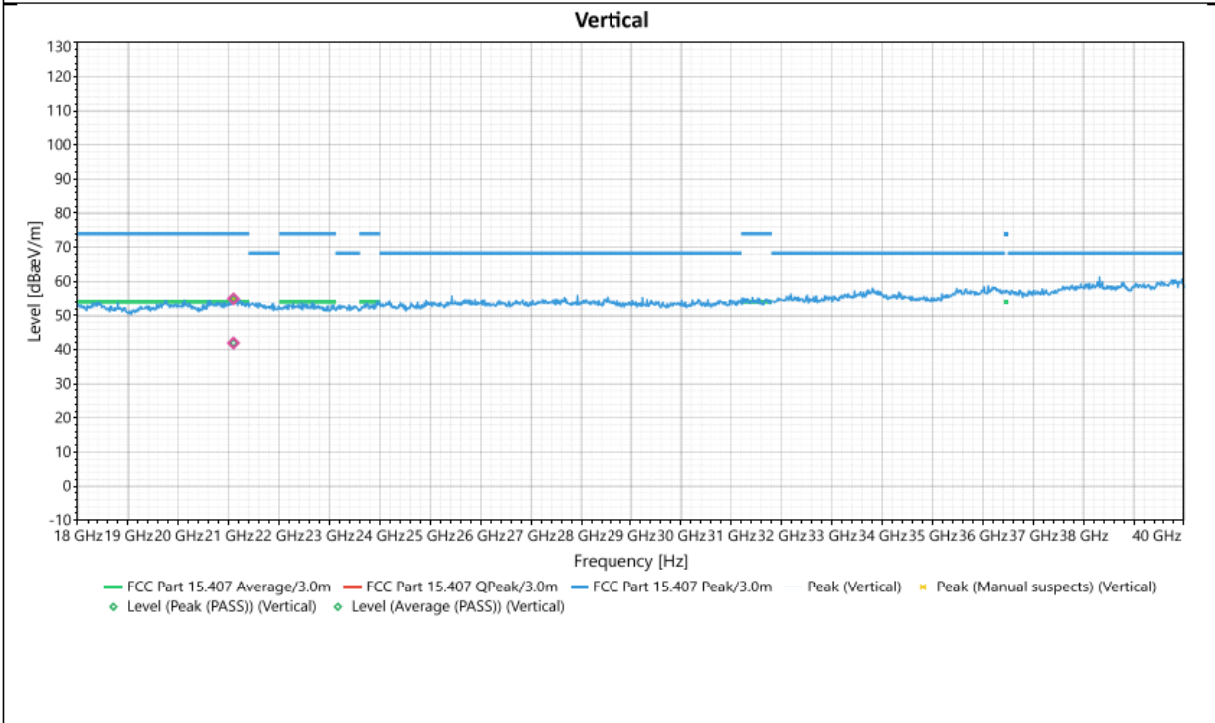
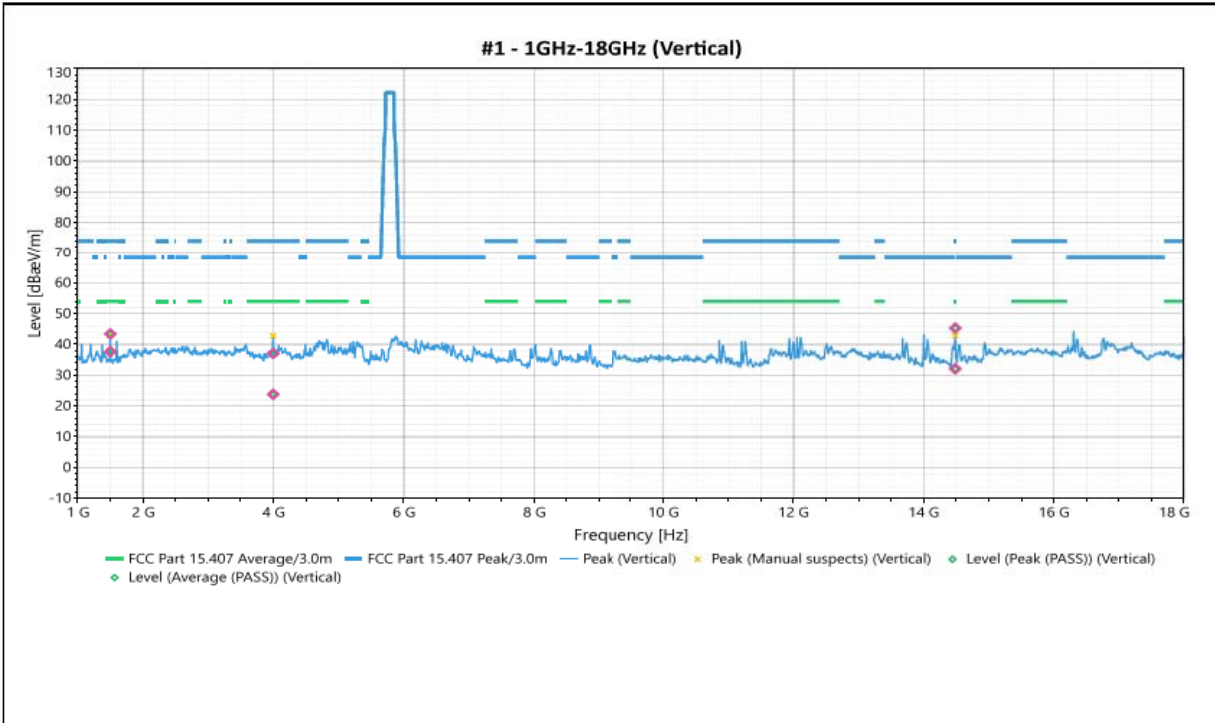


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1499.7	Vertical	43.365	74	-30.635	2.33	208	-2.5	Peak (PASS)
2	1499.7	Vertical	37.611	54	-16.389	2.33	208	-2.5	Average (PASS)
3	3998.7	Vertical	36.999	74	-37.001	1	358	3.25	Peak (PASS)
4	3998.7	Vertical	23.728	54	-30.272	1	358	3.25	Average (PASS)
5	14486	Vertical	45.251	74	-28.749	1.29	109	6.7	Peak (PASS)
6	14486	Vertical	32.016	54	-21.984	1.29	109	6.7	Average (PASS)
7	21093.18	Vertical	54.897	74	-19.103	1.97	74	8.63	Peak (PASS)
8	21093.18	Vertical	41.954	54	-12.046	1.97	74	8.63	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5510 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

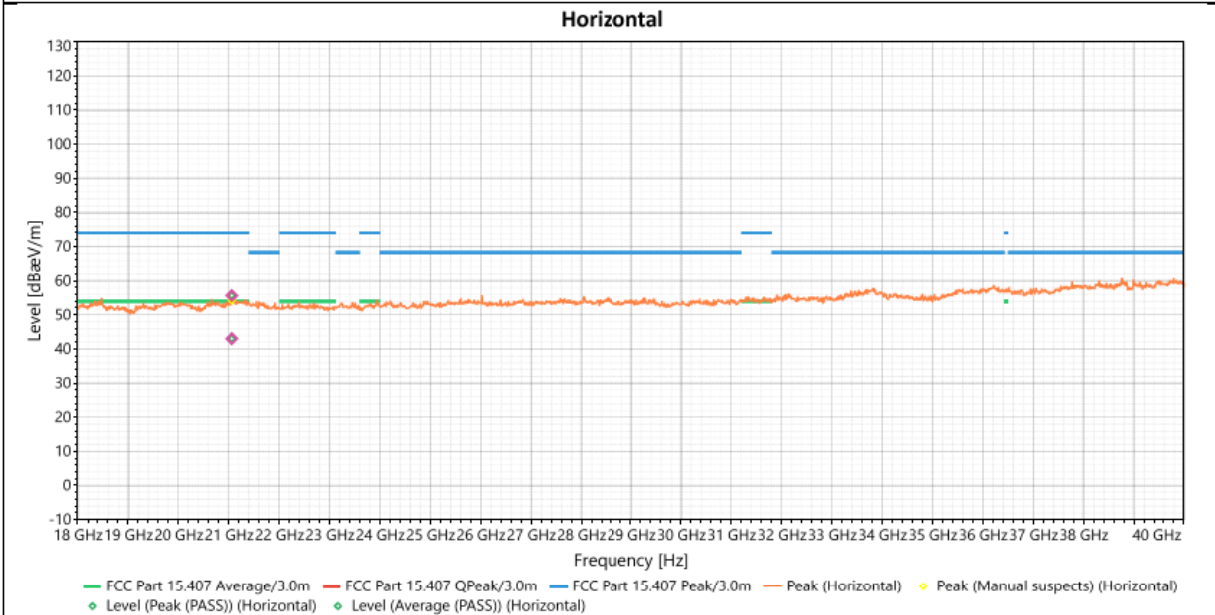
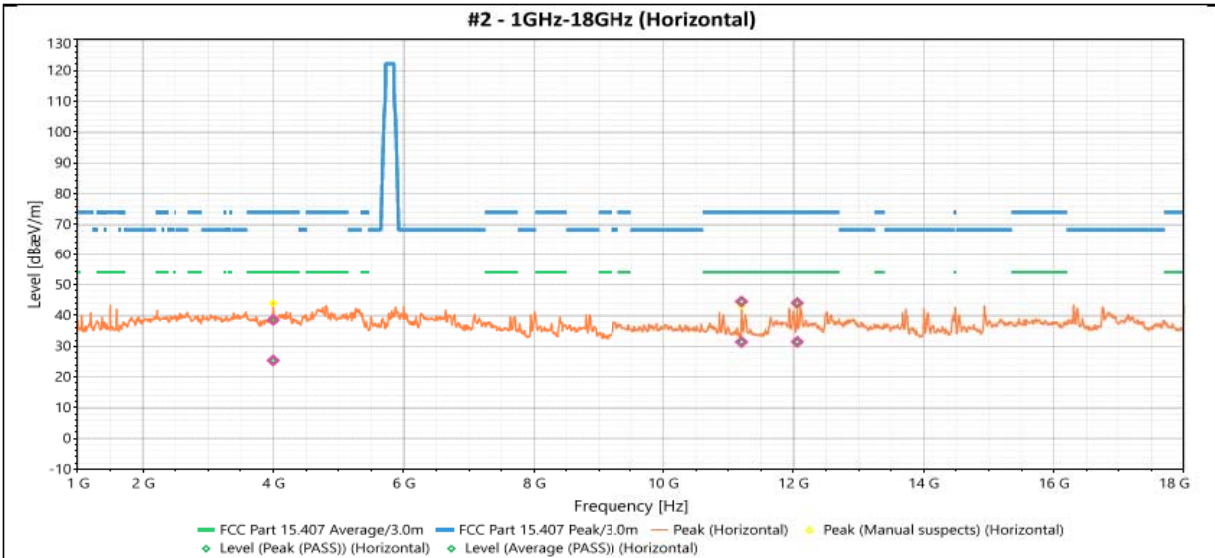


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	3998.7	Horizontal	38.521	74	-35.479	1	325	3.27	Peak (PASS)
2	3998.7	Horizontal	25.343	54	-28.657	1	325	3.27	Average (PASS)
3	11201.6	Horizontal	44.489	74	-29.511	3.38	229	6.49	Peak (PASS)
4	11201.6	Horizontal	31.347	54	-22.653	3.38	229	6.49	Average (PASS)
5	12058.4	Horizontal	44.009	74	-29.991	1.42	231	7.52	Peak (PASS)
6	12058.4	Horizontal	31.396	54	-22.604	1.42	231	7.52	Average (PASS)
7	21060.1	Horizontal	55.637	74	-18.363	1.79	172	8.5	Peak (PASS)
8	21060.1	Horizontal	43.007	54	-10.993	1.79	172	8.5	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5550 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

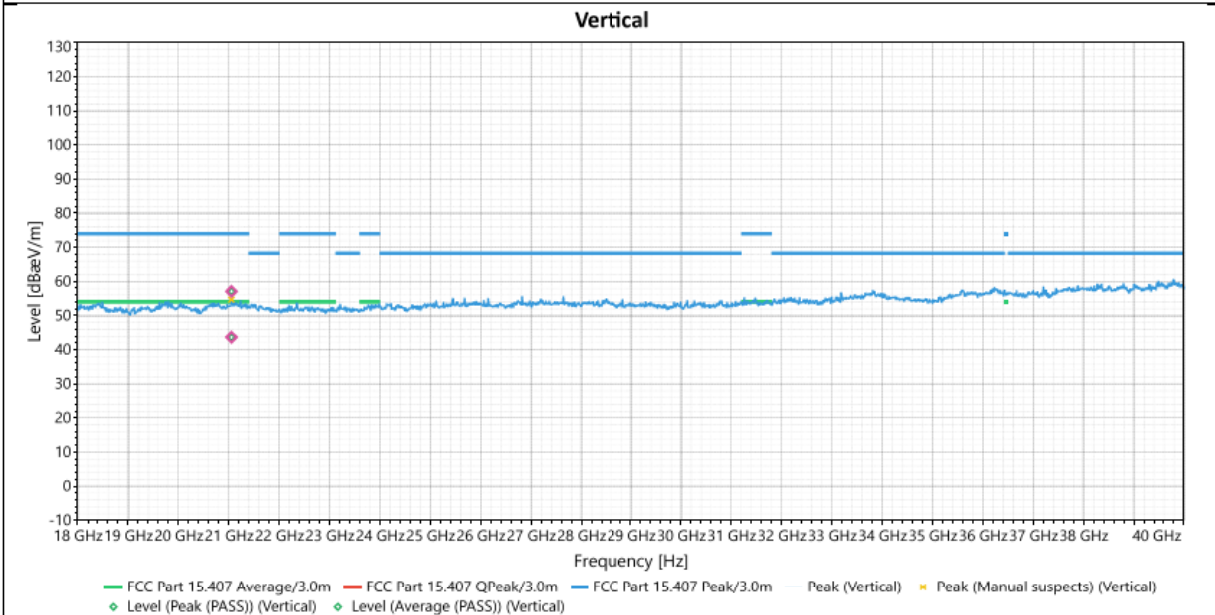
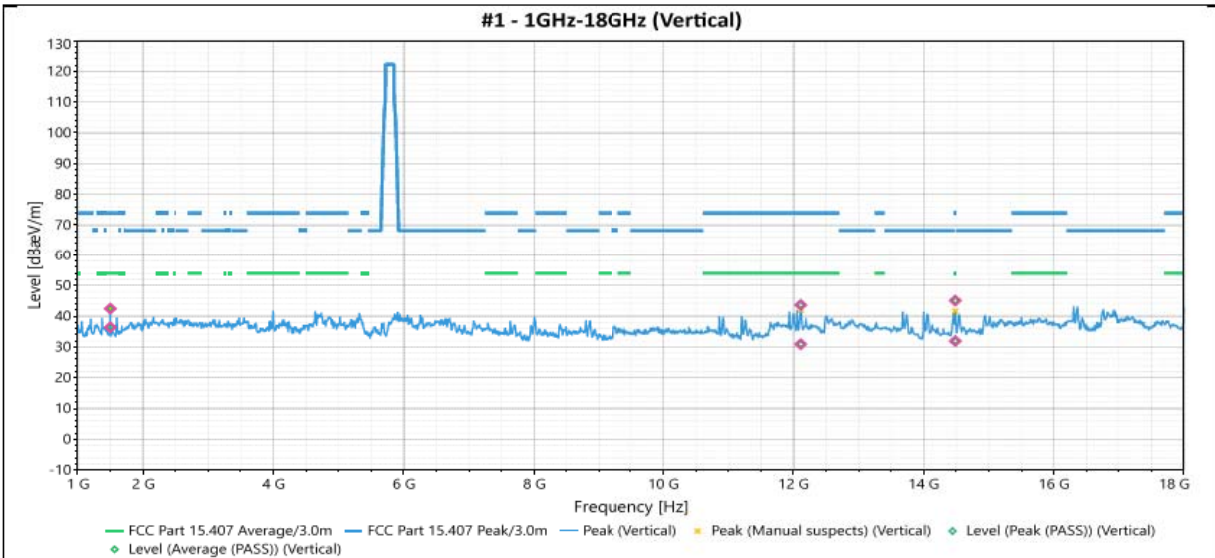


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1499.7	Vertical	42.415	74	-31.585	2.45	111	-2.5	Peak (PASS)
2	1499.7	Vertical	36.357	54	-17.643	2.45	111	-2.5	Average (PASS)
3	12111.1	Vertical	43.615	74	-30.385	1.69	225	7.54	Peak (PASS)
4	12111.1	Vertical	30.884	54	-23.116	1.69	225	7.54	Average (PASS)
5	14486	Vertical	45.049	74	-28.951	1.58	354	6.7	Peak (PASS)
6	14486	Vertical	31.879	54	-22.121	1.58	354	6.7	
7	21053.64	Vertical	57.078	74	-16.922	1.61	168	8.64	Peak (PASS)
8	21053.64	Vertical	43.637	54	-10.363	1.61	168	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5550 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

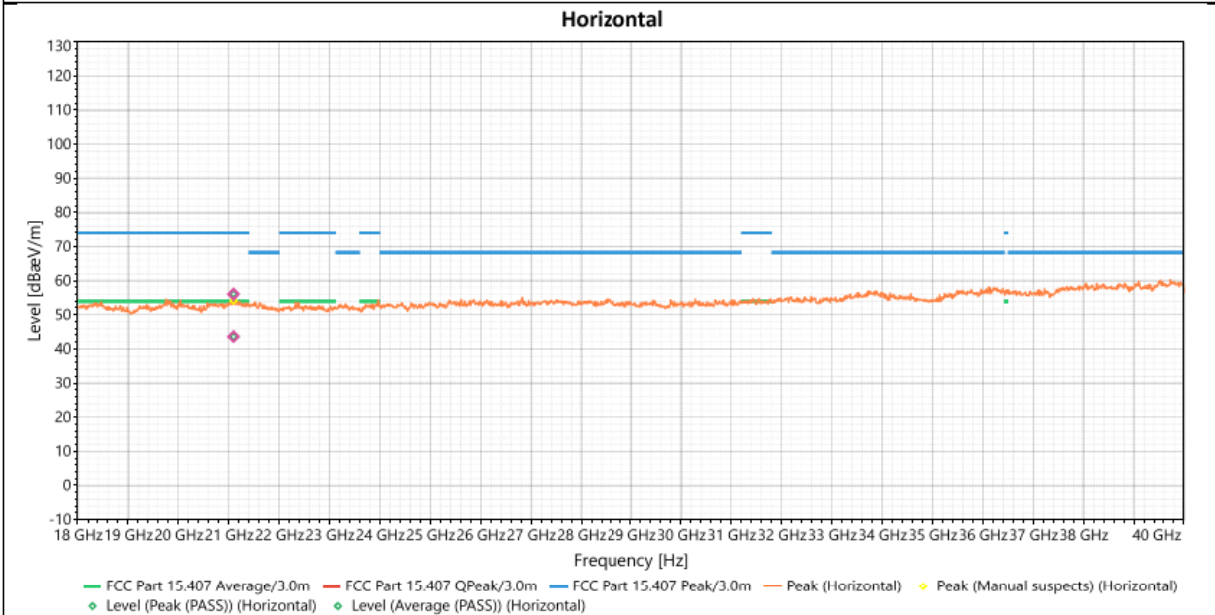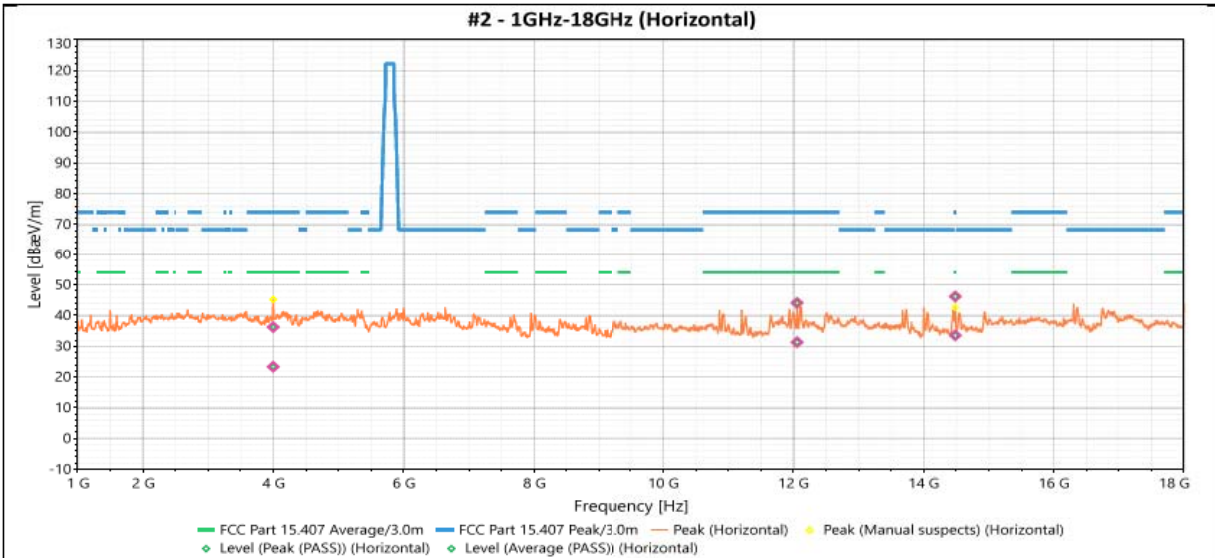


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	3998.7	Horizontal	36.188	74	-37.812	1	332	3.27	Peak (PASS)
2	3998.7	Horizontal	23.313	54	-30.687	1	332	3.27	Average (PASS)
3	12055	Horizontal	44.053	74	-29.947	2.09	135	7.51	Peak (PASS)
4	12055	Horizontal	31.273	54	-22.727	2.09	135	7.51	Average (PASS)
5	14486	Horizontal	46.13	74	-27.87	2.96	129	6.83	Peak (PASS)
6	14486	Horizontal	33.511	54	-20.489	2.96	129	6.83	Average (PASS)
7	21093.1	Horizontal	56.05	74	-17.95	1.6	270	8.49	Peak (PASS)
8	21093.1	Horizontal	43.617	54	-10.383	1.6	270	8.49	Average (PASS)


REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5590 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

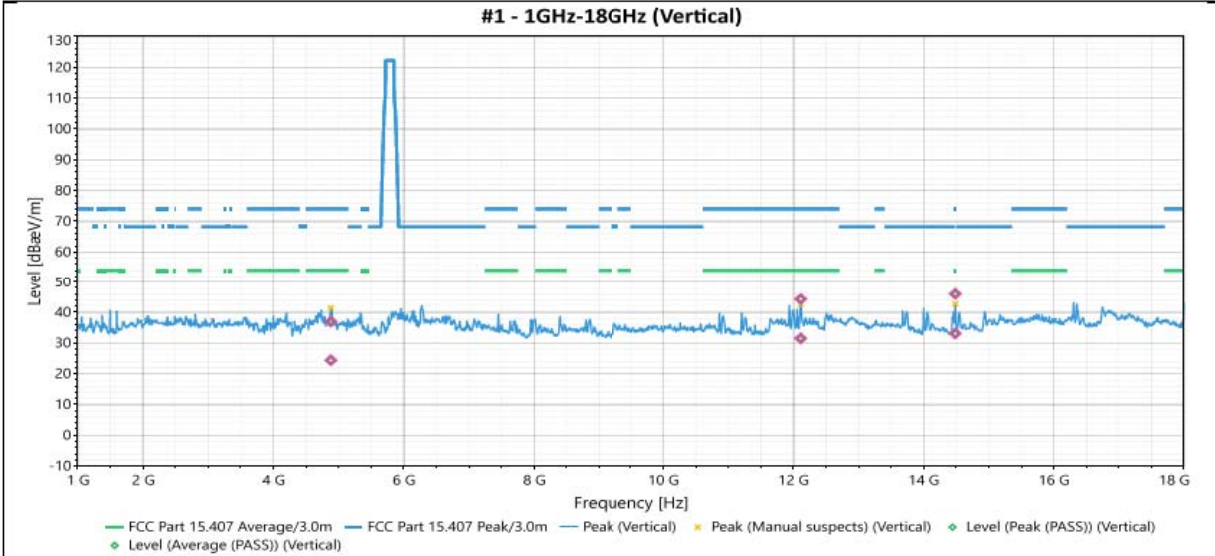

V


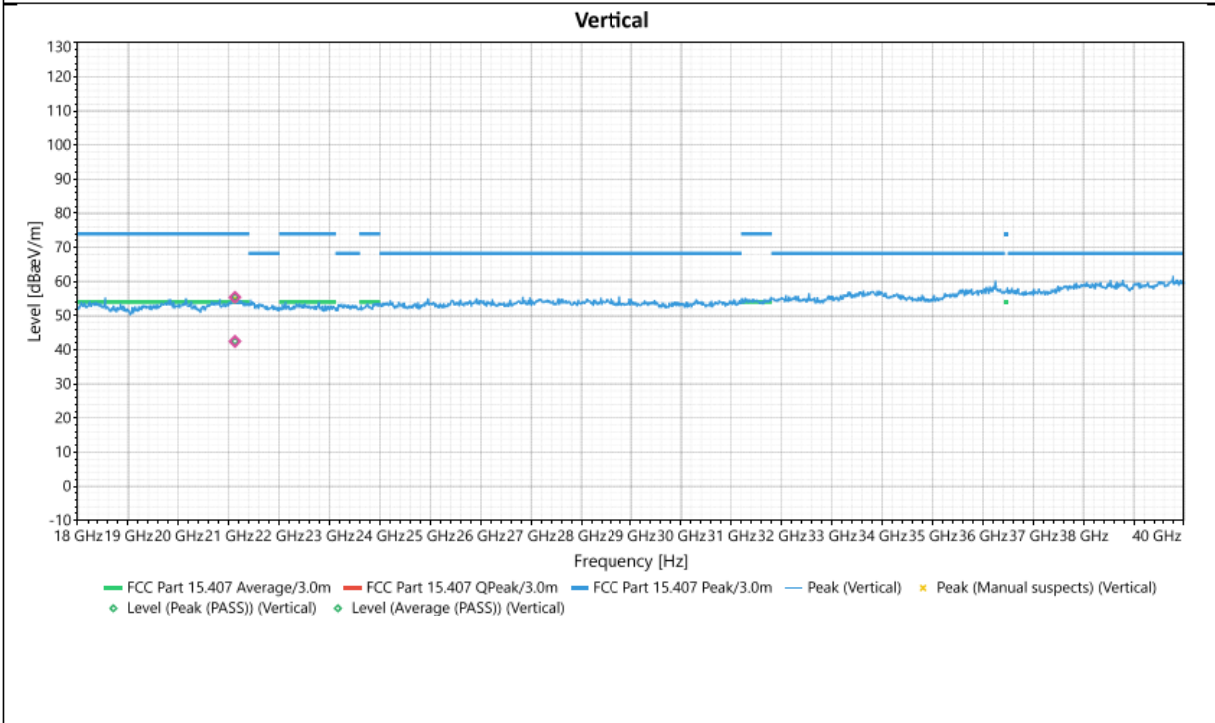


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4884.4	Vertical	36.945	74	-37.055	1.44	94	4.07	Peak (PASS)
2	4884.4	Vertical	24.383	54	-29.617	1.44	94	4.07	Average (PASS)
3	12111.1	Vertical	44.332	74	-29.668	2.51	183	7.54	Peak (PASS)
4	12111.1	Vertical	31.485	54	-22.515	2.51	183	7.54	Average (PASS)
5	14486	Vertical	46.01	74	-27.99	3.06	271	6.7	Peak (PASS)
6	14486	Vertical	33.114	54	-20.886	3.06	271	6.7	Average (PASS)
7	21121.84	Vertical	55.369	74	-18.631	1.7	238	8.59	Peak (PASS)
8	21121.84	Vertical	42.454	54	-11.546	1.7	238	8.59	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5590 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

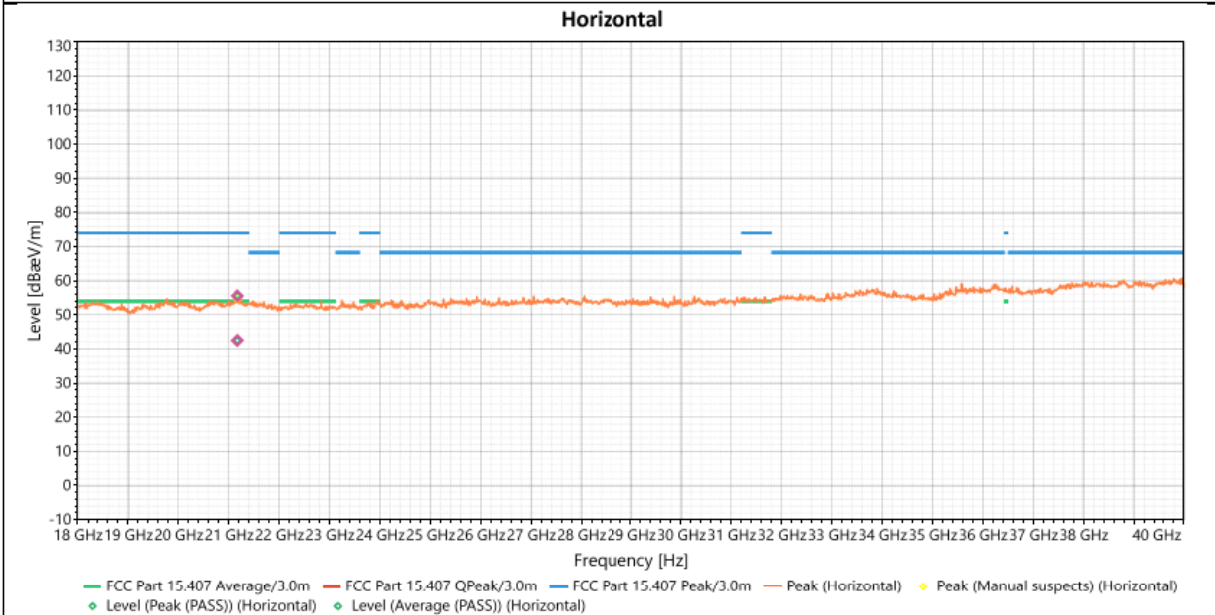
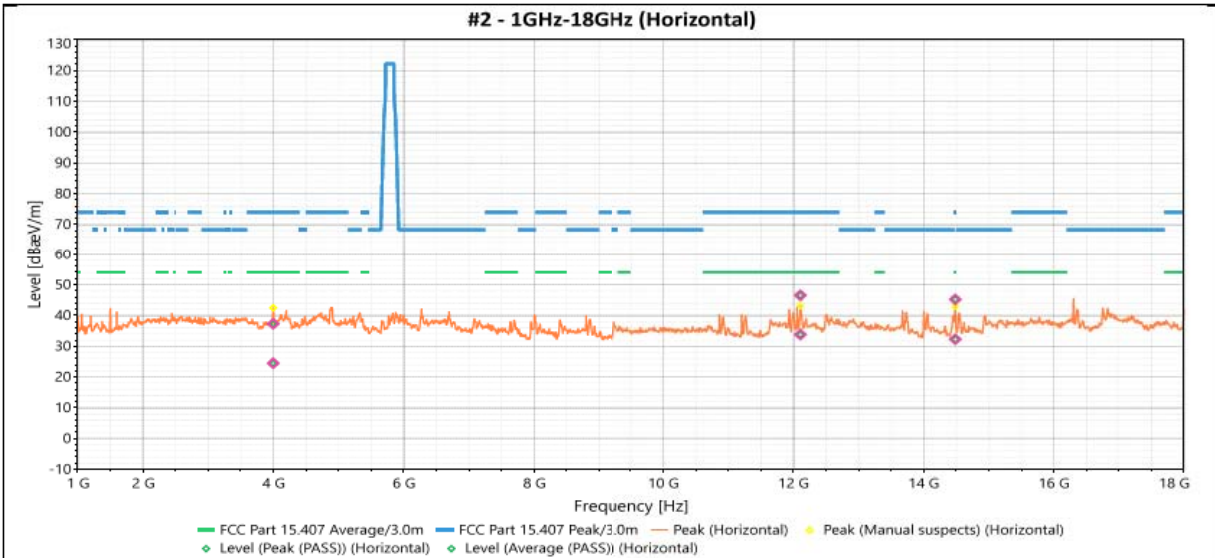


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	3998.7	Horizontal	37.256	74	-36.744	1	360	3.27	Peak (PASS)
2	3998.7	Horizontal	24.447	54	-29.553	1	360	3.27	Average (PASS)
3	12106	Horizontal	46.495	74	-27.505	3.41	257	7.55	Peak (PASS)
4	12106	Horizontal	33.773	54	-20.227	3.41	257	7.55	Average (PASS)
5	14486	Horizontal	45.18	74	-28.82	1.05	62	6.83	Peak (PASS)
6	14486	Horizontal	32.24	54	-21.76	1.05	62	6.83	Average (PASS)
7	21167.9	Horizontal	55.522	74	-18.478	1.63	356	8.4	Peak (PASS)
8	21167.9	Horizontal	42.469	54	-11.531	1.63	356	8.4	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5630 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

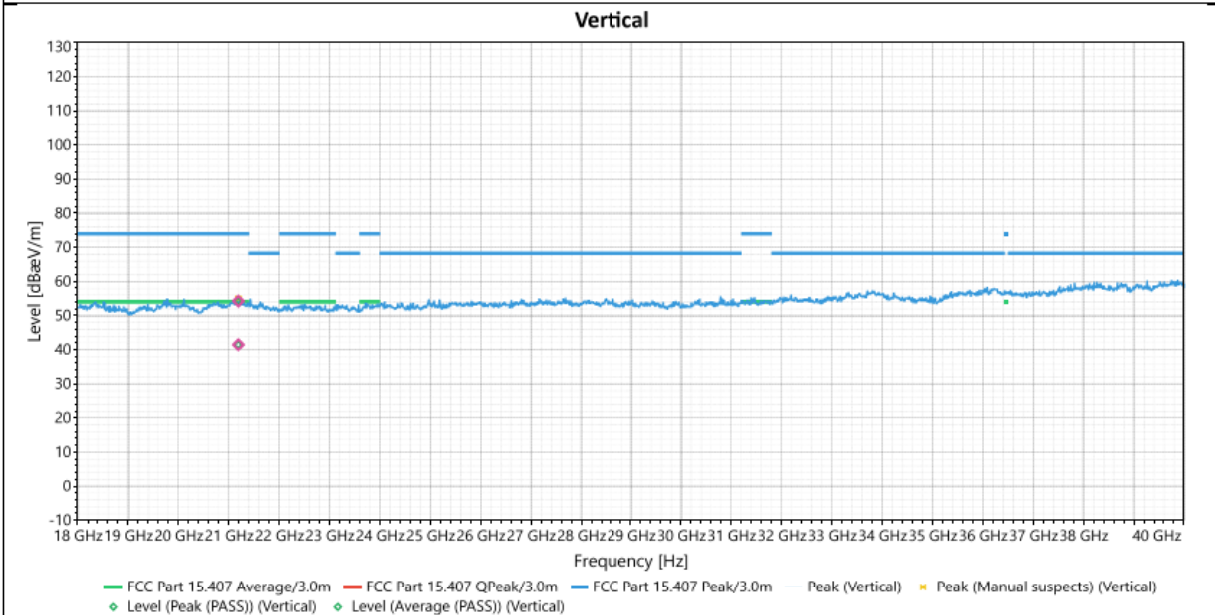
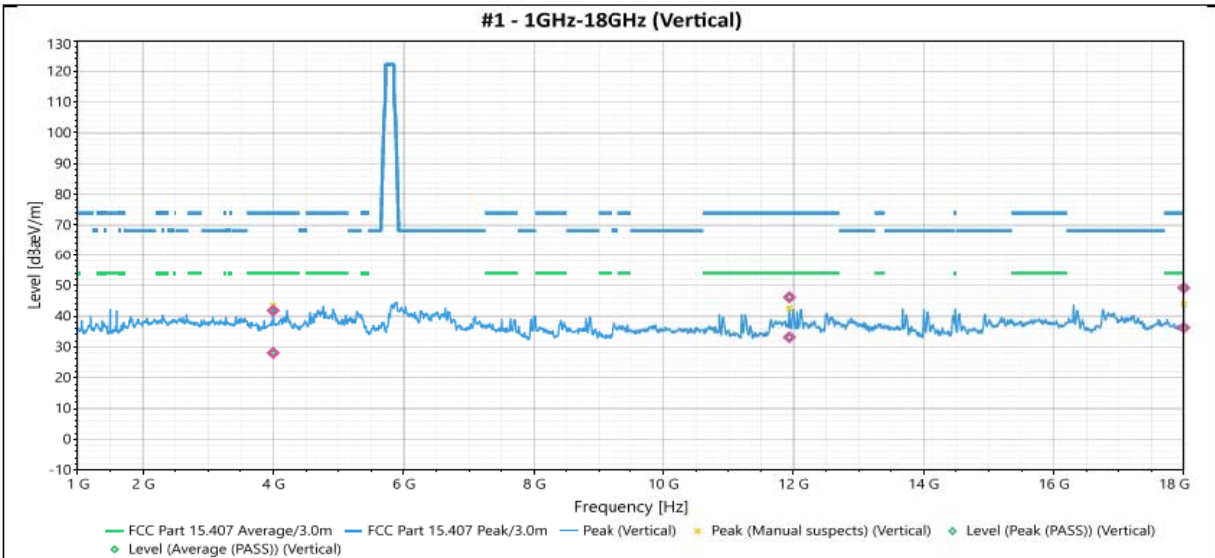


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	3998.7	Vertical	41.785	74	-32.215	1.82	263	3.25	Peak (PASS)
2	3998.7	Vertical	28.019	54	-25.981	1.82	263	3.25	Average (PASS)
3	11937.7	Vertical	46.116	74	-27.884	3.41	285	7.43	Peak (PASS)
4	11937.7	Vertical	33.129	54	-20.871	3.41	285	7.43	Average (PASS)
5	17996.5	Vertical	49.158	74	-24.842	3.28	310	6.82	Peak (PASS)
6	17996.5	Vertical	36.221	54	-17.779	3.28	310	6.82	Average (PASS)
7	21190.03	Vertical	54.225	74	-19.775	1	203	8.47	Peak (PASS)
8	21190.03	Vertical	41.452	54	-12.548	1	203	8.47	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5630 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

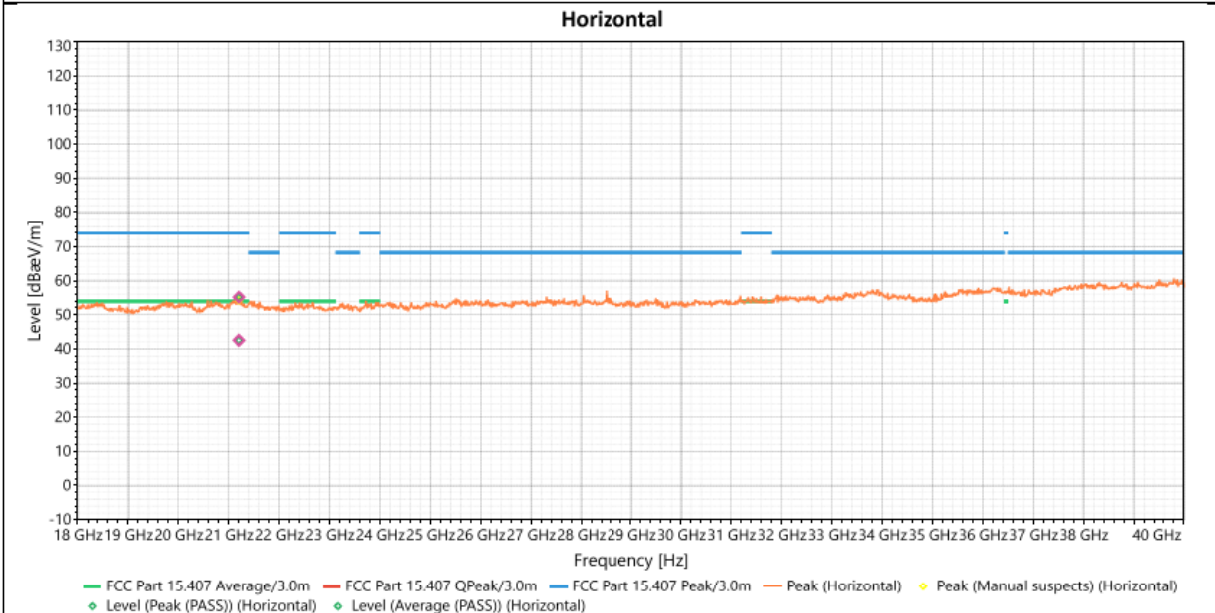
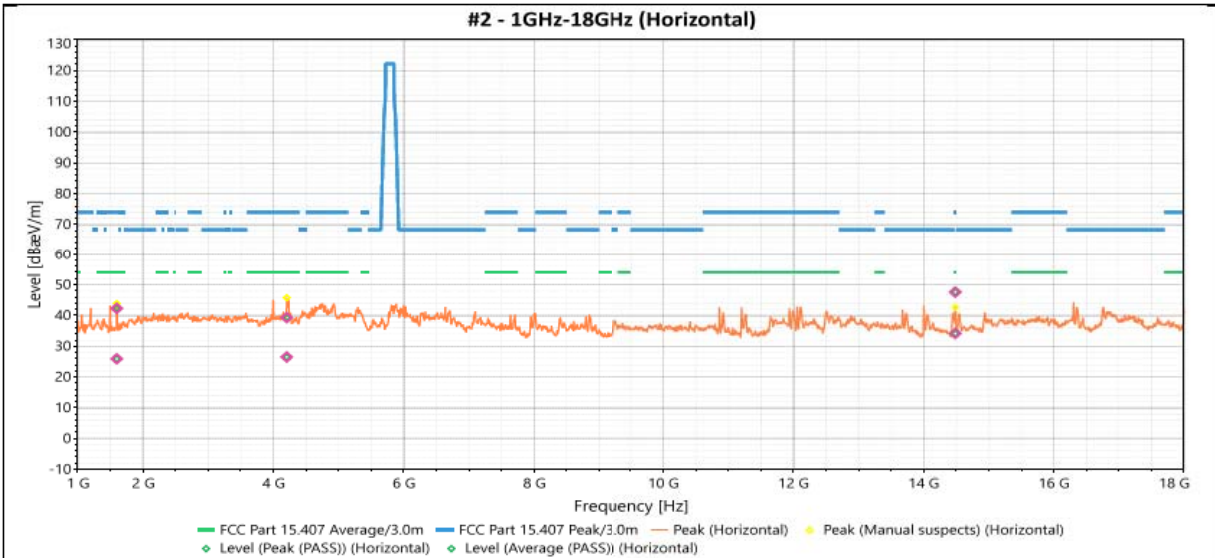


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1598.3	Horizontal	42.27	74	-31.73	1.42	210	-2.31	Peak (PASS)
2	1598.3	Horizontal	25.887	54	-28.113	1.42	210	-2.31	Average (PASS)
3	4206.1	Horizontal	39.28	74	-34.72	1	355	3.13	Peak (PASS)
4	4206.1	Horizontal	26.467	54	-27.533	1	355	3.13	Average (PASS)
5	14486	Horizontal	47.565	74	-26.435	3.25	49	6.83	Peak (PASS)
6	14486	Horizontal	34.128	54	-19.872	3.25	49	6.83	Average (PASS)
7	21203.1	Horizontal	55.171	74	-18.829	2	116	8.36	Peak (PASS)
8	21203.1	Horizontal	42.509	54	-11.491	2	116	8.36	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5670 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

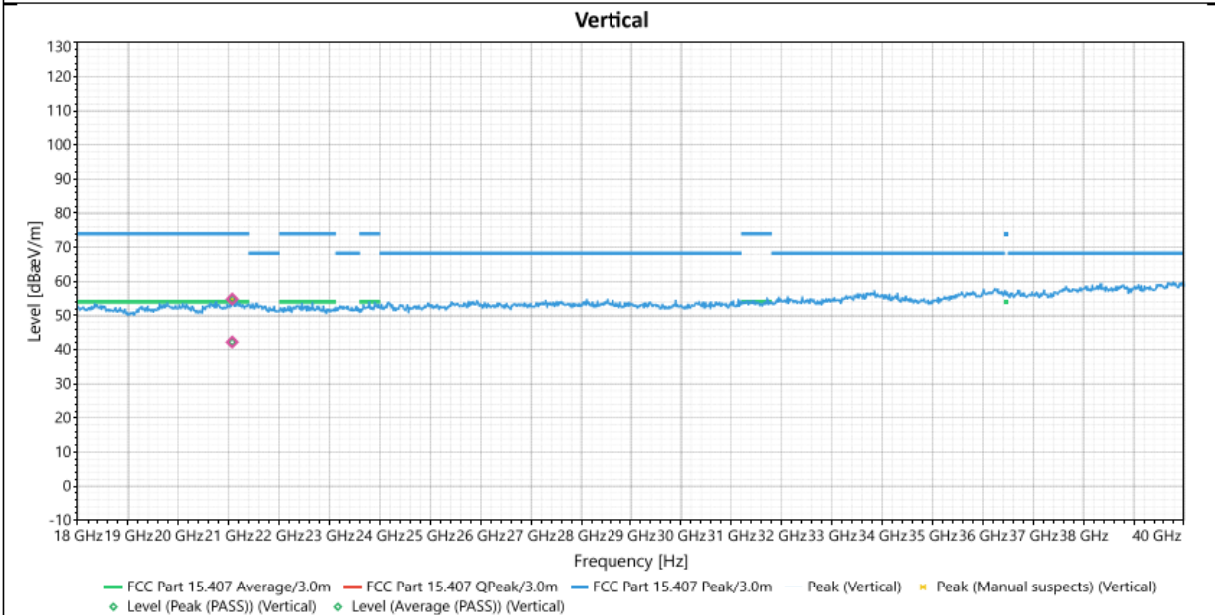
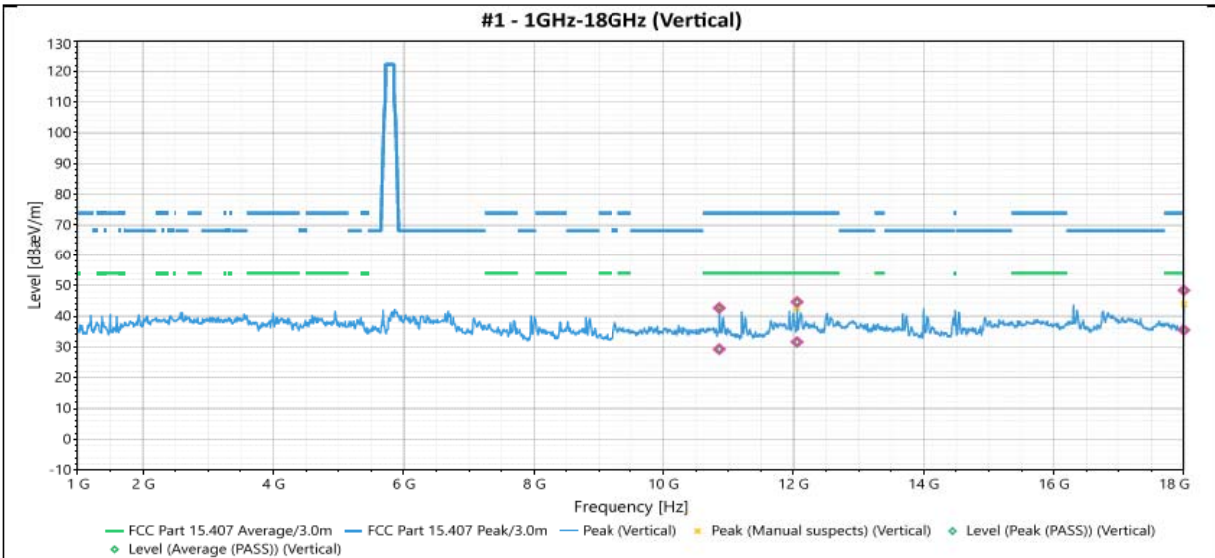


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	10859.9	Vertical	42.645	74	-31.355	1.05	167	6.56	Peak (PASS)
2	10859.9	Vertical	29.255	54	-24.745	1.05	167	6.56	Average (PASS)
3	12055	Vertical	44.595	74	-29.405	2.12	19	7.48	Peak (PASS)
4	12055	Vertical	31.573	54	-22.427	2.12	19	7.48	Average (PASS)
5	17998.2	Vertical	48.348	74	-25.652	2.04	243	6.82	Peak (PASS)
6	17998.2	Vertical	35.46	54	-18.54	2.04	243	6.82	Average (PASS)
7	21066.8	Vertical	54.824	74	-19.176	1.69	237	8.64	Peak (PASS)
8	21066.8	Vertical	42.207	54	-11.793	1.69	237	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5670 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

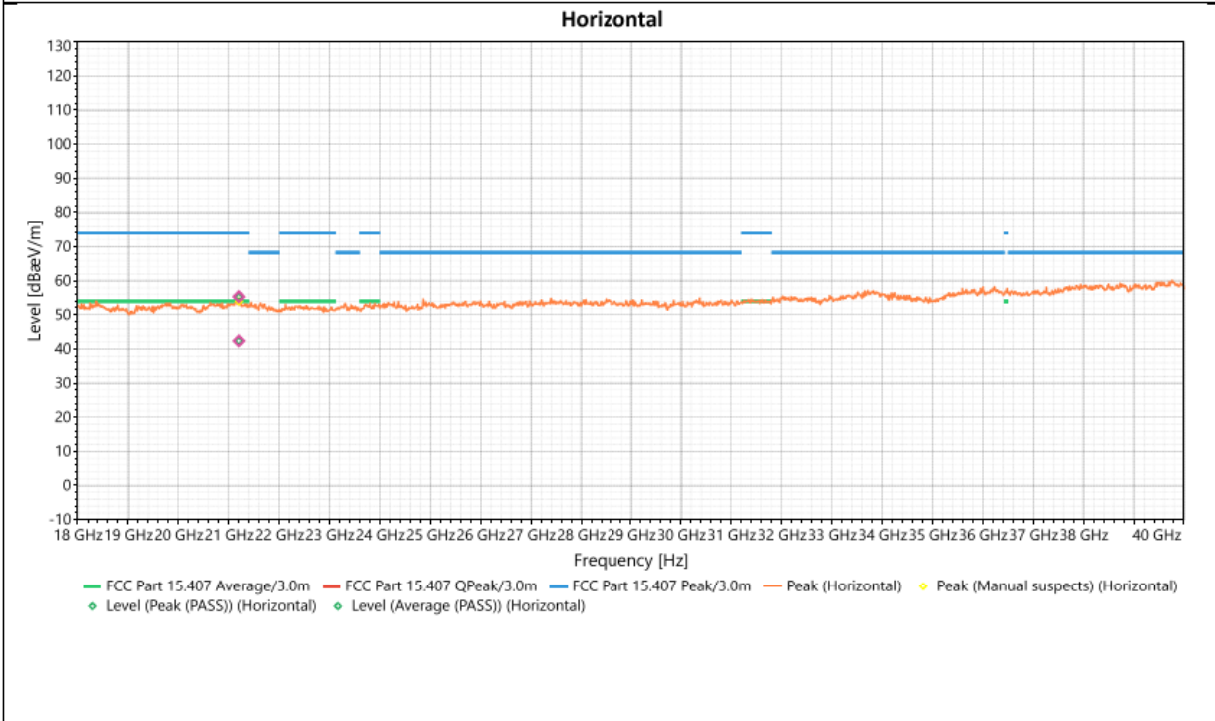
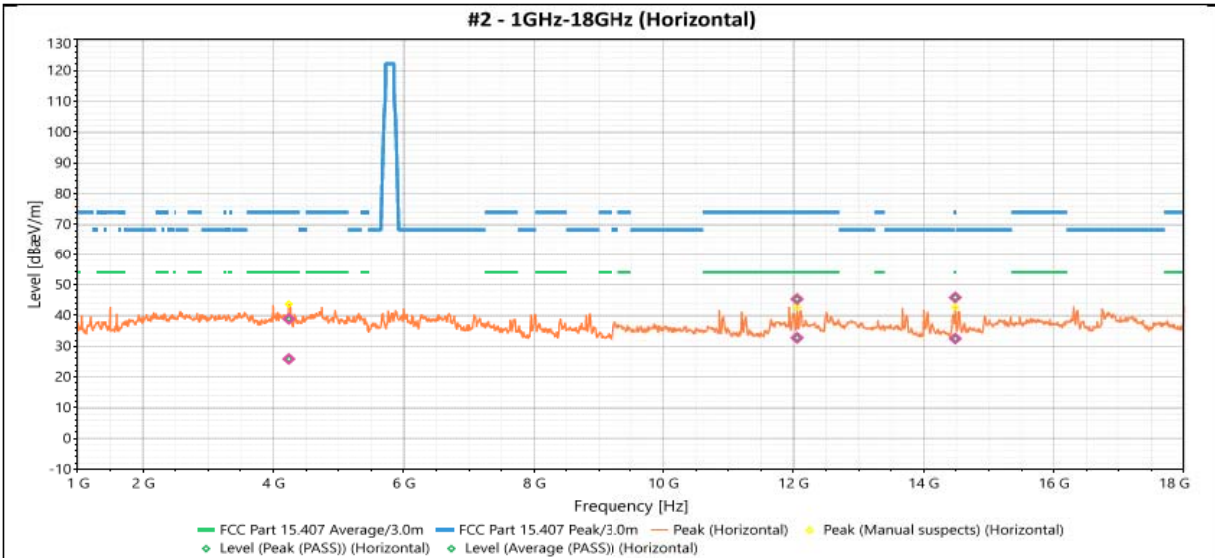


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4238.4	Horizontal	38.859	74	-35.141	1	334	3.14	Peak (PASS)
2	4238.4	Horizontal	25.826	54	-28.174	1	334	3.14	Average (PASS)
3	12055	Horizontal	45.292	74	-28.708	2.95	81	7.51	Peak (PASS)
4	12055	Horizontal	32.703	54	-21.297	2.95	81	7.51	Average (PASS)
5	14486	Horizontal	45.81	74	-28.19	1.29	4	6.83	Peak (PASS)
6	14486	Horizontal	32.461	54	-21.539	1.29	4	6.83	Average (PASS)
7	21200.9	Horizontal	55.292	74	-18.708	1.25	263	8.36	Peak (PASS)
8	21200.9	Horizontal	42.351	54	-11.649	1.25	263	8.36	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5755 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

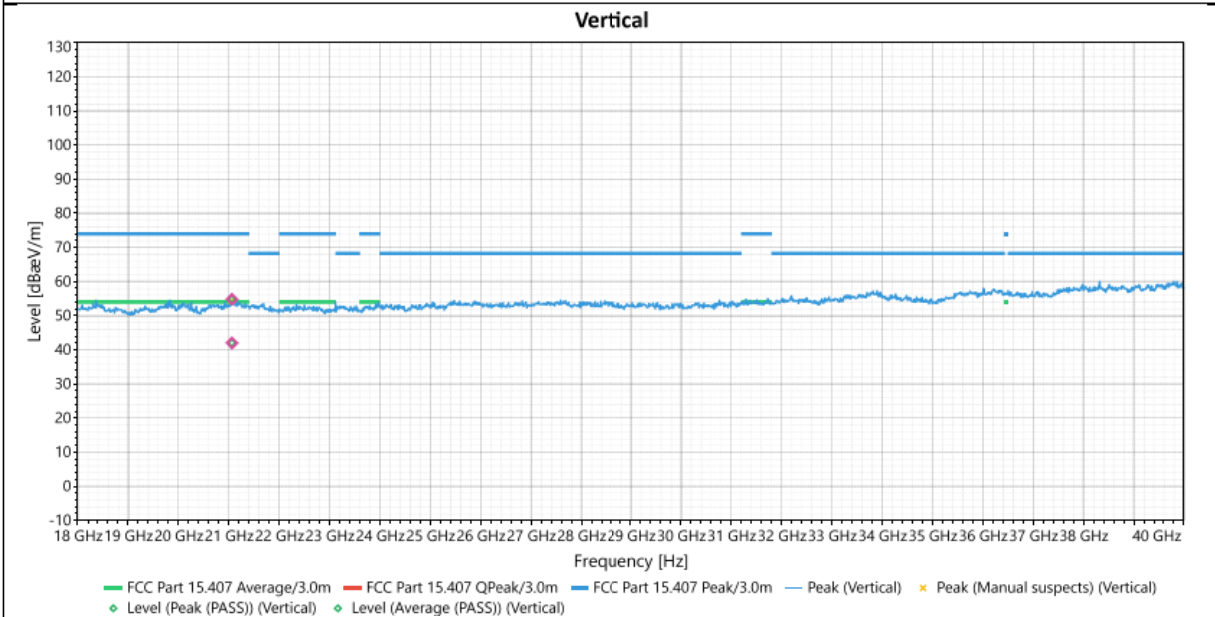
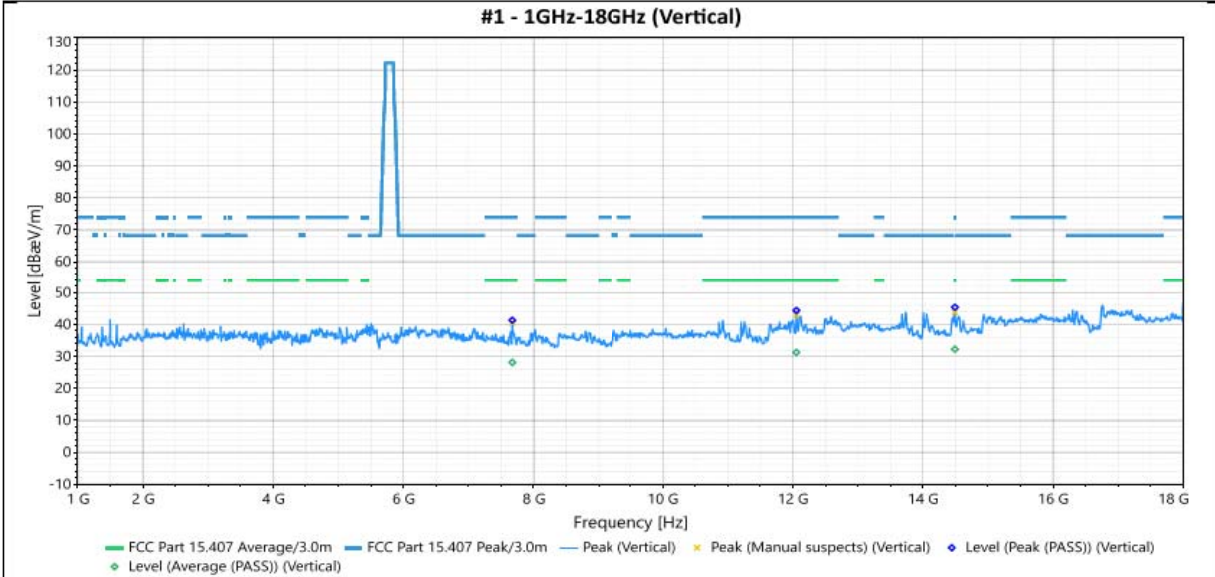


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	7672.4	Vertical	41.29	74	-32.71	2.22	341	5.84	Peak (PASS)
2	7672.4	Vertical	28.087	54	-25.913	2.22	341	5.84	Average (PASS)
3	12053.3	Vertical	44.326	74	-29.674	2.3	218	7.48	Peak (PASS)
4	12053.3	Vertical	31.224	54	-22.776	2.3	218	7.48	Average (PASS)
5	14491.1	Vertical	45.328	74	-28.672	1.46	278	6.71	Peak (PASS)
6	14491.1	Vertical	32.237	54	-21.763	1.46	278	6.71	Average (PASS)
7	21062.4	Vertical	54.793	74	-19.207	2	324	8.64	Peak (PASS)
8	21062.4	Vertical	41.991	54	-12.009	2	324	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5755 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

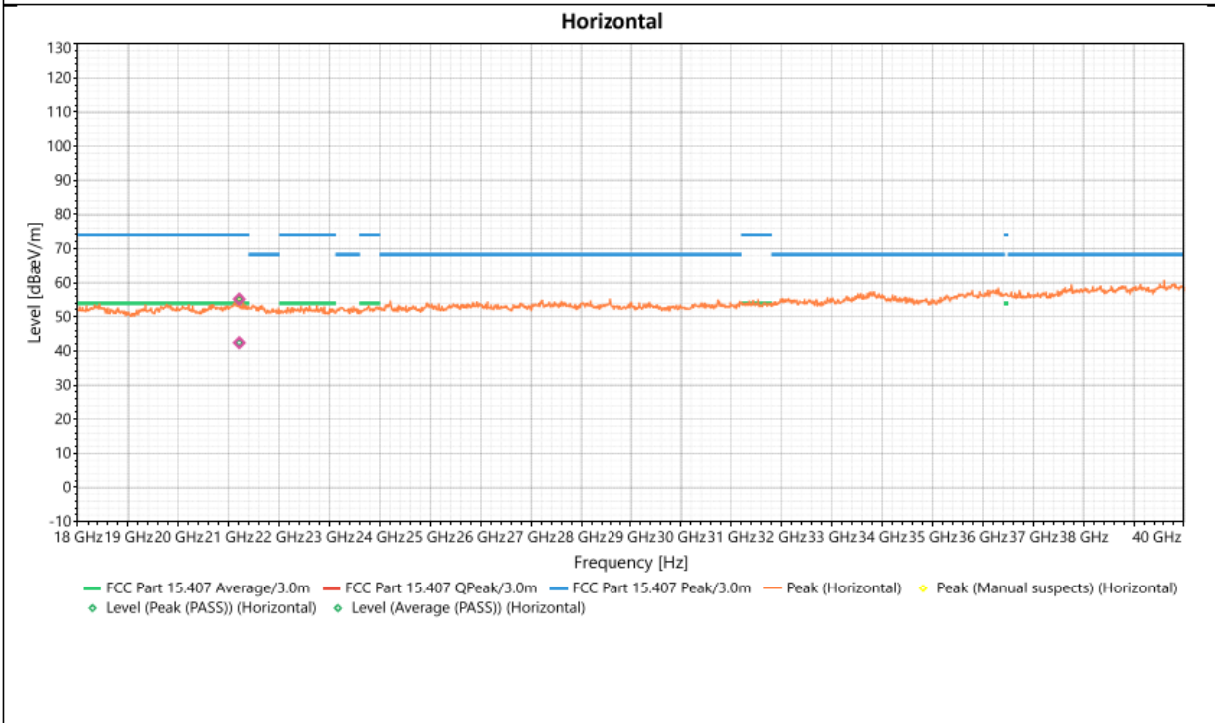
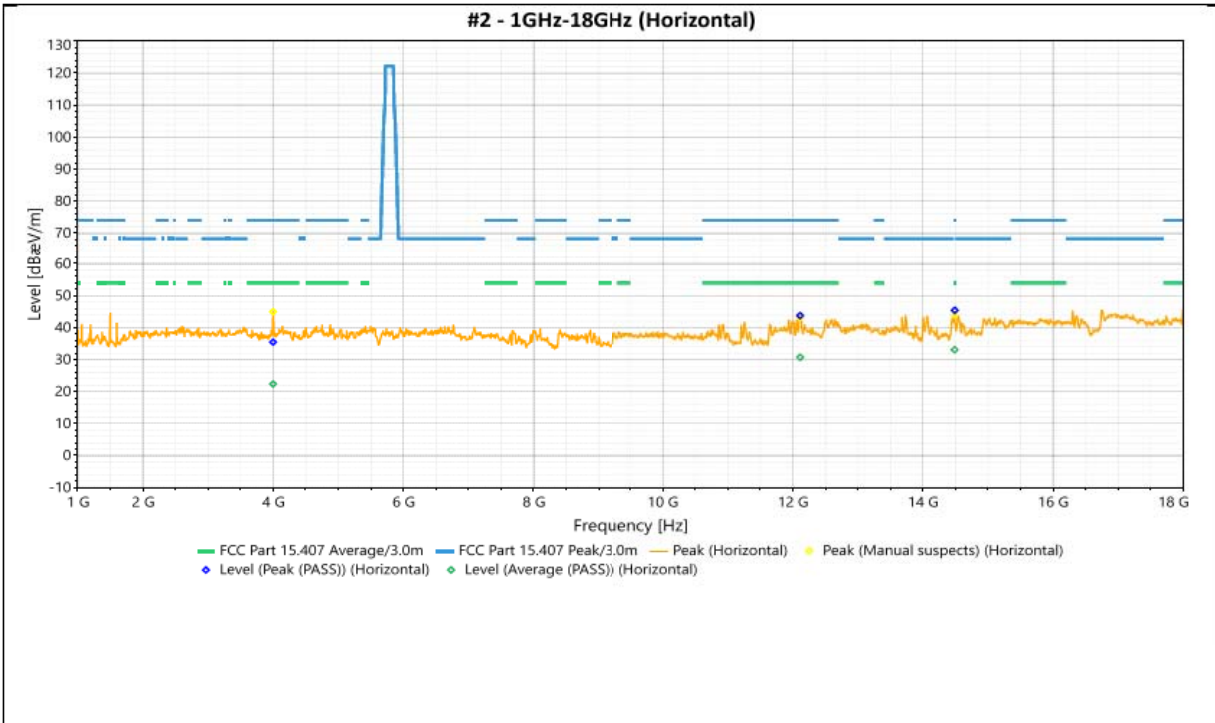


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4000.4	Horizontal	35.431	74	-38.569	1	357	3.27	Peak (PASS)
2	4000.4	Horizontal	22.328	54	-31.672	1	357	3.27	Average (PASS)
3	12111.1	Horizontal	43.754	74	-30.246	1.19	266	7.55	Peak (PASS)
4	12111.1	Horizontal	30.699	54	-23.301	1.19	266	7.55	Average (PASS)
5	14487.7	Horizontal	45.403	74	-28.597	1.85	310	6.83	Peak (PASS)
6	14487.7	Horizontal	33.043	54	-20.957	1.85	310	6.83	Average (PASS)
7	21207.5	Horizontal	55.179	74	-18.821	1.14	271	8.36	Peak (PASS)
8	21207.5	Horizontal	42.403	54	-11.597	1.14	271	8.36	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5795 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

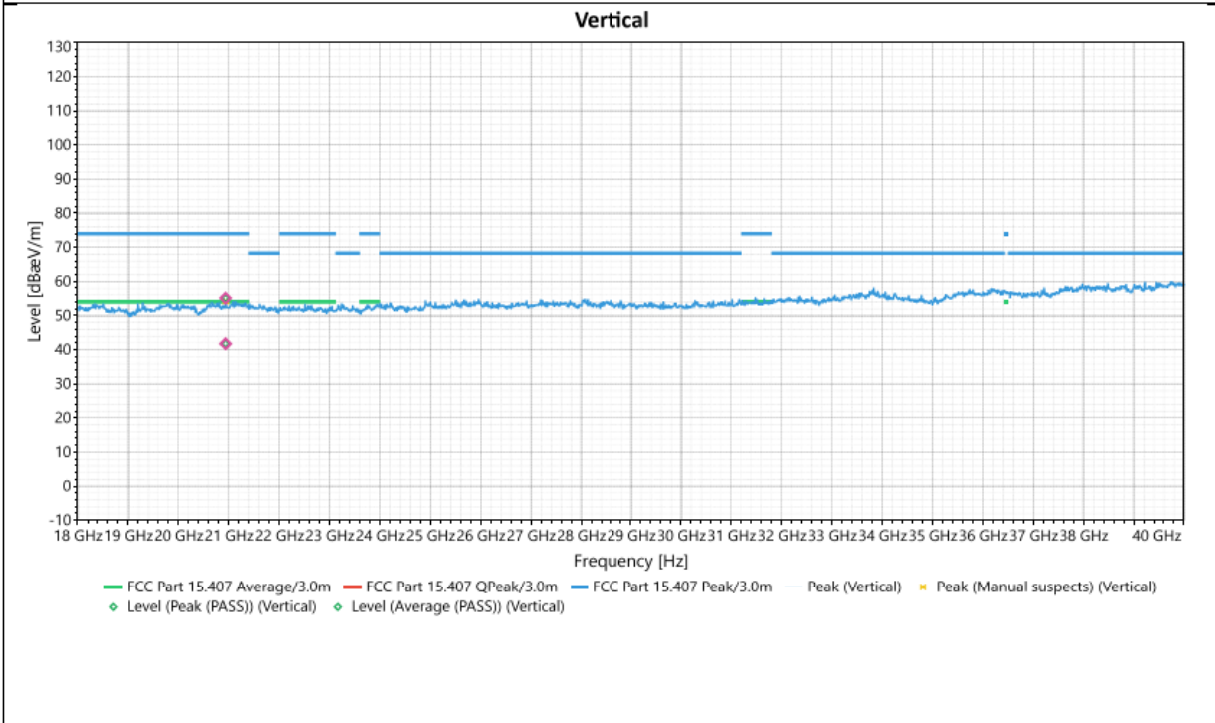
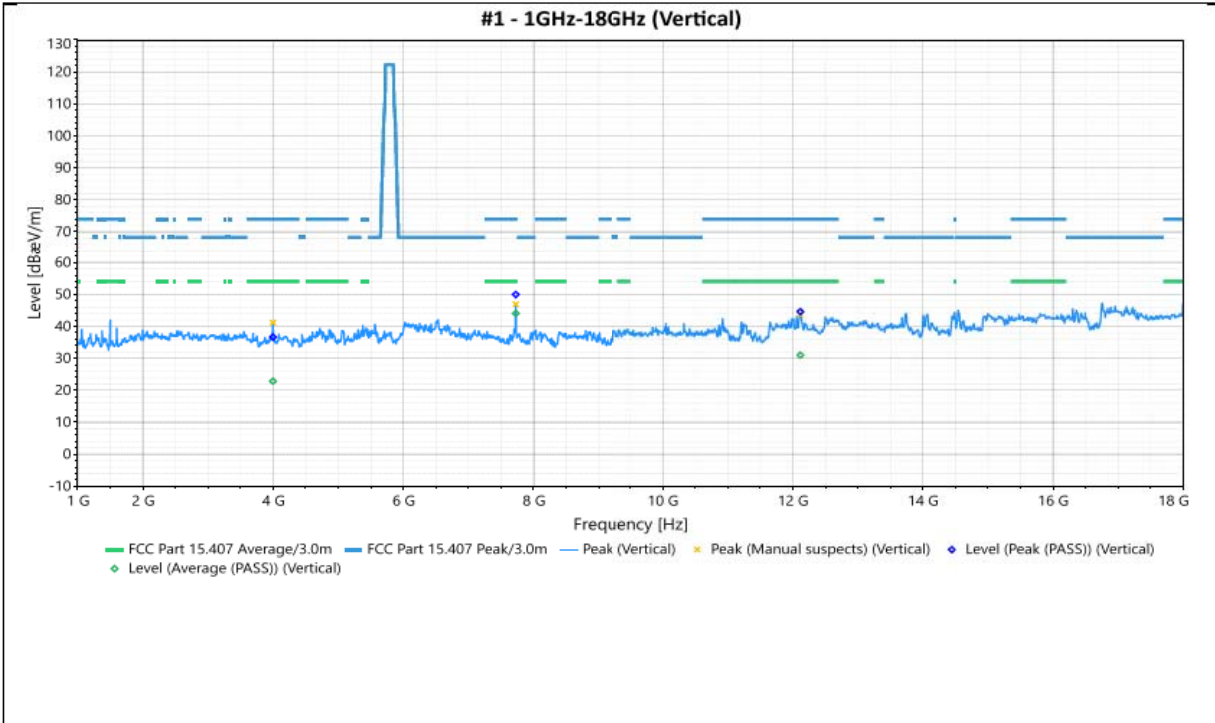


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	3998.7	Vertical	36.598	74	-37.402	1	352	3.25	Peak (PASS)
2	3998.7	Vertical	22.819	54	-31.181	1	352	3.25	Average (PASS)
3	7726.8	Vertical	49.924	74	-24.076	1.66	358	5.81	Peak (PASS)
4	7726.8	Vertical	44.007	54	-9.993	1.66	358	5.81	Average (PASS)
5	12114.5	Vertical	44.55	74	-29.45	2.18	336	7.54	Peak (PASS)
6	12114.5	Vertical	30.941	54	-23.059	2.18	336	7.54	Average (PASS)
7	20937.06	Vertical	55.072	74	-18.928	1.02	223	8.6	Peak (PASS)
8	20937.06	Vertical	41.748	54	-12.252	1.02	223	8.6	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against

Frequency	802.11N HT40 5795 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

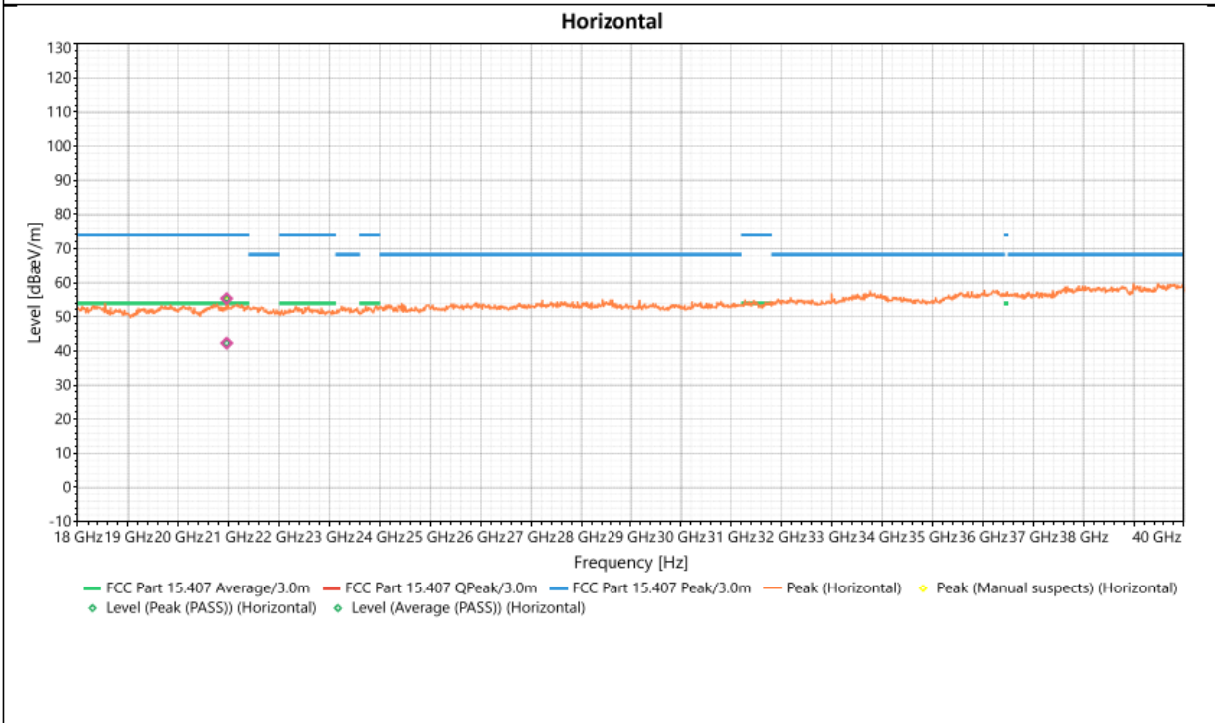
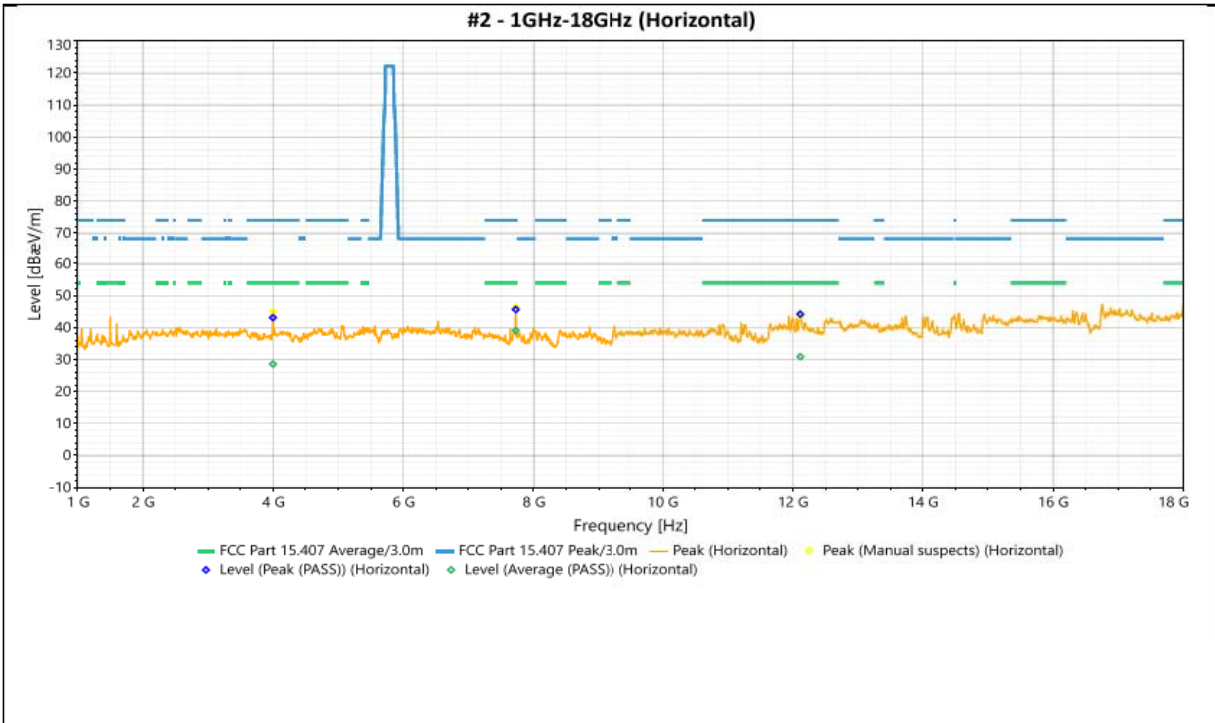


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	3998.7	Horizontal	43.088	74	-30.912	1.65	312	3.27	Peak (PASS)
2	3998.7	Horizontal	28.538	54	-25.462	1.65	312	3.27	Average (PASS)
3	7726.8	Horizontal	45.639	74	-28.361	1.65	343	5.82	Peak (PASS)
4	7726.8	Horizontal	39.019	54	-14.981	1.65	343	5.82	Average (PASS)
5	12114.5	Horizontal	44.185	74	-29.815	1.26	234	7.55	Peak (PASS)
6	12114.5	Horizontal	30.87	54	-23.13	1.26	234	7.55	Average (PASS)
7	9482.361	Horizontal	26.098	74	-47.902	1.36	37	2.32	Peak (PASS)
8	9482.361	Horizontal	20.837	54	-33.163	1.36	37	2.32	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11 ac80 5210 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

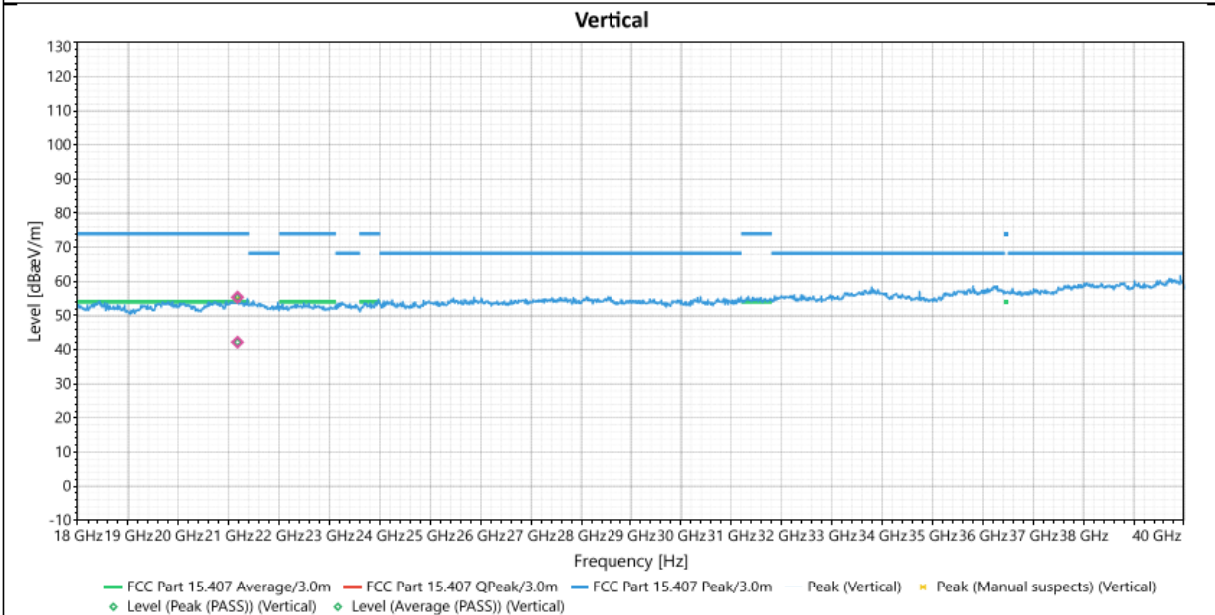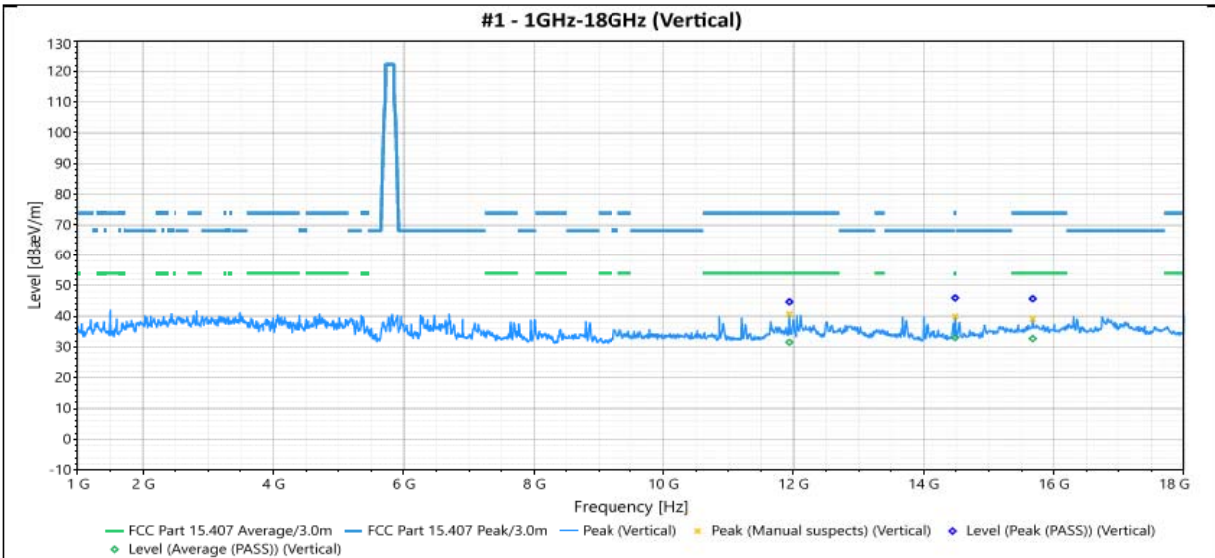

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11937.7	Vertical	44.655	74	-29.345	1.32	330	7.43	Peak (PASS)
2	11937.7	Vertical	31.504	54	-22.496	1.32	330	7.43	Average (PASS)
3	14484.3	Vertical	45.899	74	-28.101	3.39	170	6.7	Peak (PASS)
4	14484.3	Vertical	33.005	54	-20.995	3.39	170	6.7	Average (PASS)
5	15676	Vertical	45.638	74	-28.362	2.5	351	8.26	Peak (PASS)
6	15676	Vertical	32.674	54	-21.326	2.5	351	8.26	Average (PASS)
7	21172.36	Horizontal	55.347	74	-18.653	1.5	243	8.5	Peak (PASS)
8	21172.36	Horizontal	42.198	54	-11.802	1.5	243	8.5	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains