
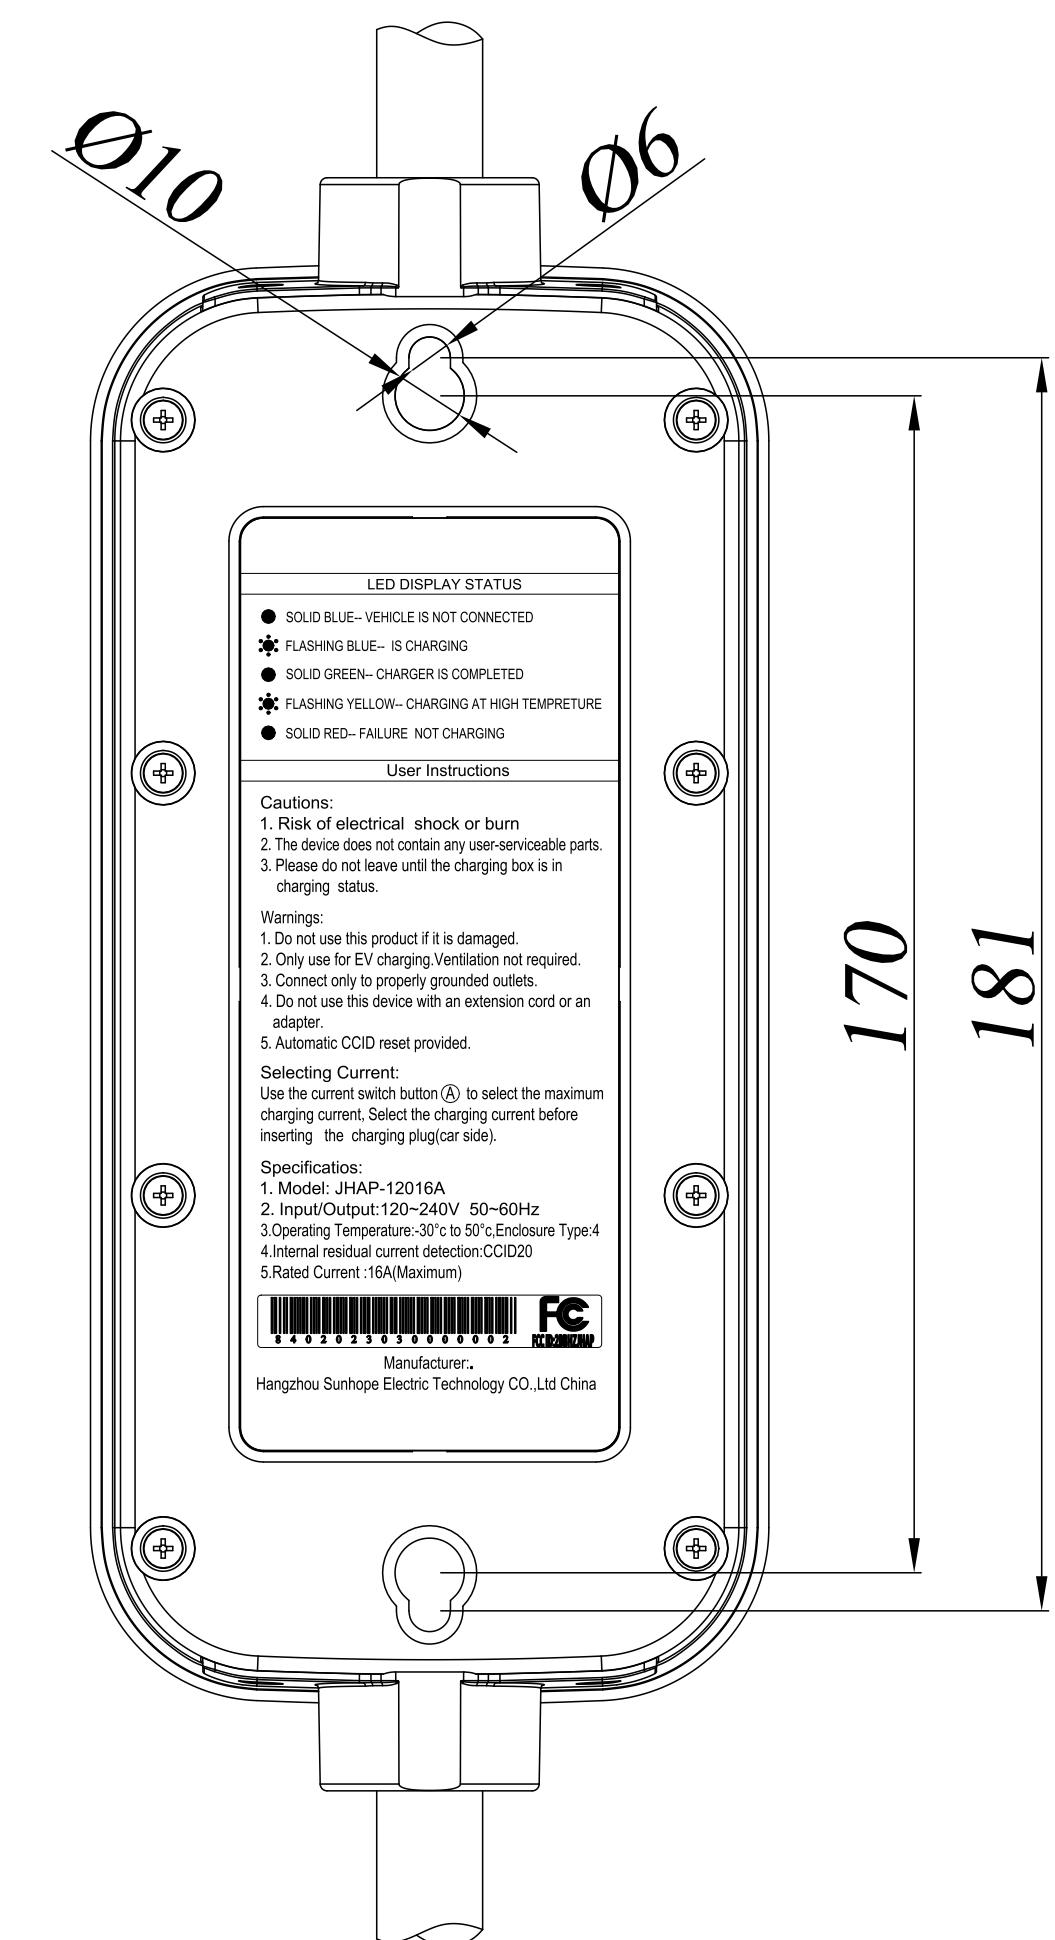
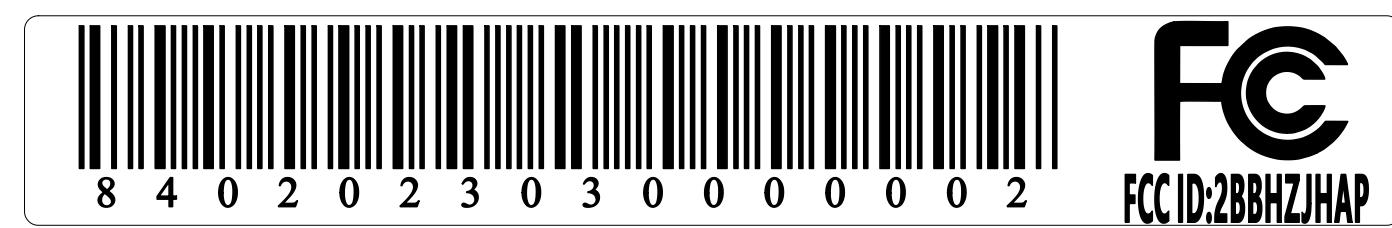
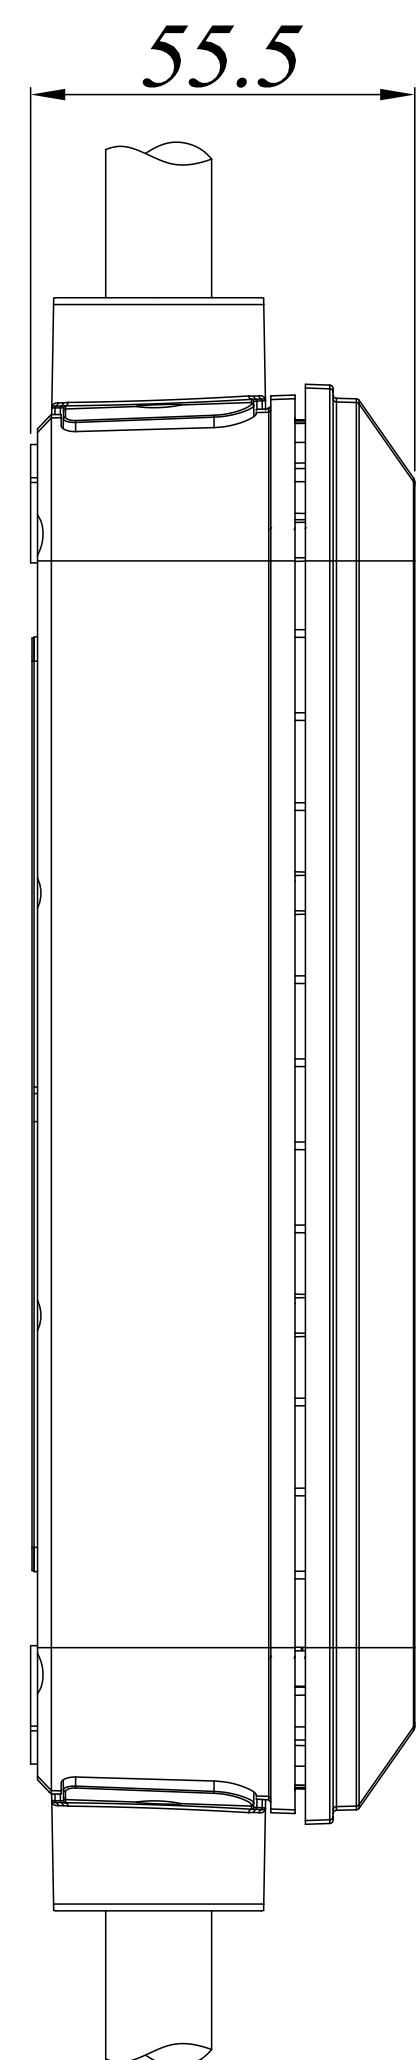
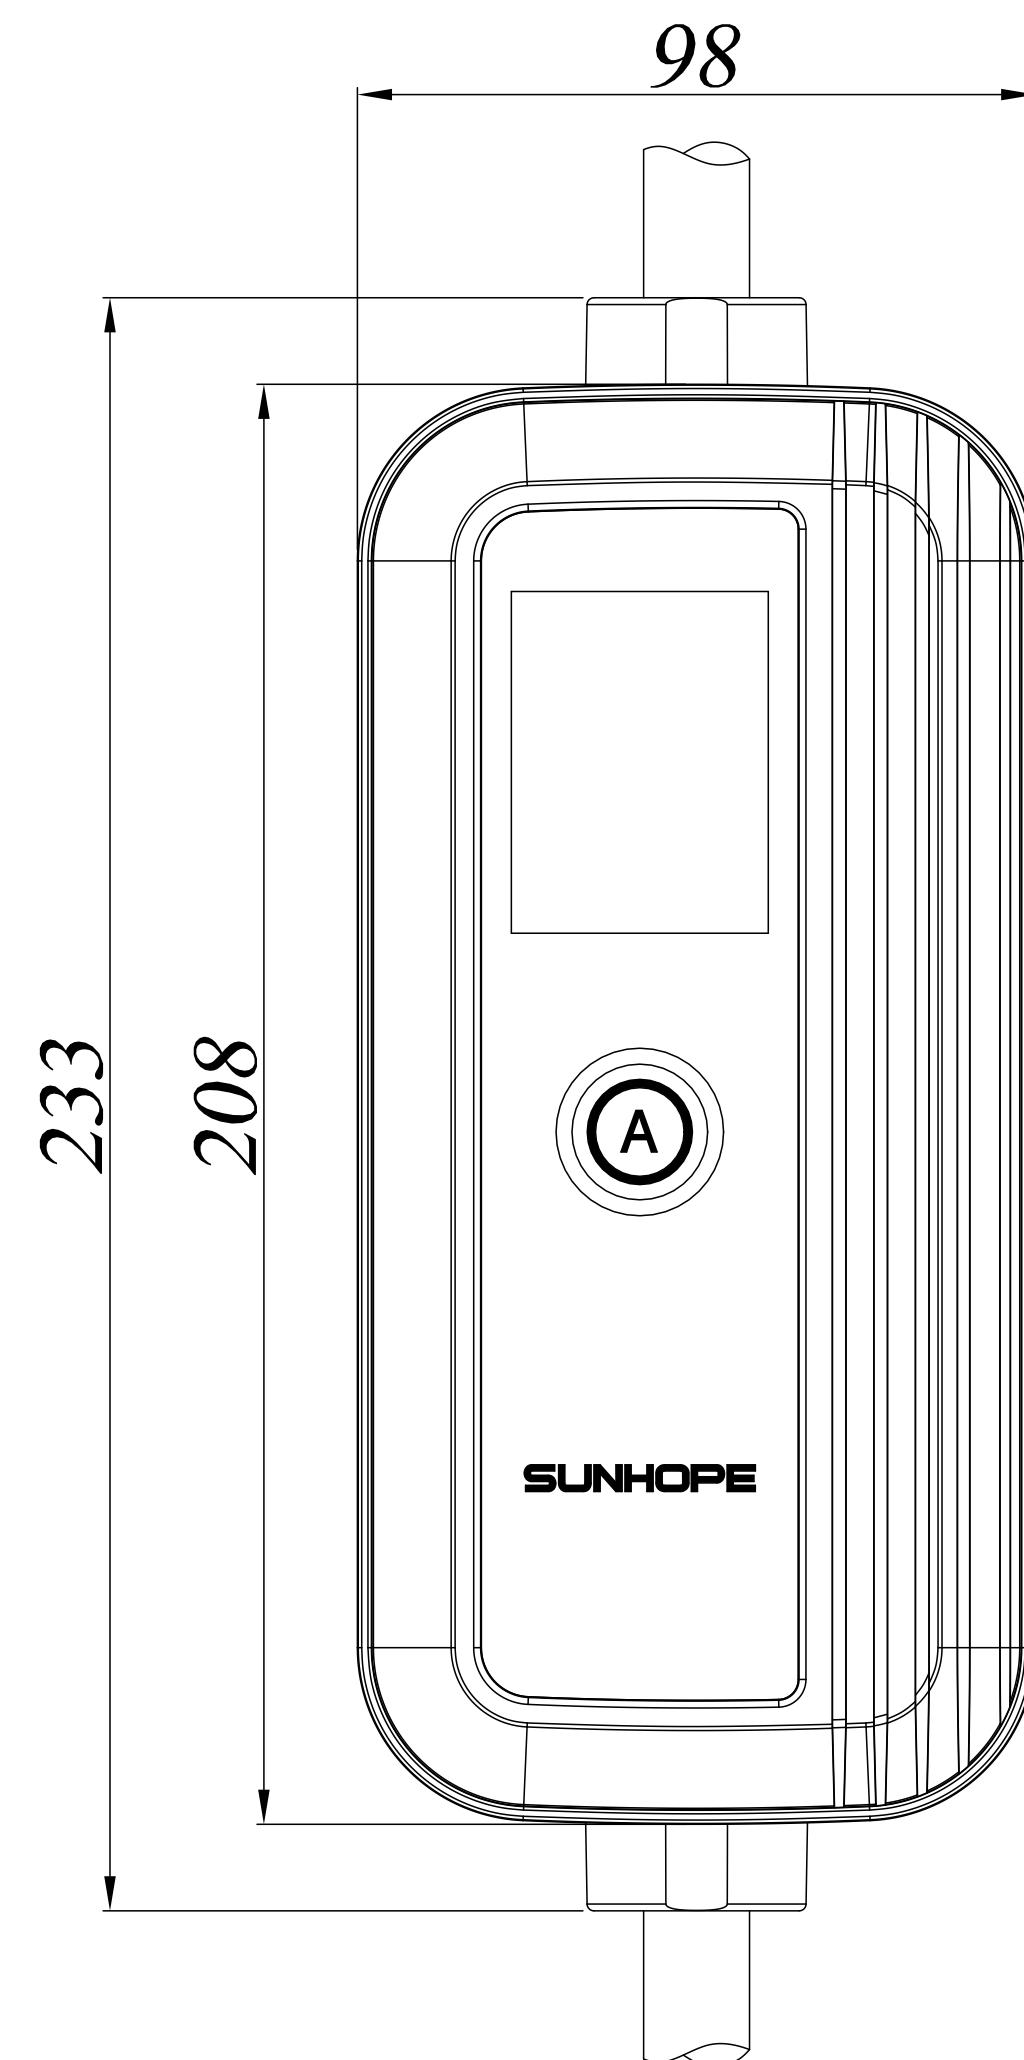


CD03

JHAP-12016A
JHAP-24032A

JH0.304.0004

06/2023

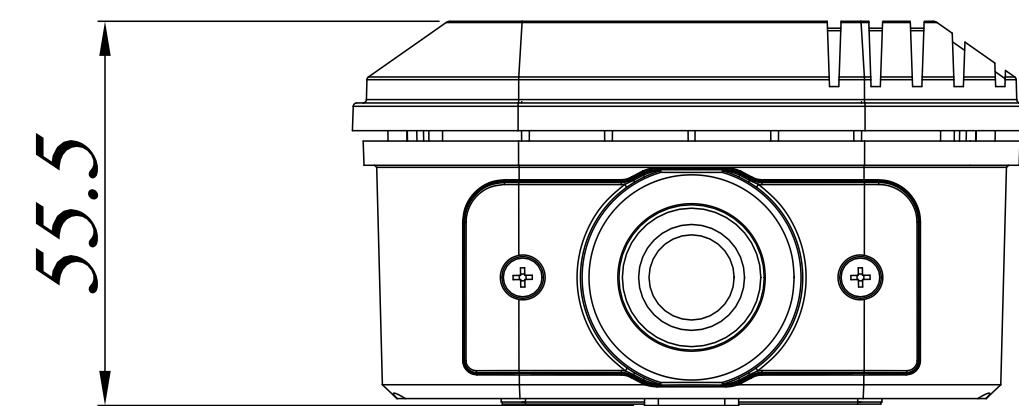

LED DISPLAY STATUS

- SOLID BLUE- VEHICLE IS NOT CONNECTED
- FLASHING BLUE- IS CHARGING
- SOLID GREEN- CHARGER IS COMPLETED
- FLASHING YELLOW- CHARGING AT HIGH TEMPERATURE
- SOLID RED- FAILURE NOT CHARGING

User Instructions

Cautions:

1. Risk of electrical shock or burn
2. The device does not contain any user-serviceable parts.
3. Please do not leave until the charging box is in charging status.

Warnings:

1. Do not use this product if it is damaged
2. Only use for EV charging. Ventilation not required.
3. Connect only to properly grounded outlets.
4. Do not use this device with an extension cord or an adapter.
5. Automatic CCID reset provided.

Selecting Current:
Use the current switch button (A) to select the maximum charging current. Select the charging current before inserting the charging plug (car side).

Specifications:

1. Model: JHAP-12016A
2. Input/Output: 120~240V 50~60Hz
3. Operating Temperature: -30°C to 50°C
4. Enclosure Type: 4
5. Internal residual current detection: CCID20
6. Rated Current: 16A (Maximum)

Manufacturer:
Hangzhou Sunhope Electric Technology CO.,Ltd China

CD03

JHAP-12016A
JHAP-24032A

JH0.304.0004

06/2023