


SPECIFICATION FOR APPROVAL

CUSTOMER:	
CUST P/N:	
FINE P/N:	
DESC:	
DATE:	2023/3/15
Version:	A.0.05


Shenzhen Nito Power Source Technology Co., Ltd.

201, No. 8 Building, No. 49 WuheNan Rd., Jinfanghua Electricity industrial Park,
Bantian St., Longgang District, Shenzhen

一、尺寸 DIMENSION:(mm)

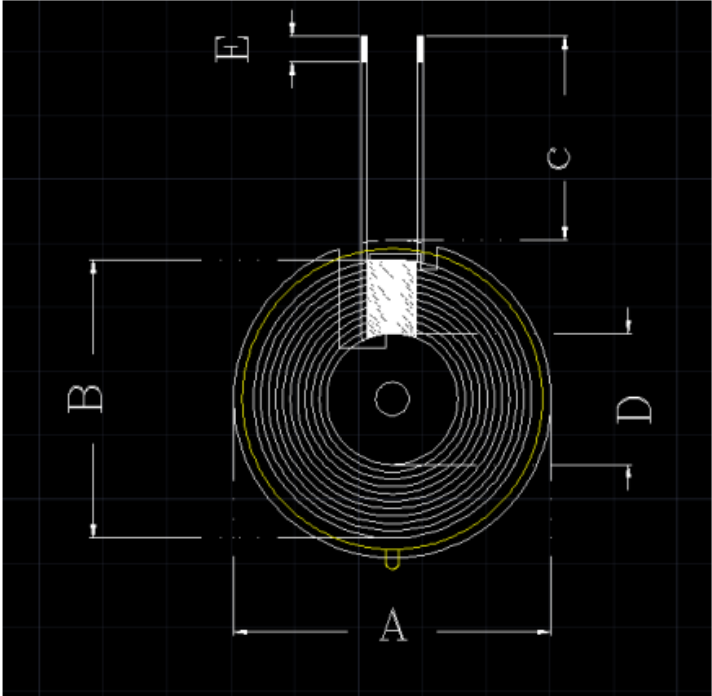

二、原理图 SCHEMATIC DIAGRAM:

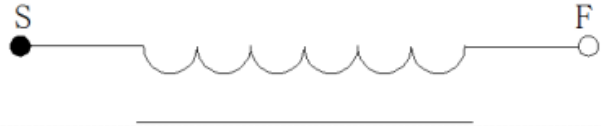

A	44±1.0
B	42.5±1.0
C	150±2
D	20.5±0.5
E	4±2

注：
1.交叉出线；
2.出线位置缠 8mm(ref)宽度高温胶纸 1-2Ts；
3.线圈贴圆形硬磁片带槽，磁片尺寸 44±1mm,内孔 5.0mm,厚度为 0.8±0.2mm。
4.磁片背面贴背胶

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	丝包线 0.08*105P	10Ts	CCW