



802.11b CH6

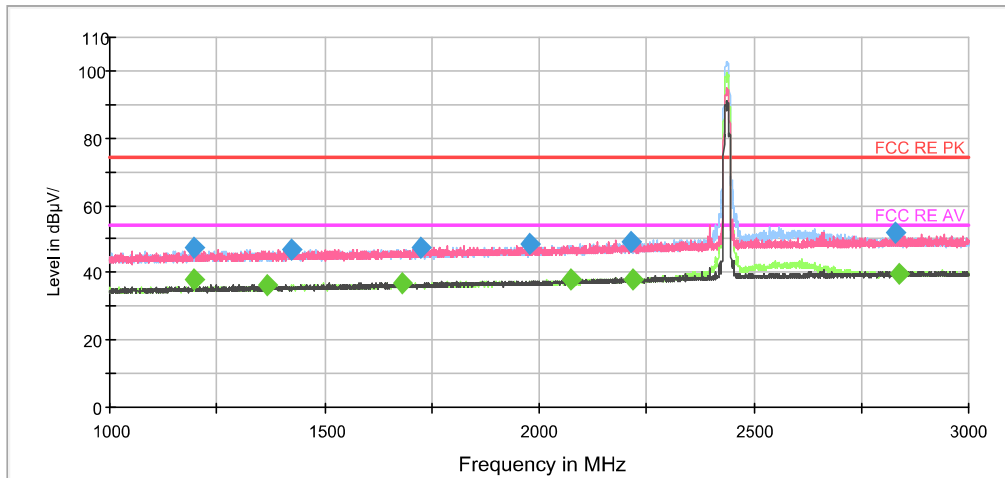

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

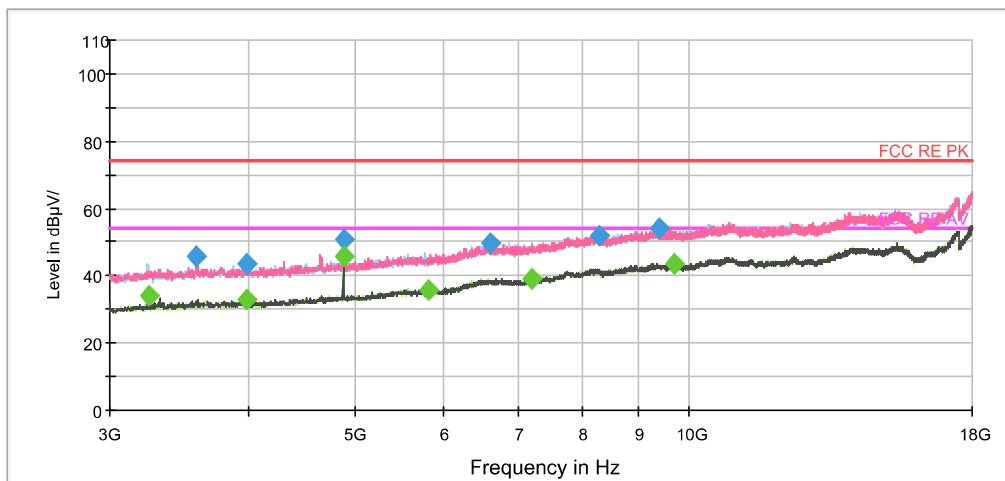

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.750000	47.7	100.0	V	20.0	-1.2	26.3	74.0
1422.750000	47.1	100.0	H	66.0	-0.6	26.9	74.0
1723.250000	47.5	200.0	V	277.0	0.4	26.5	74.0
1980.250000	48.3	100.0	V	200.0	1.1	25.7	74.0
2212.500000	48.9	200.0	V	170.0	2.3	25.1	74.0
2831.750000	51.9	200.0	V	198.0	4.4	22.1	74.0

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.250000	37.8	100.0	V	20.0	-1.2	16.2	54.0
1366.500000	36.4	100.0	V	250.0	-0.8	17.6	54.0
1683.000000	37.1	200.0	H	29.0	0.3	16.9	54.0
2075.500000	38.0	200.0	H	316.0	1.5	16.0	54.0
2216.750000	38.2	200.0	V	267.0	2.3	15.8	54.0
2838.250000	39.9	200.0	V	315.0	4.4	14.1	54.0

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11b CH11

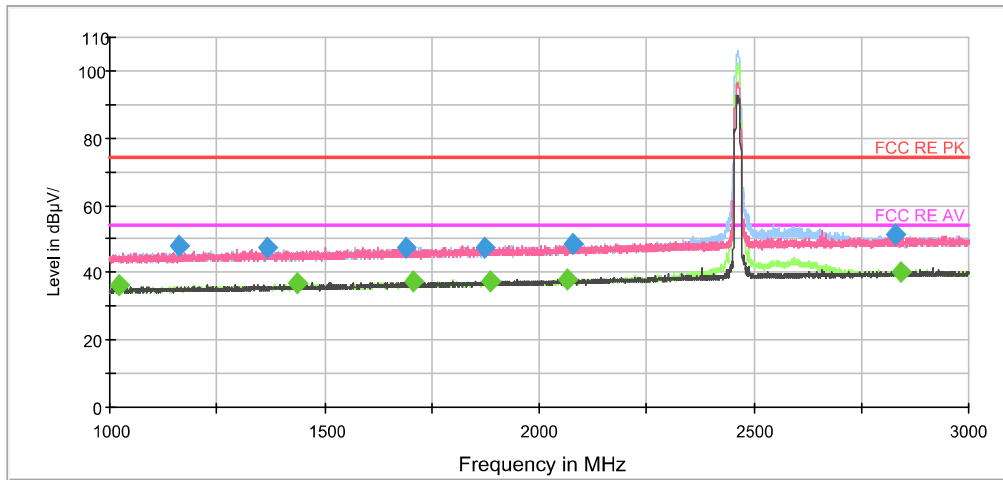

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

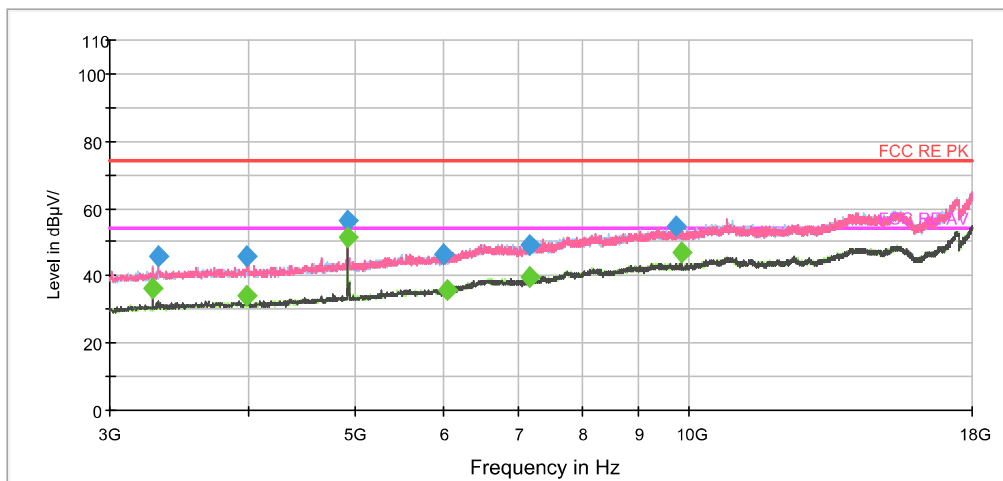

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1161.250000	48.0	100.0	V	17.0	-1.3	26.0	74.0
1364.750000	47.4	100.0	H	307.0	-0.8	26.6	74.0
1689.250000	47.6	100.0	V	22.0	0.4	26.4	74.0
1875.500000	47.2	100.0	H	334.0	0.8	26.8	74.0
2079.500000	48.6	100.0	V	210.0	1.5	25.4	74.0
2827.750000	51.5	100.0	H	177.0	4.4	22.5	74.0

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1020.000000	36.3	100.0	V	0.0	-1.8	17.7	54.0
1436.500000	36.6	100.0	H	118.0	-0.6	17.4	54.0
1709.500000	37.3	200.0	V	278.0	0.4	16.7	54.0
1887.750000	37.2	100.0	H	207.0	0.8	16.8	54.0
2063.500000	38.1	200.0	V	351.0	1.5	15.9	54.0
2840.750000	40.1	100.0	V	170.0	4.4	13.9	54.0

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11g CH1

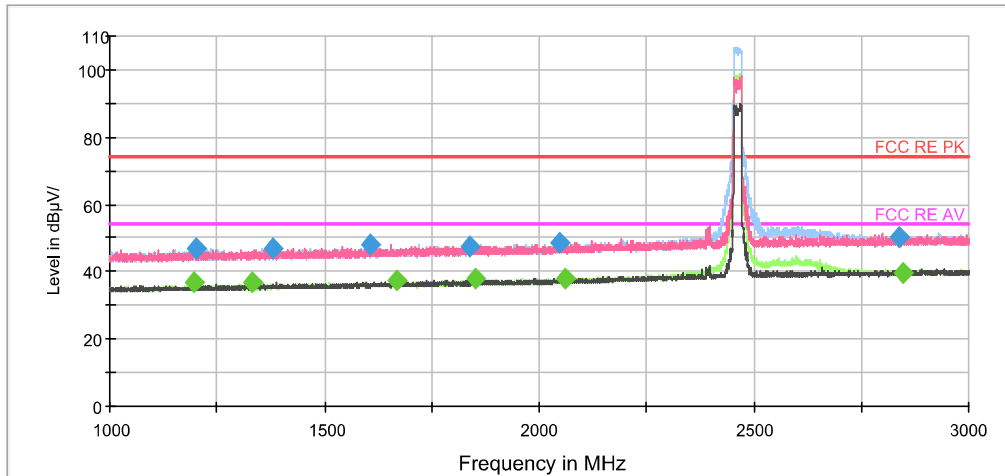

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

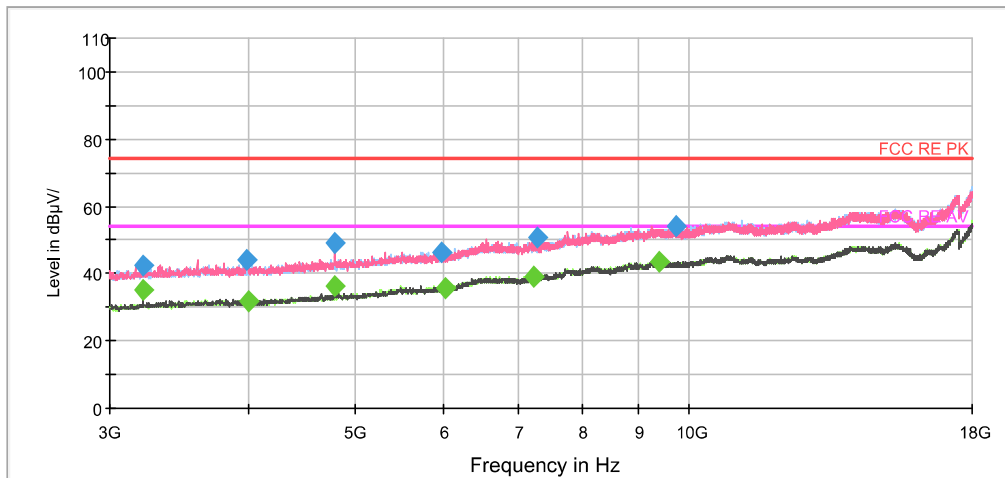

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1200.000000	46.8	100.0	H	264.0	-1.2	27.2	74.0
1377.750000	47.1	200.0	V	348.0	-0.7	26.9	74.0
1606.000000	48.1	200.0	H	263.0	0.0	25.9	74.0
1840.500000	47.4	100.0	H	206.0	0.7	26.6	74.0
2046.750000	48.3	100.0	H	56.0	1.4	25.7	74.0
2839.000000	50.1	100.0	V	199.0	4.4	23.9	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.500000	37.0	200.0	V	155.0	-1.2	17.0	54.0
1332.250000	36.7	100.0	H	254.0	-0.9	17.3	54.0
1668.250000	37.3	200.0	V	0.0	0.2	16.7	54.0
1852.250000	37.7	100.0	H	321.0	0.8	16.3	54.0
2059.000000	37.9	200.0	V	358.0	1.4	16.1	54.0
2848.000000	39.9	100.0	H	292.0	4.4	14.1	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11g CH6

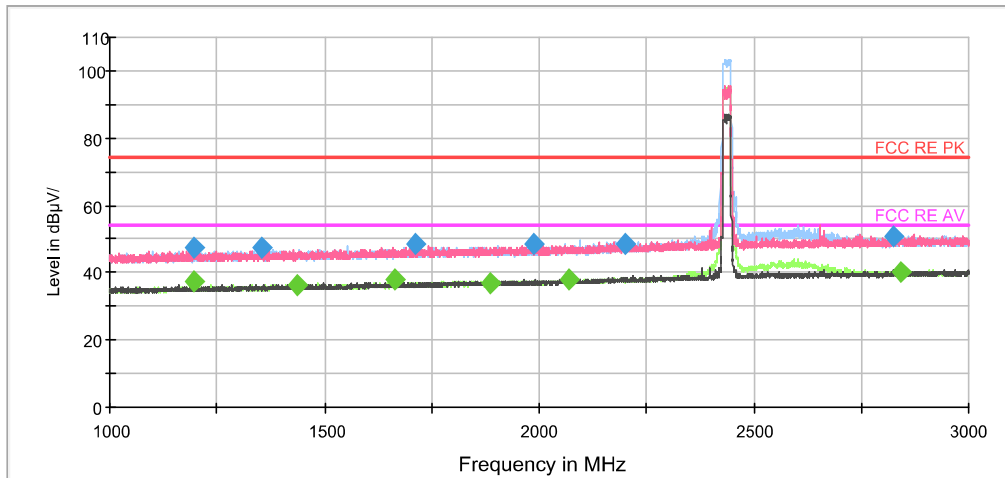

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

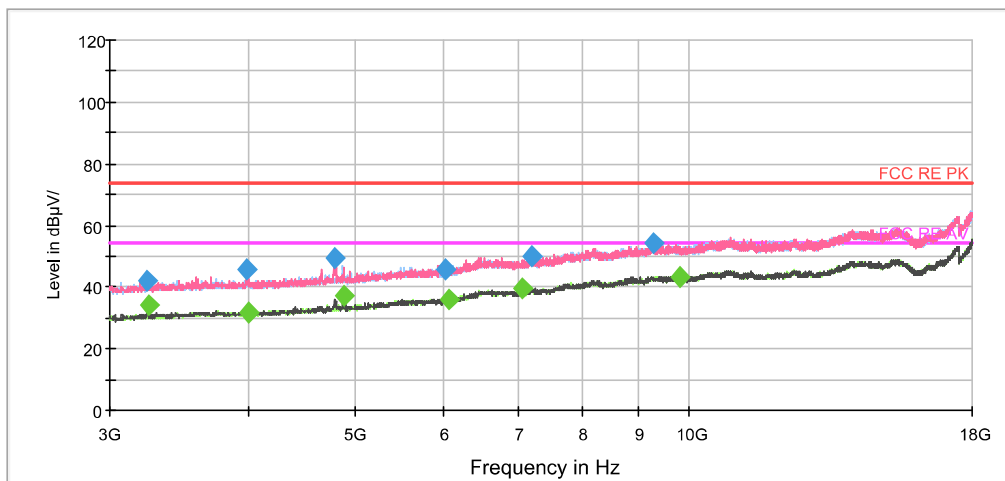

Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.250000	47.5	200.0	V	120.0	-1.2	26.5	74.0
1352.750000	47.4	100.0	H	0.0	-0.9	26.6	74.0
1710.750000	48.4	100.0	V	209.0	0.4	25.6	74.0
1988.000000	48.5	100.0	V	219.0	1.1	25.5	74.0
2198.750000	48.6	200.0	V	0.0	2.2	25.4	74.0
2826.750000	50.8	100.0	V	229.0	4.4	23.2	74.0

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.250000	37.3	200.0	V	120.0	-1.2	16.7	54.0
1436.250000	36.5	100.0	V	219.0	-0.6	17.5	54.0
1662.000000	37.7	200.0	V	348.0	0.2	16.3	54.0
1888.000000	36.8	200.0	V	140.0	0.8	17.2	54.0
2069.750000	38.1	100.0	H	278.0	1.5	15.9	54.0
2840.750000	40.0	100.0	V	119.0	4.4	14.0	54.0

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**






802.11g CH11

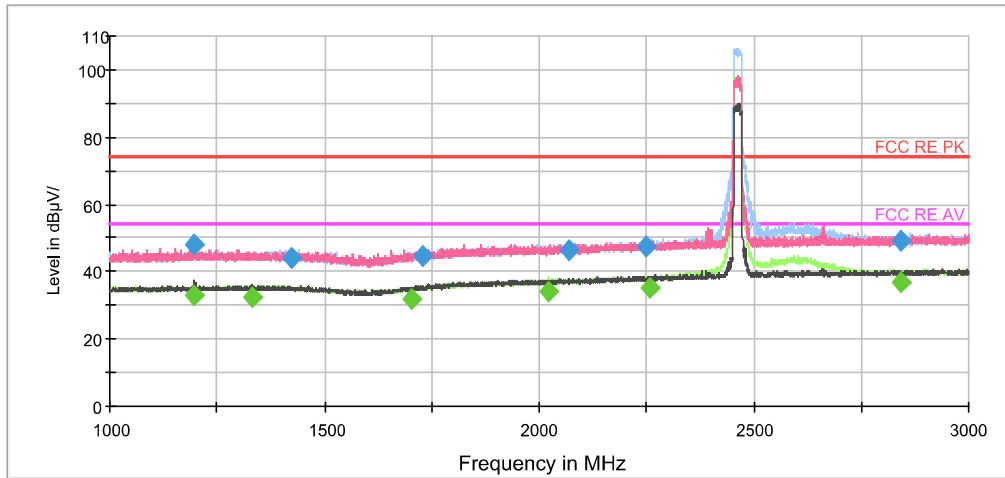

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

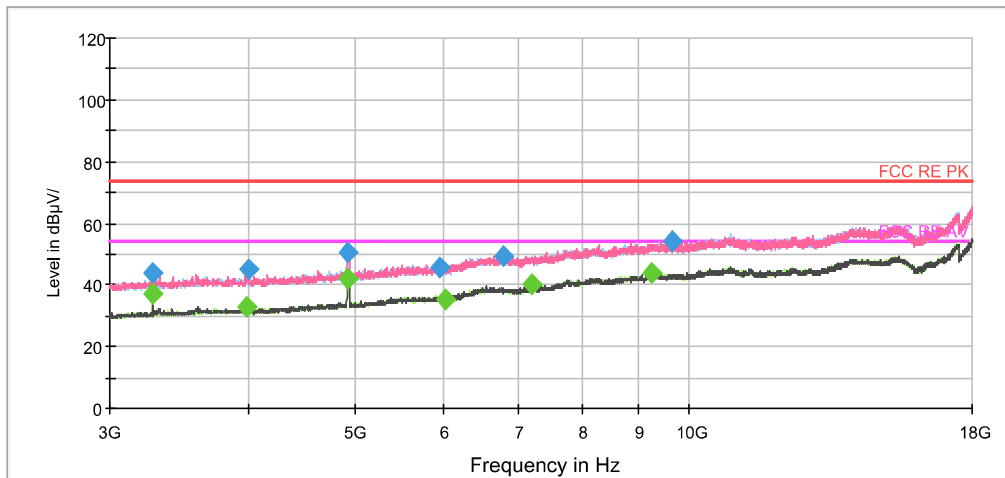

Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.250000	47.8	197.0	V	180.0	-1.2	26.2	74.0
1425.750000	44.2	225.0	V	100.0	-0.6	29.8	74.0
1729.500000	44.7	119.0	V	44.0	0.5	29.3	74.0
2070.750000	46.3	125.0	H	200.0	1.5	27.7	74.0
2246.750000	47.7	175.0	V	215.0	2.4	26.3	74.0
2844.500000	49.4	100.0	V	37.0	4.4	24.6	74.0


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.000000	32.9	125.0	V	10.0	-1.2	21.1	54.0
1329.750000	32.2	212.0	V	220.0	-0.9	21.8	54.0
1701.750000	31.9	225.0	H	4.0	0.4	22.1	54.0
2021.250000	33.8	100.0	H	0.0	1.2	20.2	54.0
2257.500000	35.1	100.0	H	203.0	2.5	18.9	54.0
2843.000000	36.8	100.0	H	0.0	4.4	17.2	54.0


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**



802.11n (HT20) CH1

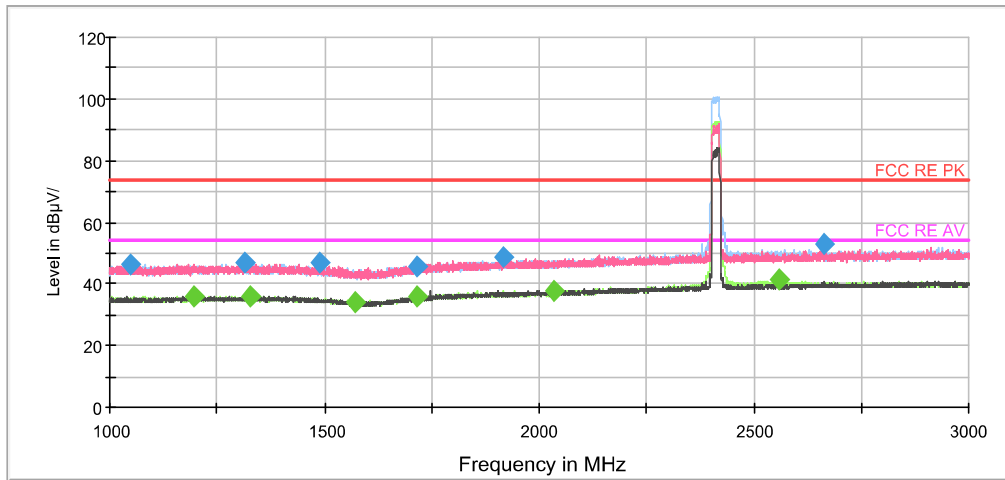

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

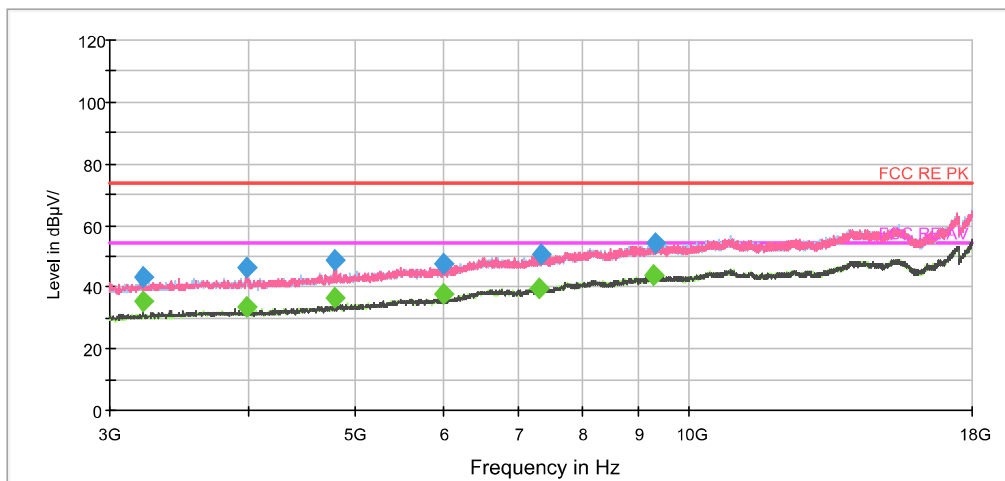

Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1047.250000	46.5	200.0	H	15.0	-1.7	27.5	74.0
1314.750000	46.6	200.0	V	215.0	-0.9	27.4	74.0
1490.500000	46.6	100.0	H	334.0	-0.4	27.4	74.0
1717.250000	45.8	100.0	H	0.0	0.4	28.2	74.0
1918.750000	48.5	200.0	V	339.0	1.0	25.5	74.0
2665.750000	53.1	200.0	V	215.0	3.9	20.9	74.0


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.750000	36.1	200.0	V	353.0	-1.2	17.9	54.0
1329.500000	36.1	100.0	V	65.0	-0.9	17.9	54.0
1572.000000	34.3	100.0	H	0.0	-0.1	19.7	54.0
1714.250000	35.9	100.0	V	3.0	0.4	18.1	54.0
2036.000000	38.0	200.0	H	168.0	1.3	16.0	54.0
2560.750000	41.2	100.0	H	0.0	3.7	12.8	54.0


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**



802.11n (HT20) CH6

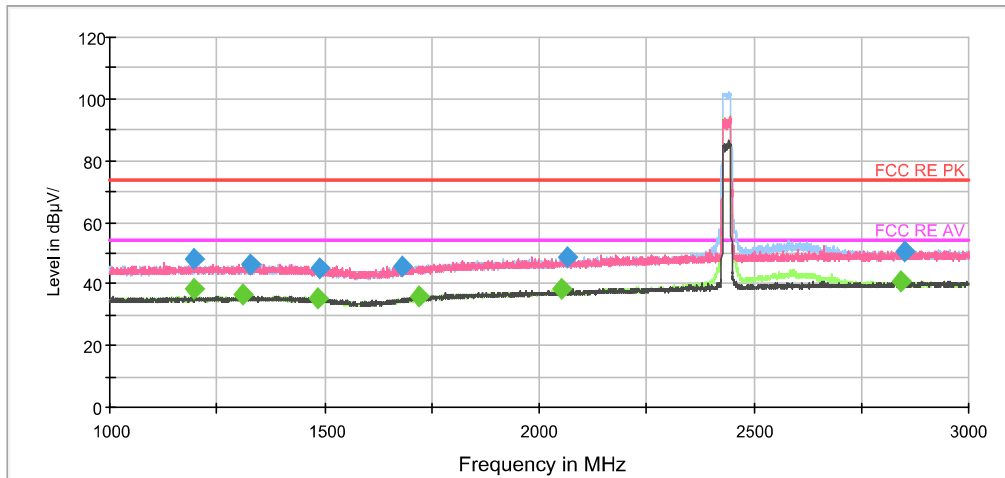

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

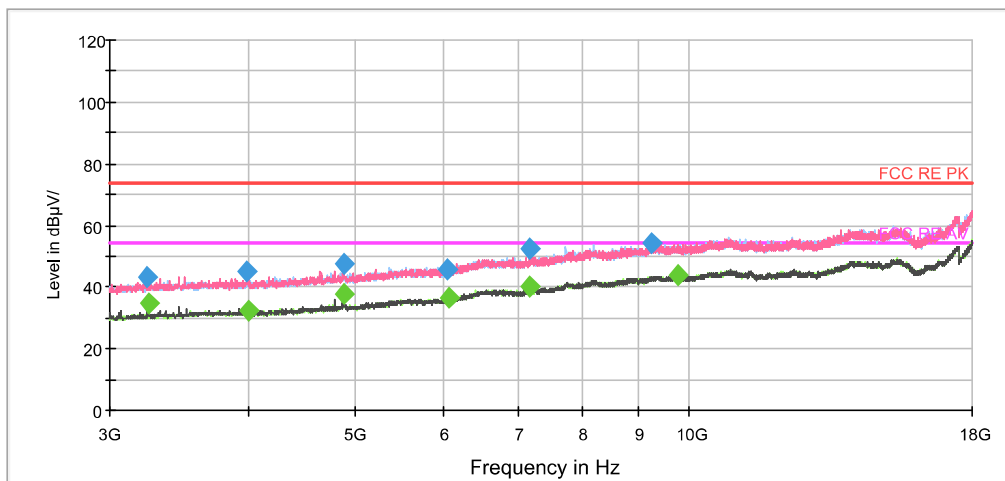

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.250000	48.1	100.0	V	0.0	-1.2	25.9	74.0
1325.500000	46.6	100.0	H	136.0	-0.9	27.4	74.0
1490.500000	44.9	100.0	H	0.0	-0.4	29.1	74.0
1682.250000	45.9	200.0	V	210.0	0.3	28.1	74.0
2064.750000	48.8	200.0	H	201.0	1.5	25.2	74.0
2850.250000	50.3	200.0	H	338.0	4.4	23.7	74.0

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.250000	38.2	100.0	V	0.0	-1.2	15.8	54.0
1308.750000	36.4	200.0	H	20.0	-1.0	17.6	54.0
1486.000000	35.4	200.0	V	358.0	-0.5	18.6	54.0
1720.750000	35.8	200.0	V	352.0	0.4	18.2	54.0
2050.250000	38.3	100.0	V	66.0	1.4	15.7	54.0
2844.000000	40.6	100.0	V	32.0	4.4	13.4	54.0

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

## 802.11n (HT20) CH11

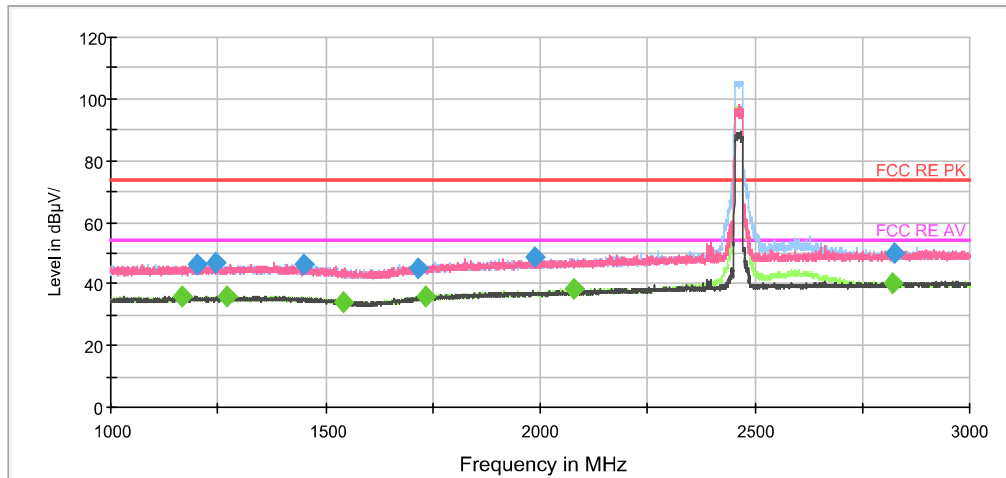

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

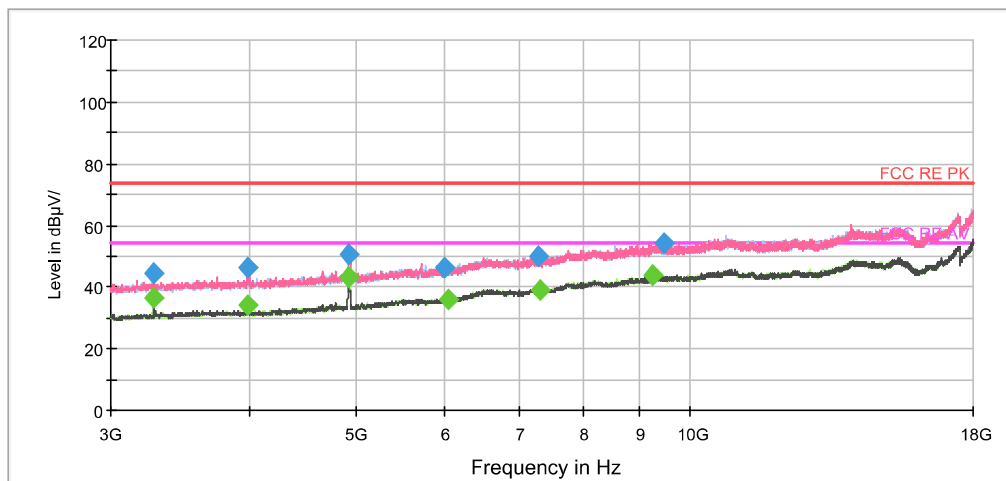

Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1199.750000	46.3	100.0	V	122.0	-1.2	27.7	74.0
1246.250000	46.8	200.0	V	354.0	-1.1	27.2	74.0
1449.000000	46.3	100.0	V	108.0	-0.6	27.7	74.0
1714.000000	45.3	200.0	V	0.0	0.4	28.7	74.0
1985.500000	48.5	100.0	H	324.0	1.1	25.5	74.0
2823.250000	49.7	200.0	V	0.0	4.4	24.3	74.0


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1166.000000	36.2	200.0	V	350.0	-1.3	17.8	54.0
1272.250000	35.9	200.0	V	324.0	-1.1	18.1	54.0
1542.750000	34.2	100.0	H	302.0	-0.3	19.8	54.0
1731.500000	35.9	100.0	V	180.0	0.5	18.1	54.0
2079.500000	38.1	100.0	H	302.0	1.5	15.9	54.0
2823.000000	40.0	200.0	H	99.0	4.4	14.0	54.0


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**



802.11n (HT40) CH3

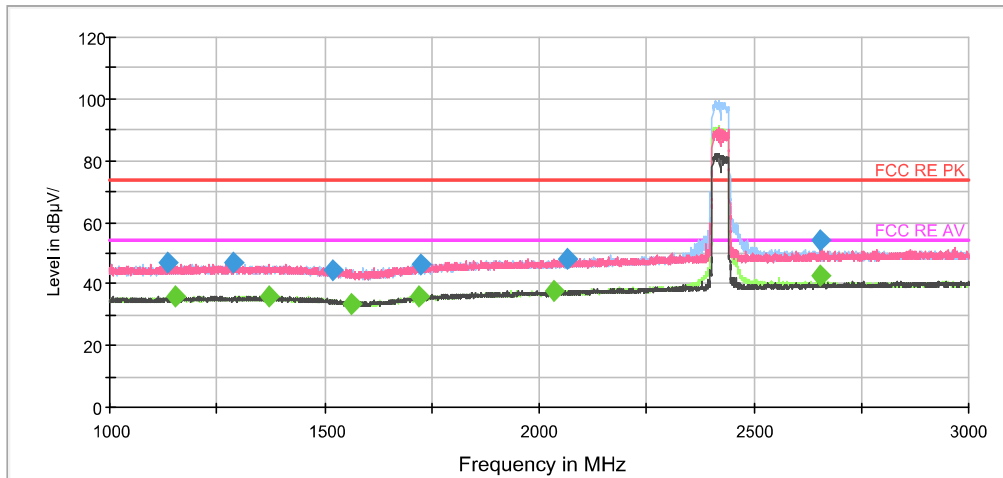

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

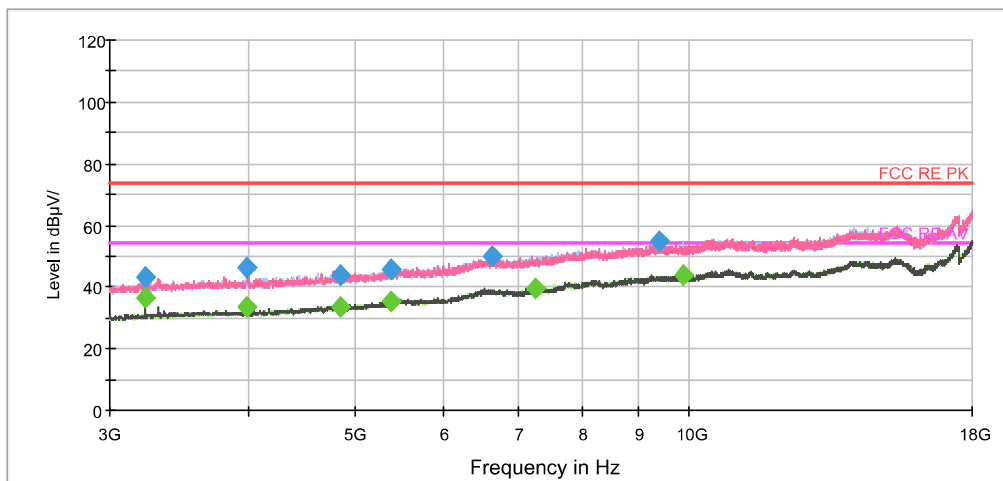

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1137.500000	46.8	100.0	H	275.0	-1.3	27.2	74.0
1288.500000	46.7	200.0	V	359.0	-1.0	27.3	74.0
1518.500000	44.5	100.0	H	359.0	-0.3	29.5	74.0
1725.750000	46.3	100.0	H	0.0	0.4	27.7	74.0
2067.500000	48.4	200.0	V	320.0	1.5	25.6	74.0
2656.500000	53.9	100.0	V	224.0	3.9	20.1	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1154.500000	36.0	100.0	H	303.0	-1.3	18.0	54.0
1370.500000	36.1	200.0	V	343.0	-0.8	17.9	54.0
1565.000000	33.5	100.0	H	356.0	-0.2	20.5	54.0
1719.750000	36.2	200.0	V	210.0	0.4	17.8	54.0
2036.750000	38.0	100.0	V	136.0	1.3	16.0	54.0
2656.500000	42.4	100.0	V	224.0	3.9	11.6	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT40) CH6

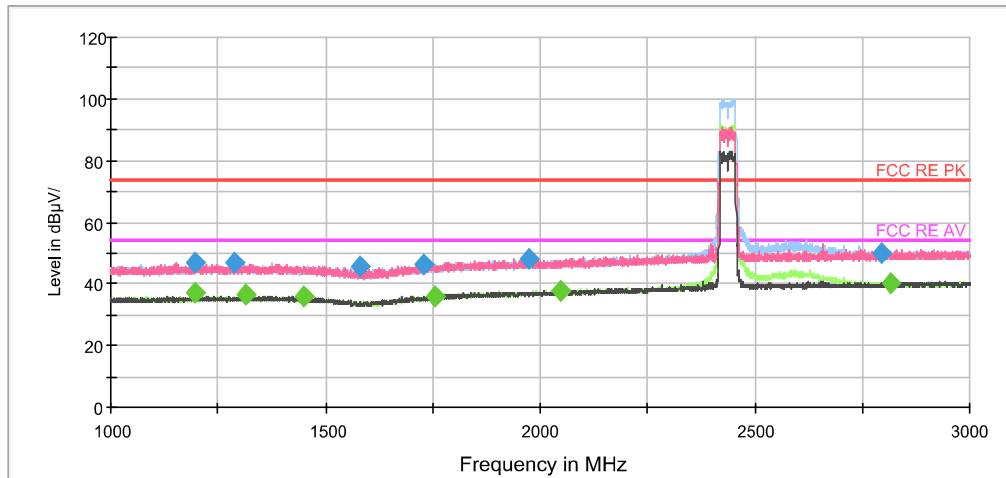

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

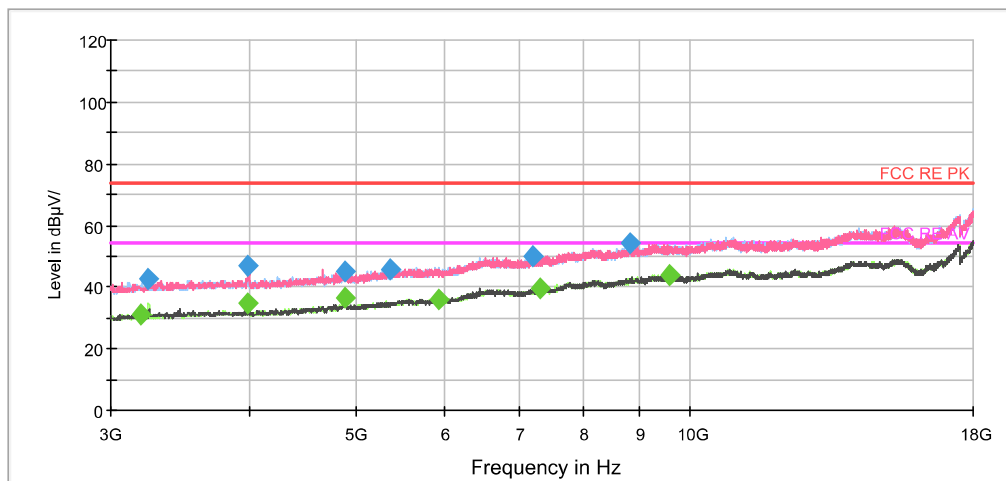

Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.250000	47.0	200.0	V	128.0	-1.2	27.0	74.0
1288.750000	46.8	200.0	H	30.0	-1.0	27.2	74.0
1581.000000	45.5	100.0	V	17.0	-0.1	28.5	74.0
1731.250000	46.3	200.0	V	288.0	0.5	27.7	74.0
1973.250000	48.4	100.0	V	137.0	1.1	25.6	74.0
2796.000000	50.2	100.0	V	65.0	4.3	23.8	74.0


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.500000	37.4	200.0	V	128.0	-1.2	16.6	54.0
1312.250000	36.3	100.0	V	24.0	-0.9	17.7	54.0
1449.250000	36.0	200.0	V	0.0	-0.6	18.0	54.0
1754.000000	35.8	100.0	H	233.0	0.5	18.2	54.0
2047.750000	38.0	200.0	V	350.0	1.4	16.0	54.0
2815.250000	39.9	200.0	V	187.0	4.3	14.1	54.0


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**



802.11n (HT40) CH9

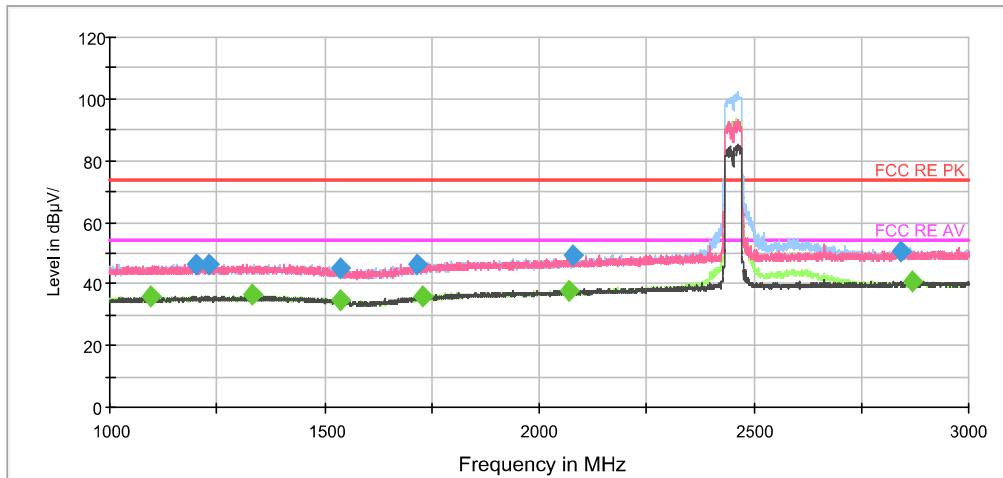

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

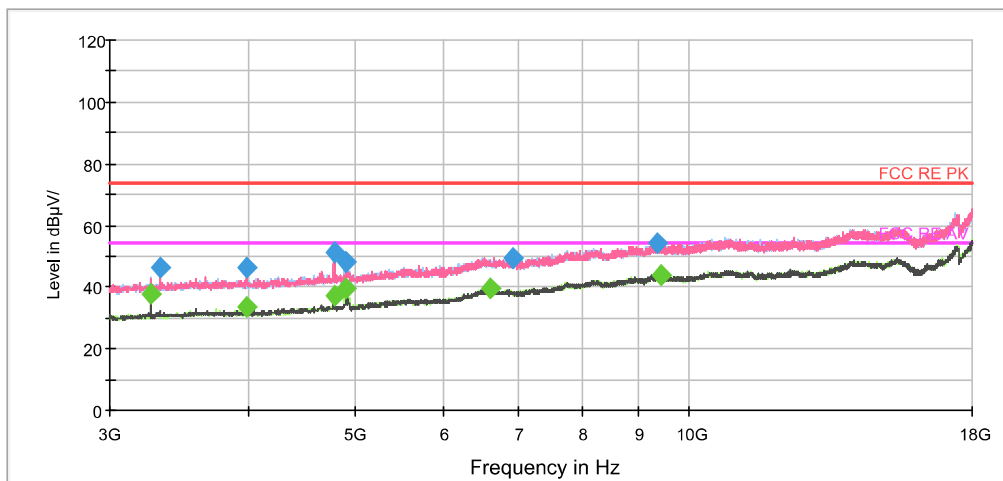

Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1200.000000	46.4	200.0	V	152.0	-1.2	27.6	74.0
1232.250000	46.4	200.0	V	210.0	-1.2	27.6	74.0
1537.000000	45.1	200.0	H	19.0	-0.3	28.9	74.0
1718.250000	46.3	100.0	H	313.0	0.4	27.7	74.0
2077.500000	49.1	100.0	H	274.0	1.5	24.9	74.0
2844.250000	50.6	200.0	V	350.0	4.4	23.4	74.0

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1096.000000	36.1	200.0	H	4.0	-1.4	17.9	54.0
1330.250000	36.8	200.0	V	121.0	-0.9	17.2	54.0
1537.250000	34.8	200.0	V	282.0	-0.3	19.2	54.0
1730.250000	36.0	100.0	V	2.0	0.5	18.0	54.0
2070.250000	38.0	200.0	V	332.0	1.5	16.0	54.0
2867.250000	40.5	200.0	H	27.0	4.4	13.5	54.0

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

## 5.7. Conducted Emission


### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line. The test is in transmitting mode.

### Test Setup

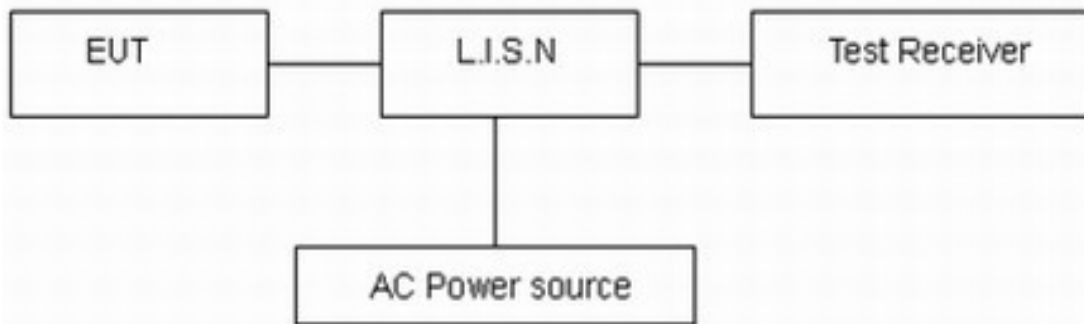

Note: AC Power source is used to change the voltage 110V/60Hz.

### Limits

Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

\*: Decreases with the logarithm of the frequency.


### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.

**Test Results:**

Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes (WIFI 2.4G) with all channels, 802.11n (HT40), Channel 9 of ESP32-S2-MINI-1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

**ESP32-S2-MINI-1**

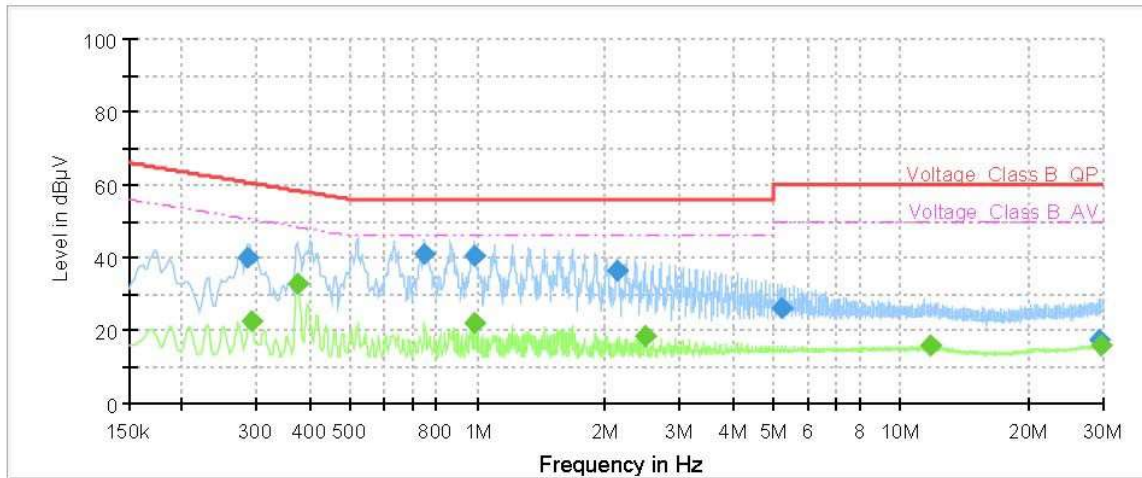


Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.29	39.95	---	60.60	20.65	1000.0	9.000	L1	ON	19
0.29	---	22.52	50.47	27.95	1000.0	9.000	L1	ON	19
0.38	---	33.04	48.39	15.35	1000.0	9.000	L1	ON	19
0.75	41.02	---	56.00	14.98	1000.0	9.000	L1	ON	19
0.98	---	22.14	46.00	23.86	1000.0	9.000	L1	ON	19
0.98	40.54	---	56.00	15.46	1000.0	9.000	L1	ON	19
2.13	36.22	---	56.00	19.78	1000.0	9.000	L1	ON	19
2.48	---	18.66	46.00	27.34	1000.0	9.000	L1	ON	19
5.24	26.29	---	60.00	33.71	1000.0	9.000	L1	ON	19
11.76	---	15.75	50.00	34.25	1000.0	9.000	L1	ON	19
29.45	17.41	---	60.00	42.59	1000.0	9.000	L1	ON	20
29.70	---	15.95	50.00	34.05	1000.0	9.000	L1	ON	20

**Remark: Correct factor=cable loss + LISN factor**

L line Conducted Emission from 150 KHz to 30 MHz



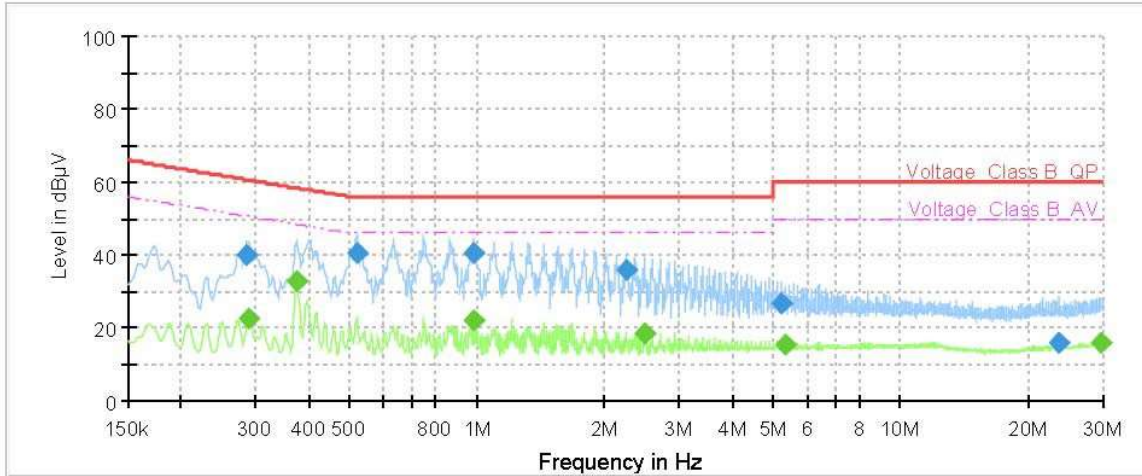

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.29	39.86	---	60.60	20.74	1000.0	9.000	N	ON	19
0.29	---	22.59	50.54	27.95	1000.0	9.000	N	ON	19
0.38	---	33.05	48.39	15.34	1000.0	9.000	N	ON	19
0.52	40.68	---	56.00	15.32	1000.0	9.000	N	ON	19
0.98	---	22.04	46.00	23.96	1000.0	9.000	N	ON	19
0.98	40.41	---	56.00	15.59	1000.0	9.000	N	ON	19
2.25	36.03	---	56.00	19.97	1000.0	9.000	N	ON	19
2.48	---	18.70	46.00	27.30	1000.0	9.000	N	ON	19
5.24	26.60	---	60.00	33.40	1000.0	9.000	N	ON	19
5.36	---	15.59	50.00	34.41	1000.0	9.000	N	ON	19
23.58	15.71	---	60.00	44.29	1000.0	9.000	N	ON	20
29.74	---	15.87	50.00	34.13	1000.0	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
EMI Test Receiver	R&S	ESCI	100948	2020-05-18	2021-05-17
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
EMI Test Receiver	R&S	ESR	101667	2020-05-18	2021-05-17
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Spectrum Analyzer	Agilent	N9010A	MY47191109	2020-05-18	2021-05-17
Power Meter	R&S	NRP2	104306	2020-05-18	2021-05-17
Power Sensor	R&S	NRP-Z21	104799	2020-05-18	2021-05-17
20dB Attenuator	Star River Highlight	UCL-TS2S-20	18013001	2019-12-15	2020-12-14
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*



## **ANNEX A: The EUT Appearance**

The EUT Appearance are submitted separately.

## **ANNEX B: Test Setup Photos**

The Test Setup Photos are submitted separately.