KC.IA.00369

Antenna Specification

1. Application:

This application shall apply for antenna unit which shall be used such as automotive, conventional communications, smart home, etc..

2. 2. Electrical Specification:

Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig.

2-1. Frequency Band:

Frequency Band	MHz
WiFi	2400~2500MHz

2-2. Impedance


50 ohm nominal

2-3. VSWR

2-3-1. Measurement frequency points and VSWR value

Frequency Band(MHz)	2400	2500
Typical Value: (VSWR)	1.3	1.0

UNLESS OTHER SPECIFIED TOLERANCES ON:		707/1	
$X=\pm$ X.X=	\pm X.XX= \pm	TOXU 同祝技术 TOXU TECHNOLOGY CO., LTD.	
ANGLES=±	HOLEDIA =±	同批技术	
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF	
DRAWN BY: LI	CHECKED BY: YS	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR	
DESIGNED BY: De wen	APPROVED BY: YS	DEVICES WITHOUT PERMISSION	
TITLE : KC.IA.00369 Ante	SPEC REV.		
And	ma oposmoution	P0	

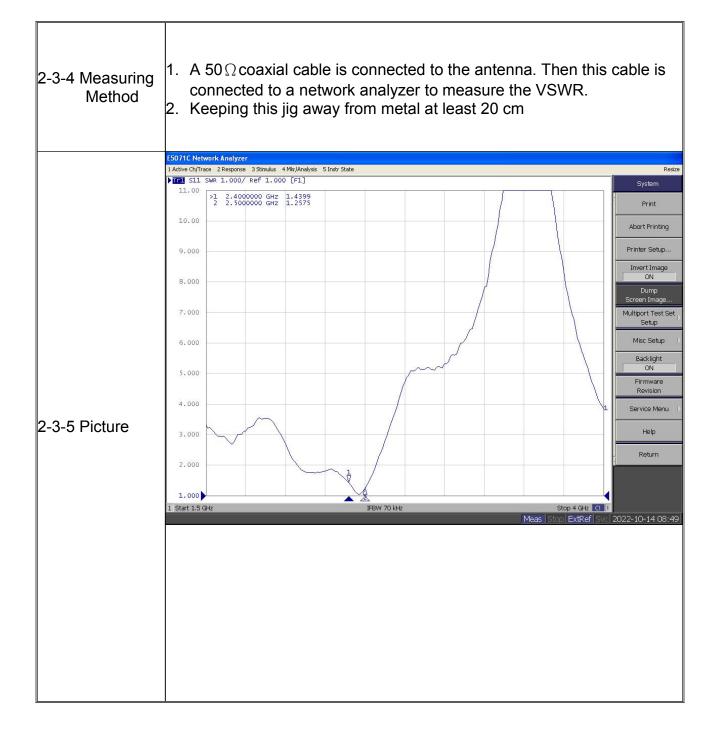


UNLESS OTHER SPECIFIE X = ± X.X = ANGLES = ±		TOXU 同讯技术	TOXU TECHNOLOGY CO)., LTD.
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KIN TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USE THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATU		RTY OF KINGRF
DRAWN BY: LI	CHECKED BY: YS			
DESIGNED BY: De wen	APPROVED BY: YS	DEVICES WITHOUT PERMISSION		
TITLE : KC.IA.00369 Antenna Specification			SPEC REV.	
			P0	

2-4. Efficiency and Gain

4-5.1 Measure method

- 1. Using a low loss coaxial cable to link a standard handset jig
- 2. Fixed this handset jig on chamber's rotator plane
 - 3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
- 4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

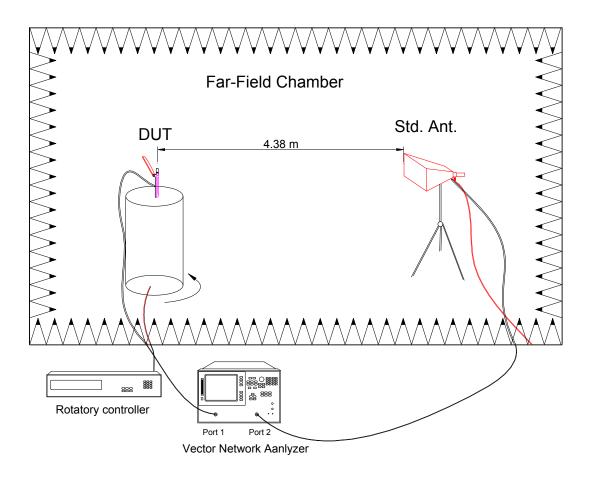



- 1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
- 2. The quite room region is 40cmx40cmx40cm at the center of rotator
- 3. The distance between DUT and standard antenna is 4.38 m
- 4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)


UNLESS OTHER SPECIFIE X = ± X.X = ANGLES = ±		TOXU 同讯技术	TOXU TECHNOLOGY CO)., LTD.
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KIN TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USE THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATU		RTY OF KINGRF
DRAWN BY: LI	CHECKED BY: YS			
DESIGNED BY: De wen	APPROVED BY: YS	DEVICES WITHOUT PERMISSION		
TITLE : KC.IA.00369 Antenna Specification			SPEC REV.	
			P0	


2-4-1 Efficiency and Gain and 3D Date


Frequency/Mhz	MaxGain/dBi	Efficiency / %
2400	3.23	57.02
2410	4.11	59.57
2420	3.76	63.1
2430	4.28	60.95
2440	3.49	58.21
2450	3.74	59.43
2460	3.4	59.43
2470	3.5	60.39
2480	4.01	64.27
2490	3.83	67.45
2500	4.1	68.71















UNLESS OTHER SPECIFIE X=± ANGLES=±		TOXU 同祇技术 TOXU TECHNOLOGY CO., LTD.
SCALE:	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF
DRAWN BY: LI	CHECKED BY: YS	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR
DESIGNED BY: De wen	APPROVED BY: YS	DEVICES WITHOUT PERMISSION
TITLE : KC.IA.00369 Ante	SPEC REV.	
TITEL : No.IA.00000 Antenna opecinication		

3. Mechanical Specification:

3-1. Mechanical Configuration (Unit: mm)

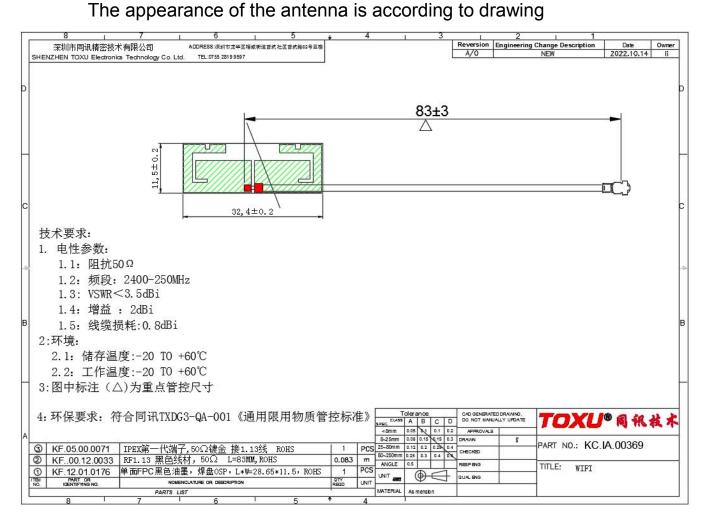

UNLESS OTHER SPECIFIE X = ± X.X = ANGLES = ±		TOXU 同讯技术 TOXU TECHNOLOGY CO	., LTD.
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KI TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USI THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATU DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.IA.00369 Antenna Specification			SPEC REV.
			P0