




TEST REPORT

TEST REPORT	
Report Reference No..... :	CTA23060501402
FCC ID..... :	2BBQANX-YSP04
Compiled by (position+printed name+signature)..:	File administrators Zoey Cao
Supervised by (position+printed name+signature)..:	Project Engineer Amy Wen
Approved by (position+printed name+signature)..:	RF Manager Eric Wang
Date of issue..... :	Jun. 23, 2023
Representative Laboratory Name. :	Shenzhen CTA Testing Technology Co., Ltd.
Address..... :	Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Applicant's name..... :	Shenzhen NOHON Industrial Co.,Ltd
Address..... :	7E010, Gangshen International Center, Xinniu Community, Minzhi Street, Longhua District, Shenzhen, China
Test specification..... :	
Standard..... :	FCC Rules and Regulations part 2.1091 KDB680106 D01v03
TRF Originator..... :	Shenzhen CTA Testing Technology Co., Ltd.
Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Test item description..... :	Magnetic Power Bank
Trade Mark..... :	NOHON
Manufacturer..... :	Shenzhen NOHON Industrial Co.,Ltd
Model/Type reference..... :	NX-YSP04
Listed Models	Please refer to page two
Modulation Type..... :	ASK
Operation Frequency..... :	From 110KHz~205KHz
Rating..... :	Input Type-C: 5V/2A 9V/2A Output Type-C: 5V/2.4A, 9V/2.22A, 12V/1.5A Input Lightning: 5V/2A Wireless Output: 5W/7.5W/10W Battery:3.85V
Result..... :	PASS

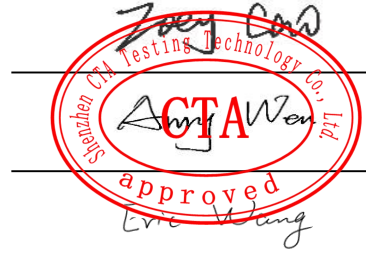

Equipment under Test : Magnetic Power Bank

Model /Type : NX-YSP04

Listed Models : NX-YSP01,NX-YSP02, NX-YSP03,NX-YZP01,NX-YSP04,NX-YSP08,NX-P11, NX-65W, NX-P07-1, NX-P07-2, NX-P15/PD286-1, NX-P09, NX-P10, NX-P11, NX-P12, NX-P13

Applicant : Shenzhen NOHON Industrial Co.,Ltd

Address : 7E010, Gangshen International Center, Xinniu Community, Minzhi Street, Longhua District, Shenzhen, China

Manufacturer : Shenzhen NOHON Industrial Co.,Ltd

Address : 7E010, Gangshen International Center, Xinniu Community, Minzhi Street, Longhua District, Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	SUMMARY	4
1.1	General Remarks	4
1.2	Product Description	4
1.3	Description of the test mode	4
1.4	Special Accessories	5
1.5	Modifications	5
2	TEST ENVIRONMENT	6
2.1	Address of the test laboratory	6
2.2	Test Facility	6
2.3	Environmental conditions	6
2.4	Summary of measurement results	7
2.5	Statement of the measurement uncertainty	7
2.6	Equipments Used during the Test	7
3	TEST CONDITIONS AND RESULTS	8
3.1	Applicable Standard	8
3.2	Limit	8
3.3	Test Setup	8
3.4	Measurement Procedure	9
3.5	Test Result of E and H field Strength	9
3.6	Equipment Approval Considerations	11
3.7	Conclusion	11
4	TEST SETUP PHOTOS OF THE EUT	12

1 SUMMARY

1.1 General Remarks

Date of receipt of test sample	:	Jun. 05, 2023
Testing commenced on	:	Jun. 14, 2023
Testing concluded on	:	Jun. 23, 2023

1.2 Product Description

Product Name:	Magnetic Power Bank
Model/Type reference:	NX-YSP04
Hardware version:	V1.0
Software version:	V1.0
Test samples ID:	CTA230605014-1# (Engineer sample), CTA230605014-2# (Normal sample)
Power supply:	Input Type-C: 5V/2A 9V/2A Output Type-C: 5V/2.4A, 9V/2.22A, 12V/1.5A Input Lightning: 5V/2A Wireless Output: 5W/7.5W/10W Battery:3.85V
Adapter information (Auxiliary test supplied by test Lab)	Model: GS-551 Input: AC 100-240V 50/60Hz Output: DC 5V 3A, 9V 2A, 12V 1.5A
Operation frequency:	110KHz - 205KHz
Modulation type:	ASK
Antenna type:	Loop coil antenna
Antenna Gain:	0 dBi(Max)

1.3 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

Charging and communication mode

Test Conditions	Description	Exposure conditions	
TM1	EUT + iphone (Battery Level < 1%)	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Record
TM2	EUT + iphone (Battery Level 50%)	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Record
TM3	EUT + iphone (Battery Level > 99%)	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Record

Note: 1. During the test the phone is attached the network in WWAN traffic mode and Wifi/BT is connected.

2. All test modes were pre-tested, but we only recorded the worst case in this report.

1.4 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
Adapter	/	GS-551	Input: 100-240V~, 50/60Hz, Output: 9V===2A	CE/FCC	laboratory
Mobile phone	Apple Inc.	A1863	/	CE/FCC	laboratory
/	/	/	/	/	/

1.5 Modifications

No modifications were implemented to meet testing criteria.

2 TEST ENVIRONMENT

2.1 Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

2.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

2.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

2.4 Summary of measurement results

Test Item	Result
Magnetic Field Strength (H) (A/m)	Compliant

2.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen CTA Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **Shenzhen CTA Testing Technology Co., Ltd.** is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
EMF Tester	Wavecontrol	SMP160	19SN0989	June 27 2022	June 26 2023

Note: The Cal.Interval was one year.

3 TEST CONDITIONS AND RESULTS

3.1 Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

According KDB 680106 D01 RF Exposure Wireless Charging App v03

3.2 Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	6
3.0 – 30	1842/f	4.89/f	(900/f)*	6
30 – 300	61.4	0.163	1.0	6
300 – 1500	/	/	f/300	6
1500 – 100,000	/	/	5	6


Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	30
3.0 – 30	824/f	2.19/f	(180/f)*	30
30 – 300	27.5	0.073	0.2	30
300 – 1500	/	/	f/1500	30
1500 – 100,000	/	/	1.0	30

F=frequency in MHz

*=Plane-wave equivalent power density

3.3 Test Setup

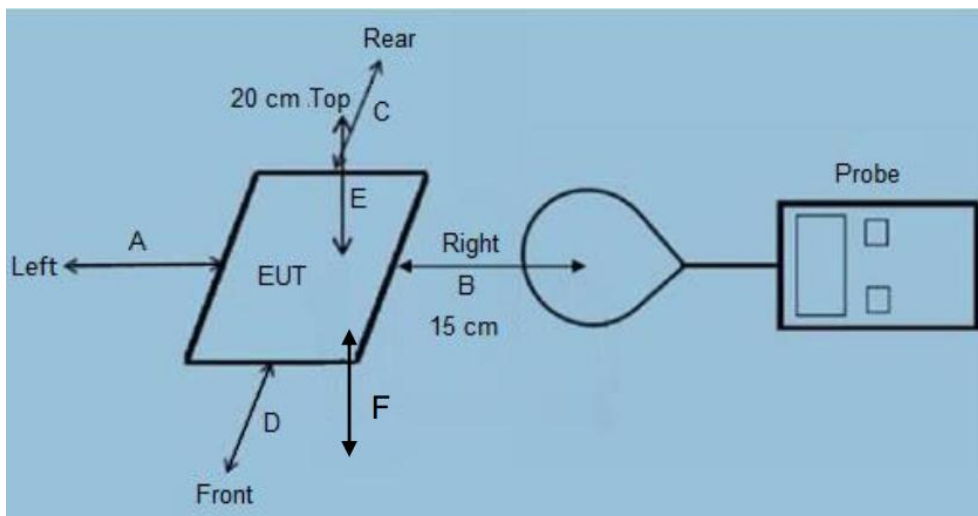

Note: A, B, C, D, E, F for six surfaces of the product.

3.4 Measurement Procedure

- a) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- b) The measurement probe was placed at test distance which is between the edge of the charger and the geometric center of probe.
- c) The turn table was rotated 360d degree to search of highest strength.
- d) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- e) The EUT were measured according to the dictates of KDB 680106D01v03.

3.5 Test Result of E and H field Strength

Temperature:	22.3°C	Humidity:	52.5%
Test Engineer:	Amy Wen	Test site:	Anechoic chamber

H-Field Strength at 0/2/4/6/8/10/12/14/16/18/20cm from the edges surrounding the EUT

Charging Battery Level	Measured Distance (cm)	Unit	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
1%	0	A/m	0.3718	0.3851	0.3700	0.4035	0.3792	0.3892	1.63
50%	0	A/m	0.3130	0.3183	0.3323	0.3234	0.3205	0.3112	1.63
99%	0	A/m	0.2757	0.3138	0.3323	0.2689	0.3229	0.3193	1.63
1%	2	A/m	0.3252	0.3454	0.3484	0.3370	0.3336	0.3293	1.63
50%	2	A/m	0.2930	0.2790	0.2893	0.3154	0.2842	0.2896	1.63
99%	2	A/m	0.2661	0.2631	0.2580	0.2737	0.2629	0.2714	1.63
1%	4	A/m	0.2678	0.2643	0.2446	0.2692	0.2845	0.2258	1.63
50%	4	A/m	0.2387	0.2764	0.2413	0.2837	0.2995	0.2711	1.63
99%	4	A/m	0.2955	0.2228	0.2828	0.2780	0.2184	0.2371	1.63
1%	6	A/m	0.2295	0.2178	0.2181	0.2579	0.2476	0.1806	1.63
50%	6	A/m	0.1790	0.2225	0.1969	0.2047	0.2133	0.1779	1.63
99%	6	A/m	0.1566	0.1547	0.1568	0.1497	0.1370	0.1430	1.63
1%	8	A/m	0.1853	0.2204	0.2346	0.1962	0.2169	0.1380	1.63
50%	8	A/m	0.2163	0.1779	0.1768	0.2068	0.1994	0.1221	1.63
99%	8	A/m	0.1527	0.1761	0.1874	0.1604	0.1566	0.1555	1.63
1%	10	A/m	0.1710	0.1849	0.1760	0.1695	0.1318	0.1799	1.63
50%	10	A/m	0.2129	0.1531	0.2065	0.1515	0.1906	0.1807	1.63
99%	10	A/m	0.1261	0.2090	0.1393	0.1830	0.1276	0.1741	1.63
1%	12	A/m	0.1256	0.1624	0.1333	0.1547	0.1314	0.0823	1.63
50%	12	A/m	0.1399	0.1725	0.1755	0.1845	0.1564	0.1606	1.63
99%	12	A/m	0.1452	0.1477	0.1978	0.1344	0.1410	0.1565	1.63
1%	14	A/m	0.0920	0.0777	0.0876	0.0665	0.1374	0.0602	1.63
50%	14	A/m	0.1243	0.1239	0.1339	0.1458	0.1481	0.1089	1.63
99%	14	A/m	0.1482	0.0789	0.0761	0.0982	0.1501	0.1112	1.63
1%	16	A/m	0.0914	0.1202	0.0495	0.1008	0.0941	0.0891	1.63
50%	16	A/m	0.0570	0.0922	0.0749	0.0494	0.0843	0.0670	1.63

99%	16	A/m	0.0700	0.0261	0.0846	0.1034	0.1067	0.0256	1.63
1%	18	A/m	0.0497	0.0580	0.0513	0.0267	0.0800	0.0413	1.63
50%	18	A/m	0.0362	0.0310	0.0598	0.0223	0.0107	0.0325	1.63
99%	18	A/m	0.0581	0.0489	0.0433	0.0833	0.0044	0.0200	1.63
1%	20	A/m	0.0468	0.0458	0.0436	0.0340	0.0057	0.0343	1.63
50%	20	A/m	0.0528	0.0222	0.0404	0.0662	0.0503	0.0202	1.63
99%	20	A/m	0.0446	0.0431	0.0309	0.0291	0.0405	0.0098	1.63

Note: The radius of the probe is 4.7mm, and the center of the probe sensing element is less than 5 mm from the probe outer edge.

3.6 Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 as follow table.

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 110KHz~205KHz
Output power from each primary coil is less than 15 watts	Yes	The maximum output power for each primary coil is 10W.
The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes	The transfer system includes only one primary coils.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No	Submit a KDB inquiry to get test guideline and fully follow the KDB inquiry guideline.
The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

3.7 Conclusion

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure and 20 cm to the antenna for mobile exposure. The detected emissions are below the limitations according FCC KDB 680106 and confirmed by the FCC according to KDB Inquire.

4 Test Setup Photos of the EUT





***** End of Report *****