

RF Test Data for Bluetooth LE (Conducted Measurements)

General Description of EUT	
Product Name:	Wireless Headphone
Test Model:	iKF T1
Sample ID:	202306-0300-1-2#
Environmental Conditions	
Temperature:	25°C
Relative Humidity:	55%
Test Voltage:	DC 3.7V
Test Engineer:	Liu Ji Ming
Note: For a more detailed features description, please refer to the report TBR-C-202306-0300-33 The report only show the worst case data.	

Contents


1. Duty Cycle.....	3
2. Maximum Conducted Output Power.....	7
3. -6dB Bandwidth.....	11
4. Occupied Channel Bandwidth.....	15
5. Maximum Power Spectral Density Level.....	19
6. Band Edge.....	23
7. Conducted RF Spurious Emission.....	28
8. Restrict Band.....	35

1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	85.2	0.7	0.47
NVNT	BLE 1Mbps	2440	Ant1	85.2	0.7	0.47
NVNT	BLE 1Mbps	2480	Ant1	85.2	0.7	0.47
NVNT	BLE 2Mbps	2402	Ant1	43.6	3.61	0.92
NVNT	BLE 2Mbps	2440	Ant1	43.2	3.65	0.93
NVNT	BLE 2Mbps	2480	Ant1	43.2	3.65	0.93



Test Graphs



Duty Cycle NVNT BLE 1Mbps 2402MHz Ant1

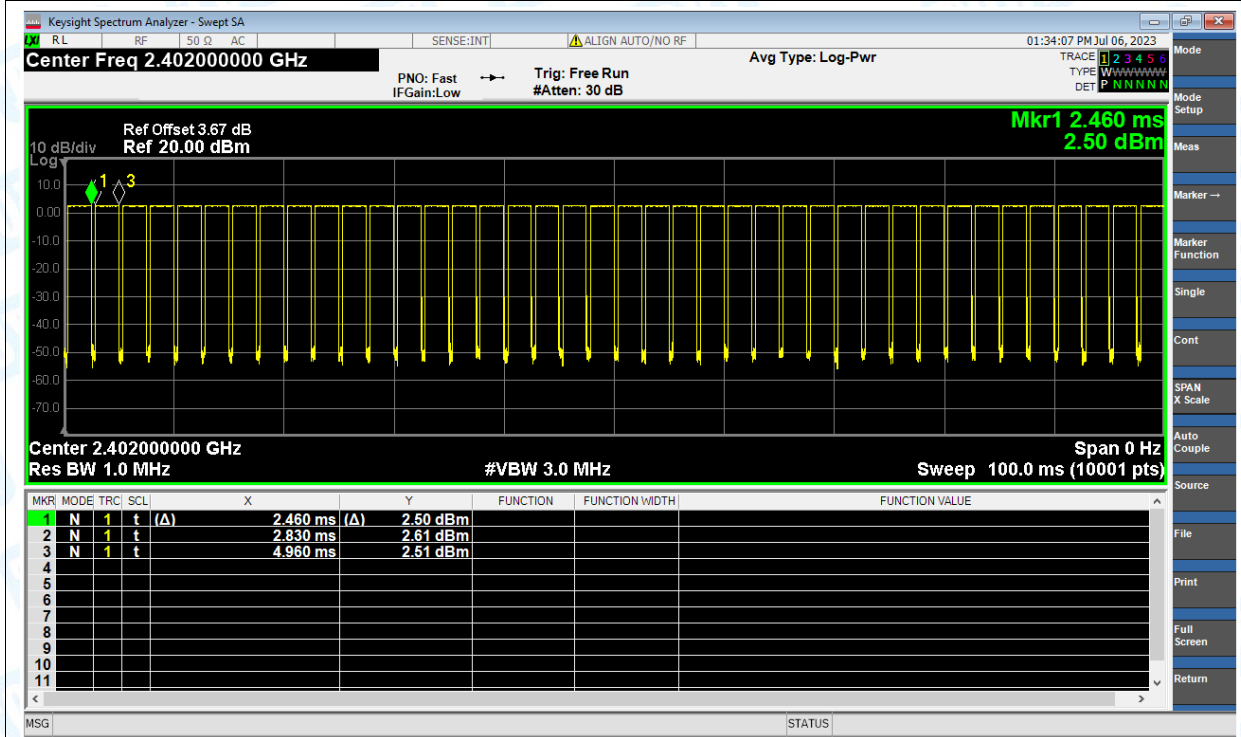

Duty Cycle NVNT BLE 1Mbps 2440MHz Ant1

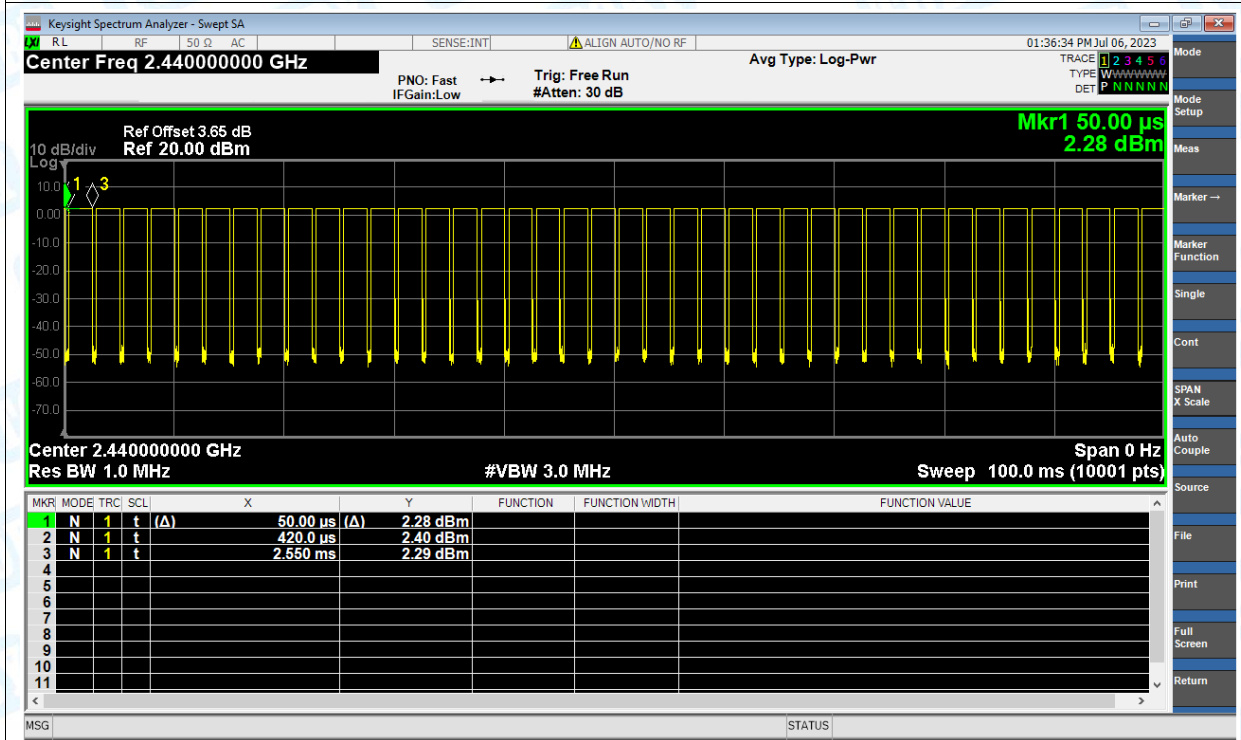

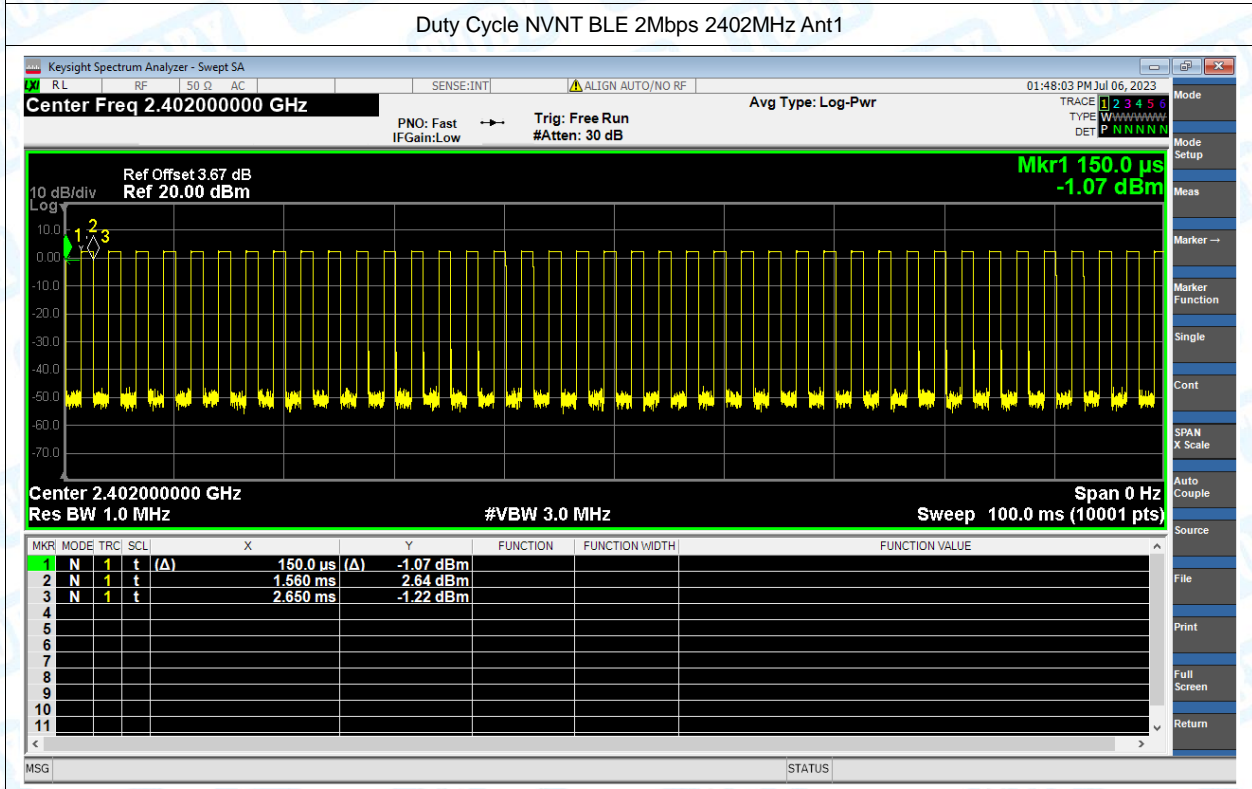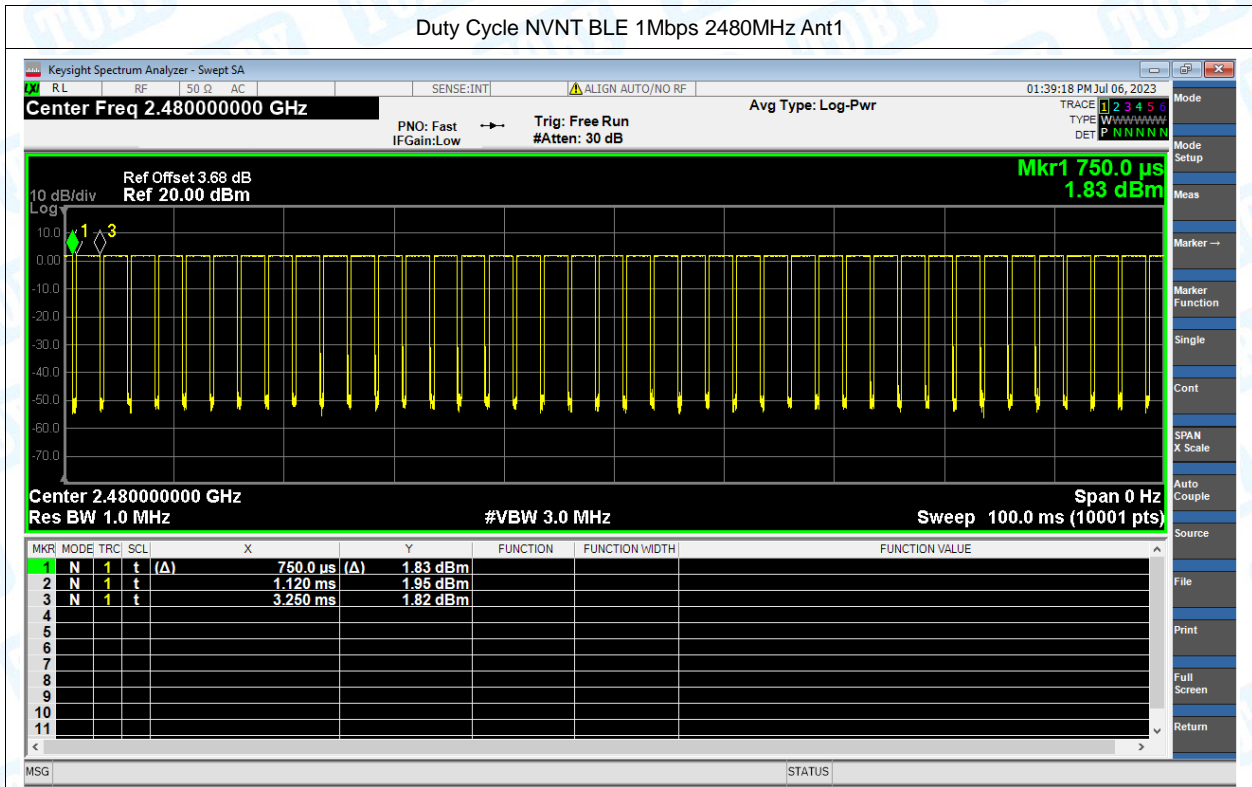

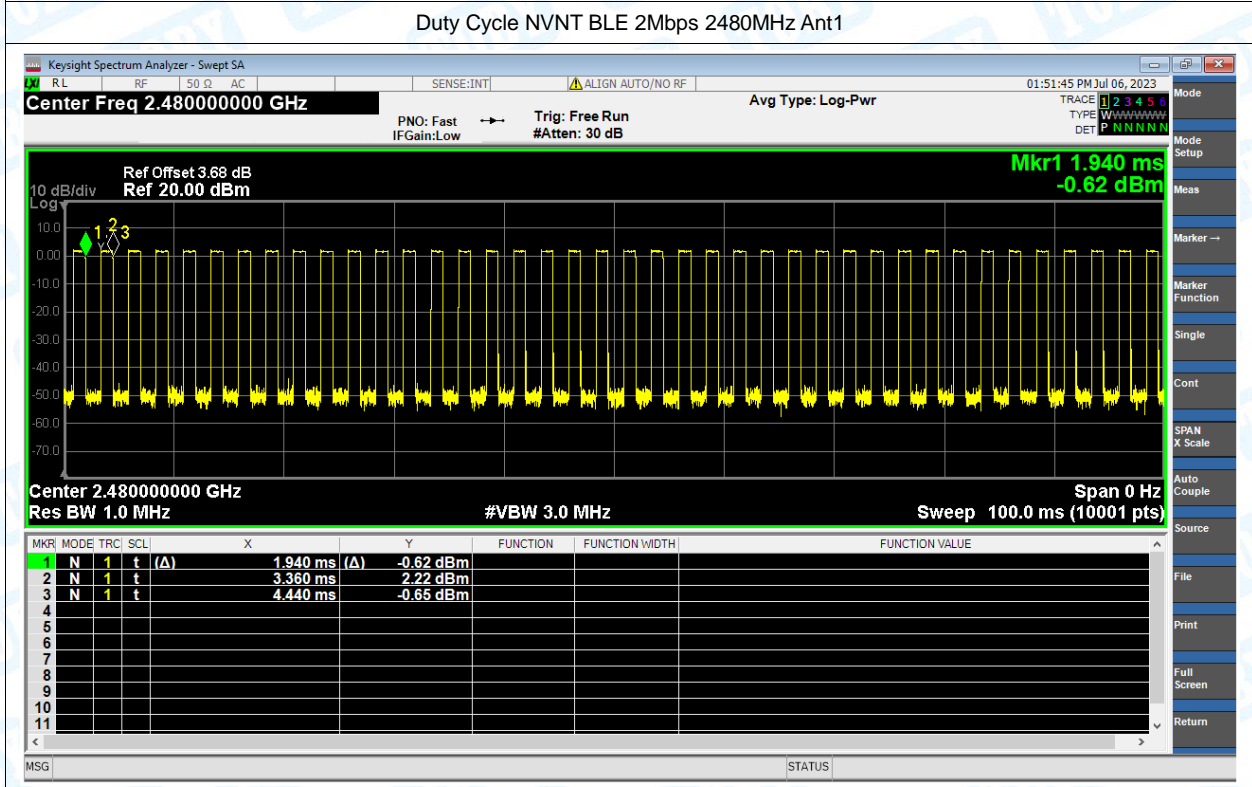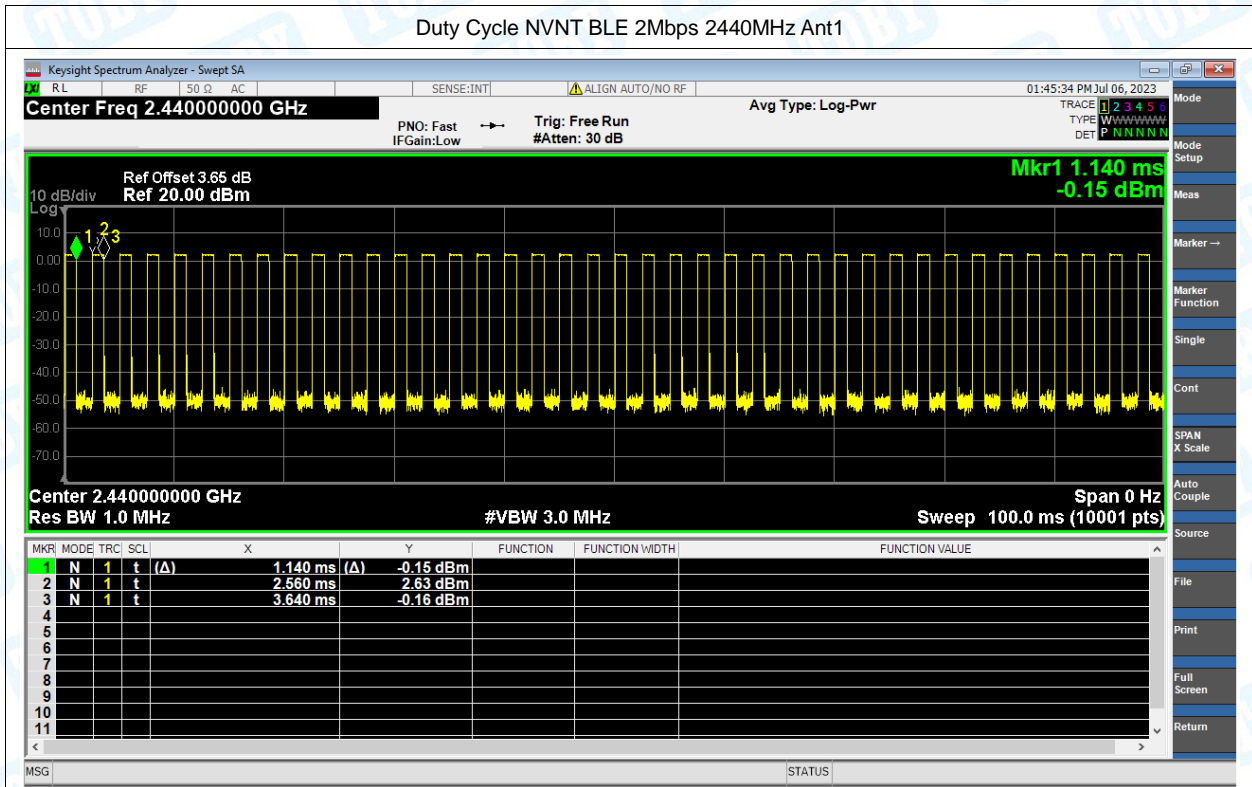


2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2.721	30	Pass
NVNT	BLE 1Mbps	2440	Ant1	2.516	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	2.071	30	Pass
NVNT	BLE 2Mbps	2402	Ant1	2.949	30	Pass
NVNT	BLE 2Mbps	2440	Ant1	2.813	30	Pass
NVNT	BLE 2Mbps	2480	Ant1	2.380	30	Pass

Test Graphs

Power NVNT BLE 1Mbps 2402MHz Ant1

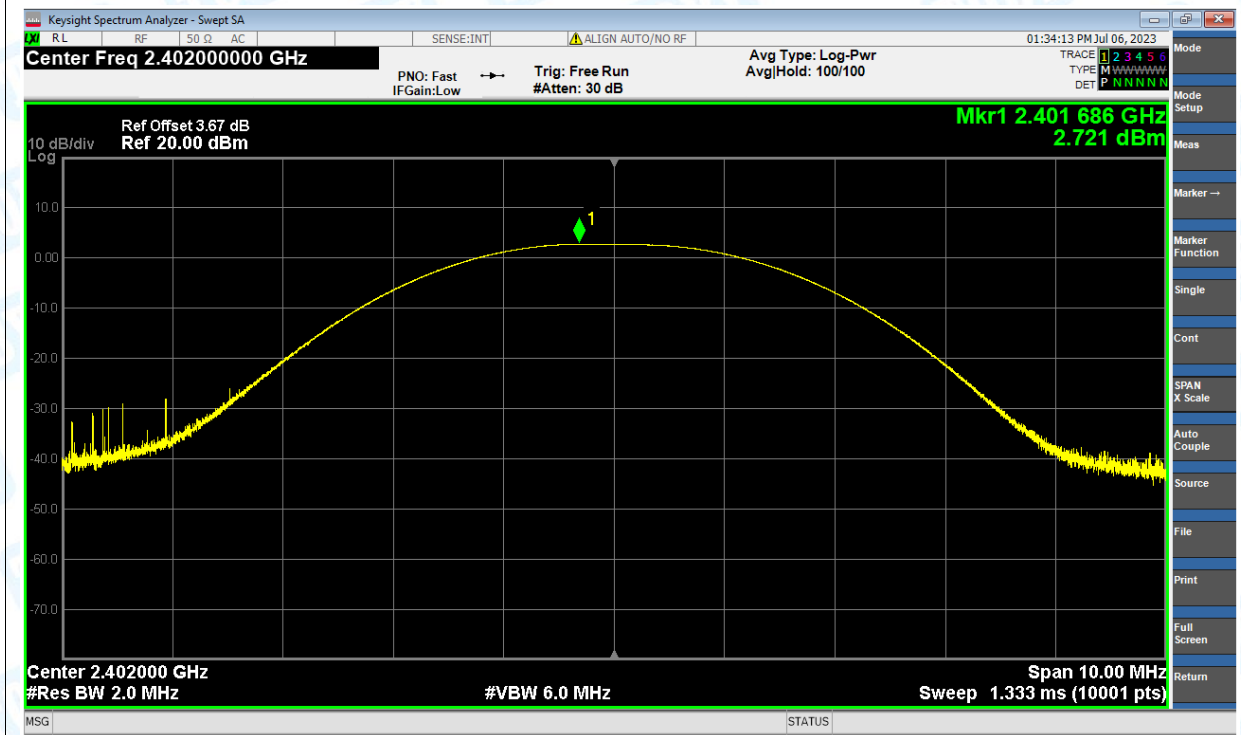

Power NVNT BLE 1Mbps 2440MHz Ant1



Power NVNT BLE 1Mbps 2480MHz Ant1




Power NVNT BLE 2Mbps 2402MHz Ant1



Power NVNT BLE 2Mbps 2440MHz Ant1



Power NVNT BLE 2Mbps 2480MHz Ant1

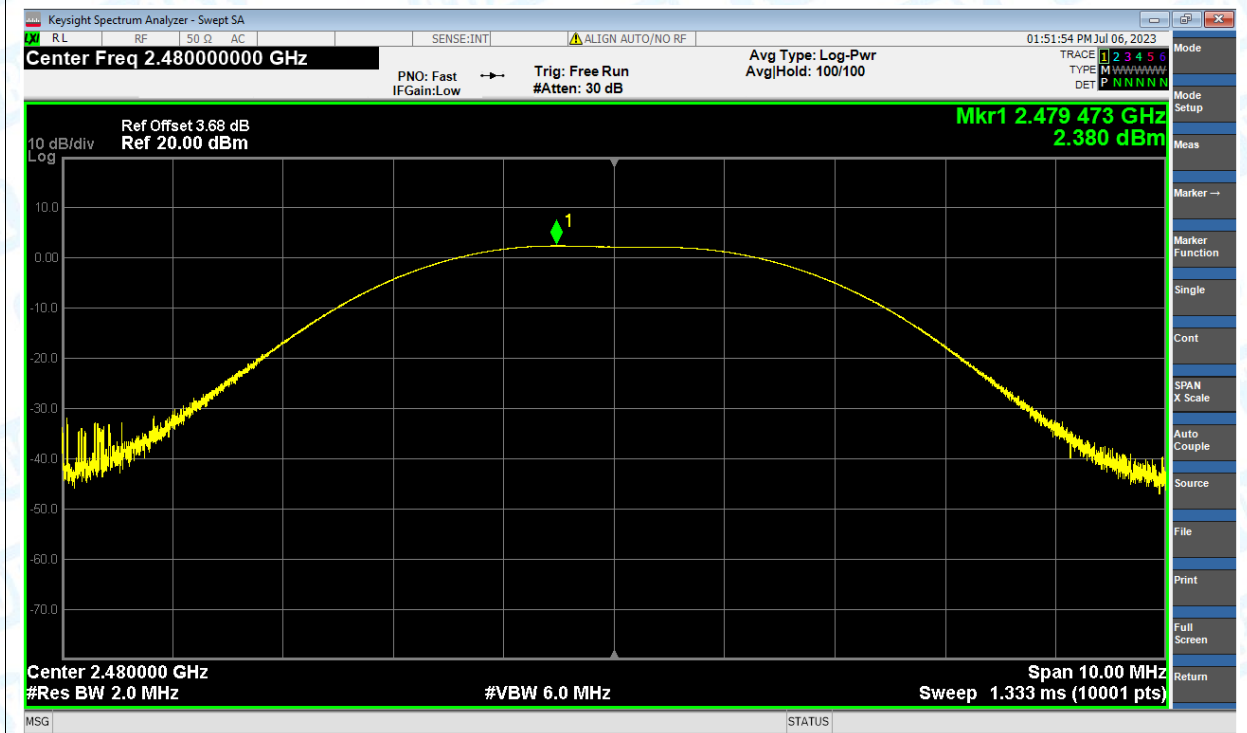


3. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.66	0.5	Pass
NVNT	BLE 1Mbps	2440	Ant1	0.66	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.66	0.5	Pass
NVNT	BLE 2Mbps	2402	Ant1	1.16	0.5	Pass
NVNT	BLE 2Mbps	2440	Ant1	1.17	0.5	Pass
NVNT	BLE 2Mbps	2480	Ant1	1.18	0.5	Pass

Test Graphs


-6dB Bandwidth NVNT BLE 1Mbps 2402MHz Ant1

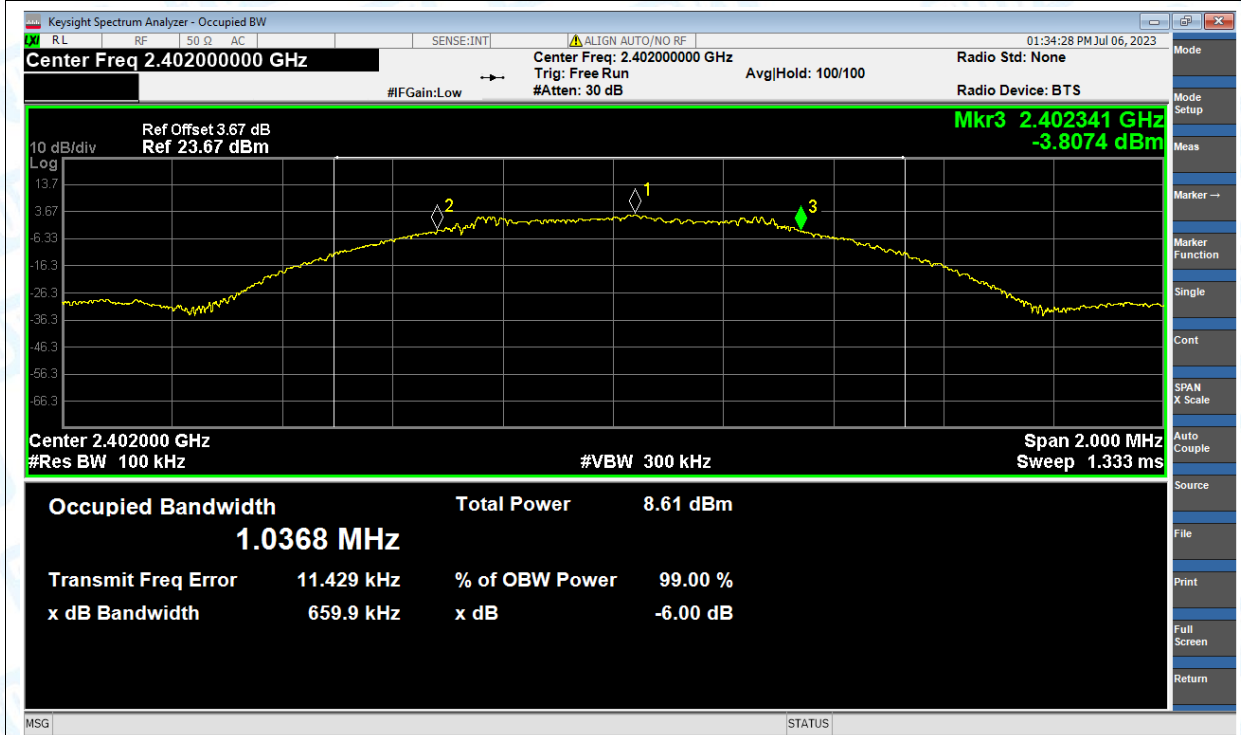


-6dB Bandwidth NVNT BLE 1Mbps 2440MHz Ant1

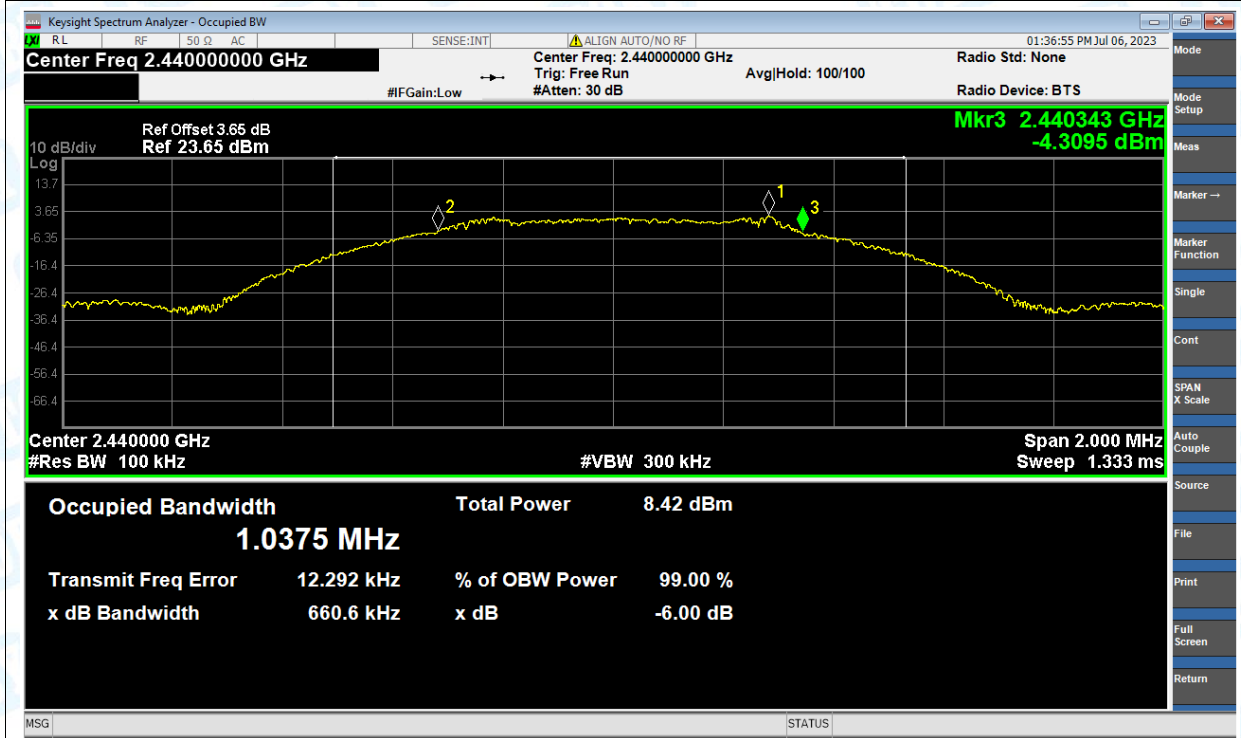


-6dB Bandwidth NVNT BLE 1Mbps 2480MHz Ant1

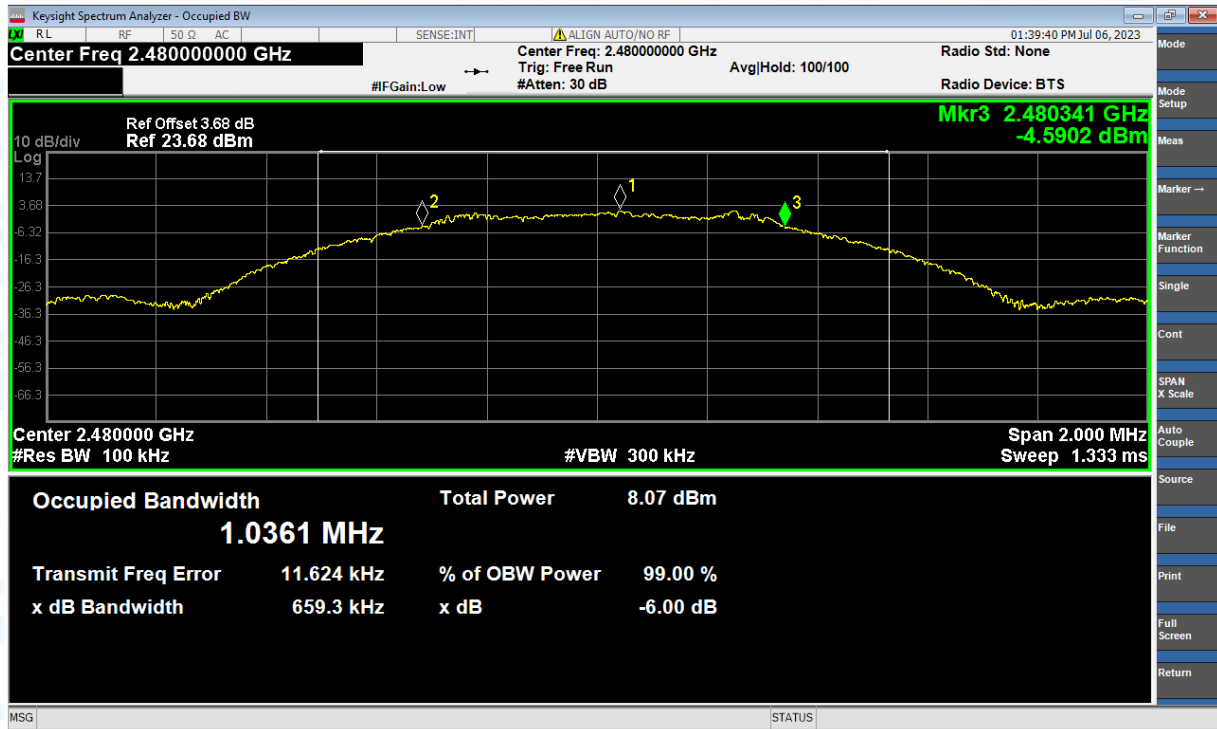


-6dB Bandwidth NVNT BLE 2Mbps 2402MHz Ant1

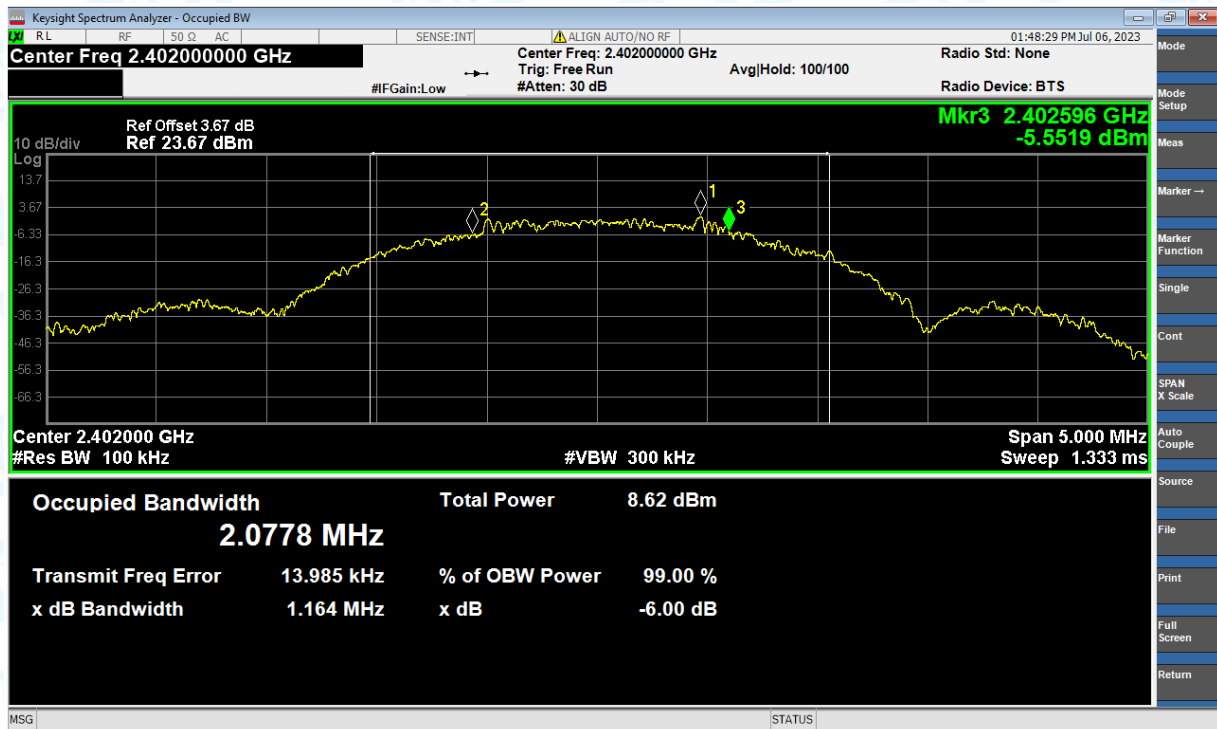

-6dB Bandwidth NVNT BLE 2Mbps 2440MHz Ant1

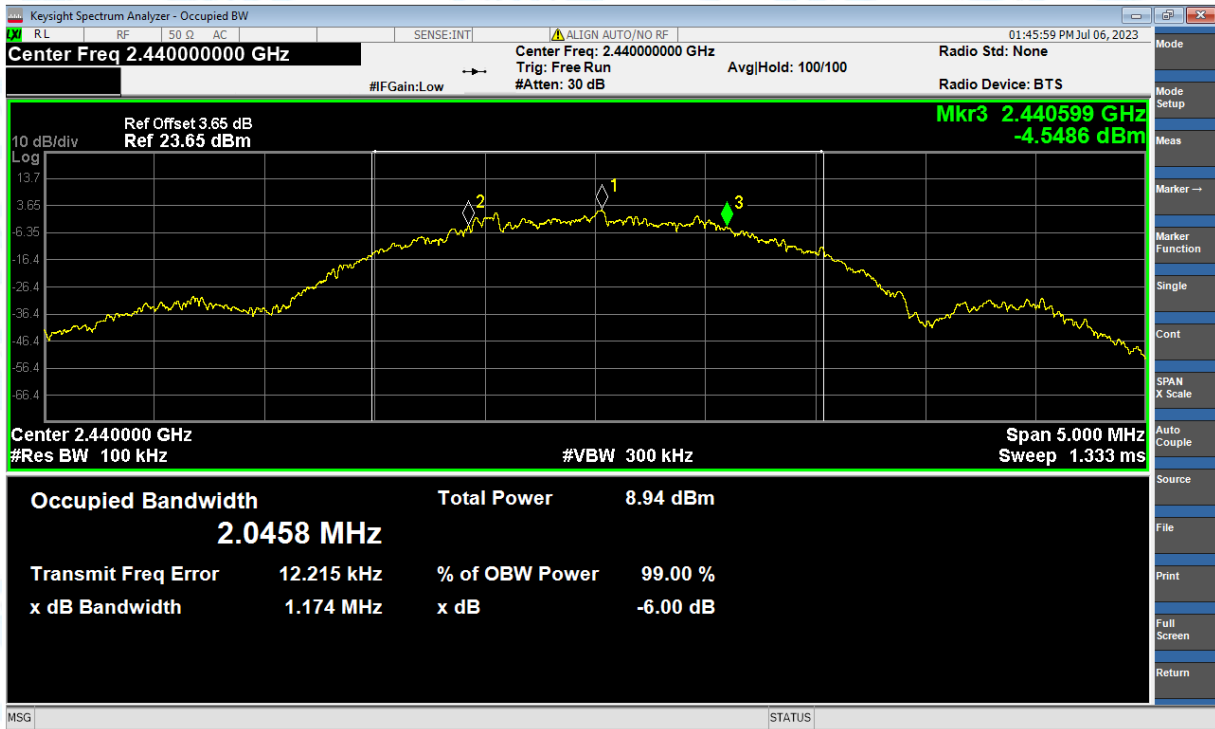

-6dB Bandwidth NVNT BLE 2Mbps 2480MHz Ant1

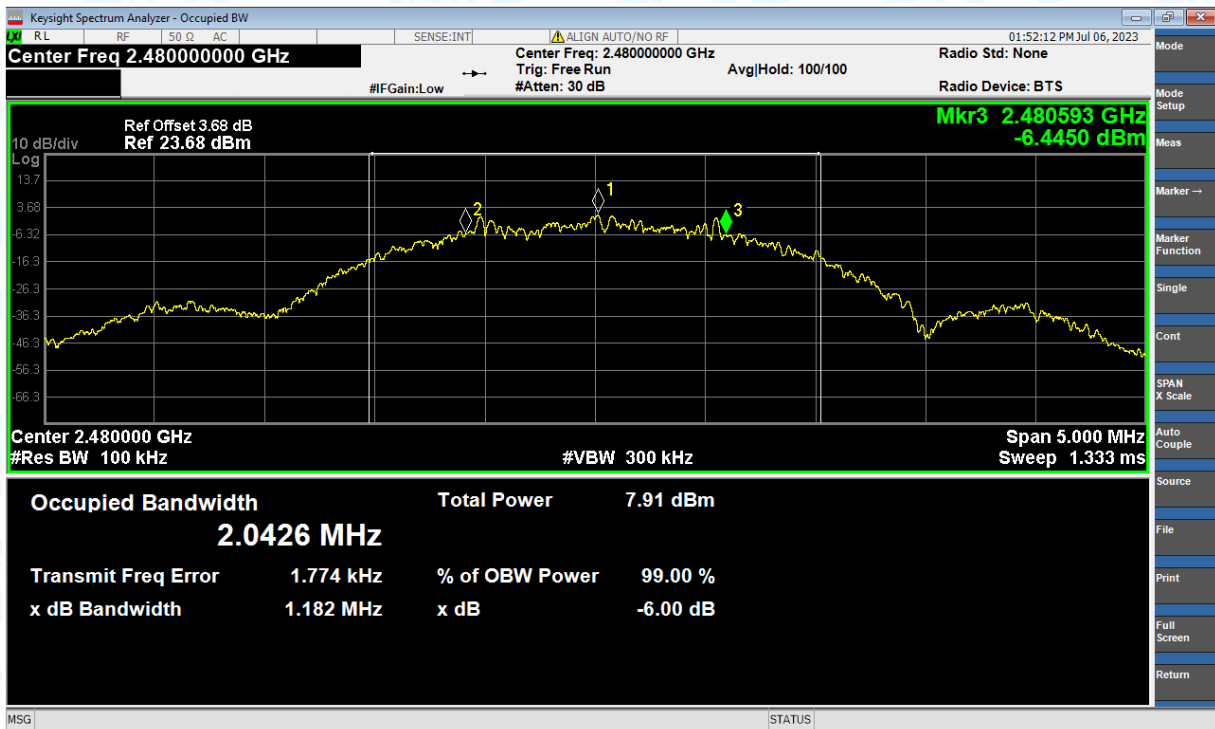


4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.034
NVNT	BLE 1Mbps	2440	Ant1	1.033
NVNT	BLE 1Mbps	2480	Ant1	1.042
NVNT	BLE 2Mbps	2402	Ant1	2.063
NVNT	BLE 2Mbps	2440	Ant1	2.069
NVNT	BLE 2Mbps	2480	Ant1	2.051

Test Graphs


OBW NVNT BLE 1Mbps 2402MHz Ant1

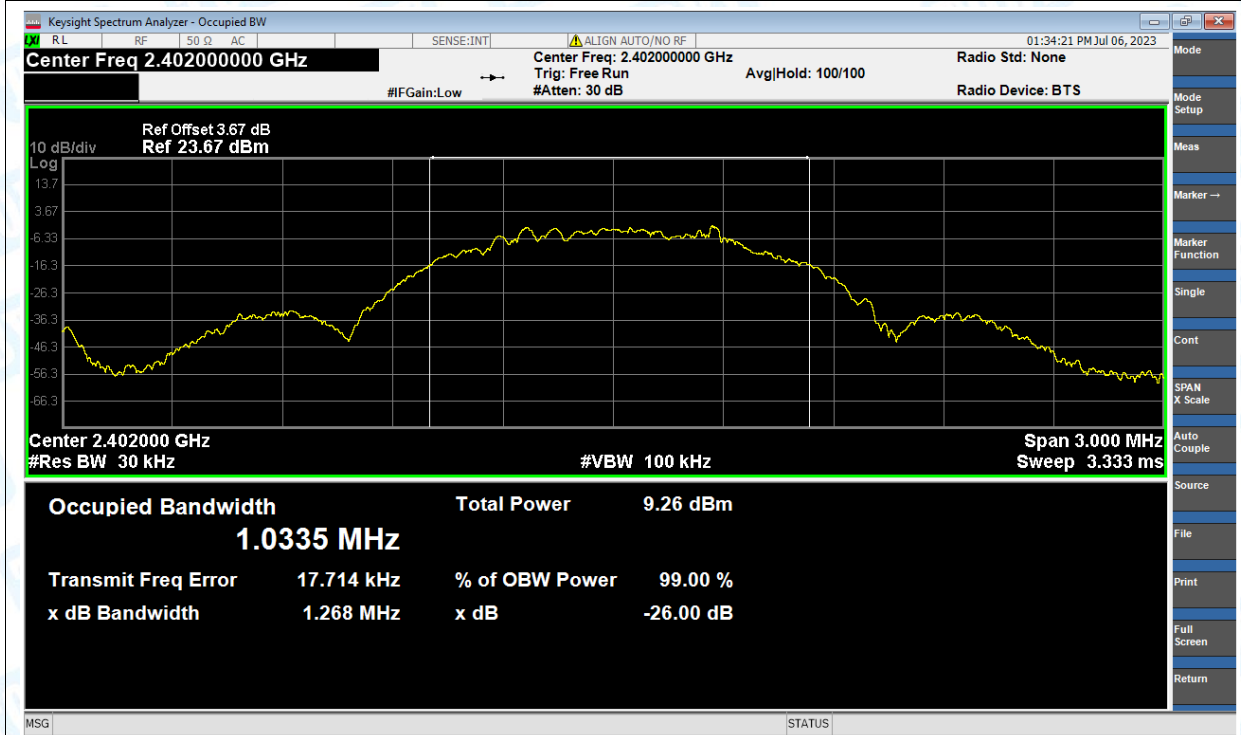


OBW NVNT BLE 1Mbps 2440MHz Ant1

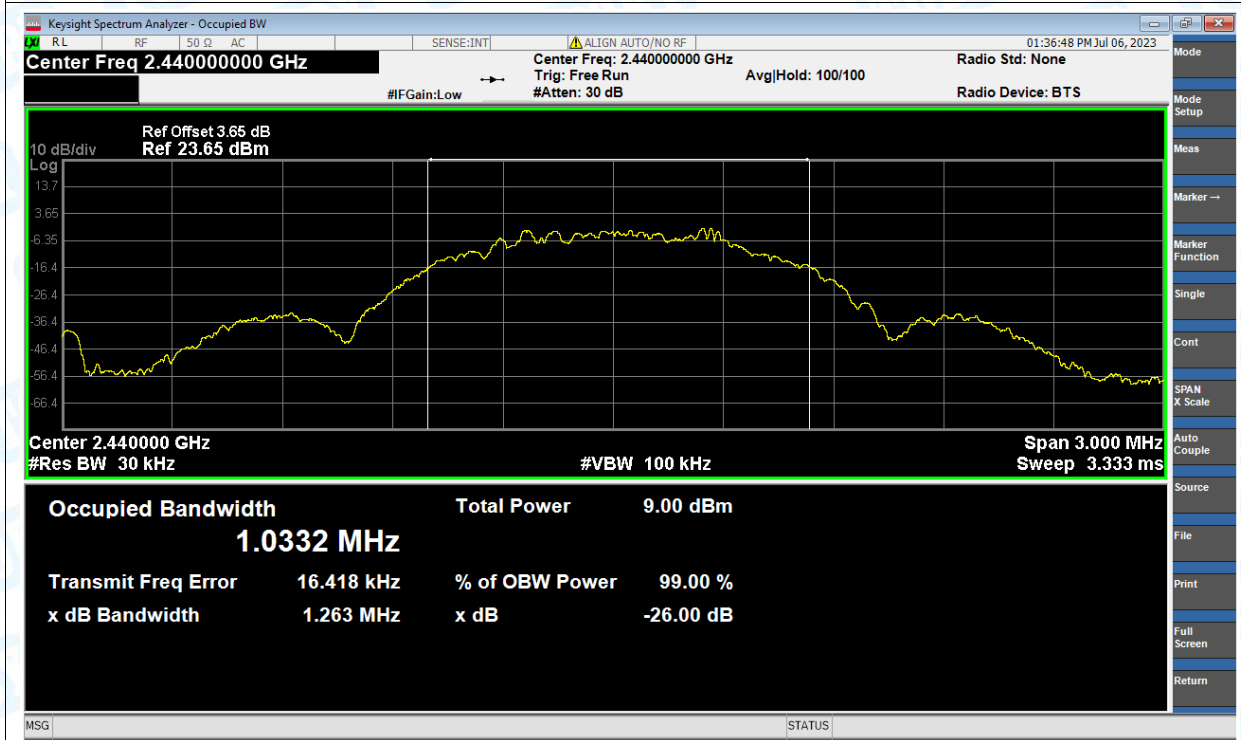


OBW NVNT BLE 1Mbps 2480MHz Ant1

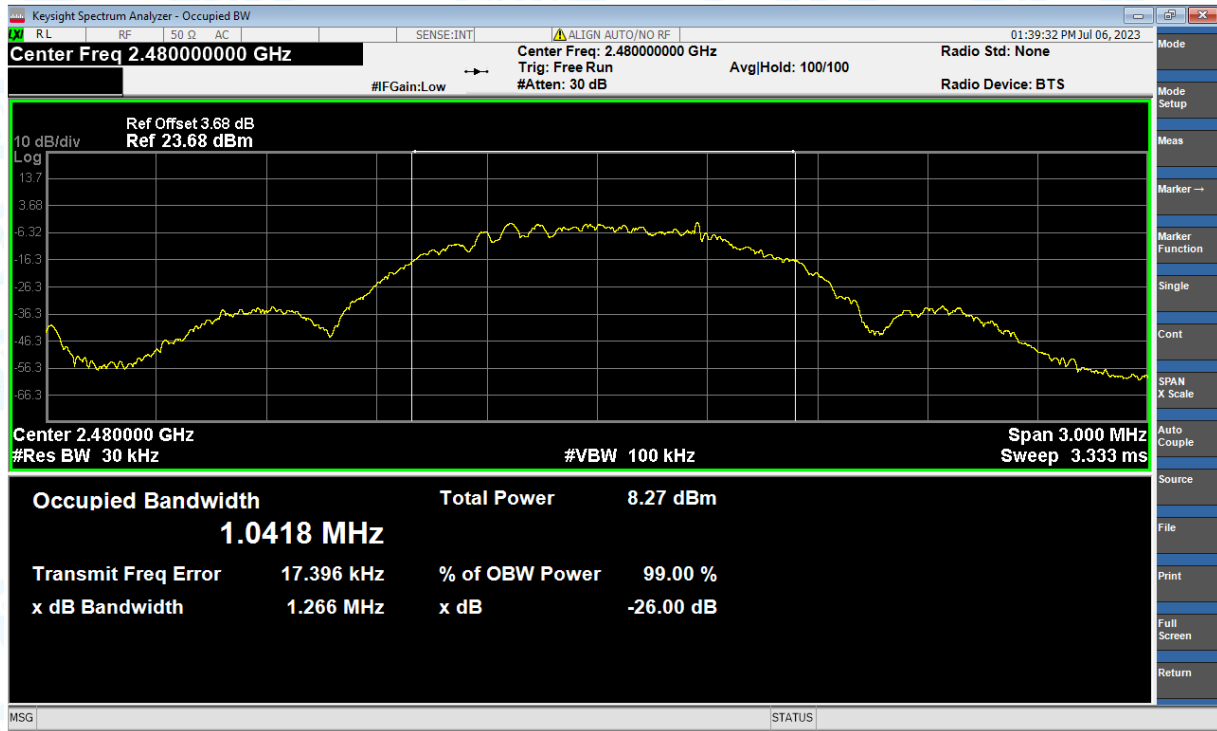


OBW NVNT BLE 2Mbps 2402MHz Ant1

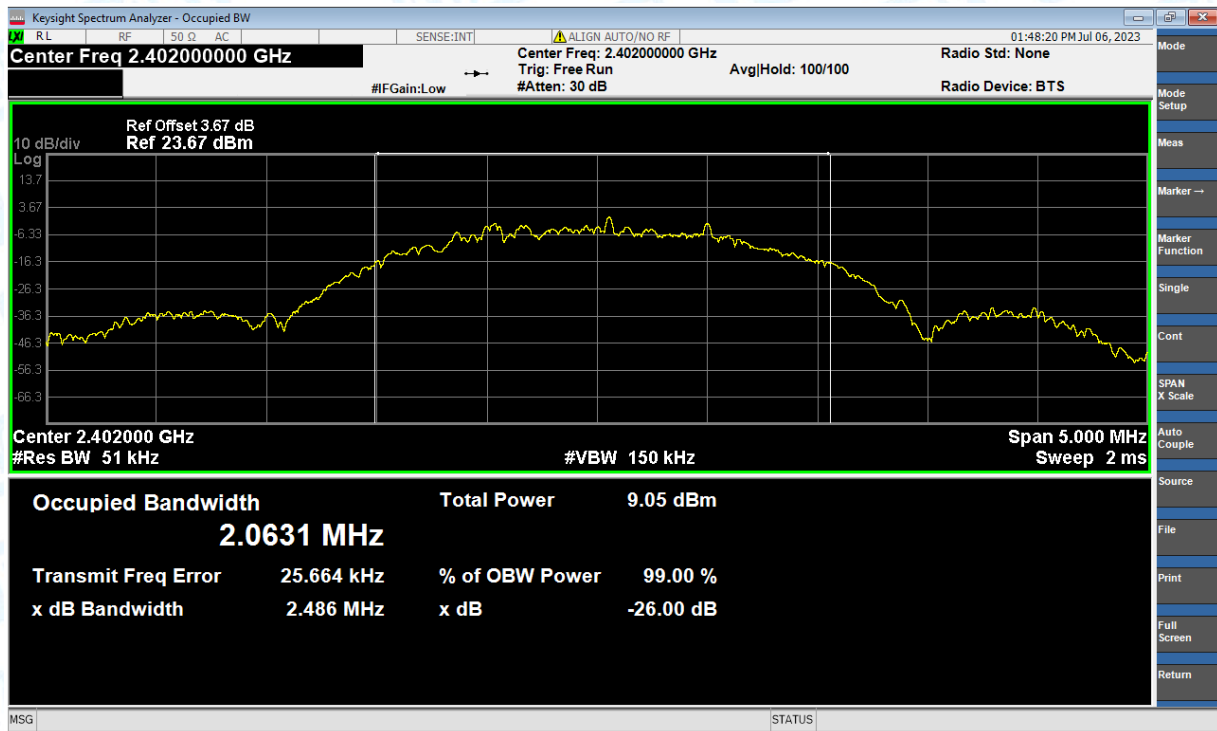

OBW NVNT BLE 2Mbps 2440MHz Ant1

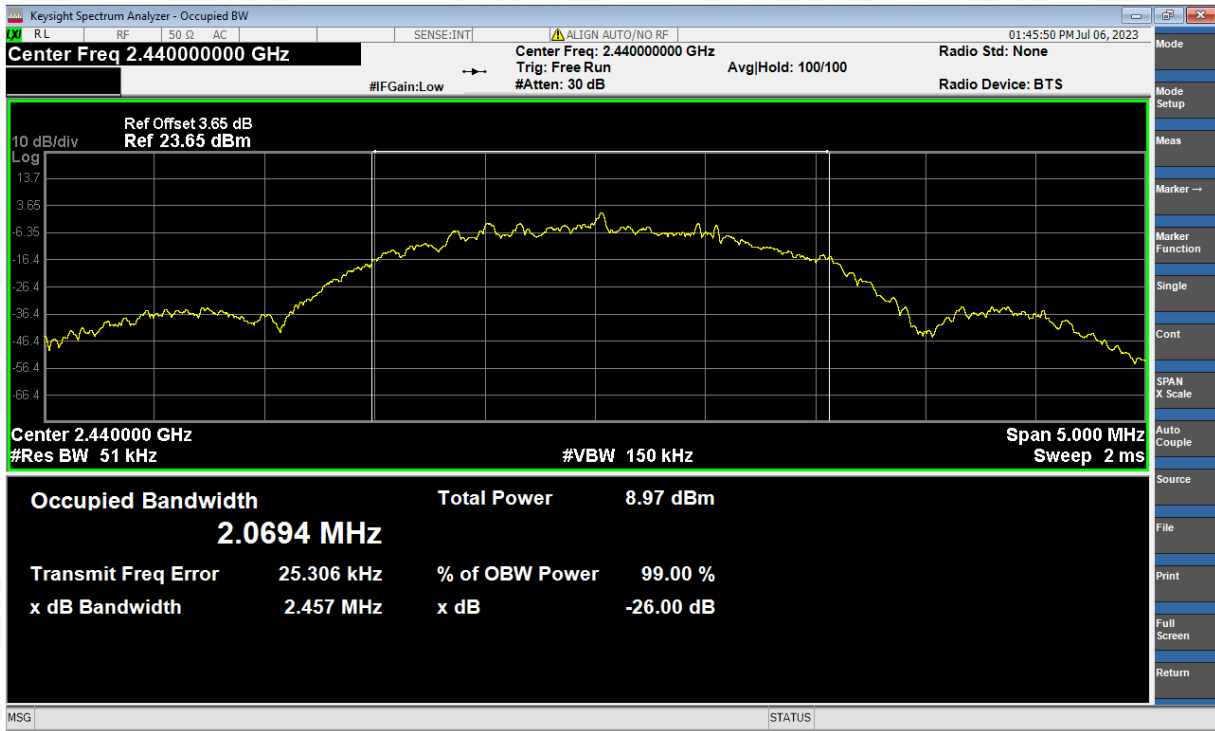

OBW NVNT BLE 2Mbps 2480MHz Ant1

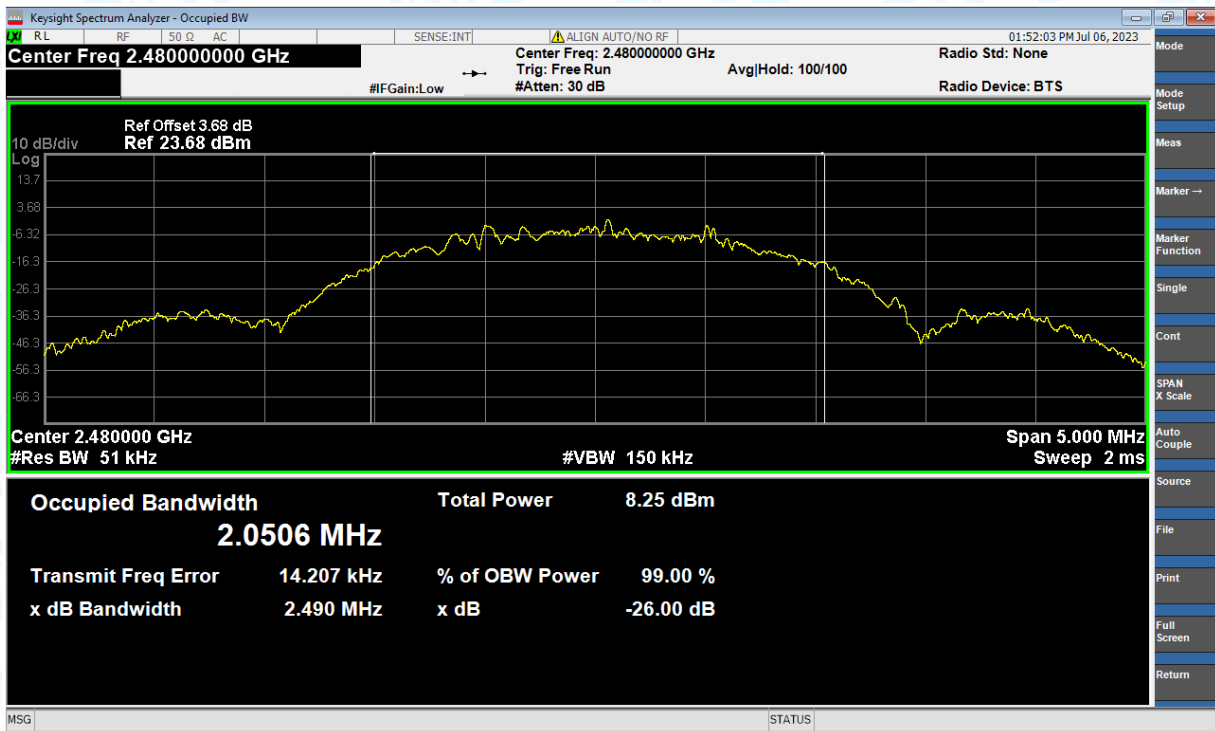


5. Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (3kHz/dBm)	Limit (3kHz/dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-13.405	8	Pass
NVNT	BLE 1Mbps	2440	Ant1	-13.656	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-14.181	8	Pass
NVNT	BLE 2Mbps	2402	Ant1	-15.459	8	Pass
NVNT	BLE 2Mbps	2440	Ant1	-15.538	8	Pass
NVNT	BLE 2Mbps	2480	Ant1	-16.108	8	Pass



Test Graphs

PSD NVNT BLE 1Mbps 2402MHz Ant1

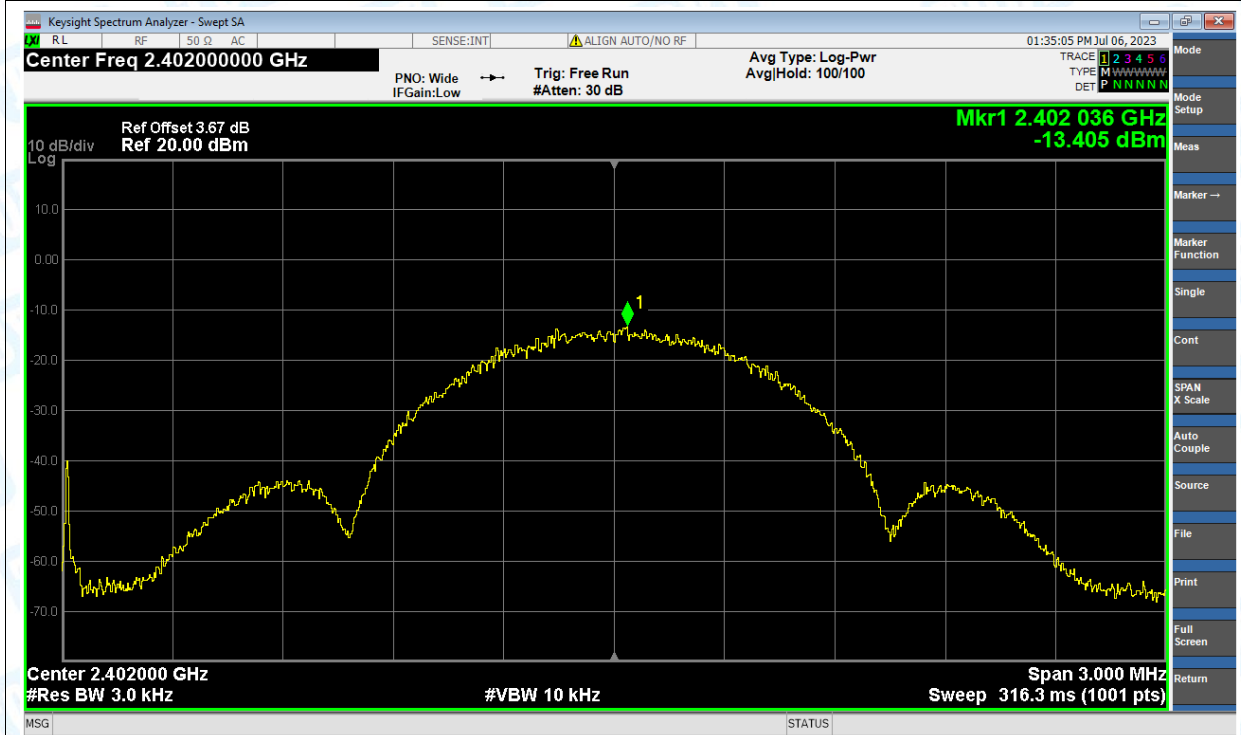


PSD NVNT BLE 1Mbps 2440MHz Ant1

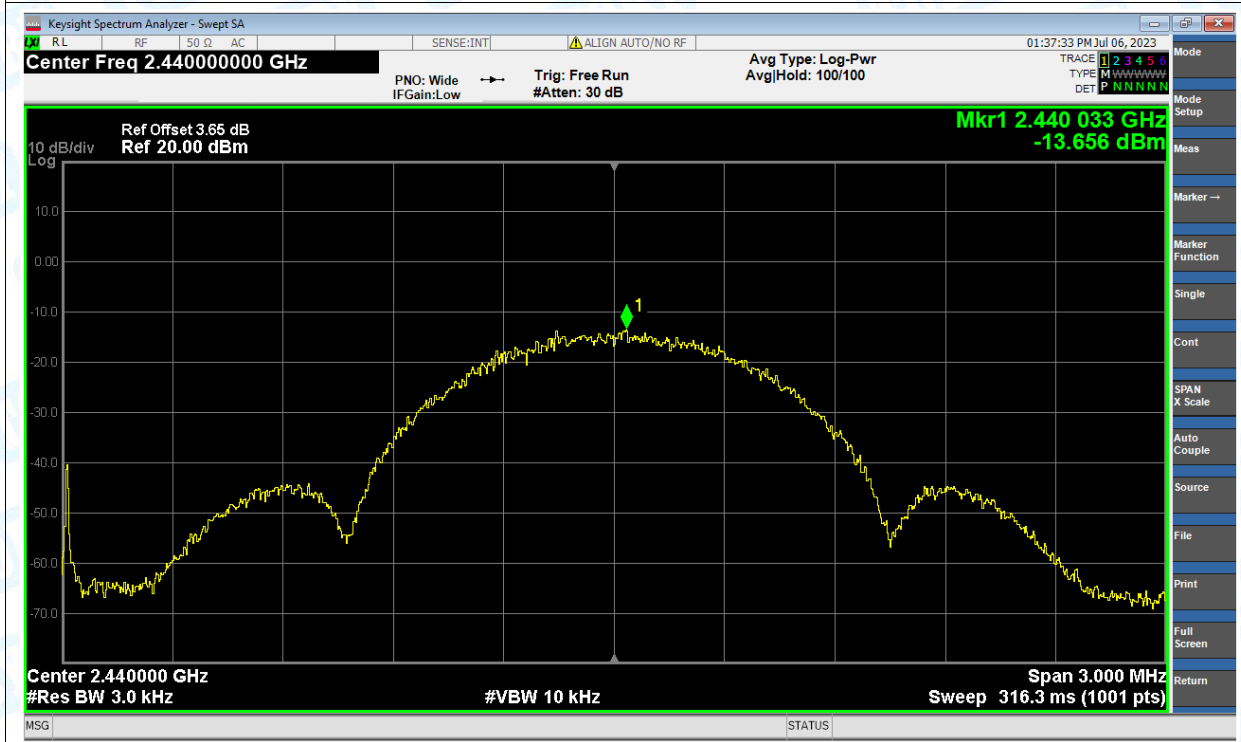


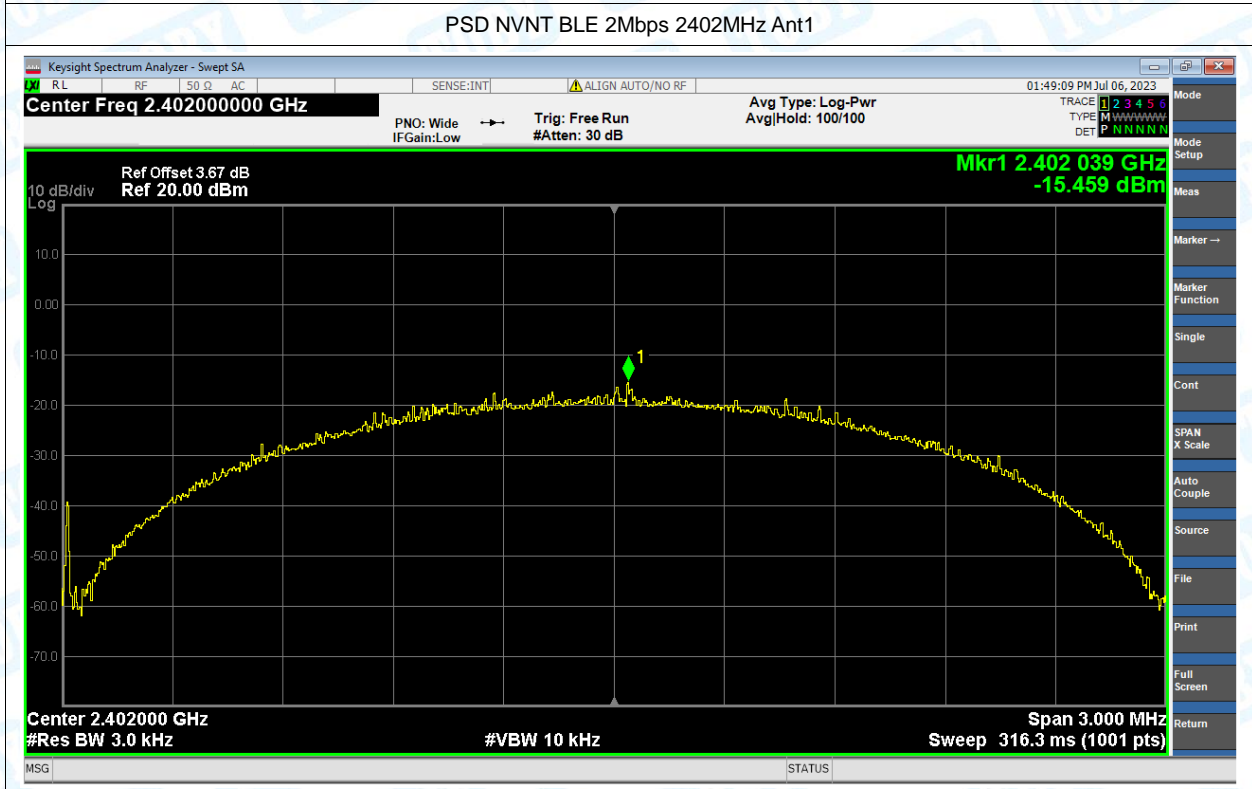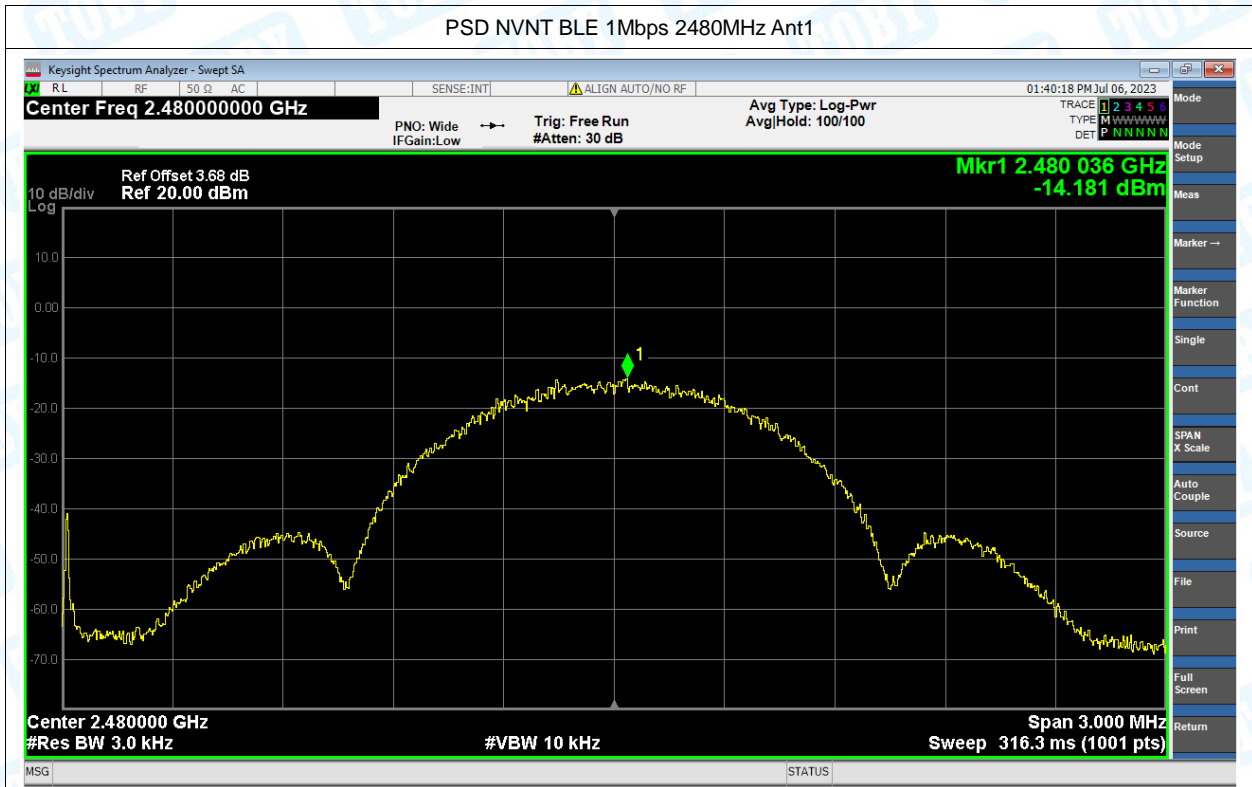

PSD NVNT BLE 2Mbps 2440MHz Ant1

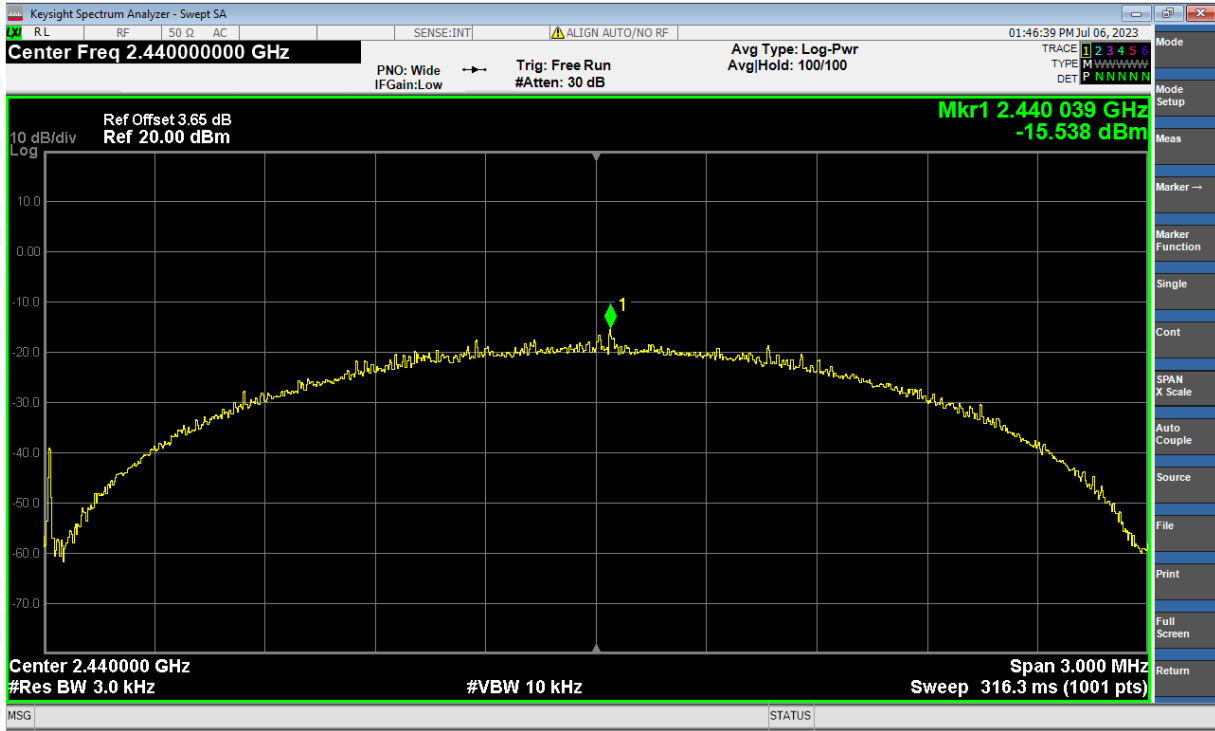

PSD NVNT BLE 2Mbps 2480MHz Ant1

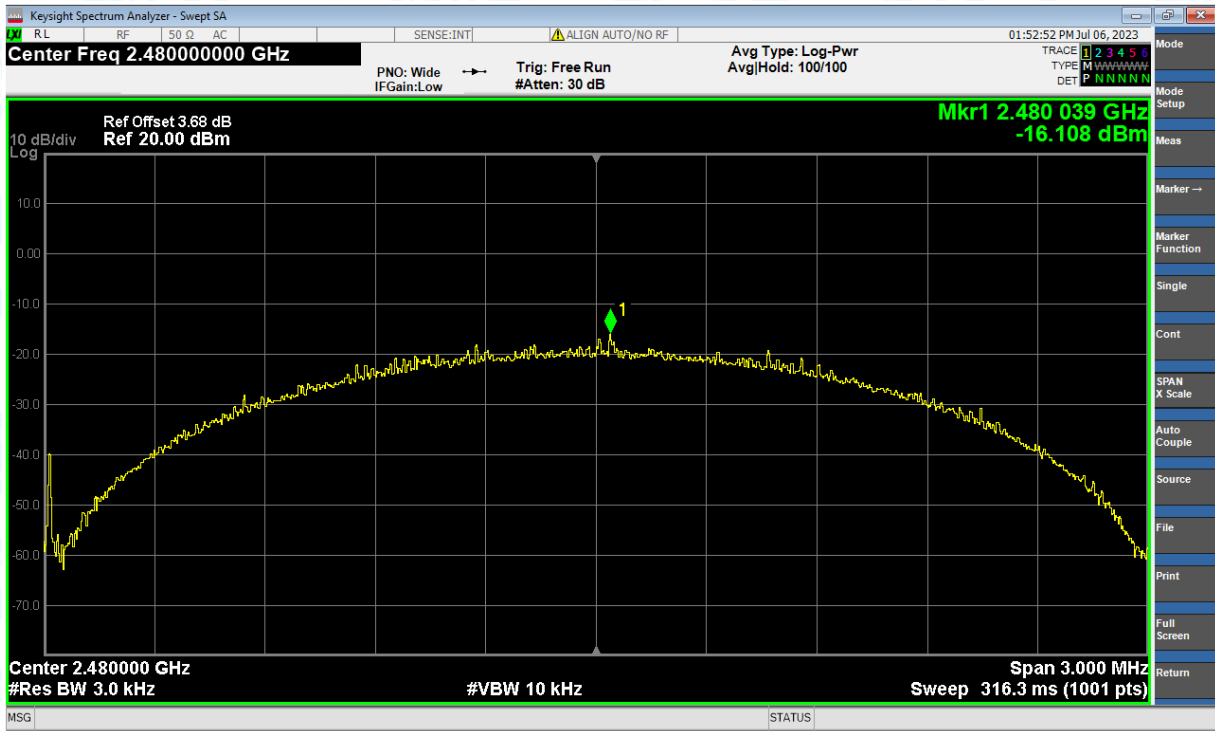


6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-50.47	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-50.10	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	-52.77	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	-52.52	-20	Pass

Test Graphs


Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Ref

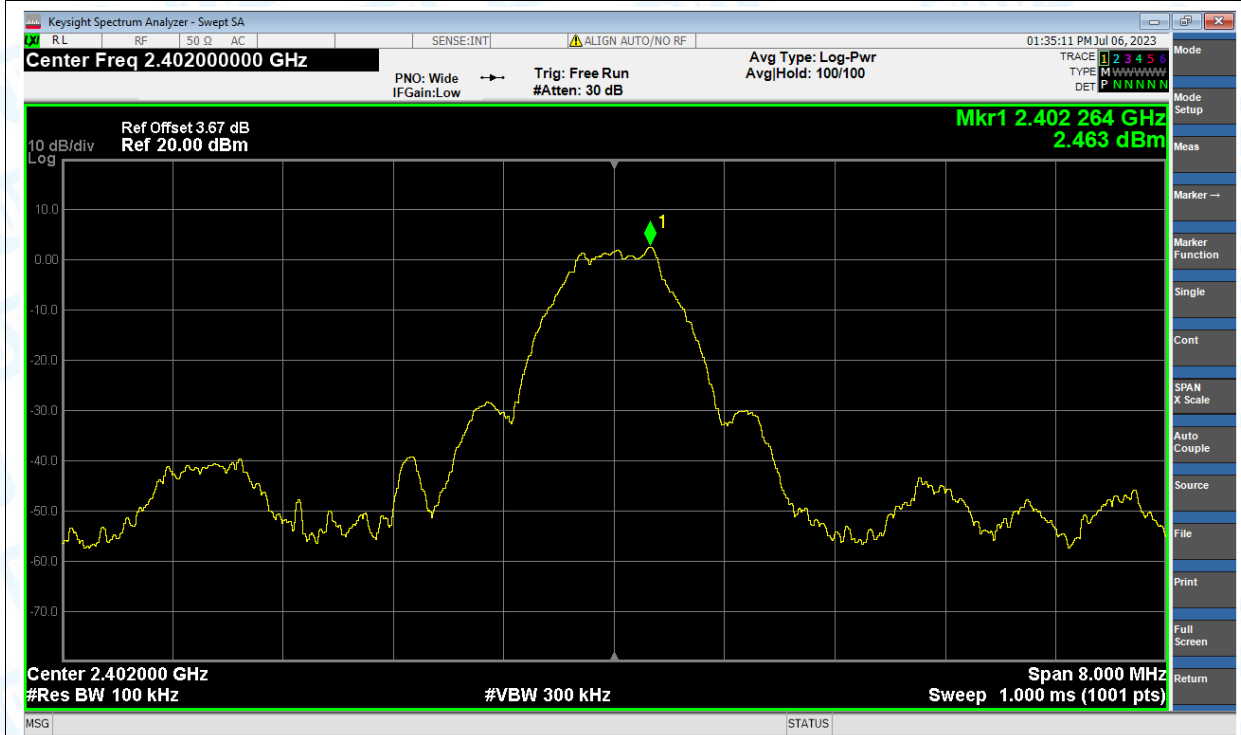


Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Emission

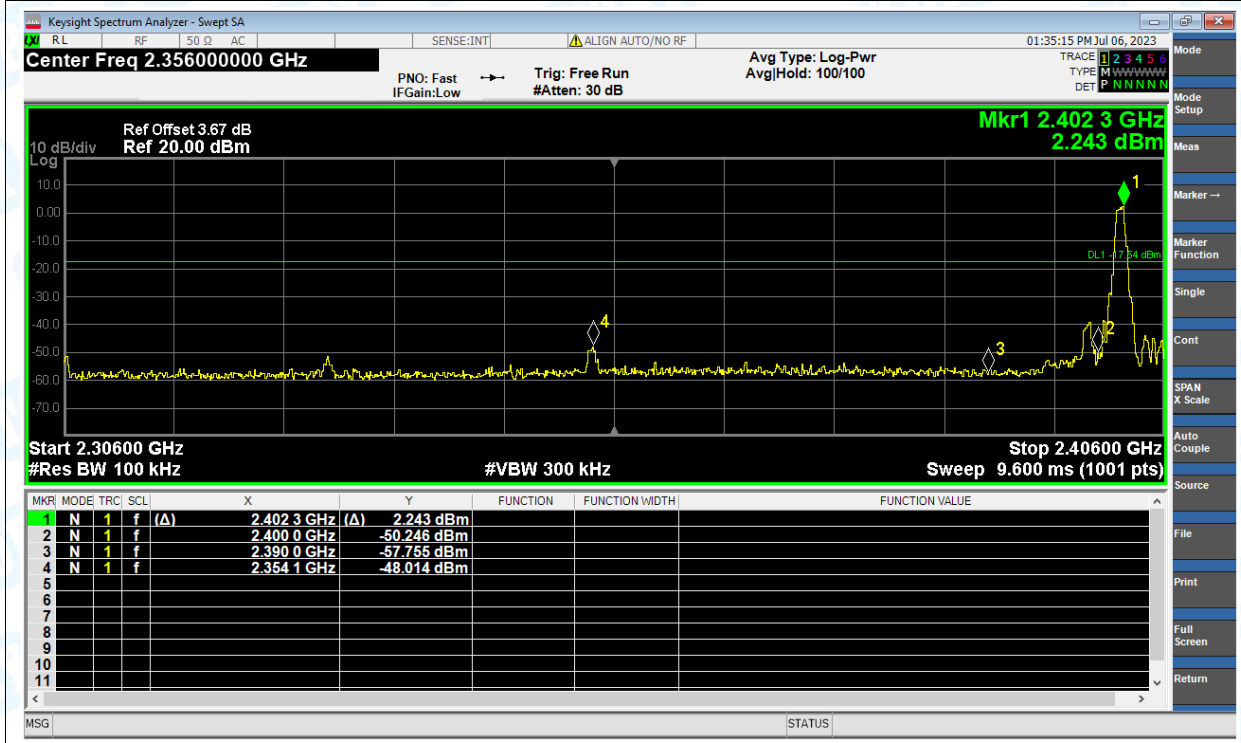


Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Ref

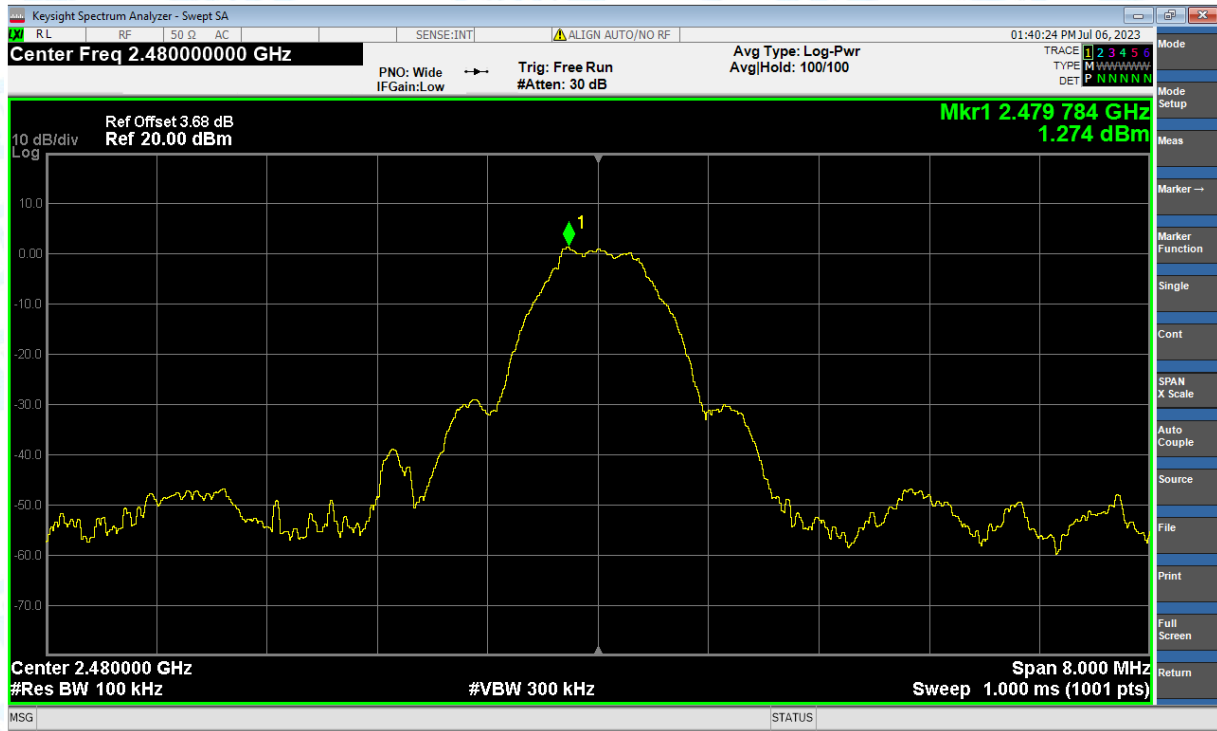


Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Emission

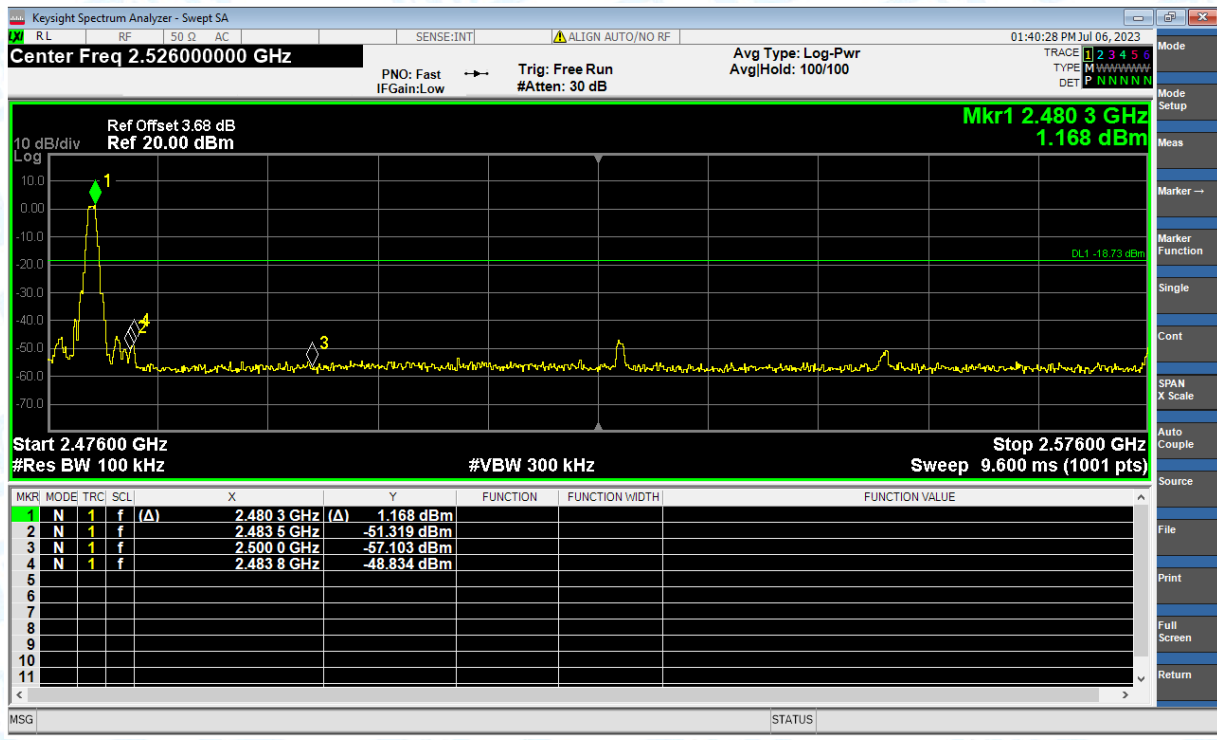

Band Edge NVNT BLE 2Mbps 2402MHz Ant1 Ref

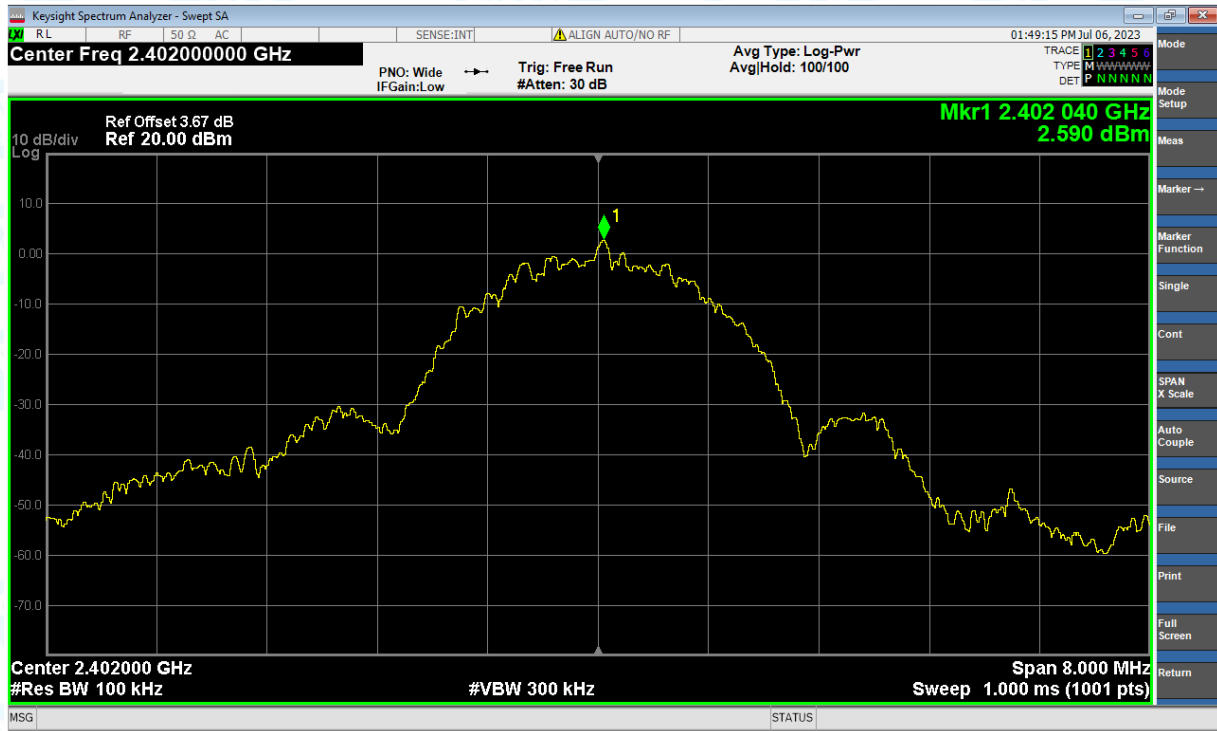


Band Edge NVNT BLE 2Mbps 2402MHz Ant1 Emission

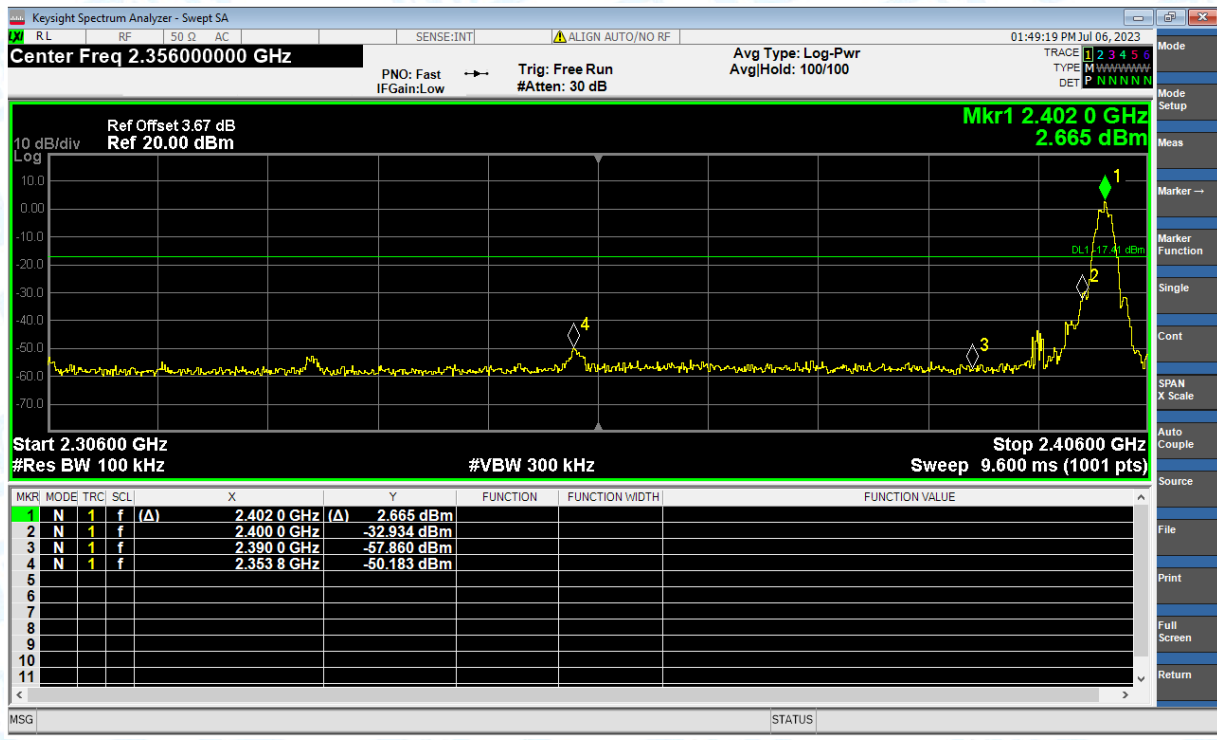

Band Edge NVNT BLE 2Mbps 2480MHz Ant1 Ref



Band Edge NVNT BLE 2Mbps 2480MHz Ant1 Emission

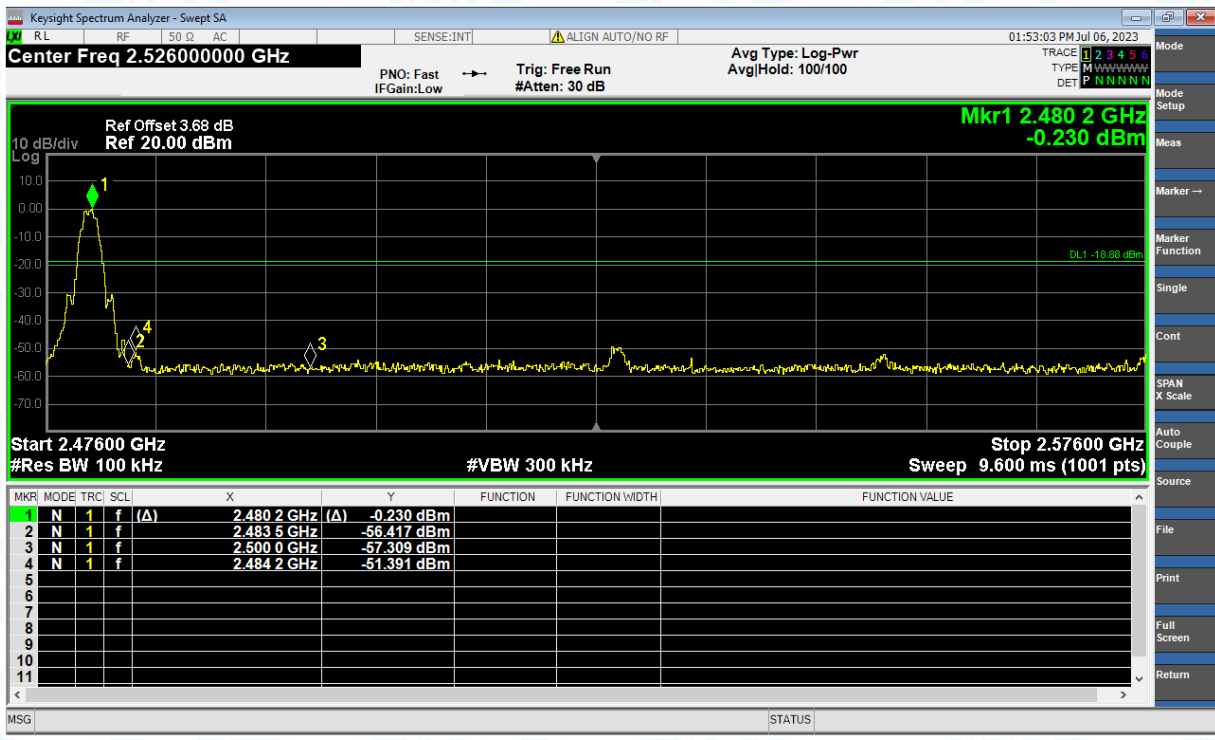


7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-40.67	-20	Pass
NVNT	BLE 1Mbps	2440	Ant1	-40.68	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-40.10	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	-40.68	-20	Pass
NVNT	BLE 2Mbps	2440	Ant1	-40.28	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	-40.18	-20	Pass



Test Graphs

Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Ref

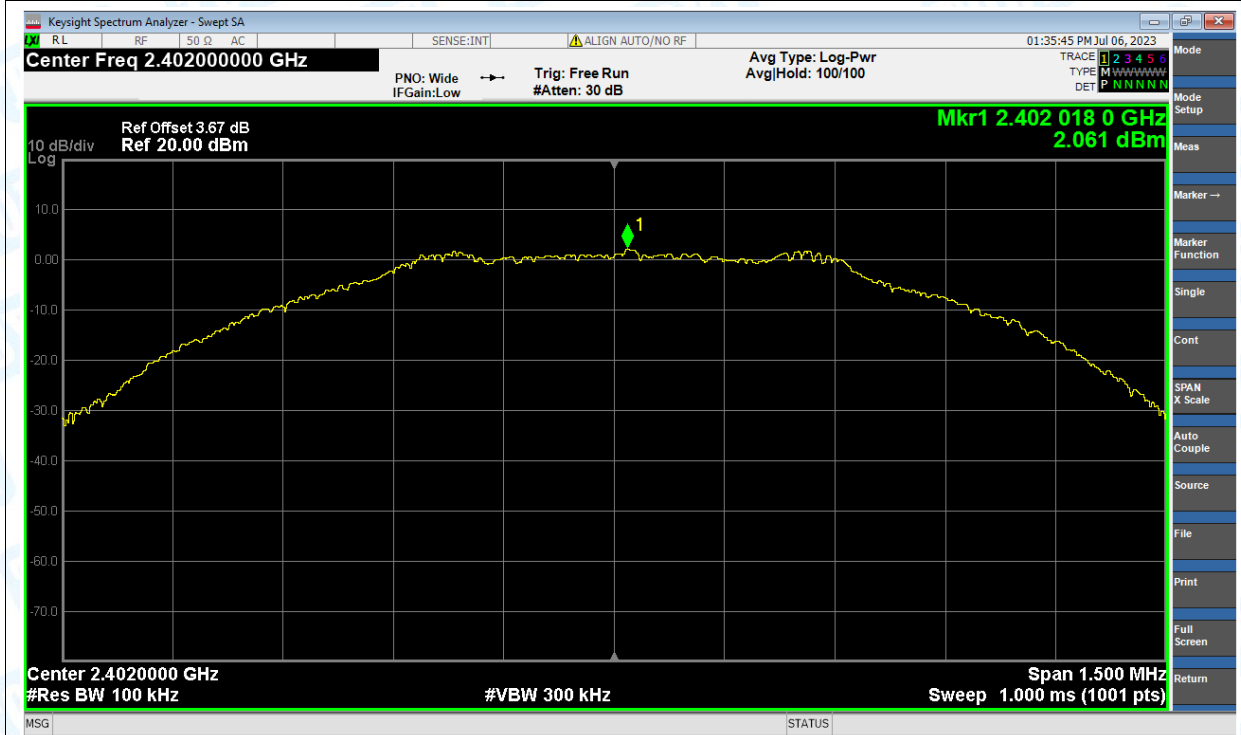


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Emission

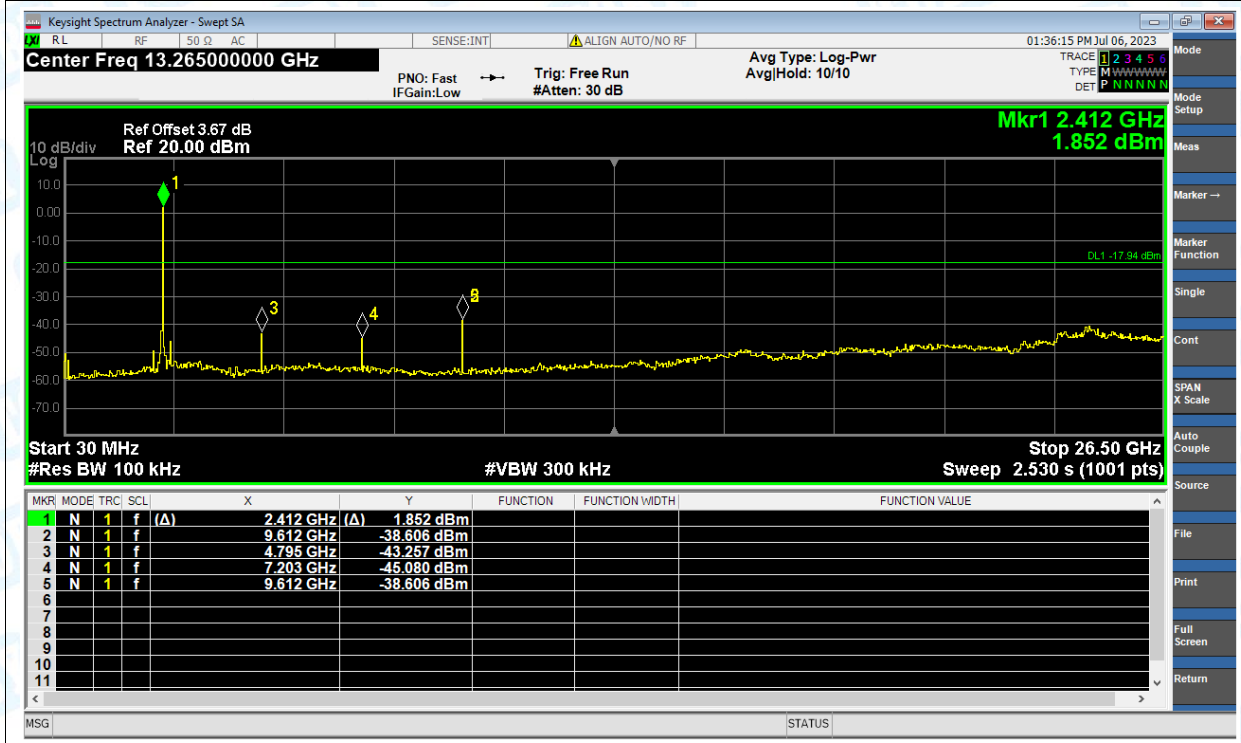


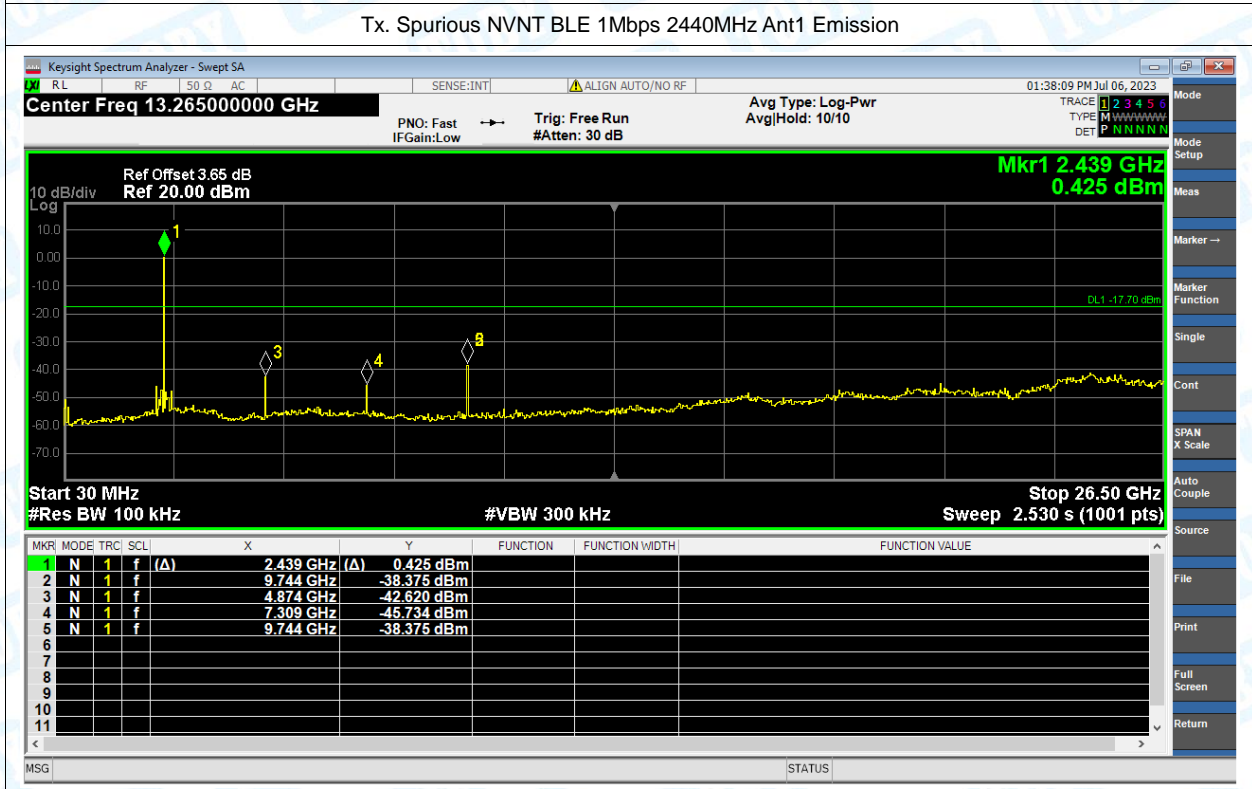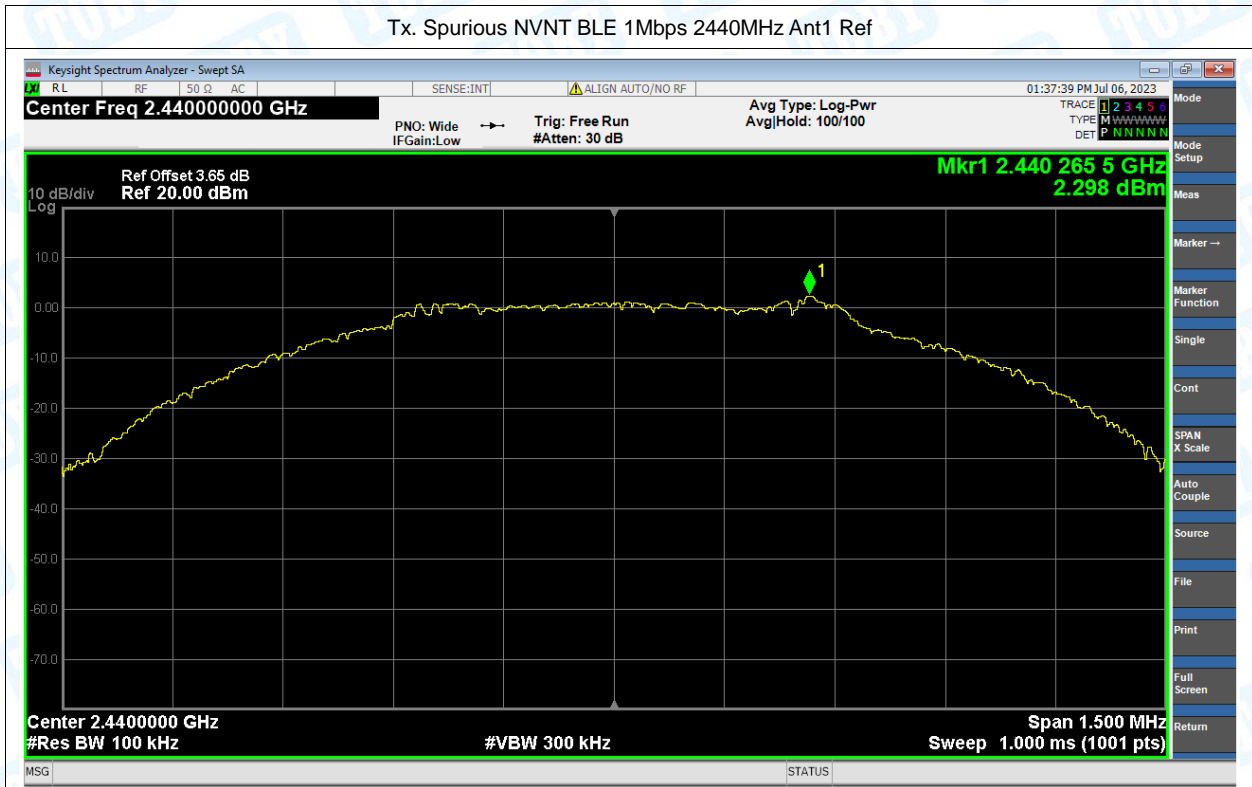


Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Ref

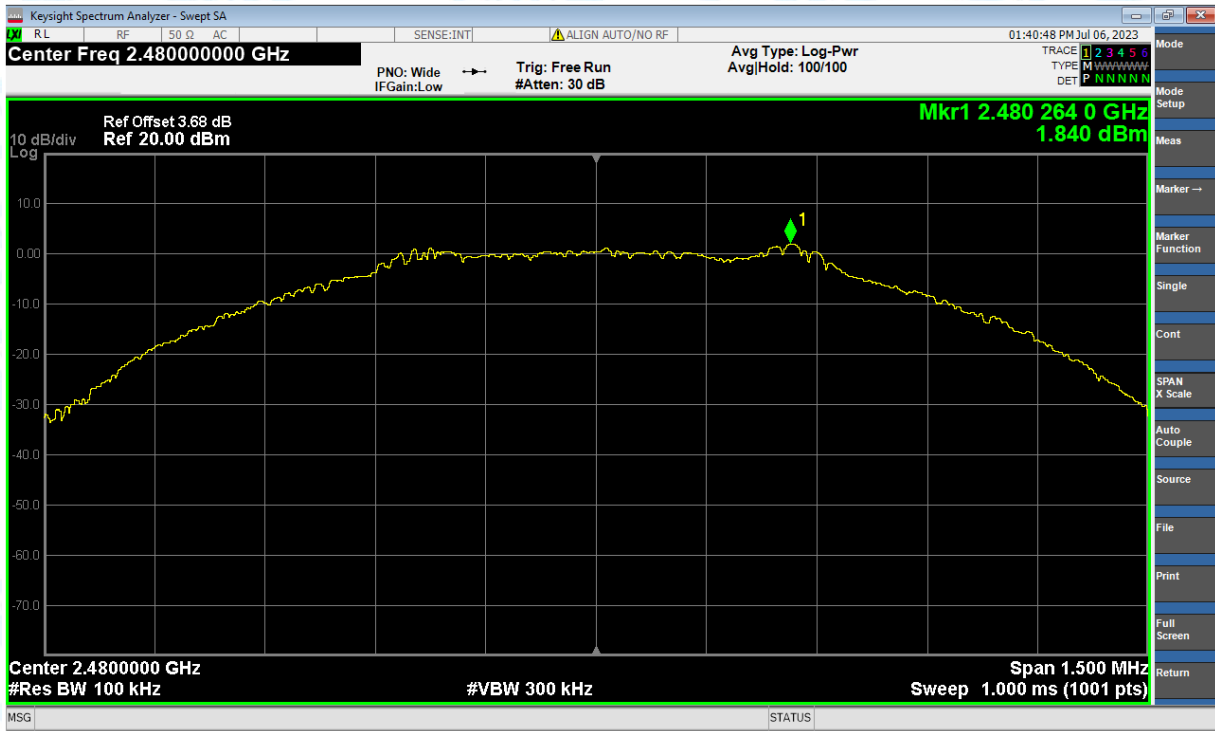


Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Emission


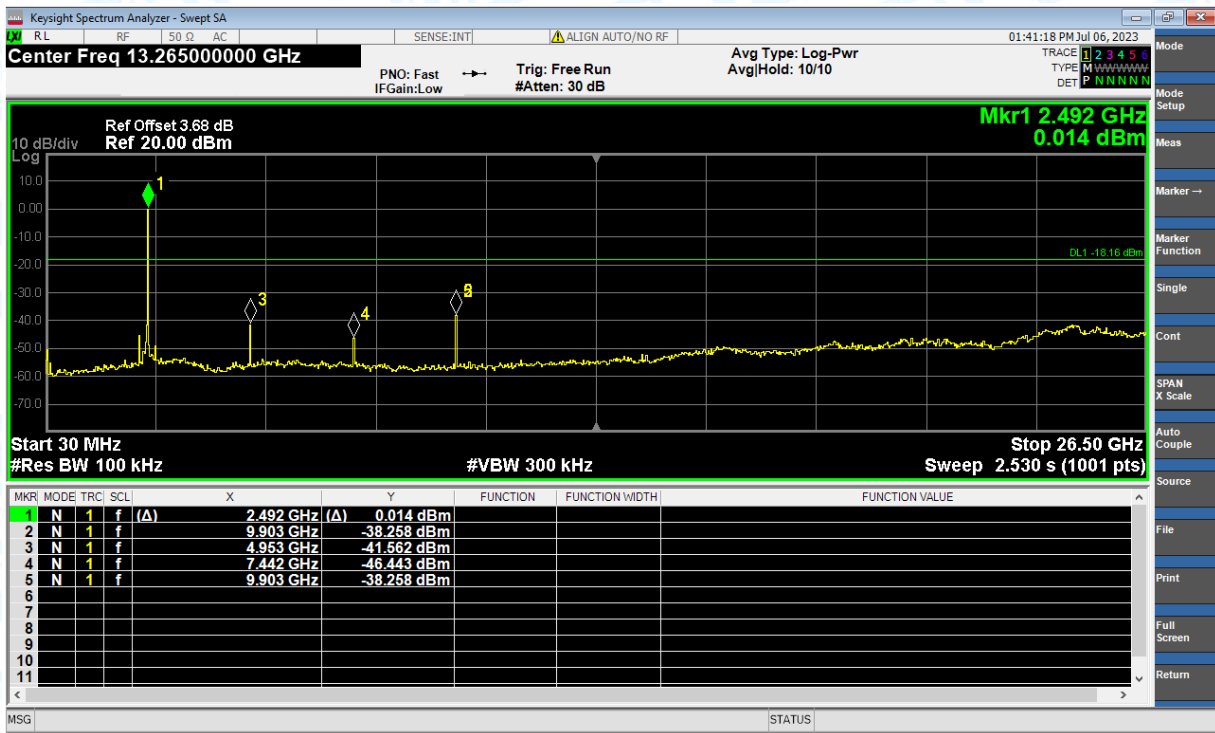


Tx. Spurious NVNT BLE 2Mbps 2402MHz Ant1 Ref

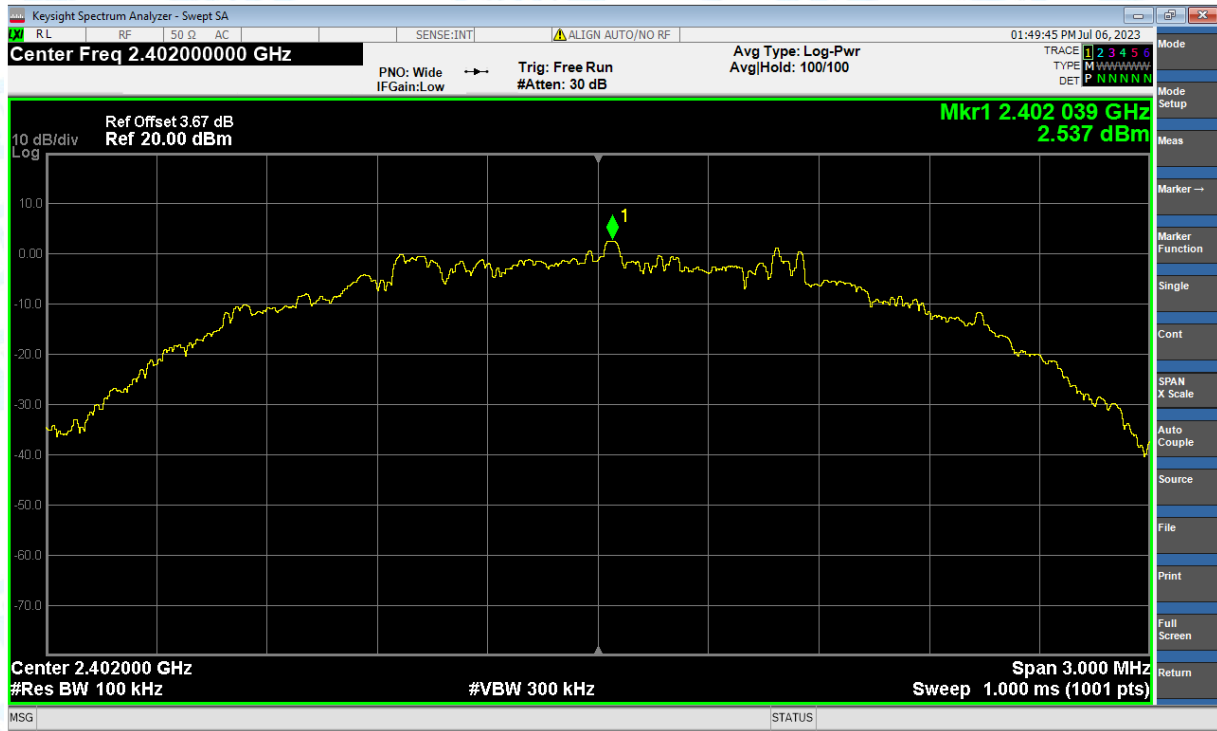


Tx. Spurious NVNT BLE 2Mbps 2402MHz Ant1 Emission

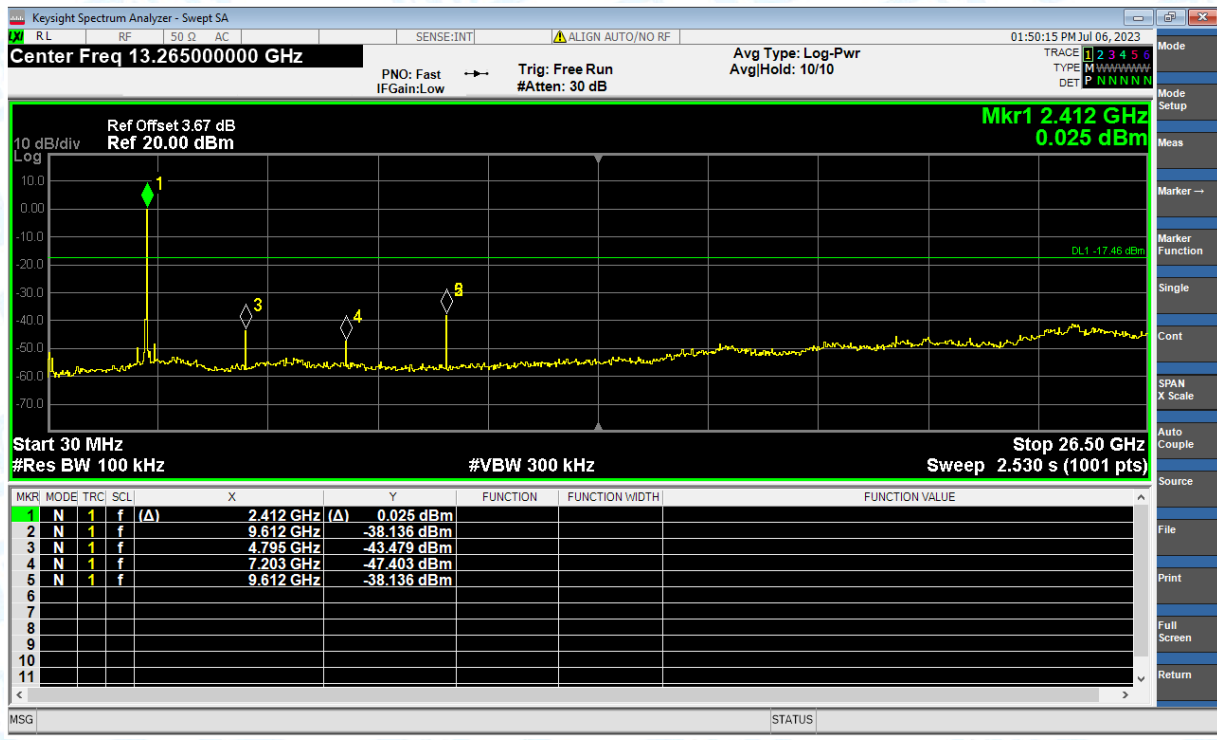


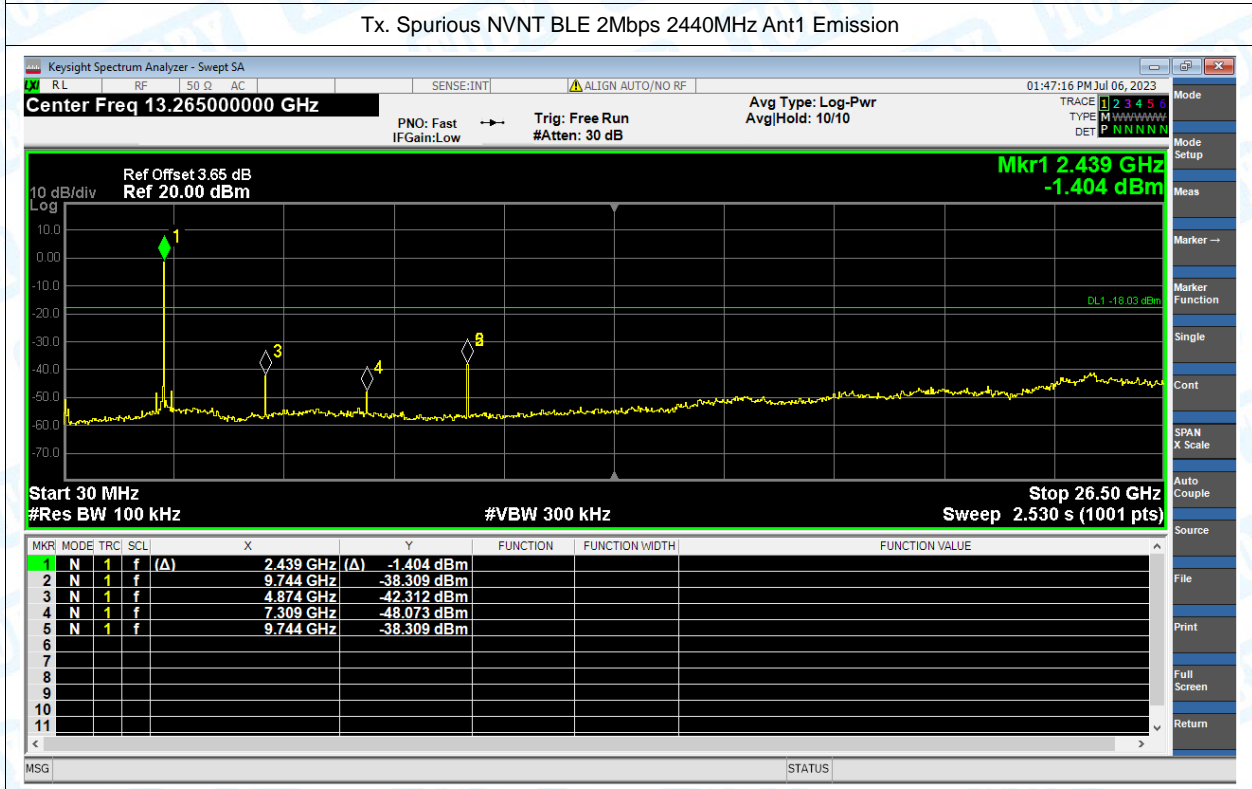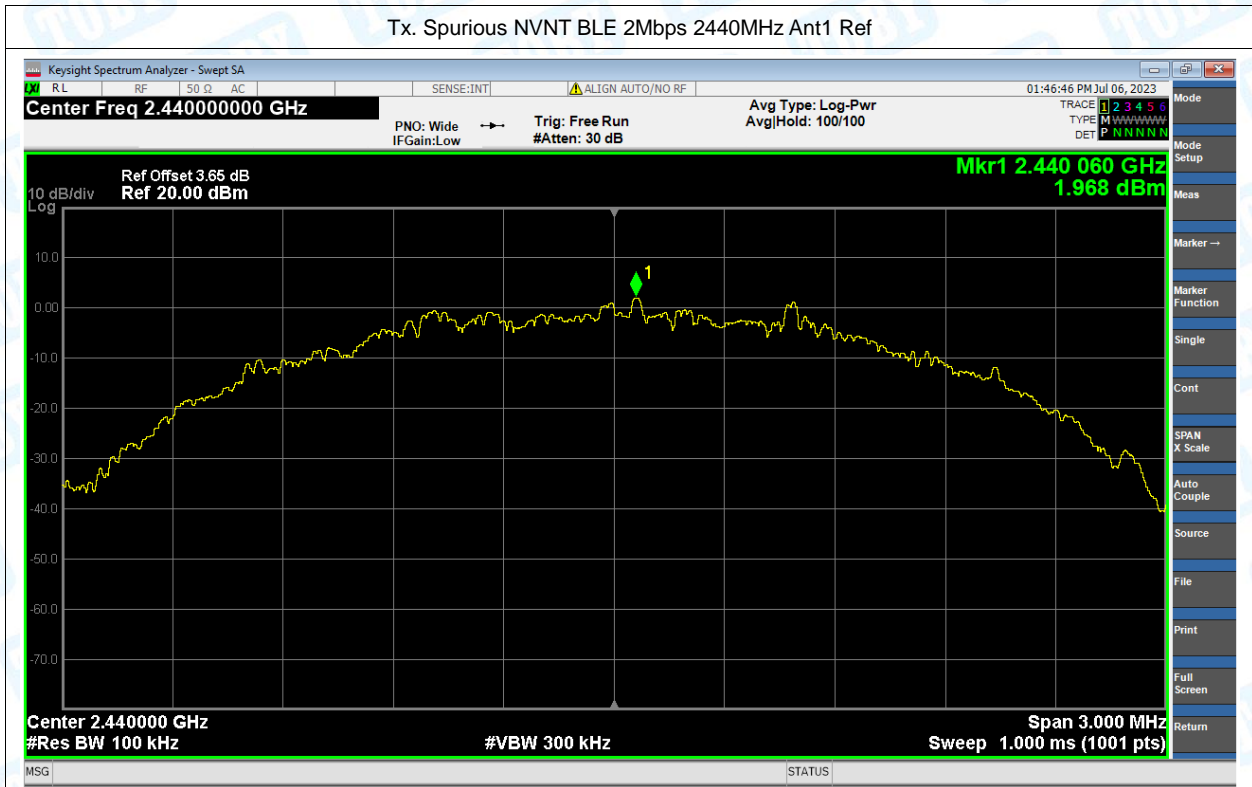

Tx. Spurious NVNT BLE 2Mbps 2480MHz Ant1 Ref

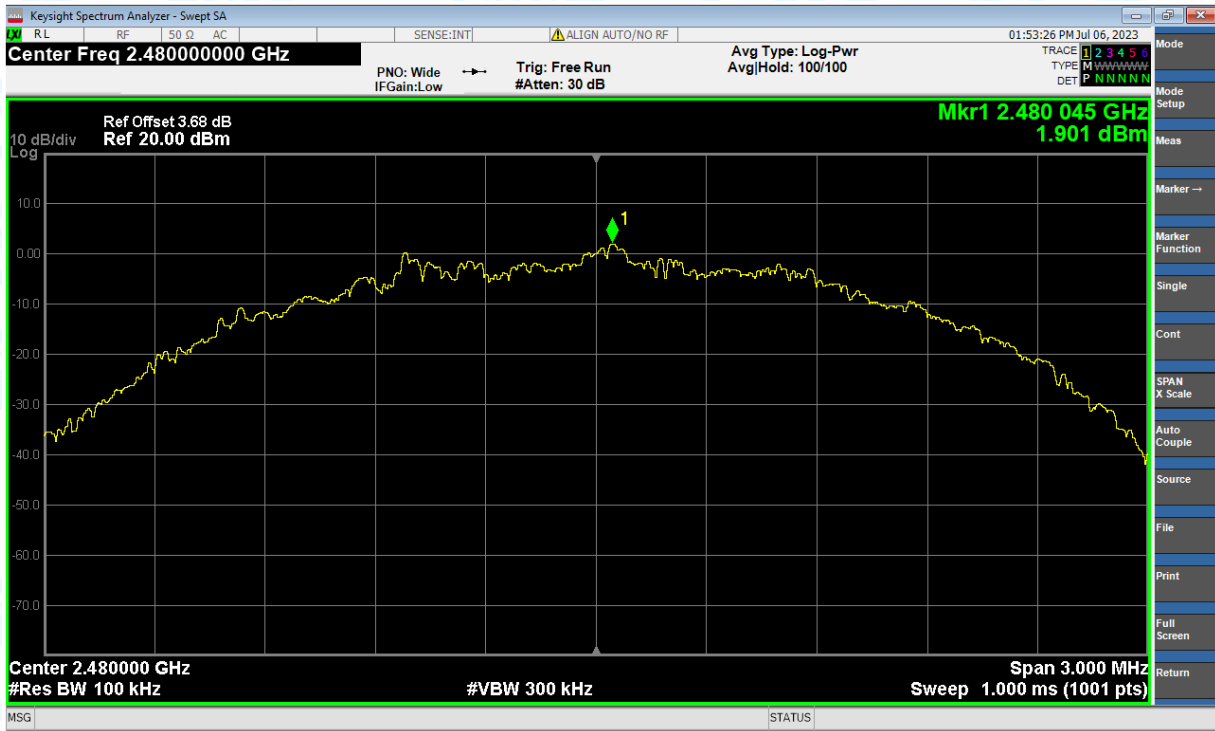

Tx. Spurious NVNT BLE 2Mbps 2480MHz Ant1 Emission

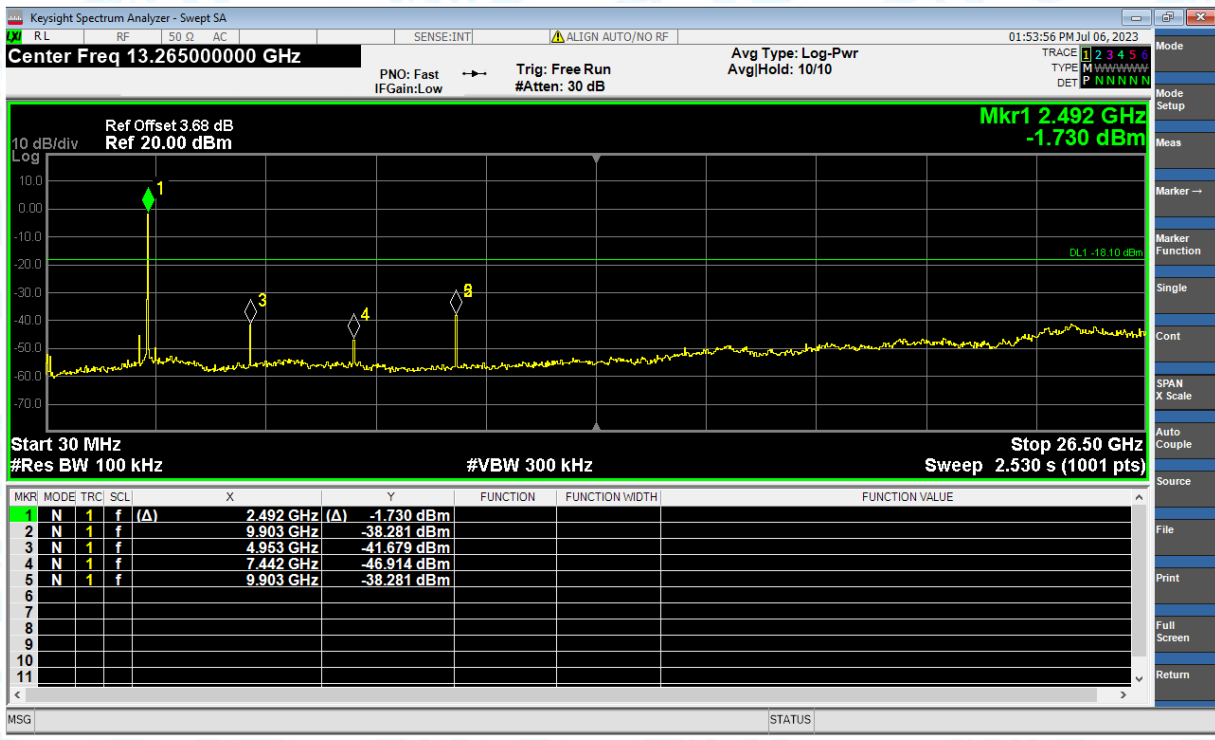


8. Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2310	-48.12	2	49.14	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2310	-56.94	2	40.32	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2354.64	-40.68	2	56.58	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2353.968	-48.33	2	48.93	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-46.93	2	50.33	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-56.08	2	41.18	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-41.7	2	55.56	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-50.45	2	46.81	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.632	-41.11	2	56.15	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.512	-50.45	2	46.81	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-45.95	2	51.31	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-55.55	2	41.71	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2310	-48.12	2	49.14	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2310	-56.77	2	40.49	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2354.064	-40.91	2	56.35	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2353.968	-48.74	2	48.52	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2390	-45.49	2	51.77	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2390	-55.68	2	41.58	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.5	-42.23	2	55.03	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.5	-51.39	2	45.87	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.728	-41.59	2	55.67	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.512	-51.39	2	45.87	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2500	-46.19	2	51.07	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2500	-55.45	2	41.81	Average	54	Pass

Test Graphs


Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Peak

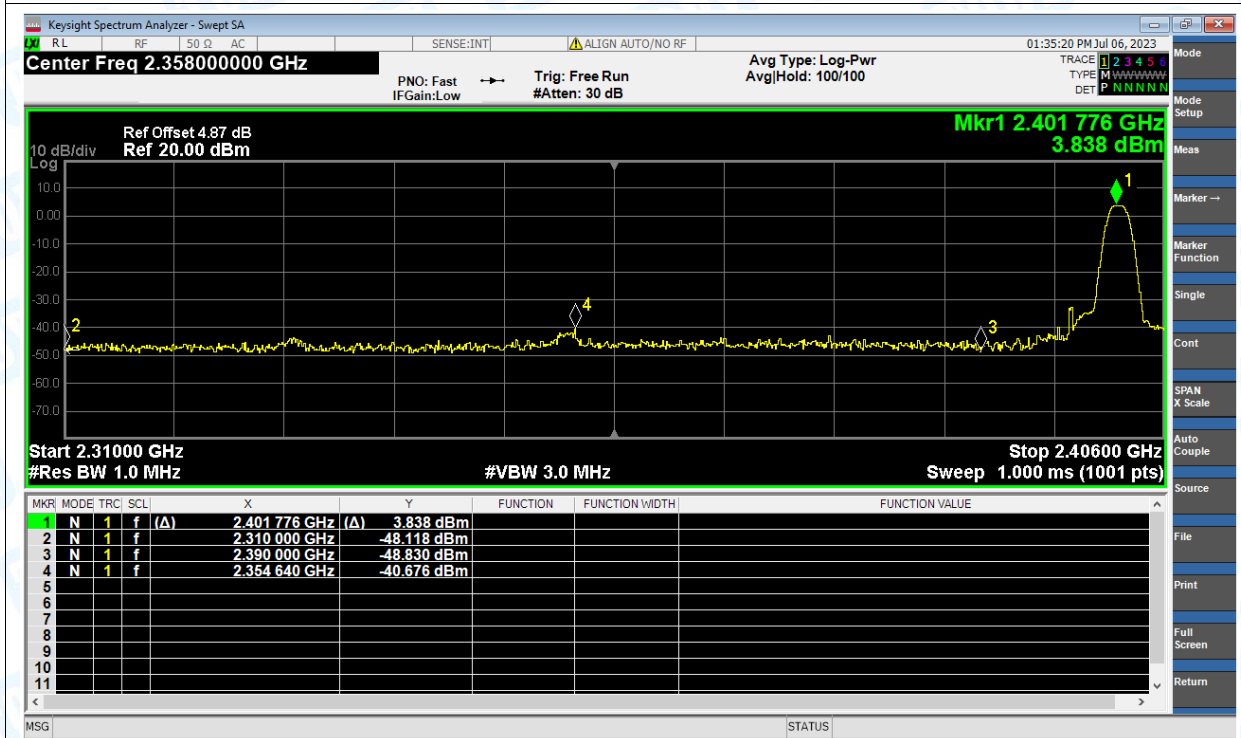


Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Average

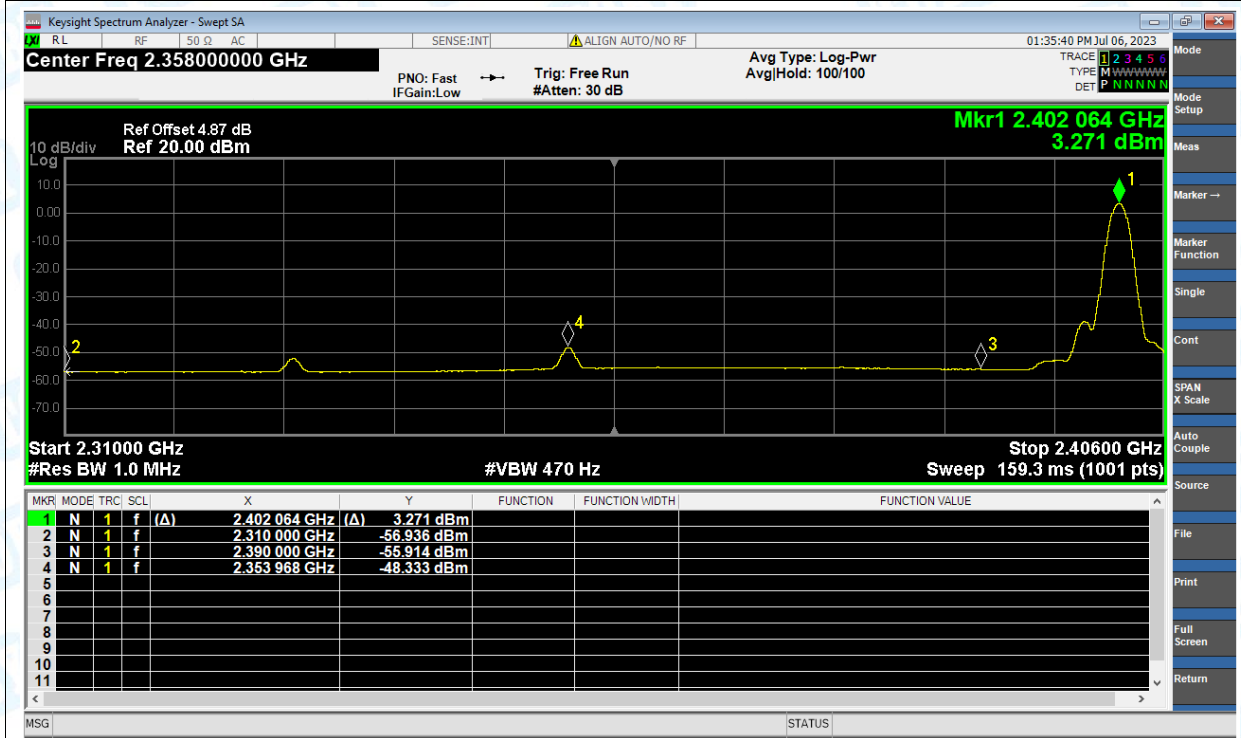


Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Peak

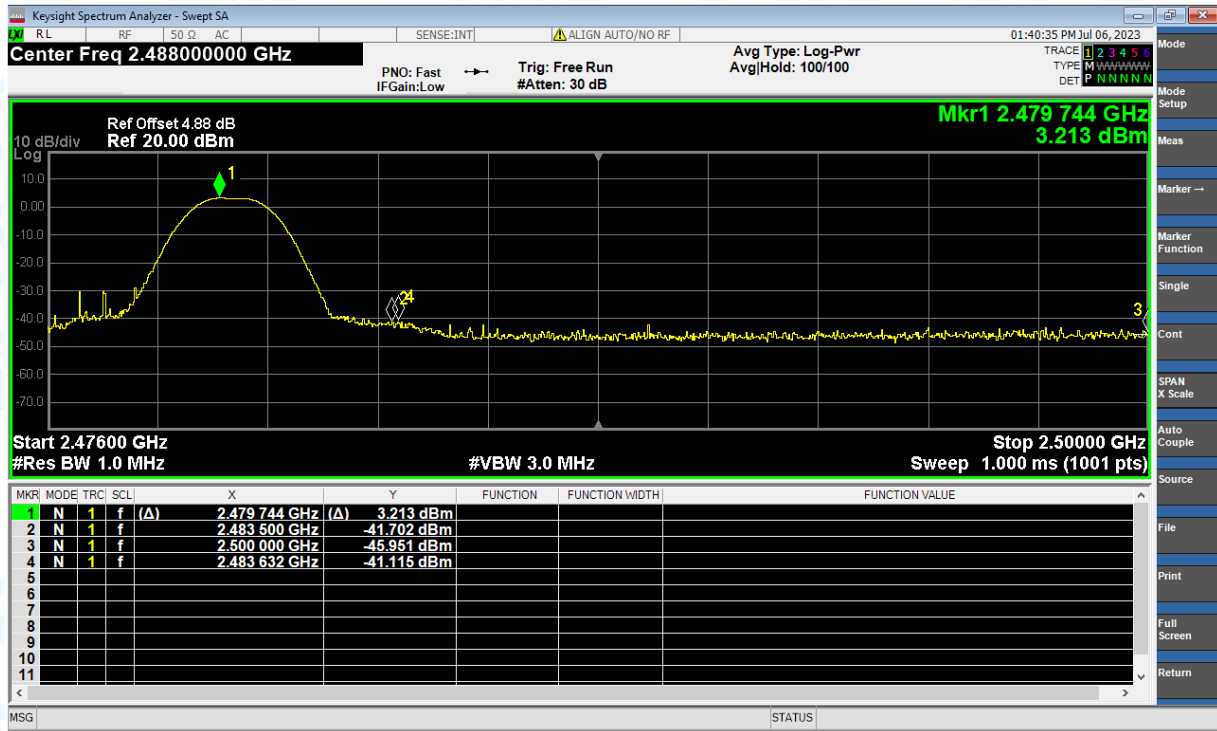

Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Average

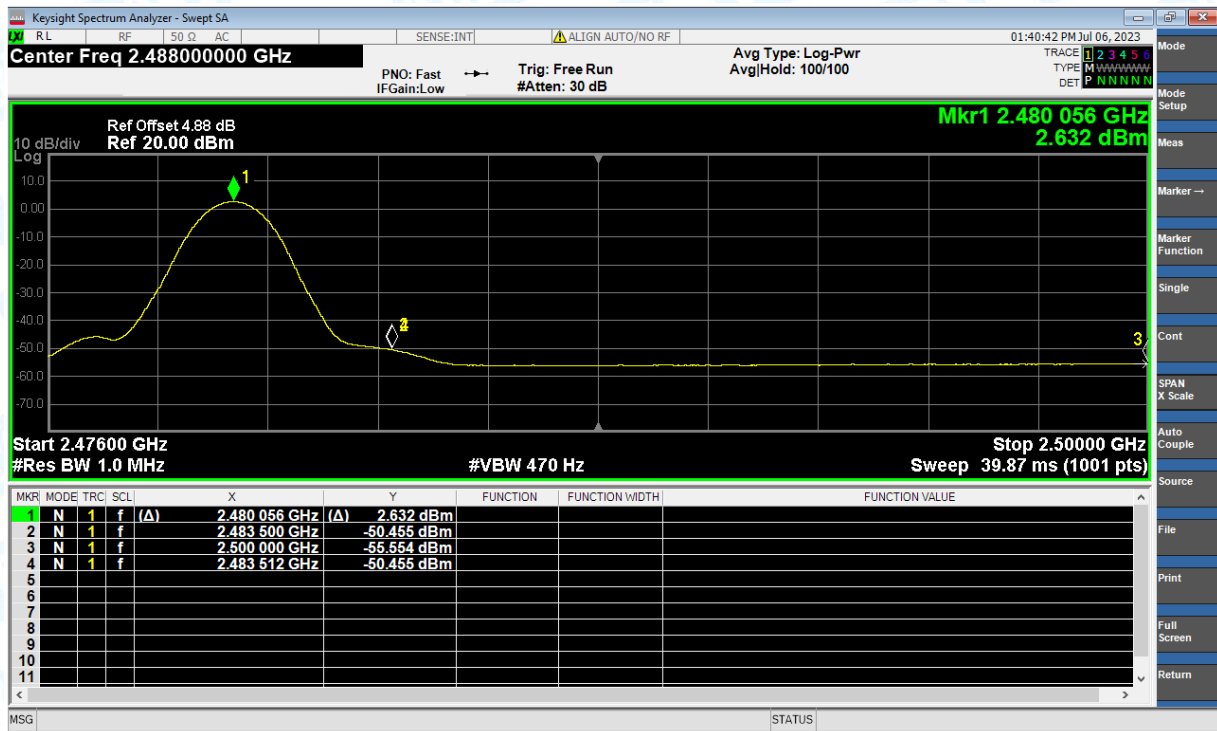


Restrict Band NVNT BLE 2Mbps 2402MHz Ant1 Peak

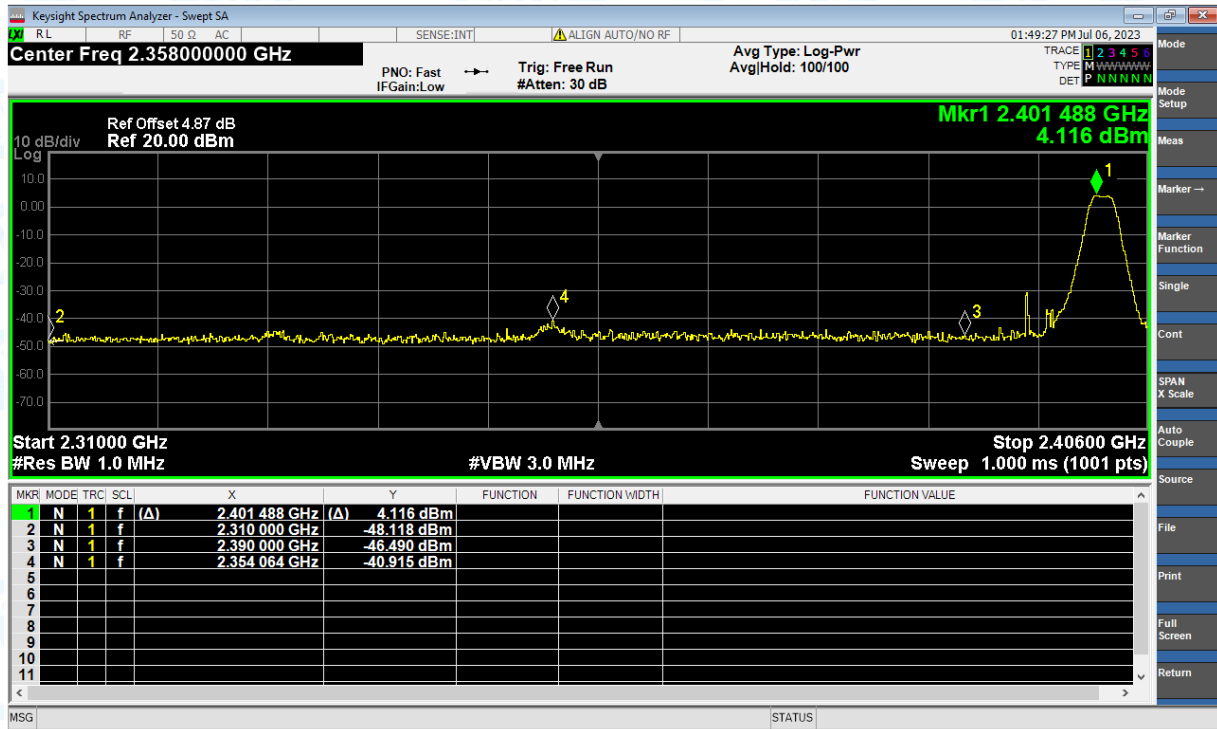


Restrict Band NVNT BLE 2Mbps 2402MHz Ant1 Average



Restrict Band NVNT BLE 2Mbps 2480MHz Ant1 Peak

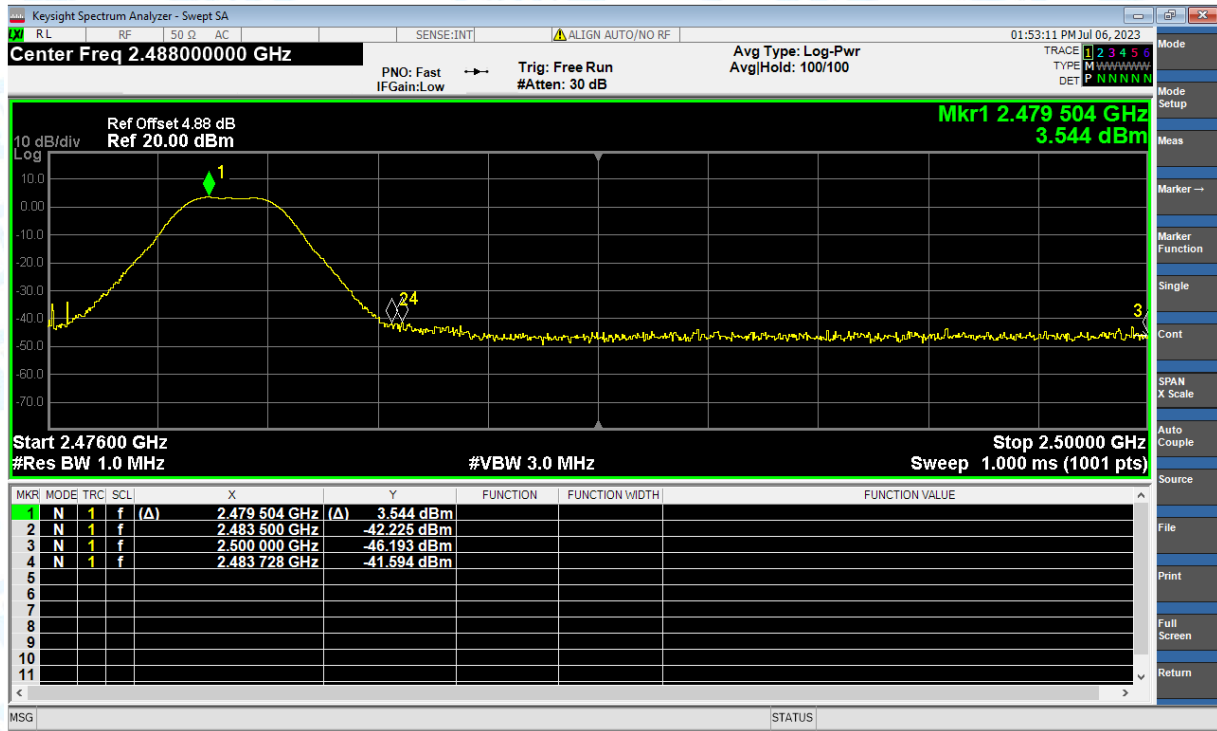

Restrict Band NVNT BLE 2Mbps 2480MHz Ant1 Average

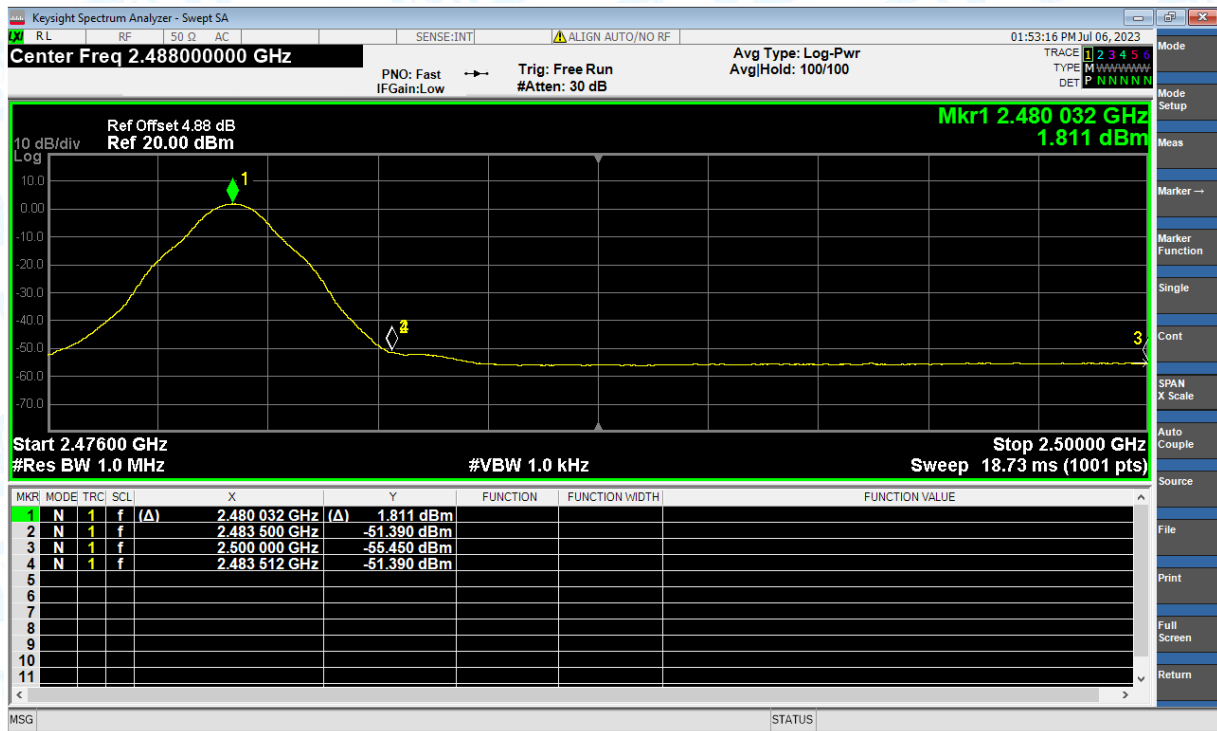

----END OF THE REPORT----