


A.8 Radiated Restricted Band Edge Test Result

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11a at 5180MHz	

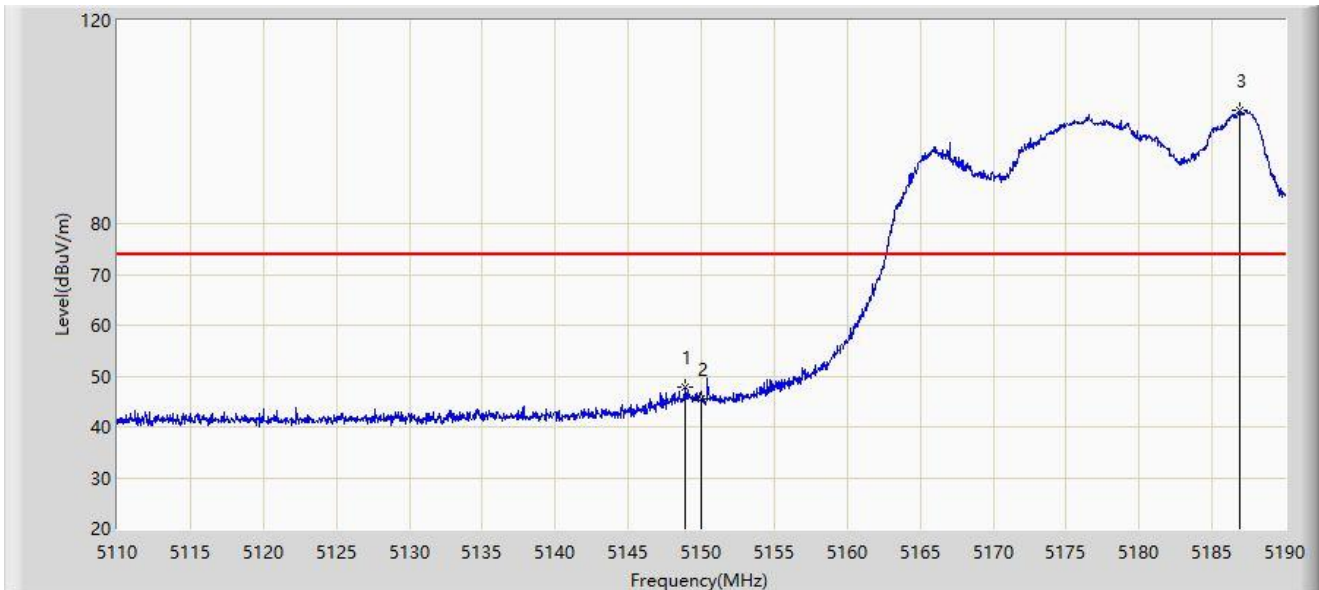


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.920	47.752	53.268	-26.248	74.000	-5.516	PK
2		5150.000	45.601	50.934	-28.399	74.000	-5.333	PK
3		5186.880	102.421	68.529	N/A	N/A	33.892	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

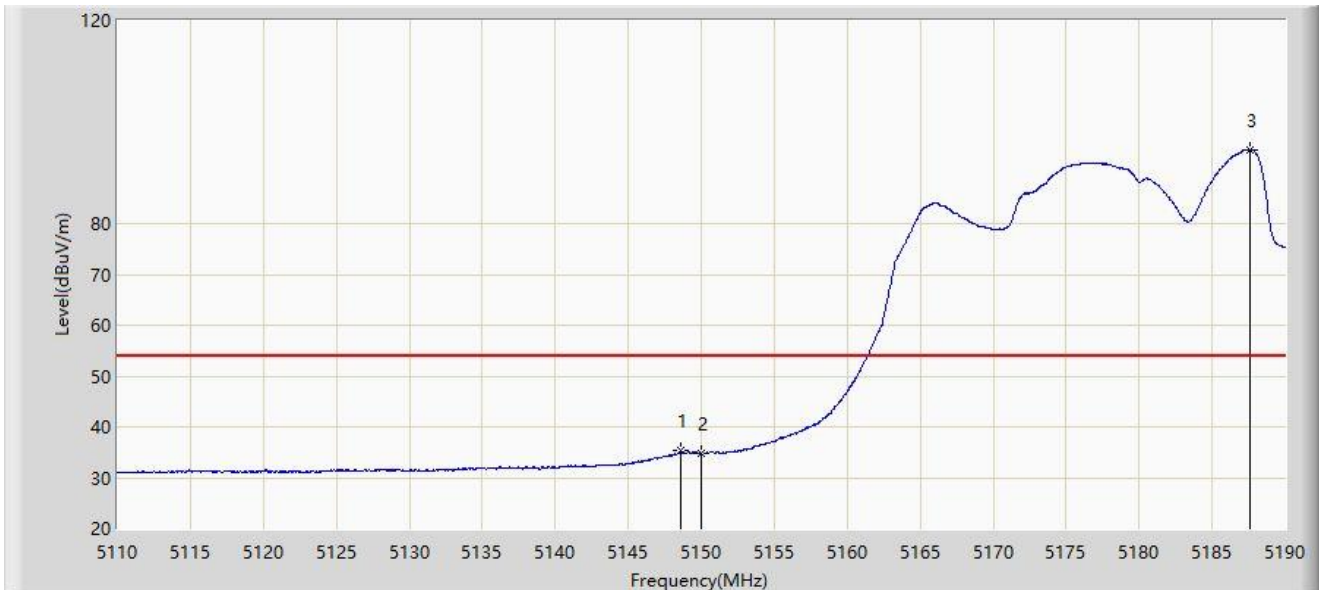


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.600	35.265	40.842	-18.735	54.000	-5.578	AV
2		5150.000	34.881	40.214	-19.119	54.000	-5.333	AV
3		5187.600	94.565	59.751	N/A	N/A	34.814	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

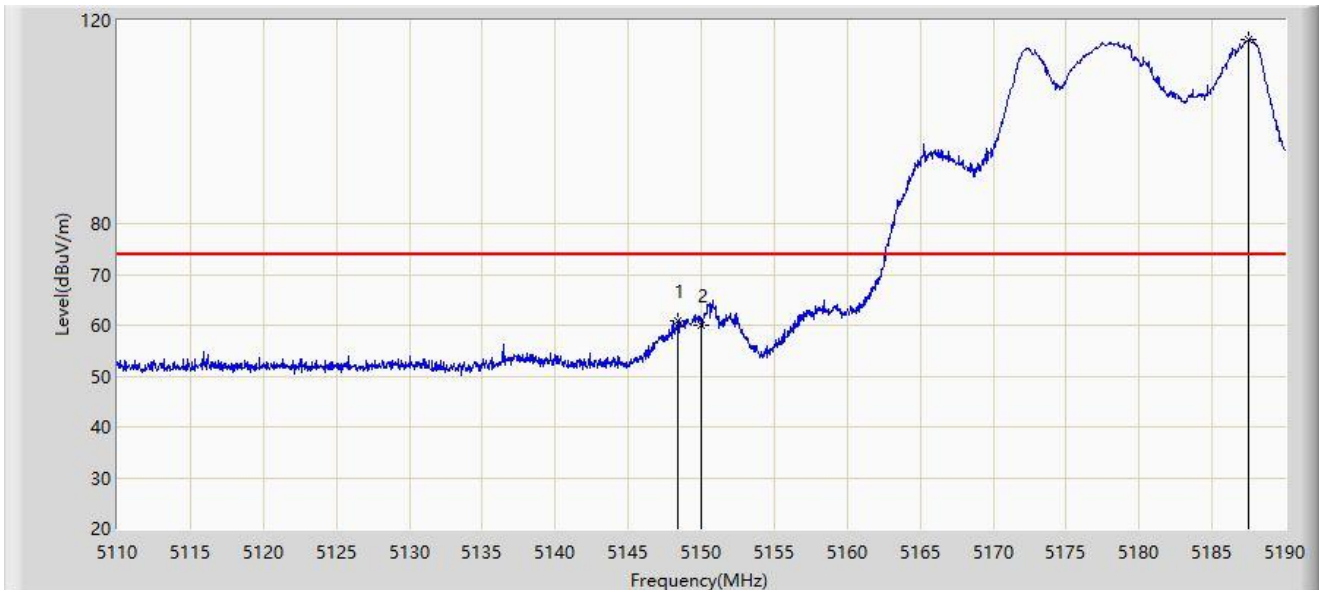


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.360	60.844	66.467	-13.156	74.000	-5.623	PK
2		5150.000	60.124	65.457	-13.876	74.000	-5.333	PK
3		5187.480	116.156	81.495	N/A	N/A	34.661	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

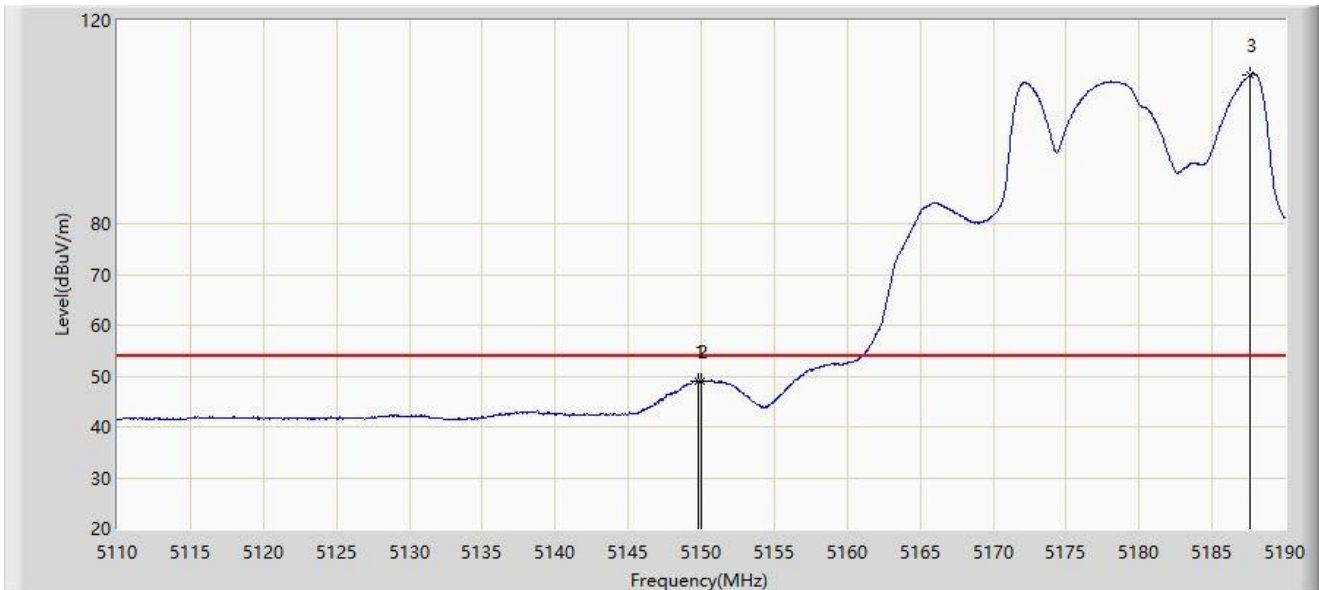


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.760	48.993	54.357	-5.007	54.000	-5.363	AV
2		5150.000	48.902	54.235	-5.098	54.000	-5.333	AV
3		5187.640	109.315	74.443	N/A	N/A	34.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

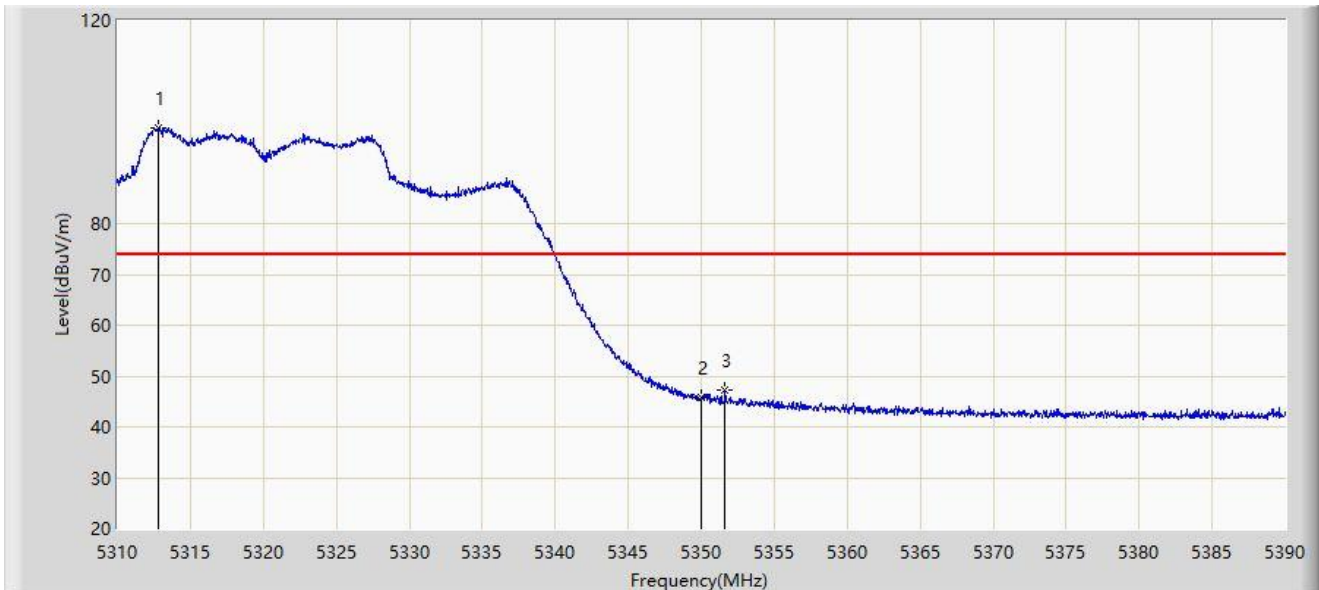


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.840	98.796	55.066	N/A	N/A	43.730	PK
2		5350.000	45.931	49.150	-28.069	74.000	-3.219	PK
3	*	5351.640	47.293	51.191	-26.707	74.000	-3.898	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

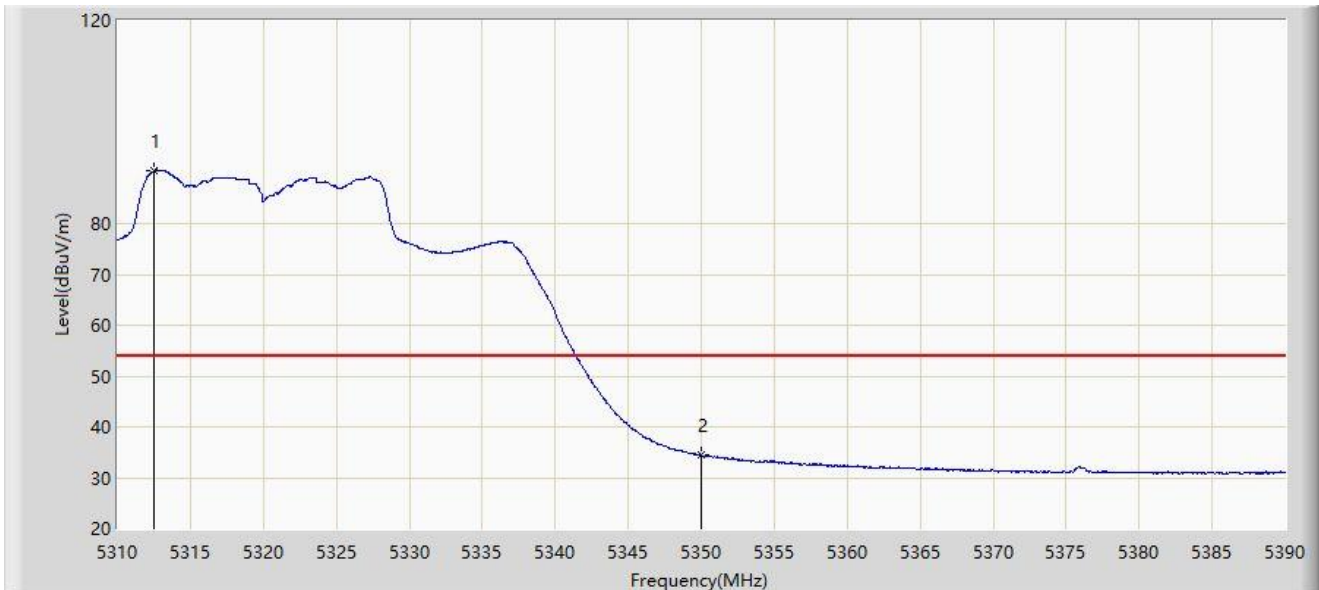


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.520	90.362	47.037	N/A	N/A	43.325	AV
2	*	5350.000	34.367	37.586	-19.633	54.000	-3.219	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

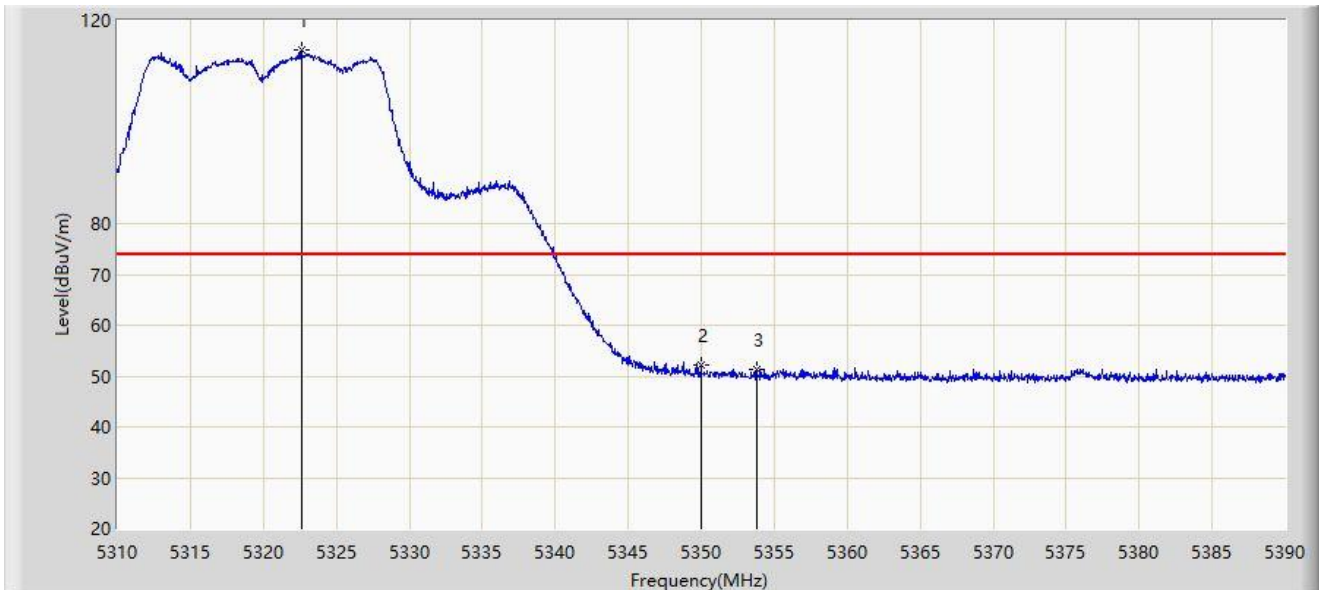


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5322.600	114.104	75.035	N/A	N/A	39.069	PK
2	*	5350.000	52.038	55.257	-21.962	74.000	-3.219	PK
3		5353.800	51.224	55.741	-22.776	74.000	-4.517	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

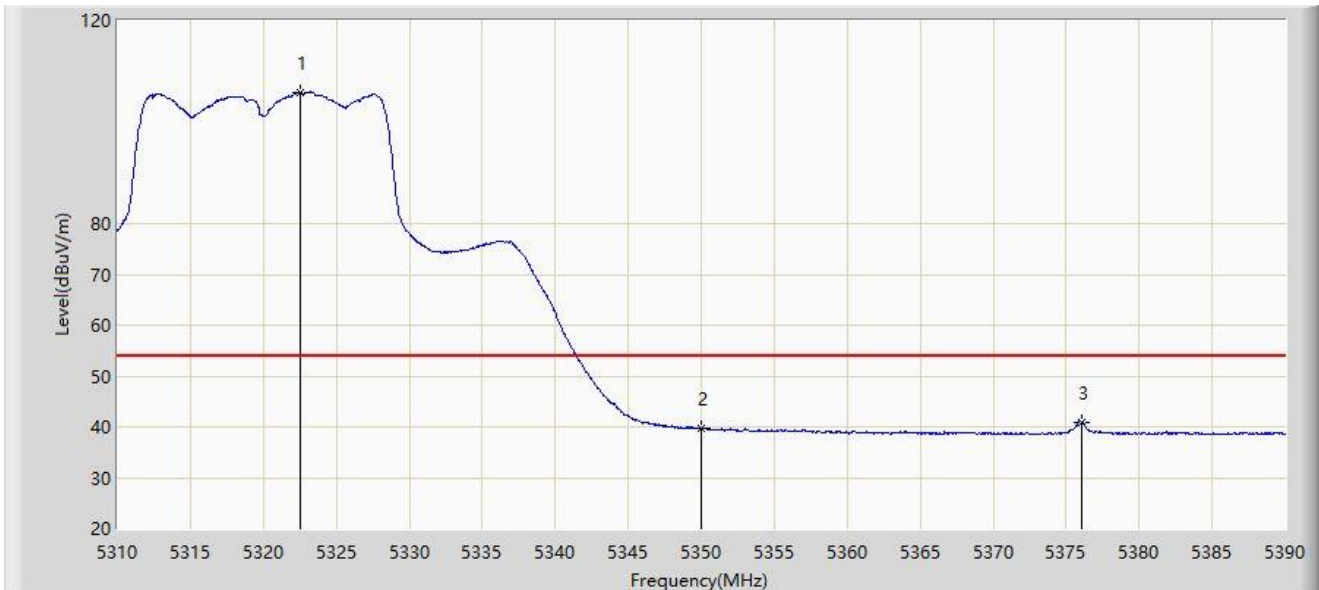


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5322.560	105.883	66.829	N/A	N/A	39.054	AV
2		5350.000	39.698	42.917	-14.302	54.000	-3.219	AV
3	*	5376.040	40.969	47.835	-13.031	54.000	-6.866	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

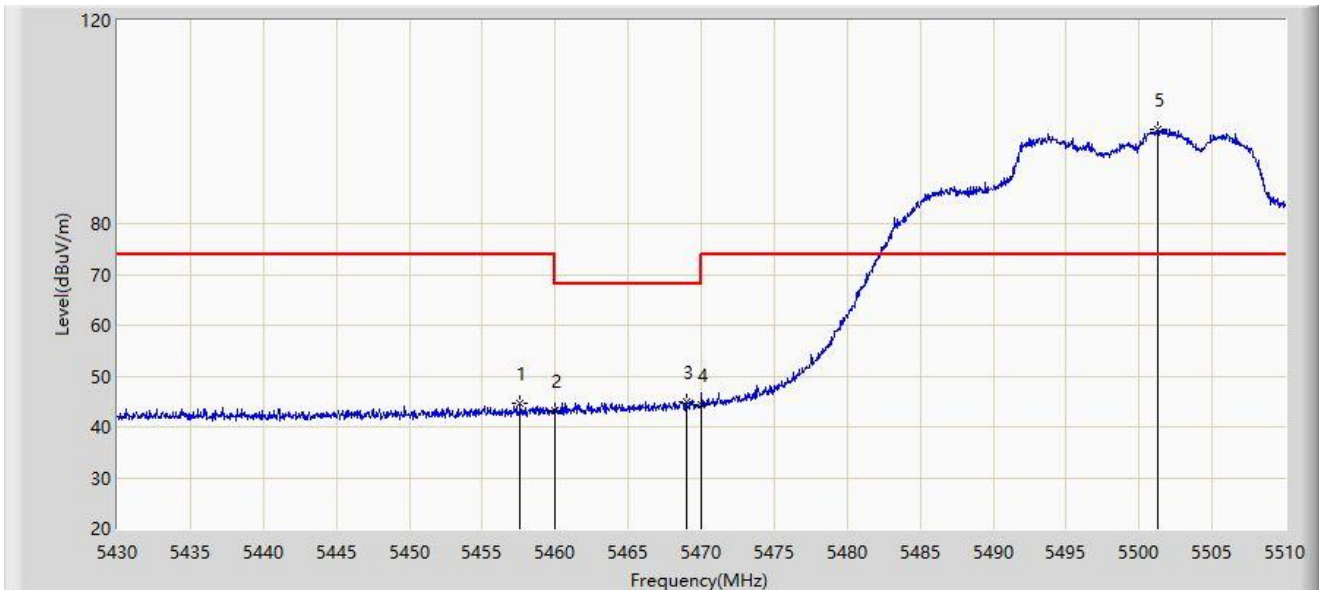


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.600	44.529	50.415	-29.471	74.000	-5.886	PK
2		5460.000	43.260	48.921	-24.940	68.200	-5.661	PK
3	*	5469.000	45.043	49.410	-23.157	68.200	-4.366	PK
4		5470.000	44.380	48.509	-23.820	68.200	-4.129	PK
5		5501.320	98.686	62.409	N/A	N/A	36.277	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

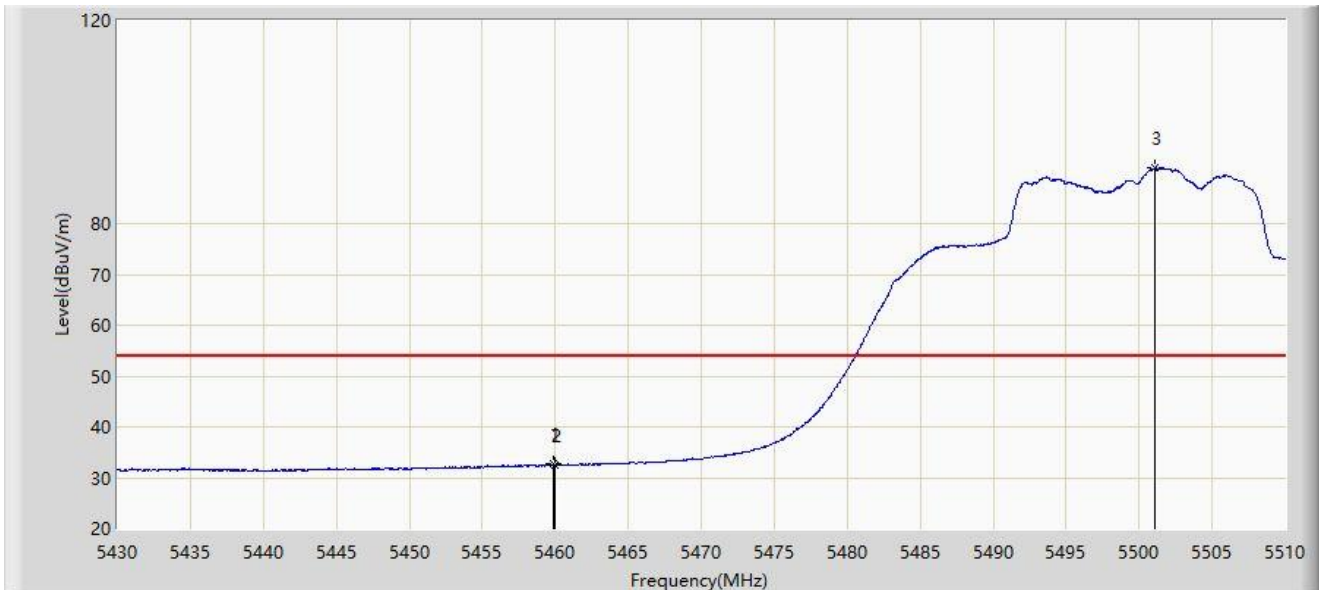


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.840	32.683	38.367	-21.317	54.000	-5.683	AV
2		5460.000	32.503	38.164	-21.497	54.000	-5.661	AV
3		5501.120	90.982	54.815	N/A	N/A	36.167	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

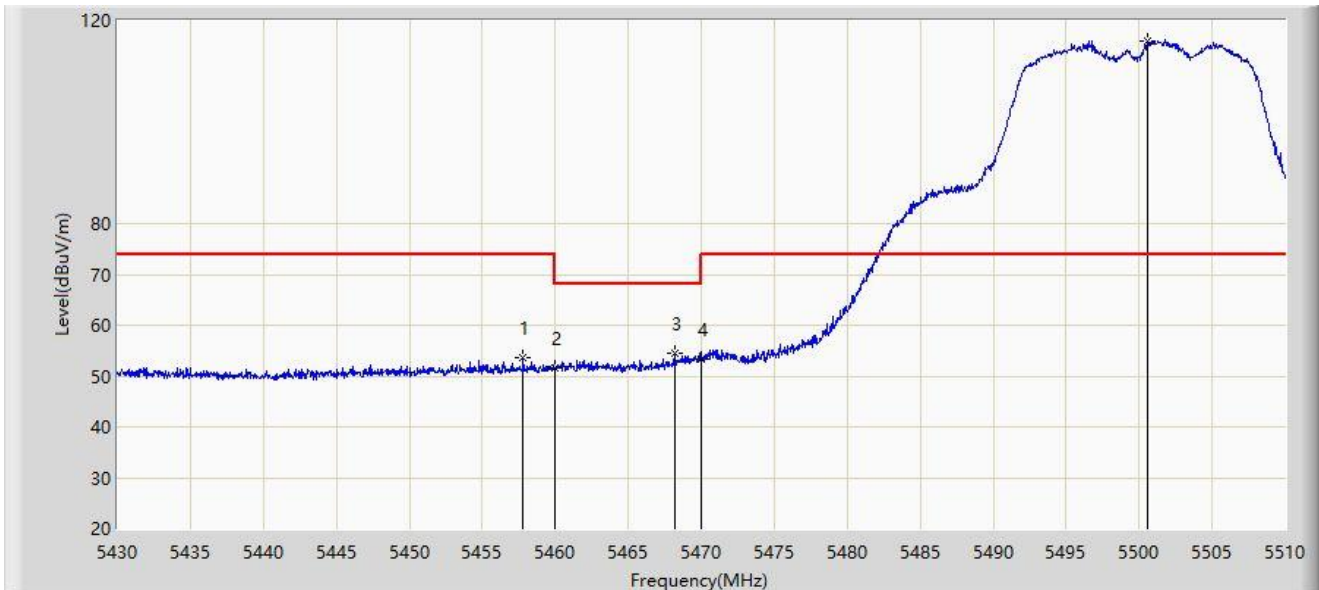


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.800	53.573	59.424	-20.427	74.000	-5.851	PK
2		5460.000	51.587	57.248	-16.613	68.200	-5.661	PK
3	*	5468.160	54.502	59.072	-13.698	68.200	-4.571	PK
4		5470.000	53.356	57.485	-14.844	68.200	-4.129	PK
5		5500.600	115.970	79.995	N/A	N/A	35.975	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

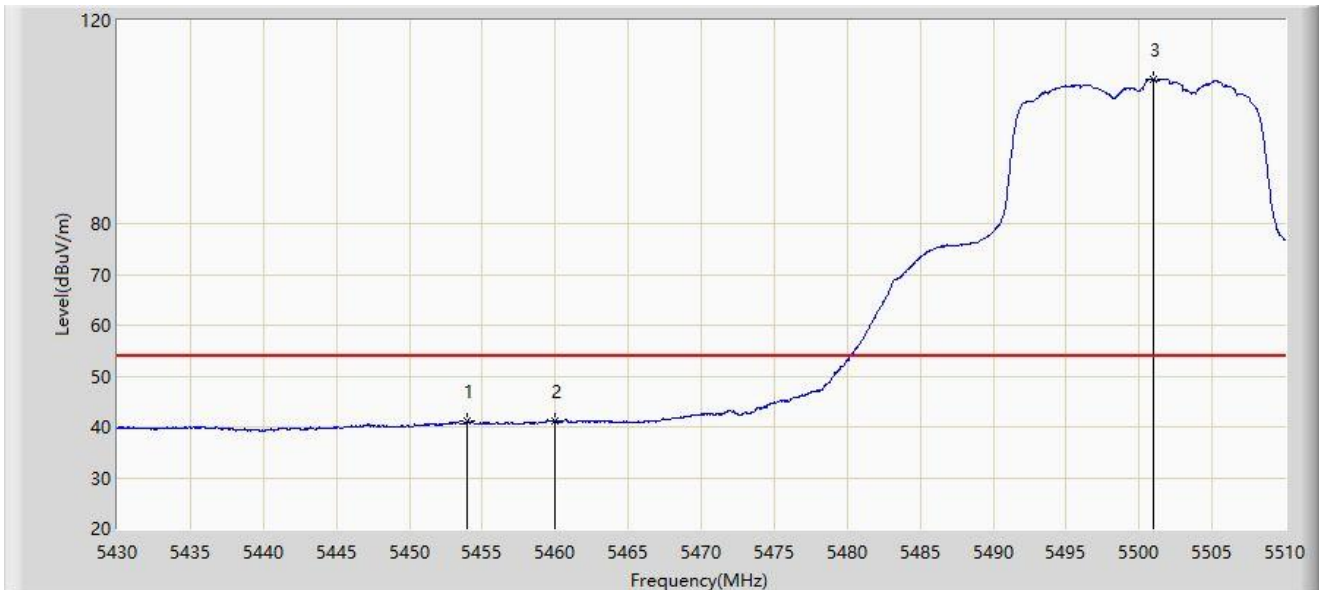


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.960	41.072	47.156	-12.928	54.000	-6.084	AV
2	*	5460.000	41.073	46.734	-12.927	54.000	-5.661	AV
3		5501.000	108.400	72.286	N/A	N/A	36.114	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

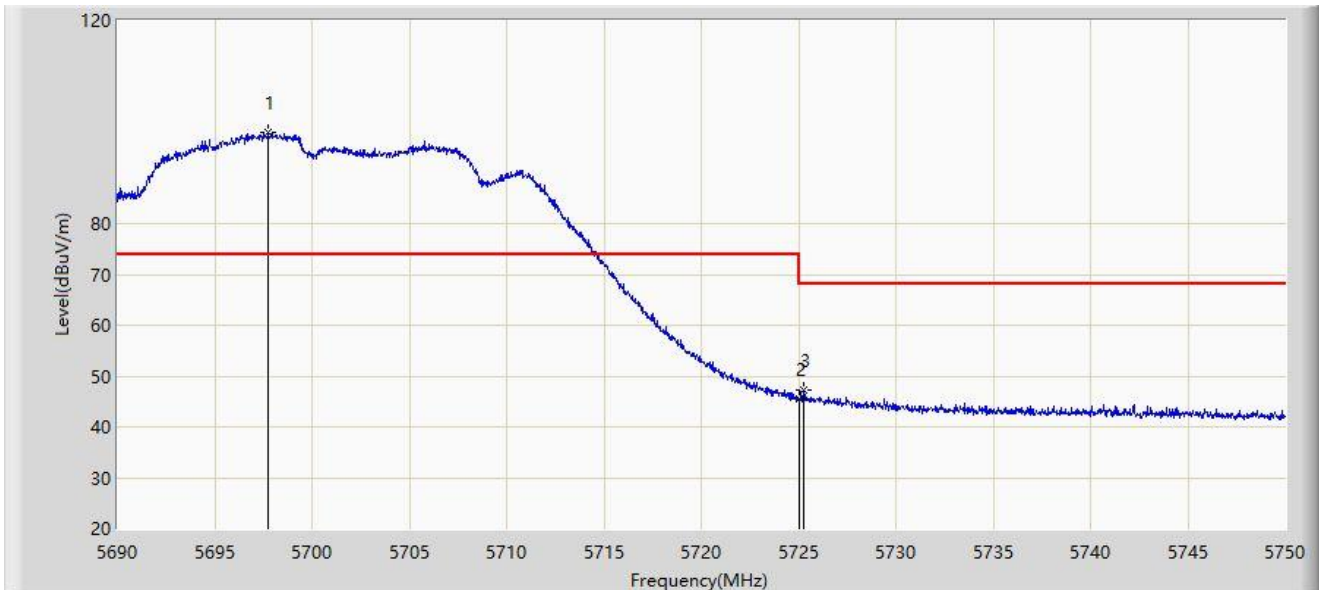


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5697.770	97.873	61.722	N/A	N/A	36.152	PK
2		5725.000	45.488	48.359	-22.712	68.200	-2.871	PK
3	*	5725.280	47.248	50.289	-20.952	68.200	-3.041	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

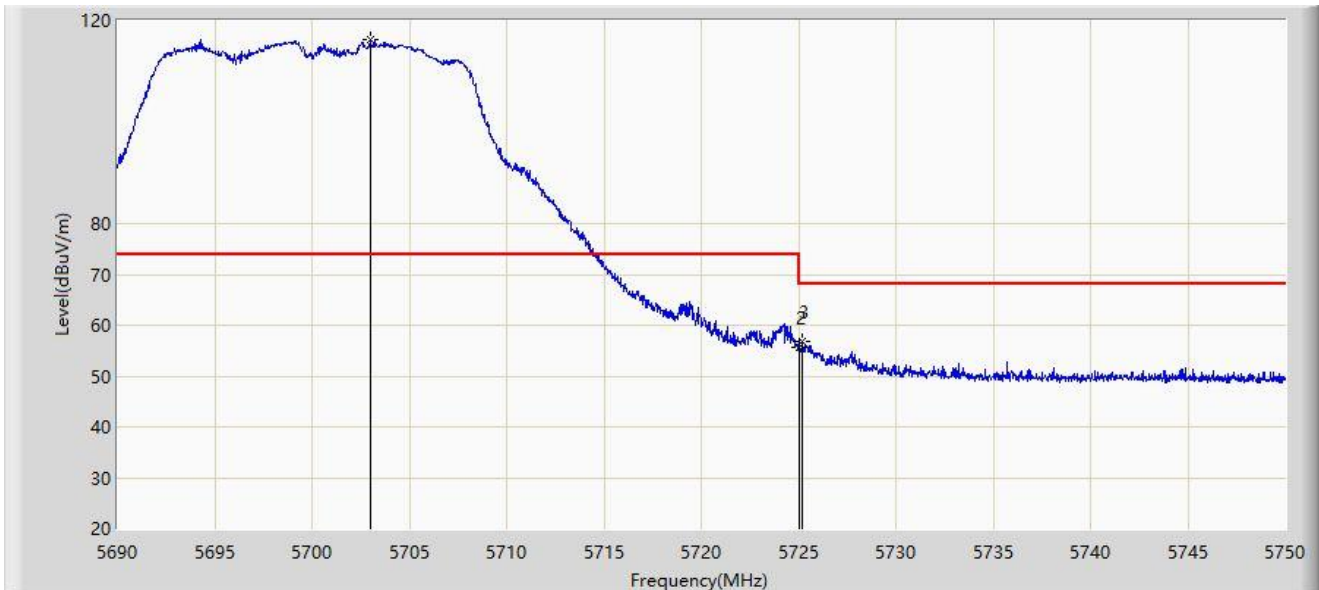


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5702.990	116.089	81.358	N/A	N/A	34.731	PK
2		5725.000	55.627	58.498	-12.573	68.200	-2.871	PK
3	*	5725.190	56.808	59.796	-11.392	68.200	-2.988	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

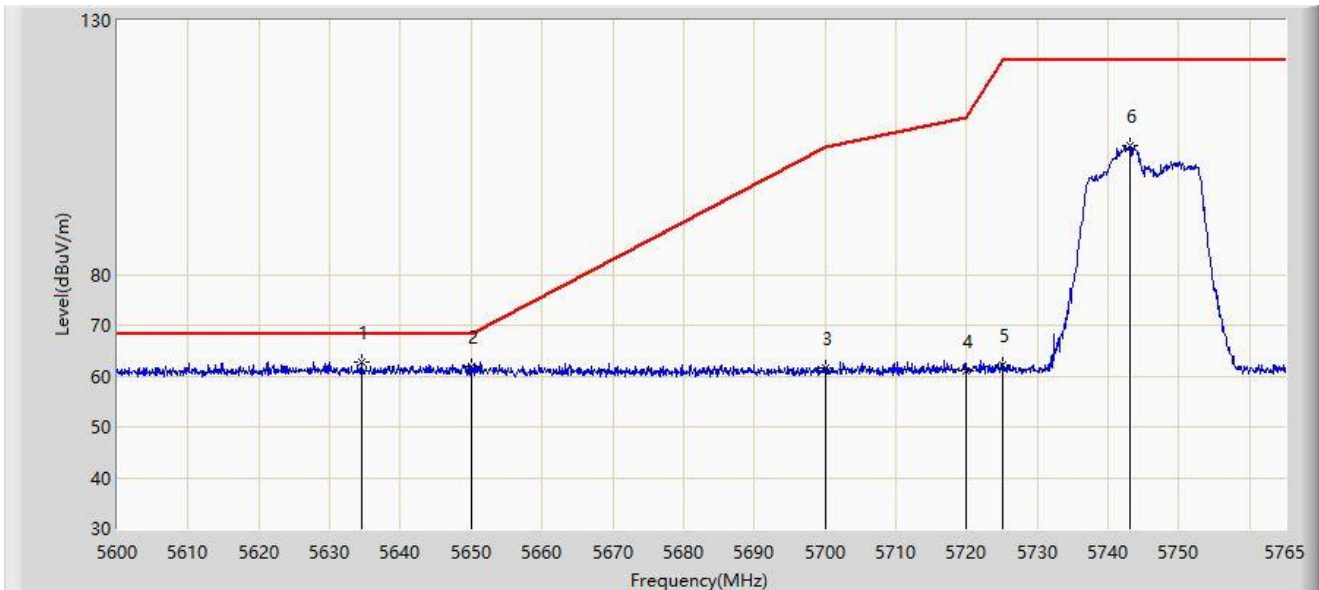


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.485	62.629	58.500	-5.571	68.200	4.130	PK
2		5650.000	61.914	57.754	-6.286	68.200	4.160	PK
3		5700.000	61.494	57.064	-43.706	105.200	4.430	PK
4		5720.000	61.055	56.405	-49.745	110.800	4.649	PK
5		5725.000	62.032	57.344	-60.168	122.200	4.688	PK
6		5743.138	105.387	100.992	N/A	N/A	4.395	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745 MHz	

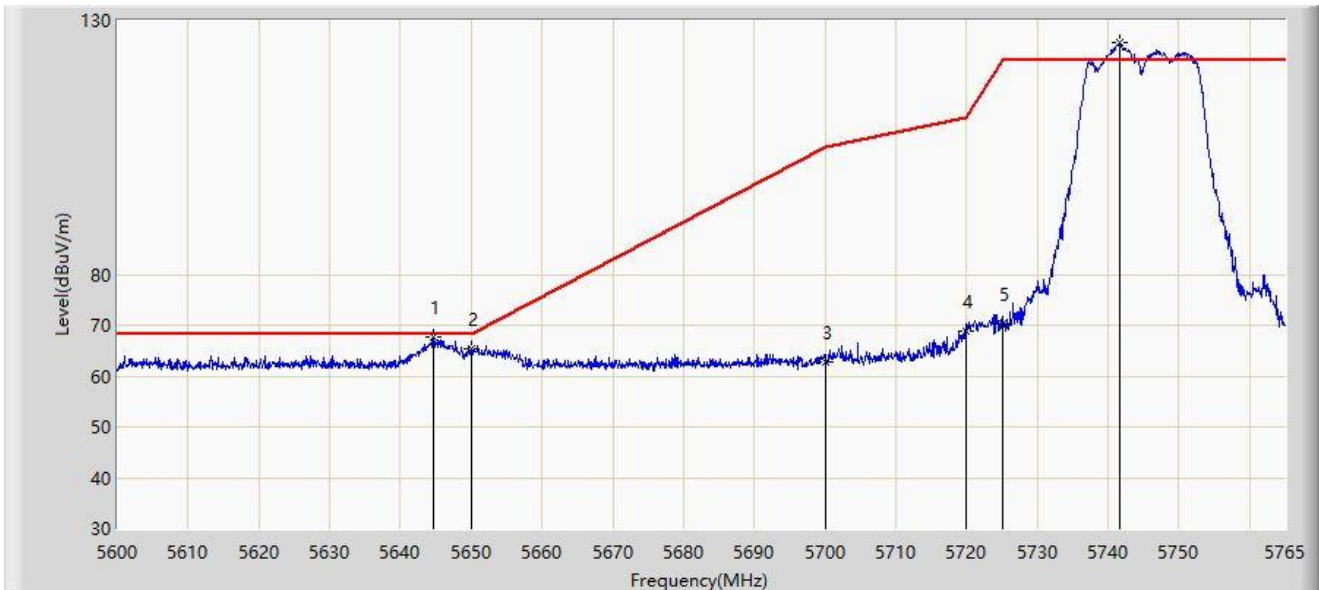


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5644.632	67.558	63.368	-0.642	68.200	4.190	PK
2		5650.000	65.440	61.280	-2.760	68.200	4.160	PK
3		5700.000	62.858	58.428	-42.342	105.200	4.430	PK
4		5720.000	68.868	64.218	-41.932	110.800	4.649	PK
5		5725.000	70.251	65.563	-51.949	122.200	4.688	PK
6		5741.570	125.614	121.193	N/A	N/A	4.421	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825 MHz	

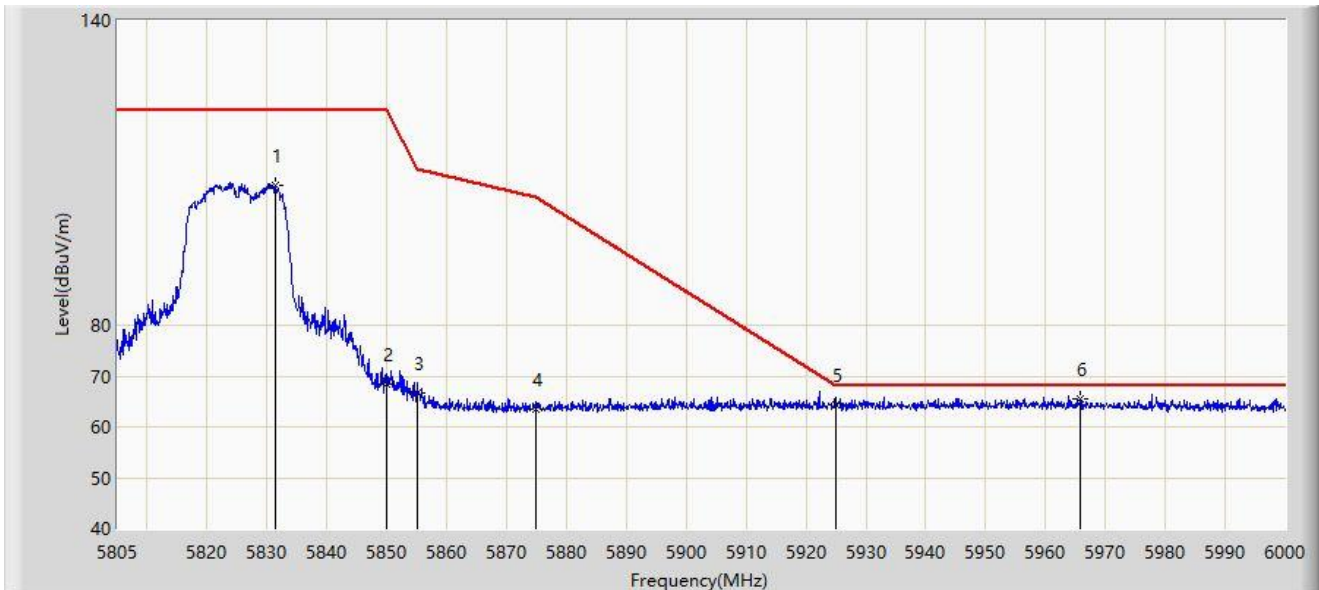


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5831.325	107.559	102.727	N/A	N/A	4.832	PK
2		5850.000	68.409	63.449	-53.791	122.200	4.960	PK
3		5855.000	66.721	61.702	-44.079	110.800	5.019	PK
4		5875.000	63.405	58.269	-41.795	105.200	5.136	PK
5		5925.000	64.246	58.976	-3.954	68.200	5.271	PK
6	*	5965.875	65.628	60.265	-2.572	68.200	5.363	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825 MHz	

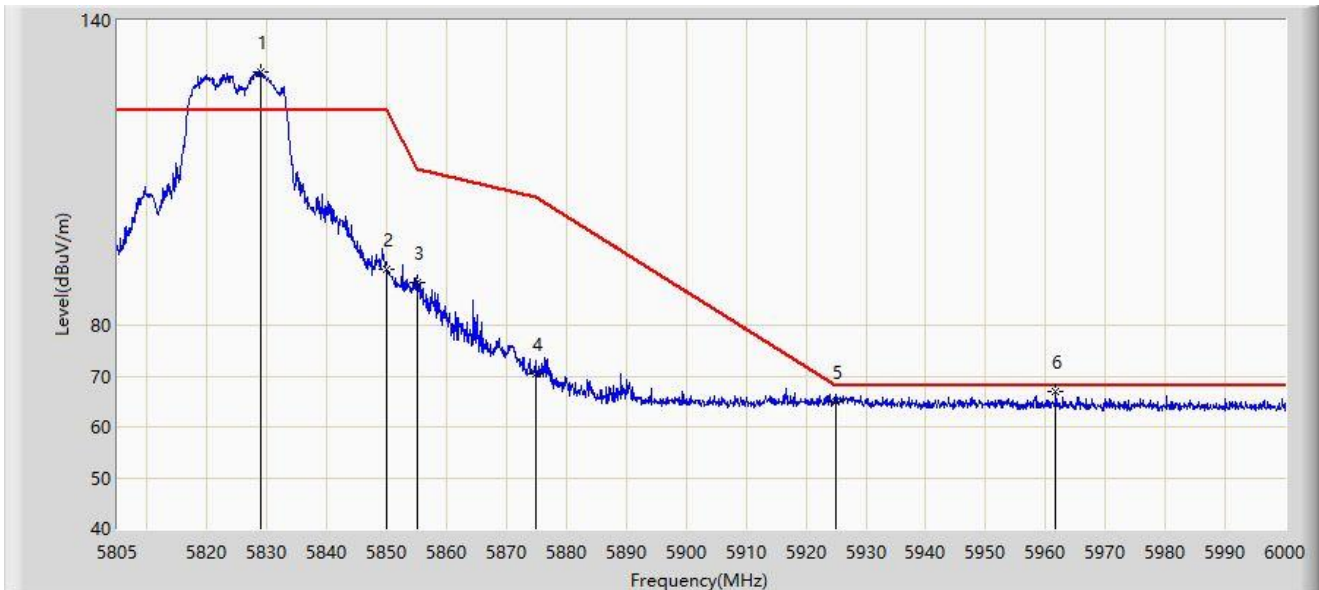


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5828.888	129.933	125.117	N/A	N/A	4.816	PK
2		5850.000	90.930	85.970	-31.270	122.200	4.960	PK
3		5855.000	88.525	83.506	-22.275	110.800	5.019	PK
4		5875.000	70.492	65.356	-34.708	105.200	5.136	PK
5		5925.000	65.054	59.784	-3.146	68.200	5.271	PK
6	*	5961.683	66.907	61.504	-1.293	68.200	5.402	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

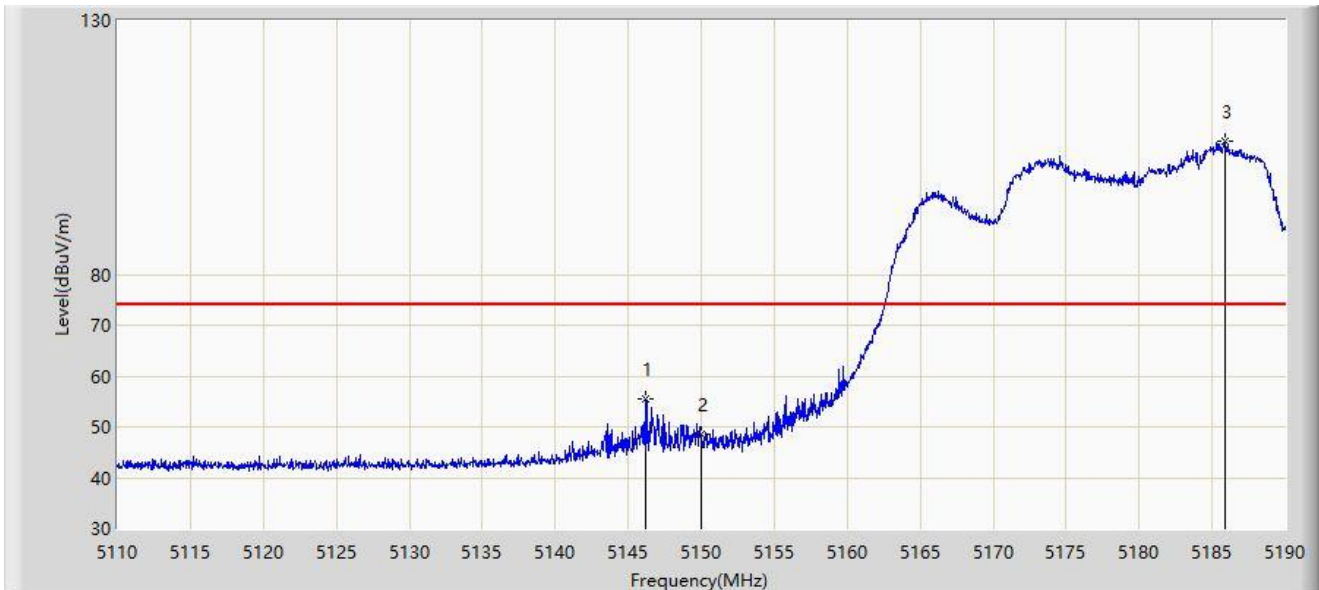


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.240	55.369	61.300	-18.631	74.000	-5.932	PK
2		5150.000	48.655	53.988	-25.345	74.000	-5.333	PK
3		5185.840	106.139	72.920	N/A	N/A	33.218	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

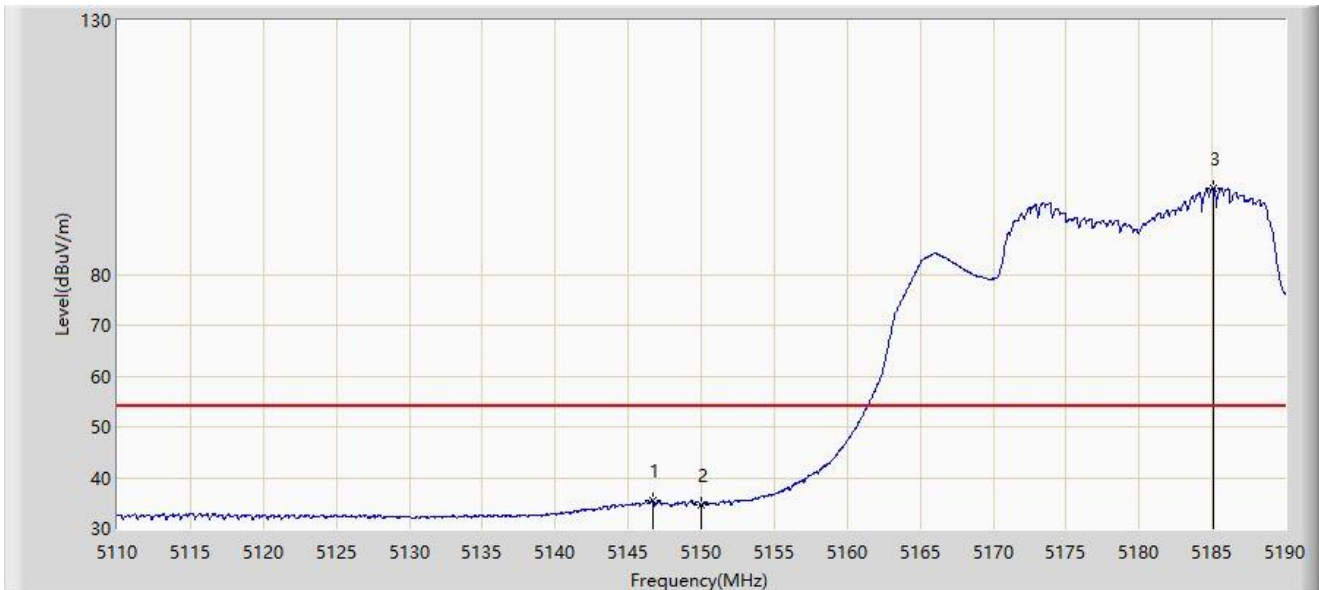


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.680	35.444	41.341	-18.556	54.000	-5.897	AV
2		5150.000	34.620	39.953	-19.380	54.000	-5.333	AV
3		5185.120	97.072	63.915	N/A	N/A	33.157	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

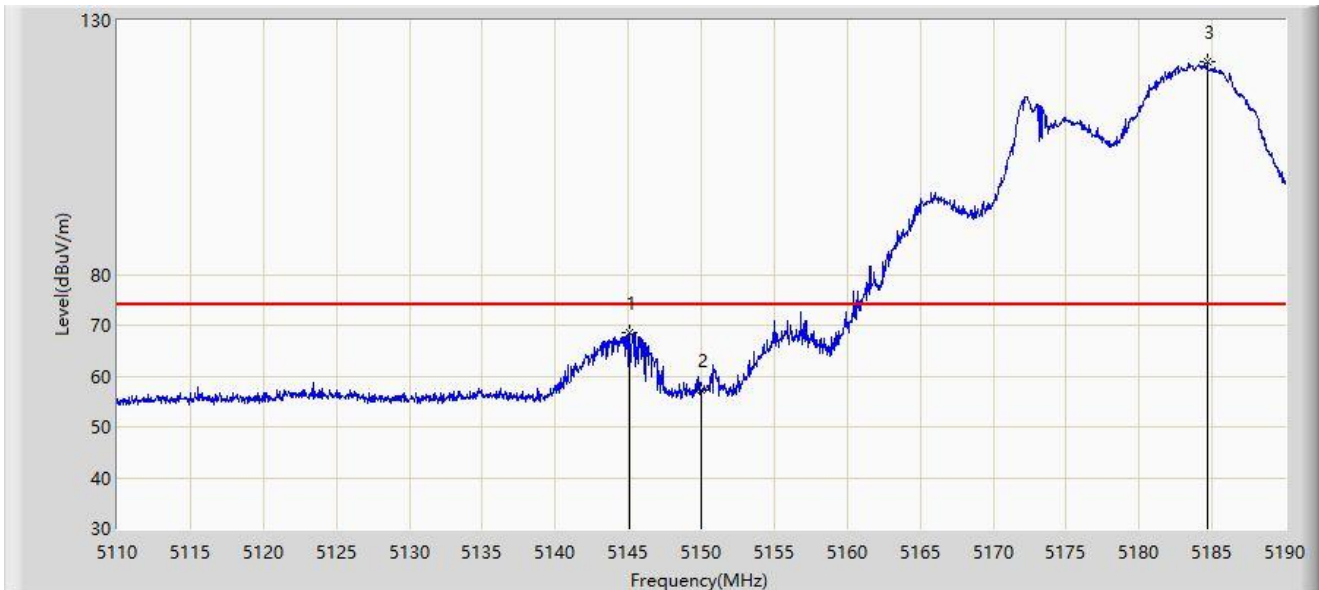


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.040	68.555	74.641	-5.445	74.000	-6.085	PK
2		5150.000	57.227	62.560	-16.773	74.000	-5.333	PK
3		5184.640	121.939	88.658	N/A	N/A	33.281	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

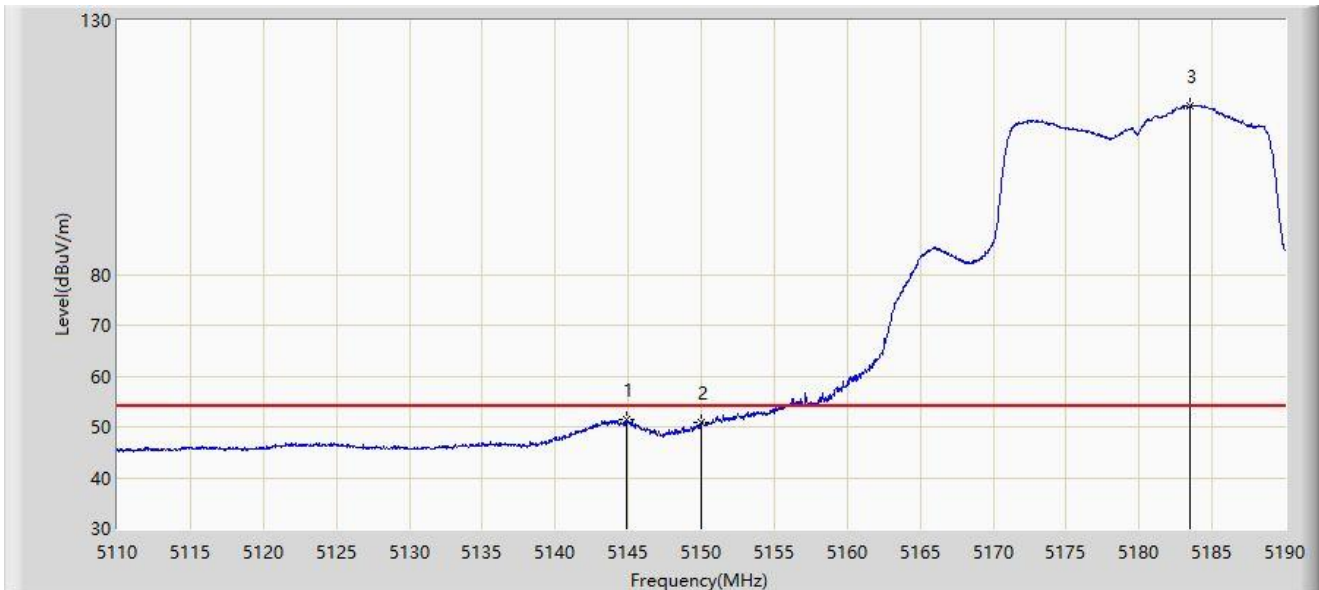


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.840	51.307	57.427	-2.693	54.000	-6.120	AV
2		5150.000	50.923	56.256	-3.077	54.000	-5.333	AV
3		5183.480	113.237	79.016	N/A	N/A	34.221	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

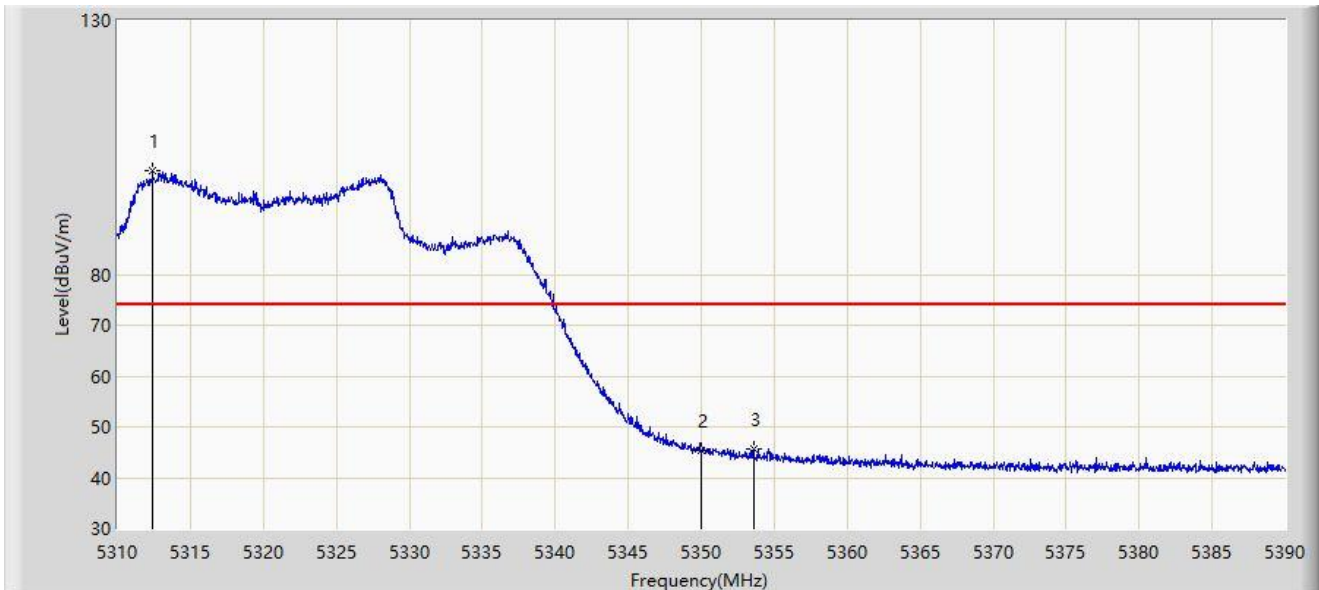


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.400	100.492	57.366	N/A	N/A	43.126	PK
2		5350.000	45.461	48.680	-28.539	74.000	-3.219	PK
3	*	5353.560	45.778	50.234	-28.222	74.000	-4.456	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

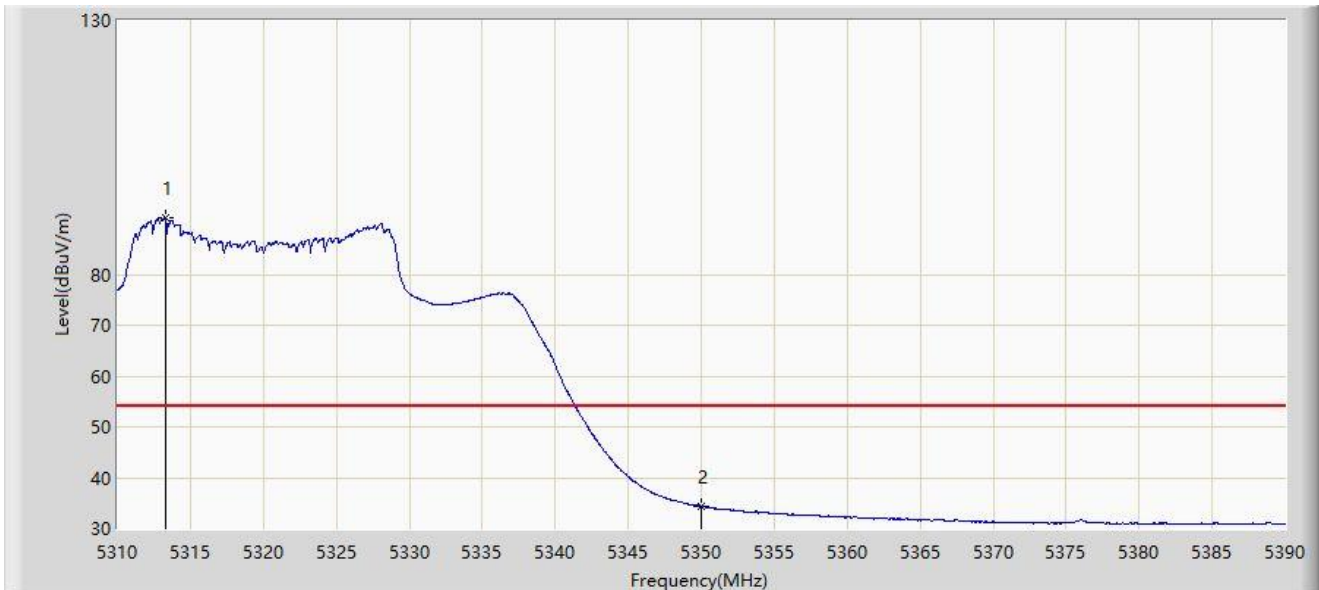


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5313.320	91.178	47.080	N/A	N/A	44.097	AV
2	*	5350.000	34.333	37.552	-19.667	54.000	-3.219	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

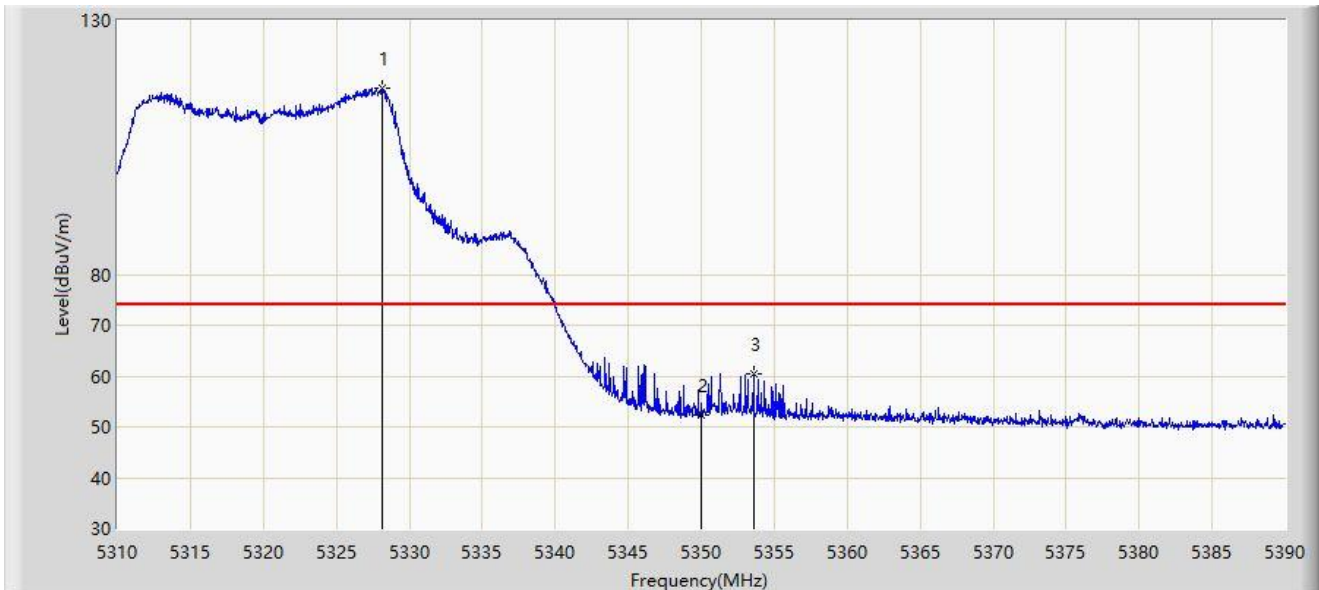


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5328.160	116.729	77.319	N/A	N/A	39.410	PK
2		5350.000	52.379	55.598	-21.621	74.000	-3.219	PK
3	*	5353.560	60.371	64.827	-13.629	74.000	-4.456	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

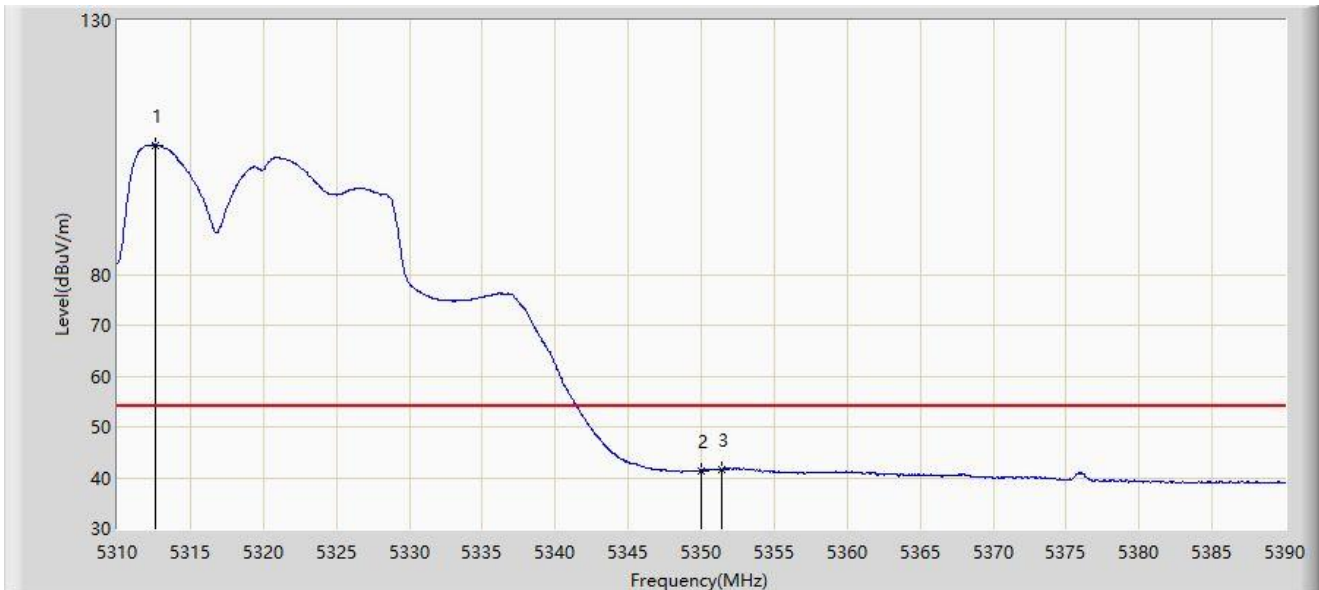


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.560	105.430	62.039	N/A	N/A	43.391	AV
2		5350.000	41.392	44.611	-12.608	54.000	-3.219	AV
3	*	5351.400	41.646	45.478	-12.354	54.000	-3.832	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

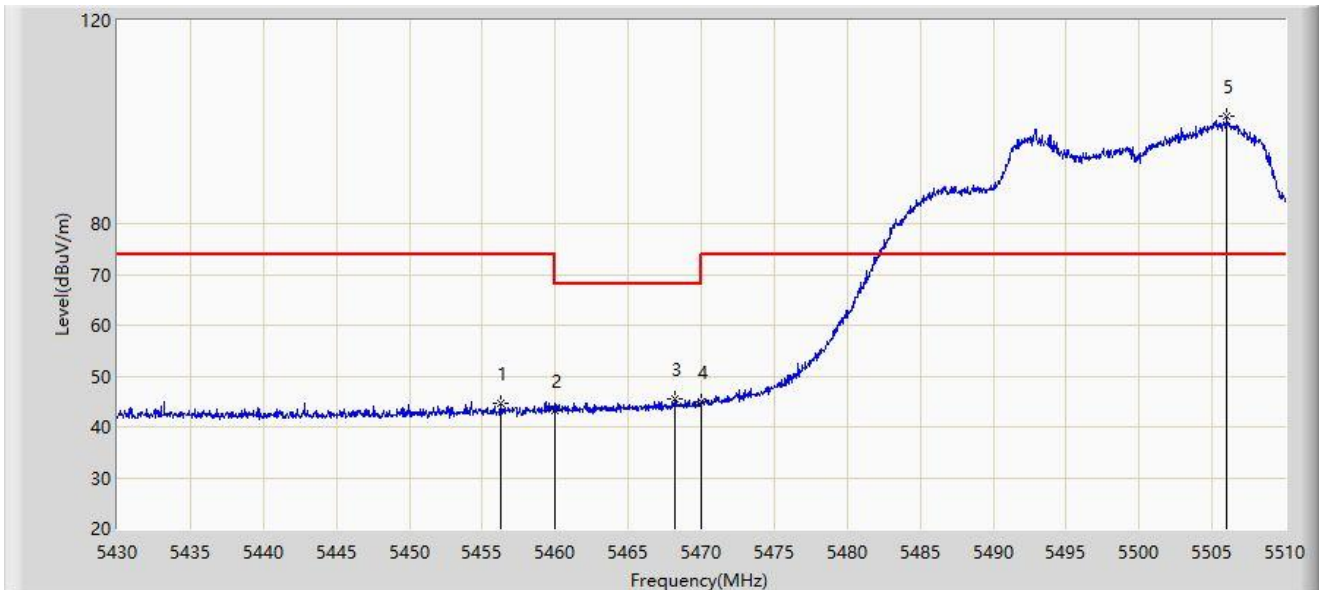


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.240	44.782	50.758	-29.218	74.000	-5.977	PK
2		5460.000	43.093	48.754	-25.107	68.200	-5.661	PK
3	*	5468.240	45.518	50.077	-22.682	68.200	-4.559	PK
4		5470.000	44.928	49.057	-23.272	68.200	-4.129	PK
5		5506.040	101.094	61.144	N/A	N/A	39.950	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

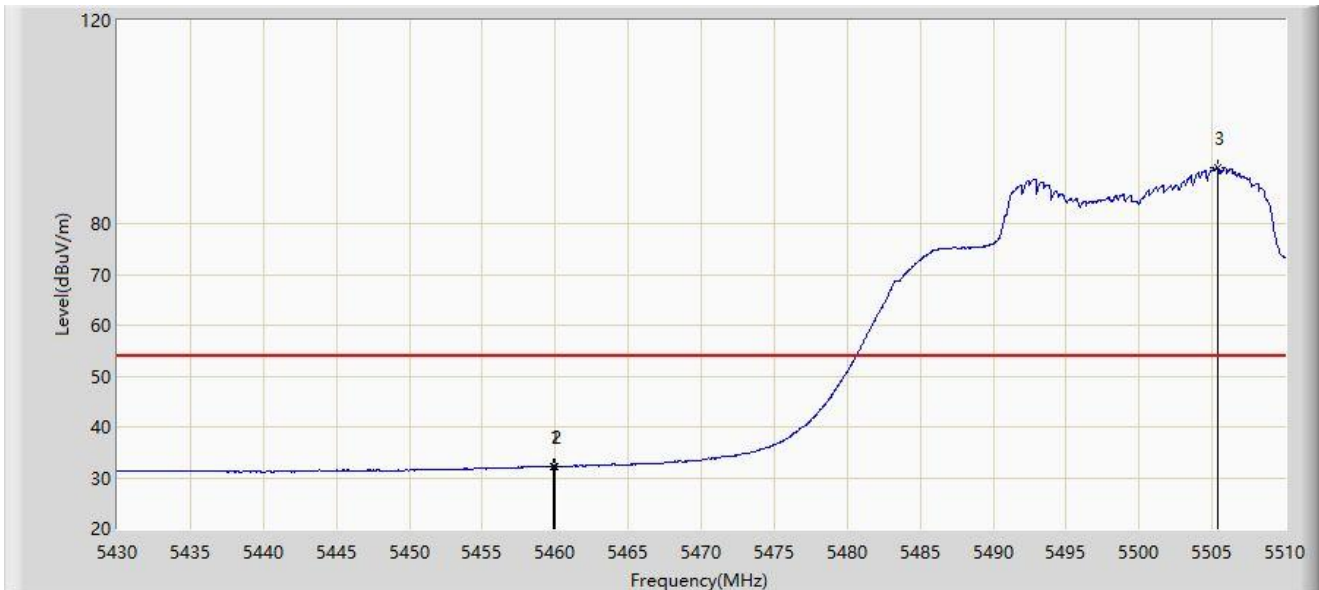


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.880	32.253	37.931	-21.747	54.000	-5.678	AV
2		5460.000	32.149	37.810	-21.851	54.000	-5.661	AV
3		5505.360	90.982	50.499	N/A	N/A	40.483	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

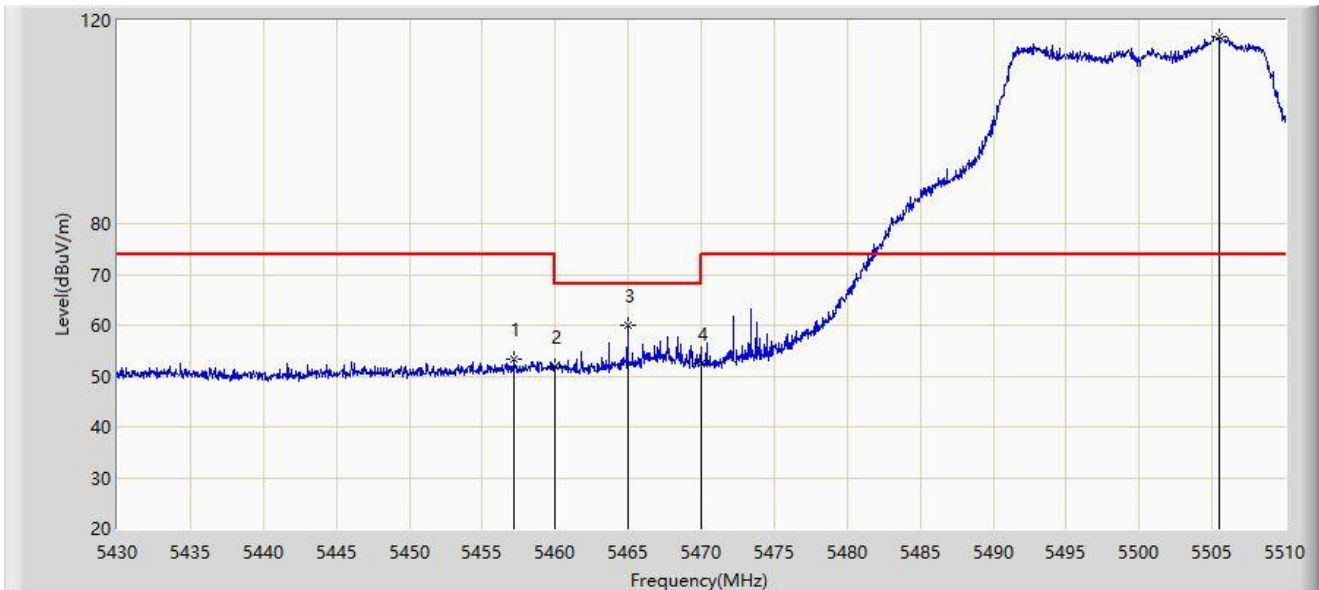


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.160	53.198	59.091	-20.802	74.000	-5.893	PK
2		5460.000	51.822	57.483	-16.378	68.200	-5.661	PK
3	*	5464.960	59.947	65.087	-8.253	68.200	-5.140	PK
4		5470.000	52.445	56.574	-15.755	68.200	-4.129	PK
5		5505.480	116.748	76.321	N/A	N/A	40.427	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

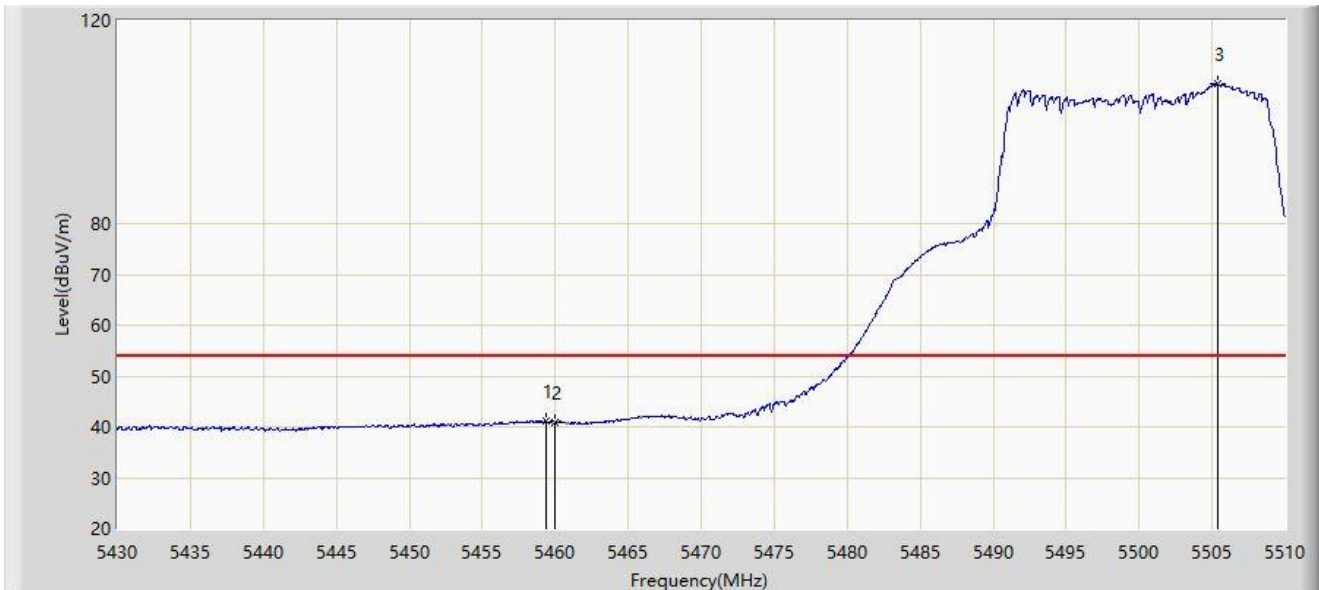


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.360	41.127	46.863	-12.873	54.000	-5.736	AV
2		5460.000	40.810	46.471	-13.190	54.000	-5.661	AV
3		5505.360	107.424	66.941	N/A	N/A	40.483	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

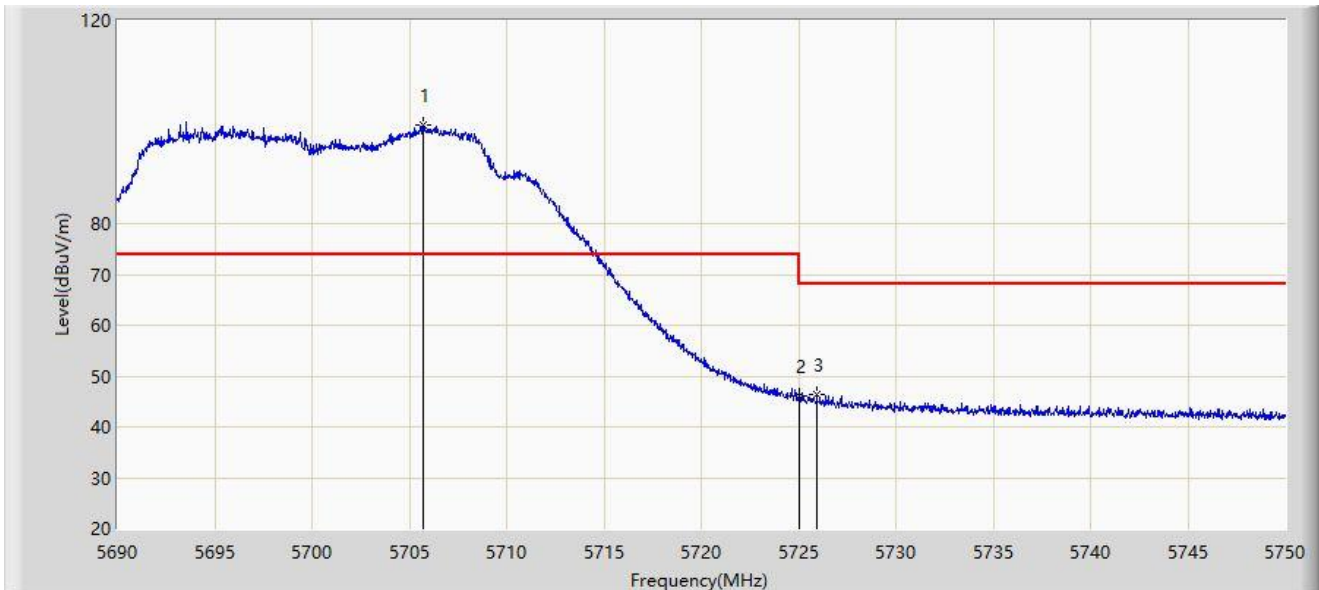


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5705.750	99.375	63.376	N/A	N/A	35.999	PK
2		5725.000	46.132	49.003	-22.068	68.200	-2.871	PK
3	*	5725.940	46.283	49.719	-21.917	68.200	-3.436	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

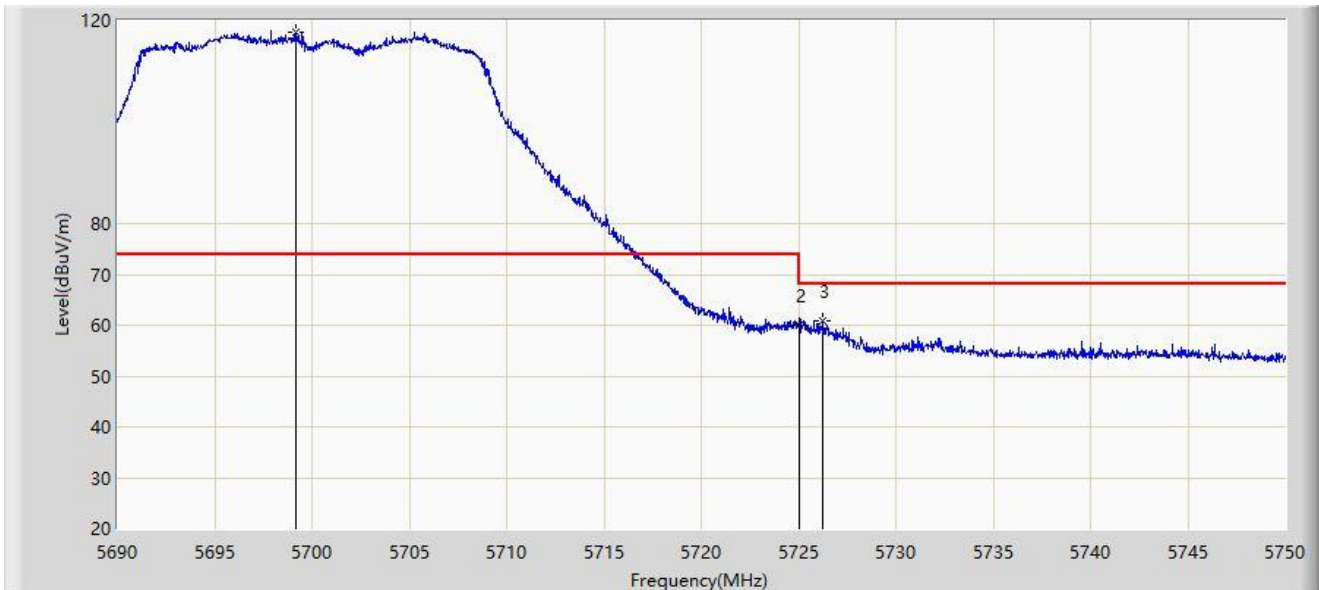


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5699.150	117.683	83.063	N/A	N/A	34.621	PK
2		5725.000	59.875	62.746	-8.325	68.200	-2.871	PK
3	*	5726.270	60.898	64.484	-7.302	68.200	-3.585	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745 MHz	

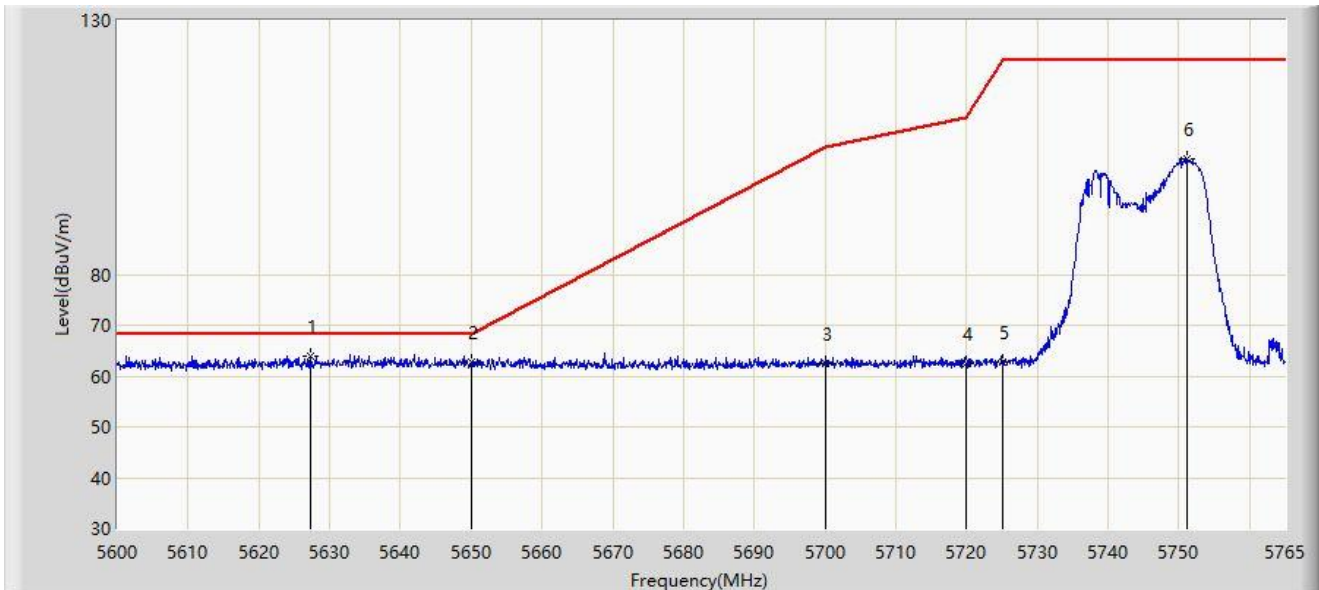


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5627.225	64.012	59.968	-4.188	68.200	4.045	PK
2		5650.000	62.738	58.578	-5.462	68.200	4.160	PK
3		5700.000	62.384	57.954	-42.816	105.200	4.430	PK
4		5720.000	62.446	57.796	-48.354	110.800	4.649	PK
5		5725.000	62.810	58.122	-59.390	122.200	4.688	PK
6		5751.223	102.830	98.354	N/A	N/A	4.477	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745 MHz	

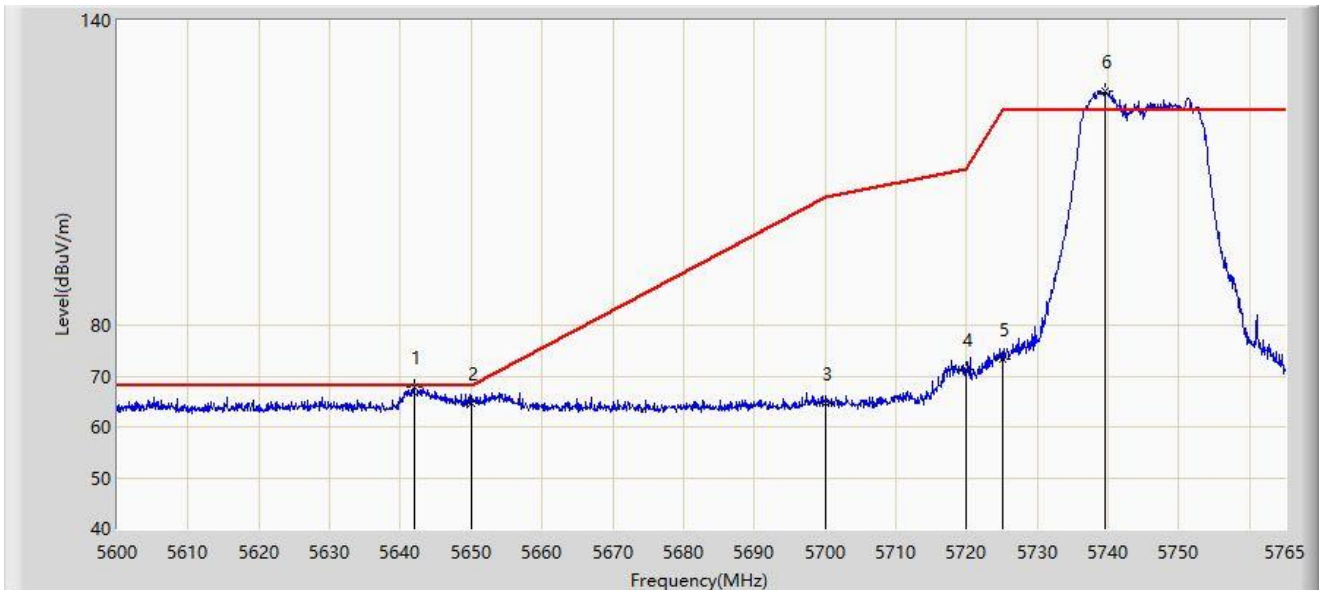


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5641.993	67.971	63.766	-0.229	68.200	4.206	PK
2		5650.000	64.597	60.437	-3.603	68.200	4.160	PK
3		5700.000	64.744	60.314	-40.456	105.200	4.430	PK
4		5720.000	71.436	66.786	-39.364	110.800	4.649	PK
5		5725.000	73.322	68.634	-48.878	122.200	4.688	PK
6		5739.507	126.125	121.667	N/A	N/A	4.458	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825 MHz	

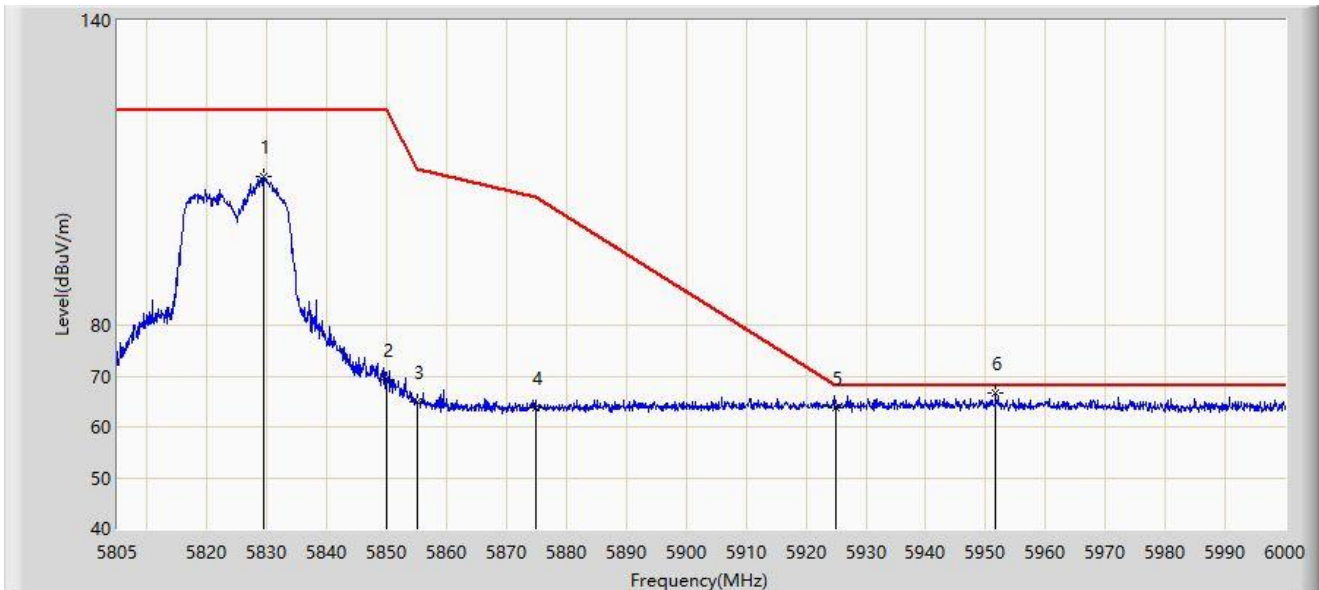


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5829.375	109.156	104.337	N/A	N/A	4.819	PK
2		5850.000	69.295	64.335	-52.905	122.200	4.960	PK
3		5855.000	64.834	59.815	-45.966	110.800	5.019	PK
4		5875.000	63.743	58.607	-41.457	105.200	5.136	PK
5		5925.000	63.875	58.605	-4.325	68.200	5.271	PK
6	*	5951.640	66.657	61.266	-1.543	68.200	5.391	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825 MHz	

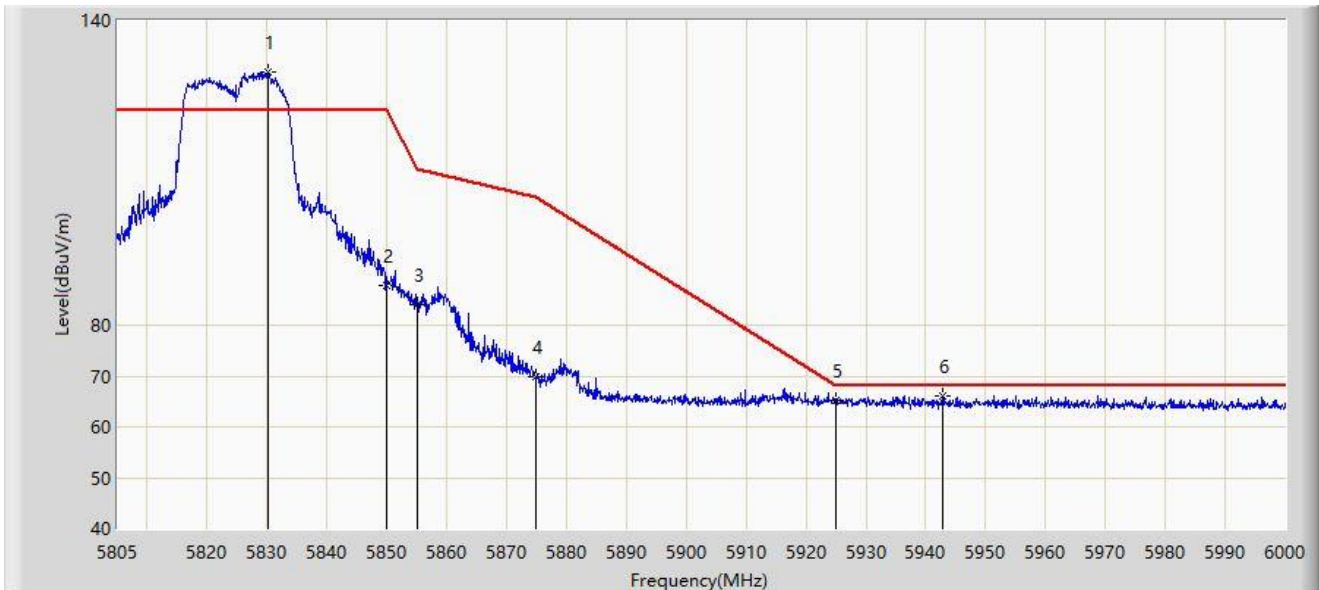


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5830.155	129.978	125.153	N/A	N/A	4.824	PK
2		5850.000	87.685	82.725	-34.515	122.200	4.960	PK
3		5855.000	84.080	79.061	-26.720	110.800	5.019	PK
4		5875.000	69.764	64.628	-35.436	105.200	5.136	PK
5		5925.000	65.337	60.067	-2.863	68.200	5.271	PK
6	*	5942.768	66.038	60.706	-2.162	68.200	5.332	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

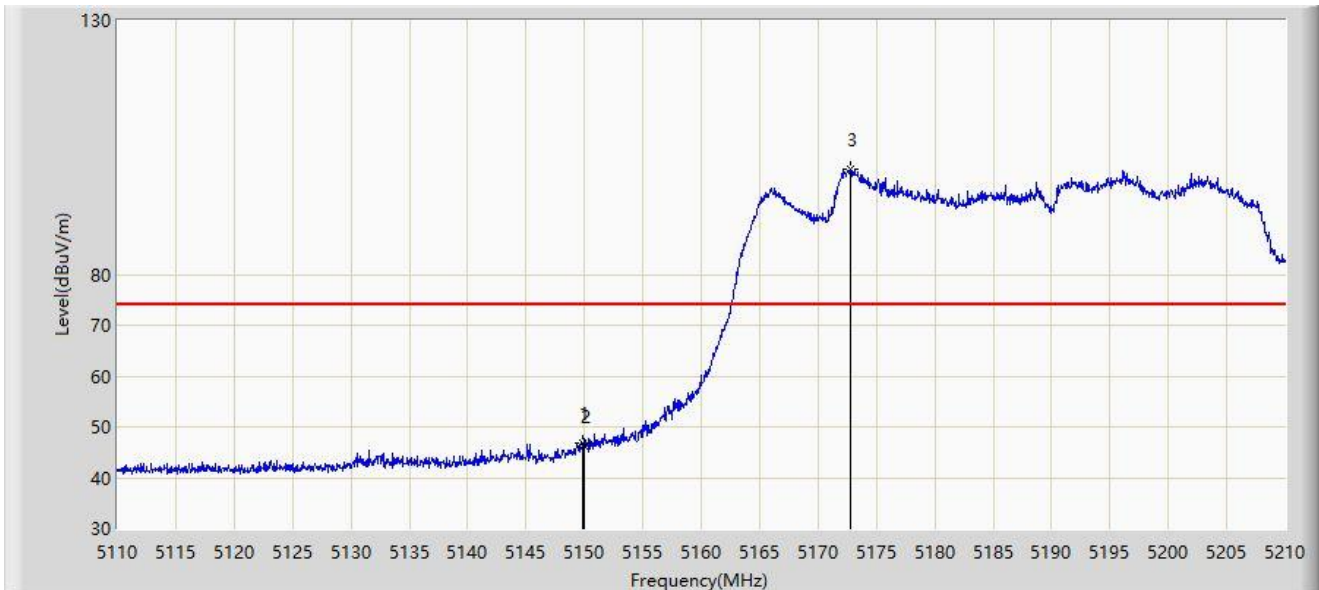


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.850	46.742	46.828	-27.258	74.000	-0.086	PK
2		5150.000	46.170	46.232	-27.830	74.000	-0.062	PK
3		5172.800	100.623	51.446	N/A	N/A	49.177	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

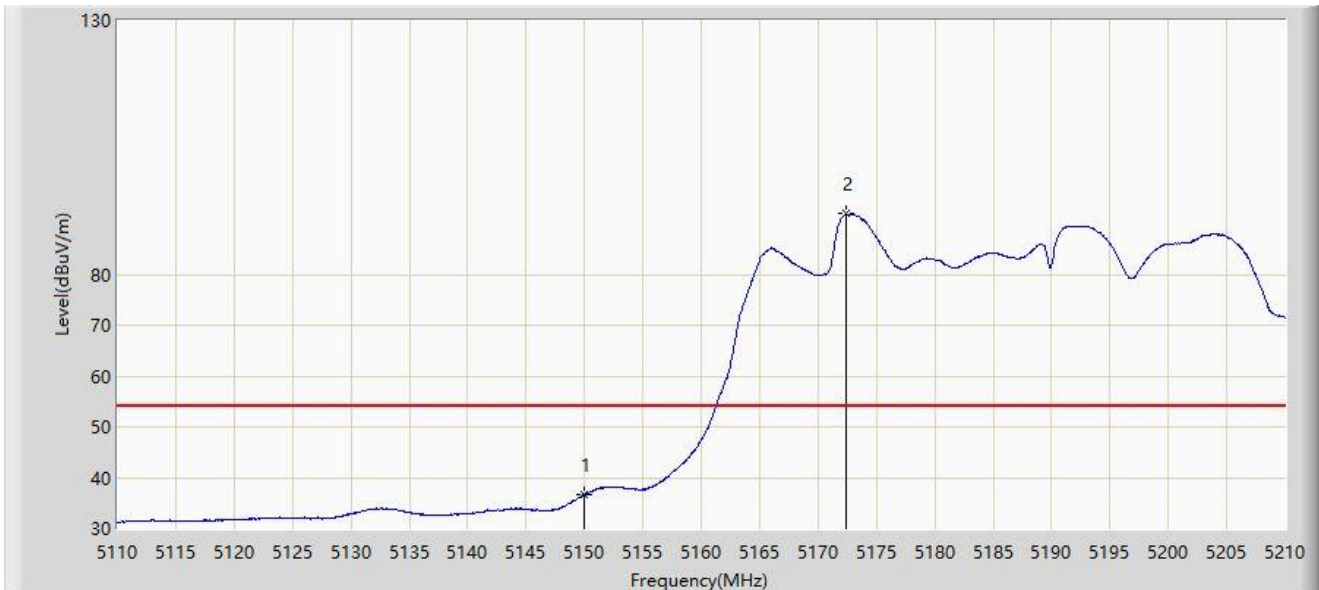


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	36.726	36.788	-17.274	54.000	-0.062	AV
2		5172.350	91.904	43.220	N/A	N/A	48.684	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

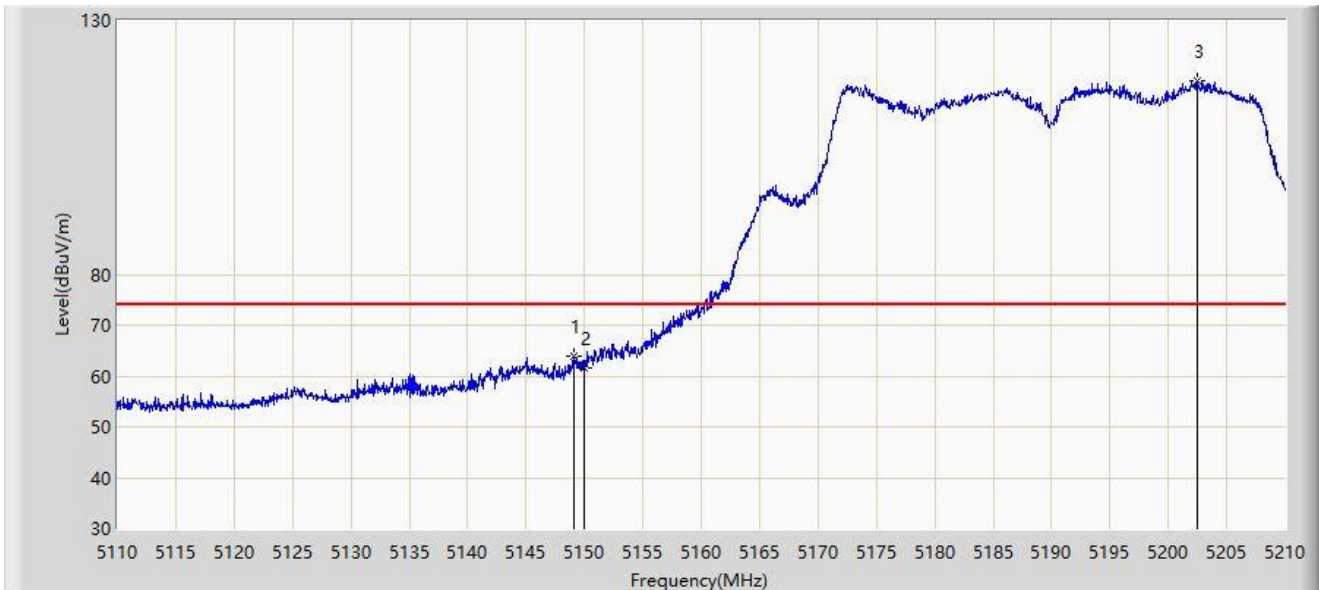


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.150	63.845	64.073	-10.155	74.000	-0.229	PK
2		5150.000	61.739	61.801	-12.261	74.000	-0.062	PK
3		5202.500	118.131	72.926	N/A	N/A	45.205	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

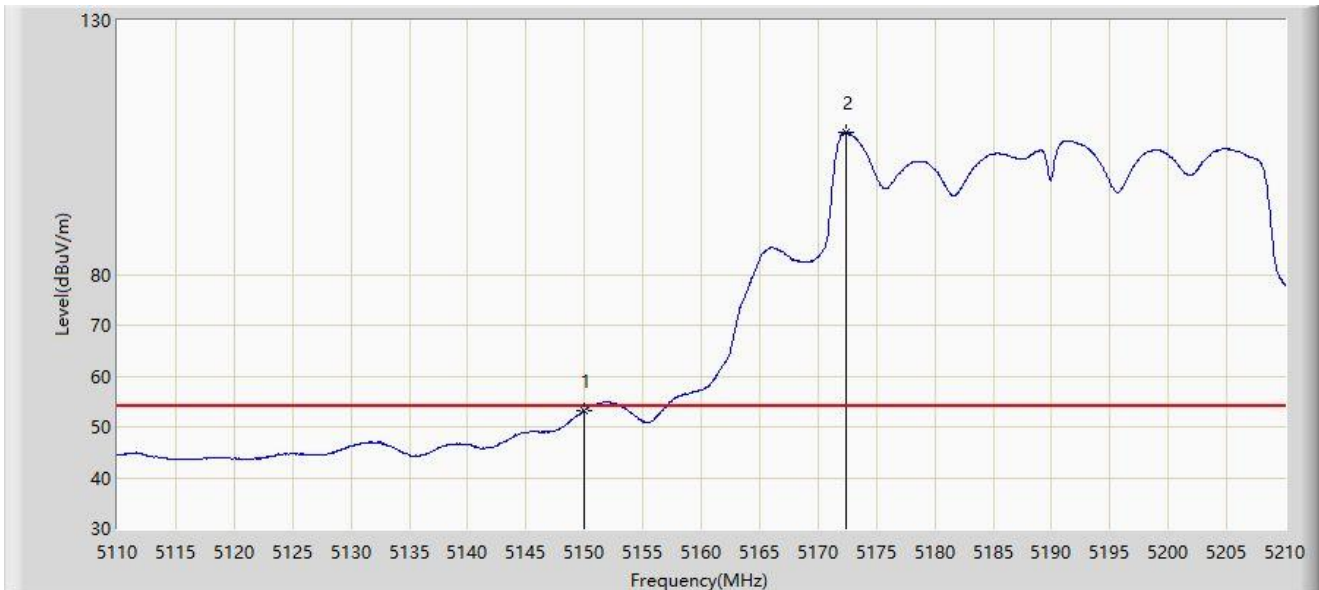


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	53.324	53.386	-0.676	54.000	-0.062	AV
2		5172.450	107.995	59.202	N/A	N/A	48.794	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

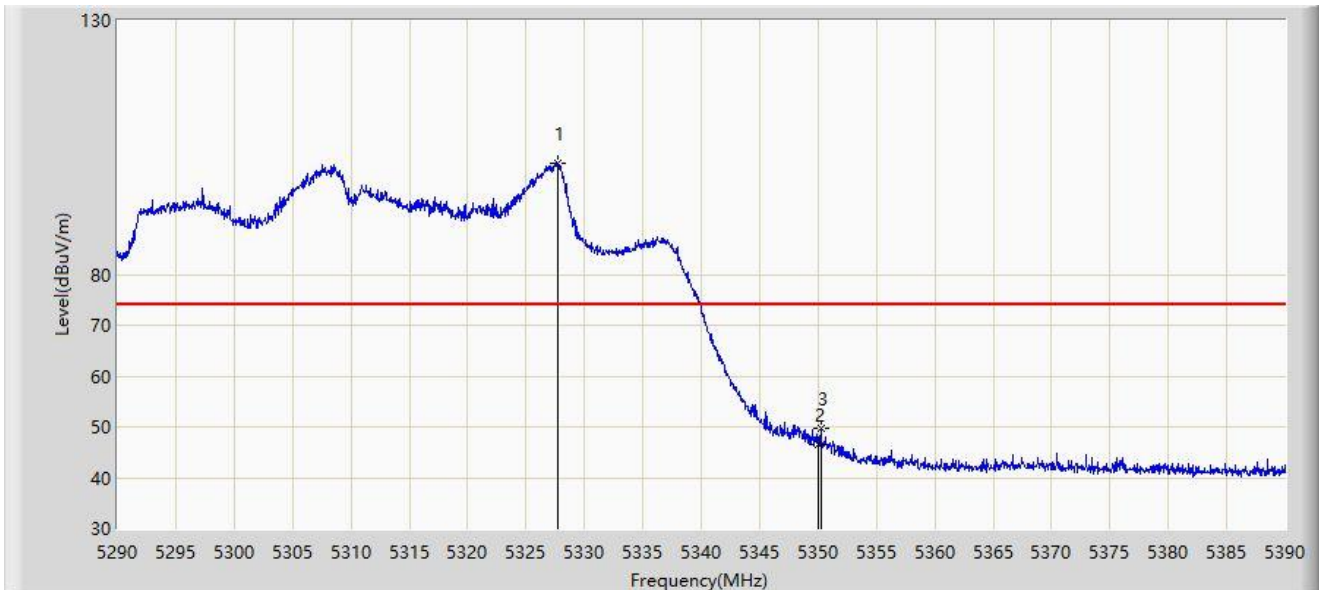


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.750	101.813	57.880	N/A	N/A	43.933	PK
2		5350.000	46.649	45.071	-27.351	74.000	1.578	PK
3	*	5350.250	49.680	48.233	-24.320	74.000	1.446	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

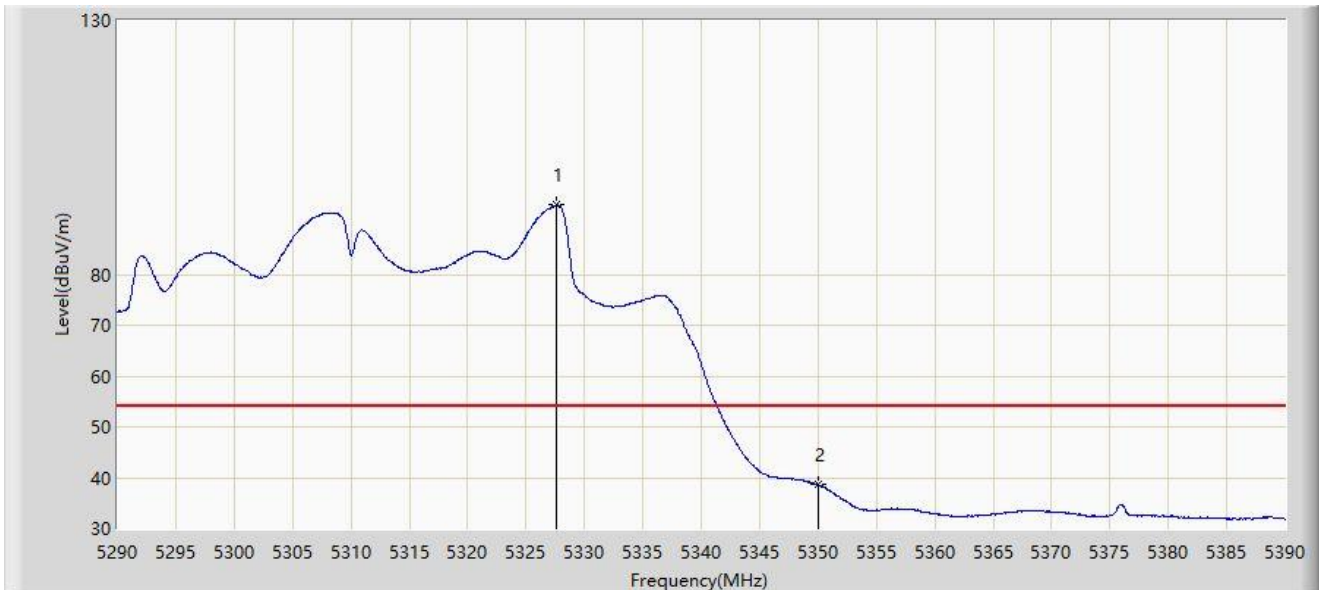


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.600	93.670	49.905	N/A	N/A	43.765	AV
2	*	5350.000	38.619	37.041	-15.381	54.000	1.578	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

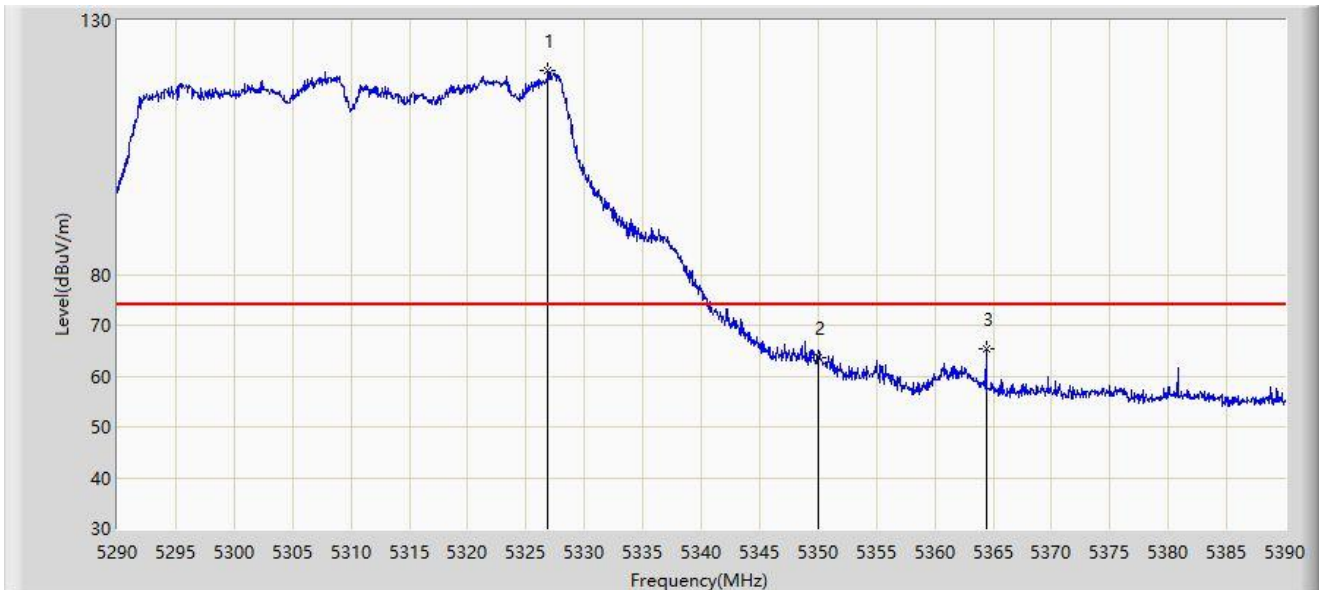


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.850	120.134	77.086	N/A	N/A	43.048	PK
2		5350.000	63.737	62.159	-10.263	74.000	1.578	PK
3	*	5364.400	65.485	66.733	-8.515	74.000	-1.248	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

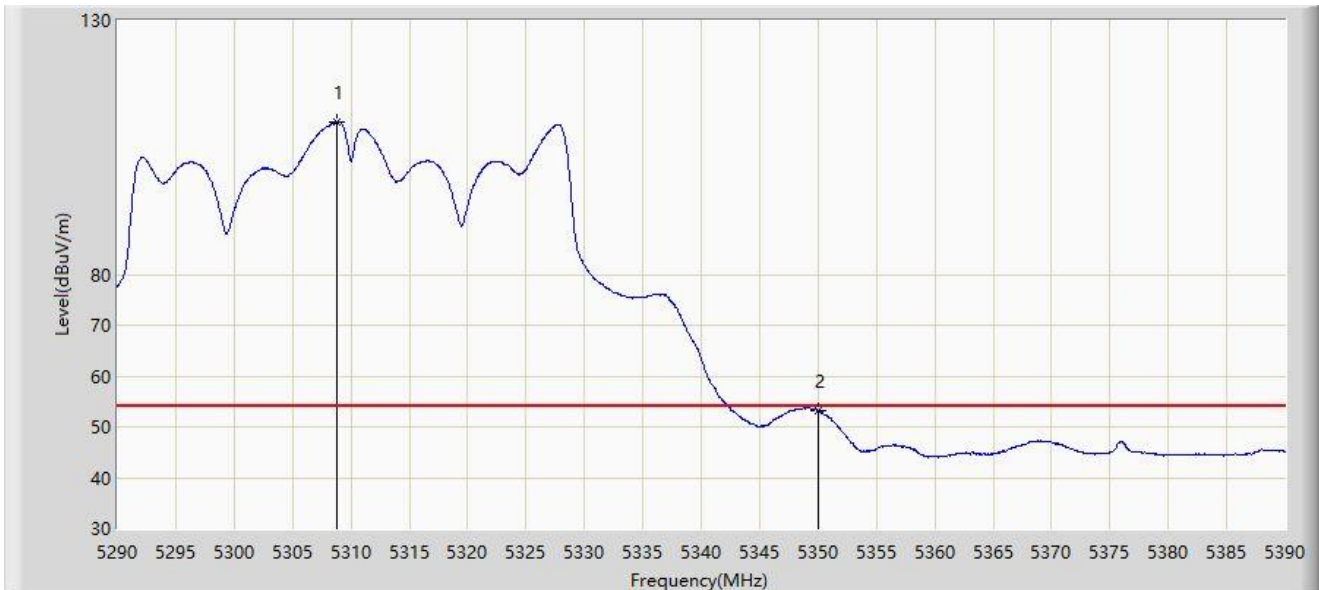


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5308.750	109.996	67.513	N/A	N/A	42.483	AV
2	*	5350.000	53.140	51.562	-0.860	54.000	1.578	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

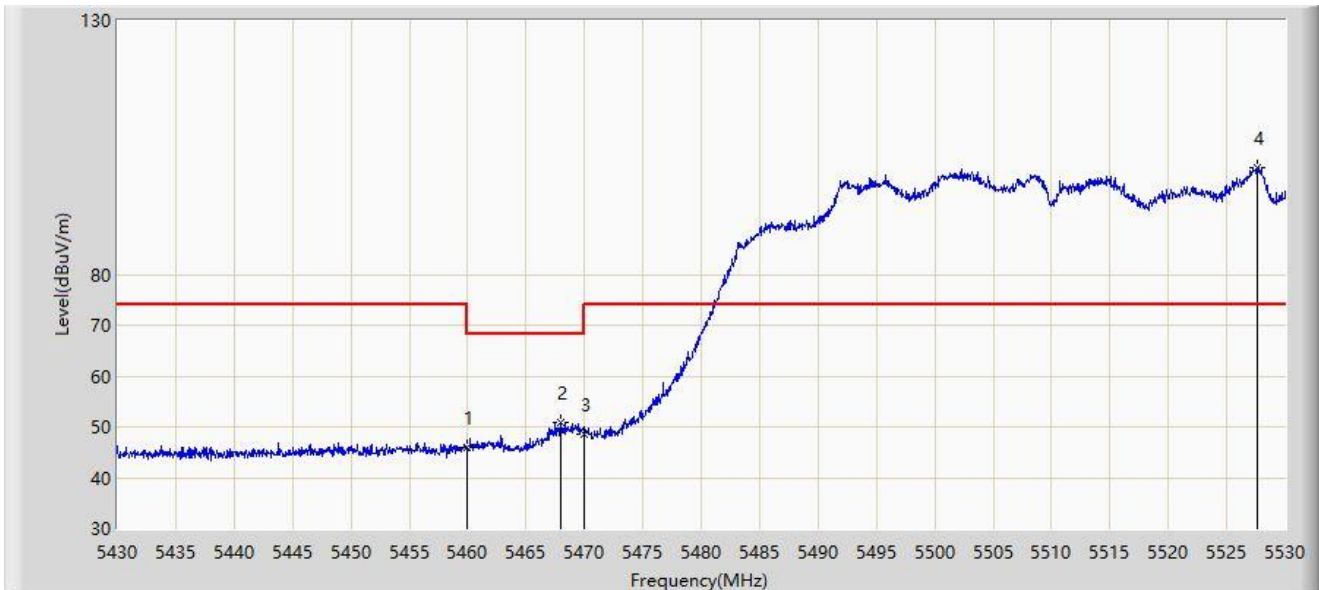


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	45.852	49.527	-22.348	68.200	-3.675	PK
2	*	5468.000	50.873	53.466	-17.327	68.200	-2.593	PK
3		5470.000	48.606	50.538	-19.594	68.200	-1.932	PK
4		5527.600	100.895	57.327	N/A	N/A	43.568	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

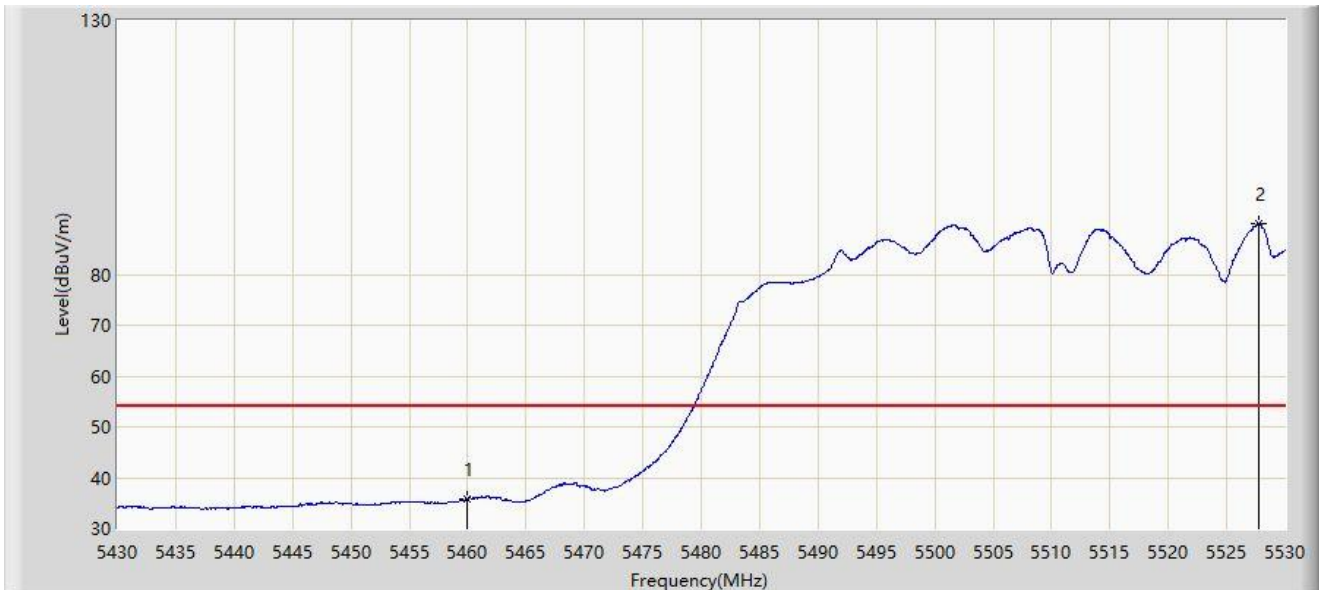


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	35.874	39.549	-18.126	54.000	-3.675	AV
2		5527.700	90.098	46.315	N/A	N/A	43.783	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

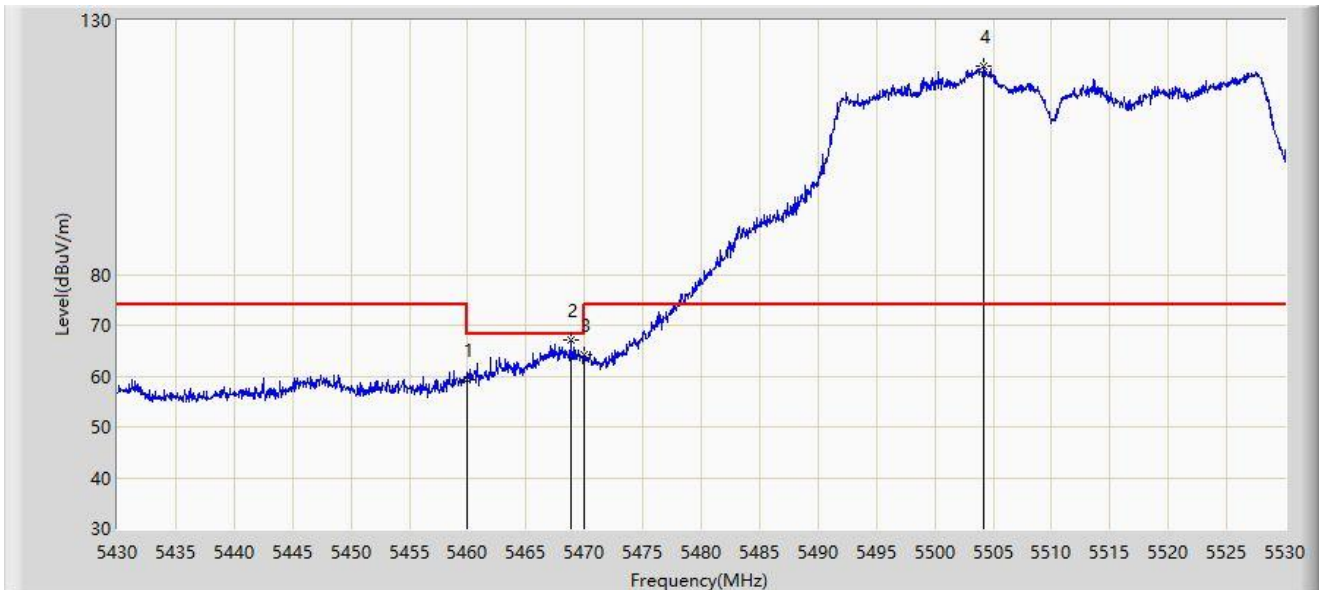

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	59.329	63.004	-8.871	68.200	-3.675	PK
2	*	5468.800	67.197	69.558	-1.003	68.200	-2.361	PK
3		5470.000	64.147	66.079	-4.053	68.200	-1.932	PK
4		5504.150	120.943	77.491	N/A	N/A	43.453	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	48.745	52.420	-5.255	54.000	-3.675	AV
2		5527.600	111.129	67.561	N/A	N/A	43.568	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

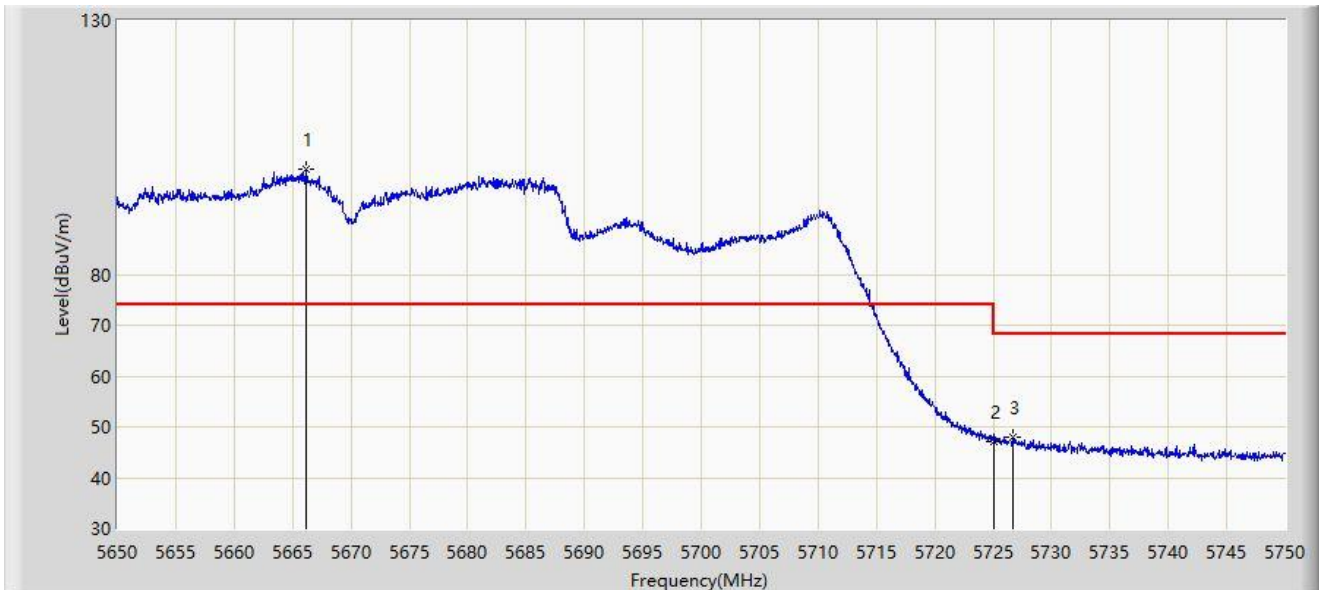


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5666.200	100.609	57.253	N/A	N/A	43.356	PK
2		5725.000	47.223	48.818	-20.977	68.200	-1.596	PK
3	*	5726.750	48.087	50.531	-20.113	68.200	-2.443	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

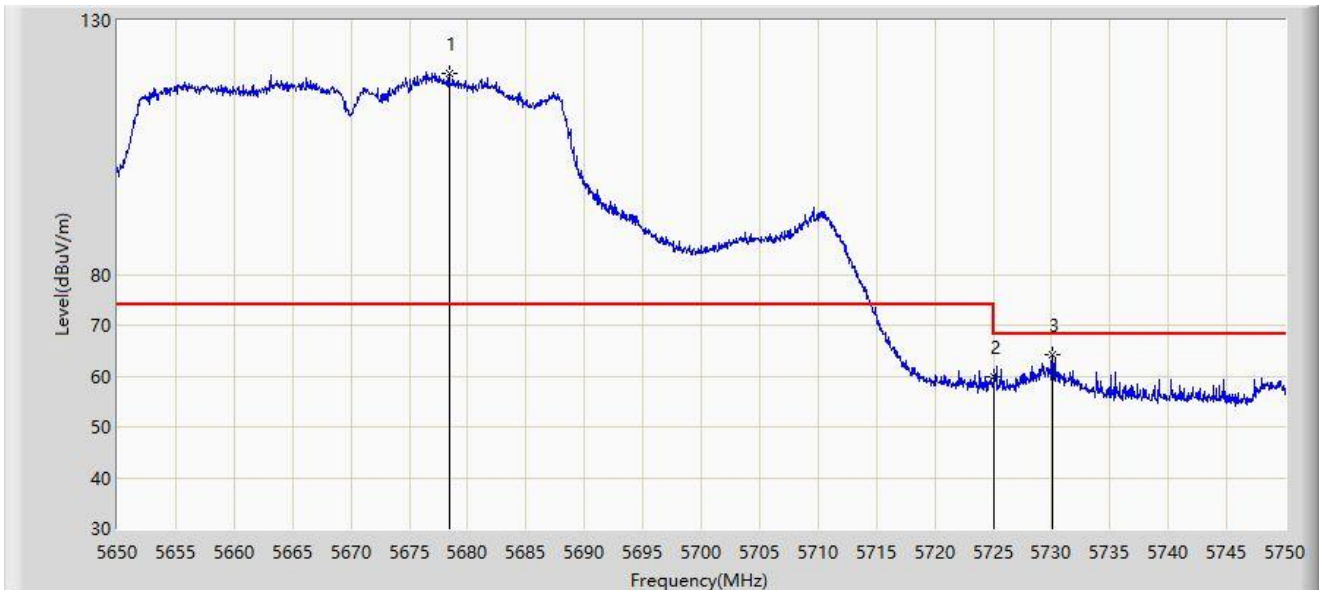


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5678.400	119.617	78.853	N/A	N/A	40.764	PK
2		5725.000	59.877	61.472	-8.323	68.200	-1.596	PK
3	*	5730.100	64.089	67.478	-4.111	68.200	-3.390	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755 MHz	

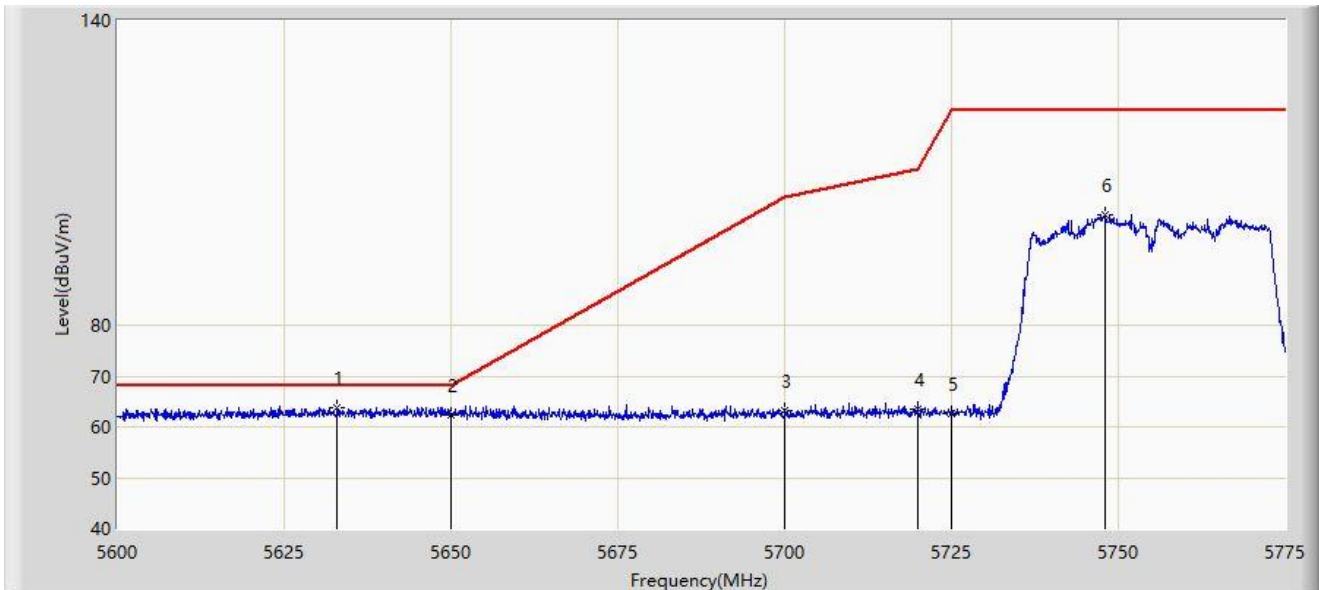


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5632.987	63.913	59.801	-4.287	68.200	4.111	PK
2		5650.000	62.403	58.243	-5.797	68.200	4.160	PK
3		5700.000	63.229	58.799	-41.971	105.200	4.430	PK
4		5720.000	63.576	58.926	-47.224	110.800	4.649	PK
5		5725.000	62.715	58.027	-59.485	122.200	4.688	PK
6		5747.962	101.668	97.231	N/A	N/A	4.437	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755 MHz	

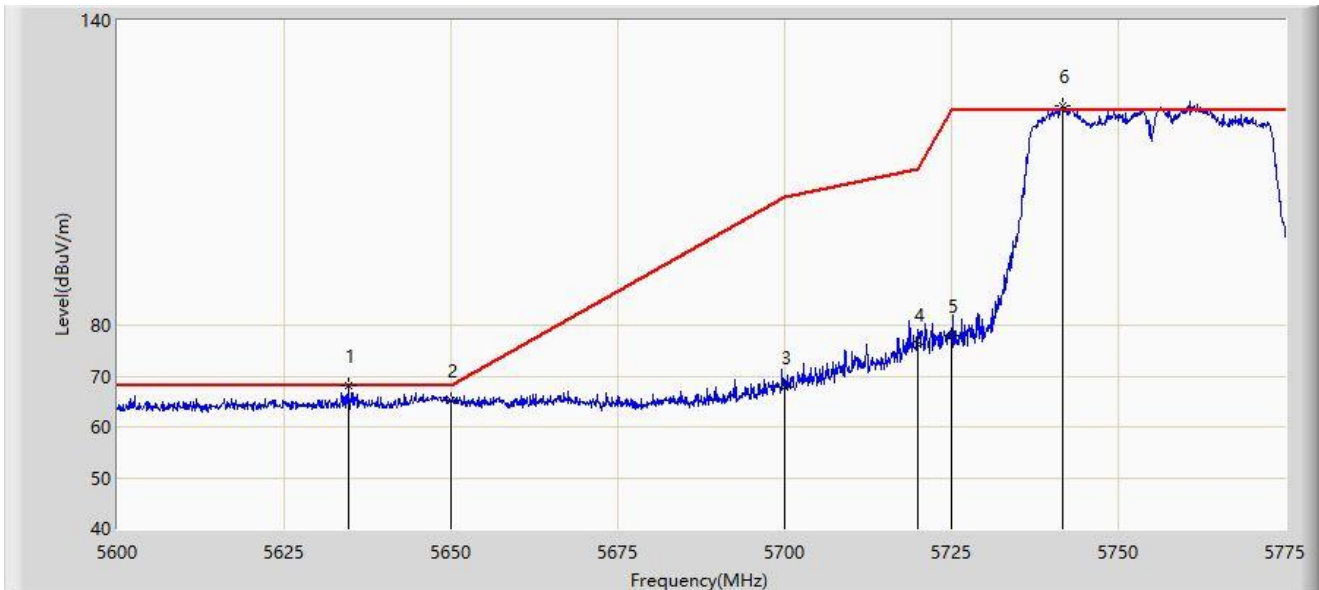


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.562	68.087	63.957	-0.113	68.200	4.130	PK
2		5650.000	65.169	61.009	-3.031	68.200	4.160	PK
3		5700.000	67.951	63.521	-37.249	105.200	4.430	PK
4		5720.000	76.166	71.516	-34.634	110.800	4.649	PK
5		5725.000	77.986	73.298	-44.214	122.200	4.688	PK
6		5741.663	123.248	118.829	N/A	N/A	4.419	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795 MHz	

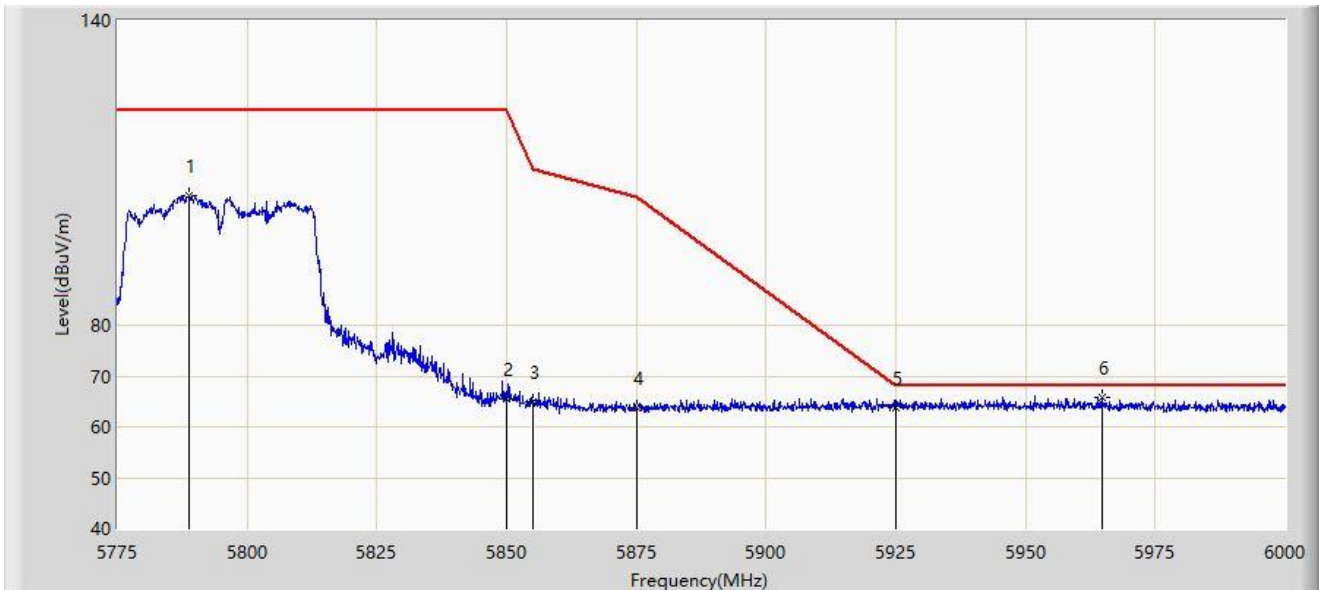


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5788.725	105.490	100.490	N/A	N/A	5.001	PK
2		5850.000	65.545	60.585	-56.655	122.200	4.960	PK
3		5855.000	64.939	59.920	-45.861	110.800	5.019	PK
4		5875.000	63.824	58.688	-41.376	105.200	5.136	PK
5		5925.000	63.744	58.474	-4.456	68.200	5.271	PK
6	*	5964.675	65.762	60.388	-2.438	68.200	5.375	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795 MHz	

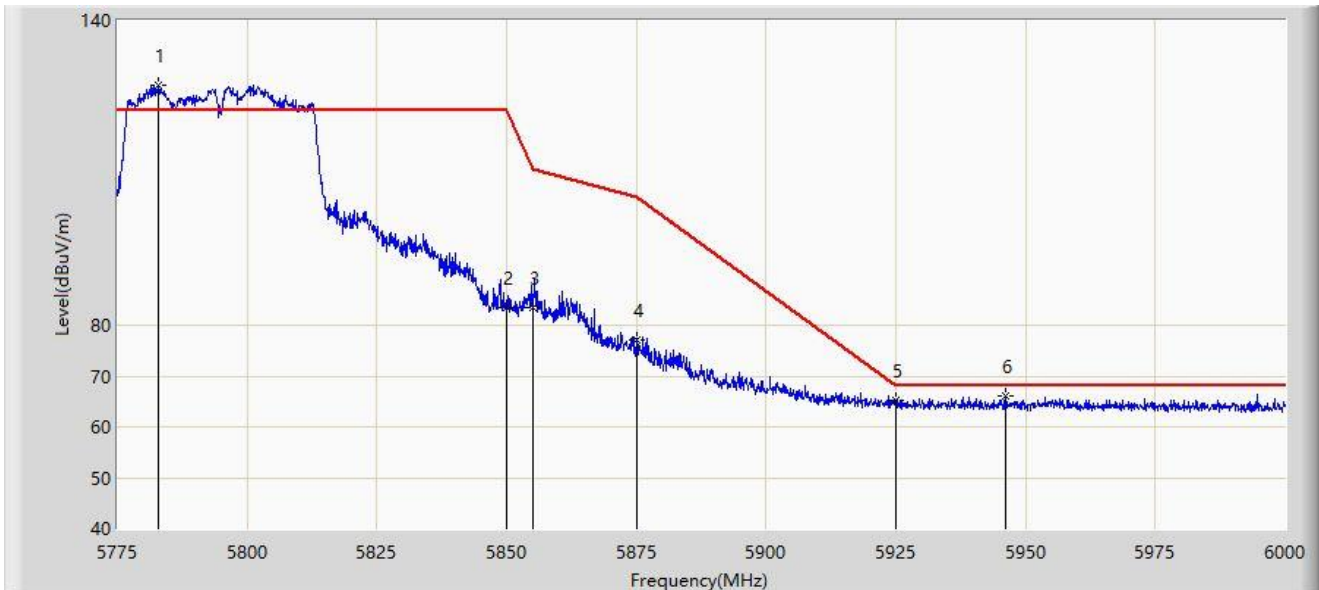


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5782.987	127.235	122.304	N/A	N/A	4.931	PK
2		5850.000	83.346	78.386	-38.854	122.200	4.960	PK
3		5855.000	83.488	78.469	-27.312	110.800	5.019	PK
4		5875.000	76.966	71.830	-28.234	105.200	5.136	PK
5		5925.000	65.121	59.851	-3.079	68.200	5.271	PK
6	*	5946.225	65.960	60.592	-2.240	68.200	5.368	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

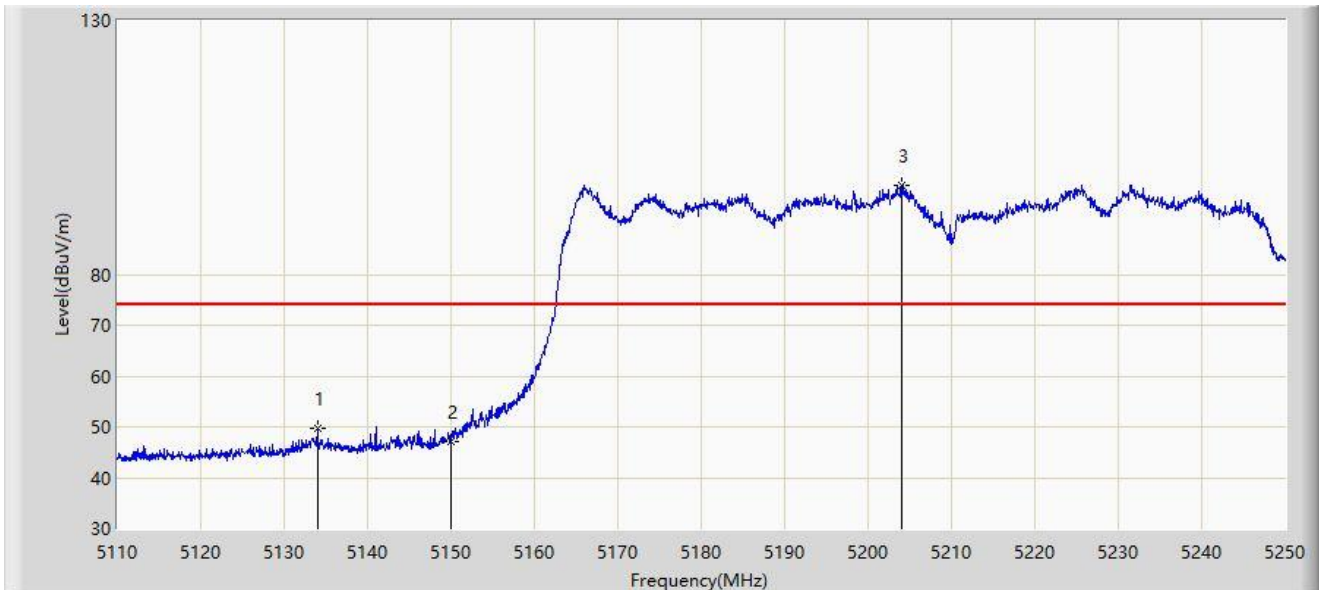


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5134.010	49.697	54.028	-24.303	74.000	-4.331	PK
2		5150.000	47.119	50.144	-26.881	74.000	-3.026	PK
3		5204.010	97.612	55.262	N/A	N/A	42.350	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

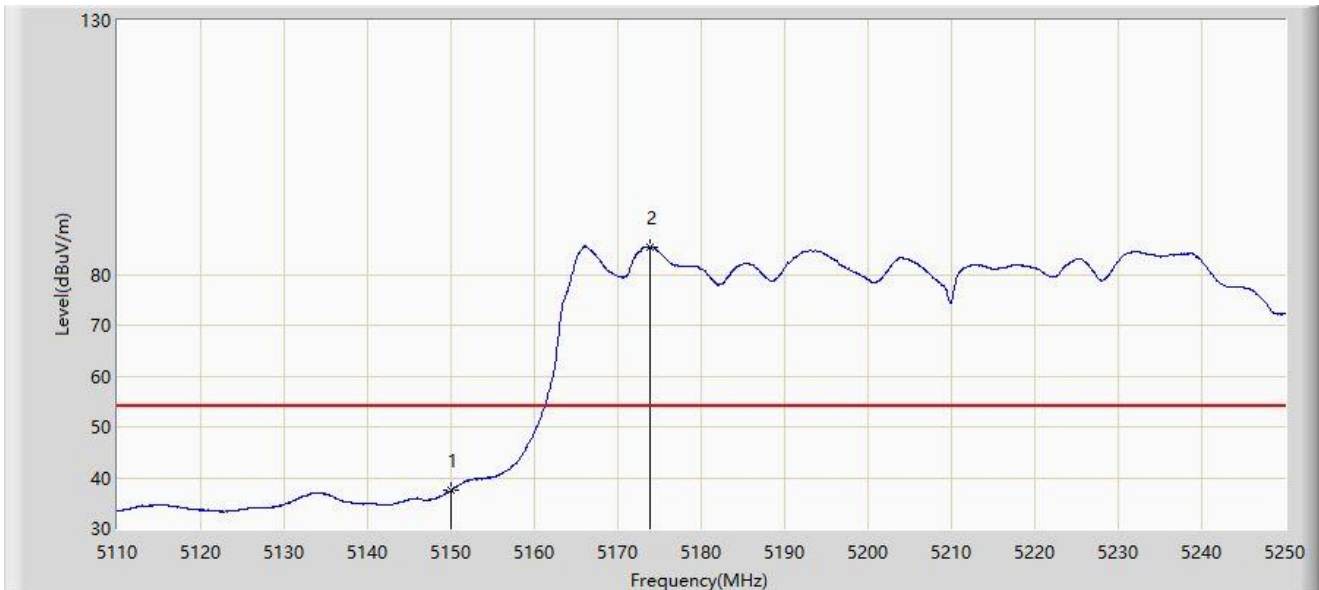


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	37.489	40.514	-16.511	54.000	-3.026	AV
2		5173.910	85.497	40.847	N/A	N/A	44.649	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

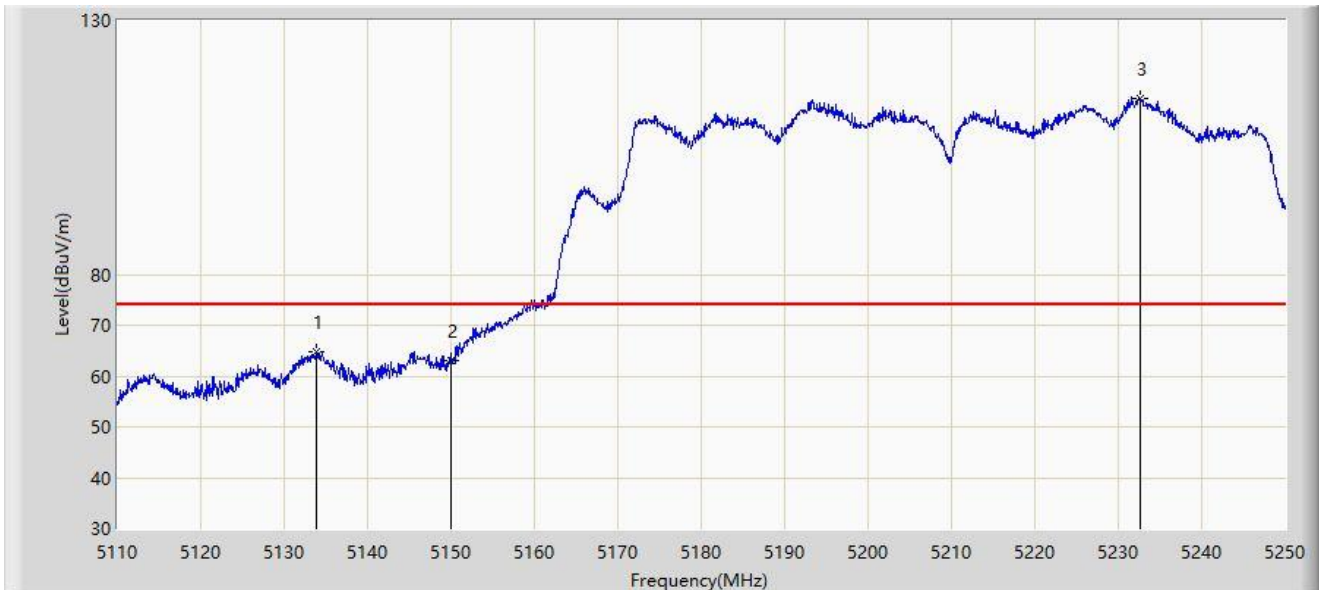


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5133.940	64.887	69.223	-9.113	74.000	-4.336	PK
2		5150.000	62.929	65.954	-11.071	74.000	-3.026	PK
3		5232.710	114.686	76.886	N/A	N/A	37.799	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

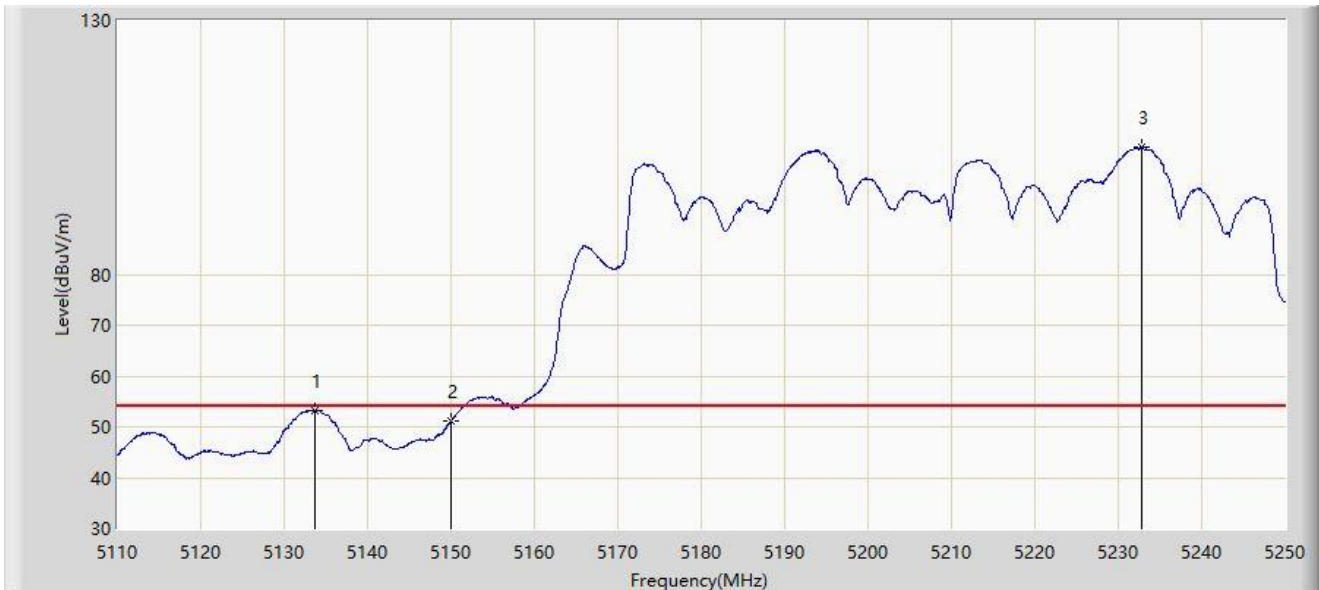


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5133.730	53.286	57.638	-0.714	54.000	-4.352	AV
2		5150.000	51.041	54.066	-2.959	54.000	-3.026	AV
3		5232.780	105.010	67.161	N/A	N/A	37.849	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

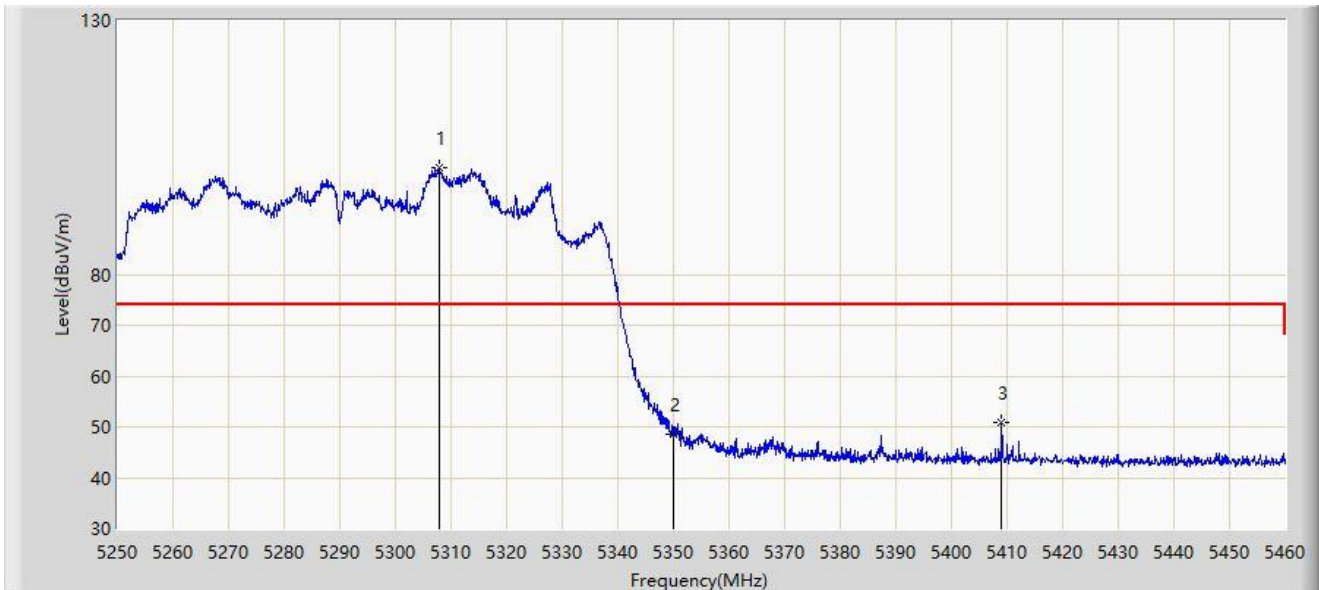


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5307.960	100.999	61.159	N/A	N/A	39.839	PK
2		5350.000	48.608	50.058	-25.392	74.000	-1.451	PK
3	*	5409.075	50.951	56.249	-23.049	74.000	-5.298	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

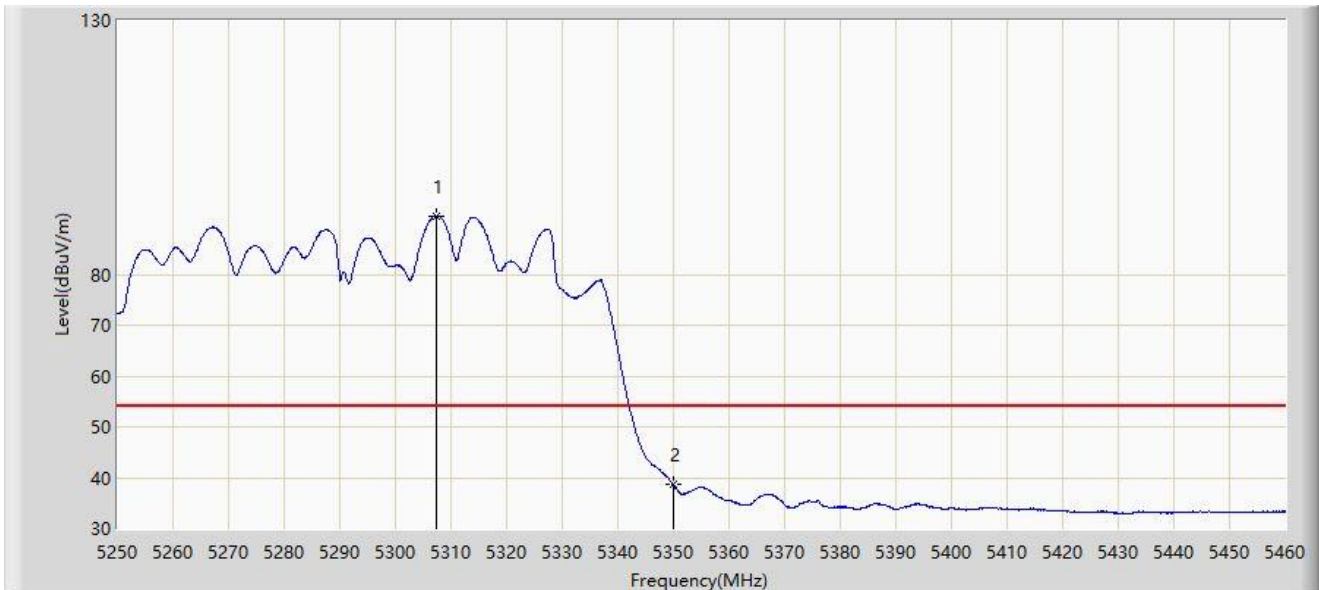


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5307.330	91.520	52.188	N/A	N/A	39.331	AV
2	*	5350.000	38.576	40.026	-15.424	54.000	-1.451	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

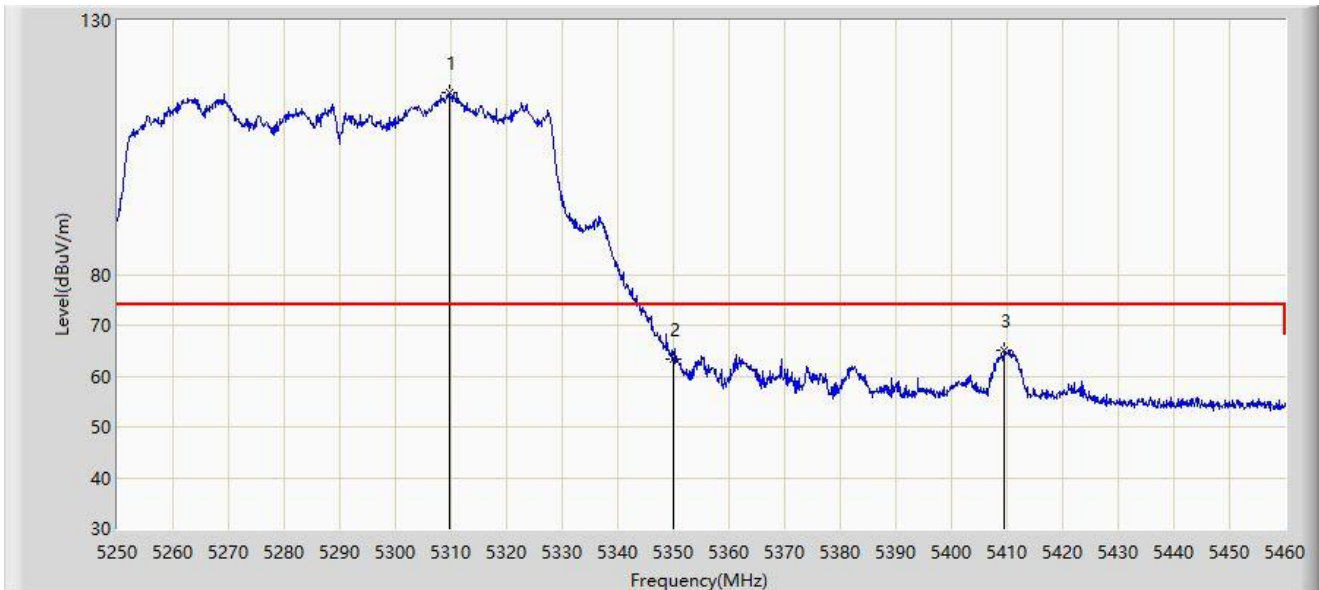


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5309.640	115.925	74.292	N/A	N/A	41.634	PK
2		5350.000	63.415	64.865	-10.585	74.000	-1.451	PK
3	*	5409.600	65.090	70.388	-8.910	74.000	-5.299	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

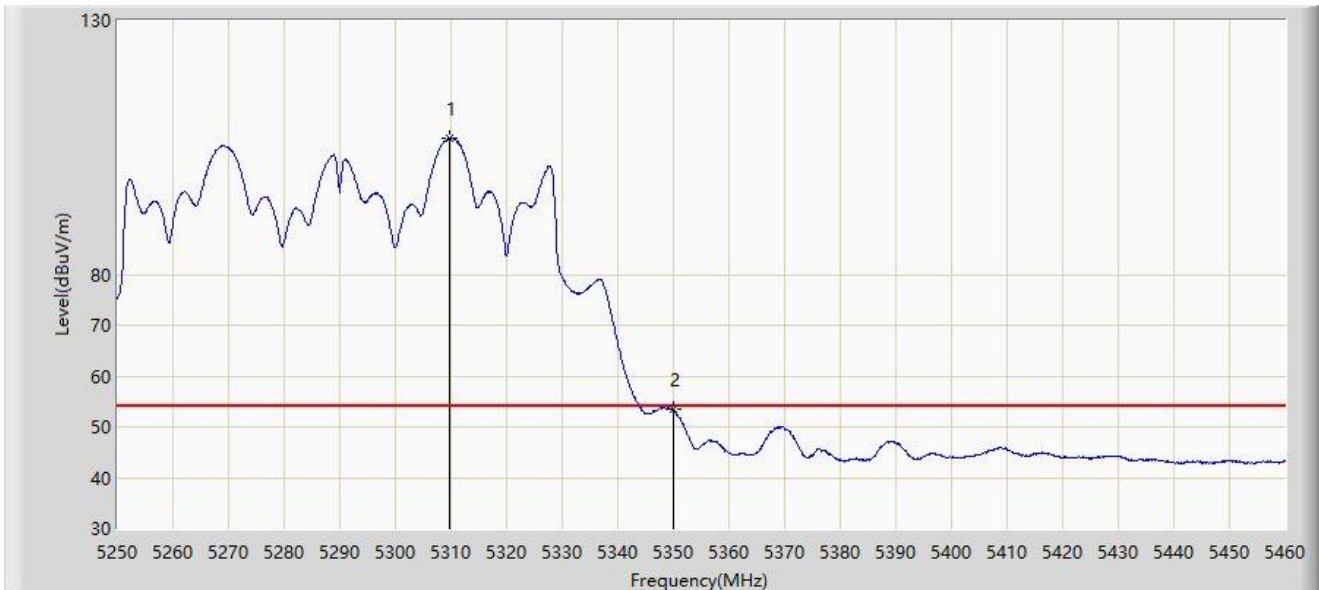


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5309.745	106.884	65.112	N/A	N/A	41.772	AV
2	*	5350.000	53.369	54.819	-0.631	54.000	-1.451	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

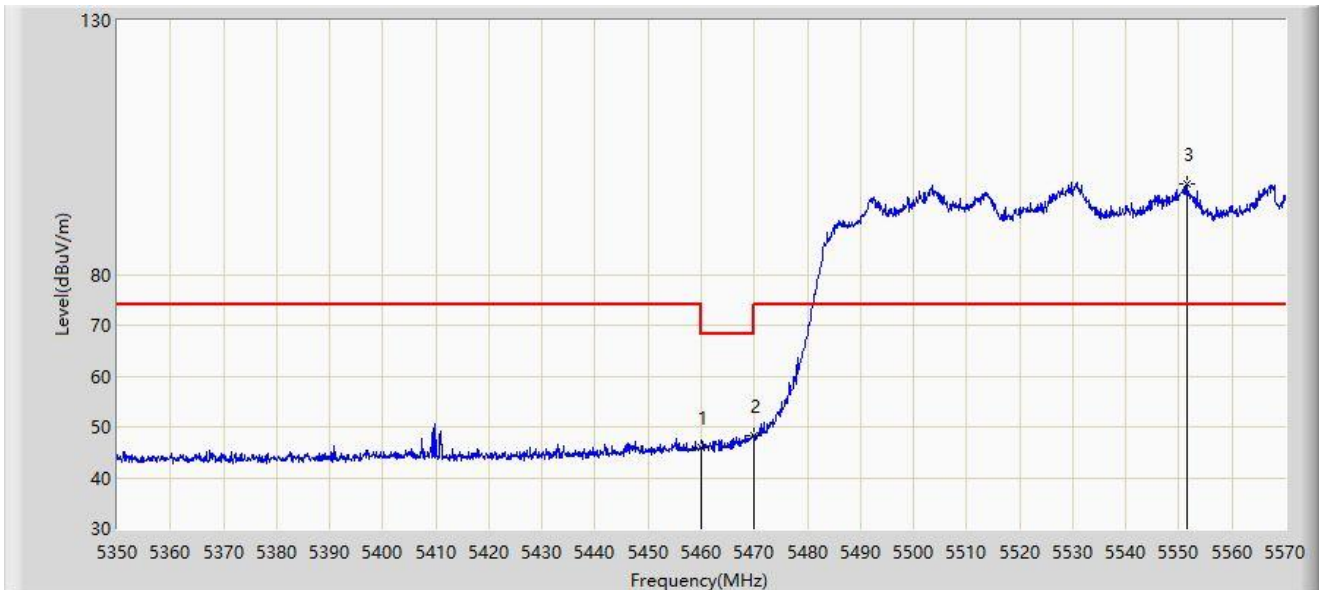


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	45.851	49.526	-22.349	68.200	-3.675	PK
2	*	5470.000	48.356	50.288	-19.844	68.200	-1.932	PK
3		5551.410	97.864	52.289	N/A	N/A	45.574	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

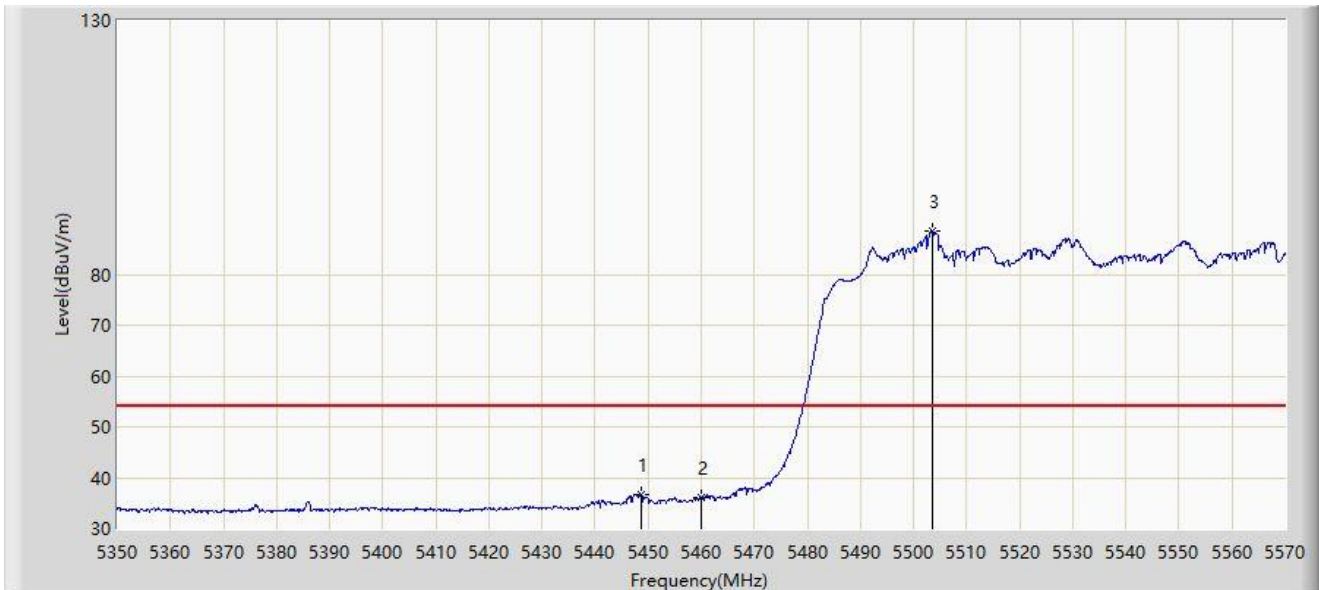


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5448.560	36.725	41.099	-17.275	54.000	-4.374	AV
2		5460.000	36.137	39.812	-17.863	54.000	-3.675	AV
3		5503.560	88.555	45.759	N/A	N/A	42.795	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

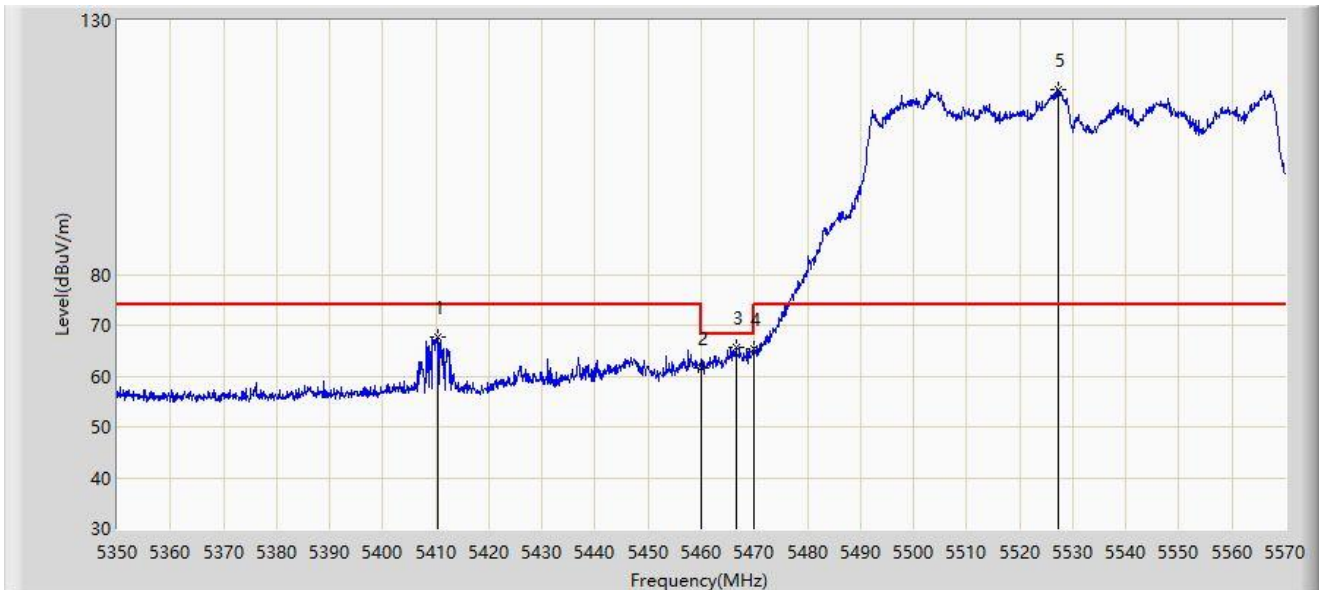

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5410.500	67.797	72.587	-6.203	74.000	-4.790	PK
2		5460.000	61.582	65.257	-6.618	68.200	-3.675	PK
3	*	5466.490	65.787	68.733	-2.413	68.200	-2.947	PK
4		5470.000	65.479	67.411	-2.721	68.200	-1.932	PK
5		5527.320	116.466	73.463	N/A	N/A	43.003	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.900	53.490	57.292	-0.510	54.000	-3.802	AV
2		5460.000	52.433	56.108	-1.567	54.000	-3.675	AV
3		5527.760	107.210	63.298	N/A	N/A	43.912	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

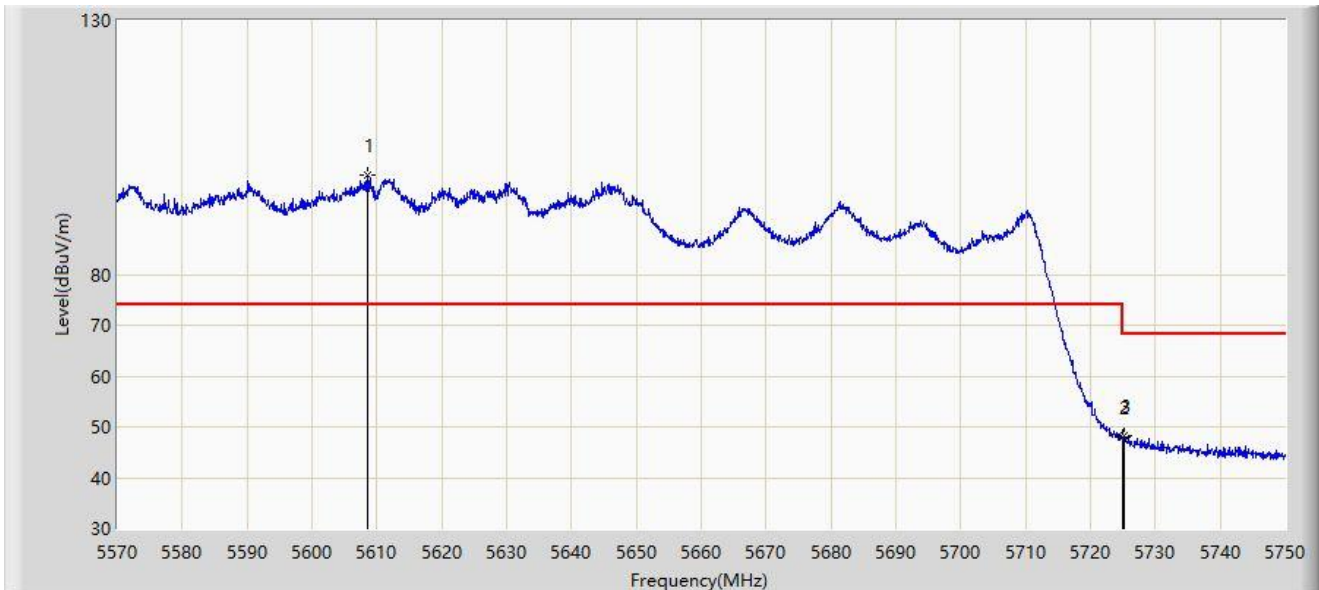


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5608.520	99.590	56.318	N/A	N/A	43.272	PK
2		5725.000	47.864	49.459	-20.336	68.200	-1.596	PK
3	*	5725.160	48.362	50.047	-19.838	68.200	-1.685	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

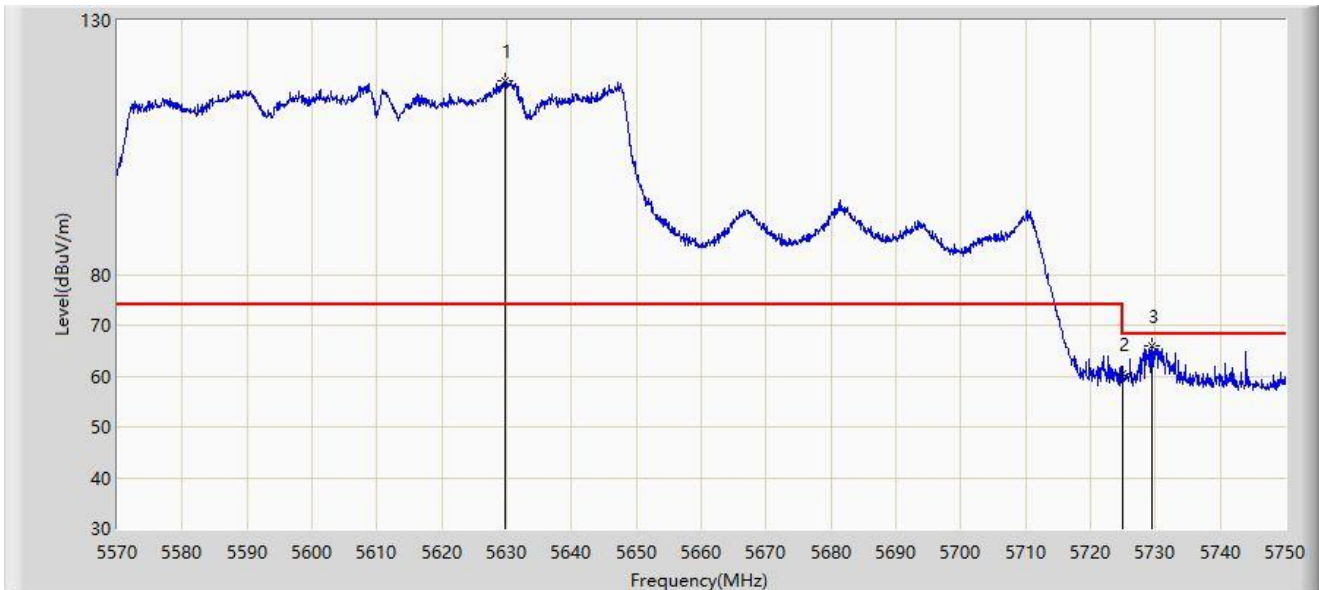


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5629.850	118.179	74.155	N/A	N/A	44.024	PK
2		5725.000	60.516	62.111	-7.684	68.200	-1.596	PK
3	*	5729.570	66.030	69.331	-2.170	68.200	-3.301	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775 MHz	

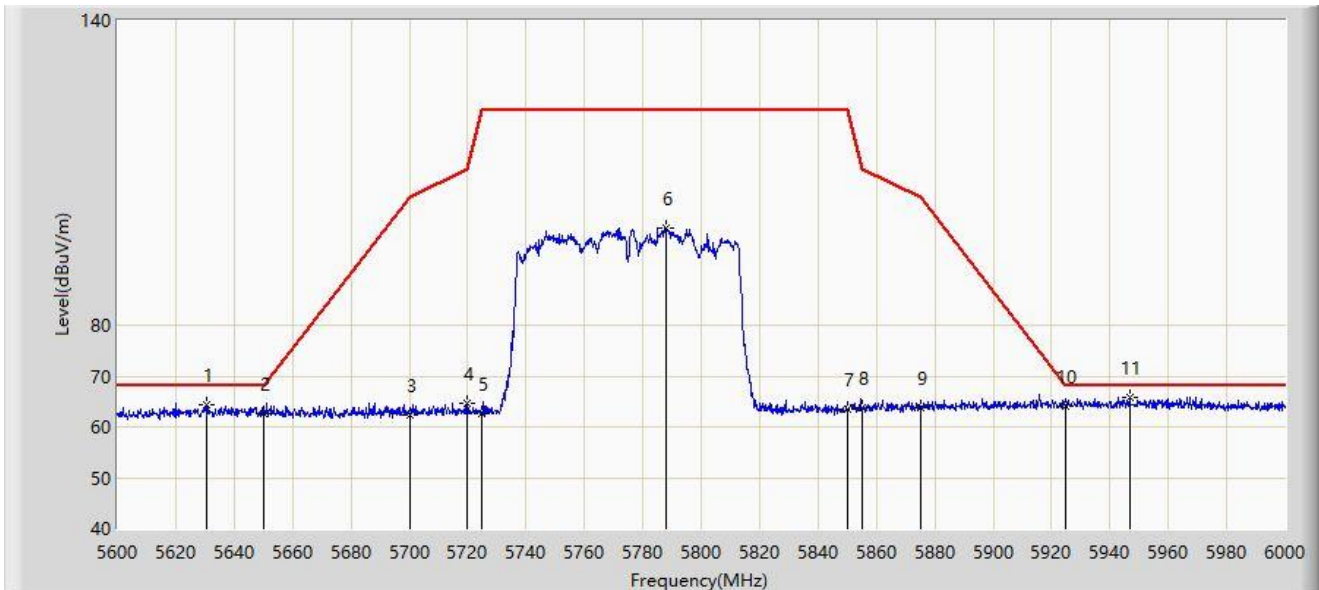


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5630.400	64.278	60.197	-3.922	68.200	4.081	PK
2		5650.000	62.705	58.545	-5.495	68.200	4.160	PK
3		5700.000	62.242	57.812	-42.958	105.200	4.430	PK
4		5720.000	64.521	59.871	-46.279	110.800	4.649	PK
5		5725.000	62.585	57.897	-59.615	122.200	4.688	PK
6		5788.200	99.184	94.190	N/A	N/A	4.994	PK
7		5850.000	63.453	58.493	-58.747	122.200	4.960	PK
8		5855.000	63.674	58.655	-47.126	110.800	5.019	PK
9		5875.000	63.802	58.666	-41.398	105.200	5.136	PK
10		5925.000	63.941	58.671	-4.259	68.200	5.271	PK
11	*	5946.800	65.847	60.473	-2.353	68.200	5.374	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775 MHz	

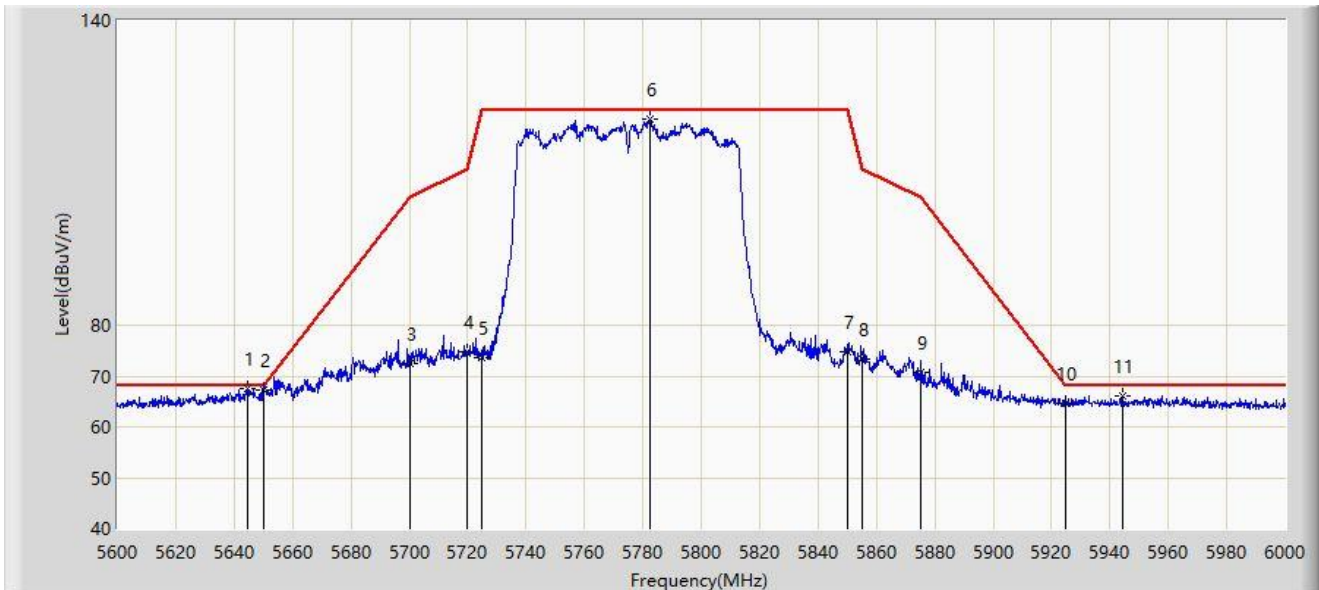


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5644.600	67.616	63.425	-0.584	68.200	4.191	PK
2		5650.000	67.224	63.064	-0.976	68.200	4.160	PK
3		5700.000	72.598	68.168	-32.602	105.200	4.430	PK
4		5720.000	74.829	70.179	-35.971	110.800	4.649	PK
5		5725.000	73.706	69.018	-48.494	122.200	4.688	PK
6		5782.600	120.670	115.744	N/A	N/A	4.927	PK
7		5850.000	74.734	69.774	-47.466	122.200	4.960	PK
8		5855.000	73.237	68.218	-37.563	110.800	5.019	PK
9		5875.000	70.712	65.576	-34.488	105.200	5.136	PK
10		5925.000	64.655	59.385	-3.545	68.200	5.271	PK
11		5944.400	65.994	60.645	-2.206	68.200	5.350	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz	

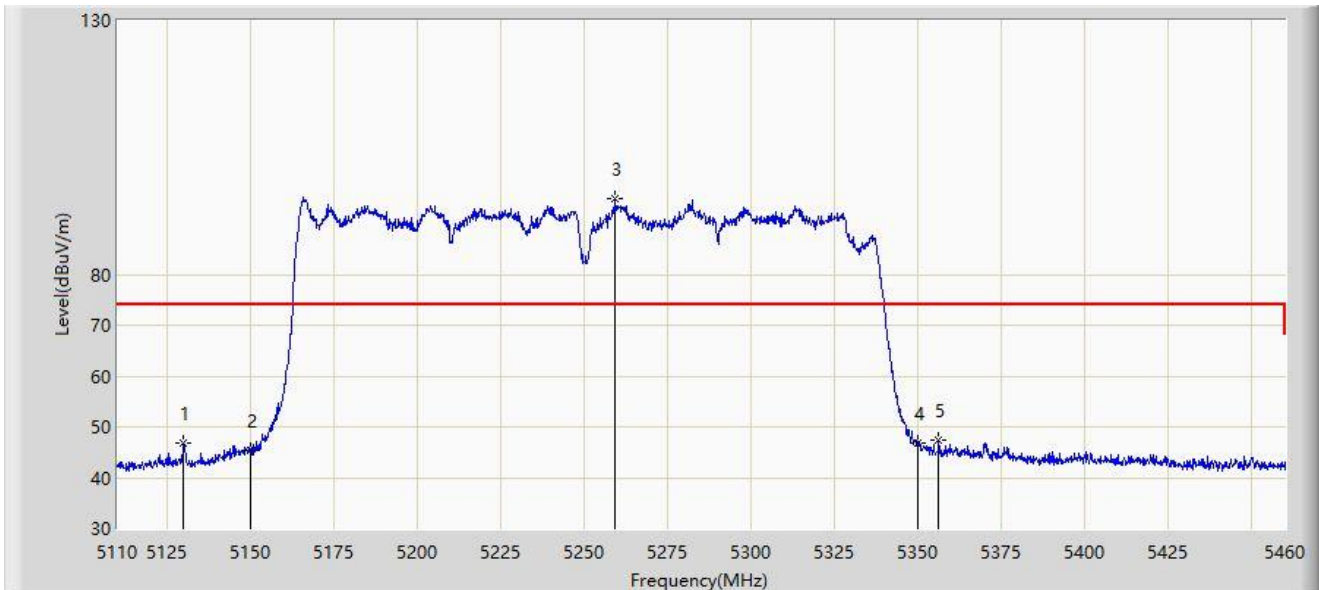


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5129.775	46.796	54.307	-27.204	74.000	-7.511	PK
2		5150.000	45.316	50.649	-28.684	74.000	-5.333	PK
3		5259.275	94.819	52.467	N/A	N/A	42.351	PK
4		5350.000	46.809	50.028	-27.191	74.000	-3.219	PK
5	*	5356.225	47.438	52.420	-26.562	74.000	-4.983	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz	

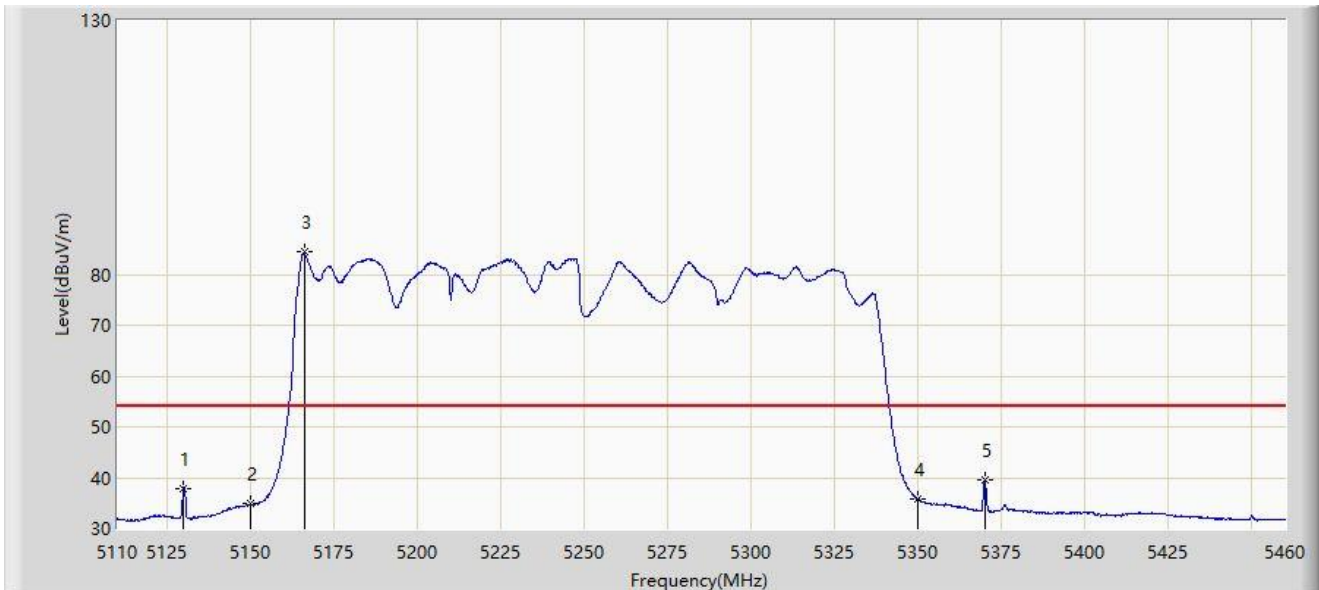


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5129.775	37.966	45.477	-16.034	54.000	-7.511	AV
2		5150.000	34.813	40.146	-19.187	54.000	-5.333	AV
3		5166.000	84.400	37.856	N/A	N/A	46.544	AV
4		5350.000	35.729	38.948	-18.271	54.000	-3.219	AV
5	*	5370.050	39.446	45.960	-14.554	54.000	-6.515	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz	

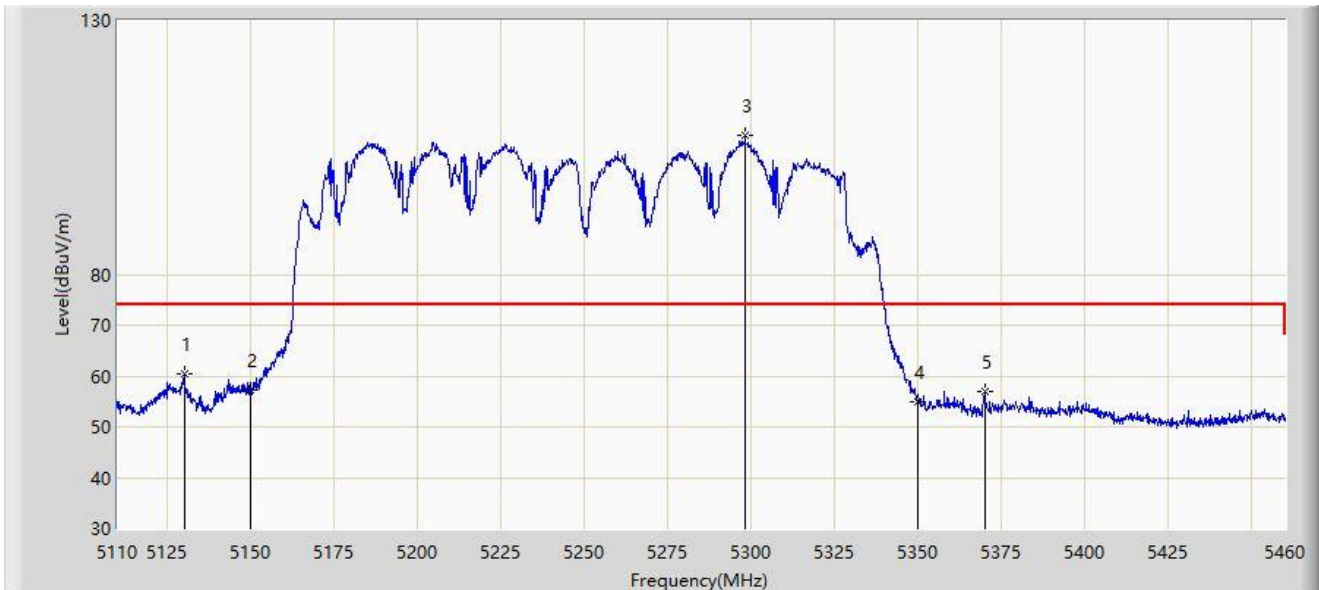


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5130.125	60.556	68.058	-13.444	74.000	-7.502	PK
2		5150.000	57.292	62.625	-16.708	74.000	-5.333	PK
3		5298.125	107.315	65.234	N/A	N/A	42.082	PK
4		5350.000	54.904	58.123	-19.096	74.000	-3.219	PK
5		5370.050	56.915	63.429	-17.085	74.000	-6.515	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz	

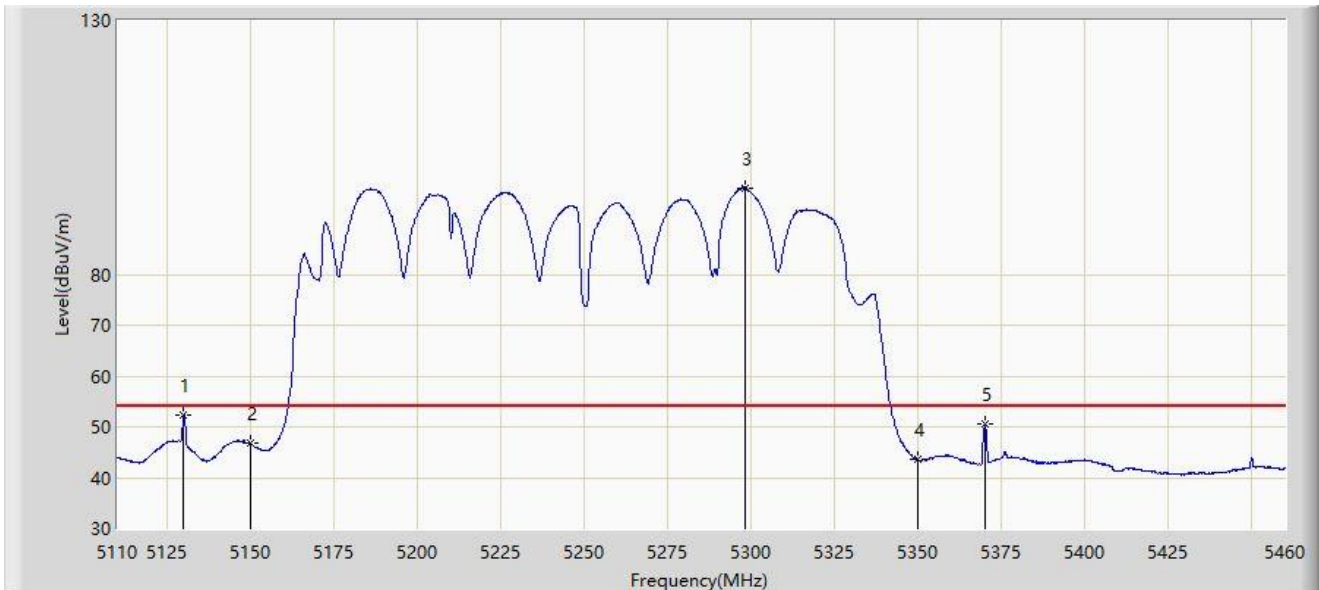


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5129.950	52.305	59.808	-1.695	54.000	-7.502	AV
2		5150.000	46.686	52.019	-7.314	54.000	-5.333	AV
3		5298.125	97.050	54.969	N/A	N/A	42.082	AV
4		5350.000	43.508	46.727	-10.492	54.000	-3.219	AV
5		5370.050	50.686	57.200	-3.314	54.000	-6.515	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz	

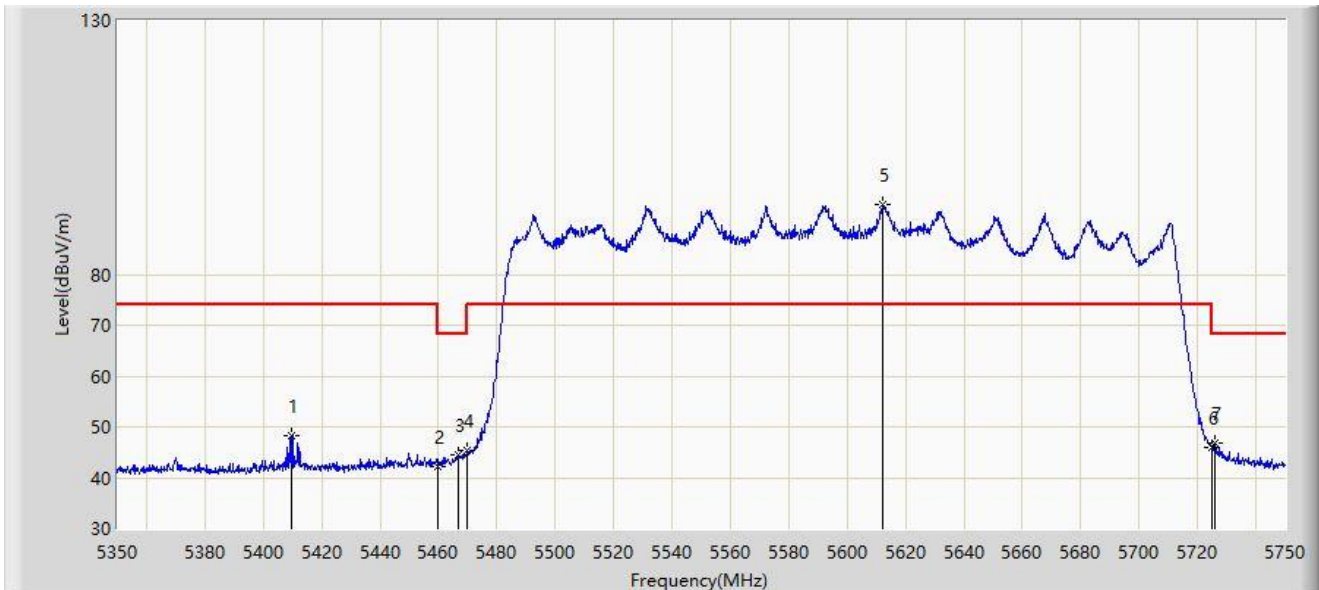


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5409.600	48.314	55.240	-25.686	74.000	-6.926	PK
2		5460.000	42.234	47.895	-25.966	68.200	-5.661	PK
3		5467.000	44.467	49.299	-23.733	68.200	-4.832	PK
4		5470.000	45.269	49.398	-22.931	68.200	-4.129	PK
5		5612.000	93.826	50.182	N/A	N/A	43.644	PK
6		5725.000	45.950	48.821	-22.250	68.200	-2.871	PK
7	*	5725.800	46.826	50.177	-21.374	68.200	-3.352	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz	

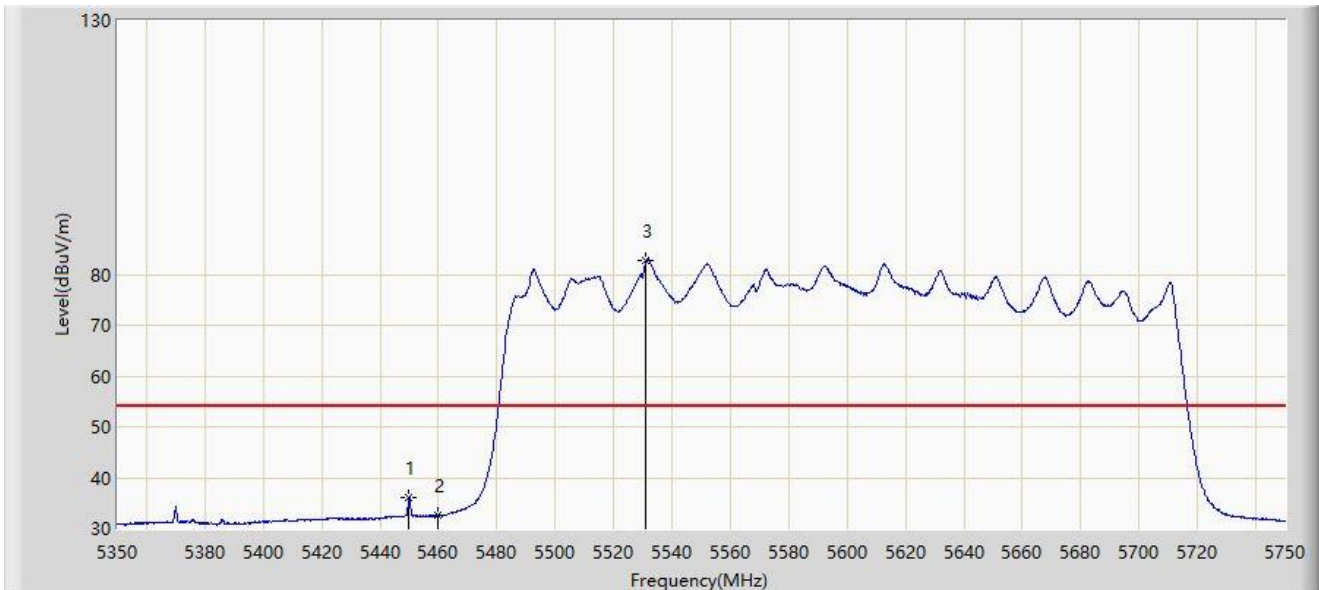


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5449.800	36.131	42.351	-17.869	54.000	-6.219	AV
2		5460.000	32.607	38.268	-21.393	54.000	-5.661	AV
3		5531.200	82.653	38.915	N/A	N/A	43.738	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz	

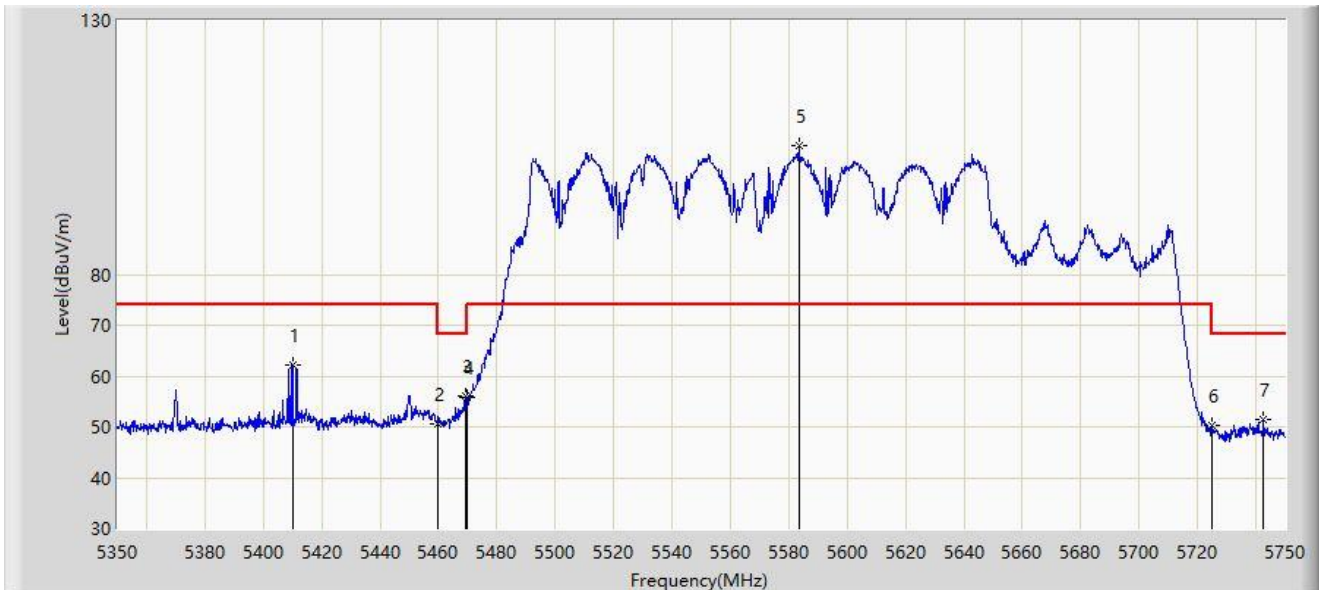


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5410.200	62.160	69.073	-11.840	74.000	-6.912	PK
2		5460.000	50.714	56.375	-17.486	68.200	-5.661	PK
3		5469.200	56.202	60.490	-11.998	68.200	-4.288	PK
4		5470.000	55.672	59.801	-12.528	68.200	-4.129	PK
5		5583.400	105.242	68.774	N/A	N/A	36.468	PK
6		5725.000	50.264	53.135	-17.936	68.200	-2.871	PK
7		5742.600	51.439	57.841	-16.761	68.200	-6.402	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz	

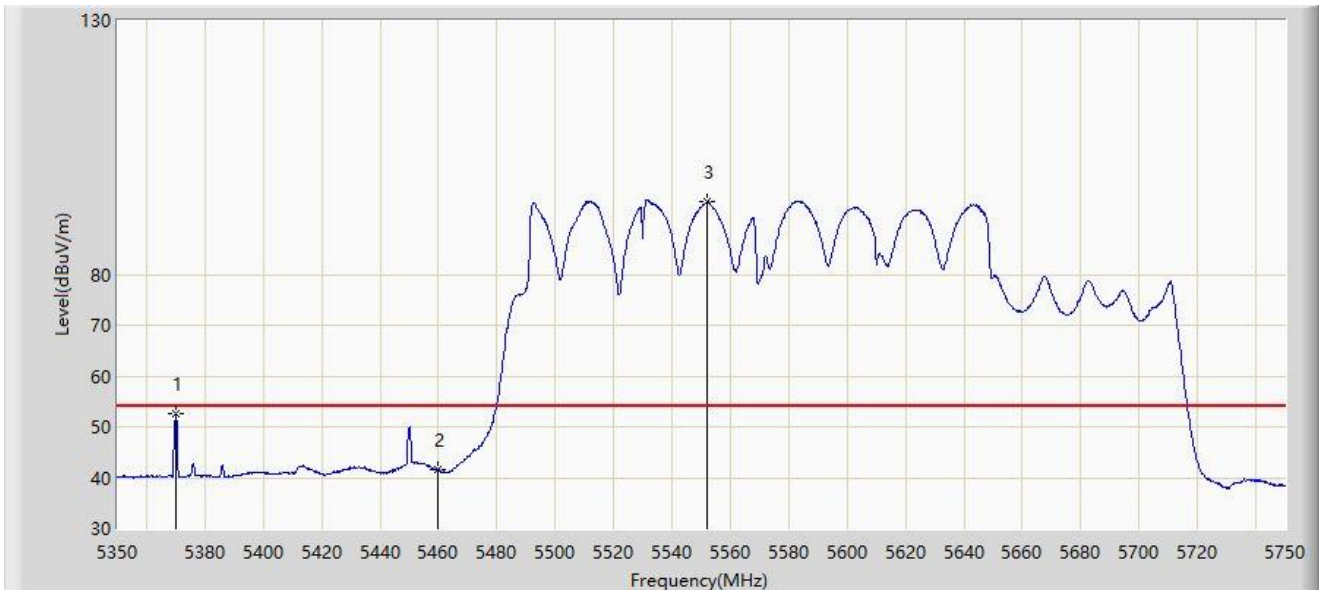


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5370.000	52.558	59.673	-1.442	54.000	-7.115	AV
2		5460.000	41.504	47.165	-12.496	54.000	-5.661	AV
3		5552.000	94.279	49.403	N/A	N/A	44.876	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

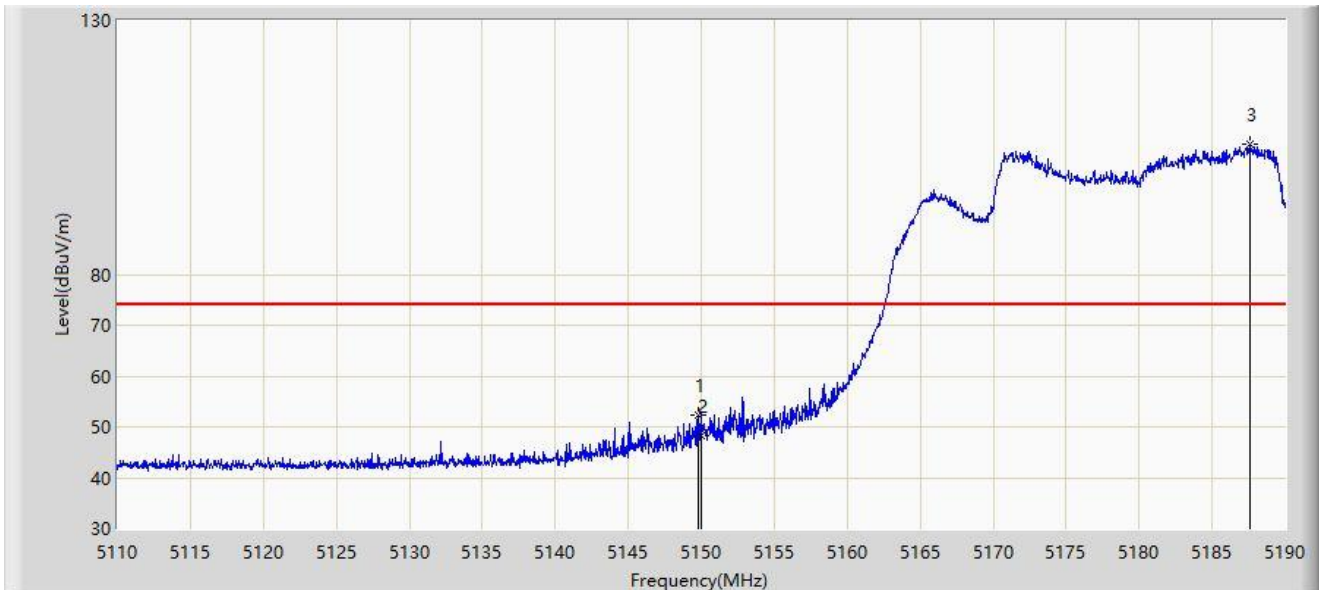


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.760	52.263	57.627	-21.737	74.000	-5.363	PK
2		5150.000	48.186	53.519	-25.814	74.000	-5.333	PK
3		5187.600	105.599	70.785	N/A	N/A	34.814	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

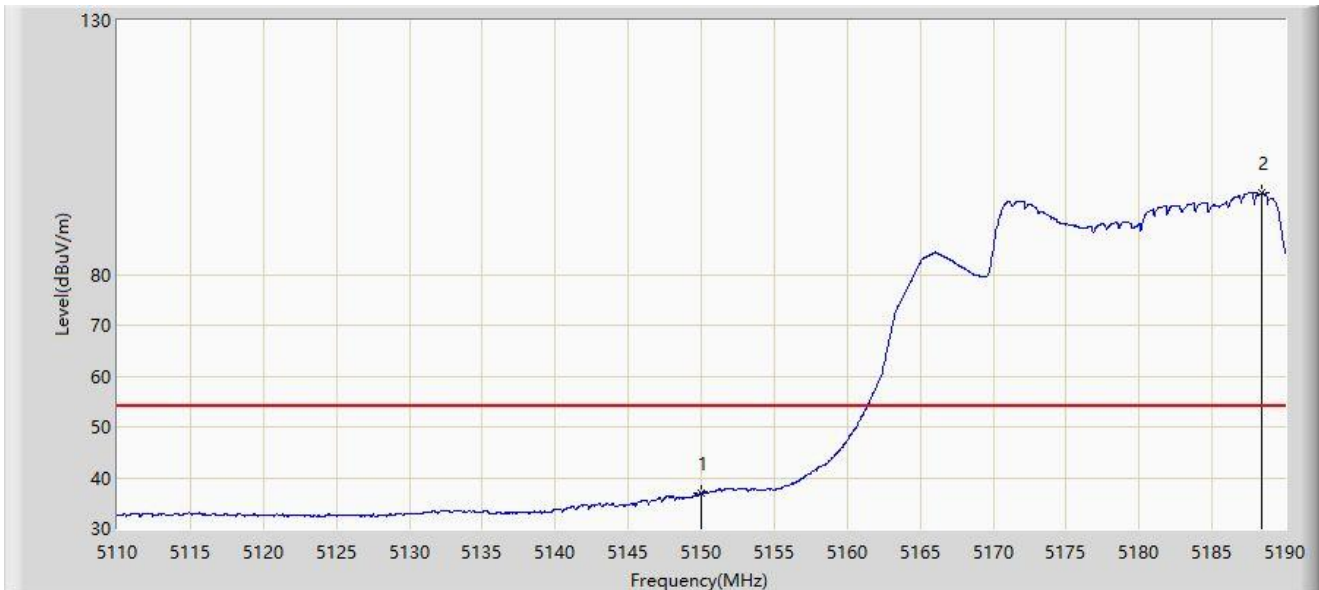


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	36.845	42.178	-17.155	54.000	-5.333	AV
2		5188.360	96.010	60.100	N/A	N/A	35.910	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

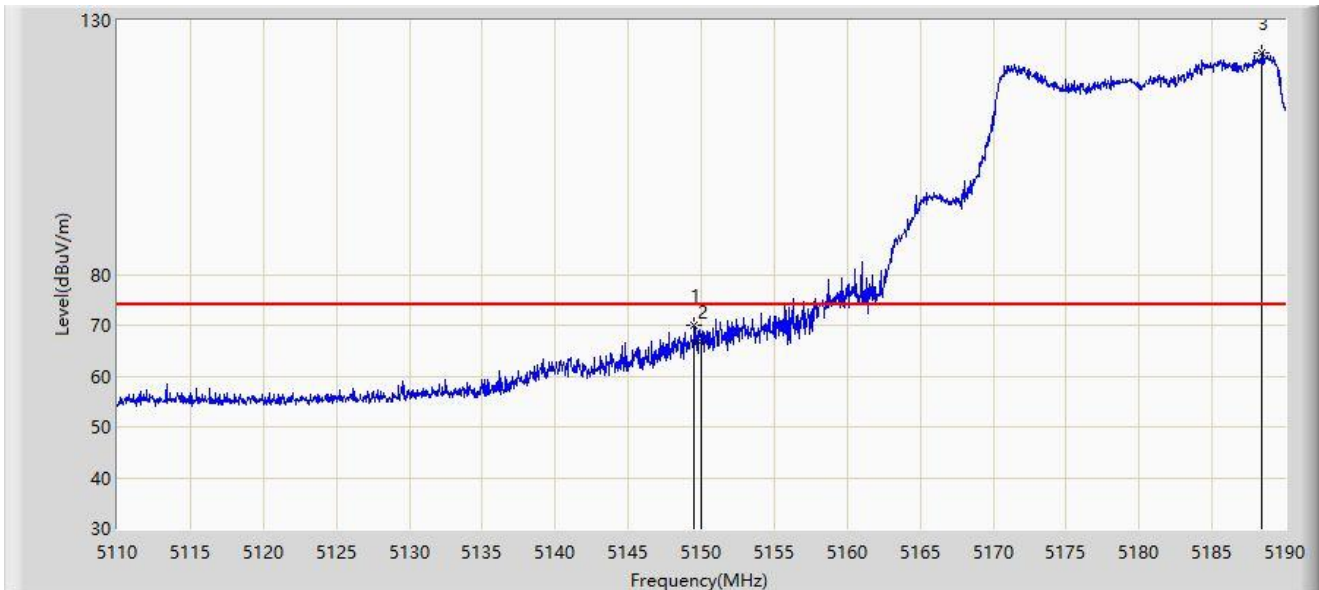


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.520	70.105	75.512	-3.895	74.000	-5.407	PK
2		5150.000	66.694	72.027	-7.306	74.000	-5.333	PK
3		5188.360	123.479	87.569	N/A	N/A	35.910	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

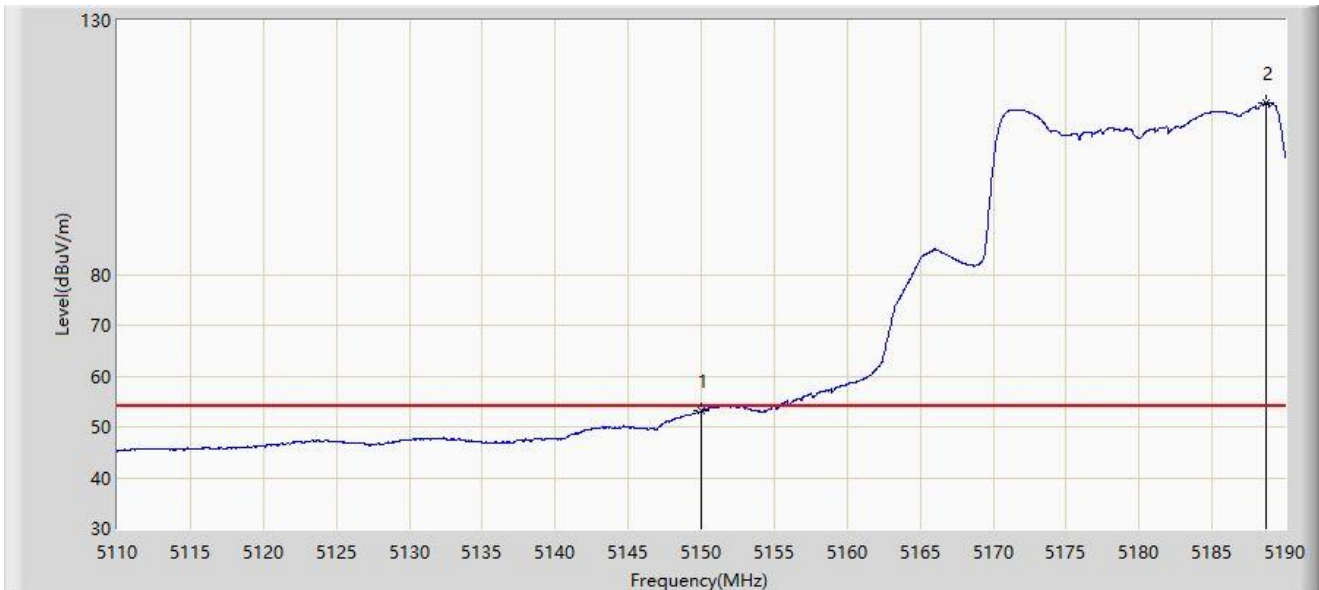


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	53.093	58.426	-0.907	54.000	-5.333	AV
2		5188.680	113.748	77.346	N/A	N/A	36.402	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

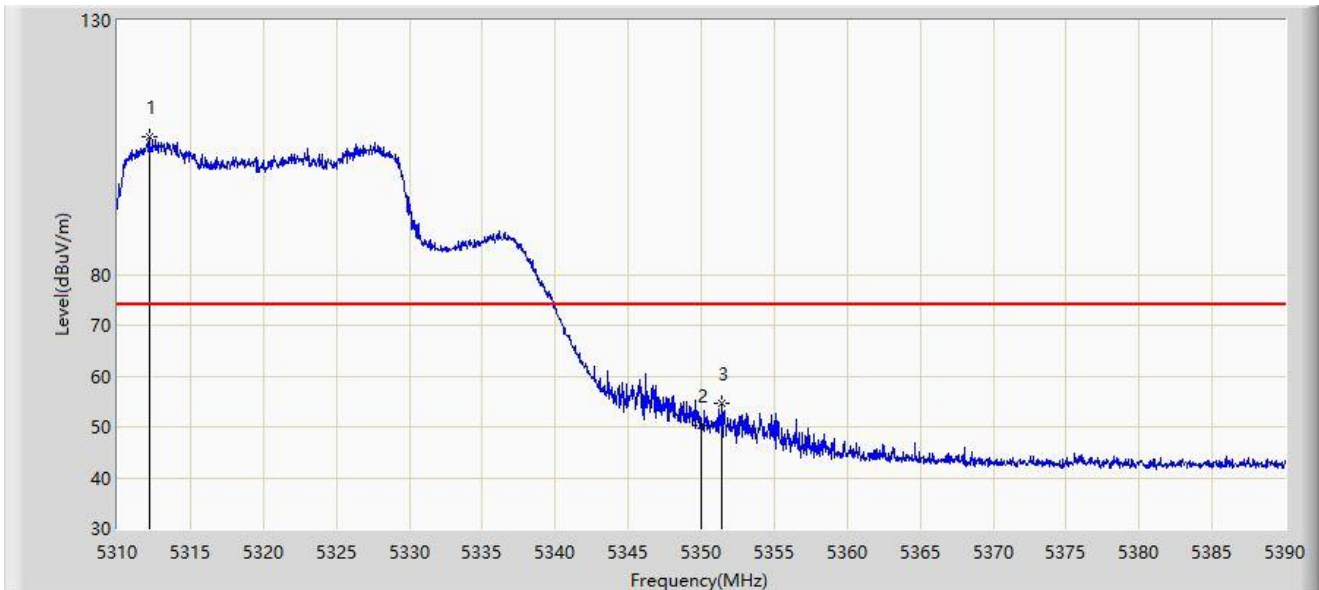


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.160	107.071	64.342	N/A	N/A	42.729	PK
2		5350.000	50.420	53.639	-23.580	74.000	-3.219	PK
3	*	5351.440	54.495	58.338	-19.505	74.000	-3.842	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

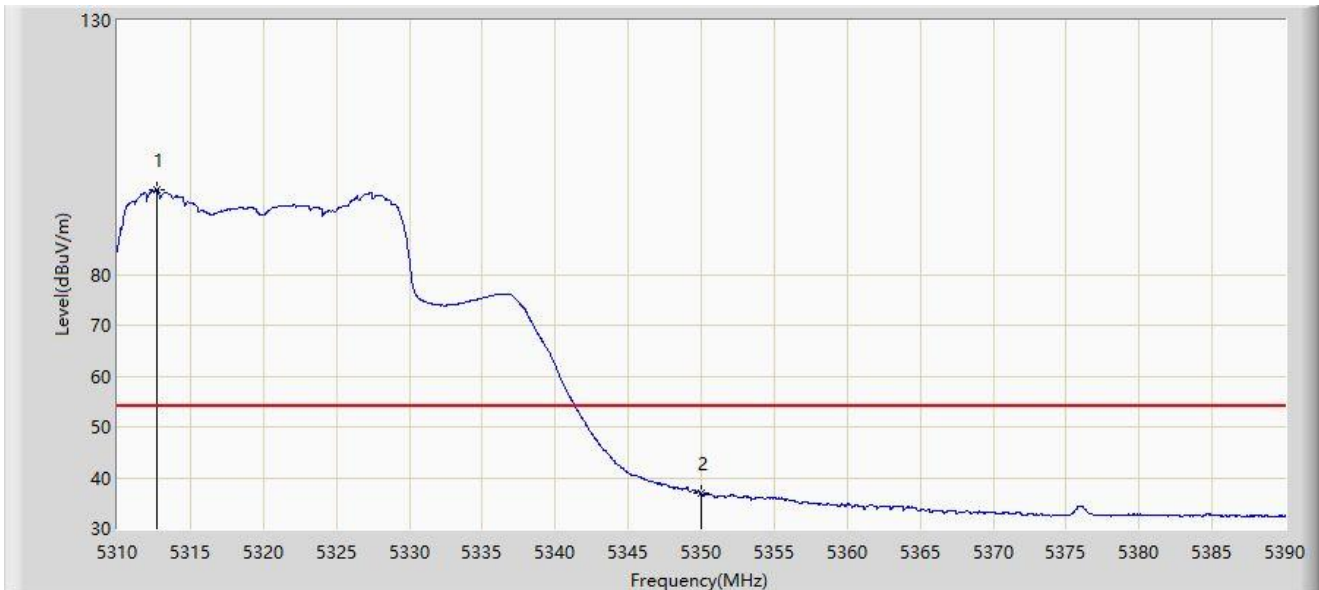


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.680	96.616	53.026	N/A	N/A	43.589	AV
2	*	5350.000	37.087	40.306	-16.913	54.000	-3.219	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

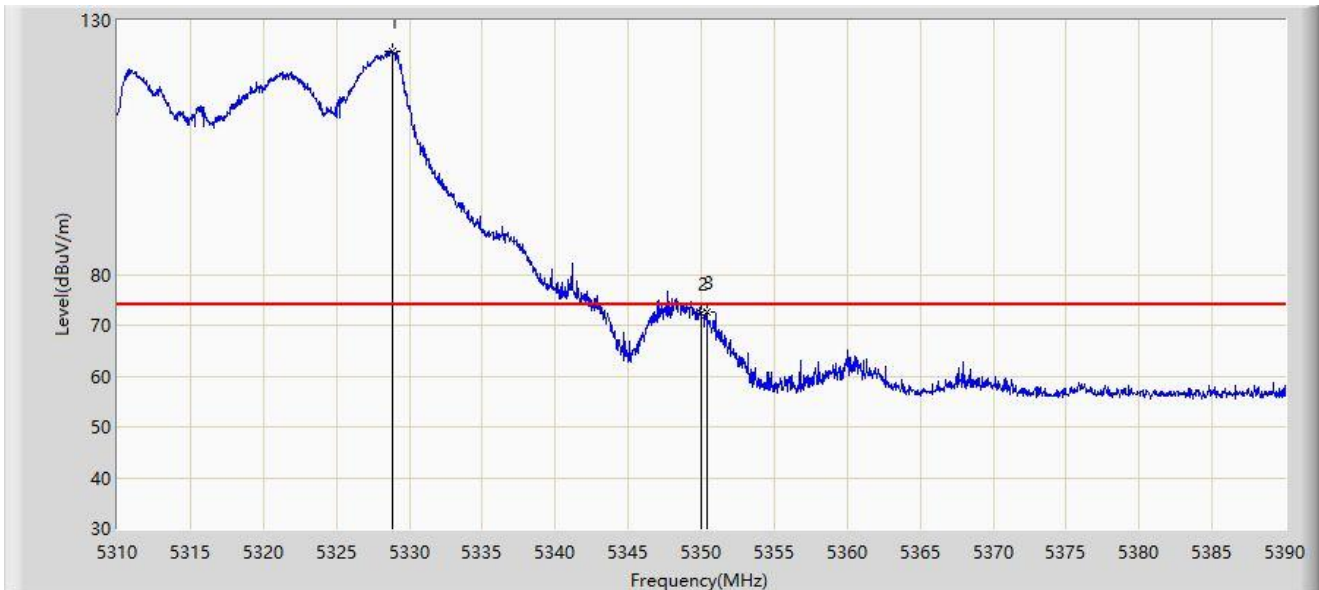


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5328.840	124.021	84.211	N/A	N/A	39.810	PK
2		5350.000	72.382	75.601	-1.618	74.000	-3.219	PK
3	*	5350.400	72.553	75.961	-1.447	74.000	-3.408	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-15
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

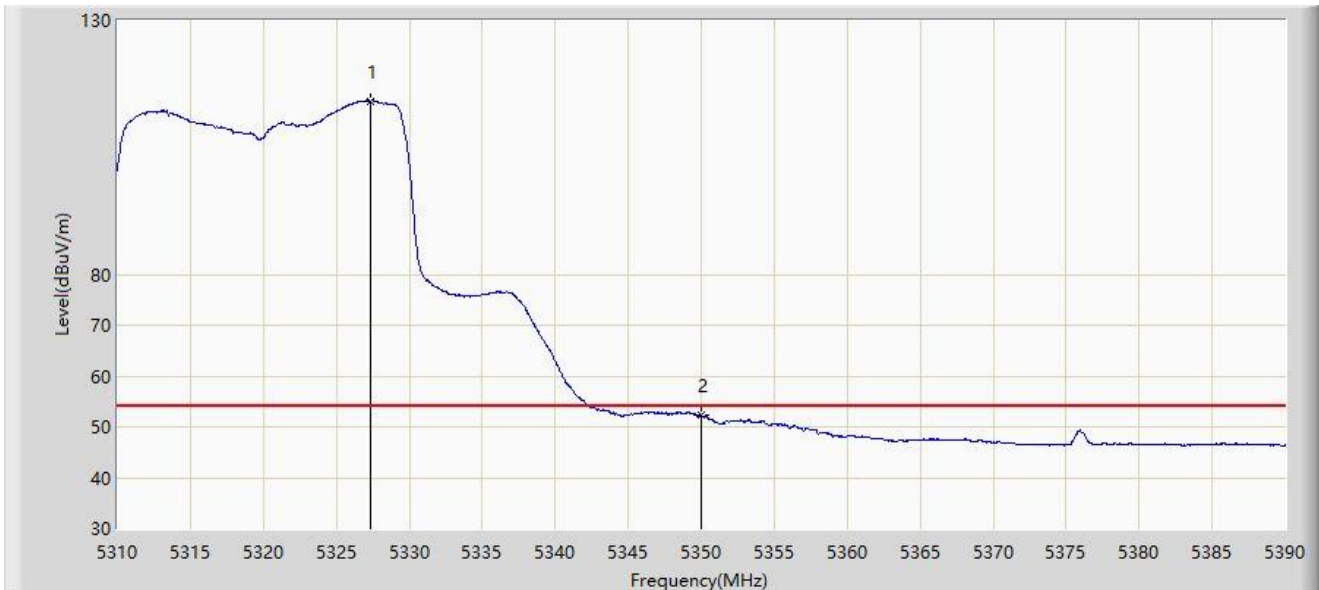


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.360	114.164	75.508	N/A	N/A	38.656	AV
2	*	5350.000	52.286	55.505	-1.714	54.000	-3.219	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

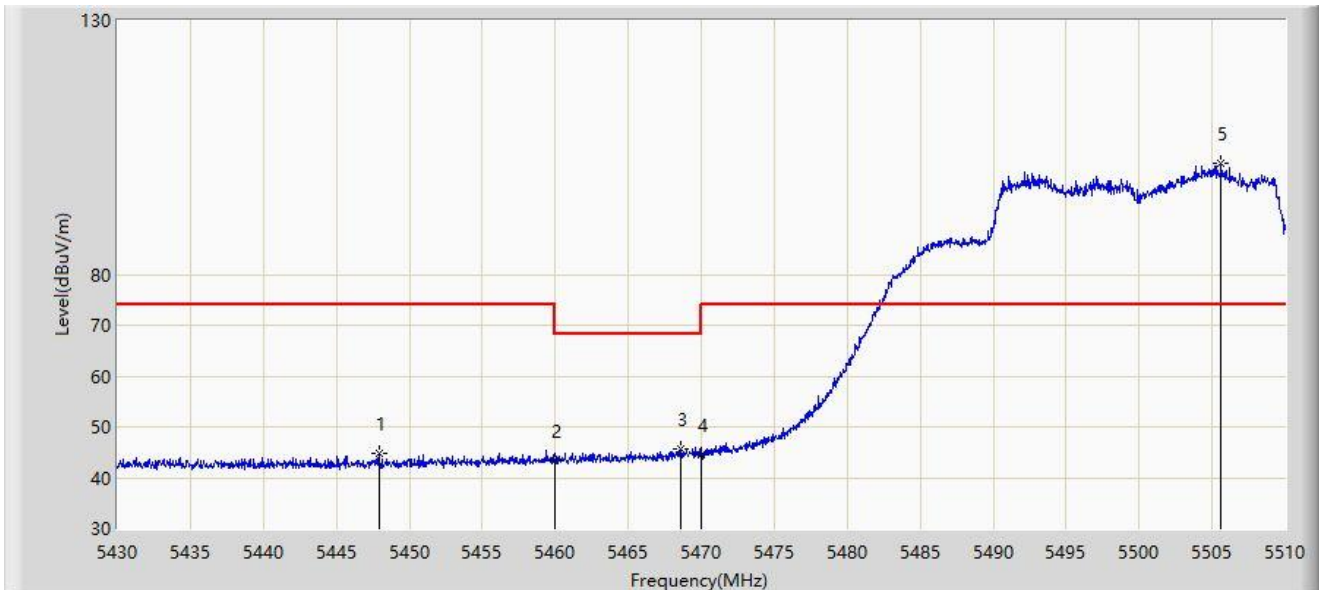


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5447.920	44.701	51.000	-29.299	74.000	-6.298	PK
2		5460.000	43.223	48.884	-24.977	68.200	-5.661	PK
3	*	5468.600	45.765	50.256	-22.435	68.200	-4.491	PK
4		5470.000	44.539	48.668	-23.661	68.200	-4.129	PK
5		5505.600	101.982	61.611	N/A	N/A	40.372	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

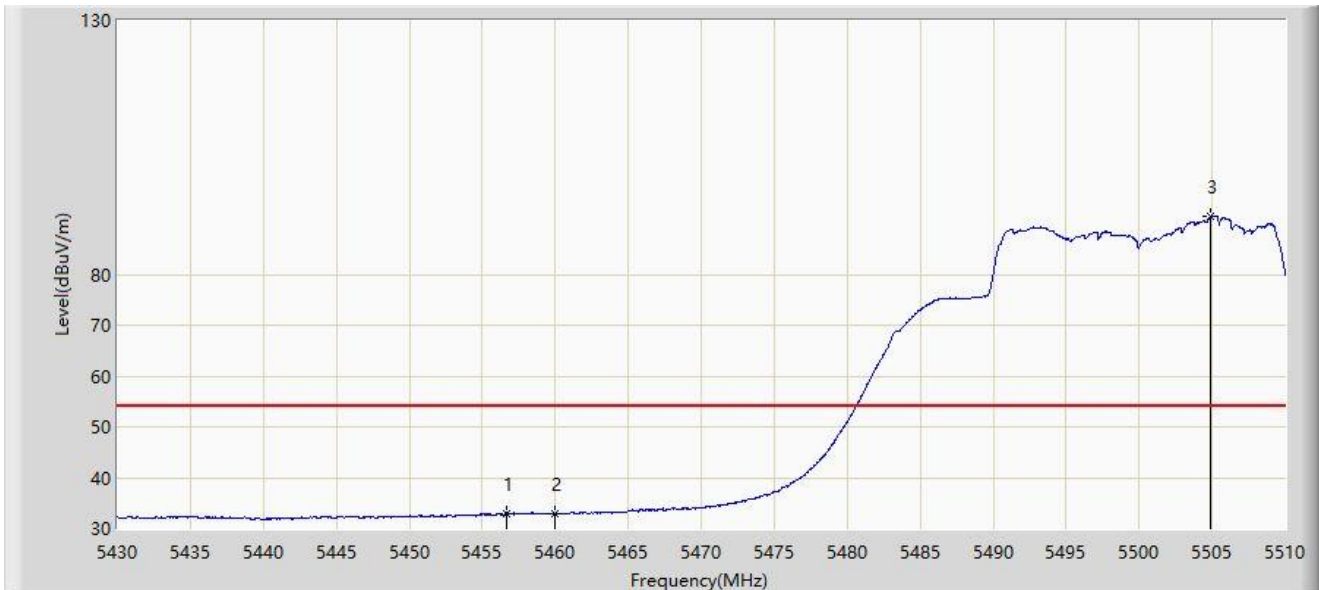


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.640	33.037	38.970	-20.963	54.000	-5.933	AV
2		5460.000	32.959	38.620	-21.041	54.000	-5.661	AV
3		5504.920	91.376	51.121	N/A	N/A	40.255	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

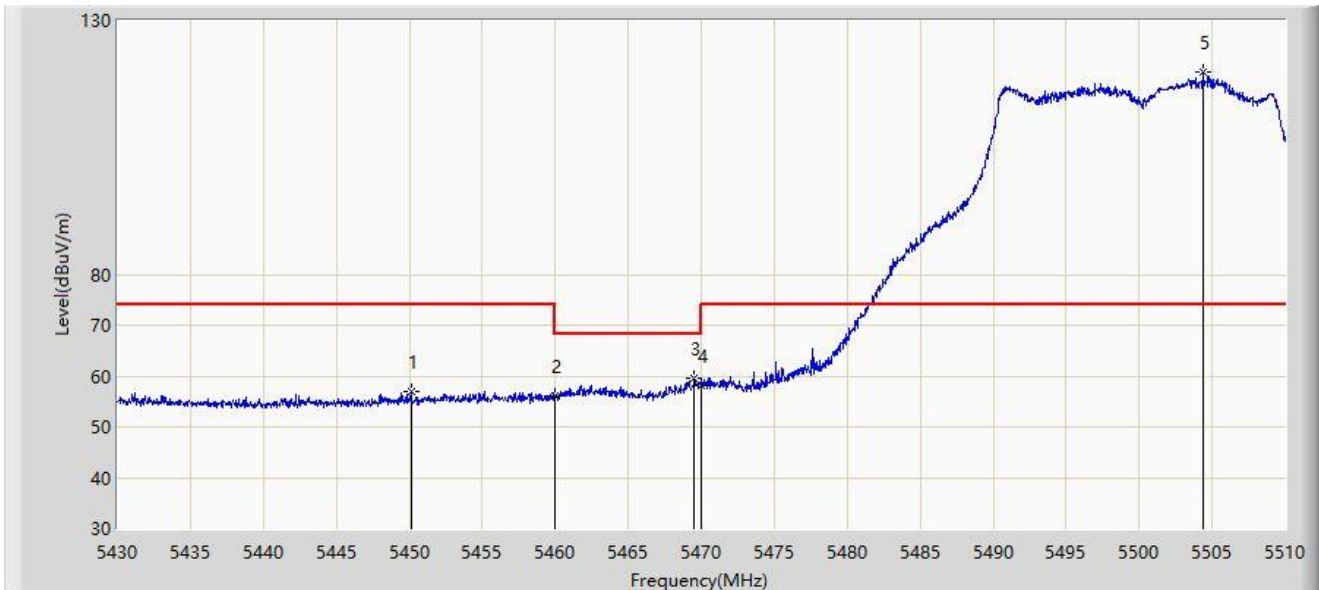


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5450.120	56.964	63.170	-17.036	74.000	-6.206	PK
2		5460.000	56.061	61.722	-12.139	68.200	-5.661	PK
3	*	5469.520	59.494	63.752	-8.706	68.200	-4.258	PK
4		5470.000	58.042	62.171	-10.158	68.200	-4.129	PK
5		5504.360	119.857	80.320	N/A	N/A	39.538	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

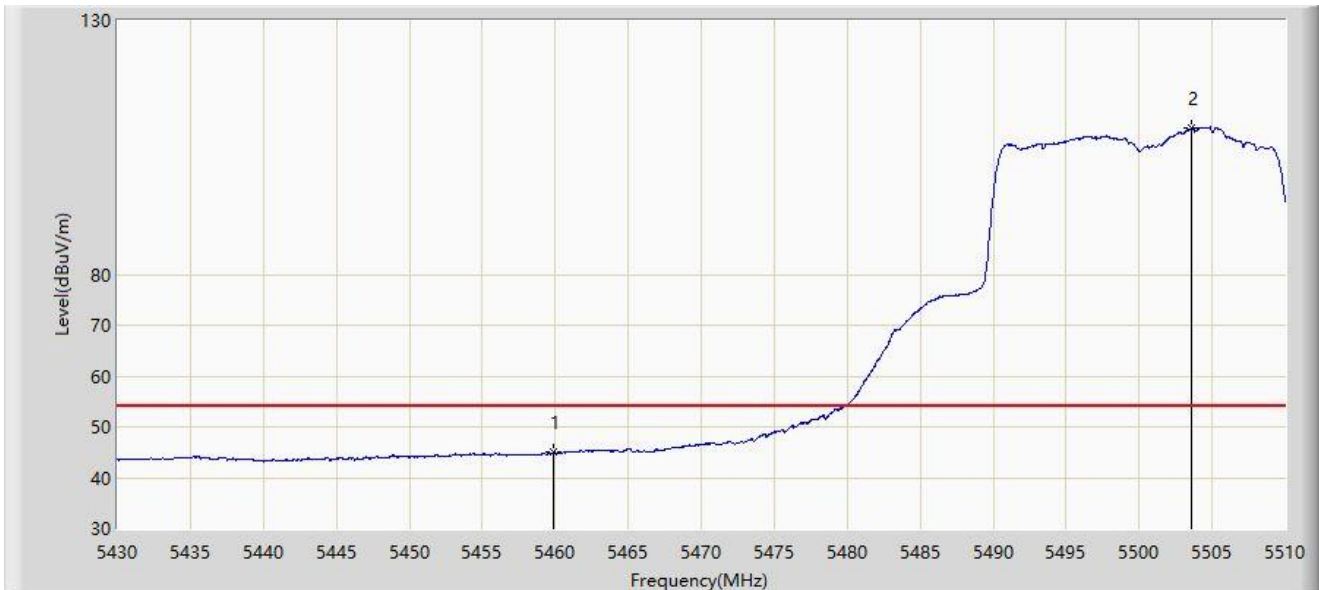


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.920	44.976	50.648	-9.024	54.000	-5.672	AV
2		5503.560	108.797	70.330	N/A	N/A	38.467	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

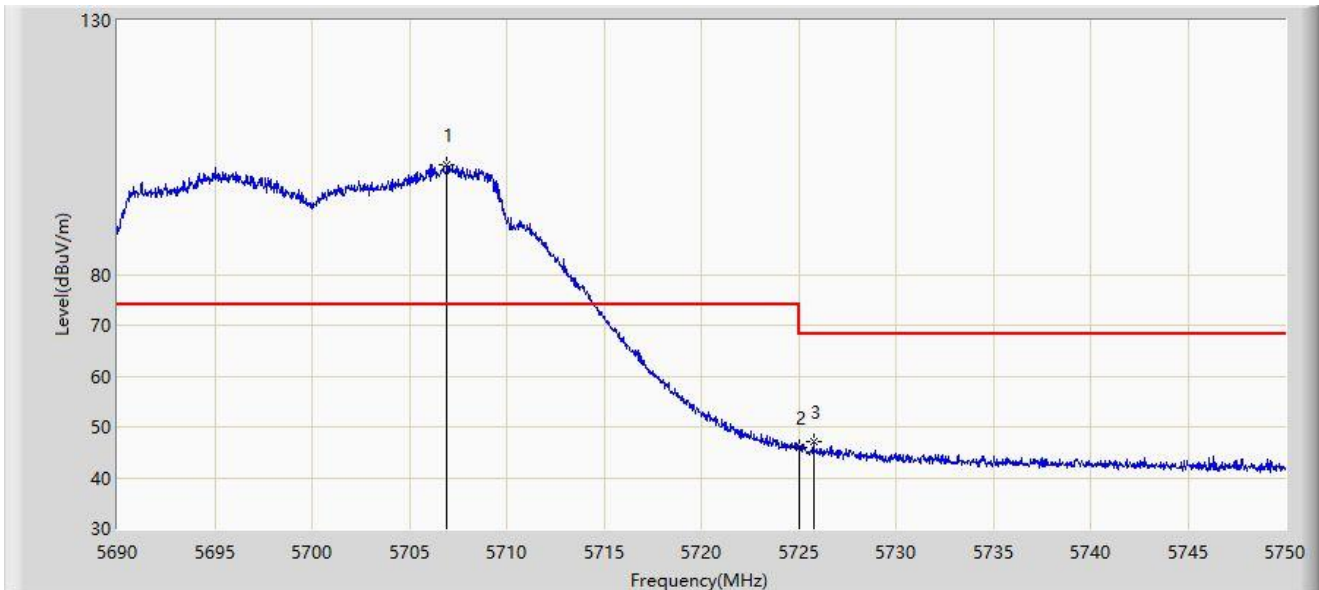


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5706.920	101.621	65.100	N/A	N/A	36.521	PK
2		5725.000	45.865	48.736	-22.335	68.200	-2.871	PK
3	*	5725.790	47.083	50.428	-21.117	68.200	-3.345	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC1	Test Date: 2023-05-16
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

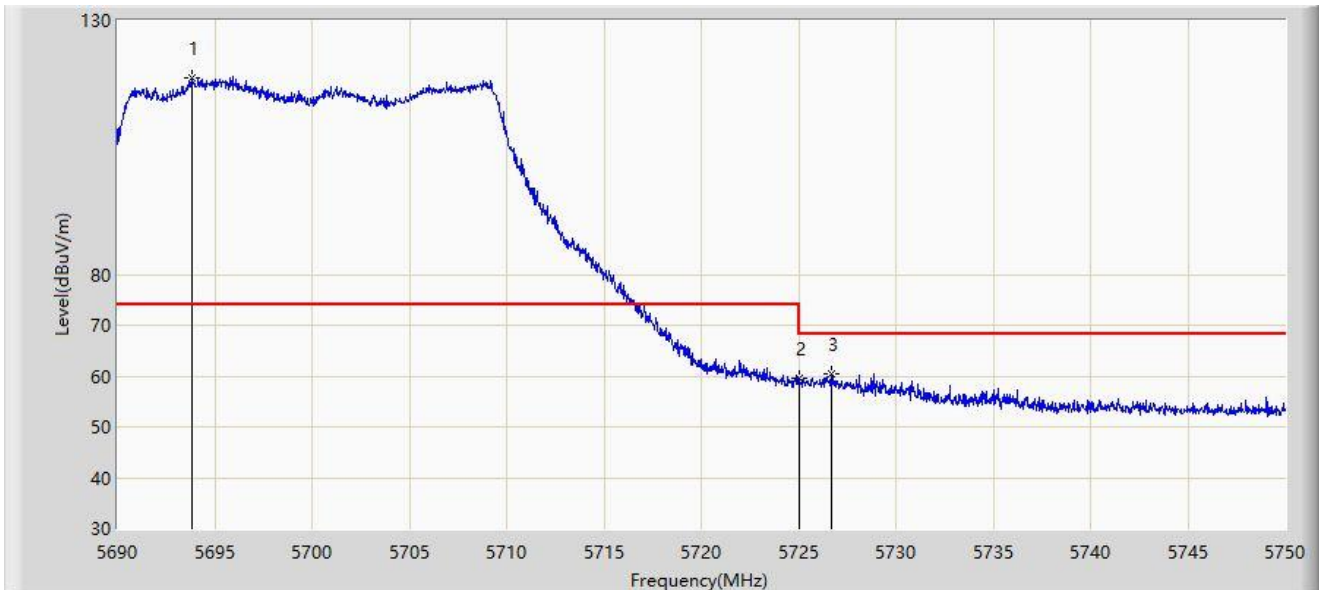


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5693.810	118.835	78.872	N/A	N/A	39.963	PK
2		5725.000	59.486	62.357	-8.714	68.200	-2.871	PK
3	*	5726.660	60.509	64.270	-7.691	68.200	-3.760	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745 MHz	

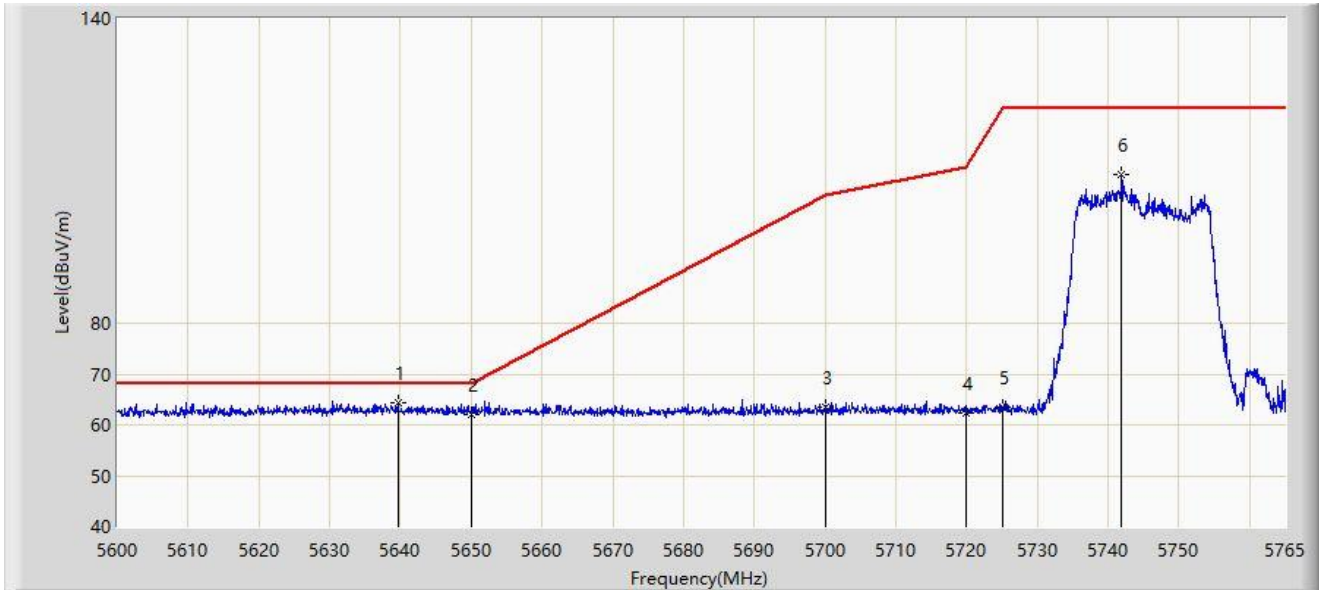


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5639.683	64.397	60.203	-3.803	68.200	4.194	PK
2		5650.000	61.955	57.795	-6.245	68.200	4.160	PK
3		5700.000	63.614	59.184	-41.586	105.200	4.430	PK
4		5720.000	62.450	57.800	-48.350	110.800	4.649	PK
5		5725.000	63.478	58.790	-58.722	122.200	4.688	PK
6		5741.900	109.246	104.831	N/A	N/A	4.414	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745 MHz	

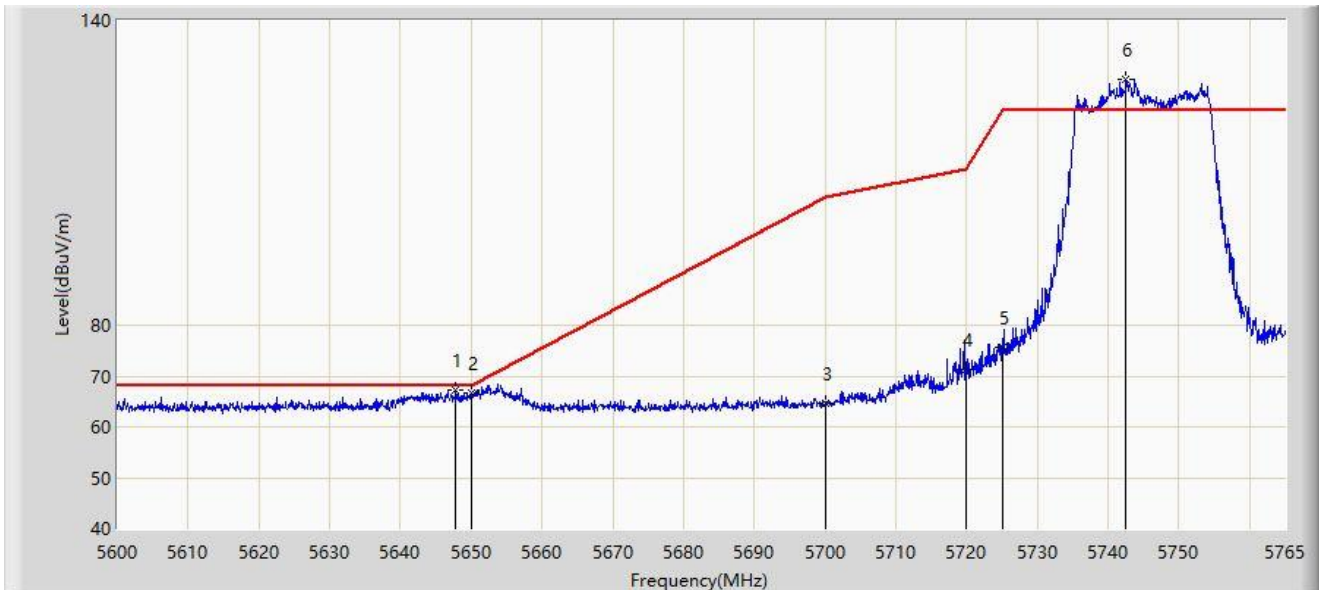


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.768	67.346	63.173	-0.854	68.200	4.173	PK
2		5650.000	66.729	62.569	-1.471	68.200	4.160	PK
3		5700.000	64.524	60.094	-40.676	105.200	4.430	PK
4		5720.000	71.372	66.722	-39.428	110.800	4.649	PK
5		5725.000	75.562	70.874	-46.638	122.200	4.688	PK
6		5742.560	128.330	123.927	N/A	N/A	4.403	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825 MHz	

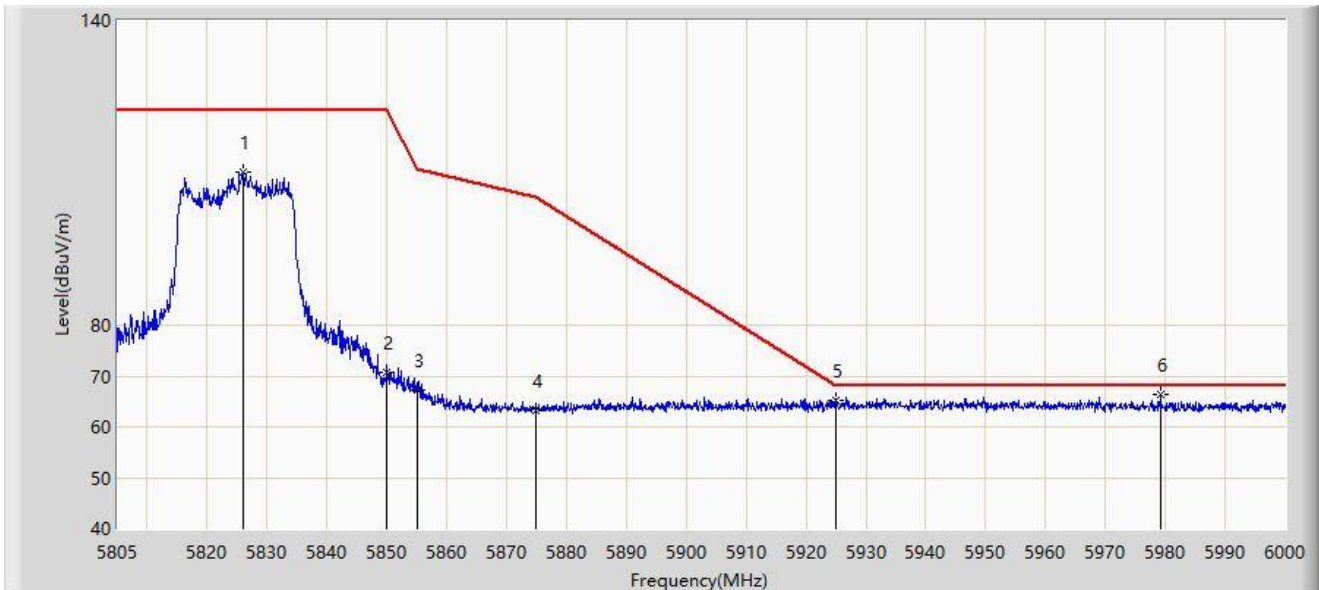


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5825.962	110.071	105.237	N/A	N/A	4.835	PK
2		5850.000	70.790	65.830	-51.410	122.200	4.960	PK
3		5855.000	67.387	62.368	-43.413	110.800	5.019	PK
4		5875.000	63.313	58.177	-41.887	105.200	5.136	PK
5		5925.000	65.120	59.850	-3.080	68.200	5.271	PK
6	*	5979.232	66.313	61.066	-1.887	68.200	5.247	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825 MHz	

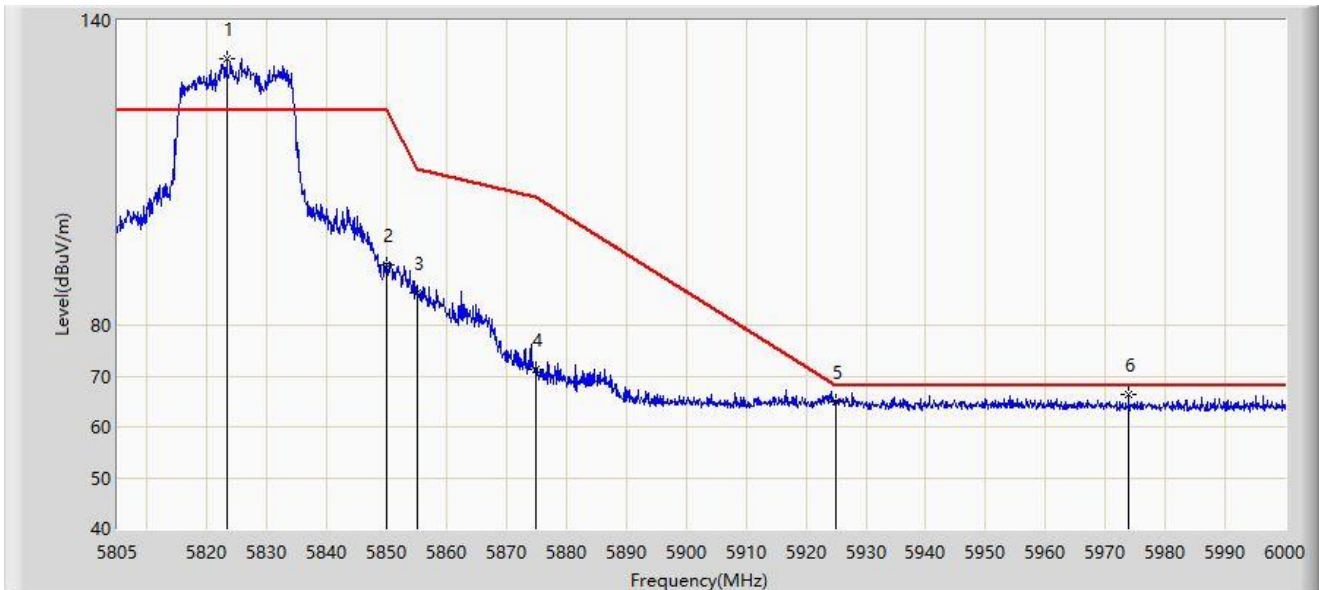


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5823.232	132.574	127.708	N/A	N/A	4.866	PK
2		5850.000	91.970	87.010	-30.230	122.200	4.960	PK
3		5855.000	86.364	81.345	-24.436	110.800	5.019	PK
4		5875.000	71.307	66.171	-33.893	105.200	5.136	PK
5		5925.000	64.835	59.565	-3.365	68.200	5.271	PK
6	*	5973.870	66.289	61.000	-1.911	68.200	5.290	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

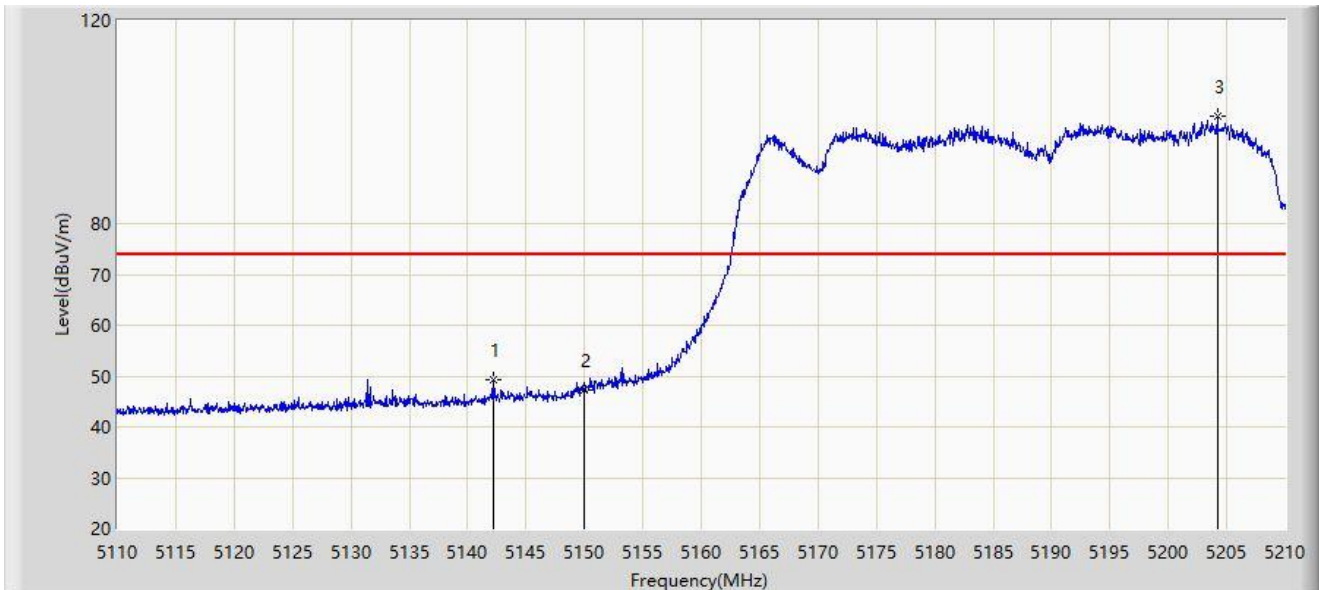


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5142.150	49.230	53.187	-24.770	74.000	-3.957	PK
2		5150.000	47.215	50.240	-26.785	74.000	-3.026	PK
3		5204.200	101.081	59.015	N/A	N/A	42.066	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

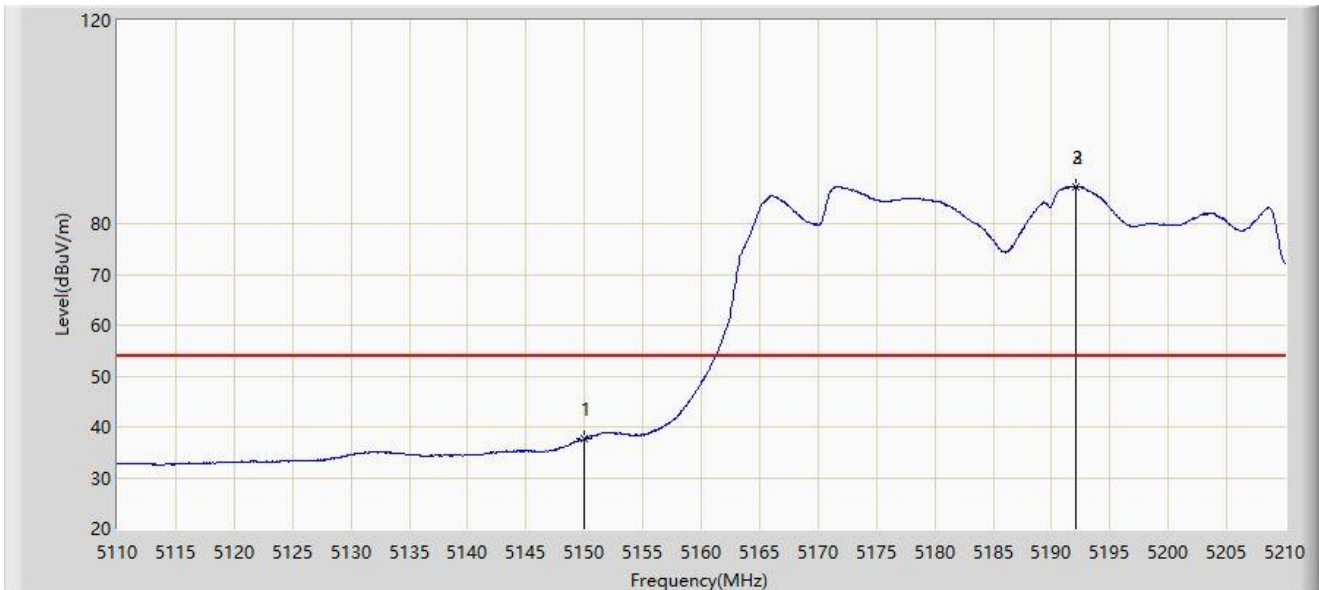


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5150.000	37.640	40.665	-16.360	54.000	-3.026	AV
2		5192.050	87.283	49.911	N/A	N/A	37.371	AV
3	*	5192.050	87.283	49.911	33.283	54.000	37.371	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

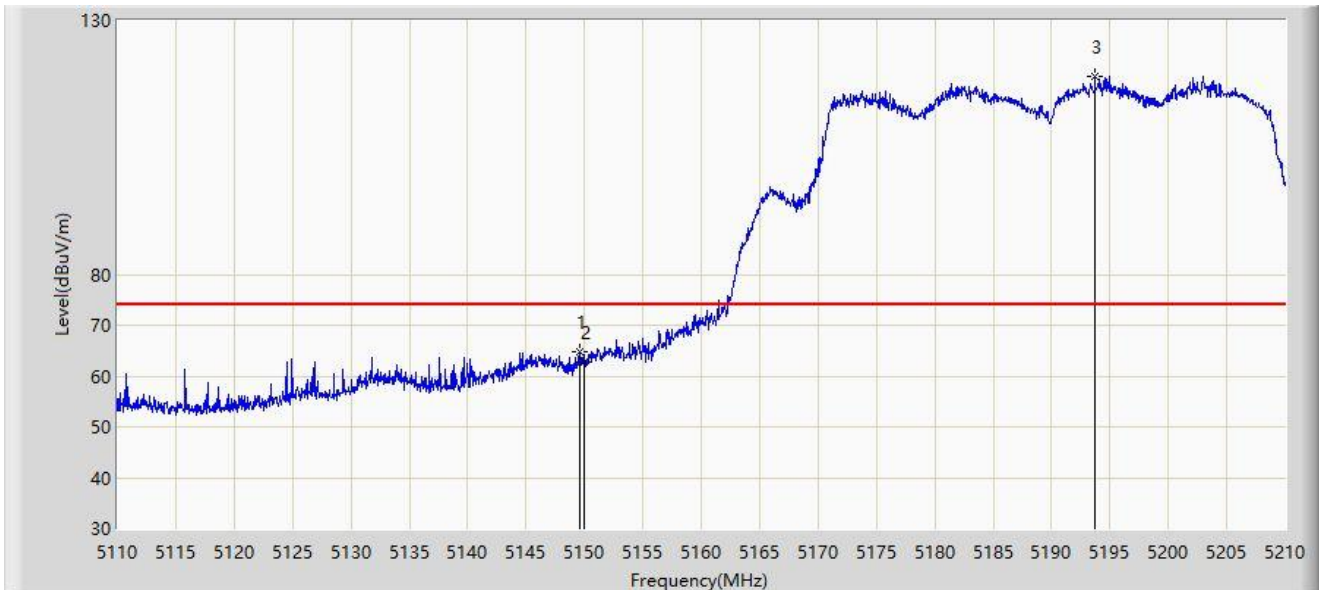


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.650	64.866	67.984	-9.134	74.000	-3.118	PK
2		5150.000	62.748	65.773	-11.252	74.000	-3.026	PK
3		5193.700	118.983	83.079	N/A	N/A	35.904	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

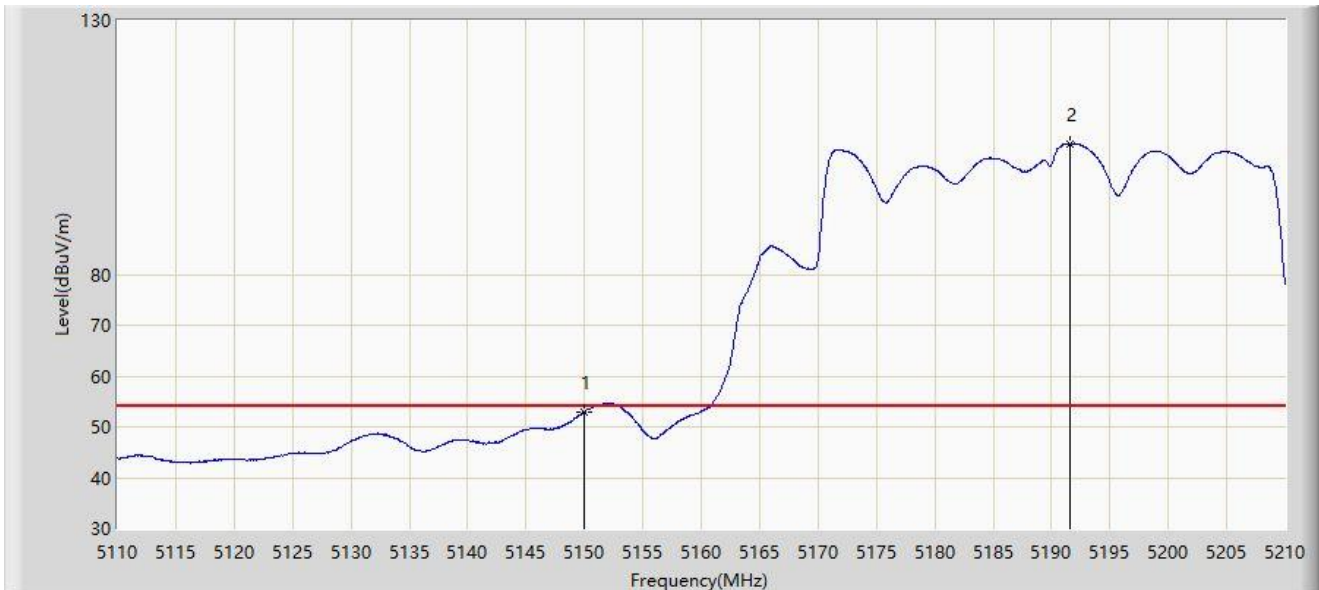


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	52.911	55.936	-1.089	54.000	-3.026	AV
2		5191.600	105.773	67.950	N/A	N/A	37.824	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

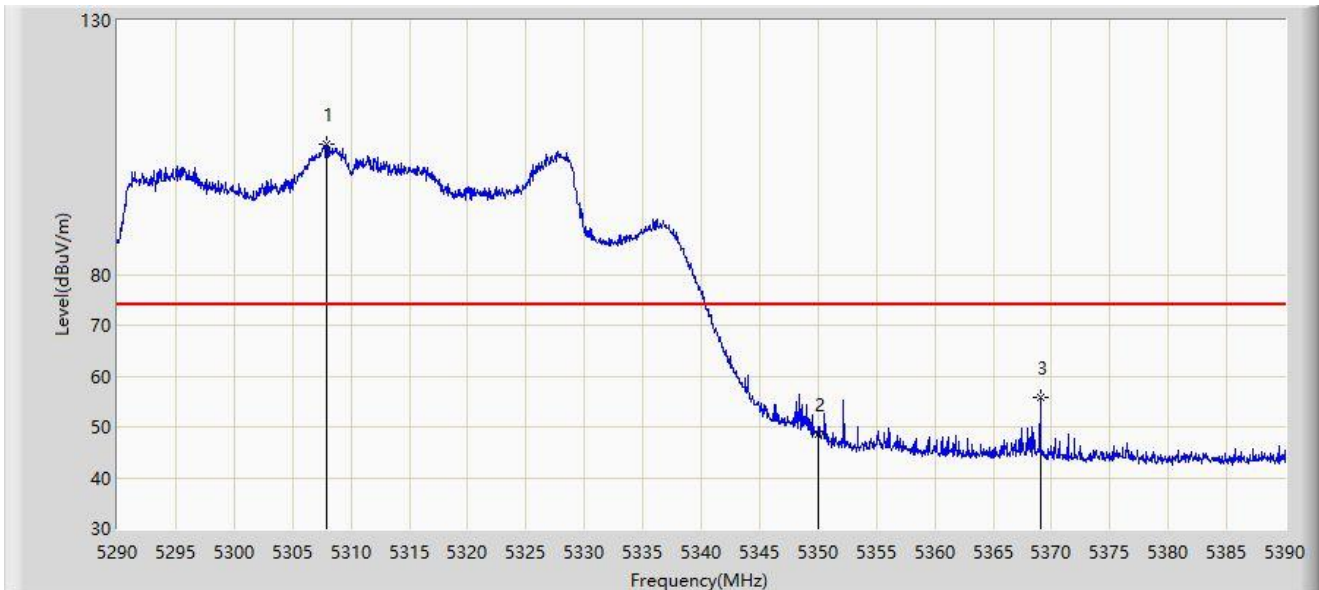


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5307.900	105.518	65.727	N/A	N/A	39.791	PK
2		5350.000	48.666	50.116	-25.334	74.000	-1.451	PK
3	*	5369.050	55.841	60.778	-18.159	74.000	-4.937	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

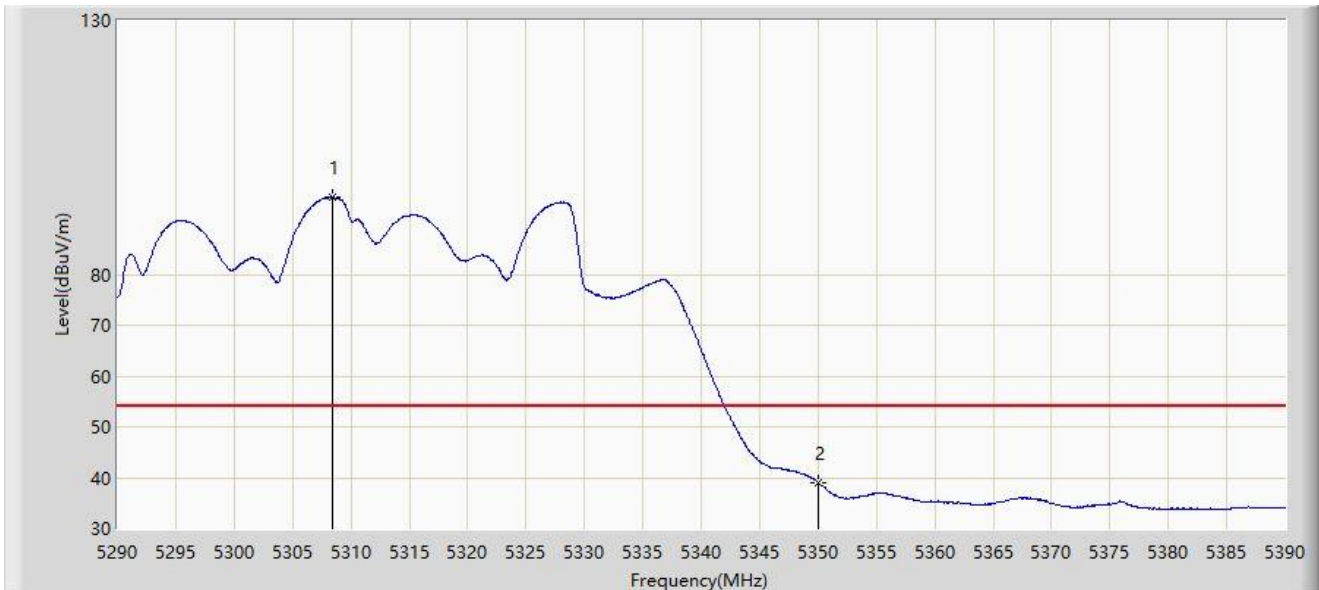


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5308.450	95.207	54.928	N/A	N/A	40.279	AV
2	*	5350.000	39.041	40.491	-14.959	54.000	-1.451	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

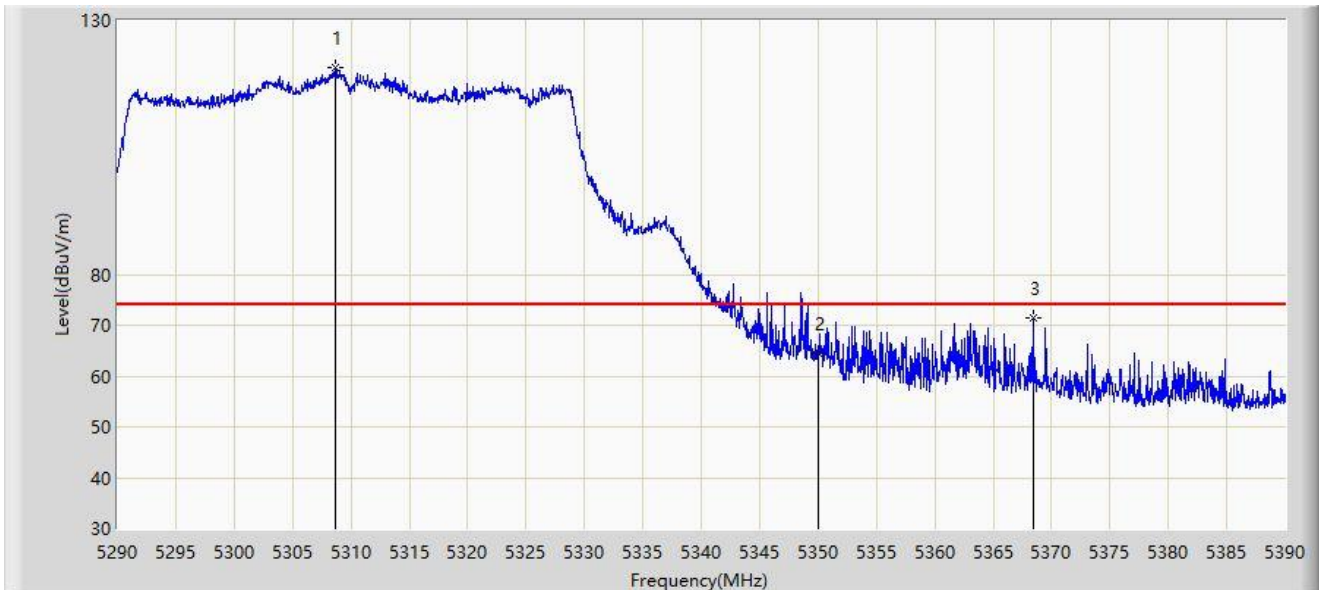


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5308.700	120.770	80.245	N/A	N/A	40.526	PK
2		5350.000	64.399	65.849	-9.601	74.000	-1.451	PK
3	*	5368.400	71.559	76.478	-2.441	74.000	-4.919	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

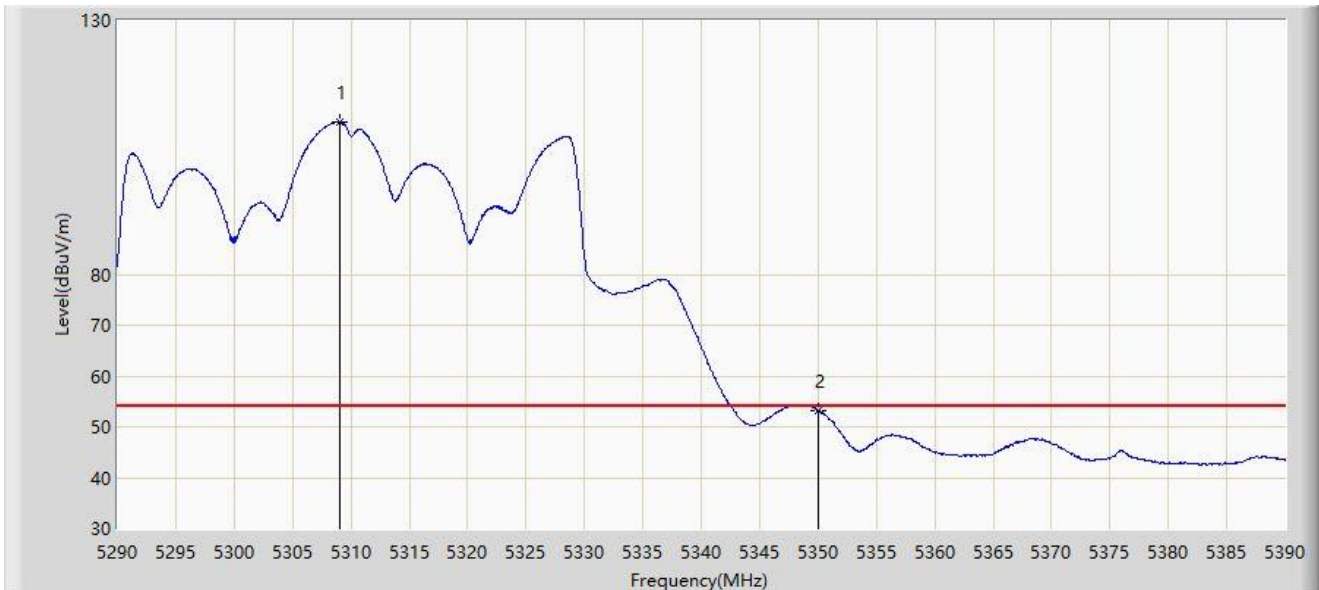


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5309.100	110.023	69.104	N/A	N/A	40.919	AV
2	*	5350.000	53.262	54.712	-0.738	54.000	-1.451	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

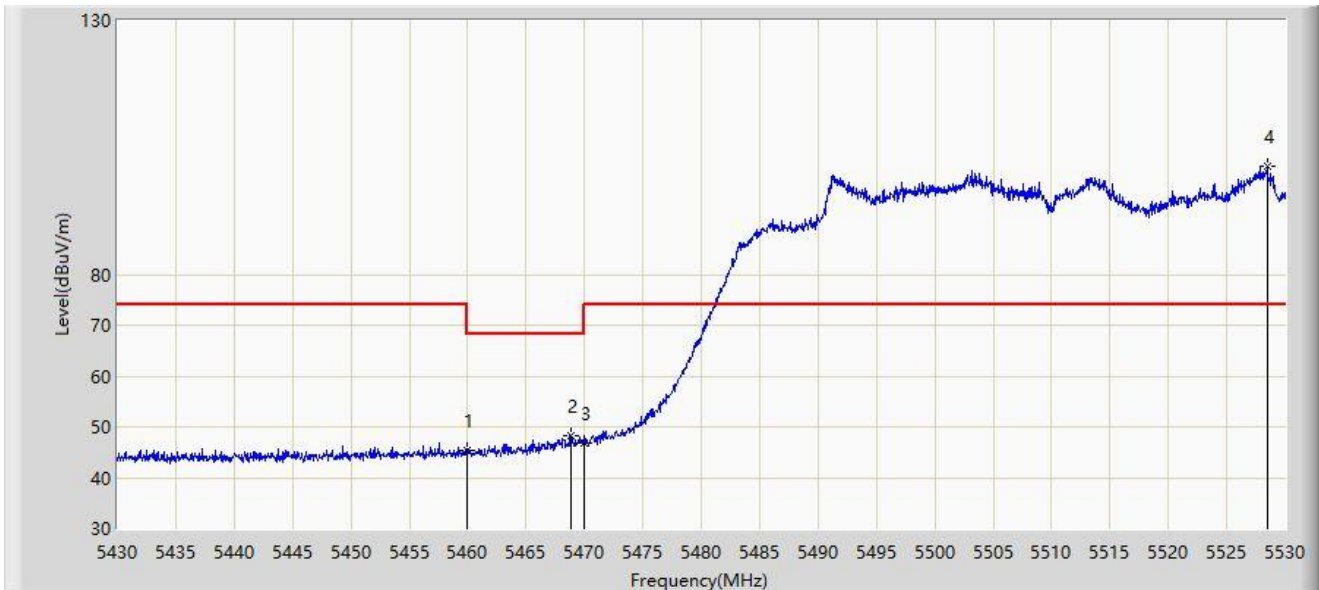


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	45.282	48.957	-22.918	68.200	-3.675	PK
2	*	5468.800	48.244	50.605	-19.956	68.200	-2.361	PK
3		5470.000	46.851	48.783	-21.349	68.200	-1.932	PK
4		5528.500	101.390	56.093	N/A	N/A	45.298	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

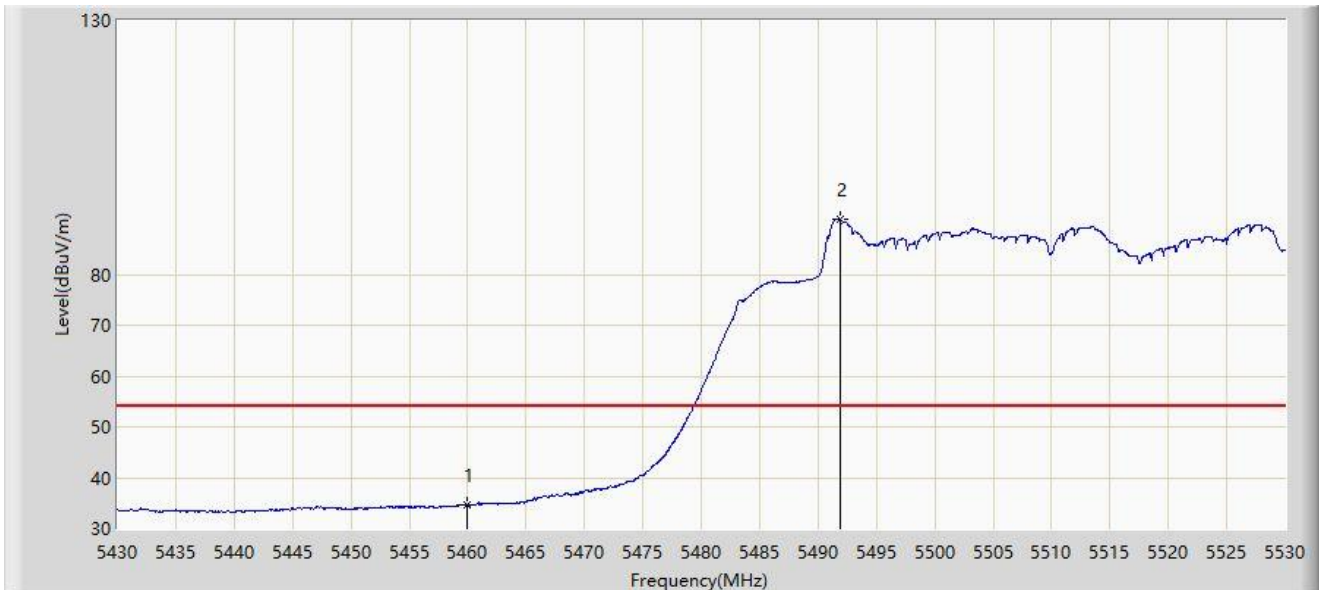


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	34.569	38.244	-19.431	54.000	-3.675	AV
2		5491.850	90.819	45.964	N/A	N/A	44.854	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

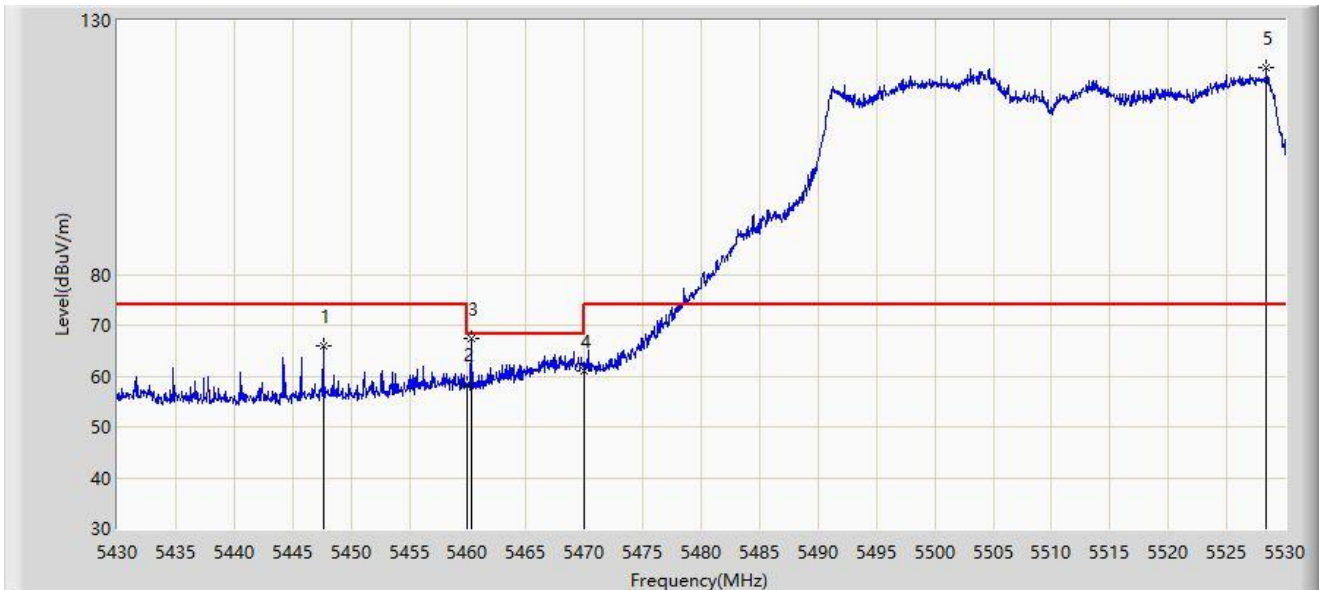

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5447.650	65.808	70.250	-8.192	74.000	-4.442	PK
2		5460.000	58.514	62.189	-9.686	68.200	-3.675	PK
3	*	5460.300	67.383	71.084	-0.817	68.200	-3.701	PK
4		5470.000	60.959	62.891	-7.241	68.200	-1.932	PK
5		5528.400	120.648	75.498	N/A	N/A	45.150	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.100	49.277	53.061	-4.723	54.000	-3.784	AV
2		5460.000	48.586	52.261	-5.414	54.000	-3.675	AV
3		5504.000	110.342	67.018	N/A	N/A	43.324	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

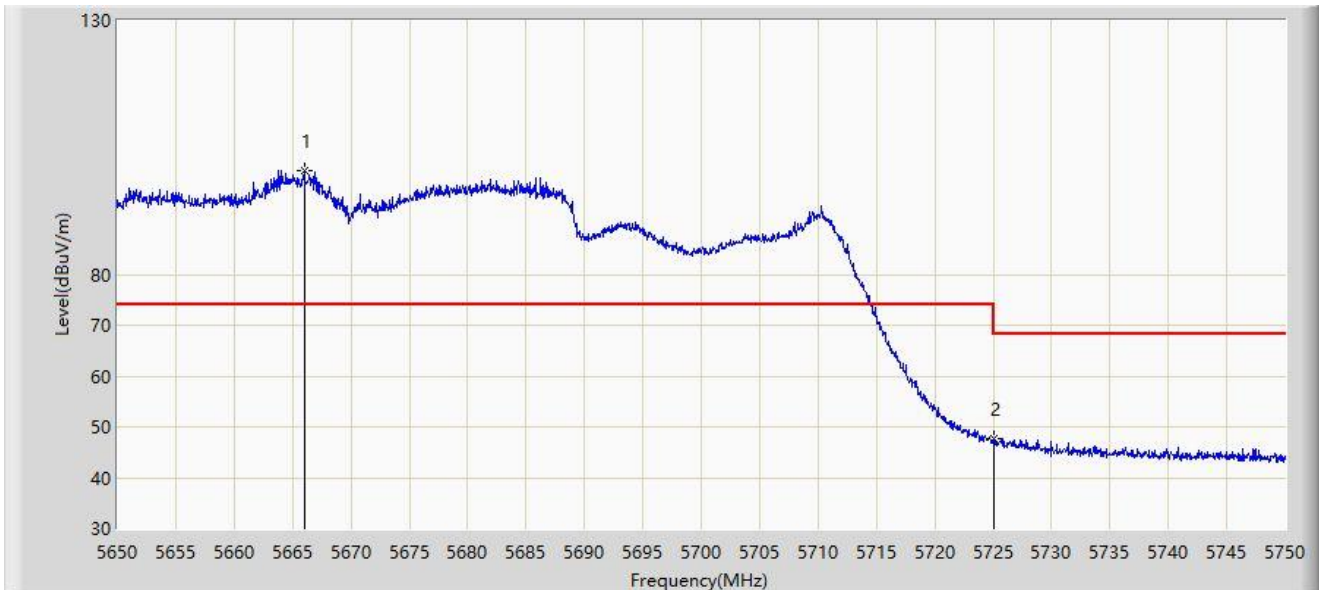


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5666.000	100.367	57.174	N/A	N/A	43.193	PK
2	*	5725.000	47.669	49.264	-20.531	68.200	-1.596	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-18
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

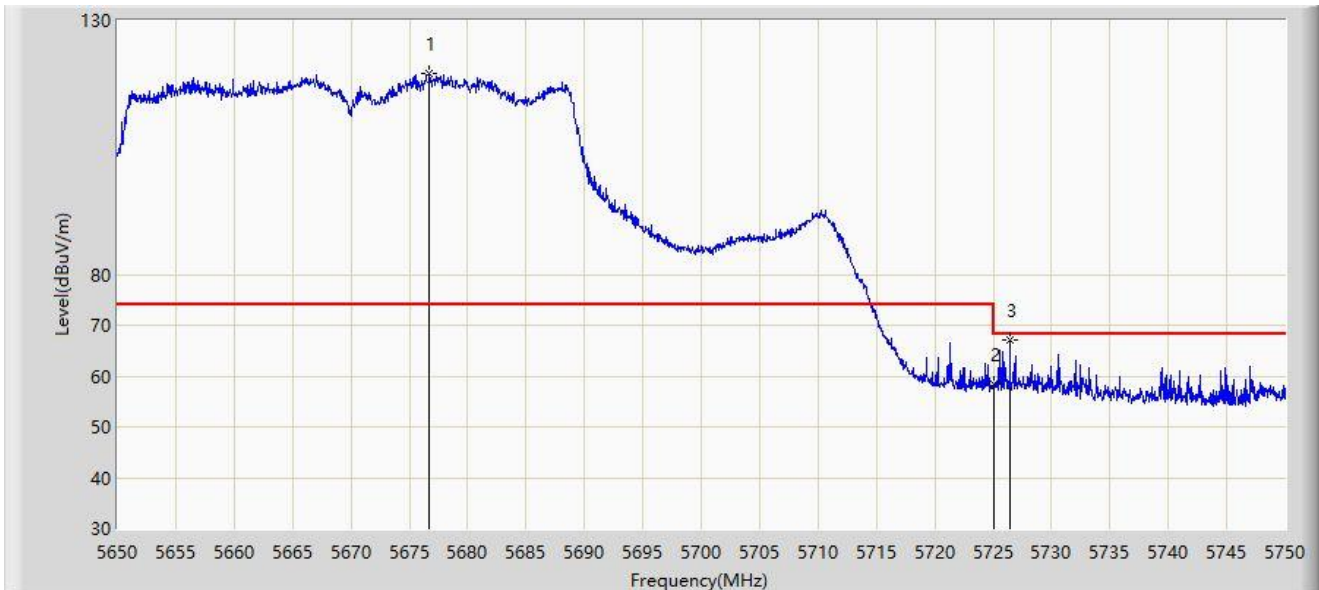


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5676.750	119.449	80.434	N/A	N/A	39.015	PK
2		5725.000	58.295	59.890	-9.905	68.200	-1.596	PK
3	*	5726.450	67.163	69.468	-1.037	68.200	-2.305	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755 MHz	

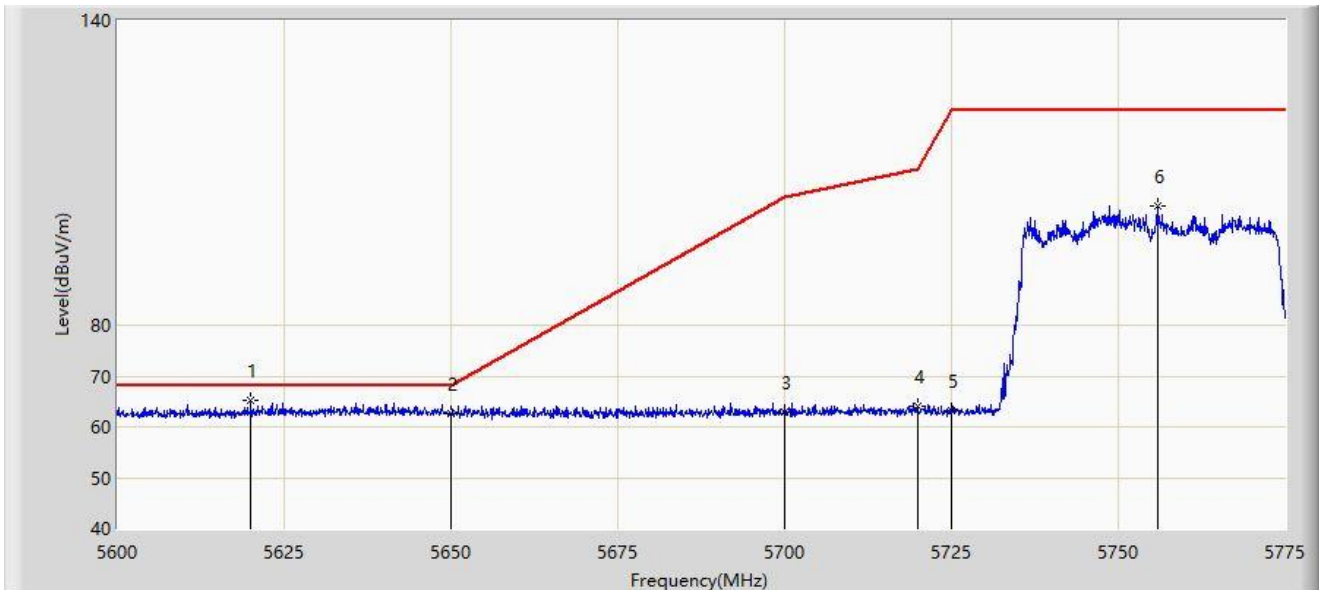


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5619.950	65.248	61.352	-2.952	68.200	3.895	PK
2		5650.000	62.509	58.349	-5.691	68.200	4.160	PK
3		5700.000	62.834	58.404	-42.366	105.200	4.430	PK
4		5720.000	63.963	59.313	-46.837	110.800	4.649	PK
5		5725.000	63.148	58.460	-59.052	122.200	4.688	PK
6		5756.013	103.532	98.999	N/A	N/A	4.533	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755 MHz	

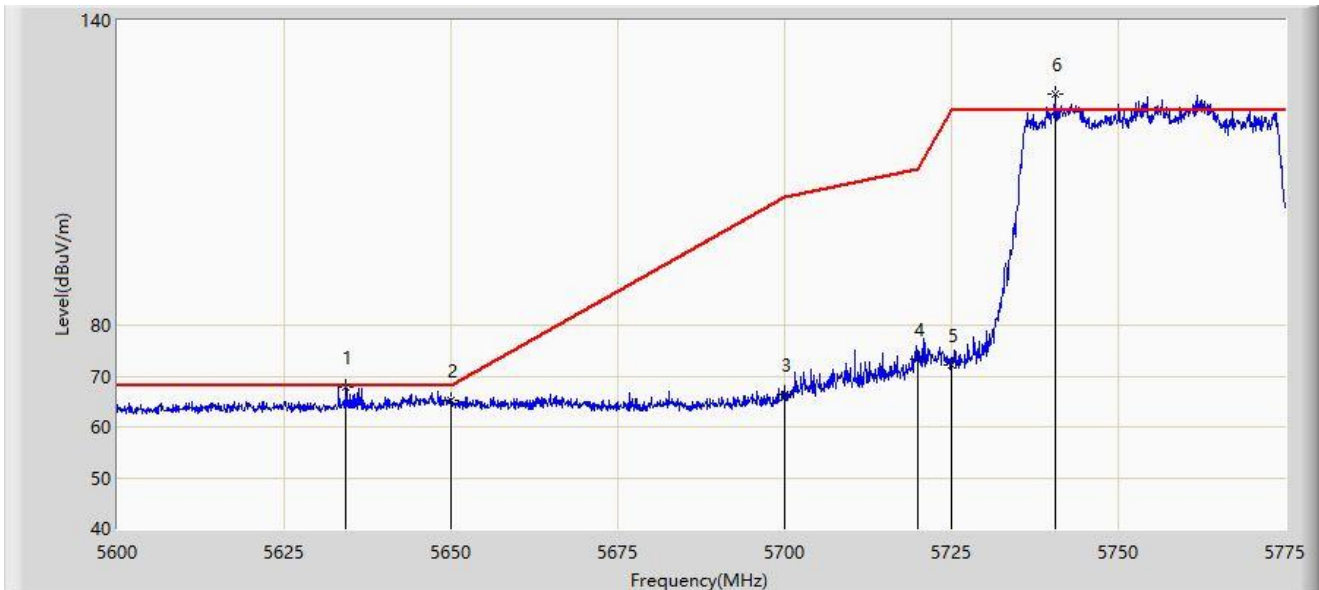


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.300	67.695	63.568	-0.505	68.200	4.126	PK
2		5650.000	65.297	61.137	-2.903	68.200	4.160	PK
3		5700.000	66.499	62.069	-38.701	105.200	4.430	PK
4		5720.000	73.314	68.664	-37.486	110.800	4.649	PK
5		5725.000	72.153	67.465	-50.047	122.200	4.688	PK
6		5740.525	125.372	120.932	N/A	N/A	4.440	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795 MHz	

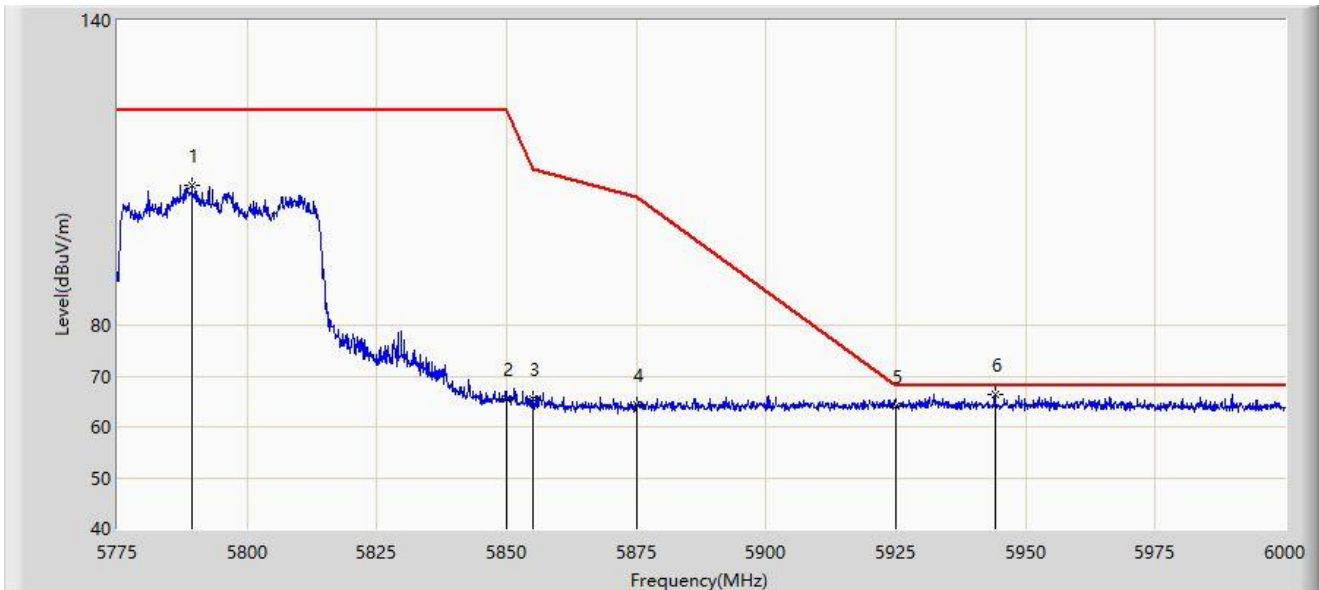


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5789.400	107.608	102.599	N/A	N/A	5.009	PK
2		5850.000	65.510	60.550	-56.690	122.200	4.960	PK
3		5855.000	65.635	60.616	-45.165	110.800	5.019	PK
4		5875.000	64.380	59.244	-40.820	105.200	5.136	PK
5		5925.000	64.060	58.790	-4.140	68.200	5.271	PK
6	*	5944.087	66.238	60.892	-1.962	68.200	5.346	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-05-19
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: WIFI 6 (802.11AX) 4x4 MU-MIMO TRI BAND ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ax-HE40 at 5795 MHz	

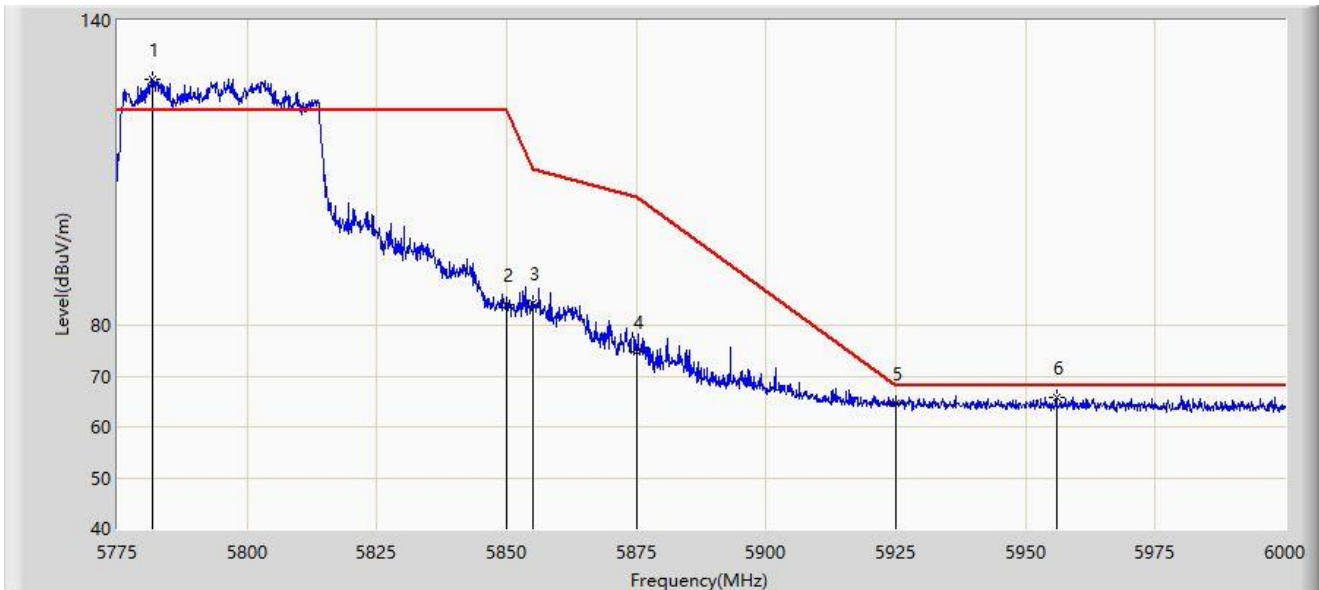


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5781.638	128.443	123.528	N/A	N/A	4.914	PK
2		5850.000	84.138	79.178	-38.062	122.200	4.960	PK
3		5855.000	84.451	79.432	-26.349	110.800	5.019	PK
4		5875.000	74.743	69.607	-30.457	105.200	5.136	PK
5		5925.000	64.758	59.488	-3.442	68.200	5.271	PK
6	*	5955.900	65.935	60.530	-2.265	68.200	5.405	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

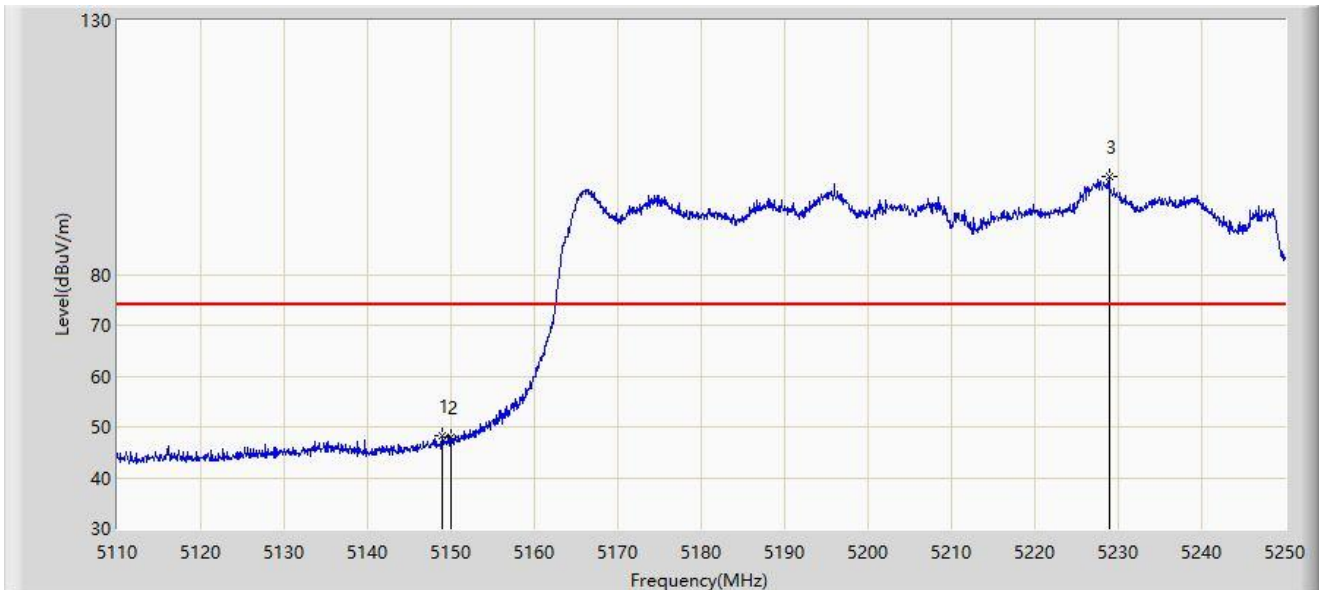


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.990	48.154	51.390	-25.846	74.000	-3.236	PK
2		5150.000	47.955	50.980	-26.045	74.000	-3.026	PK
3		5228.860	99.161	62.458	N/A	N/A	36.702	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

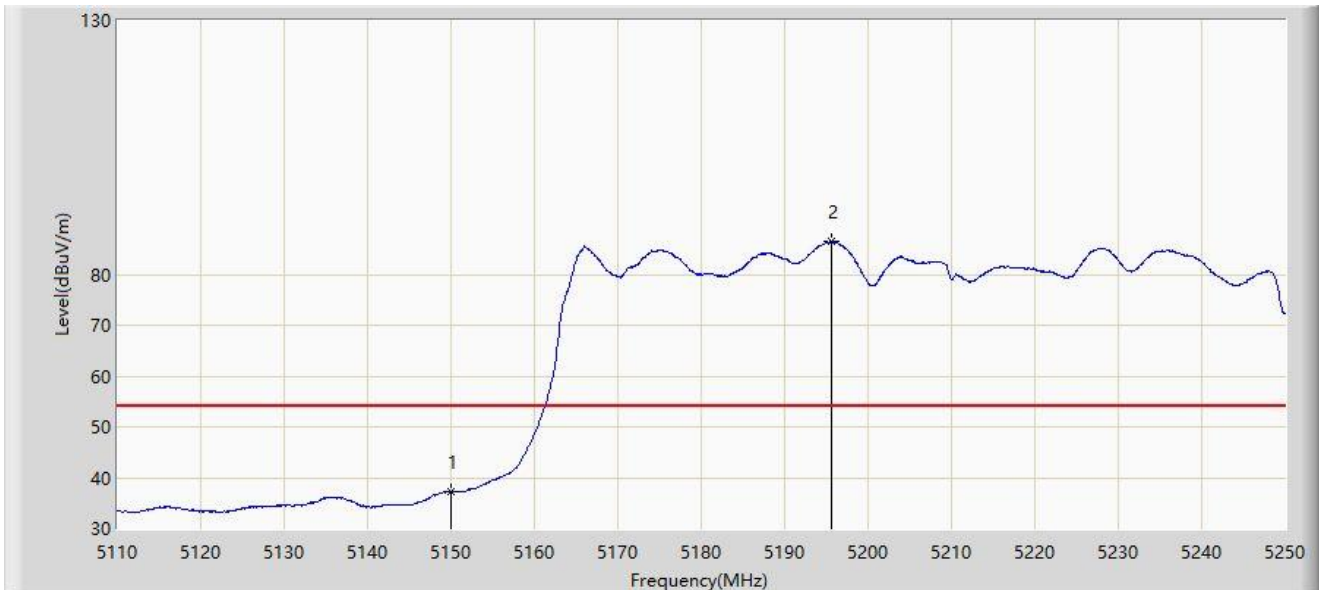


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	37.224	40.249	-16.776	54.000	-3.026	AV
2		5195.680	86.423	50.983	N/A	N/A	35.440	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

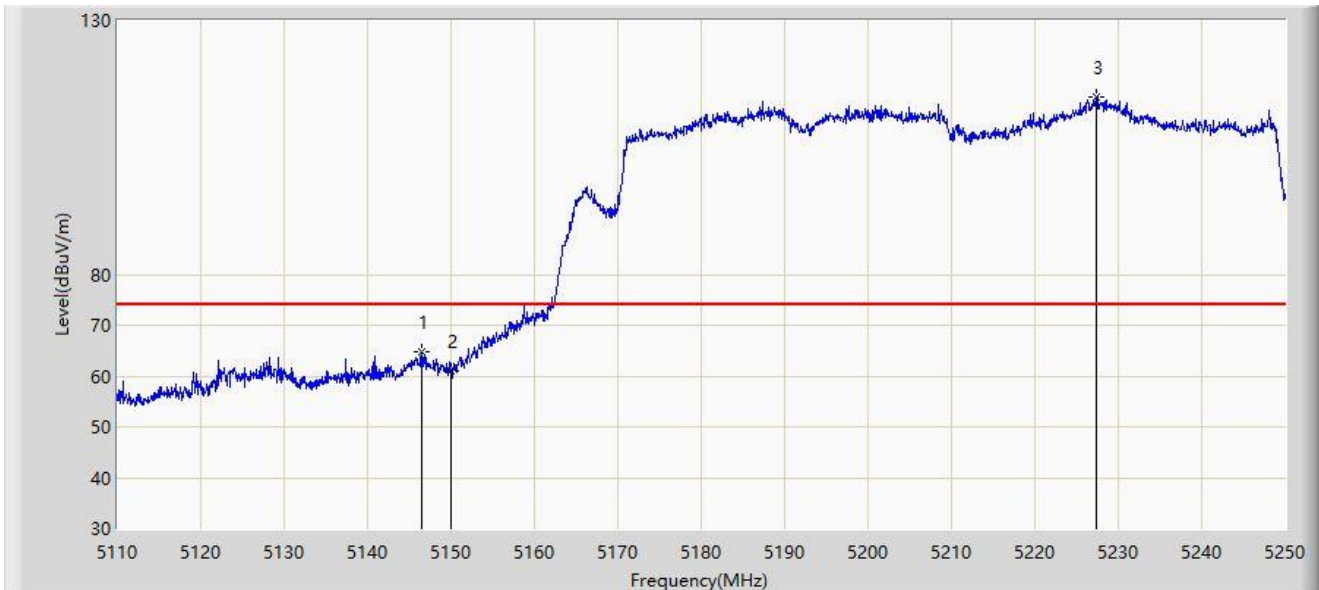


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.470	64.710	68.394	-9.290	74.000	-3.684	PK
2		5150.000	60.980	64.005	-13.020	74.000	-3.026	PK
3		5227.390	114.950	78.034	N/A	N/A	36.917	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-05-17
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

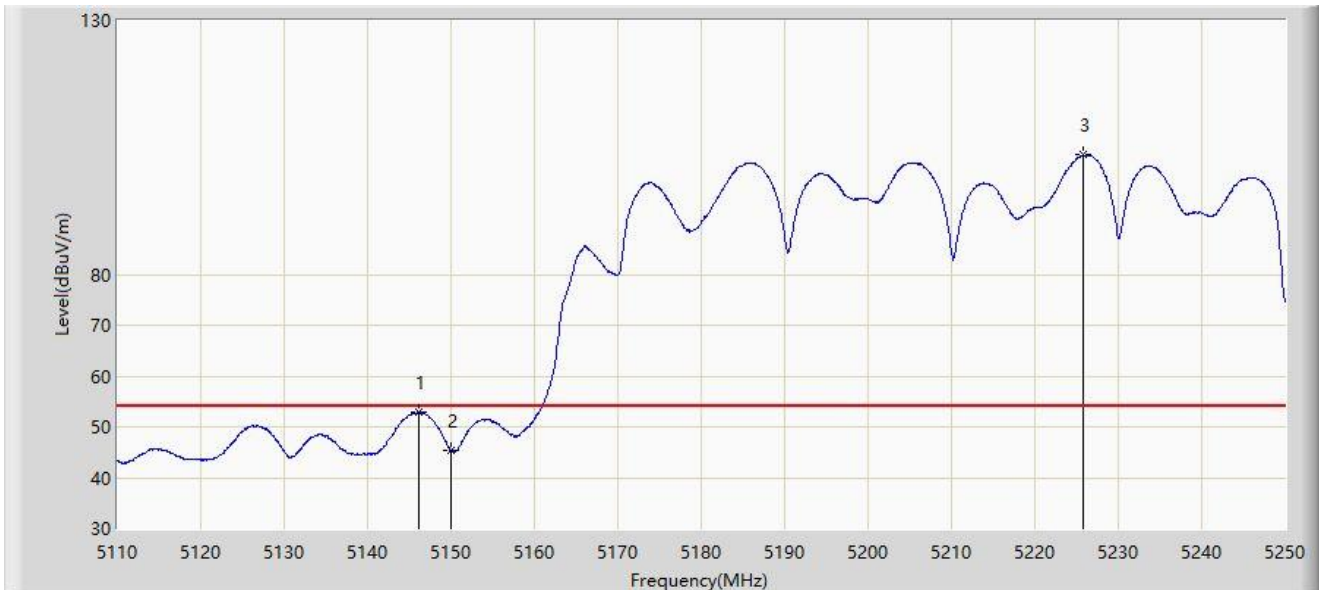

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.190	52.926	56.634	-1.074	54.000	-3.708	AV
2		5150.000	45.387	48.412	-8.613	54.000	-3.026	AV
3		5225.780	103.506	65.915	N/A	N/A	37.591	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).