

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-07	Test Mode	802.11ac-VHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10069.5	34.5	13.0	47.5	68.2	-20.7	Peak	Horizontal
	10996.0	34.3	13.9	48.2	74.0	-25.8	Peak	Horizontal
	12058.5	36.6	12.3	48.9	74.0	-25.1	Peak	Horizontal
*	14073.0	36.2	14.6	50.8	68.2	-17.4	Peak	Horizontal
*	10188.5	34.8	13.6	48.4	68.2	-19.8	Peak	Vertical
	11531.5	35.8	12.8	48.6	74.0	-25.4	Peak	Vertical
	12271.0	36.1	12.3	48.4	74.0	-25.6	Peak	Vertical
*	13461.0	36.8	13.6	50.4	68.2	-17.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-07	Test Mode	802.11ac-VHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10214.0	34.8	13.2	48.0	68.2	-20.2	Peak	Horizontal
	11353.0	35.1	12.7	47.8	74.0	-26.2	Peak	Horizontal
	12169.0	35.3	12.3	47.6	74.0	-26.4	Peak	Horizontal
*	14957.0	36.9	14.7	51.6	68.2	-16.6	Peak	Horizontal
*	10350.0	33.7	13.6	47.3	68.2	-20.9	Peak	Vertical
	11013.0	33.2	13.8	47.0	74.0	-27.0	Peak	Vertical
	12050.0	37.1	12.3	49.4	74.0	-24.6	Peak	Vertical
*	14838.0	35.1	15.0	50.1	68.2	-18.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-07	Test Mode	802.11ac-VHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	34.8	13.0	47.8	68.2	-20.4	Peak	Horizontal
	11047.0	34.2	13.8	48.0	74.0	-26.0	Peak	Horizontal
	11769.5	37.7	12.0	49.7	74.0	-24.3	Peak	Horizontal
*	14064.5	35.5	14.4	49.9	68.2	-18.3	Peak	Horizontal
*	10137.5	34.8	13.2	48.0	68.2	-20.2	Peak	Vertical
	10843.0	35.5	13.7	49.2	74.0	-24.8	Peak	Vertical
	12067.0	37.6	12.2	49.8	74.0	-24.2	Peak	Vertical
*	13775.5	35.8	14.1	49.9	68.2	-18.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10137.5	34.8	13.2	48.0	68.2	-20.2	Peak	Horizontal
	11514.5	36.0	13.0	49.0	74.0	-25.0	Peak	Horizontal
	11939.5	36.3	12.1	48.4	74.0	-25.6	Peak	Horizontal
*	14124.0	36.5	14.5	51.0	68.2	-17.2	Peak	Horizontal
*	10197.0	34.3	13.5	47.8	68.2	-20.4	Peak	Vertical
	10987.5	34.3	13.8	48.1	74.0	-25.9	Peak	Vertical
	12271.0	36.4	12.3	48.7	74.0	-25.3	Peak	Vertical
*	14005.0	35.3	14.2	49.5	68.2	-18.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10435.0	34.7	13.7	48.4	68.2	-19.8	Peak	Horizontal
	11574.0	36.5	12.6	49.1	74.0	-24.9	Peak	Horizontal
	12033.0	37.2	12.3	49.5	74.0	-24.5	Peak	Horizontal
*	13733.0	36.2	14.0	50.2	68.2	-18.0	Peak	Horizontal
*	10239.5	34.0	13.5	47.5	68.2	-20.7	Peak	Vertical
	11412.5	35.4	12.9	48.3	74.0	-25.7	Peak	Vertical
	11922.5	35.7	12.2	47.9	74.0	-26.1	Peak	Vertical
*	14039.0	34.1	14.1	48.2	68.2	-20.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10265.0	34.0	13.5	47.5	68.2	-20.7	Peak	Horizontal
	10851.5	34.4	13.7	48.1	74.0	-25.9	Peak	Horizontal
	11931.0	36.2	12.1	48.3	74.0	-25.7	Peak	Horizontal
*	14090.0	35.7	14.7	50.4	68.2	-17.8	Peak	Horizontal
*	10188.5	33.1	13.6	46.7	68.2	-21.5	Peak	Vertical
	10945.0	34.8	13.7	48.5	74.0	-25.5	Peak	Vertical
	12109.5	36.6	12.2	48.8	74.0	-25.2	Peak	Vertical
*	13019.0	36.9	12.9	49.8	68.2	-18.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10350.0	35.2	13.6	48.8	68.2	-19.4	Peak	Horizontal
	11344.5	35.6	12.7	48.3	74.0	-25.7	Peak	Horizontal
	12058.5	35.2	12.3	47.5	74.0	-26.5	Peak	Horizontal
*	14260.0	36.6	14.7	51.3	68.2	-16.9	Peak	Horizontal
*	9789.0	34.6	13.1	47.7	68.2	-20.5	Peak	Vertical
	10987.5	34.2	13.8	48.0	74.0	-26.0	Peak	Vertical
	12160.5	36.2	12.2	48.4	74.0	-25.6	Peak	Vertical
*	14064.5	35.9	14.4	50.3	68.2	-17.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10129.0	35.0	13.3	48.3	68.2	-19.9	Peak	Horizontal
	11030.0	34.1	13.5	47.6	74.0	-26.4	Peak	Horizontal
	12067.0	35.7	12.2	47.9	74.0	-26.1	Peak	Horizontal
*	13911.5	34.5	14.0	48.5	68.2	-19.7	Peak	Horizontal
*	9959.0	34.1	12.9	47.0	68.2	-21.2	Peak	Vertical
	10834.5	34.3	13.6	47.9	74.0	-26.1	Peak	Vertical
	12186.0	36.7	11.9	48.6	74.0	-25.4	Peak	Vertical
*	13571.5	36.9	13.6	50.5	68.2	-17.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10307.5	33.7	13.3	47.0	68.2	-21.2	Peak	Horizontal
	11412.5	35.4	12.9	48.3	74.0	-25.7	Peak	Horizontal
	12007.5	35.2	12.2	47.4	74.0	-26.6	Peak	Horizontal
*	13775.5	35.3	14.1	49.4	68.2	-18.8	Peak	Horizontal
*	10035.5	33.5	13.0	46.5	68.2	-21.7	Peak	Vertical
	11089.5	34.2	13.4	47.6	74.0	-26.4	Peak	Vertical
	12220.0	34.6	12.3	46.9	74.0	-27.1	Peak	Vertical
*	14039.0	34.3	14.1	48.4	68.2	-19.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10256.5	34.9	13.4	48.3	68.2	-19.9	Peak	Horizontal
	11557.0	36.1	12.7	48.8	74.0	-25.2	Peak	Horizontal
	12084.0	36.1	12.3	48.4	74.0	-25.6	Peak	Horizontal
*	13733.0	35.9	14.0	49.9	68.2	-18.3	Peak	Horizontal
*	10384.0	34.9	13.7	48.6	68.2	-19.6	Peak	Vertical
	11446.5	35.1	13.0	48.1	74.0	-25.9	Peak	Vertical
	12050.0	36.9	12.3	49.2	74.0	-24.8	Peak	Vertical
*	14880.5	36.4	14.7	51.1	68.2	-17.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	34.4	13.0	47.4	68.2	-20.8	Peak	Horizontal
	11548.5	35.6	12.8	48.4	74.0	-25.6	Peak	Horizontal
	12092.5	37.0	12.2	49.2	74.0	-24.8	Peak	Horizontal
*	14209.0	35.6	14.5	50.1	68.2	-18.1	Peak	Horizontal
*	10180.0	34.2	13.6	47.8	68.2	-20.4	Peak	Vertical
	10851.5	34.9	13.7	48.6	74.0	-25.4	Peak	Vertical
	12135.0	37.1	12.3	49.4	74.0	-24.6	Peak	Vertical
*	14192.0	35.1	14.8	49.9	68.2	-18.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10316.0	33.8	13.5	47.3	68.2	-20.9	Peak	Horizontal
	11523.0	35.4	12.9	48.3	74.0	-25.7	Peak	Horizontal
	12135.0	36.0	12.3	48.3	74.0	-25.7	Peak	Horizontal
*	13699.0	35.8	13.8	49.6	68.2	-18.6	Peak	Horizontal
*	10265.0	33.8	13.5	47.3	68.2	-20.9	Peak	Vertical
	10902.5	35.1	13.6	48.7	74.0	-25.3	Peak	Vertical
	12228.5	36.9	12.2	49.1	74.0	-24.9	Peak	Vertical
*	13920.0	33.7	14.0	47.7	68.2	-20.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10120.5	34.3	13.2	47.5	68.2	-20.7	Peak	Horizontal
	11497.5	35.4	13.1	48.5	74.0	-25.5	Peak	Horizontal
	12024.5	36.9	12.3	49.2	74.0	-24.8	Peak	Horizontal
*	15195.0	37.4	13.8	51.2	68.2	-17.0	Peak	Horizontal
*	9891.0	34.9	13.1	48.0	68.2	-20.2	Peak	Vertical
	11438.0	35.6	13.1	48.7	74.0	-25.3	Peak	Vertical
	12033.0	37.1	12.3	49.4	74.0	-24.6	Peak	Vertical
*	13724.5	35.7	13.9	49.6	68.2	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10341.5	35.3	13.6	48.9	68.2	-19.3	Peak	Horizontal
	11531.5	35.4	12.8	48.2	74.0	-25.8	Peak	Horizontal
	13393.0	37.4	13.5	50.9	74.0	-23.1	Peak	Horizontal
*	14957.0	37.0	14.7	51.7	68.2	-16.5	Peak	Horizontal
*	10350.0	33.6	13.6	47.2	68.2	-21.0	Peak	Vertical
	11480.5	35.2	13.0	48.2	74.0	-25.8	Peak	Vertical
	11982.0	37.1	12.1	49.2	74.0	-24.8	Peak	Vertical
*	14090.0	35.4	14.7	50.1	68.2	-18.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9746.5	36.0	12.9	48.9	68.2	-19.3	Peak	Horizontal
	11038.5	34.9	13.7	48.6	74.0	-25.4	Peak	Horizontal
	12050.0	36.7	12.3	49.0	74.0	-25.0	Peak	Horizontal
*	13784.0	36.2	14.2	50.4	68.2	-17.8	Peak	Horizontal
*	10095.0	34.7	13.2	47.9	68.2	-20.3	Peak	Vertical
	10732.5	33.6	13.6	47.2	74.0	-26.8	Peak	Vertical
	12016.0	36.7	12.2	48.9	74.0	-25.1	Peak	Vertical
*	14617.0	35.3	15.2	50.5	68.2	-17.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10520.0	35.3	13.7	49.0	68.2	-19.2	Peak	Horizontal
	11582.5	36.5	12.5	49.0	74.0	-25.0	Peak	Horizontal
	12041.5	36.8	12.3	49.1	74.0	-24.9	Peak	Horizontal
*	14039.0	36.2	14.1	50.3	68.2	-17.9	Peak	Horizontal
*	10273.5	35.4	13.5	48.9	68.2	-19.3	Peak	Vertical
	11523.0	35.4	12.9	48.3	74.0	-25.7	Peak	Vertical
	12347.5	36.2	12.3	48.5	74.0	-25.5	Peak	Vertical
*	14829.5	36.3	14.9	51.2	68.2	-17.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9797.5	35.1	13.2	48.3	68.2	-19.9	Peak	Horizontal
	11429.5	36.8	13.0	49.8	74.0	-24.2	Peak	Horizontal
	12101.0	37.7	12.1	49.8	74.0	-24.2	Peak	Horizontal
*	14149.5	36.9	14.5	51.4	68.2	-16.8	Peak	Horizontal
*	10129.0	36.1	13.3	49.4	68.2	-18.8	Peak	Vertical
	11489.0	36.4	13.2	49.6	74.0	-24.4	Peak	Vertical
	12364.5	37.6	12.3	49.9	74.0	-24.1	Peak	Vertical
*	13877.5	36.3	14.2	50.5	68.2	-17.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10350.0	34.0	13.6	47.6	68.2	-20.6	Peak	Horizontal
	11387.0	36.2	12.9	49.1	74.0	-24.9	Peak	Horizontal
	12118.0	35.7	12.3	48.0	74.0	-26.0	Peak	Horizontal
*	14115.5	36.4	14.5	50.9	68.2	-17.3	Peak	Horizontal
*	10035.5	36.0	13.0	49.0	68.2	-19.2	Peak	Vertical
	11497.5	37.1	13.1	50.2	74.0	-23.8	Peak	Vertical
	12058.5	37.1	12.3	49.4	74.0	-24.6	Peak	Vertical
*	13809.5	35.7	13.9	49.6	68.2	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10001.5	35.8	12.8	48.6	68.2	-19.6	Peak	Horizontal
	11055.5	35.7	13.6	49.3	74.0	-24.7	Peak	Horizontal
	12262.5	36.8	12.3	49.1	74.0	-24.9	Peak	Horizontal
*	13809.5	35.8	13.9	49.7	68.2	-18.5	Peak	Horizontal
*	10035.5	35.2	13.0	48.2	68.2	-20.0	Peak	Vertical
	10962.0	35.3	13.6	48.9	74.0	-25.1	Peak	Vertical
	12033.0	36.8	12.3	49.1	74.0	-24.9	Peak	Vertical
*	13911.5	34.1	14.0	48.1	68.2	-20.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT80+80 – Channel 42+58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10171.5	33.8	13.3	47.1	68.2	-21.1	Peak	Horizontal
	11497.5	36.2	13.1	49.3	74.0	-24.7	Peak	Horizontal
	12534.5	37.1	12.0	49.1	74.0	-24.9	Peak	Horizontal
*	13801.0	35.4	13.9	49.3	68.2	-18.9	Peak	Horizontal
*	10078.0	33.8	13.2	47.0	68.2	-21.2	Peak	Vertical
	10987.5	35.8	13.8	49.6	74.0	-24.4	Peak	Vertical
	11948.0	36.1	12.1	48.2	74.0	-25.8	Peak	Vertical
*	13979.5	35.5	14.2	49.7	68.2	-18.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ac-VHT80+80 – Channel 106+122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10290.5	35.0	13.5	48.5	68.2	-19.7	Peak	Horizontal
	10928.0	35.0	13.7	48.7	74.0	-25.3	Peak	Horizontal
	12322.0	36.5	12.3	48.8	74.0	-25.2	Peak	Horizontal
*	14081.5	35.2	14.8	50.0	68.2	-18.2	Peak	Horizontal
*	9942.0	33.4	12.8	46.2	68.2	-22.0	Peak	Vertical
	11225.5	34.2	12.4	46.6	74.0	-27.4	Peak	Vertical
	12033.0	35.4	12.3	47.7	74.0	-26.3	Peak	Vertical
*	13911.5	35.9	14.0	49.9	68.2	-18.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9729.5	35.7	13.0	48.7	68.2	-19.5	Peak	Horizontal
	11132.0	36.0	12.9	48.9	74.0	-25.1	Peak	Horizontal
	12254.0	35.8	12.2	48.0	74.0	-26.0	Peak	Horizontal
*	14149.5	36.8	14.5	51.3	68.2	-16.9	Peak	Horizontal
*	9925.0	36.1	13.0	49.1	68.2	-19.1	Peak	Vertical
	10851.5	35.2	13.7	48.9	74.0	-25.1	Peak	Vertical
	12330.5	36.3	12.3	48.6	74.0	-25.4	Peak	Vertical
*	13877.5	35.4	14.2	49.6	68.2	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9967.5	35.0	12.9	47.9	68.2	-20.3	Peak	Horizontal
	10928.0	34.6	13.7	48.3	74.0	-25.7	Peak	Horizontal
	11480.5	36.6	13.0	49.6	74.0	-24.4	Peak	Horizontal
*	14081.5	35.4	14.8	50.2	68.2	-18.0	Peak	Horizontal
*	9967.5	35.1	12.9	48.0	68.2	-20.2	Peak	Vertical
	11055.5	35.4	13.6	49.0	74.0	-25.0	Peak	Vertical
	12033.0	36.7	12.3	49.0	74.0	-25.0	Peak	Vertical
*	13665.0	35.6	13.9	49.5	68.2	-18.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10290.5	34.5	13.5	48.0	68.2	-20.2	Peak	Horizontal
	10987.5	35.2	13.8	49.0	74.0	-25.0	Peak	Horizontal
	12050.0	36.7	12.3	49.0	74.0	-25.0	Peak	Horizontal
*	14090.0	35.7	14.7	50.4	68.2	-17.8	Peak	Horizontal
*	10035.5	35.4	13.0	48.4	68.2	-19.8	Peak	Vertical
	11574.0	36.3	12.6	48.9	74.0	-25.1	Peak	Vertical
	12262.5	36.8	12.3	49.1	74.0	-24.9	Peak	Vertical
*	13988.0	36.5	14.4	50.9	68.2	-17.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10137.5	34.3	13.2	47.5	68.2	-20.7	Peak	Horizontal
	11531.5	35.3	12.8	48.1	74.0	-25.9	Peak	Horizontal
	12143.5	35.2	12.2	47.4	74.0	-26.6	Peak	Horizontal
*	13784.0	35.5	14.2	49.7	68.2	-18.5	Peak	Horizontal
*	10044.0	34.4	12.9	47.3	68.2	-20.9	Peak	Vertical
	11446.5	36.2	13.0	49.2	74.0	-24.8	Peak	Vertical
	12050.0	35.7	12.3	48.0	74.0	-26.0	Peak	Vertical
*	14158.0	35.5	14.6	50.1	68.2	-18.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9967.5	35.2	12.9	48.1	68.2	-20.1	Peak	Horizontal
	11438.0	35.6	13.1	48.7	74.0	-25.3	Peak	Horizontal
	12339.0	35.8	12.2	48.0	74.0	-26.0	Peak	Horizontal
*	14039.0	36.3	14.1	50.4	68.2	-17.8	Peak	Horizontal
*	10214.0	33.1	13.2	46.3	68.2	-21.9	Peak	Vertical
	11497.5	35.4	13.1	48.5	74.0	-25.5	Peak	Vertical
	12101.0	35.5	12.1	47.6	74.0	-26.4	Peak	Vertical
*	13792.5	34.4	14.0	48.4	68.2	-19.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10086.5	35.0	13.2	48.2	68.2	-20.0	Peak	Horizontal
	10877.0	36.1	13.5	49.6	74.0	-24.4	Peak	Horizontal
	12517.5	37.1	12.1	49.2	74.0	-24.8	Peak	Horizontal
*	13911.5	35.1	14.0	49.1	68.2	-19.1	Peak	Horizontal
*	9899.5	33.1	13.0	46.1	68.2	-22.1	Peak	Vertical
	10987.5	34.6	13.8	48.4	74.0	-25.6	Peak	Vertical
	12109.5	34.3	12.2	46.5	74.0	-27.5	Peak	Vertical
*	12951.0	36.2	12.8	49.0	68.2	-19.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10086.5	35.2	13.2	48.4	68.2	-19.8	Peak	Horizontal
	10911.0	35.7	13.6	49.3	74.0	-24.7	Peak	Horizontal
	12007.5	35.9	12.2	48.1	74.0	-25.9	Peak	Horizontal
*	14030.5	35.7	14.2	49.9	68.2	-18.3	Peak	Horizontal
*	10078.0	34.6	13.2	47.8	68.2	-20.4	Peak	Vertical
	10936.5	34.5	13.8	48.3	74.0	-25.7	Peak	Vertical
	12050.0	35.3	12.3	47.6	74.0	-26.4	Peak	Vertical
*	13869.0	34.4	14.3	48.7	68.2	-19.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10137.5	33.7	13.2	46.9	68.2	-21.3	Peak	Horizontal
	11047.0	34.2	13.8	48.0	74.0	-26.0	Peak	Horizontal
	11676.0	36.8	12.2	49.0	74.0	-25.0	Peak	Horizontal
*	13792.5	34.7	14.0	48.7	68.2	-19.5	Peak	Horizontal
*	10137.5	34.4	13.2	47.6	68.2	-20.6	Peak	Vertical
	10936.5	35.7	13.8	49.5	74.0	-24.5	Peak	Vertical
	12169.0	35.9	12.3	48.2	74.0	-25.8	Peak	Vertical
*	16946.0	37.7	15.3	53.0	68.2	-15.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	33.1	13.0	46.1	68.2	-22.1	Peak	Horizontal
	10868.5	35.8	13.5	49.3	74.0	-24.7	Peak	Horizontal
	11497.5	35.6	13.1	48.7	74.0	-25.3	Peak	Horizontal
*	13852.0	35.9	14.0	49.9	68.2	-18.3	Peak	Horizontal
*	10035.5	33.1	13.0	46.1	68.2	-22.1	Peak	Vertical
	10911.0	35.2	13.6	48.8	74.0	-25.2	Peak	Vertical
	12092.5	35.8	12.2	48.0	74.0	-26.0	Peak	Vertical
*	14175.0	36.0	14.8	50.8	68.2	-17.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10273.5	34.5	13.5	48.0	68.2	-20.2	Peak	Horizontal
	10970.5	34.8	13.5	48.3	74.0	-25.7	Peak	Horizontal
	12594.0	36.3	11.9	48.2	74.0	-25.8	Peak	Horizontal
*	13818.0	35.1	14.0	49.1	68.2	-19.1	Peak	Horizontal
*	10120.5	34.5	13.2	47.7	68.2	-20.5	Peak	Vertical
	10970.5	33.2	13.5	46.7	74.0	-27.3	Peak	Vertical
	12177.5	36.3	12.1	48.4	74.0	-25.6	Peak	Vertical
*	13860.5	34.5	14.1	48.6	68.2	-19.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	33.3	13.2	46.5	68.2	-21.7	Peak	Horizontal
	11446.5	35.8	13.0	48.8	74.0	-25.2	Peak	Horizontal
	12007.5	36.2	12.2	48.4	74.0	-25.6	Peak	Horizontal
*	13996.5	34.8	14.3	49.1	68.2	-19.1	Peak	Horizontal
*	10256.5	34.5	13.4	47.9	68.2	-20.3	Peak	Vertical
	11531.5	36.0	12.8	48.8	74.0	-25.2	Peak	Vertical
	12160.5	35.4	12.2	47.6	74.0	-26.4	Peak	Vertical
*	13690.5	35.5	13.7	49.2	68.2	-19.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10443.5	33.4	13.6	47.0	68.2	-21.2	Peak	Horizontal
	11081.0	34.9	13.5	48.4	74.0	-25.6	Peak	Horizontal
	12441.0	35.7	12.2	47.9	74.0	-26.1	Peak	Horizontal
*	14200.5	35.1	14.6	49.7	68.2	-18.5	Peak	Horizontal
*	9882.5	34.9	13.1	48.0	68.2	-20.2	Peak	Vertical
	11438.0	35.7	13.1	48.8	74.0	-25.2	Peak	Vertical
	12245.5	35.7	12.1	47.8	74.0	-26.2	Peak	Vertical
*	14166.5	36.1	14.7	50.8	68.2	-17.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10137.5	34.4	13.2	47.6	68.2	-20.6	Peak	Horizontal
	11013.0	35.3	13.8	49.1	74.0	-24.9	Peak	Horizontal
	12288.0	35.8	12.1	47.9	74.0	-26.1	Peak	Horizontal
*	13818.0	35.8	14.0	49.8	68.2	-18.4	Peak	Horizontal
*	10392.5	34.1	13.6	47.7	68.2	-20.5	Peak	Vertical
	11038.5	34.3	13.7	48.0	74.0	-26.0	Peak	Vertical
	12109.5	34.1	12.2	46.3	74.0	-27.7	Peak	Vertical
*	13988.0	35.5	14.4	49.9	68.2	-18.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10069.5	35.1	13.0	48.1	68.2	-20.1	Peak	Horizontal
	11540.0	36.5	12.8	49.3	74.0	-24.7	Peak	Horizontal
	12398.5	36.3	11.9	48.2	74.0	-25.8	Peak	Horizontal
*	14328.0	36.3	14.7	51.0	68.2	-17.2	Peak	Horizontal
*	10486.0	34.0	14.0	48.0	68.2	-20.2	Peak	Vertical
	11421.0	35.5	12.9	48.4	74.0	-25.6	Peak	Vertical
	12041.5	36.7	12.3	49.0	74.0	-25.0	Peak	Vertical
*	13741.5	35.6	13.8	49.4	68.2	-18.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10248.0	33.7	13.5	47.2	68.2	-21.0	Peak	Horizontal
	10970.5	33.8	13.5	47.3	74.0	-26.7	Peak	Horizontal
	11582.5	35.9	12.5	48.4	74.0	-25.6	Peak	Horizontal
*	13792.5	34.9	14.0	48.9	68.2	-19.3	Peak	Horizontal
*	9967.5	34.4	12.9	47.3	68.2	-20.9	Peak	Vertical
	11599.5	35.2	12.6	47.8	74.0	-26.2	Peak	Vertical
	12245.5	35.5	12.1	47.6	74.0	-26.4	Peak	Vertical
*	13733.0	35.5	14.0	49.5	68.2	-18.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10299.0	34.2	13.3	47.5	68.2	-20.7	Peak	Horizontal
	11574.0	35.7	12.6	48.3	74.0	-25.7	Peak	Horizontal
	12109.5	34.0	12.2	46.2	74.0	-27.8	Peak	Horizontal
*	13860.5	34.8	14.1	48.9	68.2	-19.3	Peak	Horizontal
*	10103.5	34.6	13.1	47.7	68.2	-20.5	Peak	Vertical
	11072.5	34.6	13.5	48.1	74.0	-25.9	Peak	Vertical
	12220.0	35.5	12.3	47.8	74.0	-26.2	Peak	Vertical
*	14039.0	33.8	14.1	47.9	68.2	-20.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10375.5	33.8	13.6	47.4	68.2	-20.8	Peak	Horizontal
	11140.5	35.9	13.1	49.0	74.0	-25.0	Peak	Horizontal
	12373.0	36.4	12.2	48.6	74.0	-25.4	Peak	Horizontal
*	14175.0	35.3	14.8	50.1	68.2	-18.1	Peak	Horizontal
*	10214.0	34.1	13.2	47.3	68.2	-20.9	Peak	Vertical
	11395.5	35.5	12.9	48.4	74.0	-25.6	Peak	Vertical
	11965.0	34.9	12.1	47.0	74.0	-27.0	Peak	Vertical
*	13665.0	34.5	13.9	48.4	68.2	-19.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10129.0	34.4	13.3	47.7	68.2	-20.5	Peak	Horizontal
	11174.5	34.3	12.9	47.2	74.0	-26.8	Peak	Horizontal
	12220.0	34.7	12.3	47.0	74.0	-27.0	Peak	Horizontal
*	13852.0	34.6	14.0	48.6	68.2	-19.6	Peak	Horizontal
*	9984.5	35.4	13.0	48.4	68.2	-19.8	Peak	Vertical
	11438.0	35.6	13.1	48.7	74.0	-25.3	Peak	Vertical
	12033.0	36.2	12.3	48.5	74.0	-25.5	Peak	Vertical
*	13699.0	34.3	13.8	48.1	68.2	-20.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10146.0	34.5	13.2	47.7	68.2	-20.5	Peak	Horizontal
	11463.5	35.6	12.9	48.5	74.0	-25.5	Peak	Horizontal
	12653.5	37.7	12.3	50.0	74.0	-24.0	Peak	Horizontal
*	14115.5	36.2	14.5	50.7	68.2	-17.5	Peak	Horizontal
*	10256.5	34.1	13.4	47.5	68.2	-20.7	Peak	Vertical
	10936.5	35.2	13.8	49.0	74.0	-25.0	Peak	Vertical
	12262.5	36.1	12.3	48.4	74.0	-25.6	Peak	Vertical
*	13954.0	33.8	13.7	47.5	68.2	-20.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9840.0	35.0	13.0	48.0	68.2	-20.2	Peak	Horizontal
	10834.5	34.9	13.6	48.5	74.0	-25.5	Peak	Horizontal
	12228.5	37.0	12.2	49.2	74.0	-24.8	Peak	Horizontal
*	13775.5	35.2	14.1	49.3	68.2	-18.9	Peak	Horizontal
*	9933.5	35.6	13.0	48.6	68.2	-19.6	Peak	Vertical
	11395.5	35.2	12.9	48.1	74.0	-25.9	Peak	Vertical
	12279.5	35.7	12.2	47.9	74.0	-26.1	Peak	Vertical
*	14013.5	35.0	14.3	49.3	68.2	-18.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10129.0	34.1	13.3	47.4	68.2	-20.8	Peak	Horizontal
	11540.0	36.1	12.8	48.9	74.0	-25.1	Peak	Horizontal
	12109.5	35.3	12.2	47.5	74.0	-26.5	Peak	Horizontal
*	14039.0	34.5	14.1	48.6	68.2	-19.6	Peak	Horizontal
*	9942.0	33.6	12.8	46.4	68.2	-21.8	Peak	Vertical
	10962.0	34.9	13.6	48.5	74.0	-25.5	Peak	Vertical
	12237.0	35.6	12.1	47.7	74.0	-26.3	Peak	Vertical
*	14583.0	35.9	15.4	51.3	68.2	-16.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9865.5	35.0	12.9	47.9	68.2	-20.3	Peak	Horizontal
	11004.5	35.0	13.8	48.8	74.0	-25.2	Peak	Horizontal
	11948.0	35.9	12.1	48.0	74.0	-26.0	Peak	Horizontal
*	14098.5	36.5	14.5	51.0	68.2	-17.2	Peak	Horizontal
*	10171.5	34.2	13.3	47.5	68.2	-20.7	Peak	Vertical
	11497.5	35.5	13.1	48.6	74.0	-25.4	Peak	Vertical
	12220.0	35.7	12.3	48.0	74.0	-26.0	Peak	Vertical
*	14013.5	35.4	14.3	49.7	68.2	-18.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10299.0	34.8	13.3	48.1	68.2	-20.1	Peak	Horizontal
	10928.0	35.9	13.7	49.6	74.0	-24.4	Peak	Horizontal
	11650.5	36.5	12.1	48.6	74.0	-25.4	Peak	Horizontal
*	14591.5	35.8	15.3	51.1	68.2	-17.1	Peak	Horizontal
*	10137.5	35.4	13.2	48.6	68.2	-19.6	Peak	Vertical
	10928.0	34.4	13.7	48.1	74.0	-25.9	Peak	Vertical
	12007.5	34.9	12.2	47.1	74.0	-26.9	Peak	Vertical
*	14107.0	35.3	14.5	49.8	68.2	-18.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10265.0	34.7	13.5	48.2	68.2	-20.0	Peak	Horizontal
	11438.0	36.1	13.1	49.2	74.0	-24.8	Peak	Horizontal
	11990.5	36.4	12.1	48.5	74.0	-25.5	Peak	Horizontal
*	13656.5	37.4	13.8	51.2	68.2	-17.0	Peak	Horizontal
*	10214.0	35.4	13.2	48.6	68.2	-19.6	Peak	Vertical
	11531.5	35.8	12.8	48.6	74.0	-25.4	Peak	Vertical
	12220.0	35.8	12.3	48.1	74.0	-25.9	Peak	Vertical
*	13792.5	34.6	14.0	48.6	68.2	-19.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10137.5	34.3	13.2	47.5	68.2	-20.7	Peak	Horizontal
	10945.0	36.0	13.7	49.7	74.0	-24.3	Peak	Horizontal
	12220.0	34.8	12.3	47.1	74.0	-26.9	Peak	Horizontal
*	13911.5	33.6	14.0	47.6	68.2	-20.6	Peak	Horizontal
*	10248.0	34.3	13.5	47.8	68.2	-20.4	Peak	Vertical
	11047.0	34.2	13.8	48.0	74.0	-26.0	Peak	Vertical
	12109.5	35.6	12.2	47.8	74.0	-26.2	Peak	Vertical
*	13792.5	34.3	14.0	48.3	68.2	-19.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10120.5	33.3	13.2	46.5	68.2	-21.7	Peak	Horizontal
	11089.5	35.4	13.4	48.8	74.0	-25.2	Peak	Horizontal
	12007.5	34.6	12.2	46.8	74.0	-27.2	Peak	Horizontal
*	14260.0	36.2	14.7	50.9	68.2	-17.3	Peak	Horizontal
*	10010.0	34.7	12.7	47.4	68.2	-20.8	Peak	Vertical
	11557.0	36.4	12.7	49.1	74.0	-24.9	Peak	Vertical
	12135.0	35.5	12.3	47.8	74.0	-26.2	Peak	Vertical
*	13792.5	35.1	14.0	49.1	68.2	-19.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10324.5	32.5	13.7	46.2	68.2	-22.0	Peak	Horizontal
	11565.5	35.7	12.6	48.3	74.0	-25.7	Peak	Horizontal
	12033.0	35.0	12.3	47.3	74.0	-26.7	Peak	Horizontal
*	13665.0	34.1	13.9	48.0	68.2	-20.2	Peak	Horizontal
*	10163.0	34.8	13.1	47.9	68.2	-20.3	Peak	Vertical
	11489.0	36.1	13.2	49.3	74.0	-24.7	Peak	Vertical
	12220.0	36.1	12.3	48.4	74.0	-25.6	Peak	Vertical
*	13920.0	35.7	14.0	49.7	68.2	-18.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9831.5	34.9	13.1	48.0	68.2	-20.2	Peak	Horizontal
	11081.0	34.8	13.5	48.3	74.0	-25.7	Peak	Horizontal
	11608.0	36.1	12.5	48.6	74.0	-25.4	Peak	Horizontal
*	13903.0	35.4	14.0	49.4	68.2	-18.8	Peak	Horizontal
*	9729.5	33.7	13.0	46.7	68.2	-21.5	Peak	Vertical
	11064.0	34.9	13.5	48.4	74.0	-25.6	Peak	Vertical
	11948.0	35.4	12.1	47.5	74.0	-26.5	Peak	Vertical
*	13614.0	35.0	13.9	48.9	68.2	-19.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10273.5	34.4	13.5	47.9	68.2	-20.3	Peak	Horizontal
	11395.5	35.6	12.9	48.5	74.0	-25.5	Peak	Horizontal
	11803.5	35.9	11.9	47.8	74.0	-26.2	Peak	Horizontal
*	13750.0	35.1	13.8	48.9	68.2	-19.3	Peak	Horizontal
*	10069.5	35.2	13.0	48.2	68.2	-20.0	Peak	Vertical
	11123.5	33.2	12.9	46.1	74.0	-27.9	Peak	Vertical
	11922.5	36.4	12.2	48.6	74.0	-25.4	Peak	Vertical
*	14073.0	35.0	14.6	49.6	68.2	-18.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE80+80 – Channel 42+58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	33.3	13.2	46.5	68.2	-21.7	Peak	Horizontal
	11157.5	35.3	13.2	48.5	74.0	-25.5	Peak	Horizontal
	12398.5	36.0	11.9	47.9	74.0	-26.1	Peak	Horizontal
*	14583.0	36.0	15.4	51.4	68.2	-16.8	Peak	Horizontal
*	10375.5	33.0	13.6	46.6	68.2	-21.6	Peak	Vertical
	11072.5	35.6	13.5	49.1	74.0	-24.9	Peak	Vertical
	12152.0	35.6	12.2	47.8	74.0	-26.2	Peak	Vertical
*	13869.0	35.8	14.3	50.1	68.2	-18.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2023-06-08	Test Mode	802.11ax-HE80+80 – Channel 106+122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10367.0	32.6	13.5	46.1	68.2	-22.1	Peak	Horizontal
	11072.5	34.3	13.5	47.8	74.0	-26.2	Peak	Horizontal
	12220.0	34.4	12.3	46.7	74.0	-27.3	Peak	Horizontal
*	14073.0	34.7	14.6	49.3	68.2	-18.9	Peak	Horizontal
*	10452.0	33.6	13.5	47.1	68.2	-21.1	Peak	Vertical
	11548.5	35.8	12.8	48.6	74.0	-25.4	Peak	Vertical
	12109.5	35.2	12.2	47.4	74.0	-26.6	Peak	Vertical
*	13843.5	35.1	13.9	49.0	68.2	-19.2	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC2	Test Date: 2023-06-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Ajin Fan
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

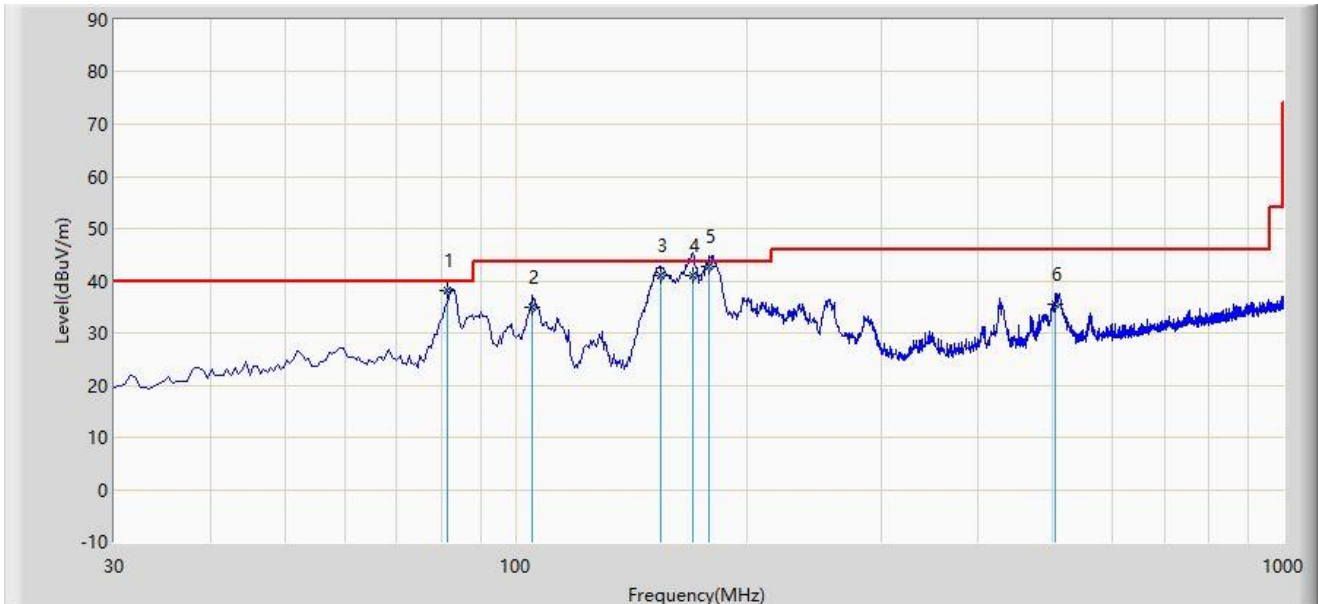

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		81.500	38.057	23.980	-1.943	40.000	14.077	QP
2		105.100	34.797	16.200	-8.703	43.500	18.597	QP
3		154.645	40.891	25.400	-2.609	43.500	15.492	QP
4		170.165	40.920	24.850	-2.580	43.500	16.070	QP
5	*	178.895	42.613	26.014	-0.887	43.500	16.599	QP
6		504.815	35.455	10.400	-10.545	46.000	25.055	QP

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC2	Test Date: 2023-06-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Ajin Fan
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

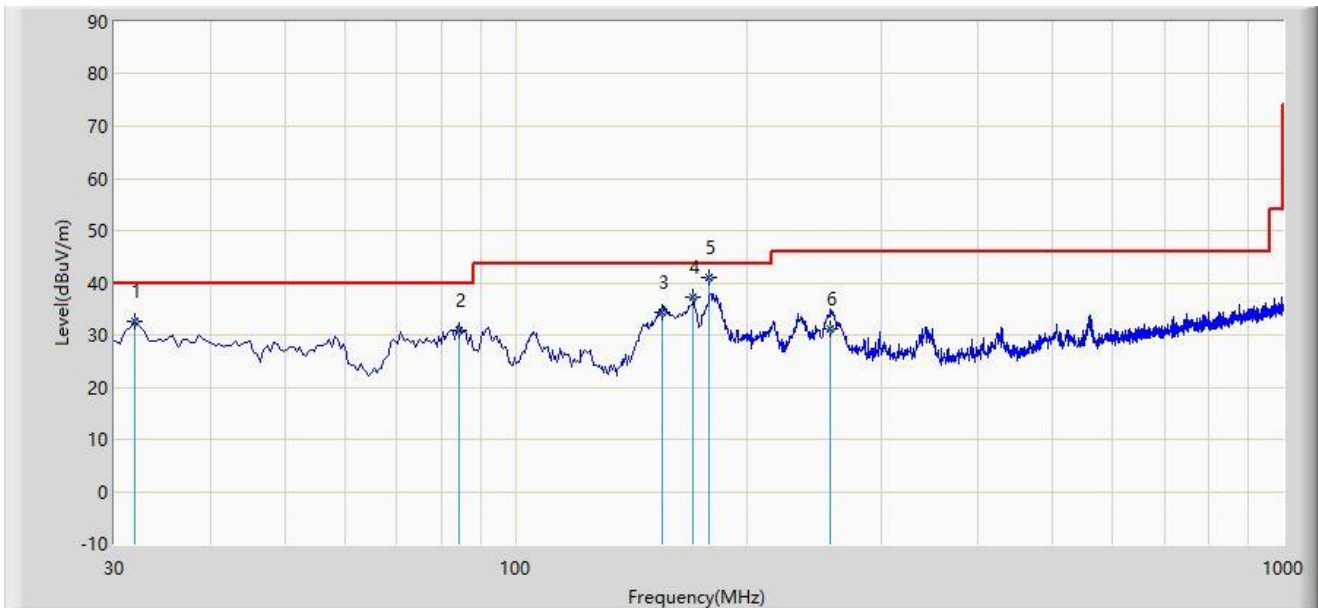

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		31.882	32.626	15.900	-7.374	40.000	16.726	QP
2		84.425	30.866	16.350	-9.134	40.000	14.516	QP
3		155.080	34.426	18.920	-9.074	43.500	15.506	QP
4		170.200	37.231	21.160	-6.269	43.500	16.071	QP
5	*	178.960	40.935	24.330	-2.565	43.500	16.606	QP
6		257.370	31.025	10.900	-14.975	46.000	20.125	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.8 Radiated Restricted Band Edge Test Result

Antenna 1#:

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

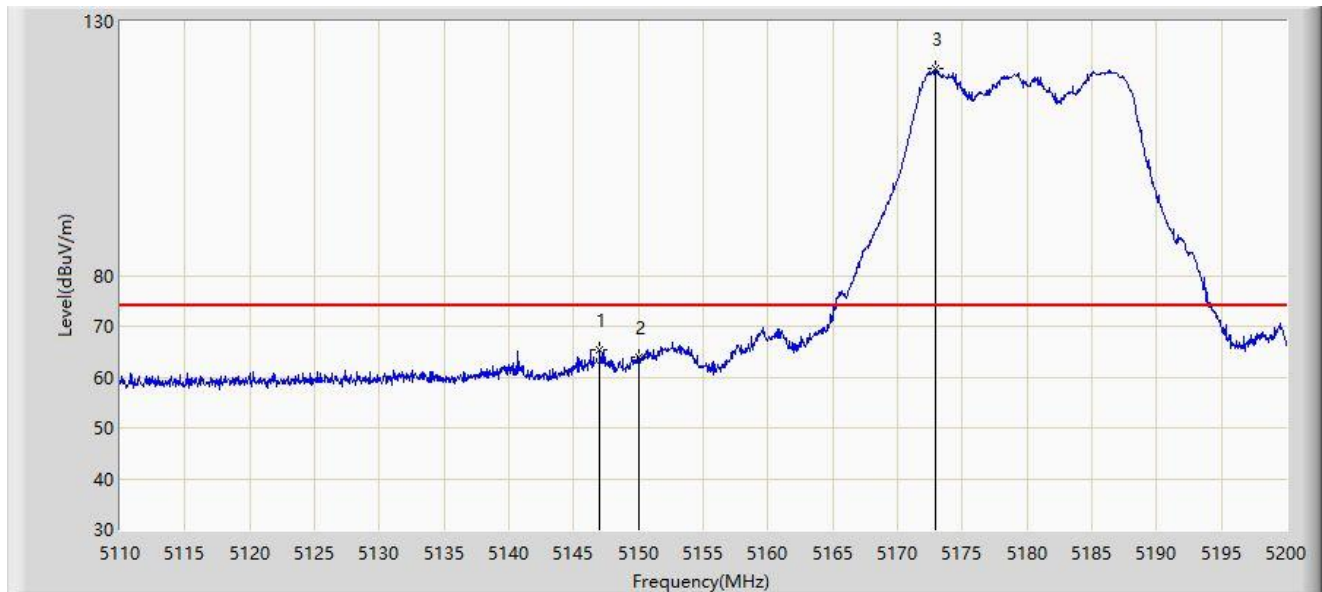


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.035	65.317	61.541	-8.683	74.000	3.776	PK
2		5150.000	63.909	60.137	-10.091	74.000	3.773	PK
3		5172.910	120.706	117.108	N/A	N/A	3.597	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

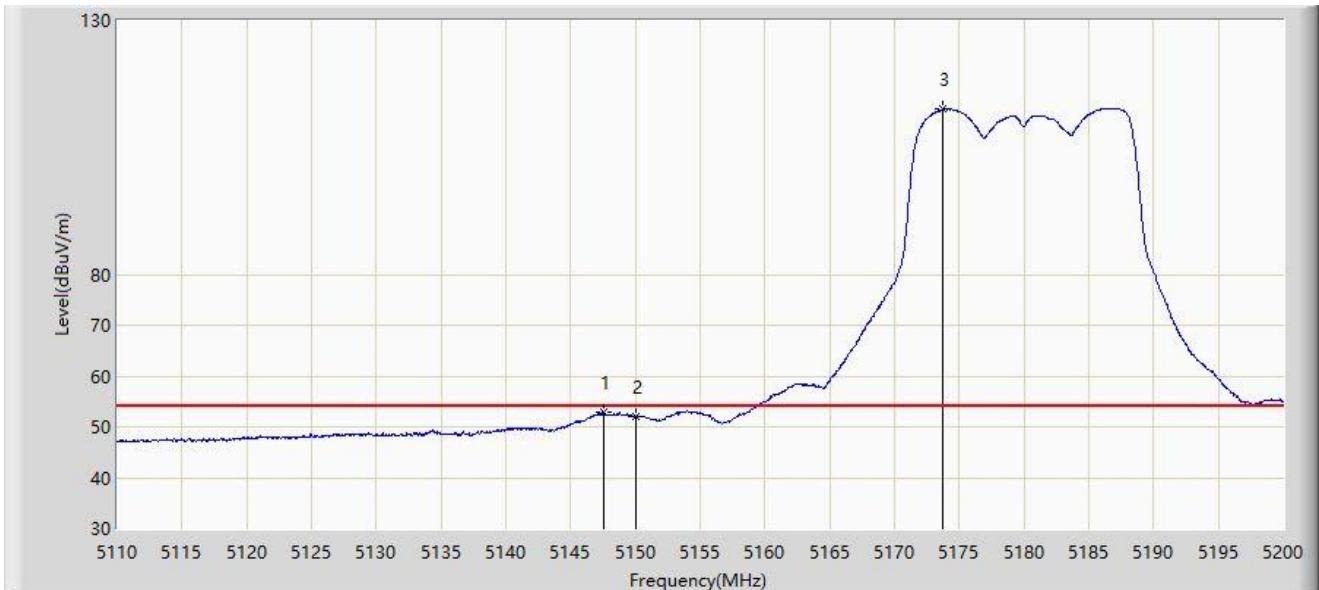


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.530	52.834	49.060	-1.166	54.000	3.774	AV
2		5150.000	51.907	48.135	-2.093	54.000	3.773	AV
3		5173.765	112.474	108.884	N/A	N/A	3.590	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

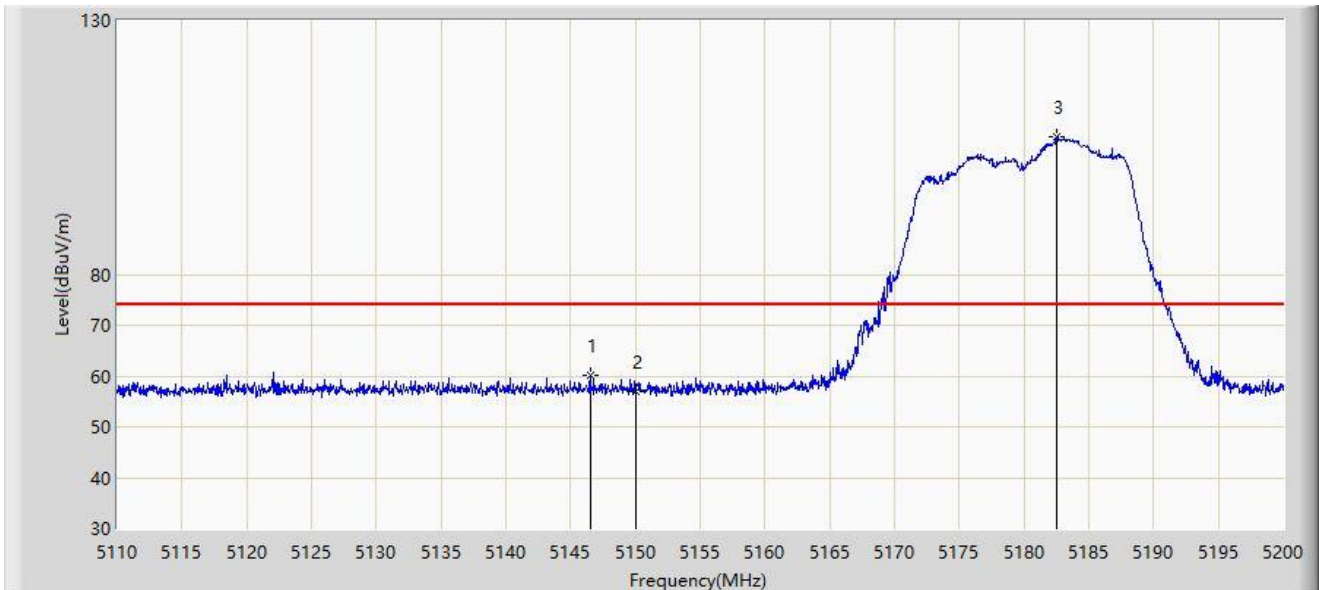


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.495	60.165	56.386	-13.835	74.000	3.779	PK
2		5150.000	56.992	53.220	-17.008	74.000	3.773	PK
3		5182.540	107.154	103.641	N/A	N/A	3.513	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

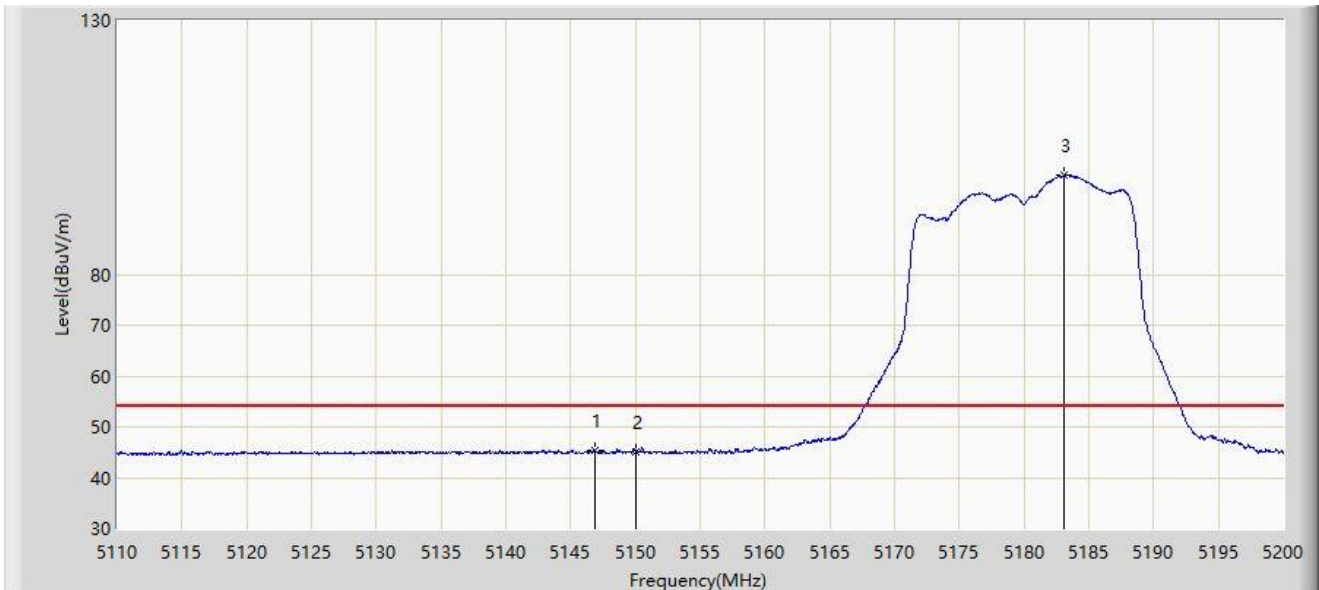


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.855	45.449	41.672	-8.551	54.000	3.777	AV
2		5150.000	45.195	41.423	-8.805	54.000	3.773	AV
3		5183.125	99.421	95.907	N/A	N/A	3.513	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

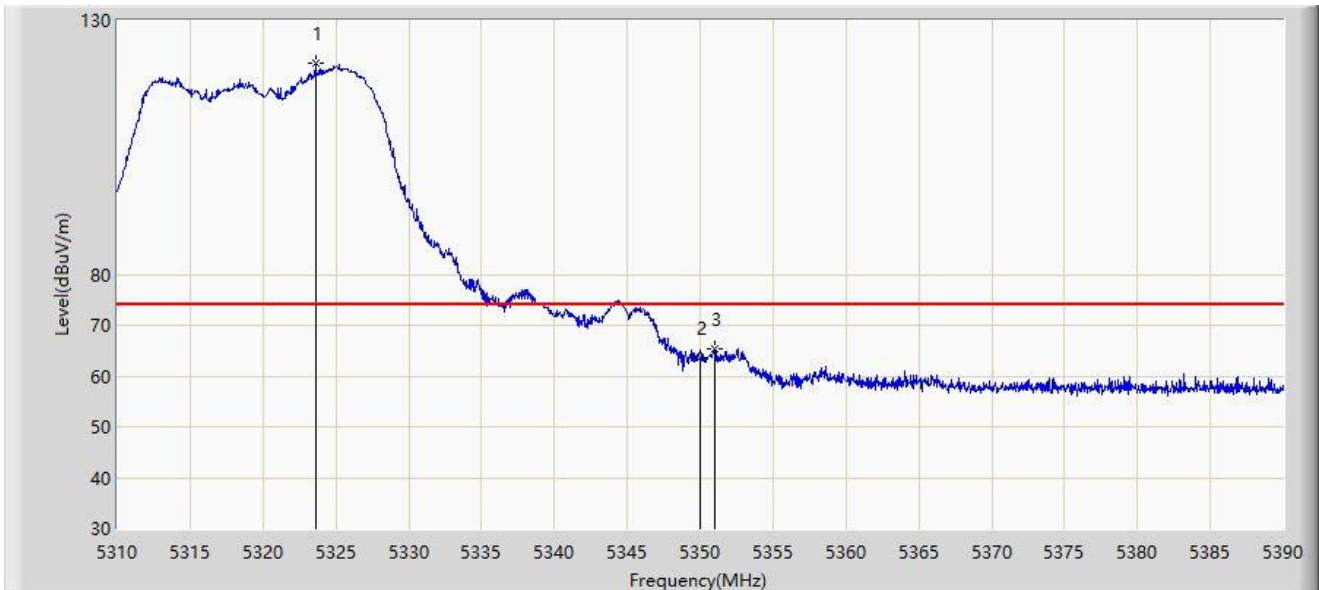


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5323.600	121.491	117.885	N/A	N/A	3.605	PK
2		5350.000	63.584	60.056	-10.416	74.000	3.527	PK
3	*	5351.040	65.400	61.878	-8.600	74.000	3.522	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

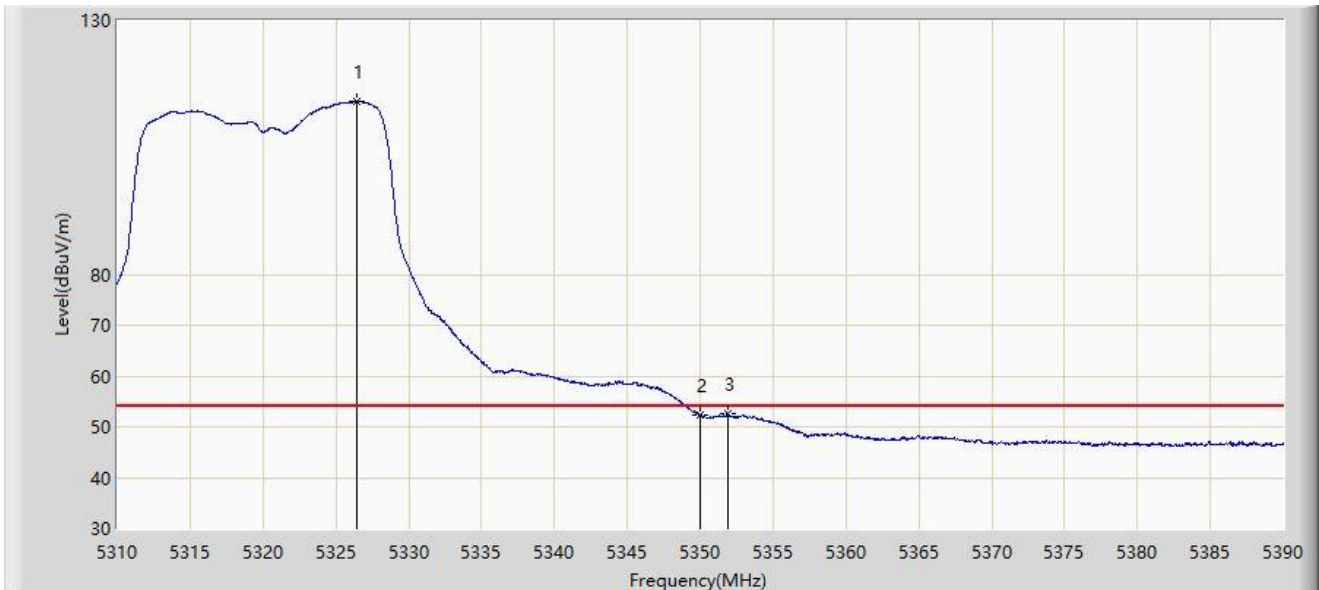


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.400	114.058	110.466	N/A	N/A	3.593	AV
2		5350.000	52.260	48.732	-1.740	54.000	3.527	AV
3	*	5351.880	52.500	48.983	-1.500	54.000	3.517	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

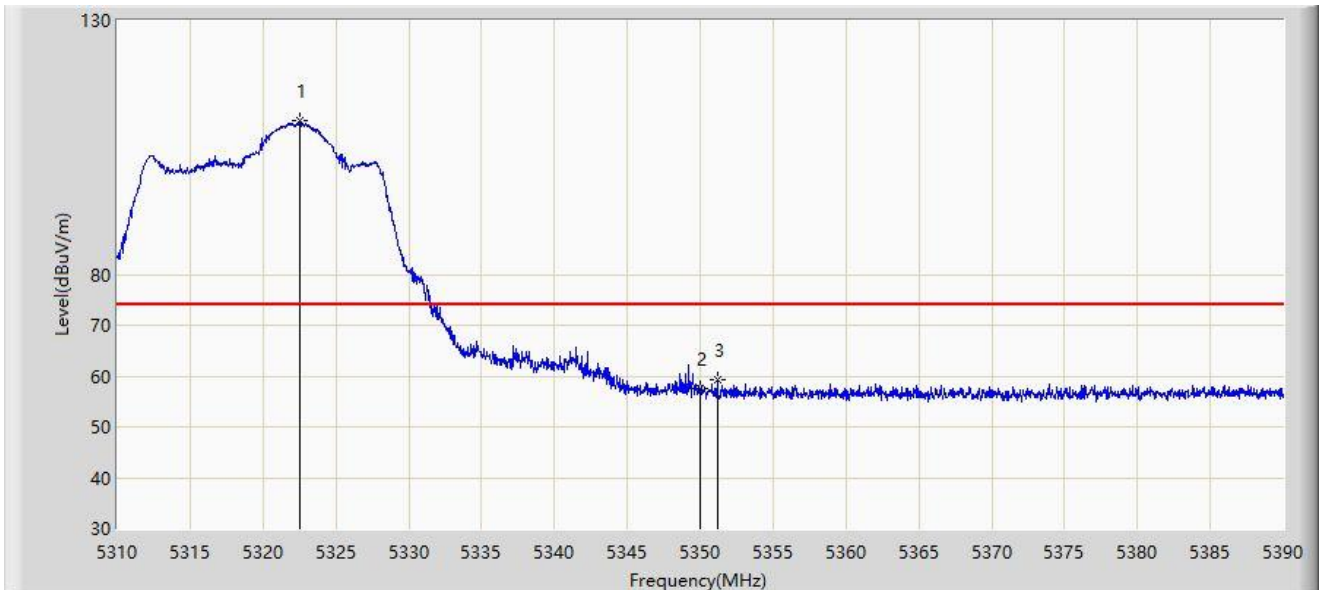


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5322.520	110.291	106.680	N/A	N/A	3.611	PK
2		5350.000	57.479	53.951	-16.521	74.000	3.527	PK
3	*	5351.160	59.247	55.726	-14.753	74.000	3.520	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

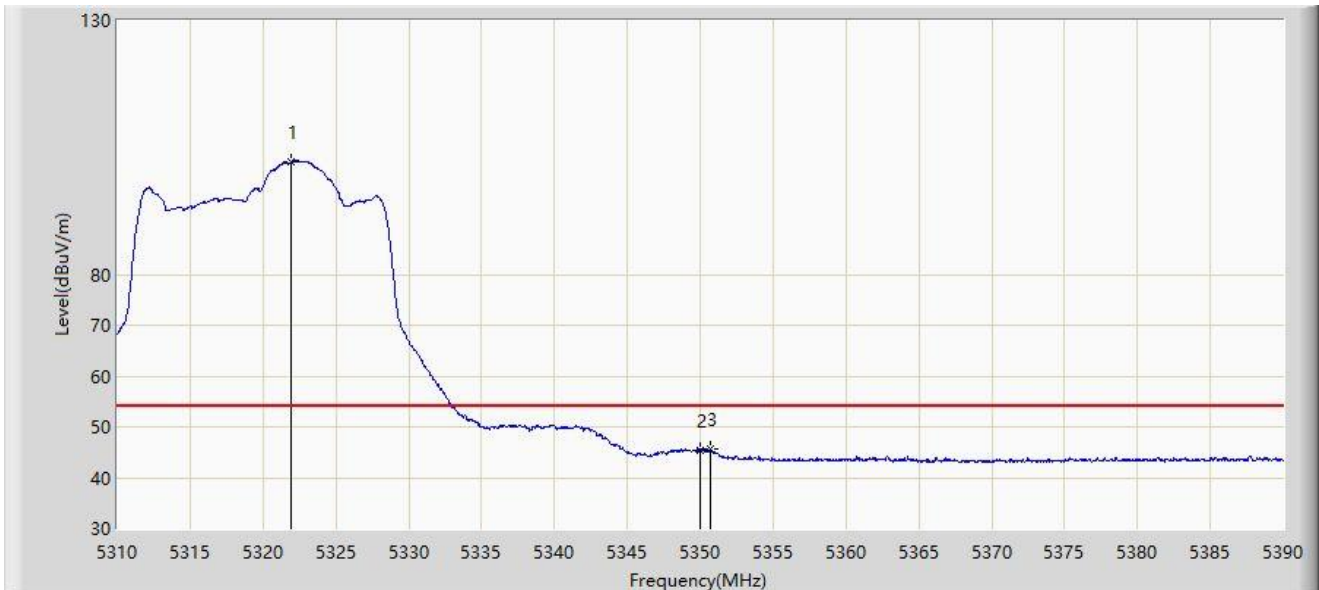


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5321.960	102.227	98.613	N/A	N/A	3.614	AV
2		5350.000	45.471	41.943	-8.529	54.000	3.527	AV
3	*	5350.720	45.633	42.109	-8.367	54.000	3.524	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

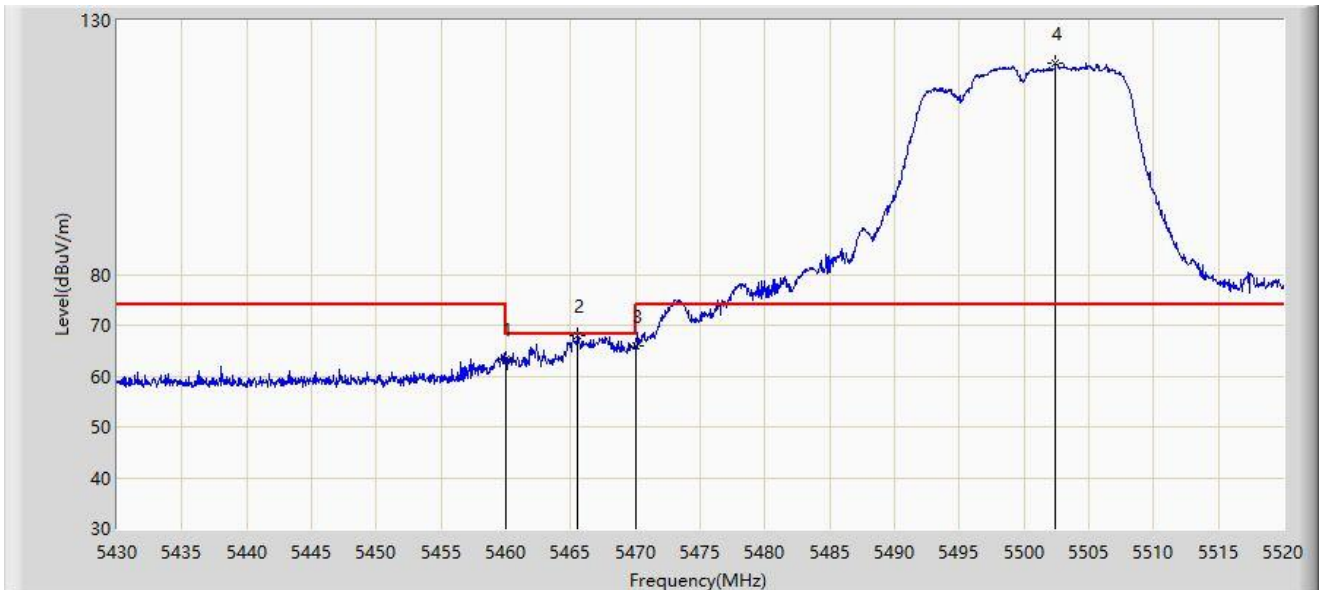


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	63.404	59.666	-10.596	74.000	3.738	PK
2	*	5465.550	67.848	64.088	-0.352	68.200	3.760	PK
3		5470.000	66.047	62.270	-2.153	68.200	3.777	PK
4		5502.450	121.695	117.661	N/A	N/A	4.034	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

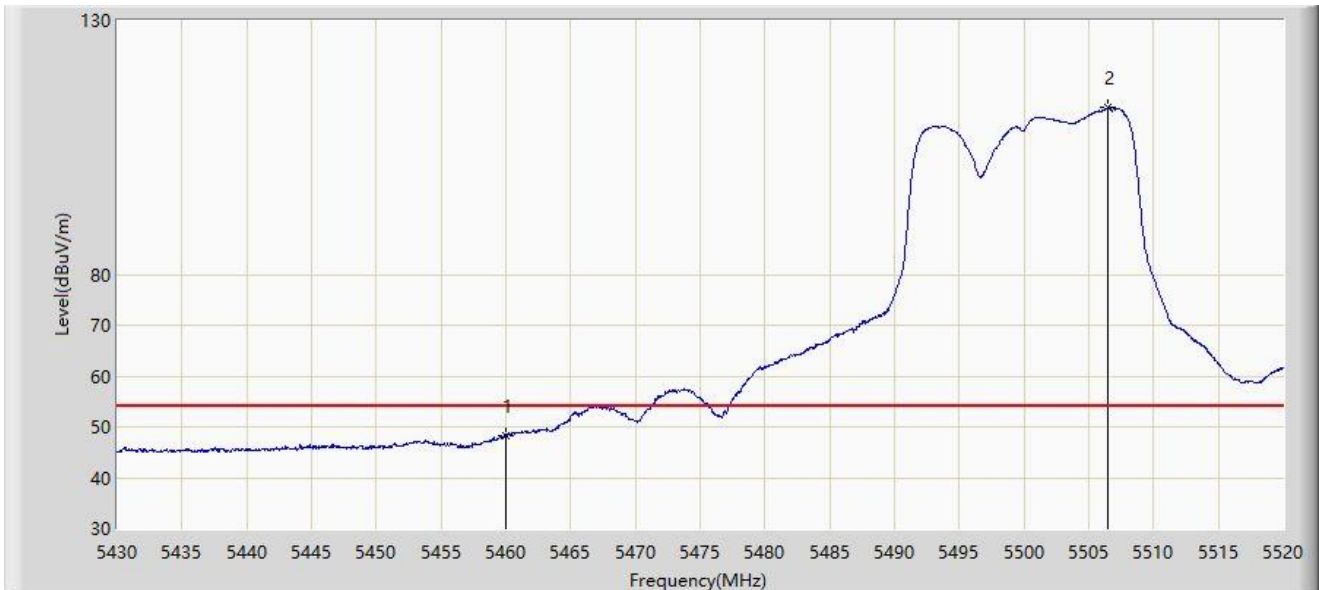


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	48.394	44.656	-5.606	54.000	3.738	AV
2		5506.500	112.776	108.751	N/A	N/A	4.024	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

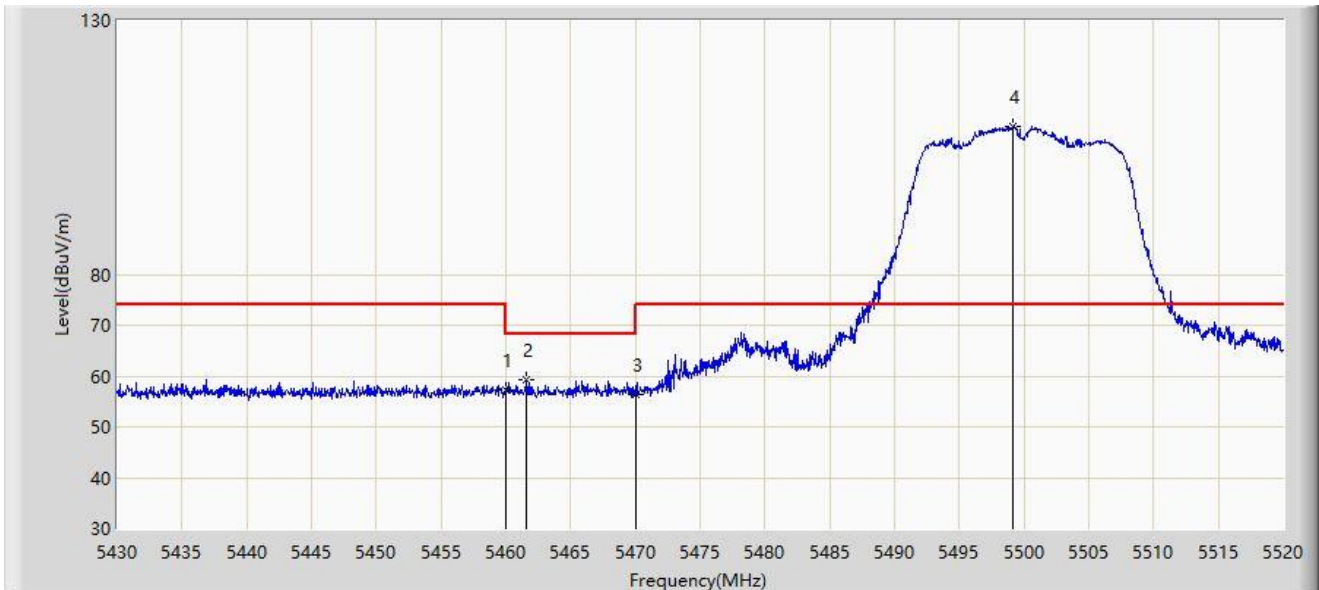


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	57.315	53.577	-16.685	74.000	3.738	PK
2	*	5461.590	59.326	55.582	-8.874	68.200	3.744	PK
3		5470.000	56.298	52.521	-11.902	68.200	3.777	PK
4		5499.165	109.239	105.210	N/A	N/A	4.030	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

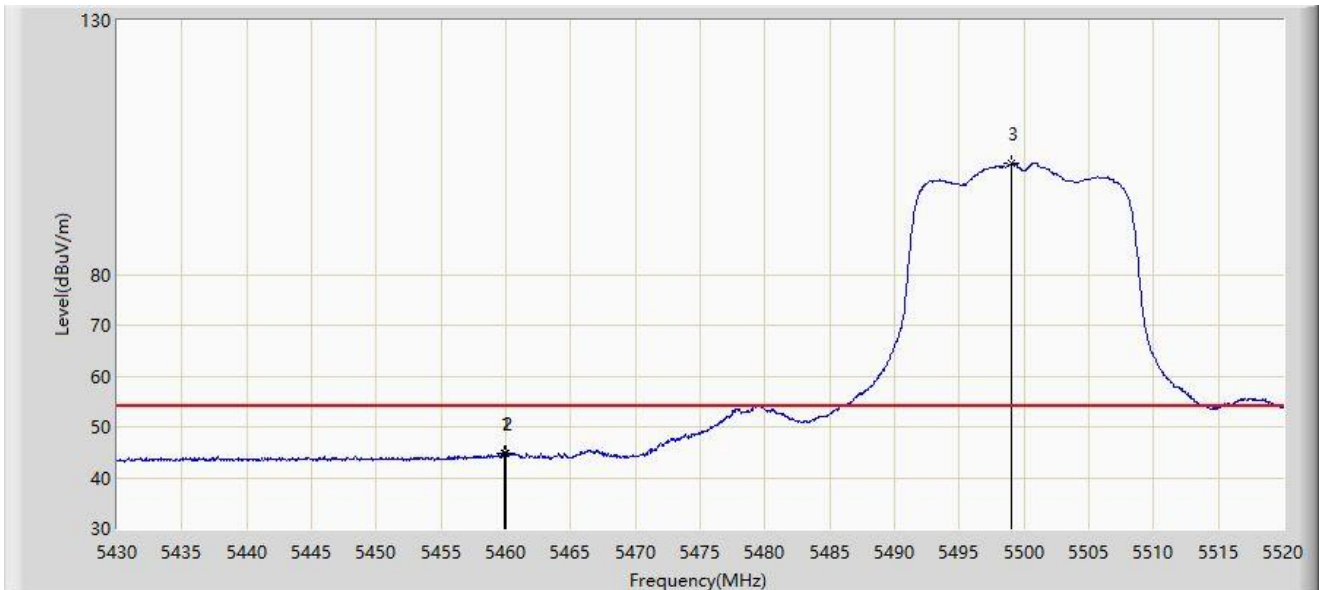


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.835	44.916	41.179	-9.084	54.000	3.737	AV
2		5460.000	44.675	40.937	-9.325	54.000	3.738	AV
3		5499.030	101.903	97.874	N/A	N/A	4.029	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

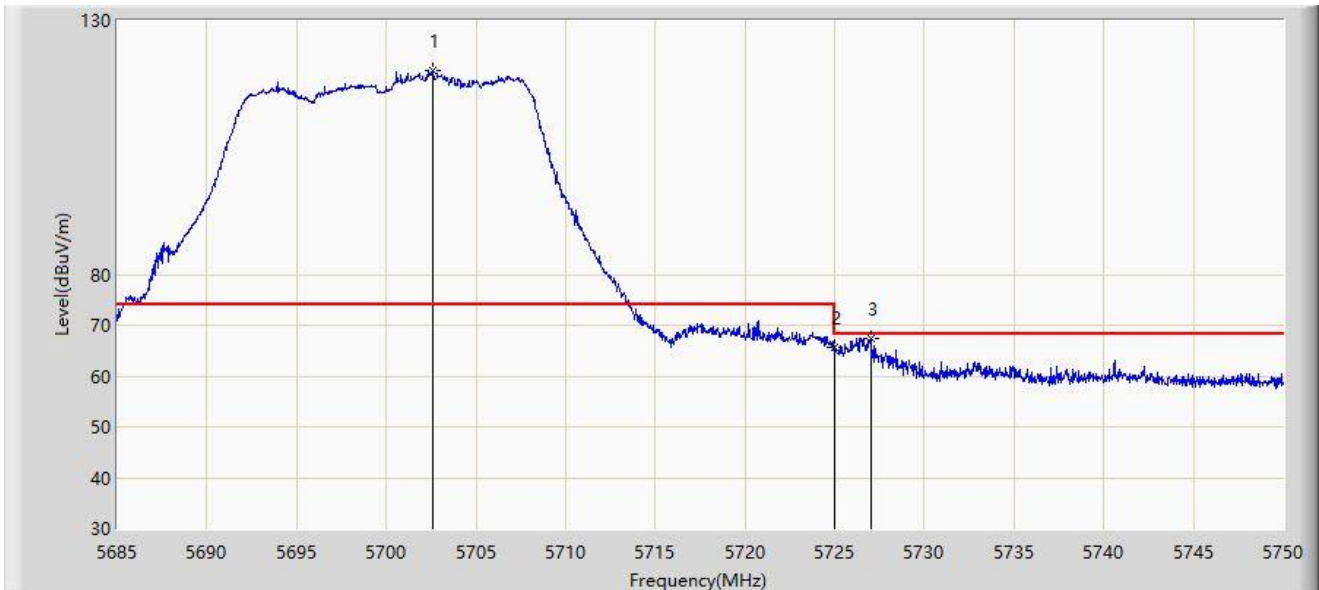


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5702.583	120.112	115.934	N/A	N/A	4.178	PK
2		5725.000	65.659	61.429	-2.541	68.200	4.230	PK
3	*	5726.990	67.475	63.239	-0.725	68.200	4.235	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

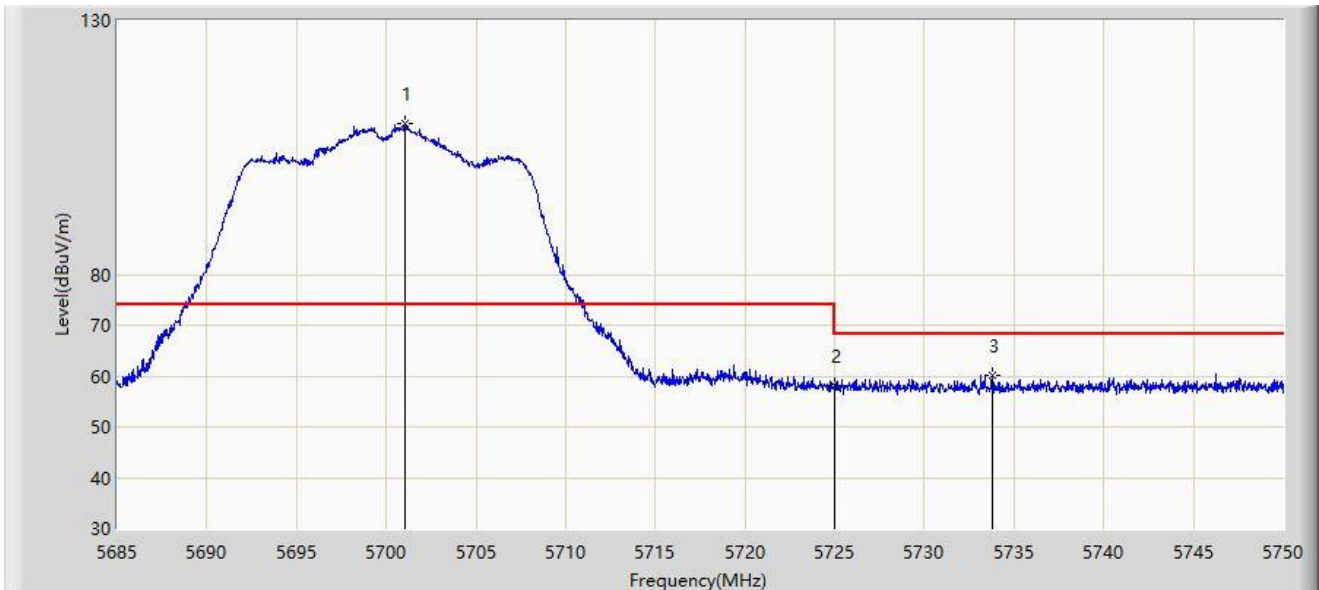


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5701.022	109.761	105.589	N/A	N/A	4.172	PK
2		5725.000	58.169	53.939	-10.031	68.200	4.230	PK
3	*	5733.750	60.204	55.903	-7.996	68.200	4.301	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

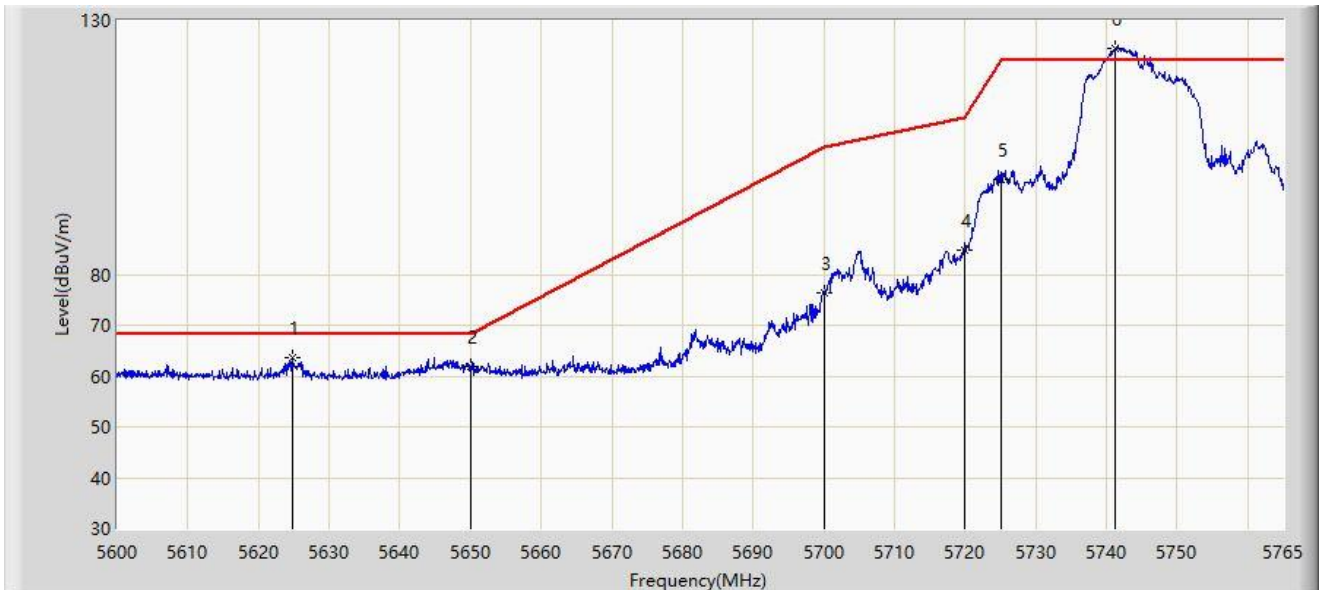


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5624.833	63.491	59.676	-4.709	68.200	3.816	PK
2		5650.000	61.853	57.793	-6.347	68.200	4.060	PK
3		5700.000	76.309	72.141	-28.891	105.200	4.168	PK
4		5720.000	84.808	80.588	-25.992	110.800	4.219	PK
5		5725.000	98.653	94.423	-23.547	122.200	4.230	PK
6		5741.322	124.570	120.195	N/A	N/A	4.374	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

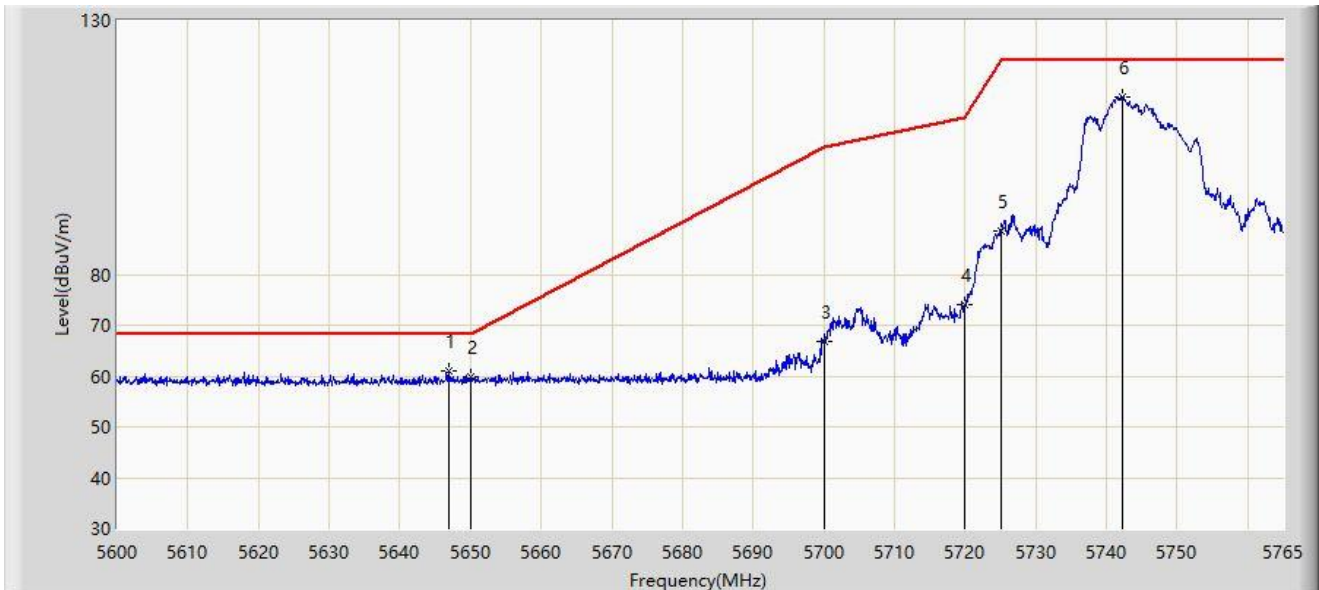


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.025	60.914	56.929	-7.286	68.200	3.985	PK
2		5650.000	59.725	55.665	-8.475	68.200	4.060	PK
3		5700.000	66.819	62.651	-38.381	105.200	4.168	PK
4		5720.000	74.074	69.854	-36.726	110.800	4.219	PK
5		5725.000	88.421	84.191	-33.779	122.200	4.230	PK
6		5742.230	115.002	110.618	N/A	N/A	4.384	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825MHz	

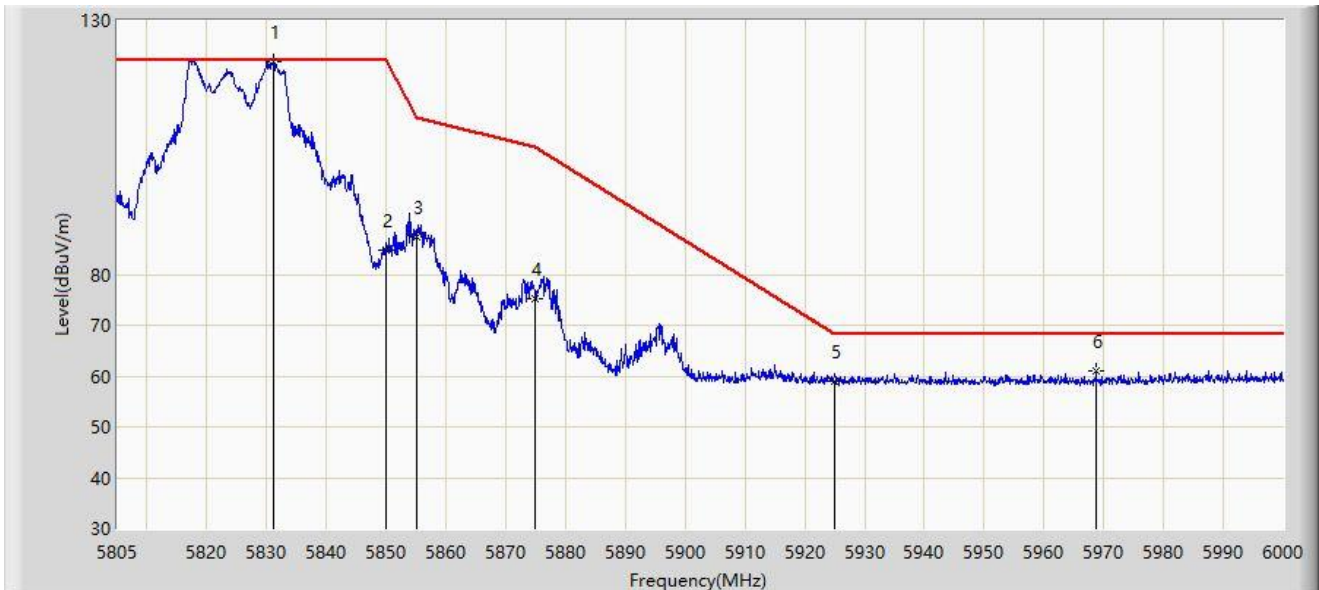


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5831.130	121.810	117.237	N/A	N/A	4.573	PK
2		5850.000	84.748	80.096	-37.452	122.200	4.651	PK
3		5855.000	87.531	82.907	-23.269	110.800	4.624	PK
4		5875.000	75.202	70.658	-29.998	105.200	4.543	PK
5		5925.000	59.079	54.327	-9.121	68.200	4.751	PK
6	*	5968.703	60.964	56.334	-7.236	68.200	4.630	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825MHz	

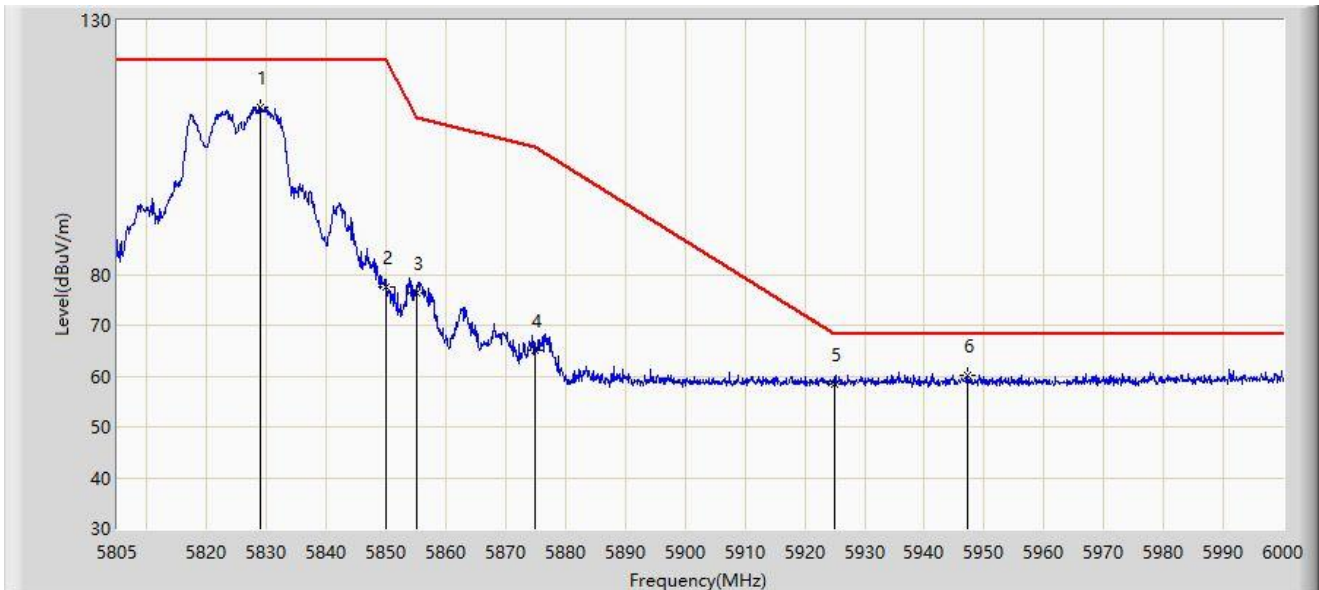


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5828.888	112.789	108.211	N/A	N/A	4.578	PK
2		5850.000	77.408	72.756	-44.792	122.200	4.651	PK
3		5855.000	76.274	71.650	-34.526	110.800	4.624	PK
4		5875.000	65.216	60.672	-39.984	105.200	4.543	PK
5		5925.000	58.331	53.579	-9.869	68.200	4.751	PK
6	*	5947.155	60.161	55.546	-8.039	68.200	4.615	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

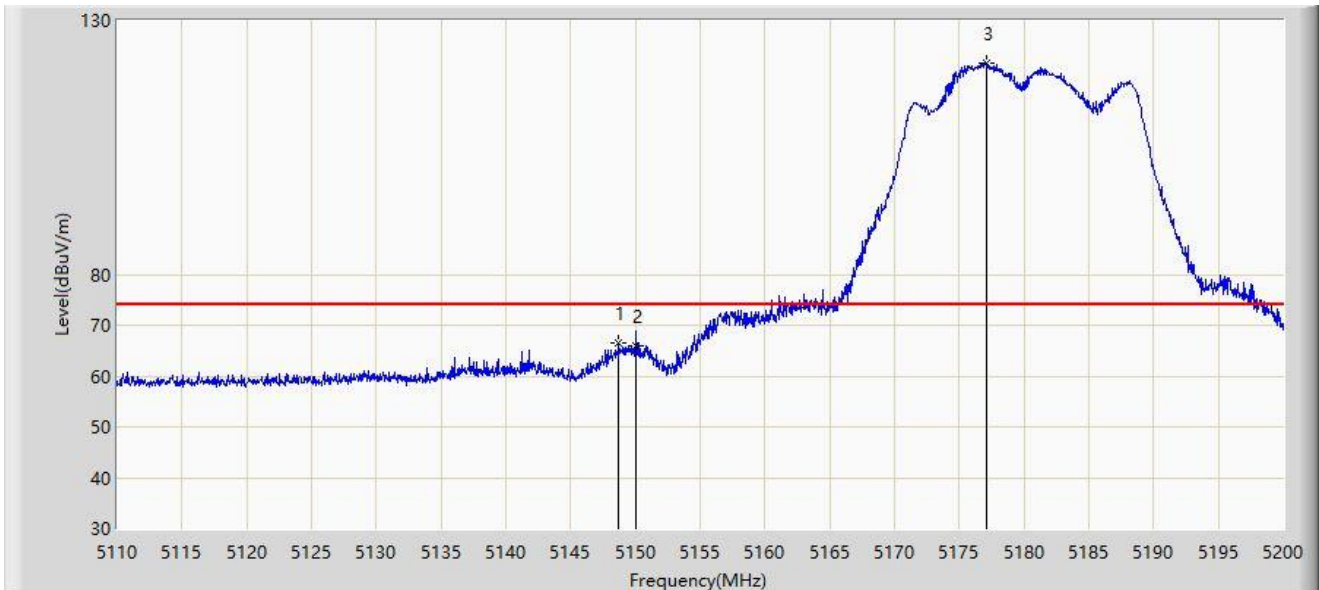


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.700	66.641	62.869	-7.359	74.000	3.772	PK
2		5150.000	66.032	62.260	-7.968	74.000	3.773	PK
3		5177.140	121.546	117.988	N/A	N/A	3.558	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

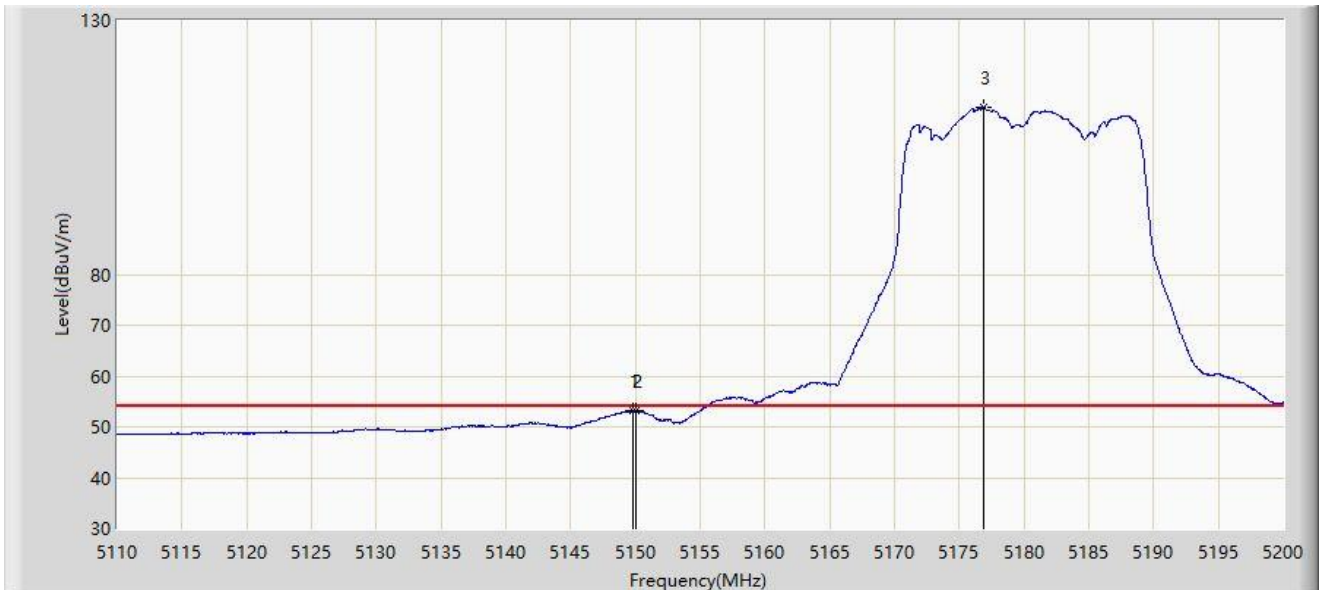


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.780	53.166	49.394	-0.834	54.000	3.772	AV
2		5150.000	53.058	49.286	-0.942	54.000	3.773	AV
3		5176.870	112.791	109.230	N/A	N/A	3.561	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

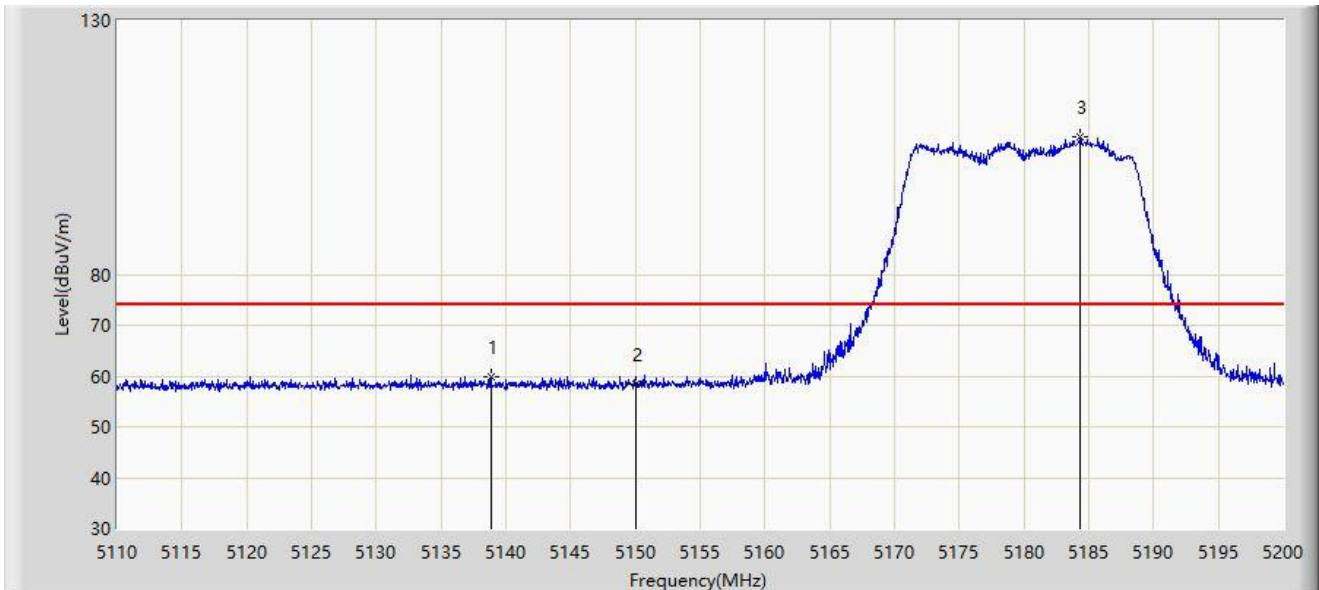


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5138.845	59.750	55.941	-14.250	74.000	3.809	PK
2		5150.000	58.366	54.594	-15.634	74.000	3.773	PK
3		5184.340	106.978	103.463	N/A	N/A	3.515	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

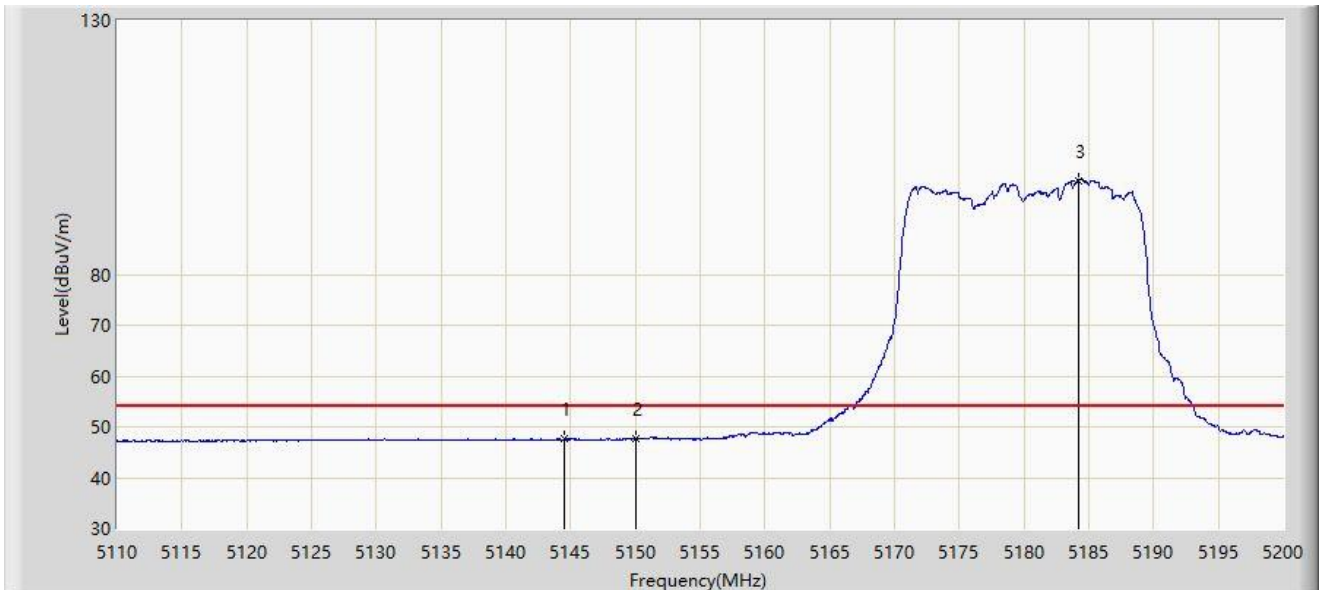


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5144.470	47.566	43.779	-6.434	54.000	3.786	AV
2	*	5150.000	47.595	43.823	-6.405	54.000	3.773	AV
3		5184.205	98.513	94.998	N/A	N/A	3.515	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

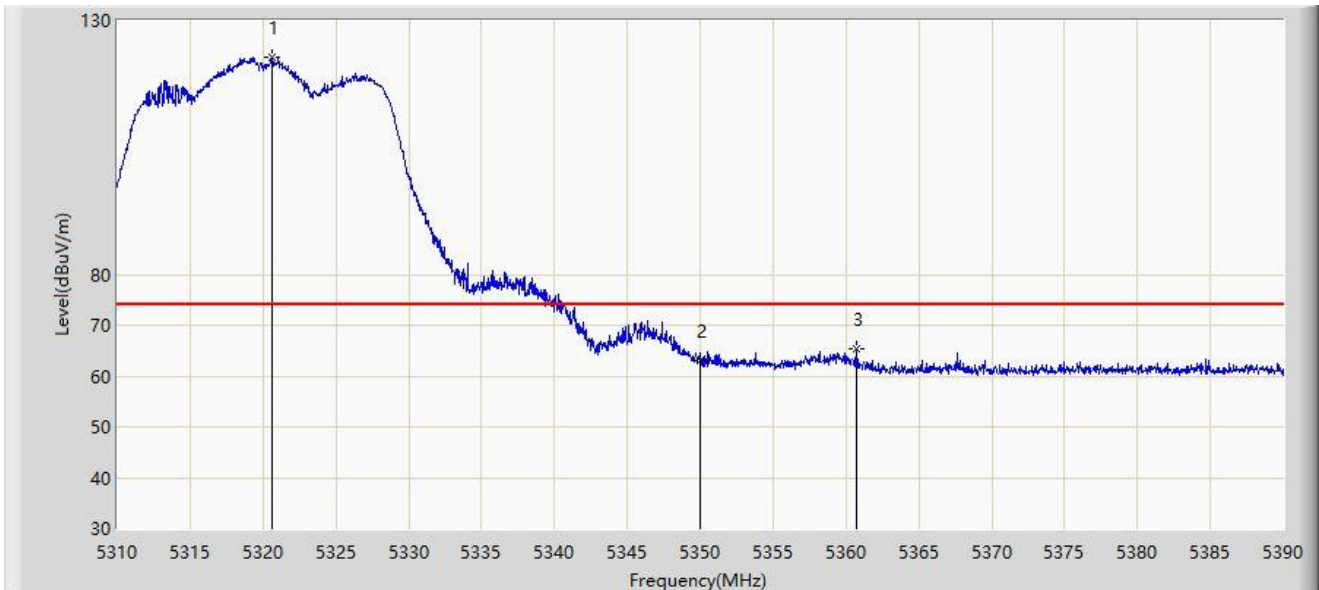


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.640	122.784	119.164	N/A	N/A	3.620	PK
2		5350.000	62.986	59.458	-11.014	74.000	3.527	PK
3	*	5360.680	65.273	61.837	-8.727	74.000	3.436	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

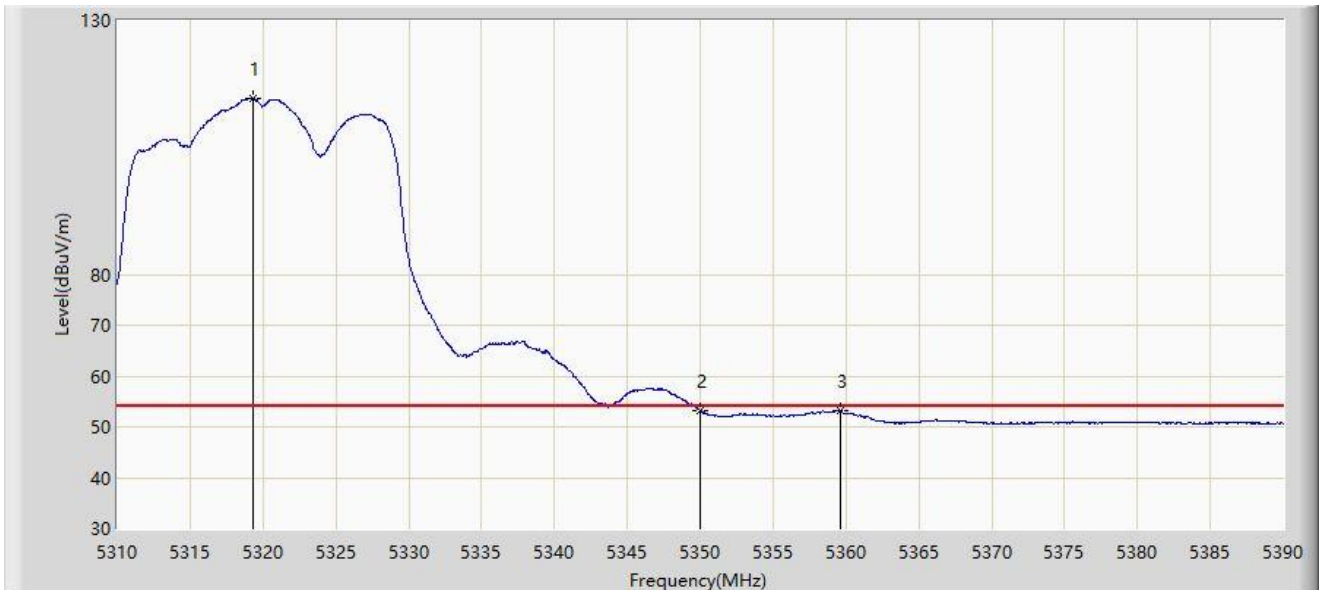


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.280	114.664	111.037	N/A	N/A	3.627	AV
2	*	5350.000	53.259	49.731	-0.741	54.000	3.527	AV
3		5359.600	53.254	49.808	-0.746	54.000	3.446	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

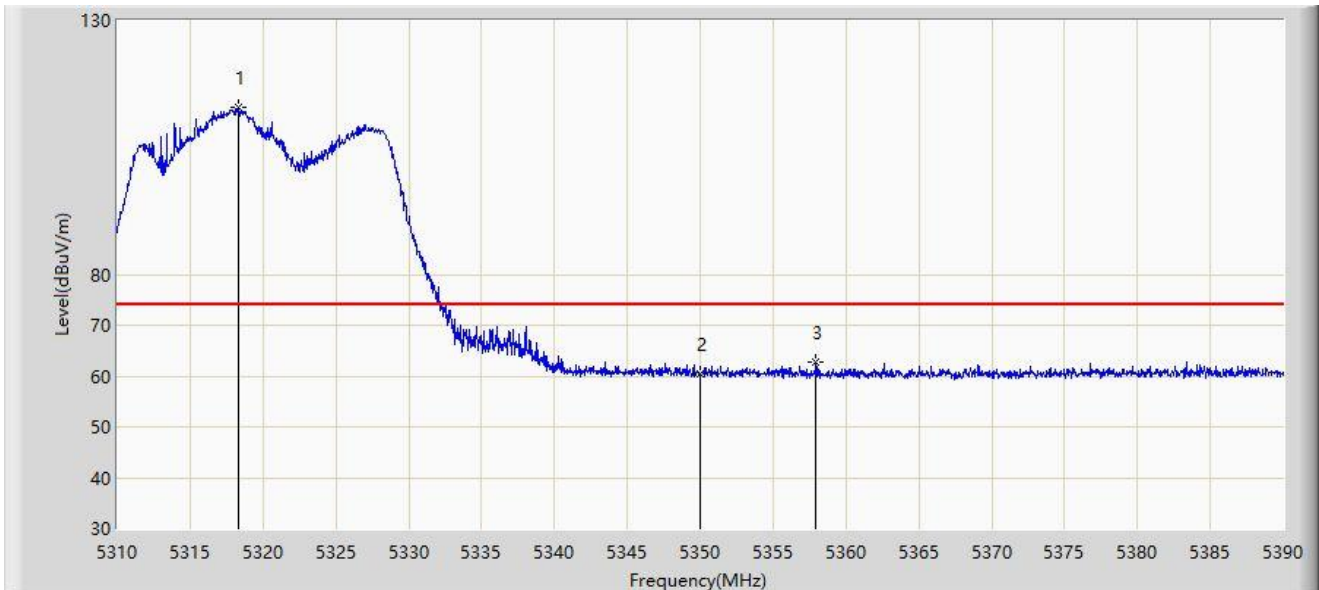


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.280	112.868	109.236	N/A	N/A	3.633	PK
2		5350.000	60.529	57.001	-13.471	74.000	3.527	PK
3	*	5357.960	62.652	59.191	-11.348	74.000	3.461	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

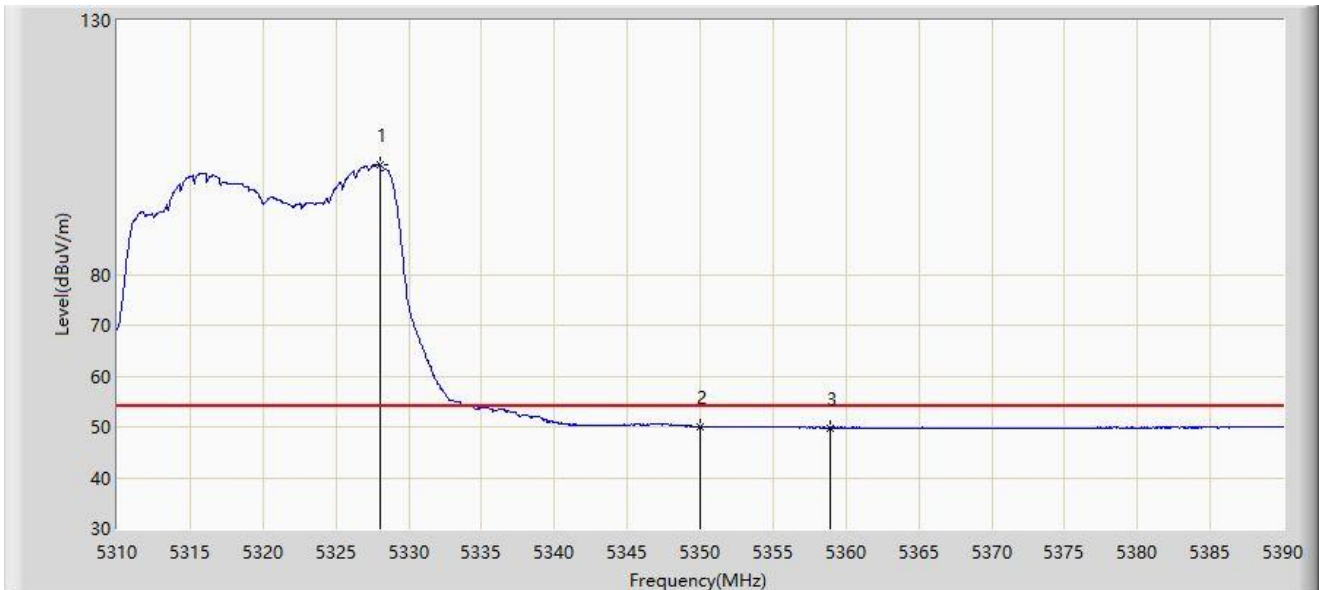


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5328.000	101.470	97.886	N/A	N/A	3.584	AV
2	*	5350.000	50.029	46.501	-3.971	54.000	3.527	AV
3		5358.960	49.833	46.381	-4.167	54.000	3.452	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

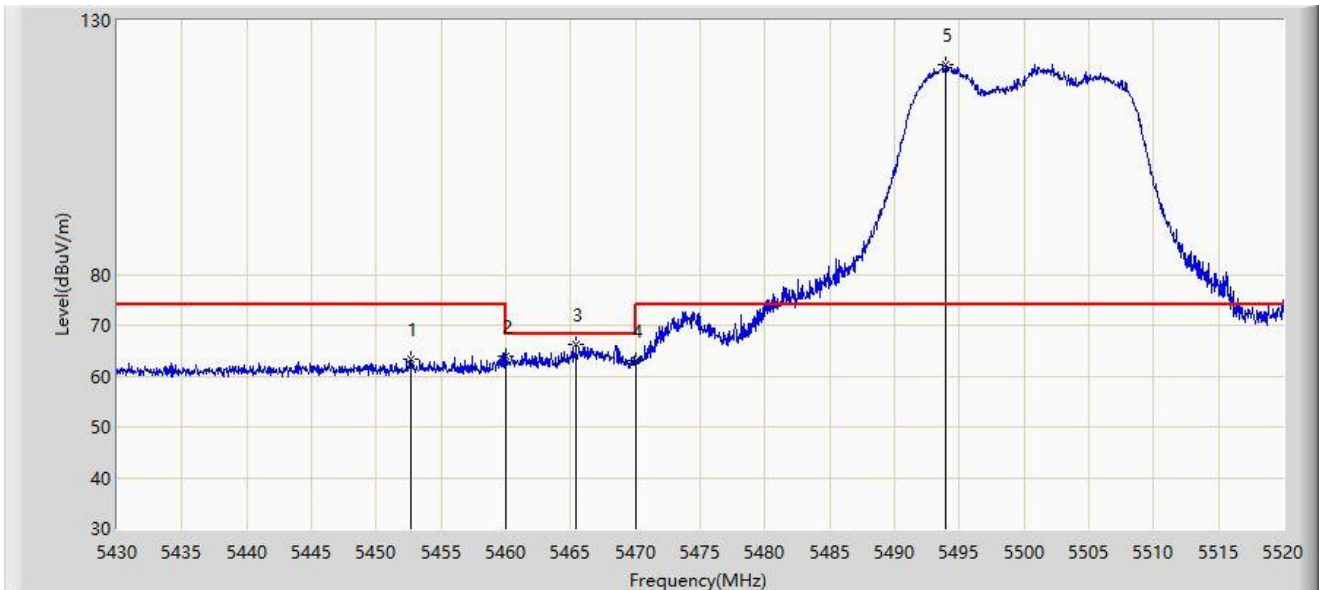


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5452.680	63.334	59.637	-10.666	74.000	3.697	PK
2		5460.000	63.843	60.105	-10.157	74.000	3.738	PK
3	*	5465.415	66.117	62.358	-2.083	68.200	3.758	PK
4		5470.000	63.083	59.306	-5.117	68.200	3.777	PK
5		5493.990	121.401	117.379	N/A	N/A	4.022	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

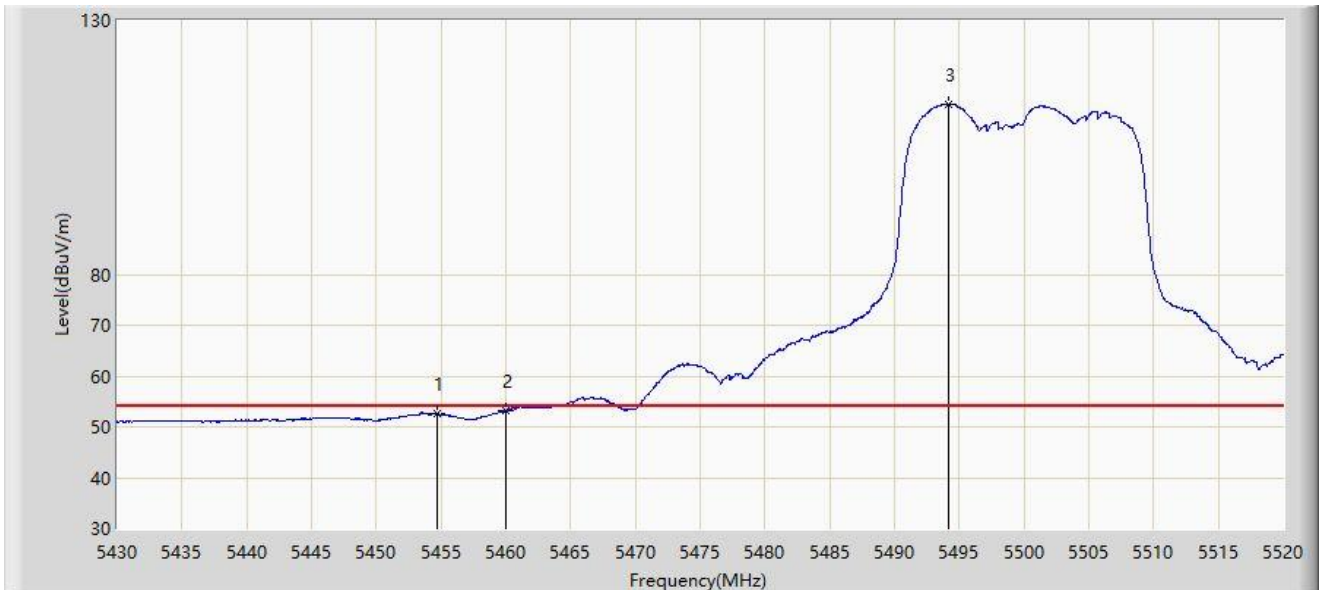


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5454.705	52.664	48.960	-1.336	54.000	3.703	AV
2	*	5460.000	53.253	49.515	-0.747	54.000	3.738	AV
3		5494.215	113.553	109.530	N/A	N/A	4.023	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

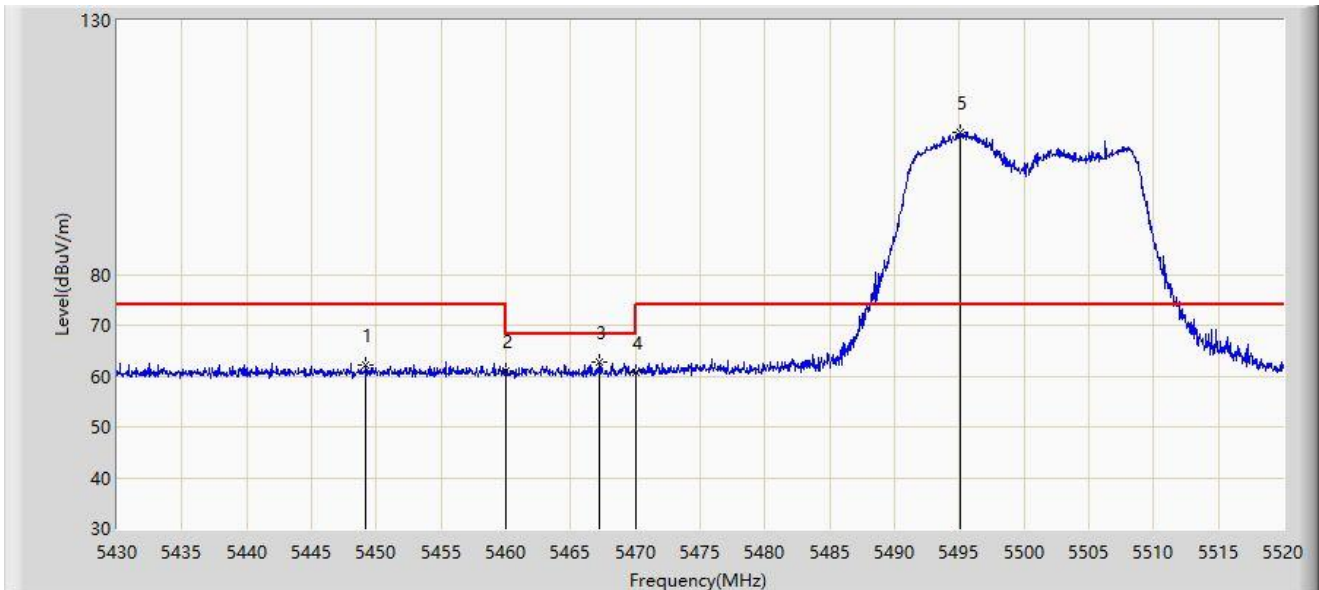


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5449.215	62.188	58.490	-11.812	74.000	3.698	PK
2		5460.000	61.021	57.283	-12.979	74.000	3.738	PK
3	*	5467.260	62.687	58.921	-5.513	68.200	3.767	PK
4		5470.000	60.636	56.859	-7.564	68.200	3.777	PK
5		5495.025	108.037	104.013	N/A	N/A	4.024	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

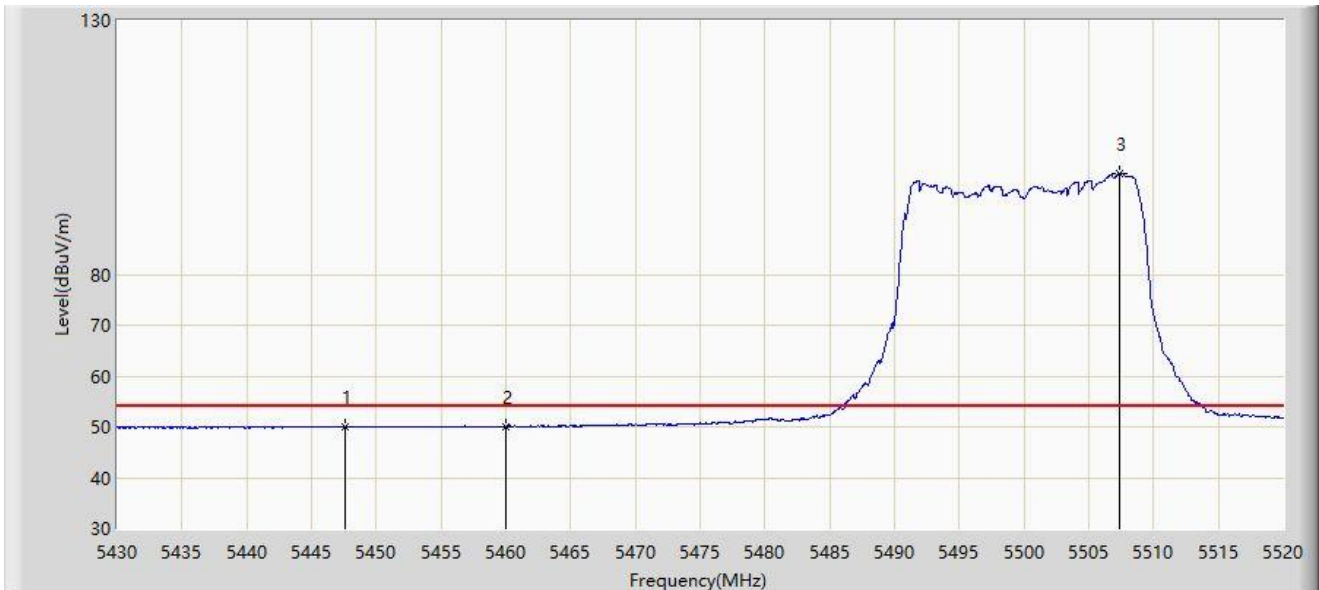


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5447.550	50.056	46.358	-3.944	54.000	3.699	AV
2	*	5460.000	50.084	46.346	-3.916	54.000	3.738	AV
3		5507.355	99.821	95.803	N/A	N/A	4.017	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

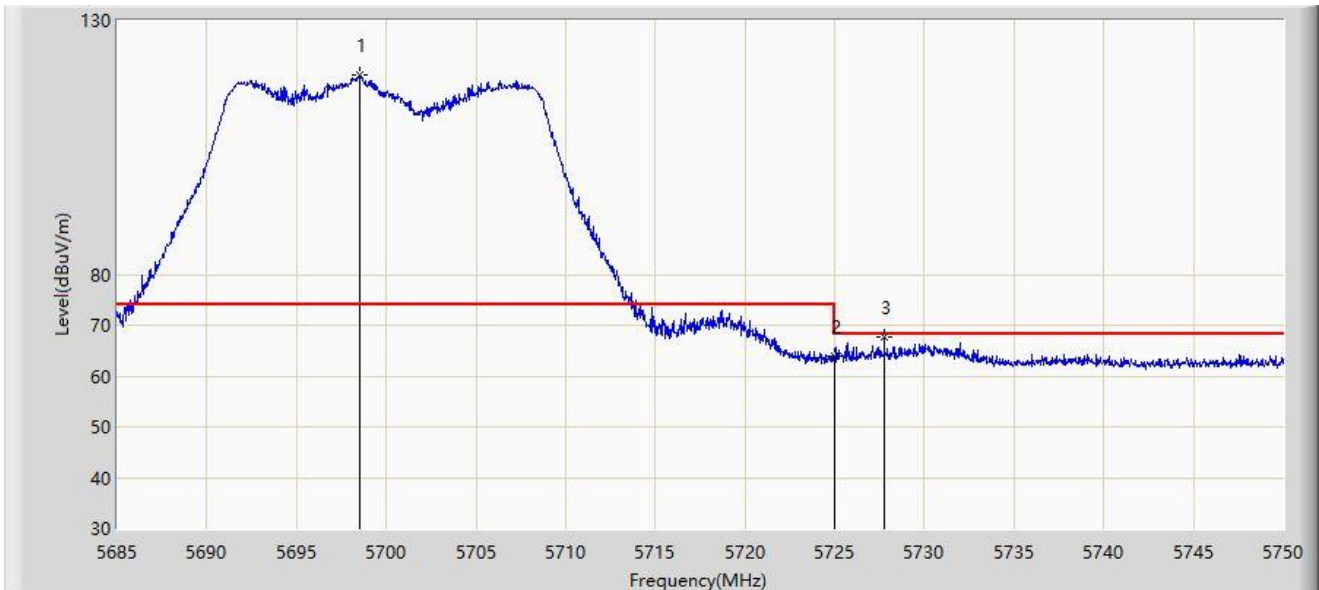


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5698.553	119.186	115.023	N/A	N/A	4.162	PK
2		5725.000	63.866	59.636	-4.334	68.200	4.230	PK
3	*	5727.770	67.641	63.398	-0.559	68.200	4.243	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

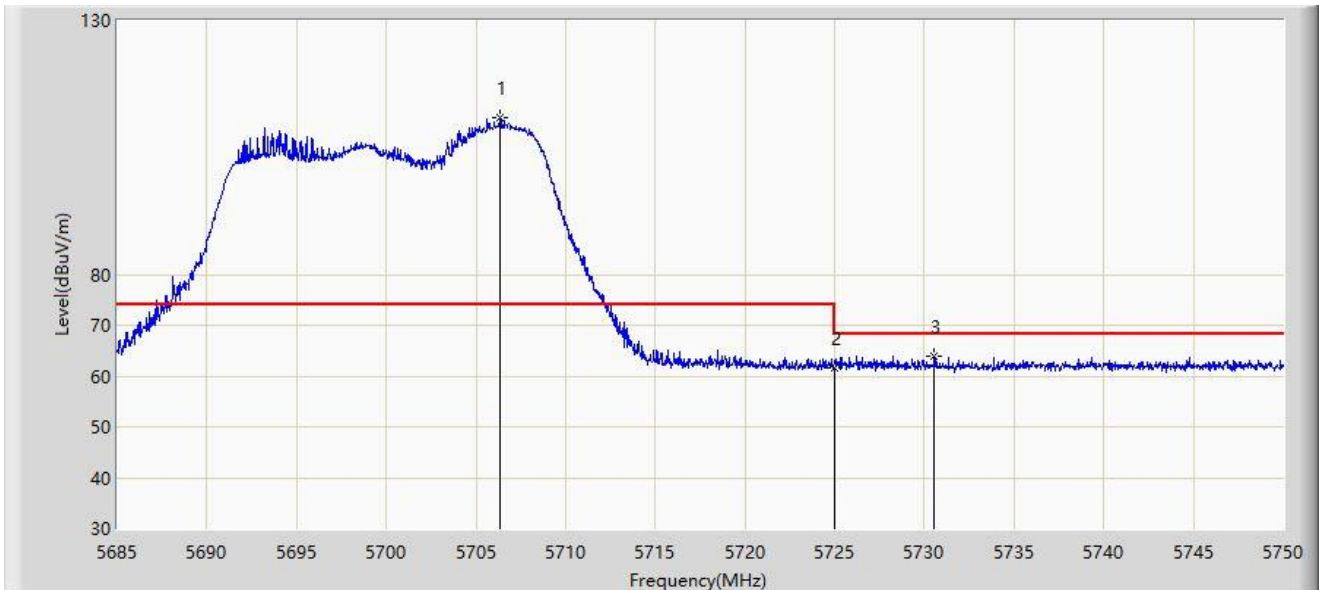


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5706.353	110.830	106.637	N/A	N/A	4.192	PK
2		5725.000	61.496	57.266	-6.704	68.200	4.230	PK
3	*	5730.565	64.016	59.746	-4.184	68.200	4.270	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

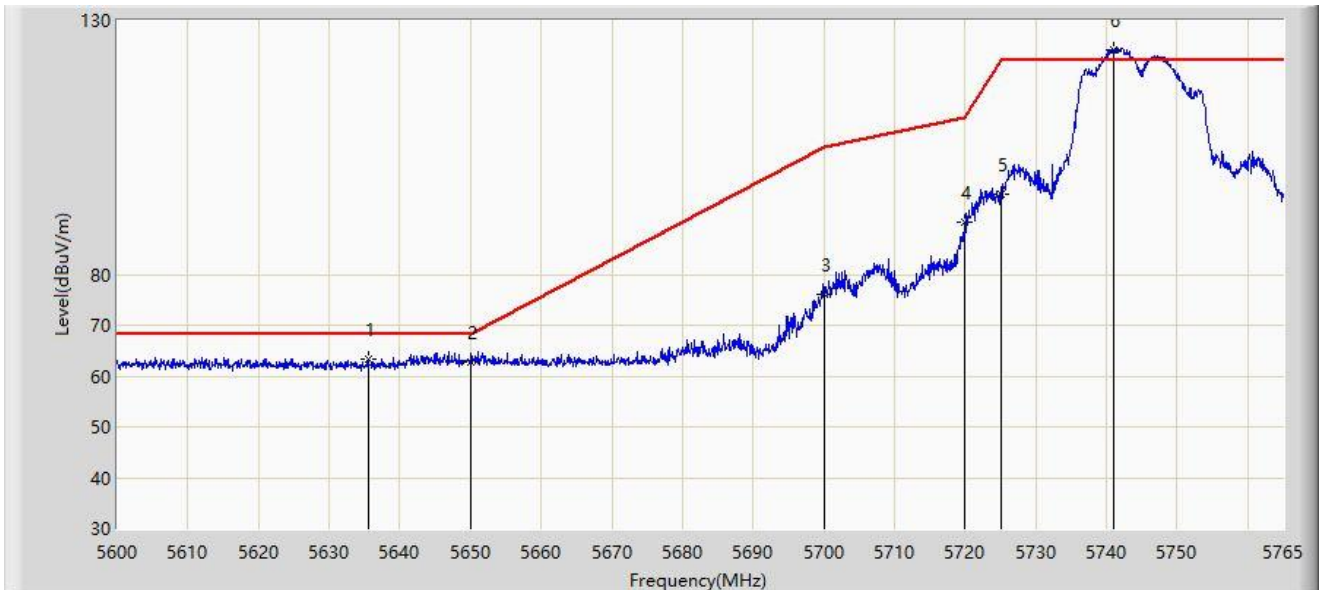


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5635.475	63.311	59.508	-4.889	68.200	3.803	PK
2		5650.000	62.710	58.650	-5.490	68.200	4.060	PK
3		5700.000	76.230	72.062	-28.970	105.200	4.168	PK
4		5720.000	90.262	86.042	-20.538	110.800	4.219	PK
5		5725.000	95.782	91.552	-26.418	122.200	4.230	PK
6		5741.075	124.268	119.896	N/A	N/A	4.372	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

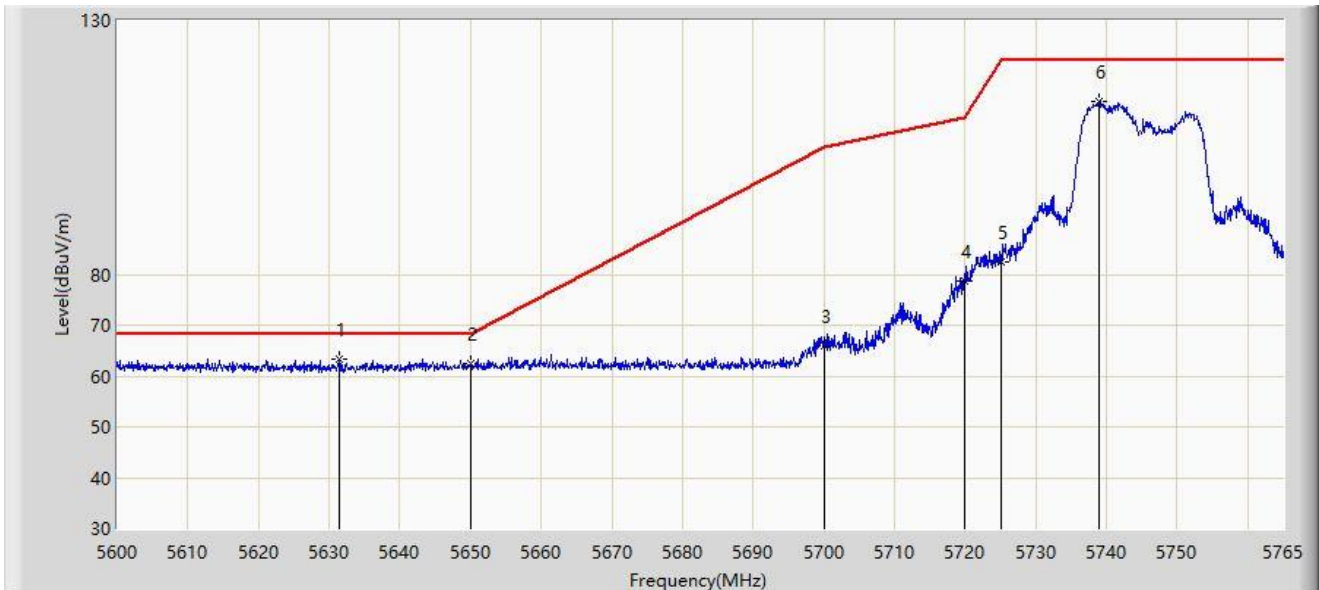


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5631.515	63.231	59.423	-4.969	68.200	3.807	PK
2		5650.000	62.487	58.427	-5.713	68.200	4.060	PK
3		5700.000	65.993	61.825	-39.207	105.200	4.168	PK
4		5720.000	78.571	74.351	-32.229	110.800	4.219	PK
5		5725.000	82.556	78.326	-39.644	122.200	4.230	PK
6		5739.013	114.177	109.825	N/A	N/A	4.353	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

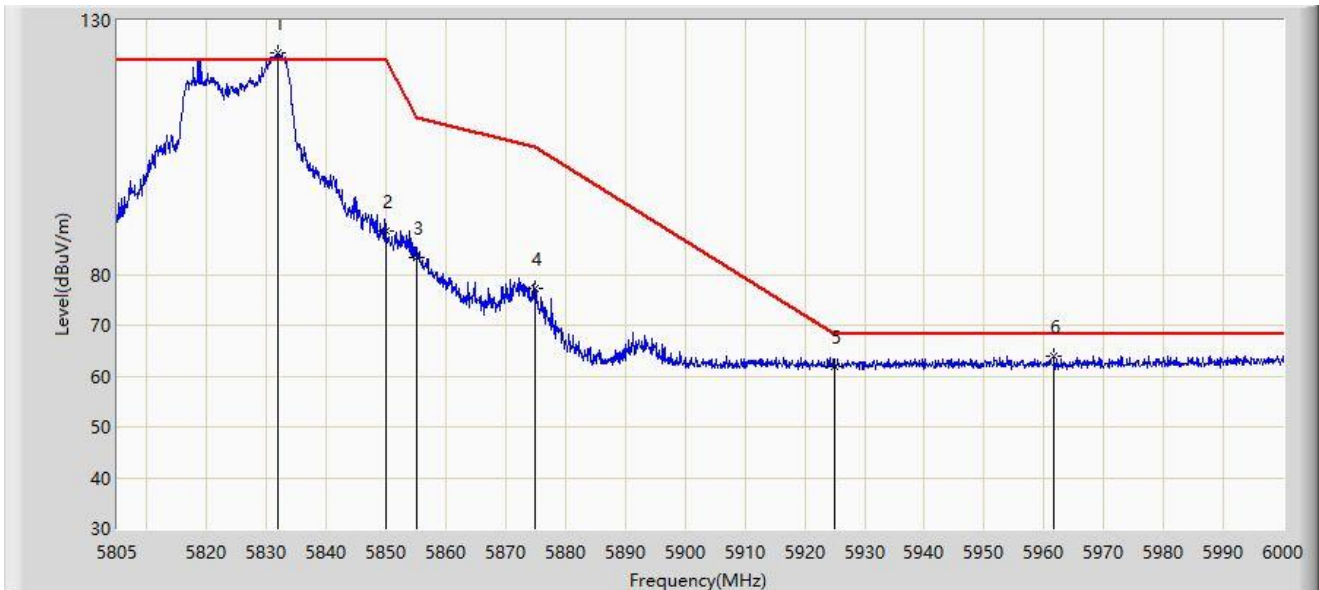


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5831.910	123.632	119.061	N/A	N/A	4.572	PK
2		5850.000	88.692	84.040	-33.508	122.200	4.651	PK
3		5855.000	83.477	78.853	-27.323	110.800	4.624	PK
4		5875.000	77.166	72.622	-28.034	105.200	4.543	PK
5		5925.000	61.938	57.186	-6.262	68.200	4.751	PK
6	*	5961.683	63.960	59.370	-4.240	68.200	4.590	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

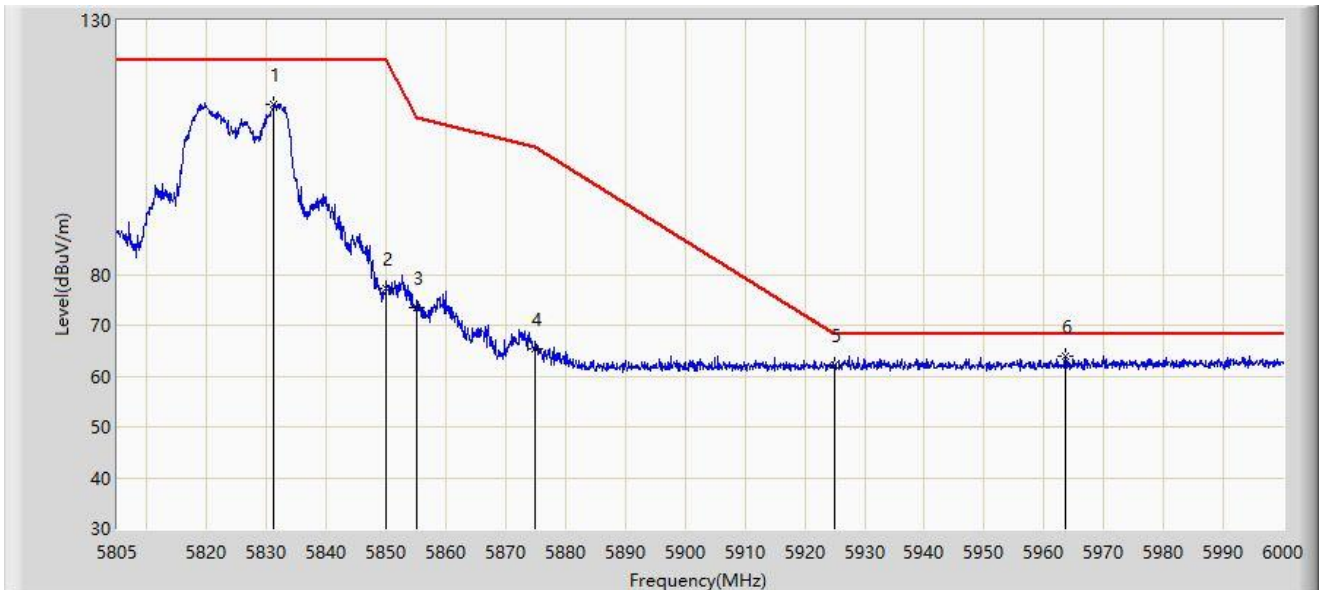


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5831.130	113.580	109.007	N/A	N/A	4.573	PK
2		5850.000	77.193	72.541	-45.007	122.200	4.651	PK
3		5855.000	73.443	68.819	-37.357	110.800	4.624	PK
4		5875.000	65.465	60.921	-39.735	105.200	4.543	PK
5		5925.000	62.252	57.500	-5.948	68.200	4.751	PK
6	*	5963.535	64.001	59.425	-4.199	68.200	4.576	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

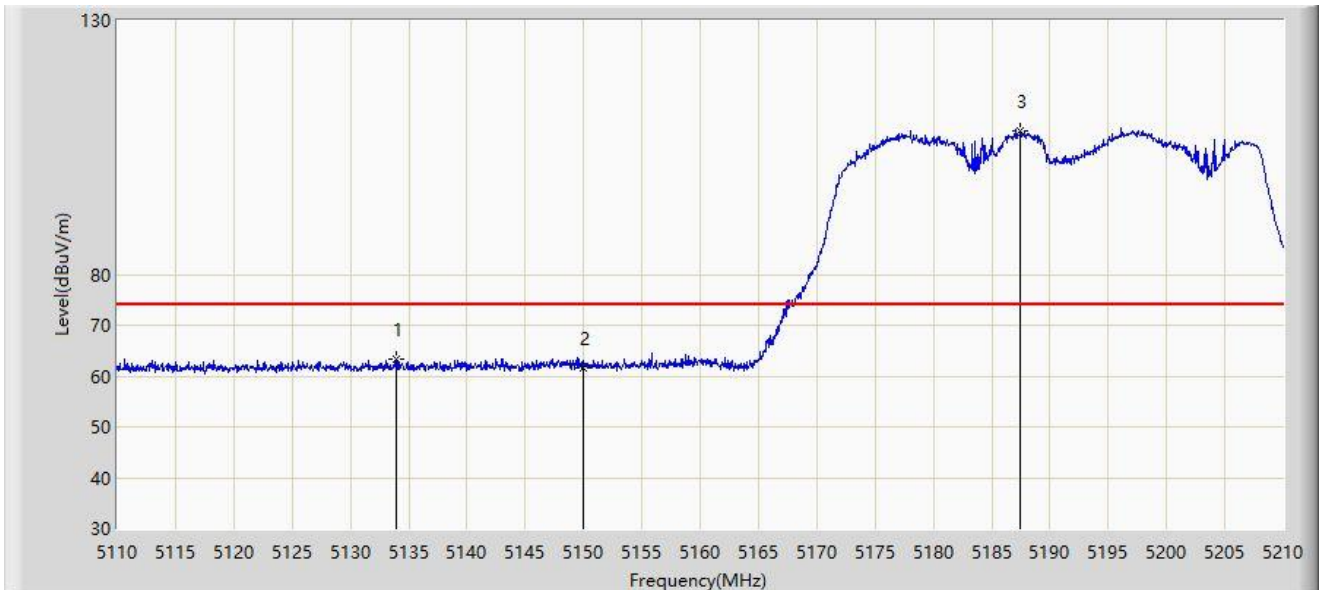


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5133.900	63.411	59.582	-10.589	74.000	3.828	PK
2		5150.000	61.726	57.954	-12.274	74.000	3.773	PK
3		5187.450	108.289	104.771	N/A	N/A	3.518	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

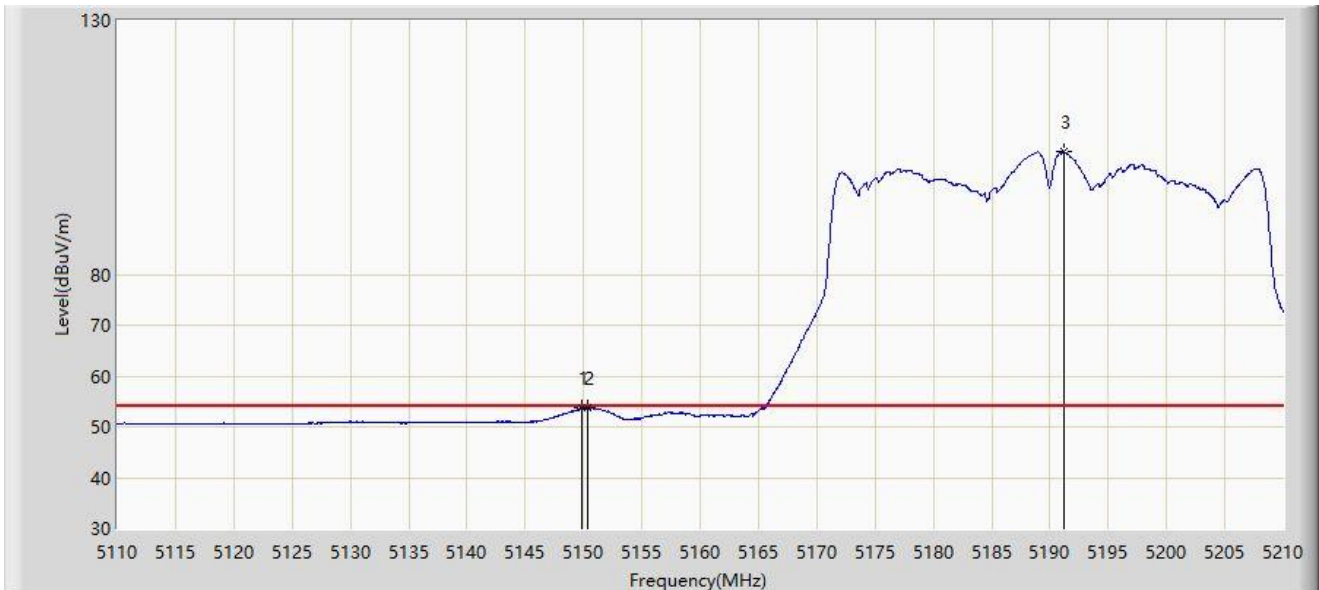


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5149.900	53.662	49.890	-0.338	54.000	3.773	AV
2	*	5150.400	53.681	49.909	-0.319	54.000	3.772	AV
3		5191.150	104.139	100.645	N/A	N/A	3.494	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

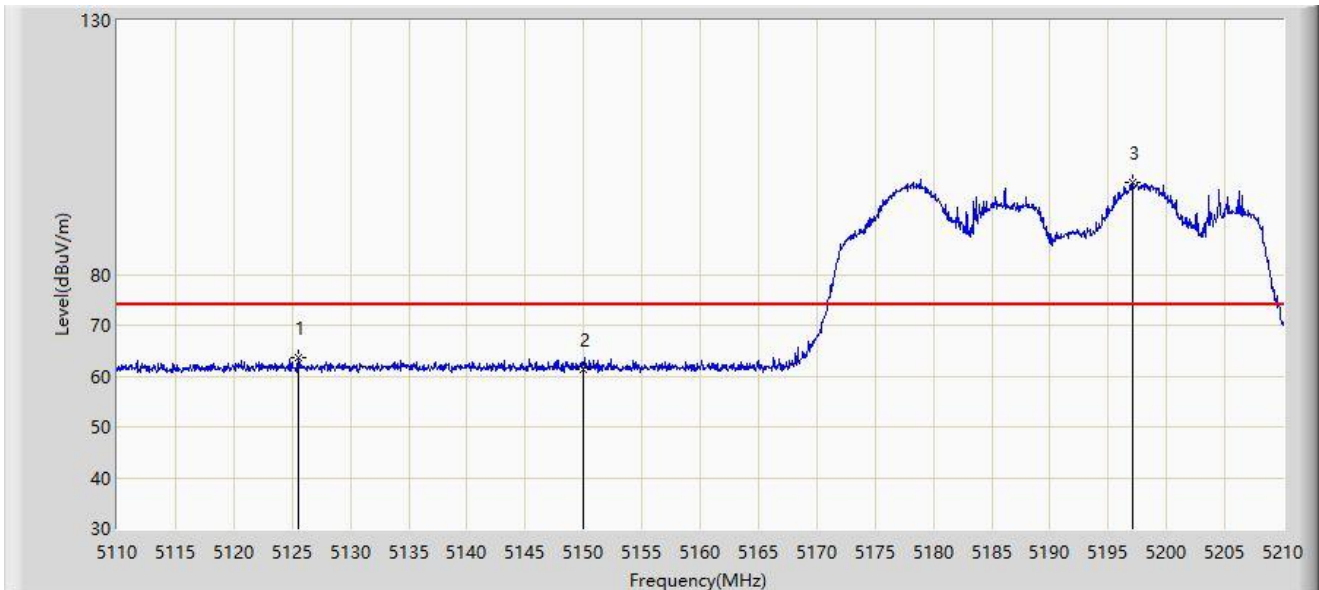


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5125.600	63.647	59.882	-10.353	74.000	3.766	PK
2		5150.000	61.441	57.669	-12.559	74.000	3.773	PK
3		5197.050	98.129	94.672	N/A	N/A	3.457	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

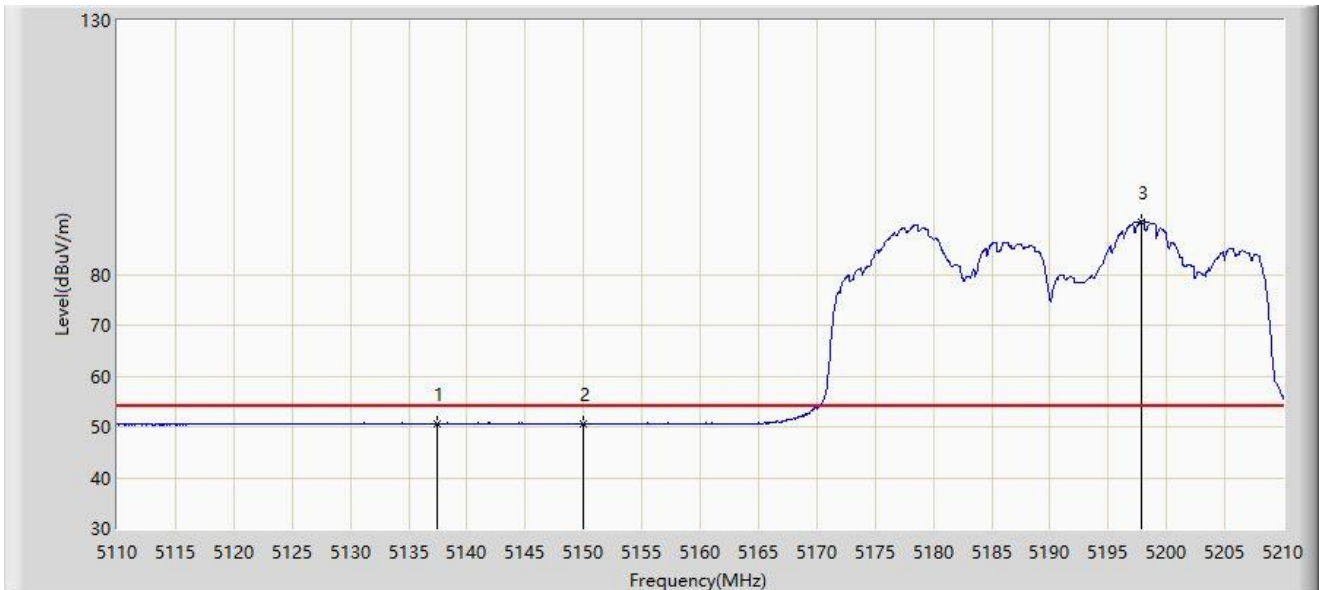


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5137.400	50.696	46.881	-3.304	54.000	3.814	AV
2		5150.000	50.645	46.873	-3.355	54.000	3.773	AV
3		5197.800	90.419	86.967	N/A	N/A	3.452	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

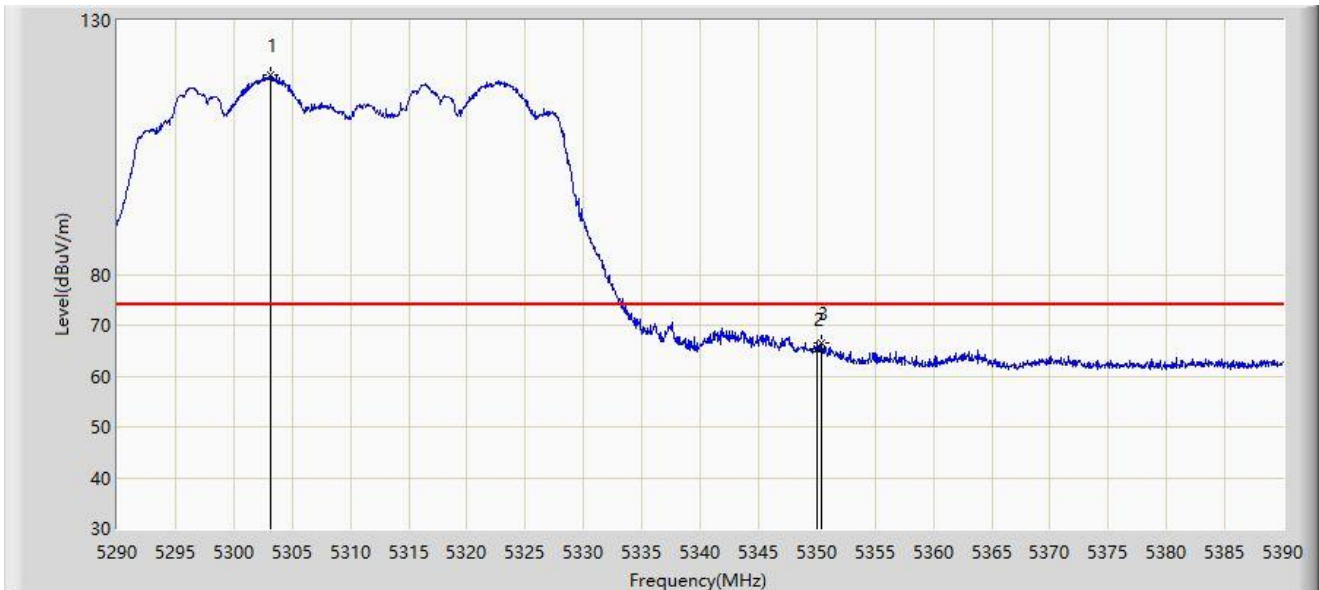


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5303.200	119.291	115.696	N/A	N/A	3.595	PK
2		5350.000	65.231	61.703	-8.769	74.000	3.527	PK
3	*	5350.450	66.576	63.051	-7.424	74.000	3.525	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

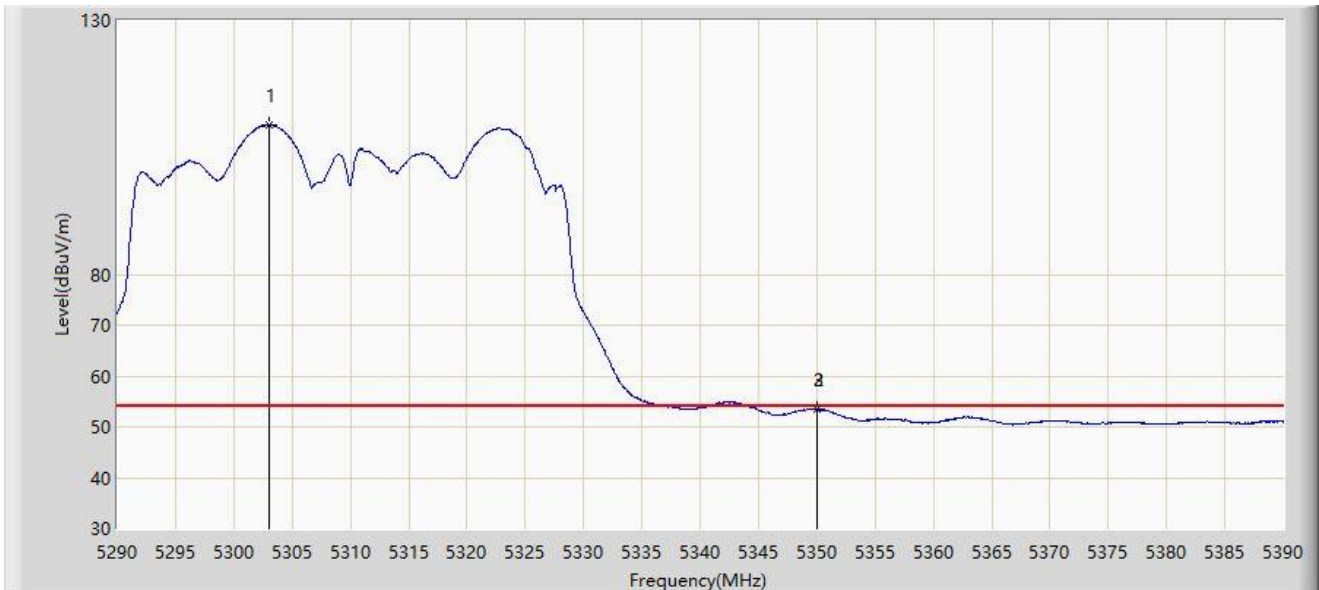


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5303.000	109.377	105.782	N/A	N/A	3.595	AV
2		5350.000	53.465	49.937	-0.535	54.000	3.527	AV
3	*	5350.050	53.508	49.981	-0.492	54.000	3.527	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

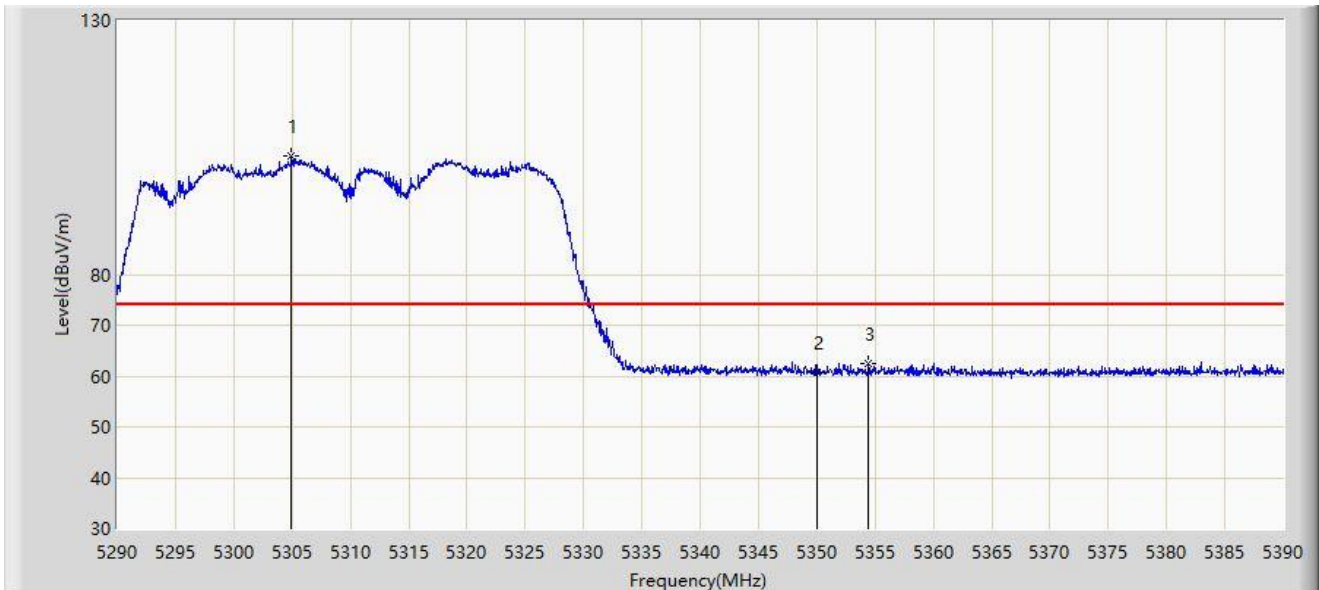


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5304.900	103.281	99.684	N/A	N/A	3.597	PK
2		5350.000	60.677	57.149	-13.323	74.000	3.527	PK
3	*	5354.450	62.465	58.972	-11.535	74.000	3.493	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

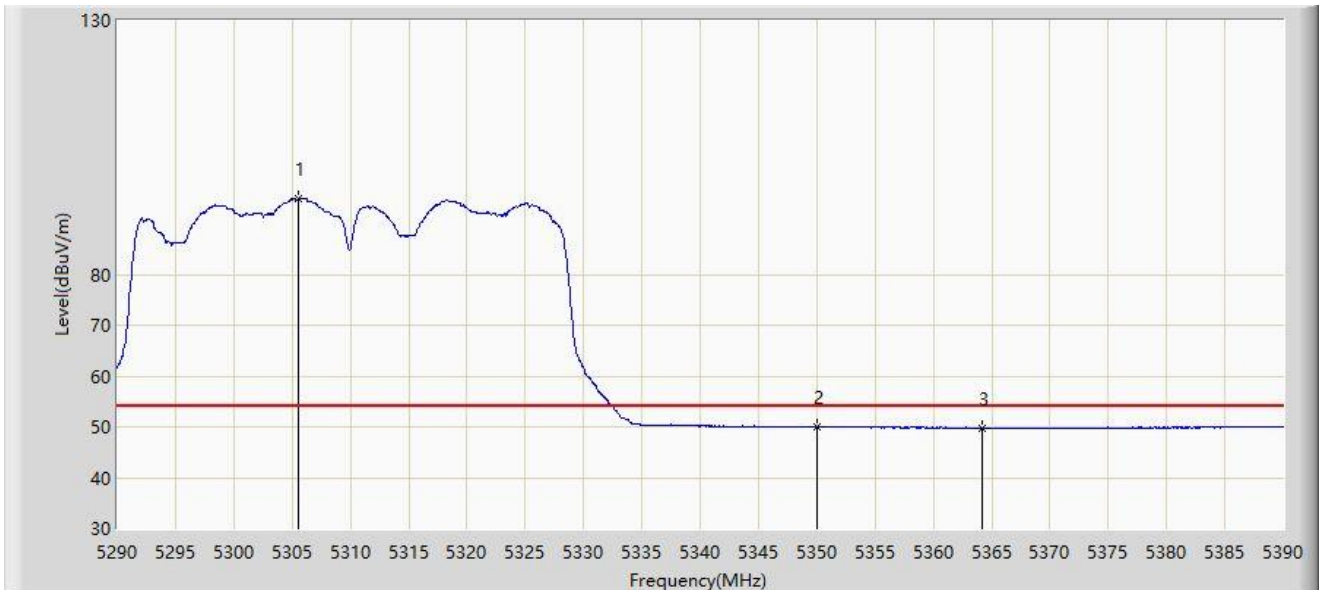


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5305.500	94.789	91.191	N/A	N/A	3.599	AV
2	*	5350.000	50.019	46.491	-3.981	54.000	3.527	AV
3		5364.200	49.776	46.373	-4.224	54.000	3.404	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

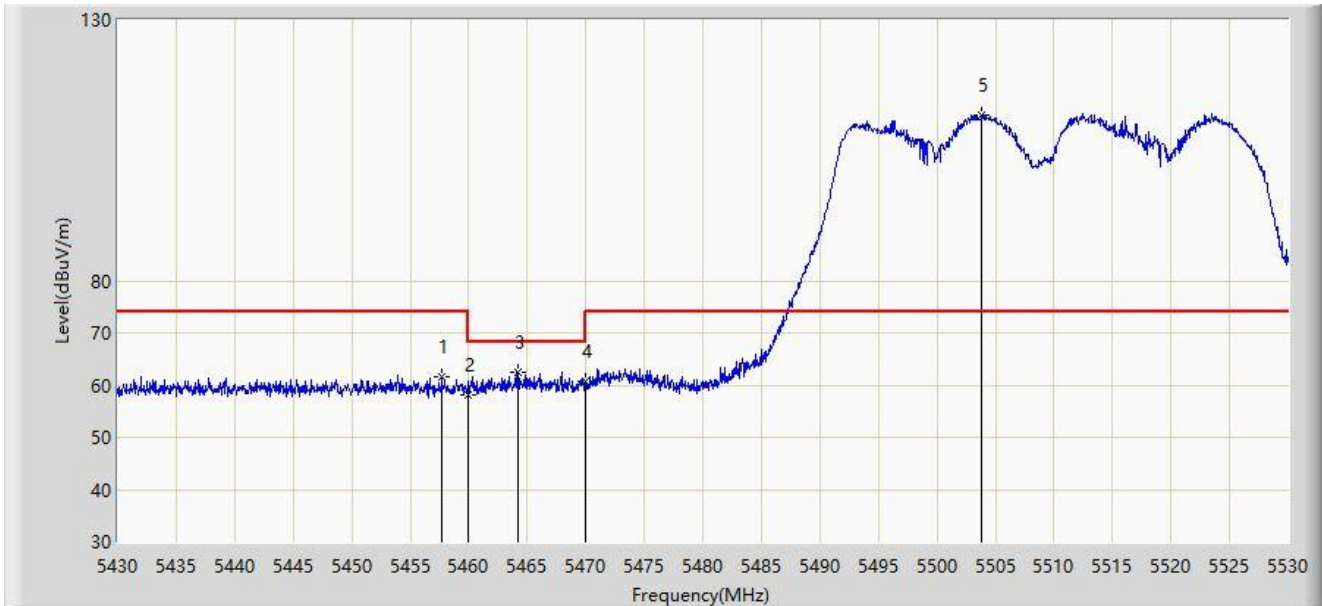


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.700	61.507	57.778	-12.493	74.000	3.728	PK
2		5460.000	58.091	54.353	-15.909	74.000	3.738	PK
3	*	5464.200	62.496	58.742	-5.704	68.200	3.754	PK
4		5470.000	60.721	56.944	-7.479	68.200	3.777	PK
5		5503.850	111.835	107.800	N/A	N/A	4.035	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

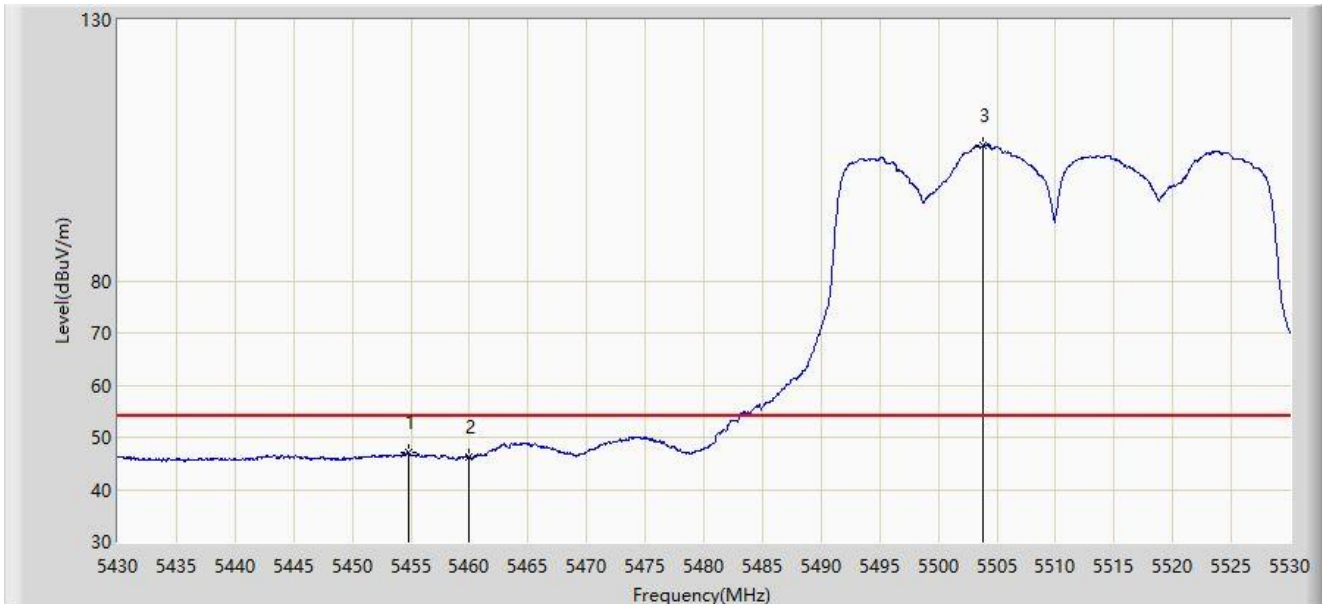


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5454.750	47.026	43.322	-6.974	54.000	3.703	AV
2		5460.000	46.319	42.581	-7.681	54.000	3.738	AV
3		5503.850	105.965	101.930	N/A	N/A	4.035	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

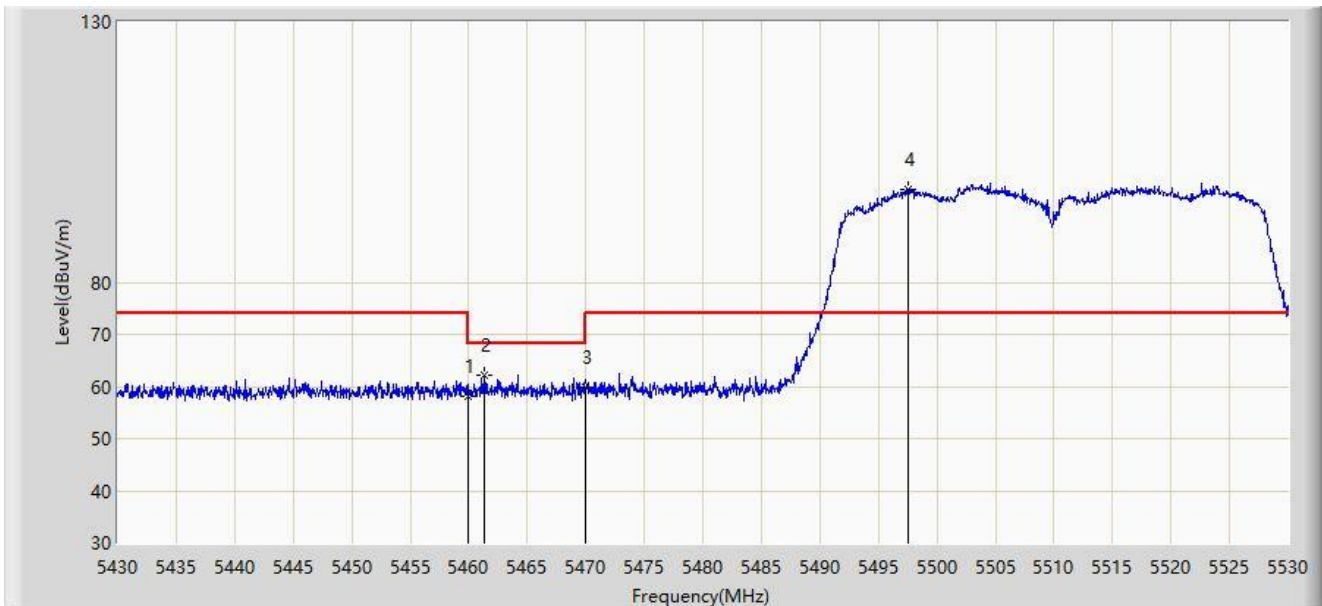


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	58.124	54.386	-15.876	74.000	3.738	PK
2	*	5461.350	62.185	58.442	-6.015	68.200	3.744	PK
3		5470.000	59.810	56.033	-8.390	68.200	3.777	PK
4		5497.550	97.876	93.849	N/A	N/A	4.027	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

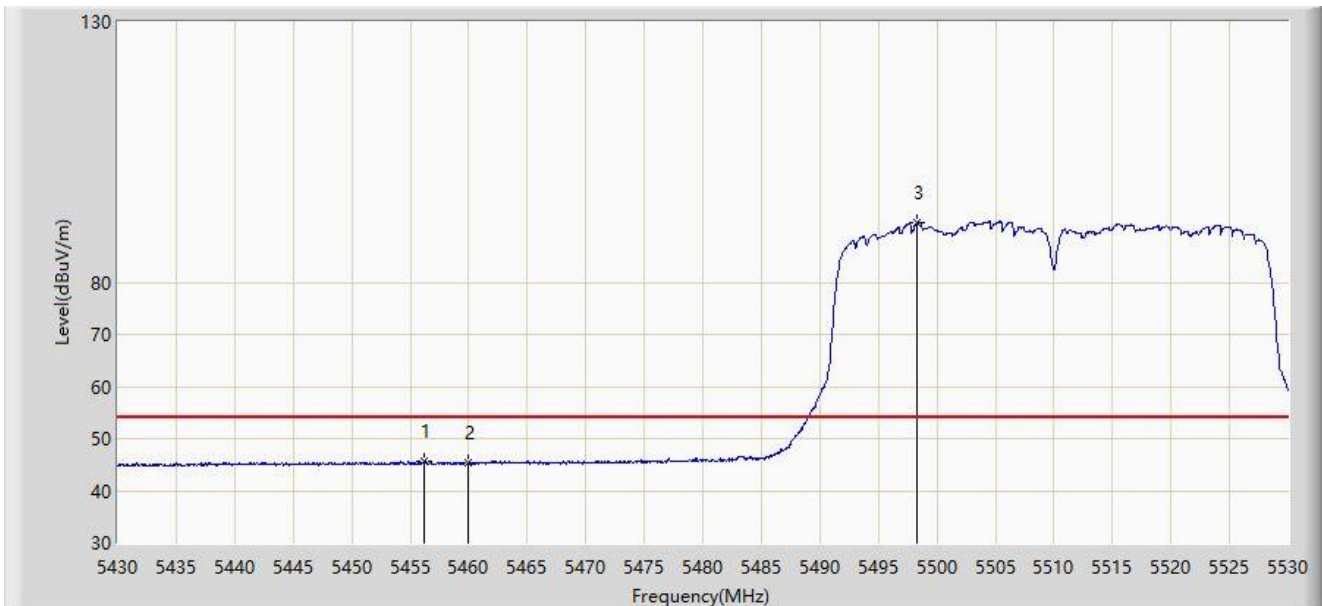


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.250	45.599	41.880	-8.401	54.000	3.719	AV
2		5460.000	45.299	41.561	-8.701	54.000	3.738	AV
3		5498.350	91.336	87.308	N/A	N/A	4.028	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

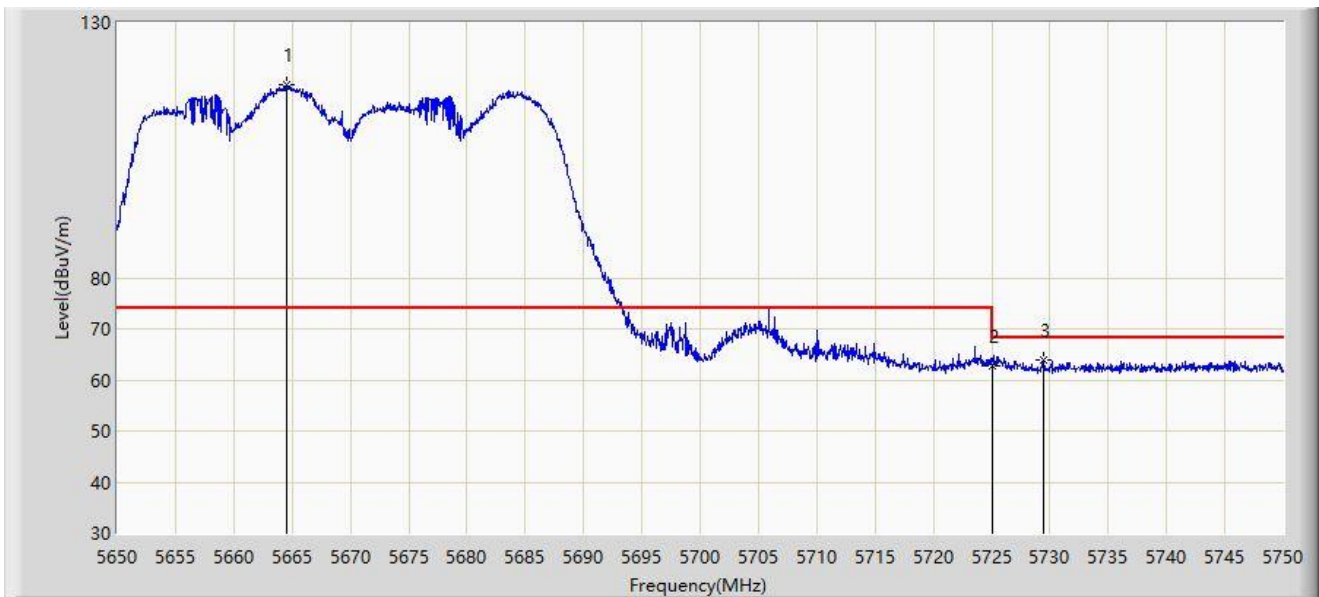


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5664.550	117.910	113.662	N/A	N/A	4.249	PK
2		5725.000	62.710	58.480	-5.490	68.200	4.230	PK
3	*	5729.500	63.785	59.525	-4.415	68.200	4.260	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

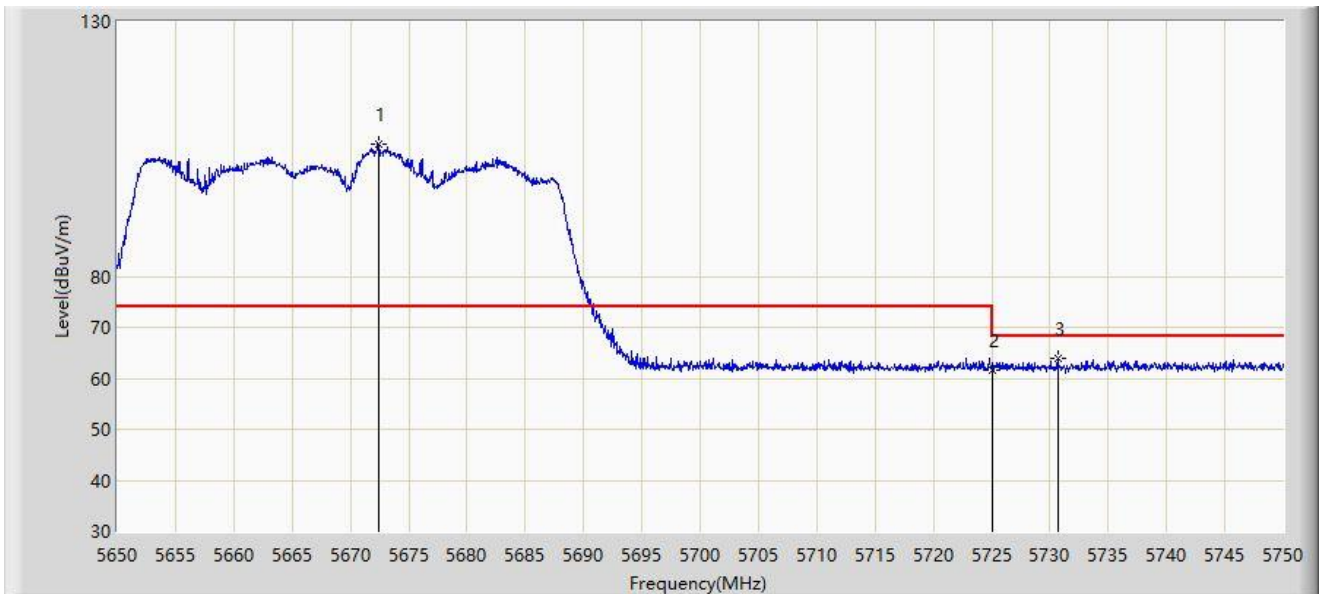


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5672.400	105.964	101.693	N/A	N/A	4.271	PK
2		5725.000	61.694	57.464	-6.506	68.200	4.230	PK
3	*	5730.650	63.903	59.632	-4.297	68.200	4.271	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

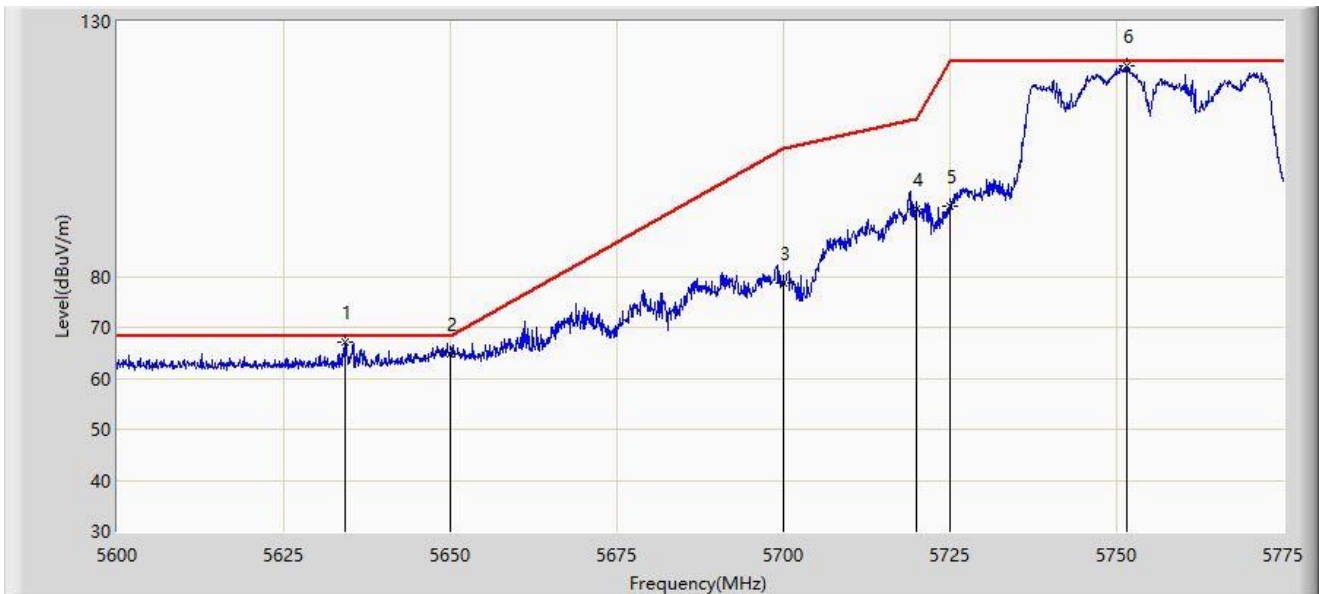


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.125	67.015	63.210	-1.185	68.200	3.805	PK
2		5650.000	64.821	60.761	-3.379	68.200	4.060	PK
3		5700.000	78.769	74.601	-26.431	105.200	4.168	PK
4		5720.000	93.125	88.905	-17.675	110.800	4.219	PK
5		5725.000	93.795	89.565	-28.405	122.200	4.230	PK
6		5751.550	121.267	116.853	N/A	N/A	4.414	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

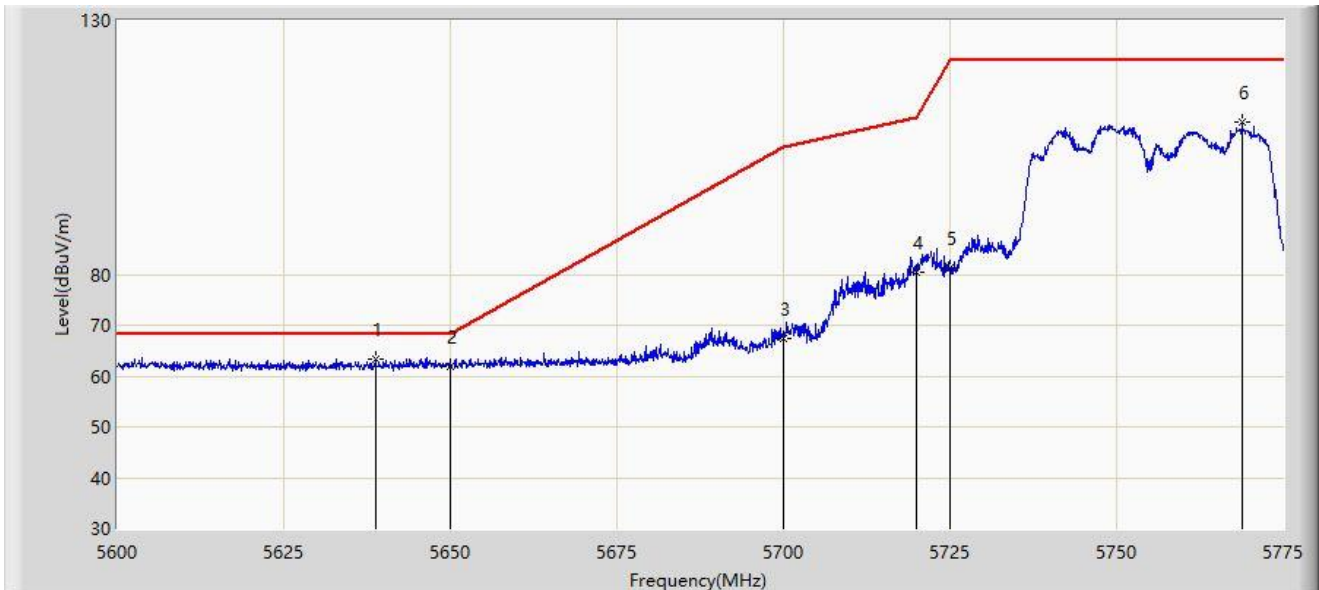


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5638.763	63.456	59.639	-4.744	68.200	3.817	PK
2		5650.000	61.970	57.910	-6.230	68.200	4.060	PK
3		5700.000	67.510	63.342	-37.690	105.200	4.168	PK
4		5720.000	80.514	76.294	-30.286	110.800	4.219	PK
5		5725.000	81.277	77.047	-40.923	122.200	4.230	PK
6		5768.875	109.856	105.448	N/A	N/A	4.408	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

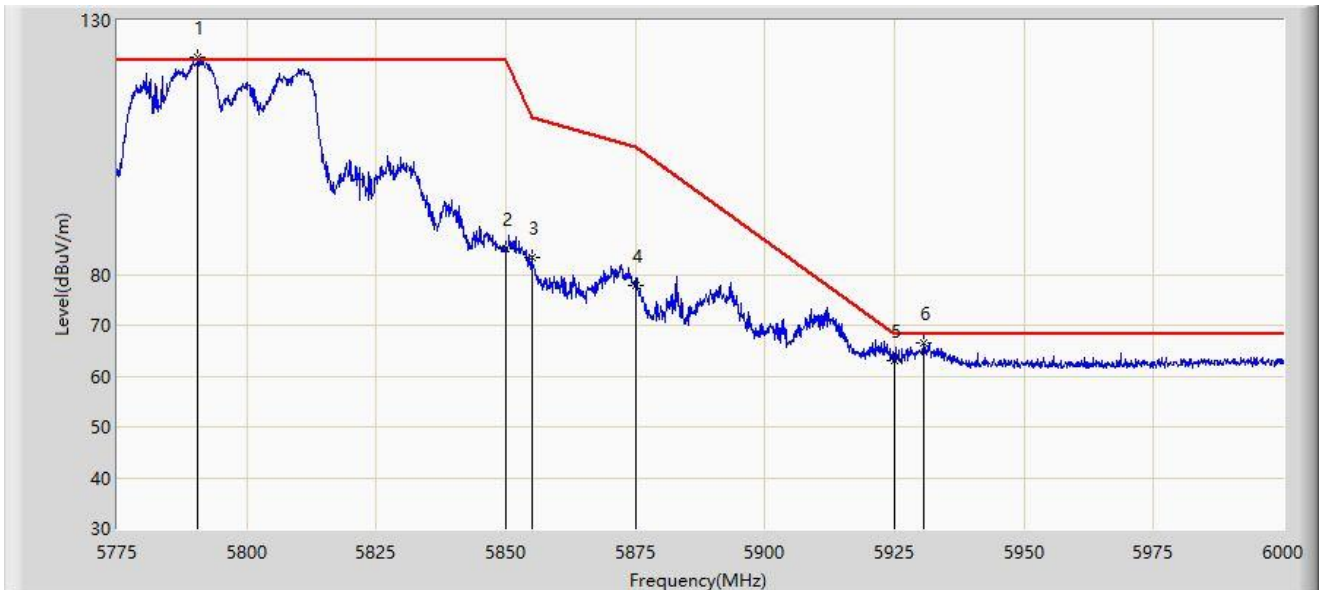


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5790.525	122.633	118.240	N/A	N/A	4.393	PK
2		5850.000	85.010	80.358	-37.190	122.200	4.651	PK
3		5855.000	83.324	78.700	-27.476	110.800	4.624	PK
4		5875.000	77.823	73.279	-27.377	105.200	4.543	PK
5		5925.000	63.170	58.418	-5.030	68.200	4.751	PK
6	*	5930.700	66.387	61.628	-1.813	68.200	4.759	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

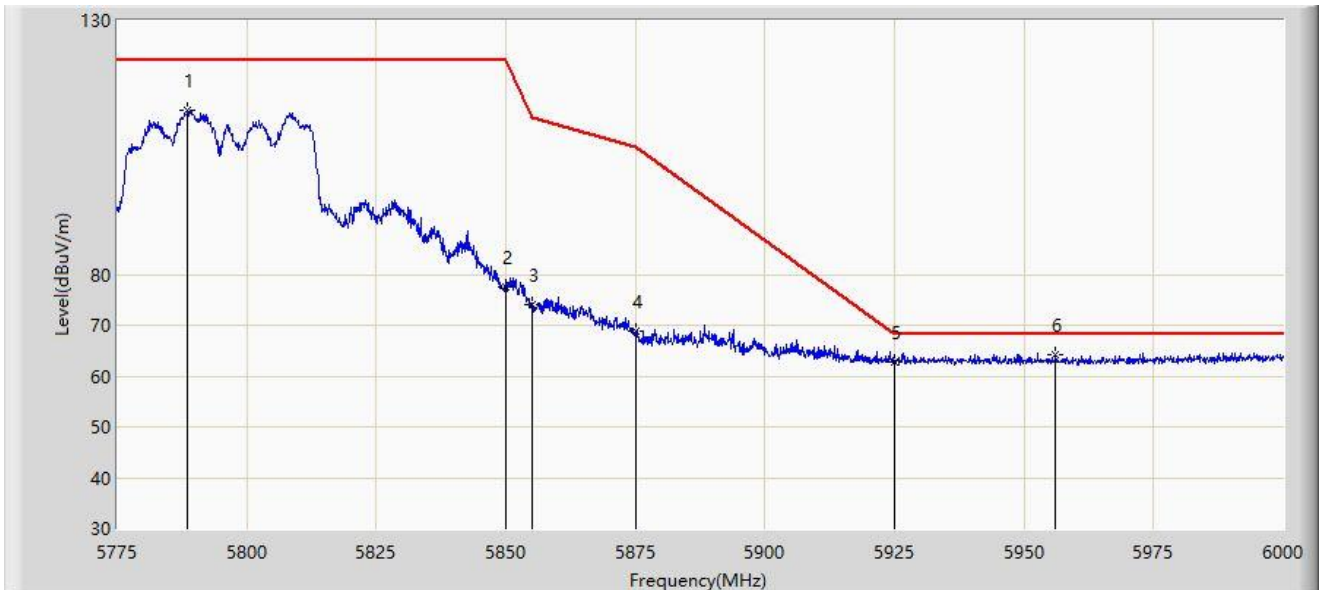


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5788.612	112.409	108.023	N/A	N/A	4.386	PK
2		5850.000	77.597	72.945	-44.603	122.200	4.651	PK
3		5855.000	74.068	69.444	-36.732	110.800	4.624	PK
4		5875.000	68.844	64.300	-36.356	105.200	4.543	PK
5		5925.000	62.683	57.931	-5.517	68.200	4.751	PK
6	*	5956.013	64.202	59.596	-3.998	68.200	4.605	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

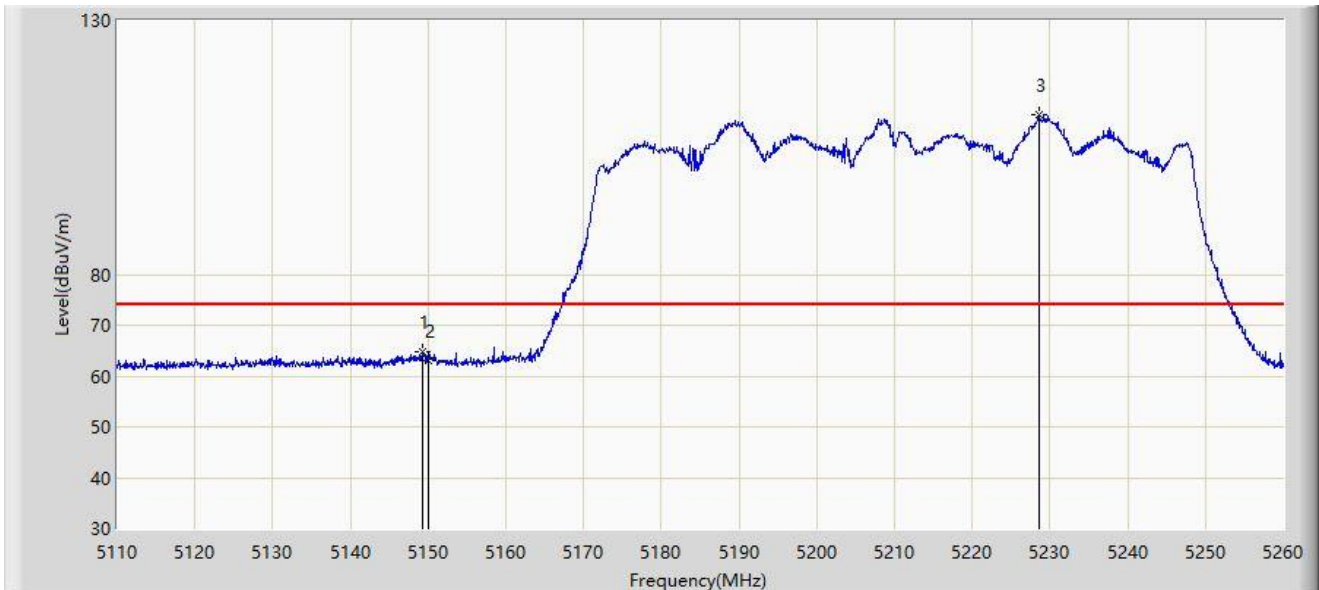


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.225	64.639	60.867	-9.361	74.000	3.772	PK
2		5150.000	63.023	59.251	-10.977	74.000	3.773	PK
3		5228.575	111.488	107.950	N/A	N/A	3.538	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

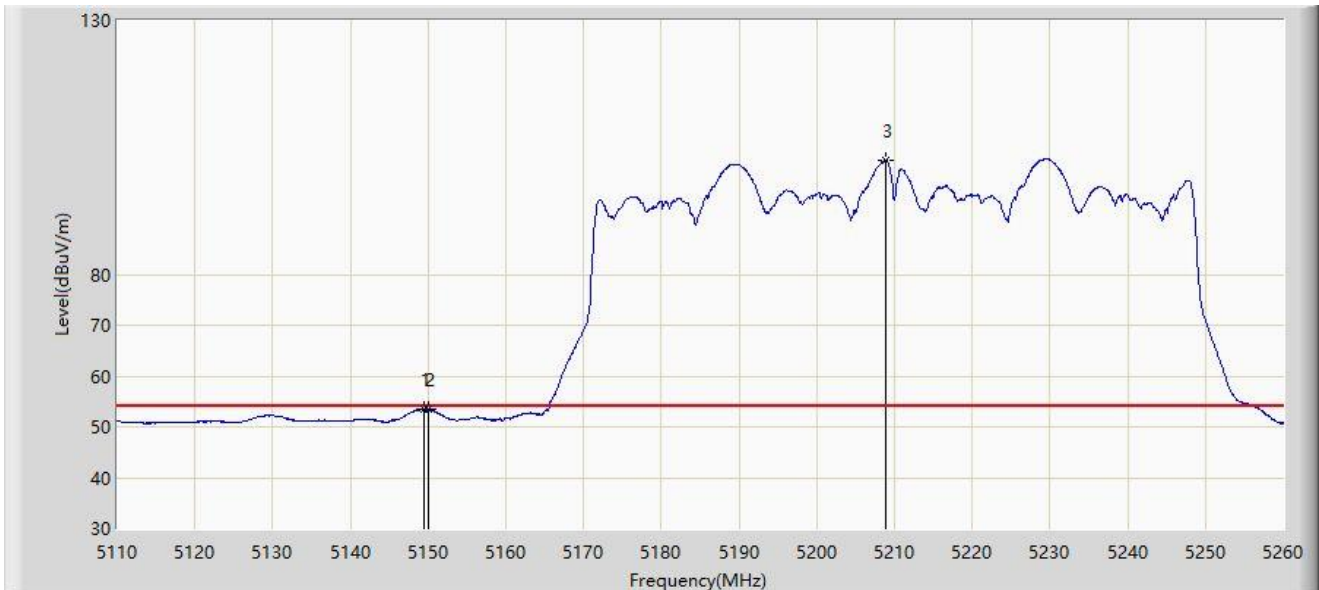

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.450	53.519	49.747	-0.481	54.000	3.772	AV
2		5150.000	53.392	49.620	-0.608	54.000	3.773	AV
3		5208.850	102.540	99.068	N/A	N/A	3.472	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5141.500	63.131	59.333	-10.869	74.000	3.798	PK
2		5150.000	62.205	58.433	-11.795	74.000	3.773	PK
3		5218.225	97.338	93.841	N/A	N/A	3.496	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

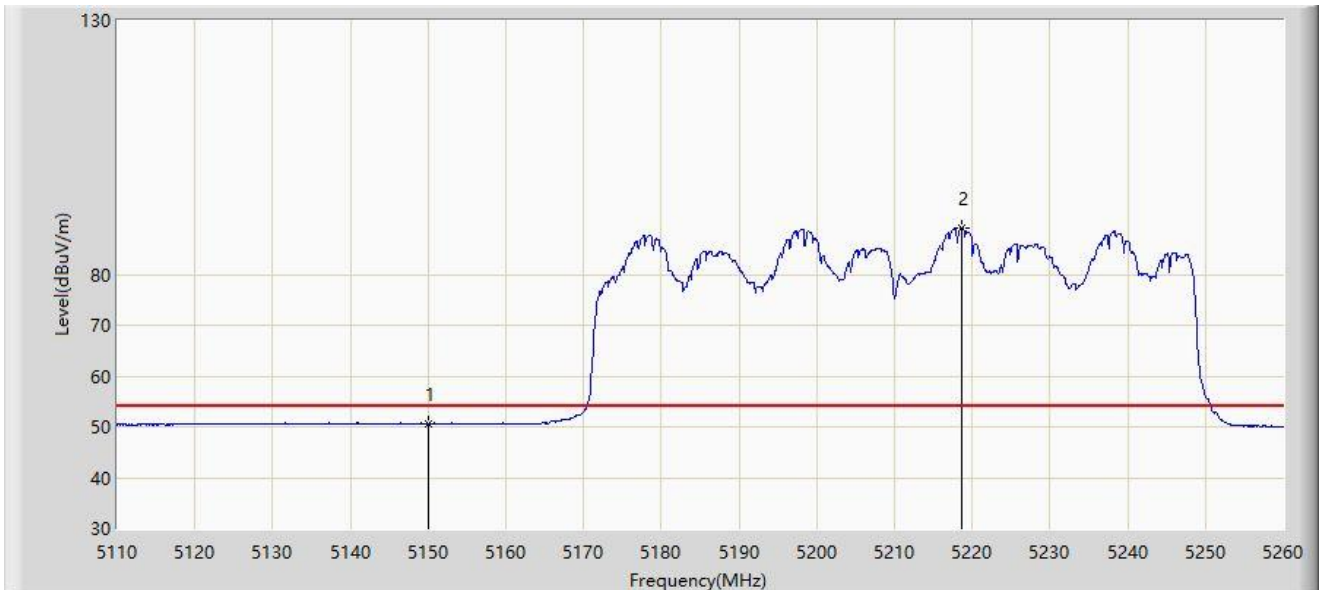


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	50.649	46.877	-3.351	54.000	3.773	AV
2		5218.600	89.193	85.696	N/A	N/A	3.498	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

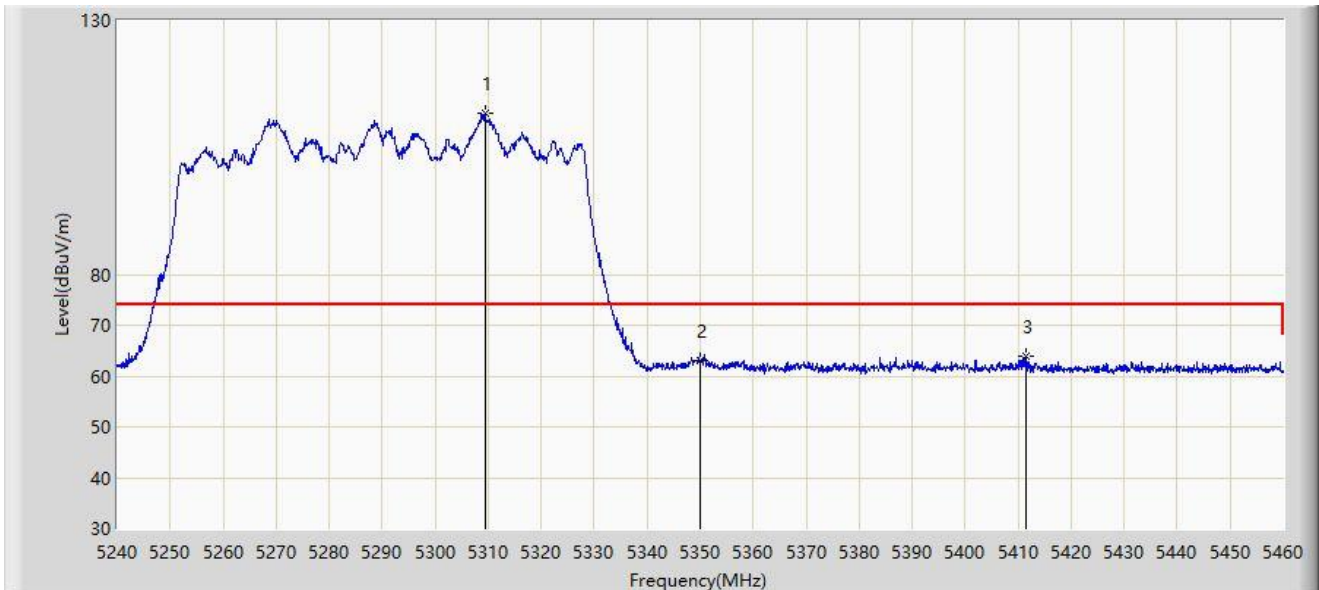


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5309.410	111.672	108.069	N/A	N/A	3.604	PK
2		5350.000	62.998	59.470	-11.002	74.000	3.527	PK
3	*	5411.490	63.847	60.036	-10.153	74.000	3.810	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

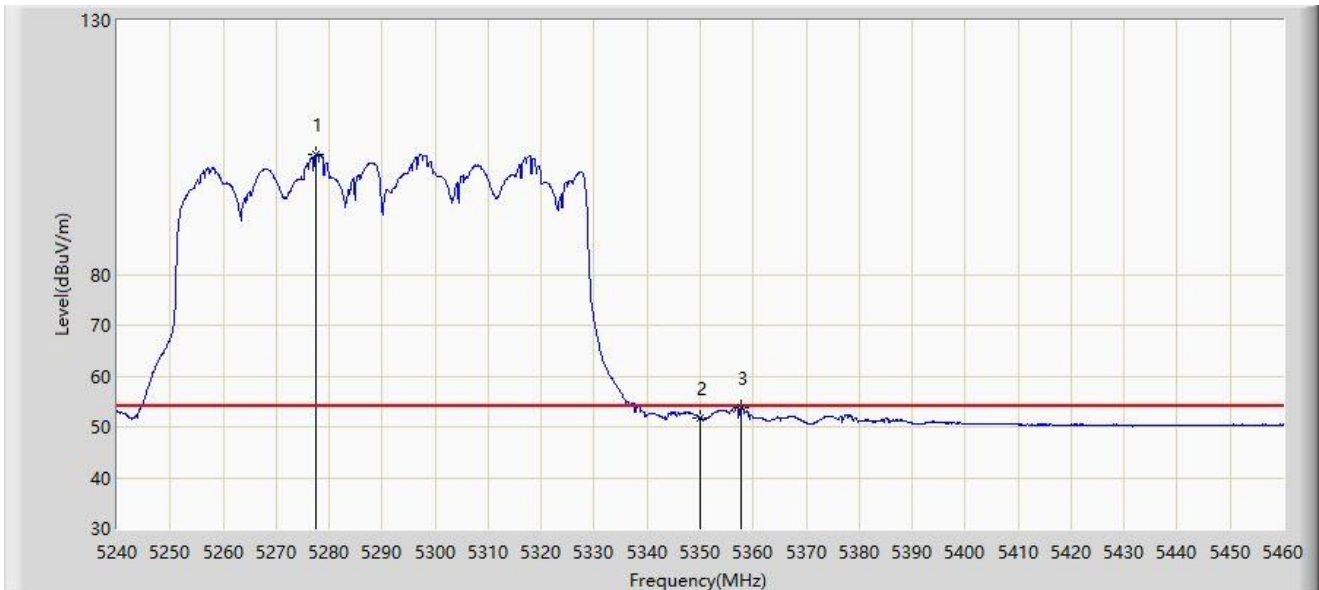


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5277.510	103.501	100.187	N/A	N/A	3.314	AV
2		5350.000	51.636	48.108	-2.364	54.000	3.527	AV
3	*	5357.810	53.827	50.365	-0.173	54.000	3.463	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

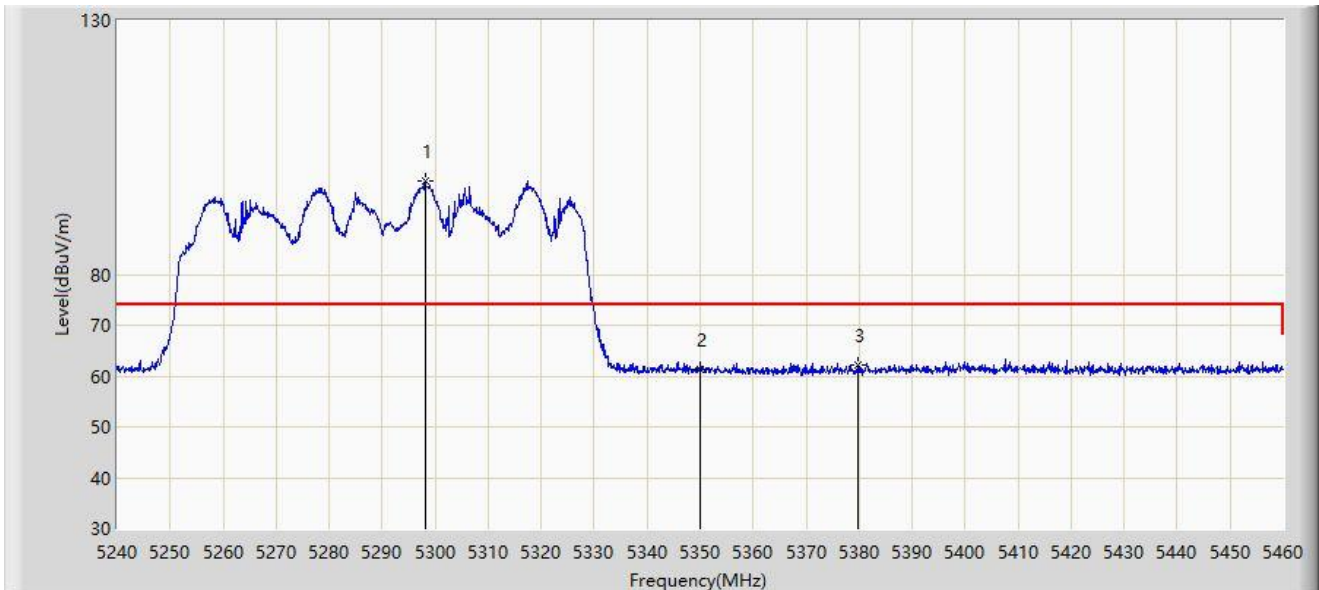


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5298.080	98.396	94.838	N/A	N/A	3.559	PK
2		5350.000	61.168	57.640	-12.832	74.000	3.527	PK
3	*	5379.810	62.194	58.611	-11.806	74.000	3.582	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

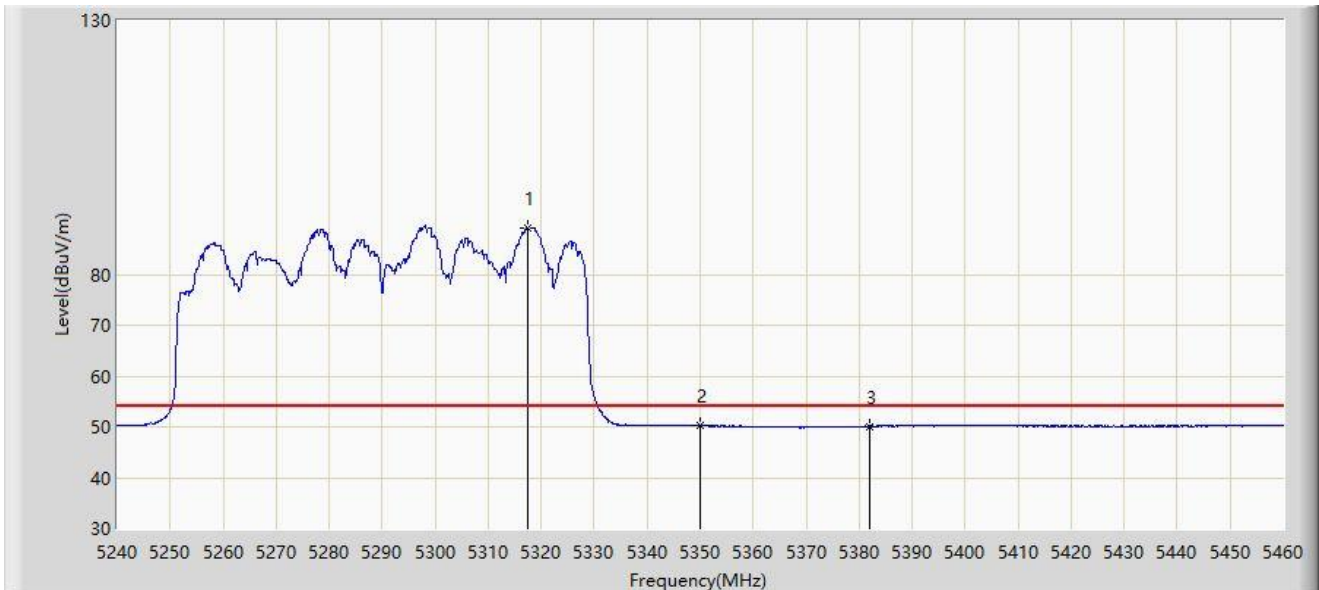


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.440	89.172	85.542	N/A	N/A	3.631	AV
2	*	5350.000	50.178	46.650	-3.822	54.000	3.527	AV
3		5381.900	50.124	46.500	-3.876	54.000	3.624	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

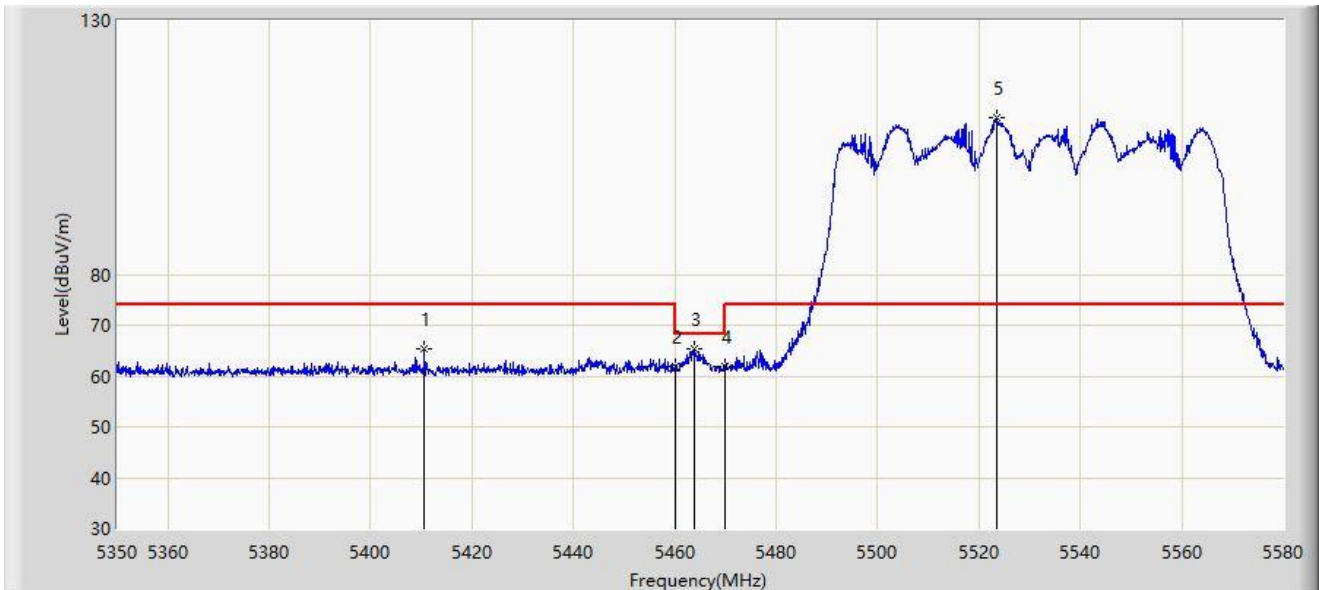


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5410.605	65.464	61.647	-8.536	74.000	3.817	PK
2		5460.000	61.805	58.067	-12.195	74.000	3.738	PK
3	*	5463.850	65.297	61.544	-2.903	68.200	3.753	PK
4		5470.000	61.962	58.185	-6.238	68.200	3.777	PK
5		5523.535	110.772	106.898	N/A	N/A	3.874	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

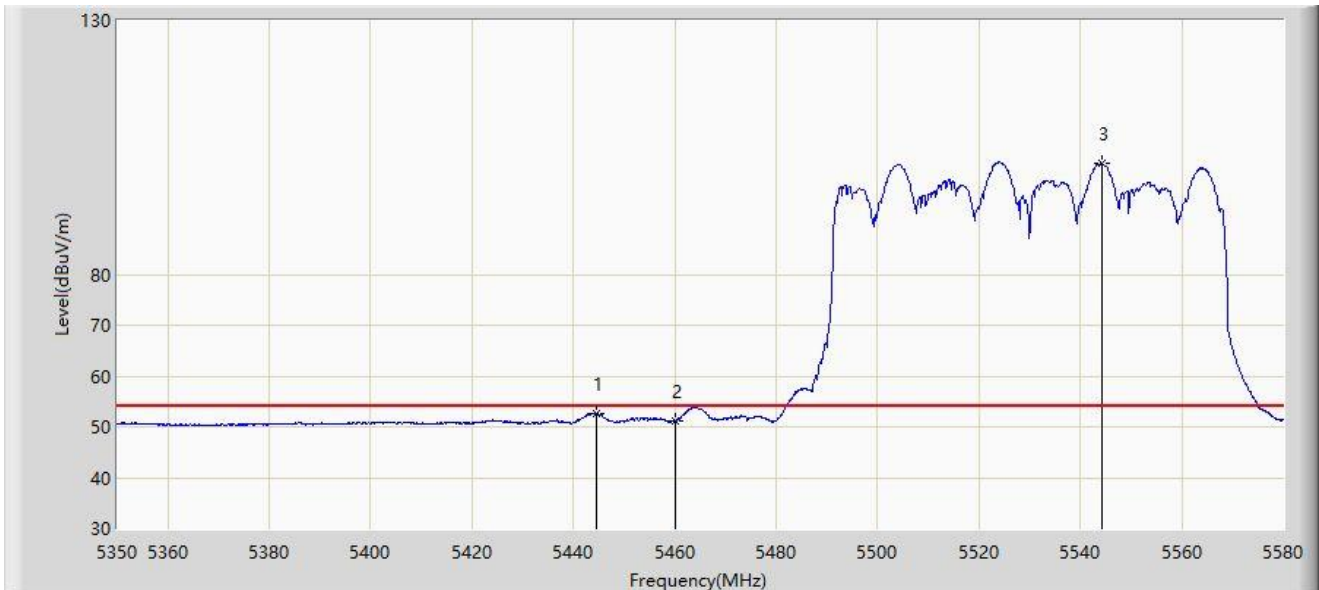


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5444.645	52.577	48.878	-1.423	54.000	3.699	AV
2		5460.000	51.184	47.446	-2.816	54.000	3.738	AV
3		5544.120	101.900	98.051	N/A	N/A	3.850	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

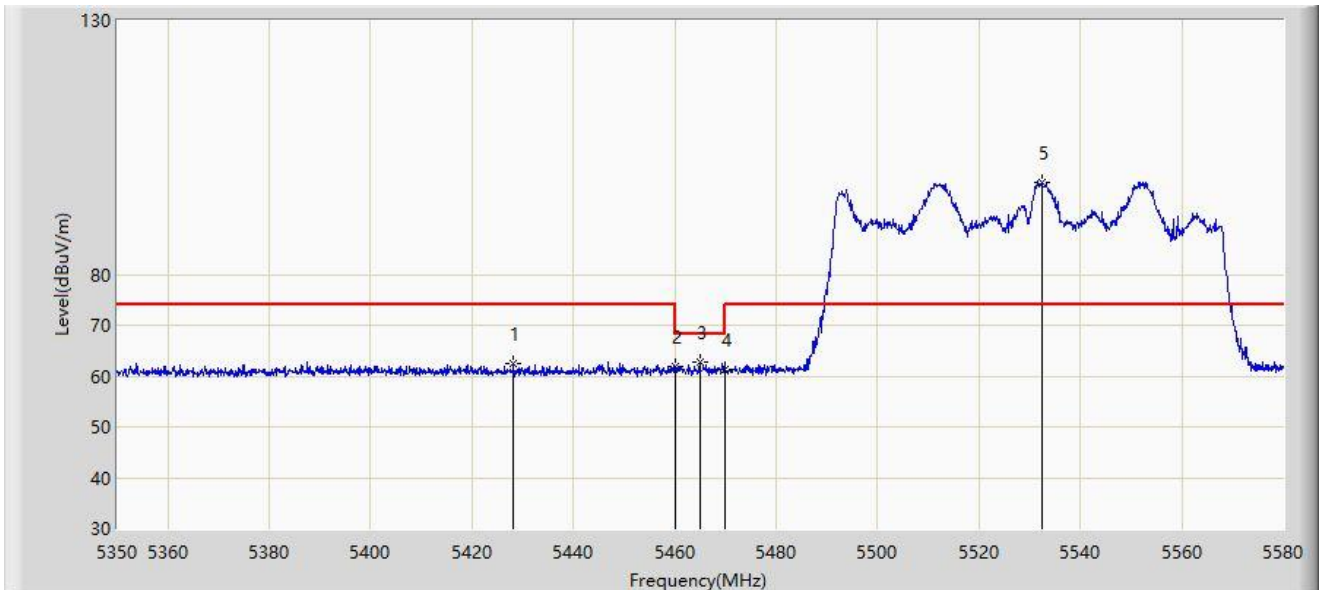


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5428.200	62.493	58.775	-11.507	74.000	3.718	PK
2		5460.000	61.899	58.161	-12.101	74.000	3.738	PK
3	*	5464.885	62.803	59.046	-5.397	68.200	3.758	PK
4		5470.000	61.282	57.505	-6.918	68.200	3.777	PK
5		5532.390	98.255	94.423	N/A	N/A	3.832	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

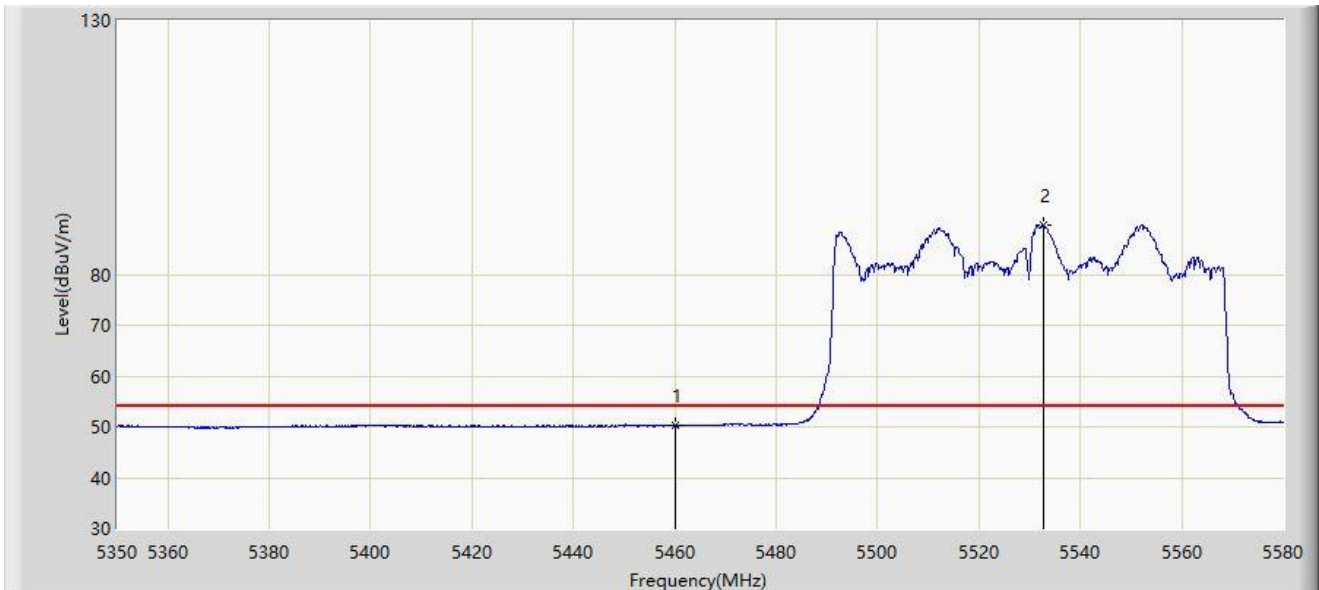


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	50.220	46.482	-3.780	54.000	3.738	AV
2		5532.620	89.749	85.917	N/A	N/A	3.831	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

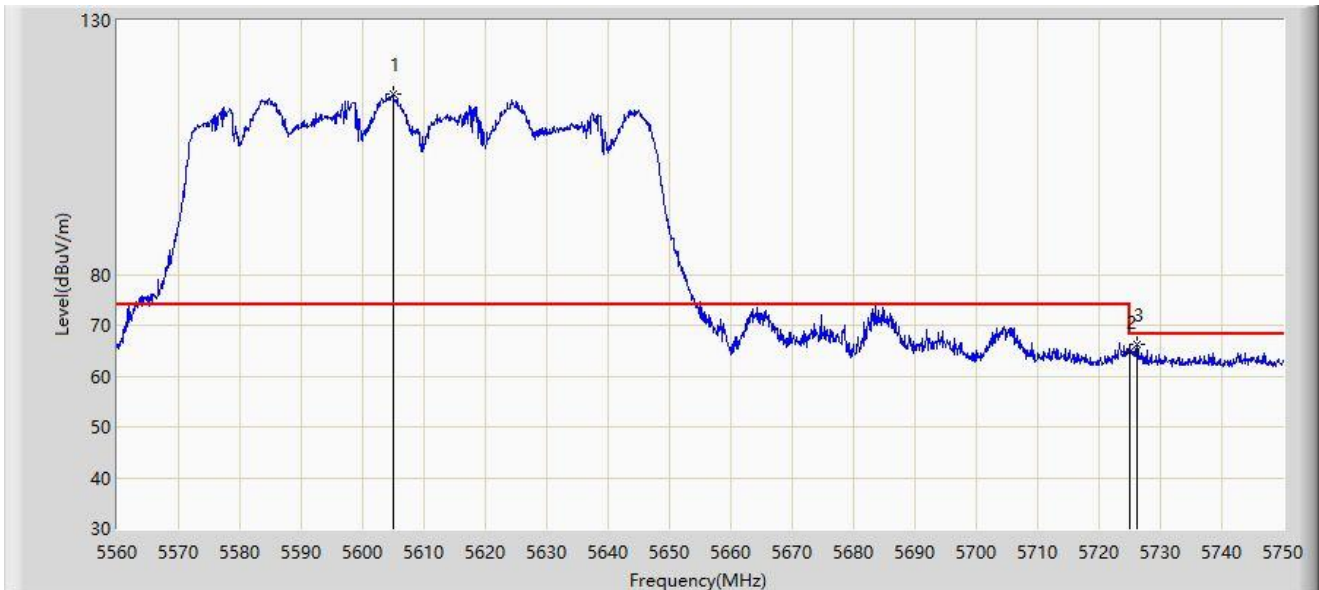


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5604.935	115.521	111.491	N/A	N/A	4.031	PK
2		5725.000	64.906	60.676	-3.294	68.200	4.230	PK
3	*	5726.250	66.127	61.895	-2.073	68.200	4.232	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

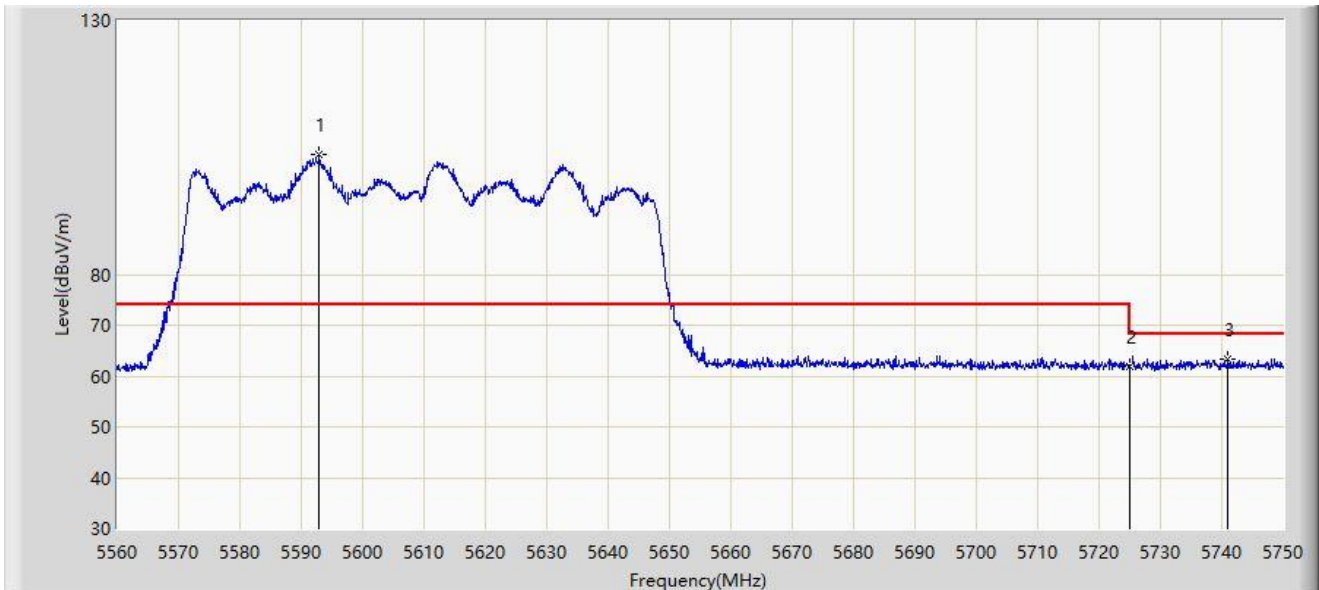


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5592.870	103.506	99.412	N/A	N/A	4.095	PK
2		5725.000	61.858	57.628	-6.342	68.200	4.230	PK
3	*	5740.975	63.461	59.090	-4.739	68.200	4.371	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

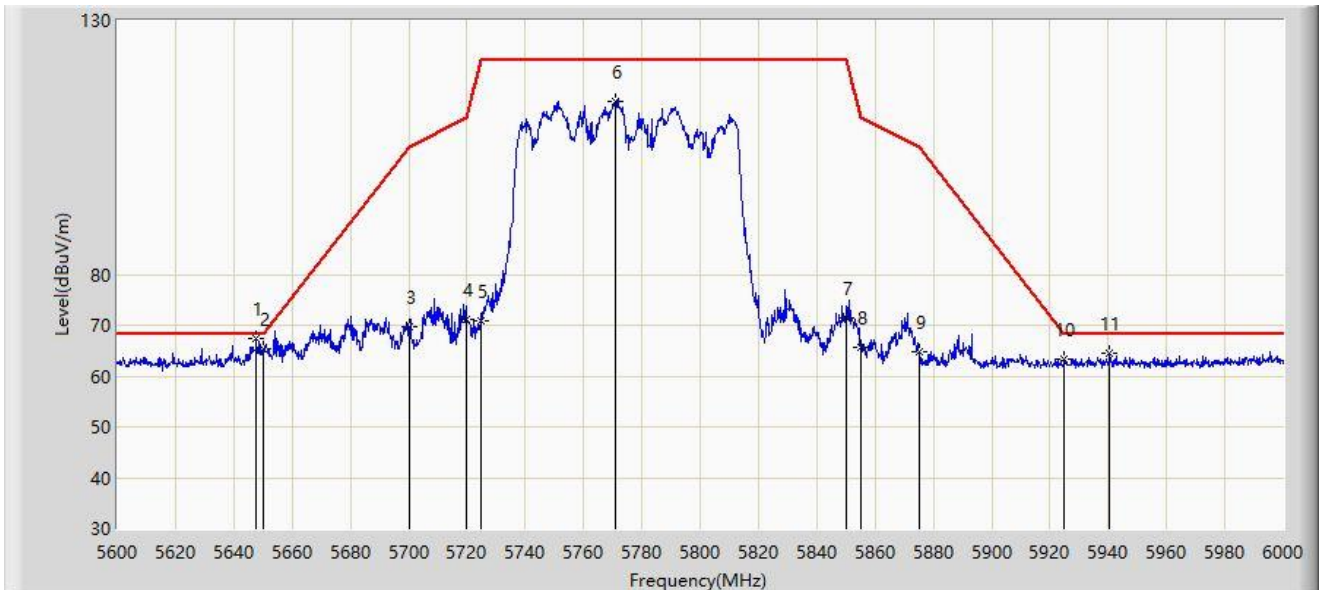


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.800	67.446	63.441	-0.754	68.200	4.005	PK
2		5650.000	65.319	61.259	-2.881	68.200	4.060	PK
3		5700.000	69.637	65.469	-35.563	105.200	4.168	PK
4		5720.000	71.037	66.817	-39.763	110.800	4.219	PK
5		5725.000	70.894	66.664	-51.306	122.200	4.230	PK
6		5771.000	114.176	109.776	N/A	N/A	4.401	PK
7		5850.000	71.494	66.842	-50.706	122.200	4.651	PK
8		5855.000	65.699	61.075	-45.101	110.800	4.624	PK
9		5875.000	64.913	60.369	-40.287	105.200	4.543	PK
10		5925.000	63.420	58.668	-4.780	68.200	4.751	PK
11		5940.600	64.352	59.694	-3.848	68.200	4.658	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

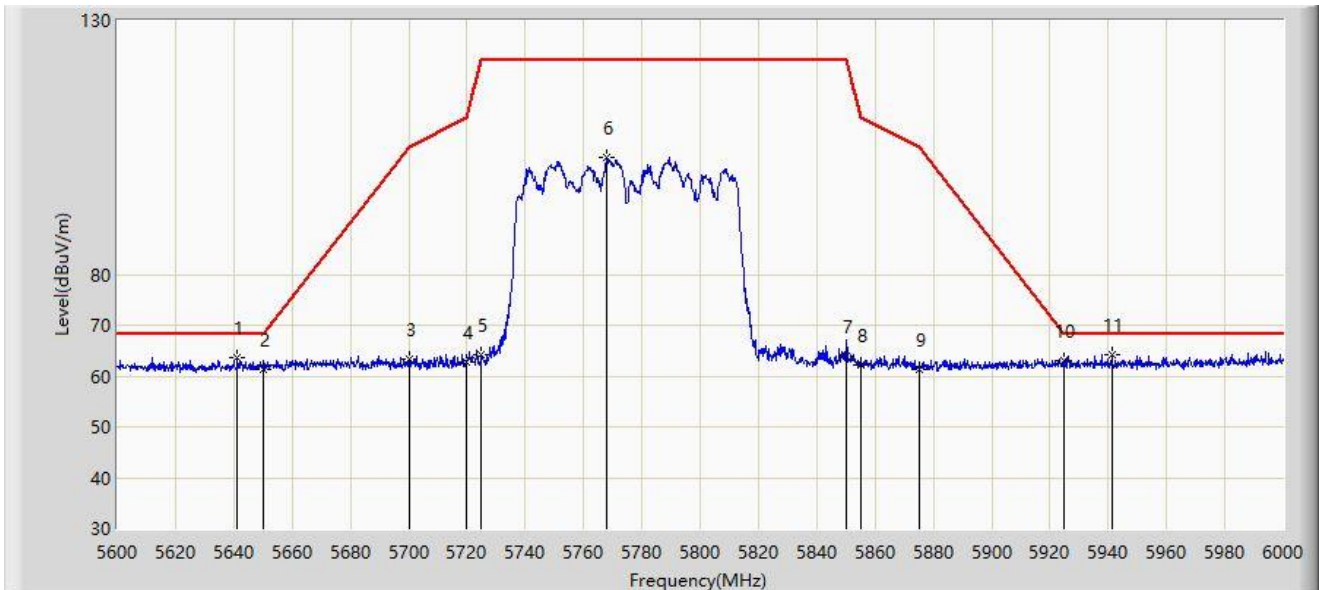


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5641.200	63.764	59.926	-4.436	68.200	3.838	PK
2		5650.000	61.411	57.351	-6.789	68.200	4.060	PK
3		5700.000	63.422	59.254	-41.778	105.200	4.168	PK
4		5720.000	62.629	58.409	-48.171	110.800	4.219	PK
5		5725.000	64.115	59.885	-58.085	122.200	4.230	PK
6		5768.000	103.057	98.646	N/A	N/A	4.411	PK
7		5850.000	63.770	59.118	-58.430	122.200	4.651	PK
8		5855.000	62.227	57.603	-48.573	110.800	4.624	PK
9		5875.000	61.414	56.870	-43.786	105.200	4.543	PK
10		5925.000	63.062	58.310	-5.138	68.200	4.751	PK
11	*	5941.400	64.192	59.543	-4.008	68.200	4.649	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-06-01
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5250MHz	

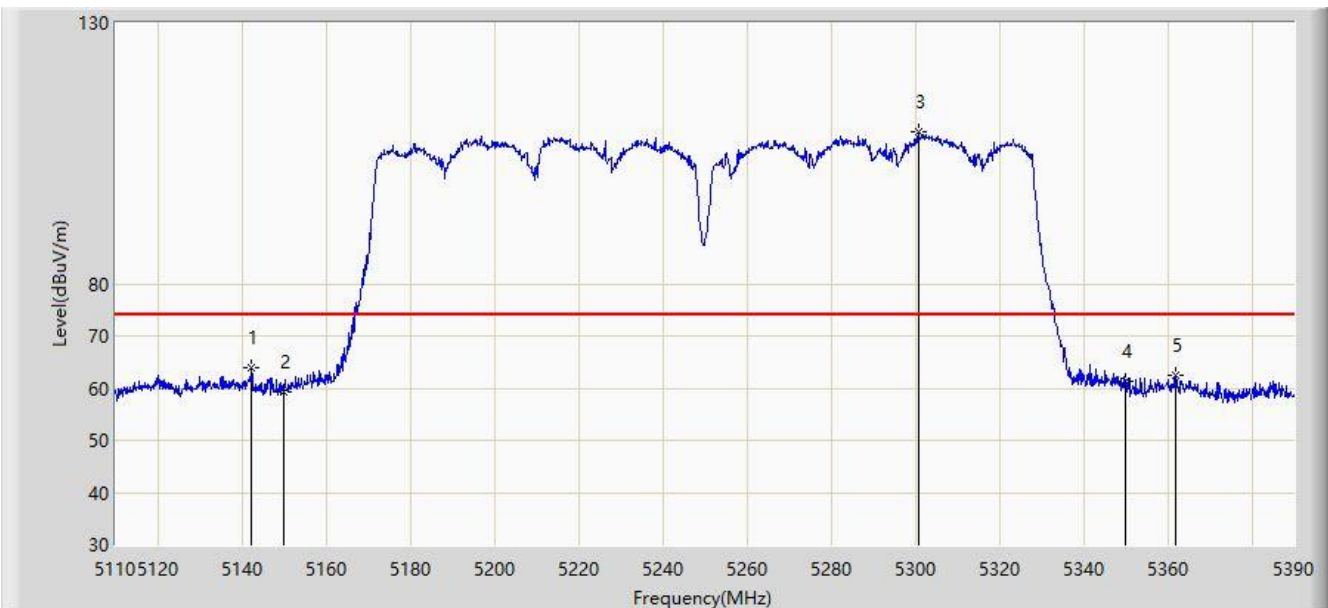


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5142.340	63.809	60.014	-10.191	74.000	3.795	PK
2		5150.000	59.140	55.368	-14.860	74.000	3.773	PK
3		5300.820	109.214	105.624	N/A	N/A	3.590	PK
4		5350.000	61.438	57.910	-12.562	74.000	3.527	PK
5		5361.860	62.574	59.149	-11.426	74.000	3.425	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-06-01
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT80+80 at 5250MHz	

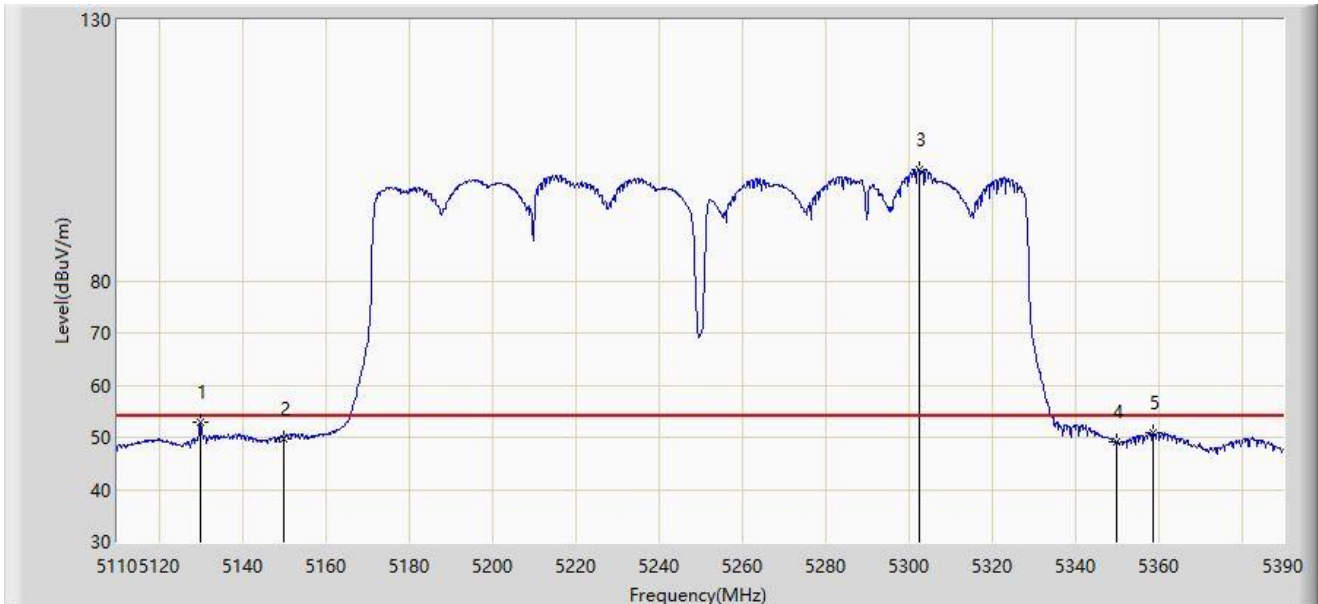


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5130.020	52.795	48.982	-1.205	54.000	3.813	AV
2		5150.000	49.687	45.915	-4.313	54.000	3.773	AV
3		5302.500	101.304	97.710	N/A	N/A	3.593	AV
4		5350.000	49.118	45.590	-4.882	54.000	3.527	AV
5		5358.780	50.842	47.389	-3.158	54.000	3.453	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-06-01
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT80+80 at 5250MHz	

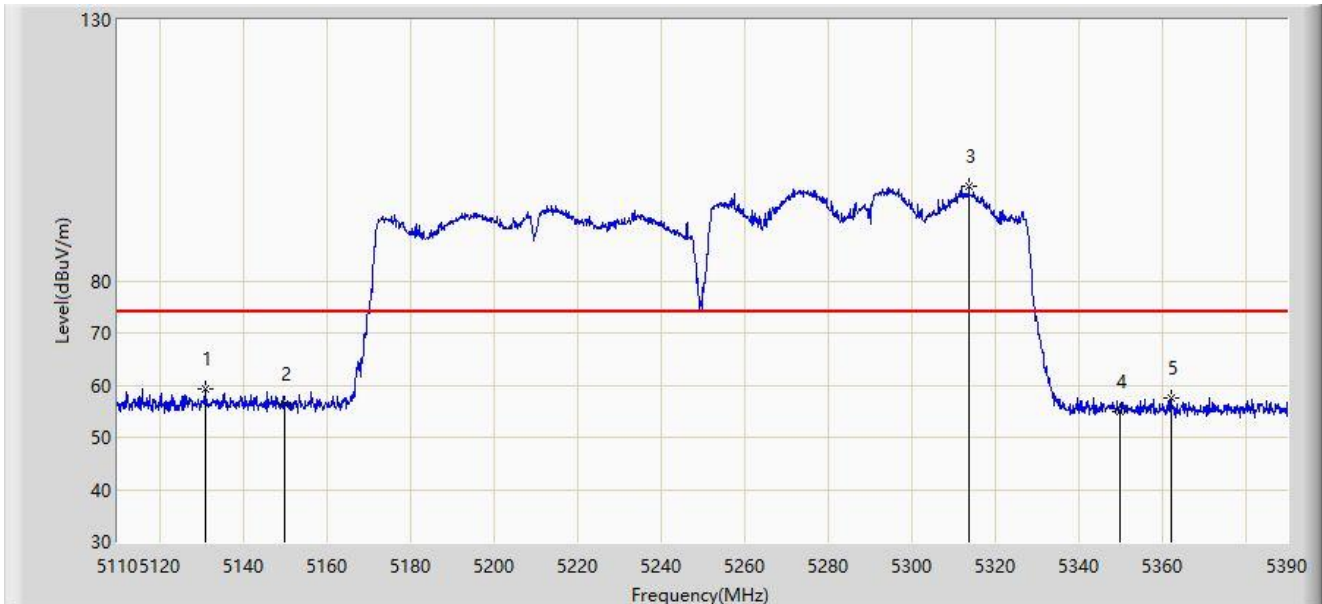


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5131.000	59.231	55.408	-14.769	74.000	3.823	PK
2		5150.000	56.319	52.547	-17.681	74.000	3.773	PK
3		5313.840	97.985	94.373	N/A	N/A	3.612	PK
4		5350.000	54.991	51.463	-19.009	74.000	3.527	PK
5		5362.140	57.490	54.068	-16.510	74.000	3.422	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-06-01
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band	Power: AC 120V/60Hz
Access point	
Test Mode: Transmit by 802.11ac-VHT80+80 at 5250MHz	

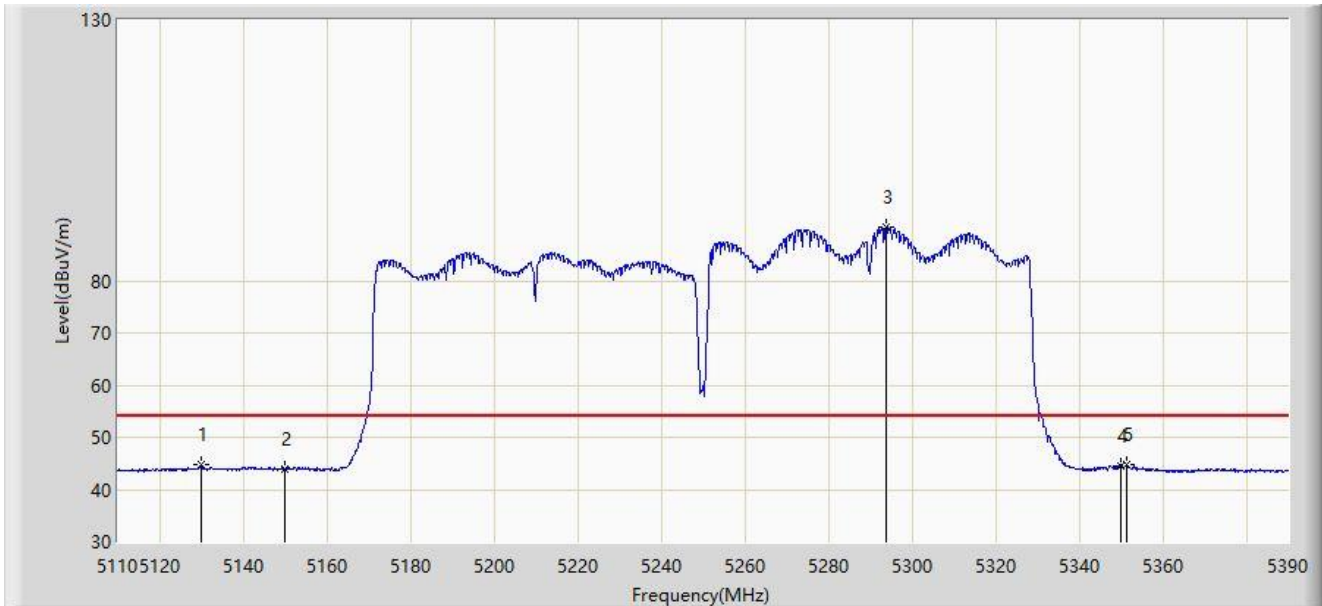


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5130.020	44.727	40.914	-9.273	54.000	3.813	AV
2		5150.000	43.907	40.135	-10.093	54.000	3.773	AV
3		5293.820	90.255	86.756	N/A	N/A	3.499	AV
4		5350.000	44.534	41.006	-9.466	54.000	3.527	AV
5	*	5351.500	44.732	41.213	-9.268	54.000	3.519	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-06-01
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5570MHz	

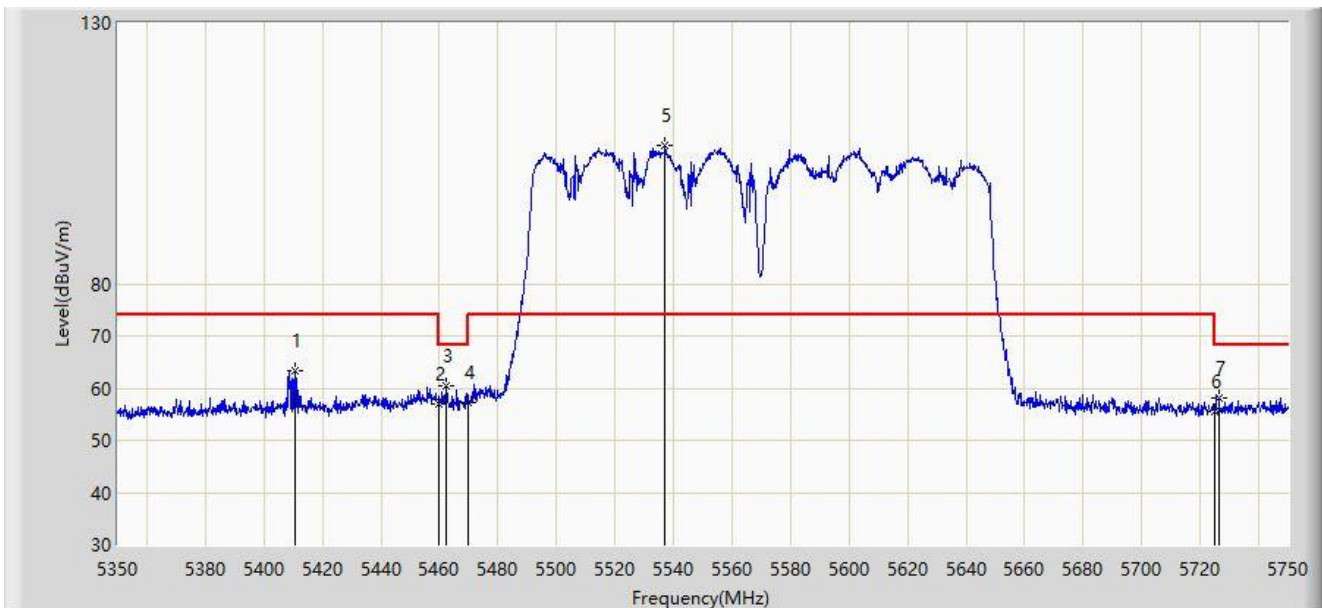


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5410.800	63.418	59.603	-10.582	74.000	3.815	PK
2		5460.000	57.100	53.362	-16.900	74.000	3.738	PK
3	*	5462.200	60.441	56.695	-7.759	68.200	3.747	PK
4		5470.000	57.191	53.414	-11.009	68.200	3.777	PK
5		5537.200	106.528	102.692	N/A	N/A	3.836	PK
6		5725.000	55.413	51.183	-12.787	68.200	4.230	PK
7		5726.400	58.187	53.956	-10.013	68.200	4.231	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-06-01
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5570MHz	

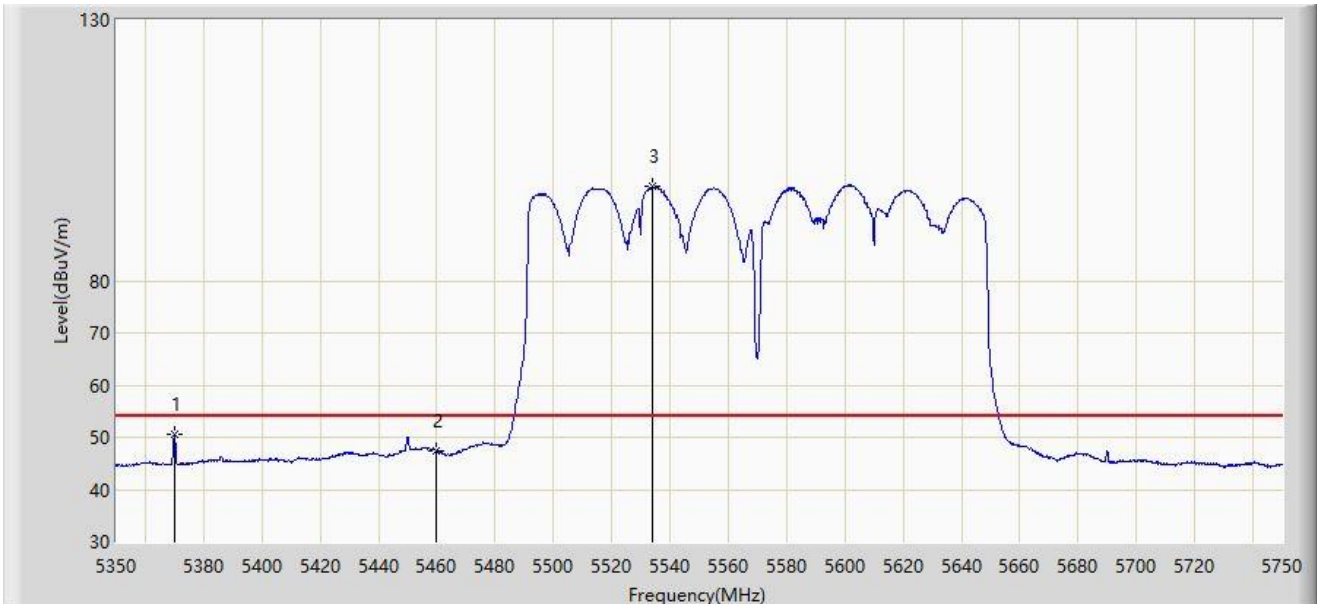


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5369.800	50.489	47.104	-3.511	54.000	3.386	AV
2		5460.000	47.421	43.683	-6.579	54.000	3.738	AV
3		5534.000	98.195	94.362	N/A	N/A	3.833	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-06-01
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5570MHz	

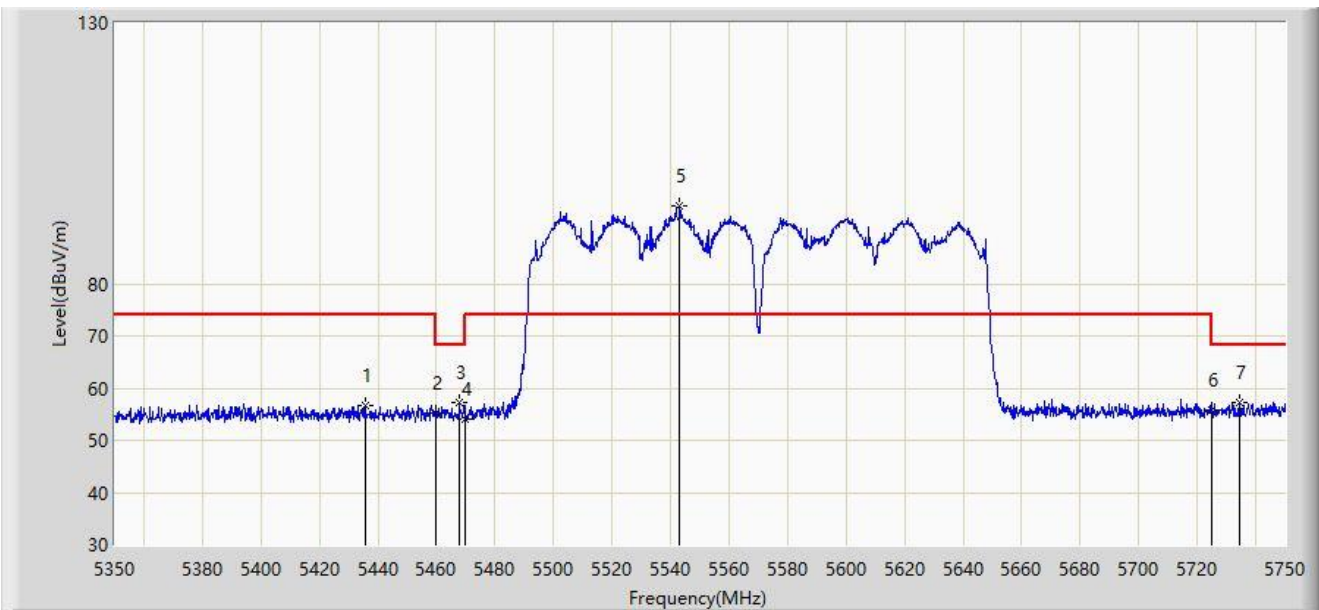


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5435.600	56.648	52.950	-17.352	74.000	3.698	PK
2		5460.000	55.258	51.520	-18.742	74.000	3.738	PK
3	*	5467.800	57.371	53.602	-10.829	68.200	3.769	PK
4		5470.000	54.005	50.228	-14.195	68.200	3.777	PK
5		5543.000	94.815	90.968	N/A	N/A	3.846	PK
6		5725.000	55.678	51.448	-12.522	68.200	4.230	PK
7		5734.400	57.196	52.888	-11.004	68.200	4.308	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-06-01
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5570MHz	

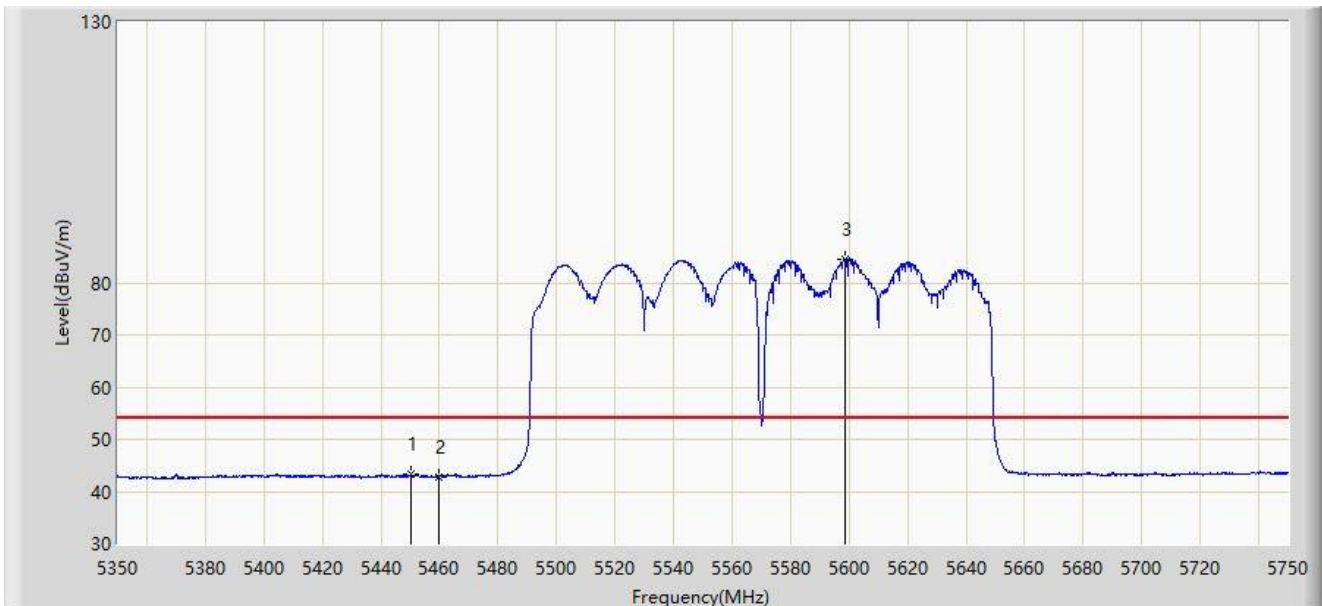


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5450.200	43.282	39.584	-10.718	54.000	3.698	AV
2		5460.000	42.832	39.094	-11.168	54.000	3.738	AV
3		5598.800	84.565	80.477	N/A	N/A	4.089	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

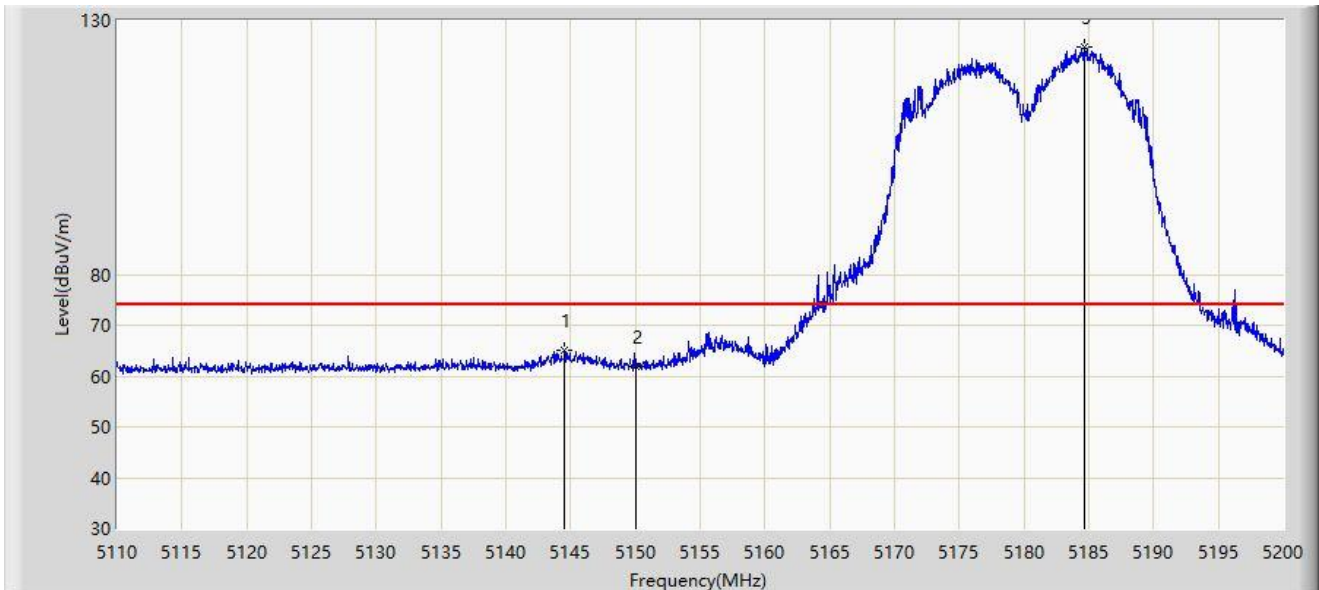


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.560	65.022	61.236	-8.978	74.000	3.786	PK
2		5150.000	61.750	57.978	-12.250	74.000	3.773	PK
3		5184.610	124.765	121.250	N/A	N/A	3.515	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

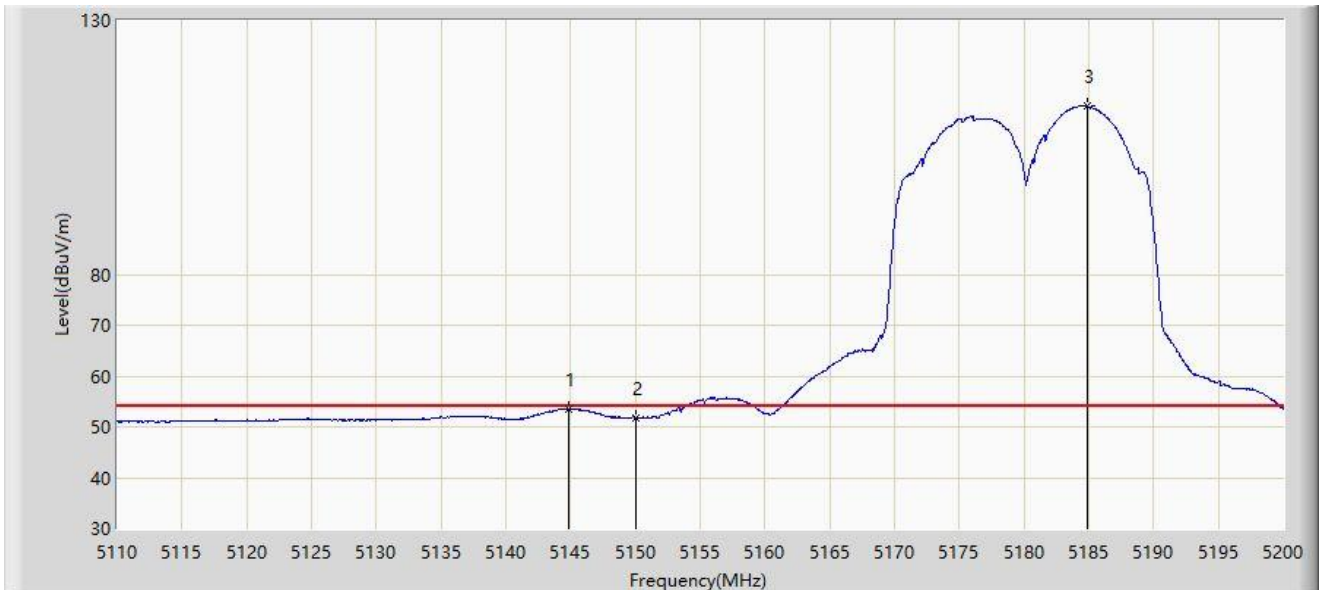


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.875	53.481	49.696	-0.519	54.000	3.785	AV
2		5150.000	51.749	47.977	-2.251	54.000	3.773	AV
3		5184.835	113.118	109.603	N/A	N/A	3.515	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

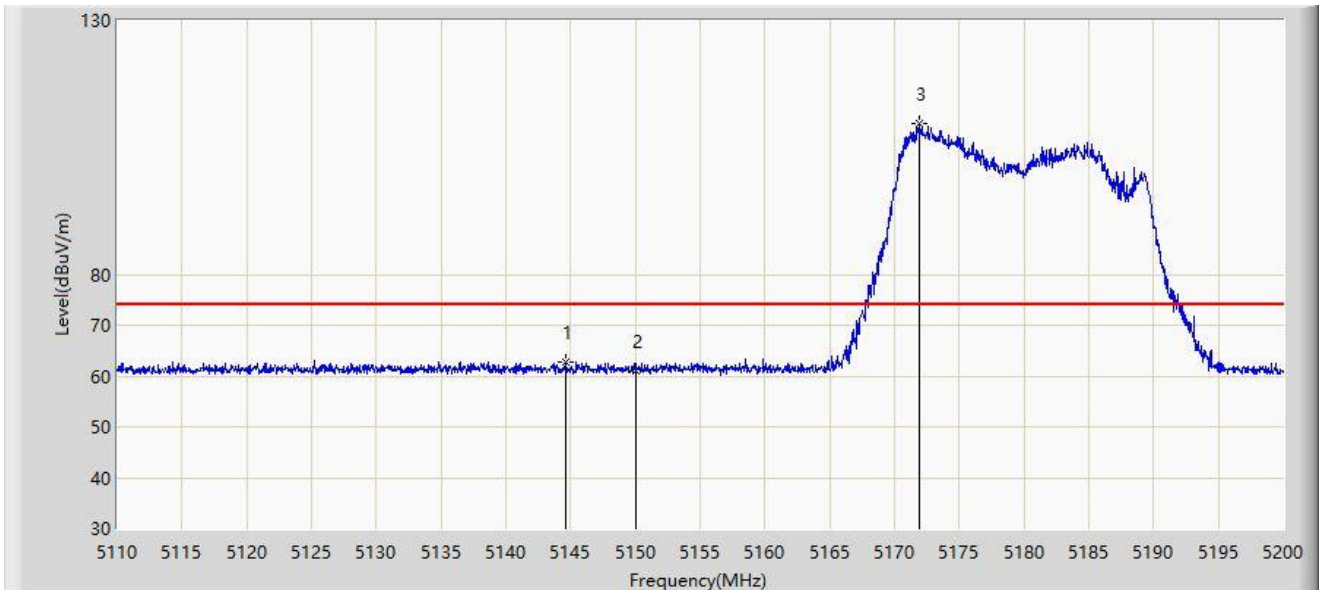


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.650	62.829	59.043	-11.171	74.000	3.785	PK
2		5150.000	61.110	57.338	-12.890	74.000	3.773	PK
3		5171.965	109.582	105.975	N/A	N/A	3.607	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

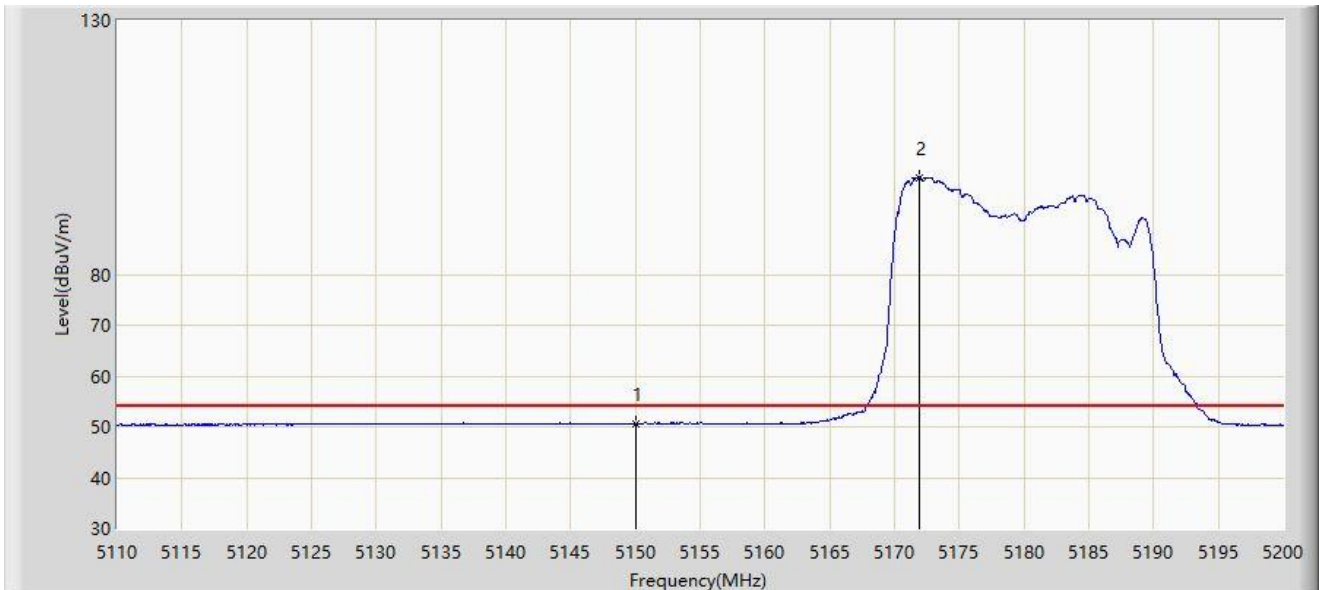


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	50.667	46.895	-3.333	54.000	3.773	AV
2		5171.875	99.114	95.507	N/A	N/A	3.608	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

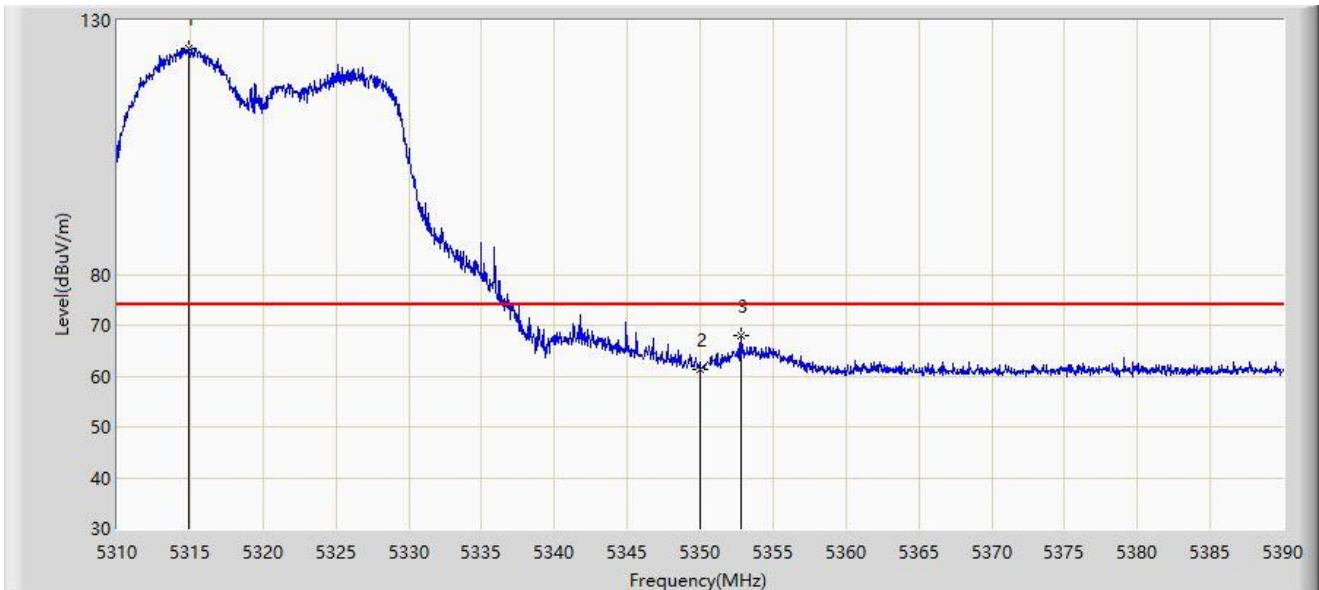


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5314.960	124.633	121.015	N/A	N/A	3.617	PK
2		5350.000	61.381	57.853	-12.619	74.000	3.527	PK
3	*	5352.760	68.043	64.534	-5.957	74.000	3.509	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

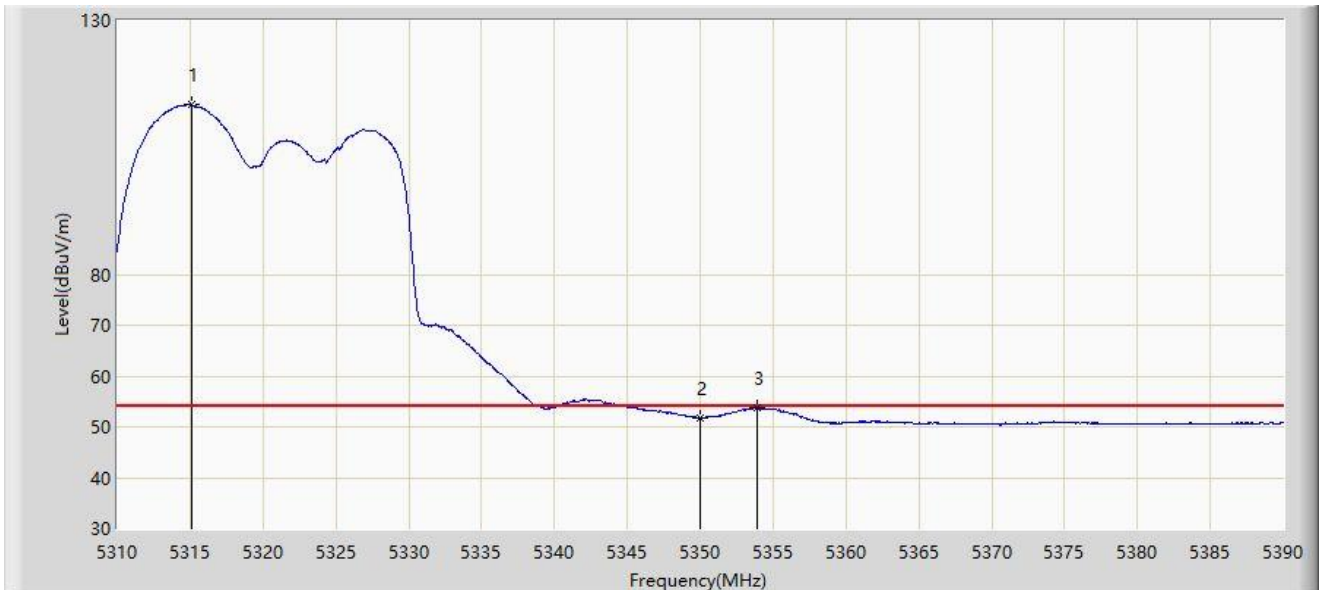


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5315.080	113.401	109.783	N/A	N/A	3.619	AV
2		5350.000	51.731	48.203	-2.269	54.000	3.527	AV
3	*	5353.920	53.833	50.335	-0.167	54.000	3.498	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

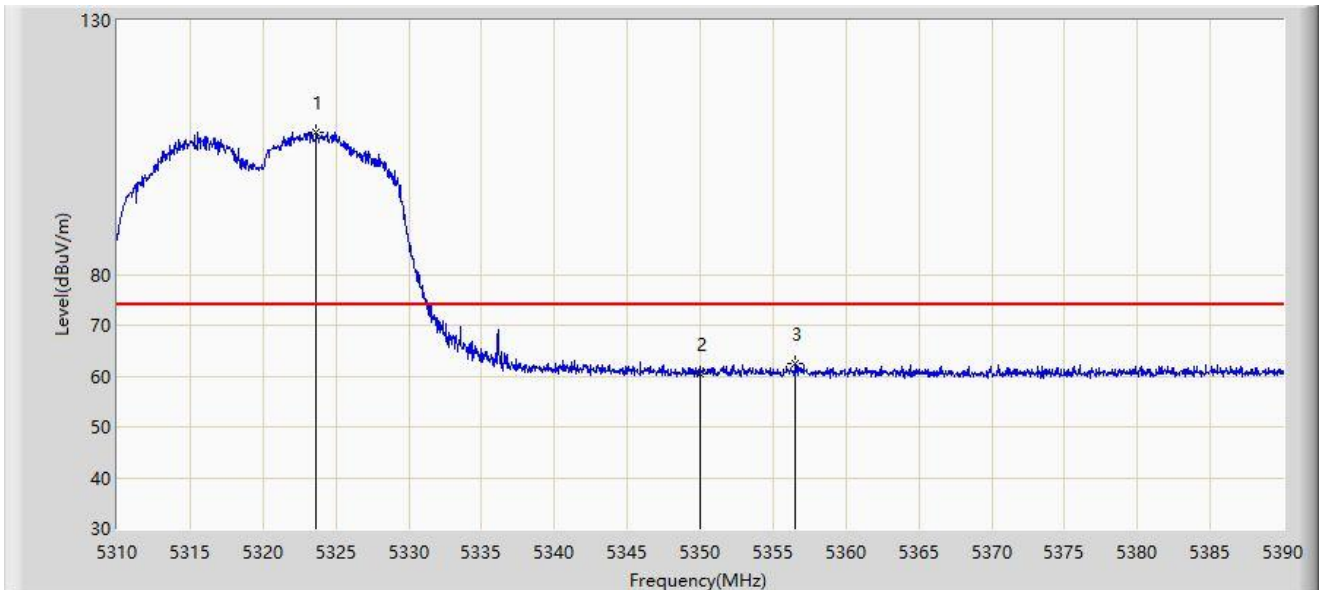


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5323.640	107.939	104.333	N/A	N/A	3.605	PK
2		5350.000	60.346	56.818	-13.654	74.000	3.527	PK
3	*	5356.560	62.533	59.059	-11.467	74.000	3.474	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

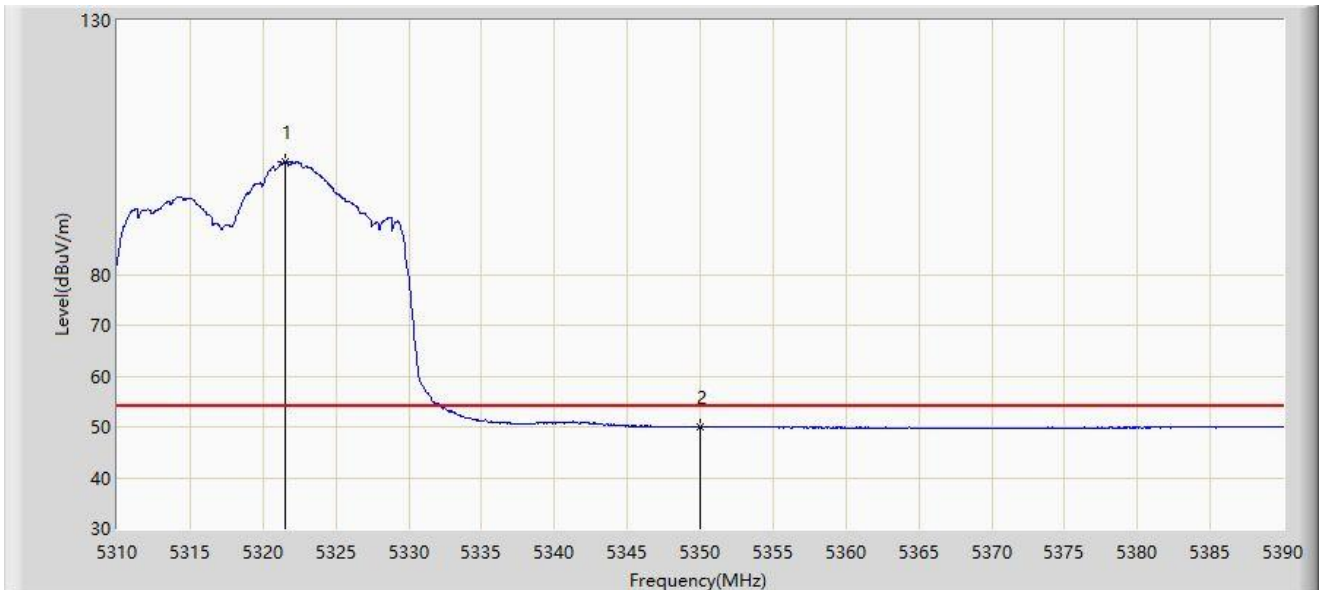


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5321.520	102.142	98.526	N/A	N/A	3.615	AV
2	*	5350.000	49.977	46.449	-4.023	54.000	3.527	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

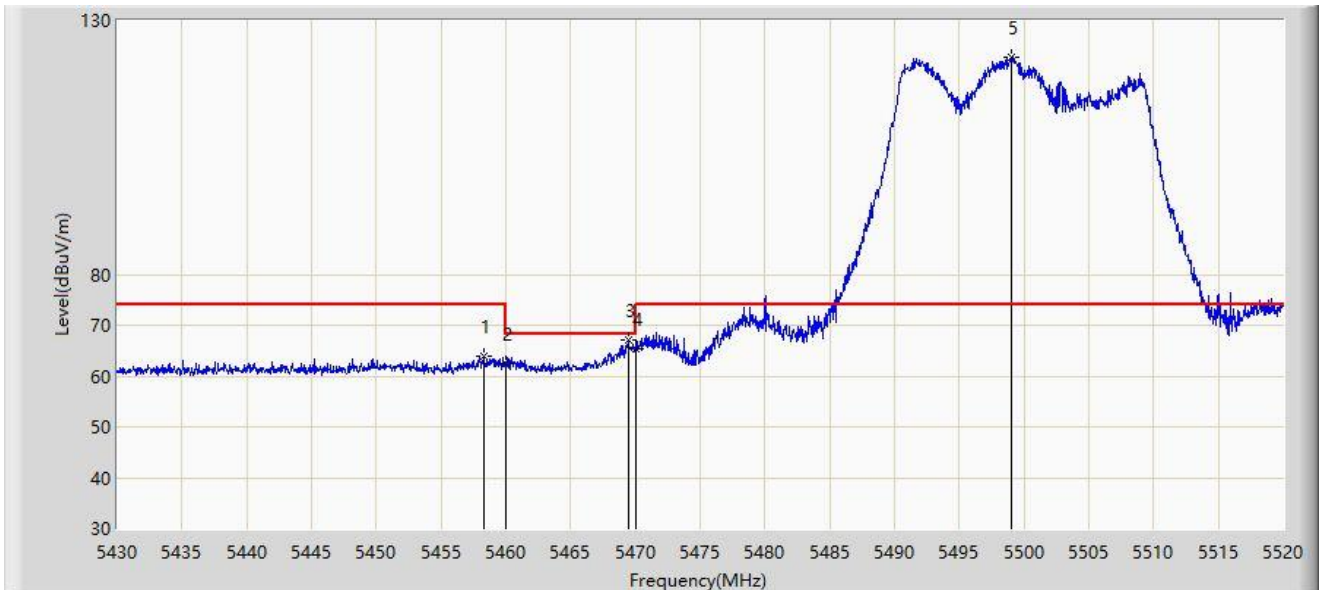


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.305	63.790	60.059	-10.210	74.000	3.730	PK
2		5460.000	62.405	58.667	-11.595	74.000	3.738	PK
3	*	5469.465	67.204	63.429	-0.996	68.200	3.774	PK
4		5470.000	65.230	61.453	-2.970	68.200	3.777	PK
5		5499.075	122.737	118.708	N/A	N/A	4.029	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

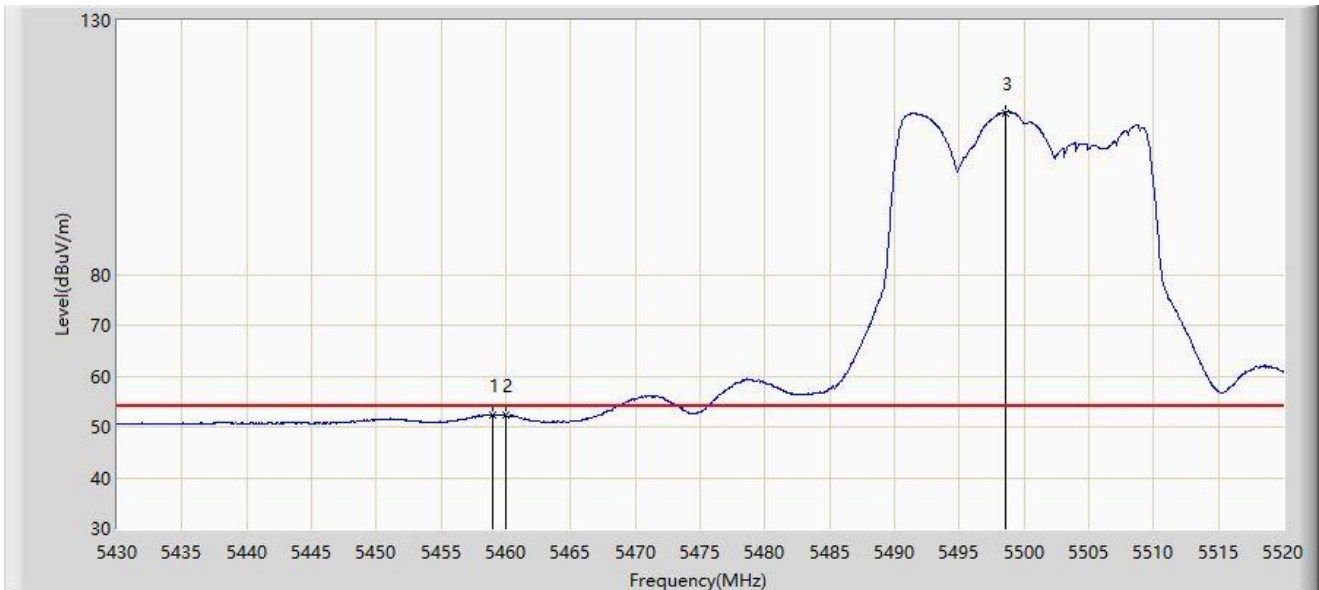


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.935	52.329	48.595	-1.671	54.000	3.733	AV
2		5460.000	52.226	48.488	-1.774	54.000	3.738	AV
3		5498.535	111.847	107.819	N/A	N/A	4.029	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

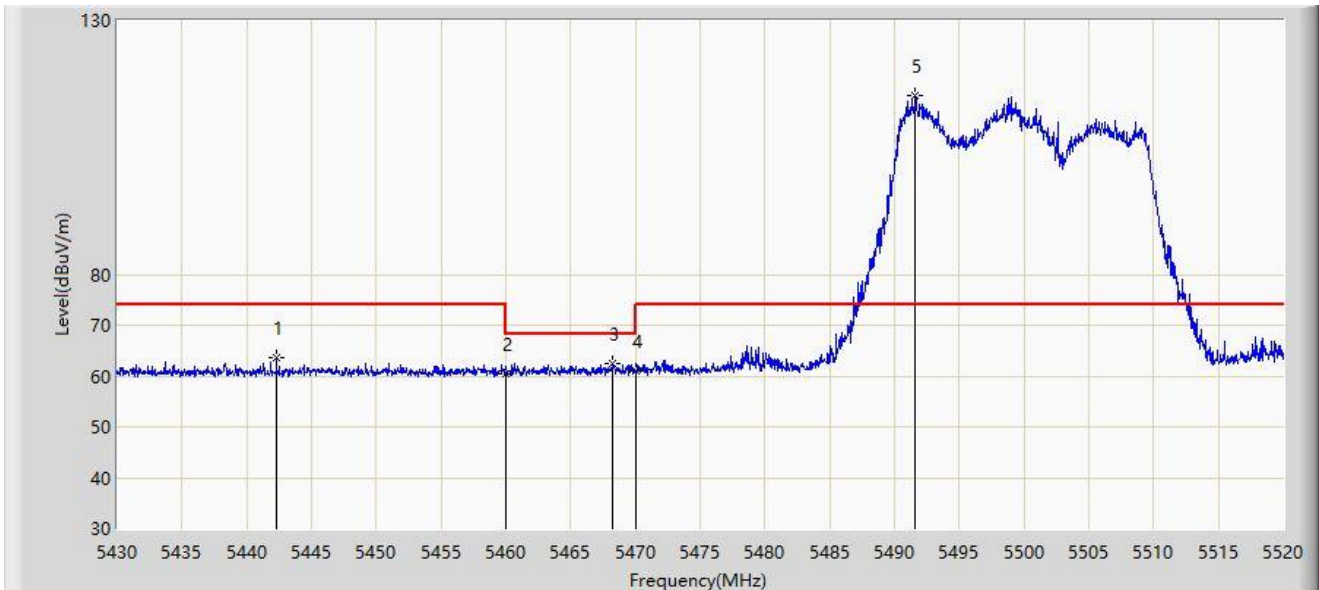


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5442.285	63.575	59.875	-10.425	74.000	3.699	PK
2		5460.000	60.514	56.776	-13.486	74.000	3.738	PK
3	*	5468.250	62.480	58.710	-5.720	68.200	3.770	PK
4		5470.000	61.005	57.228	-7.195	68.200	3.777	PK
5		5491.605	115.212	111.203	N/A	N/A	4.009	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

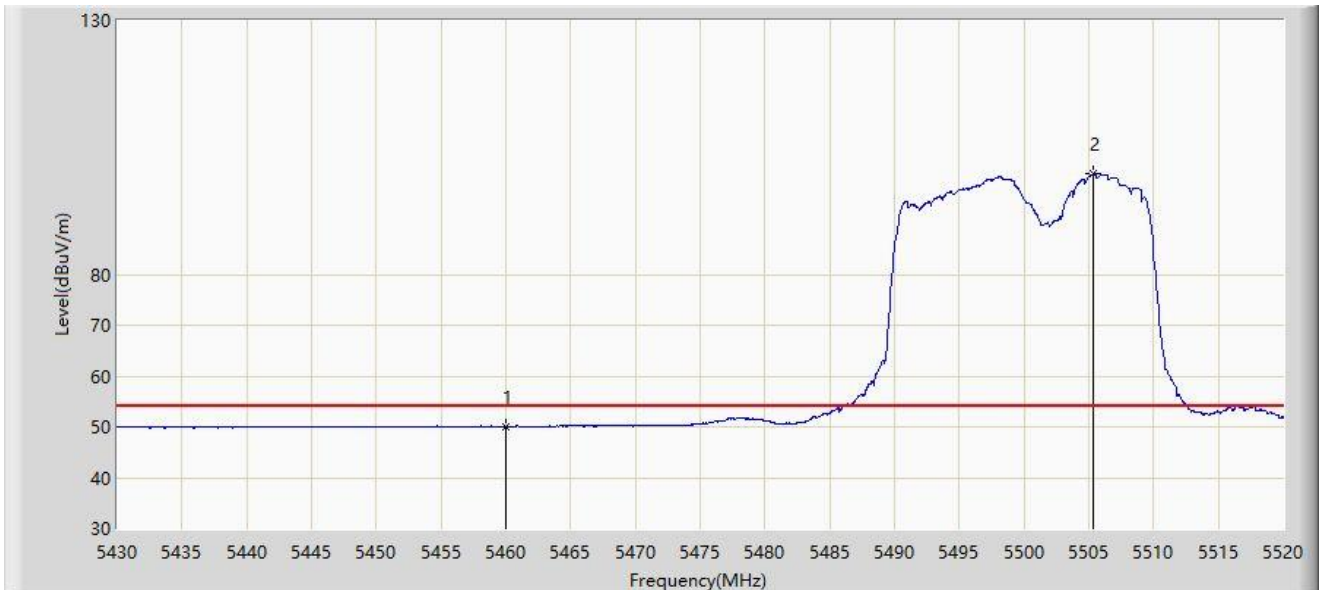


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	50.070	46.332	-3.930	54.000	3.738	AV
2		5505.330	99.735	95.701	N/A	N/A	4.034	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

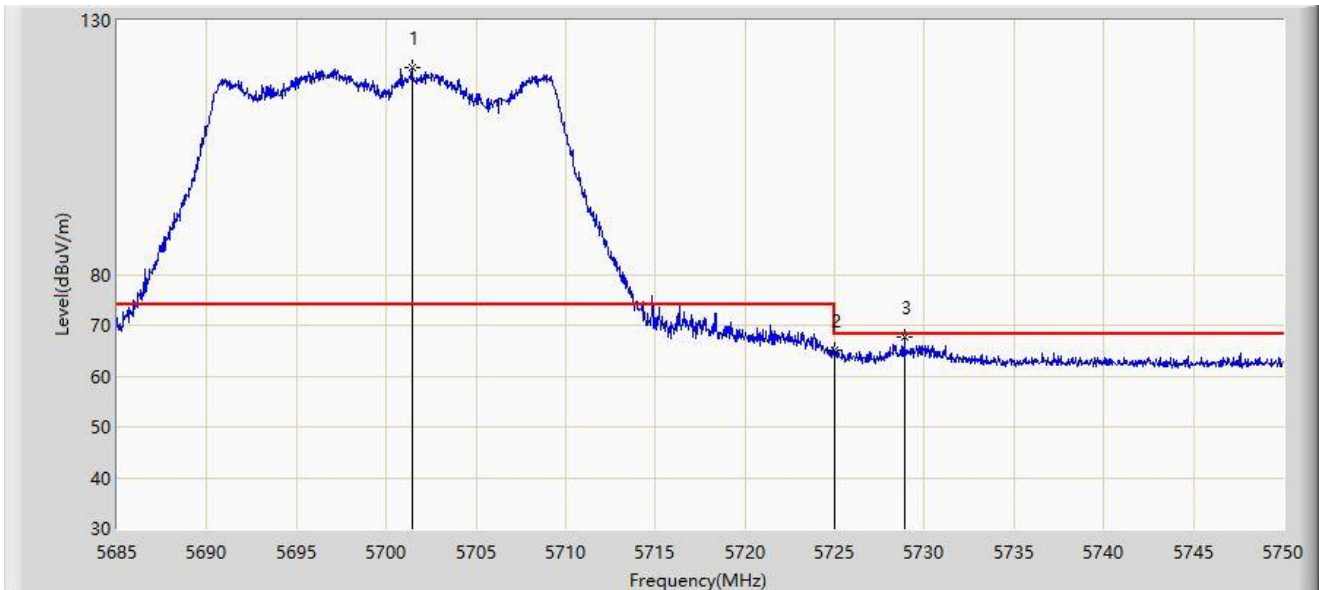


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5701.445	120.719	116.545	N/A	N/A	4.174	PK
2		5725.000	65.004	60.774	-3.196	68.200	4.230	PK
3	*	5728.875	67.690	63.436	-0.510	68.200	4.255	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

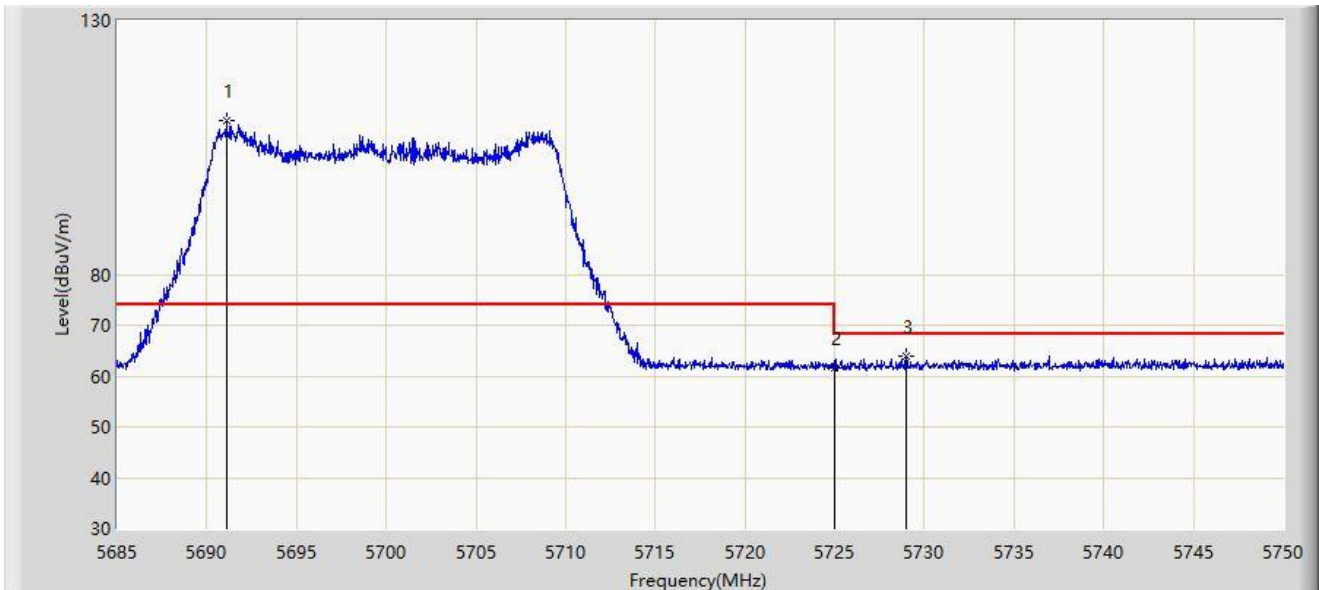


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5691.078	110.192	106.053	N/A	N/A	4.139	PK
2		5725.000	61.730	57.500	-6.470	68.200	4.230	PK
3	*	5728.973	63.891	59.636	-4.309	68.200	4.255	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

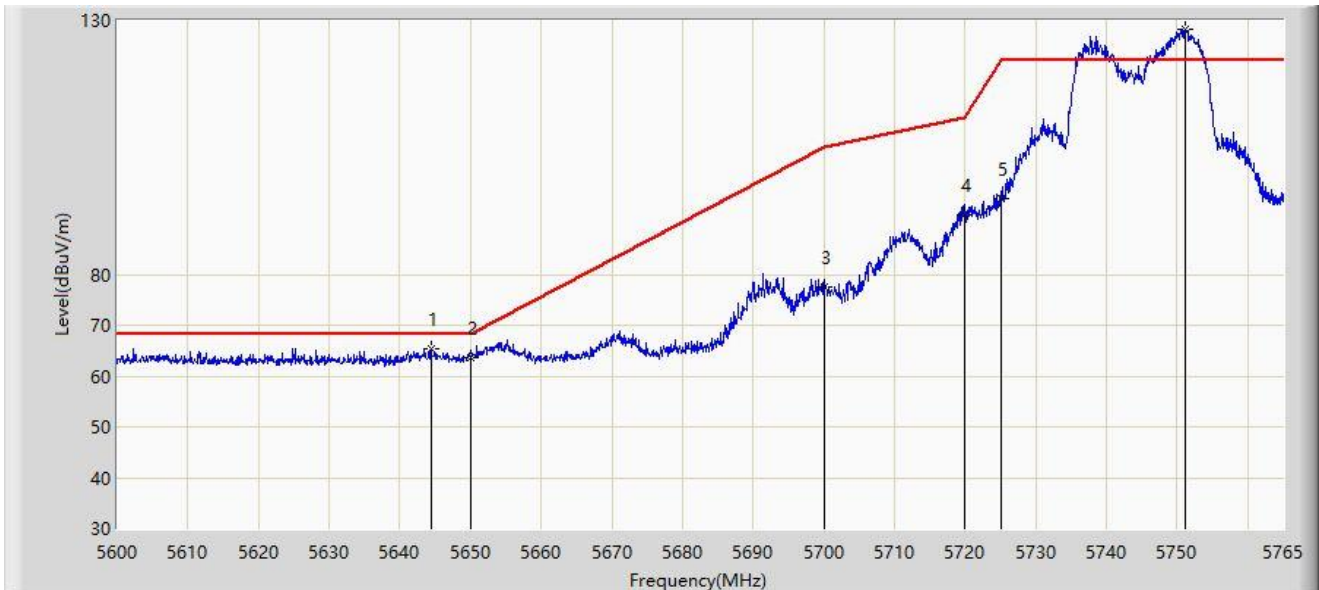


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5644.467	65.327	61.407	-2.873	68.200	3.920	PK
2		5650.000	63.684	59.624	-4.516	68.200	4.060	PK
3		5700.000	77.468	73.300	-27.732	105.200	4.168	PK
4		5720.000	91.868	87.648	-18.932	110.800	4.219	PK
5		5725.000	94.841	90.611	-27.359	122.200	4.230	PK
6		5751.058	128.368	123.955	N/A	N/A	4.414	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

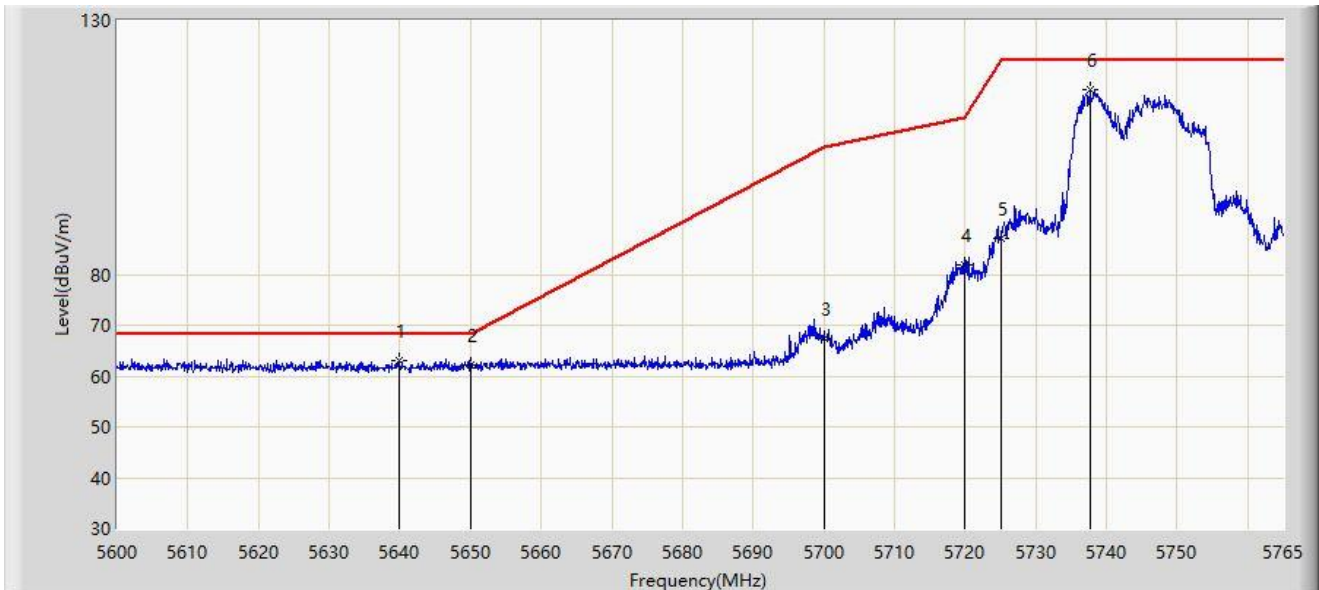


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5639.848	62.998	59.174	-5.202	68.200	3.825	PK
2		5650.000	62.280	58.220	-5.920	68.200	4.060	PK
3		5700.000	67.360	63.192	-37.840	105.200	4.168	PK
4		5720.000	81.755	77.535	-29.045	110.800	4.219	PK
5		5725.000	87.188	82.958	-35.012	122.200	4.230	PK
6		5737.610	116.510	112.171	N/A	N/A	4.338	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

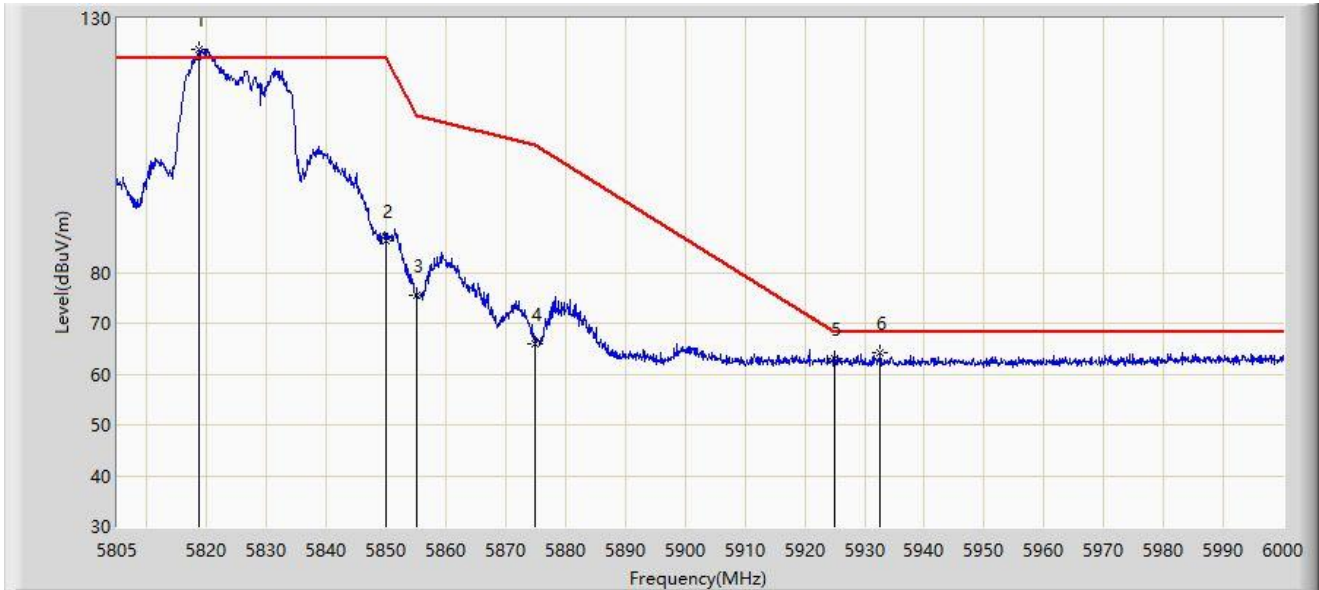


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5818.748	124.057	119.553	N/A	N/A	4.503	PK
2		5850.000	86.265	81.613	-35.935	122.200	4.651	PK
3		5855.000	75.484	70.860	-35.316	110.800	4.624	PK
4		5875.000	65.877	61.333	-39.323	105.200	4.543	PK
5		5925.000	63.076	58.324	-5.124	68.200	4.751	PK
6	*	5932.627	64.113	59.374	-4.087	68.200	4.740	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

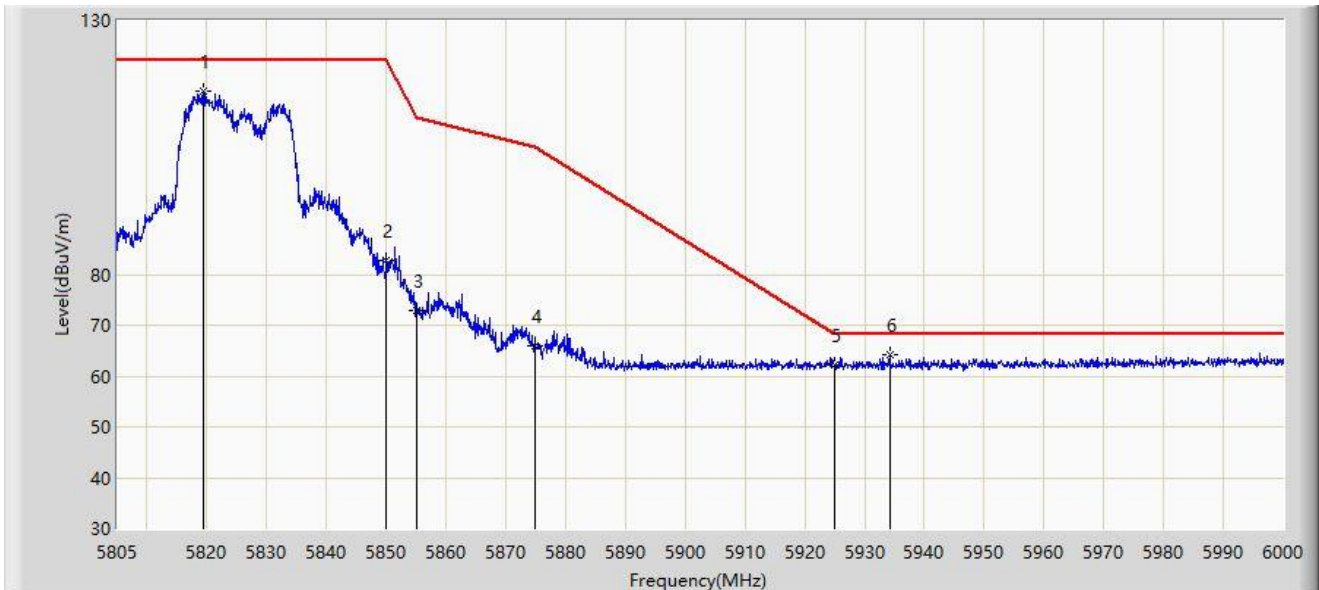


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5819.527	115.985	111.474	N/A	N/A	4.510	PK
2		5850.000	82.654	78.002	-39.546	122.200	4.651	PK
3		5855.000	72.808	68.184	-37.992	110.800	4.624	PK
4		5875.000	66.065	61.521	-39.135	105.200	4.543	PK
5		5925.000	62.185	57.433	-6.015	68.200	4.751	PK
6	*	5934.187	64.218	59.495	-3.982	68.200	4.723	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

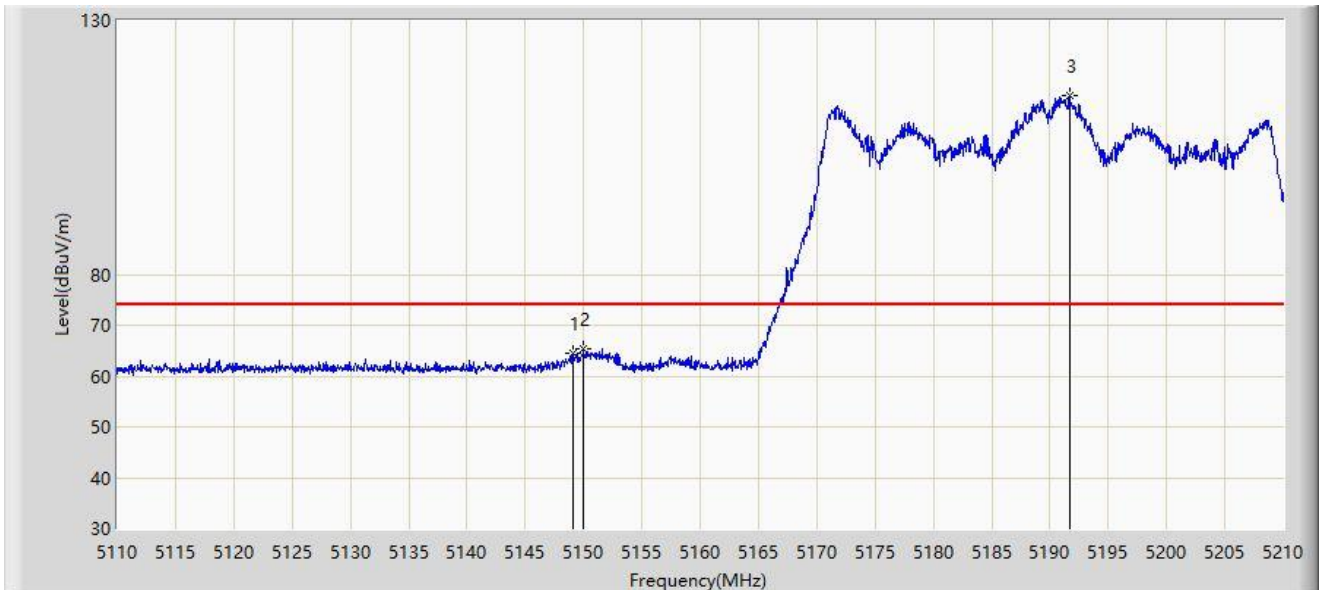


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5149.150	64.393	60.621	-9.607	74.000	3.772	PK
2	*	5150.000	65.348	61.576	-8.652	74.000	3.773	PK
3		5191.650	115.335	111.844	N/A	N/A	3.491	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

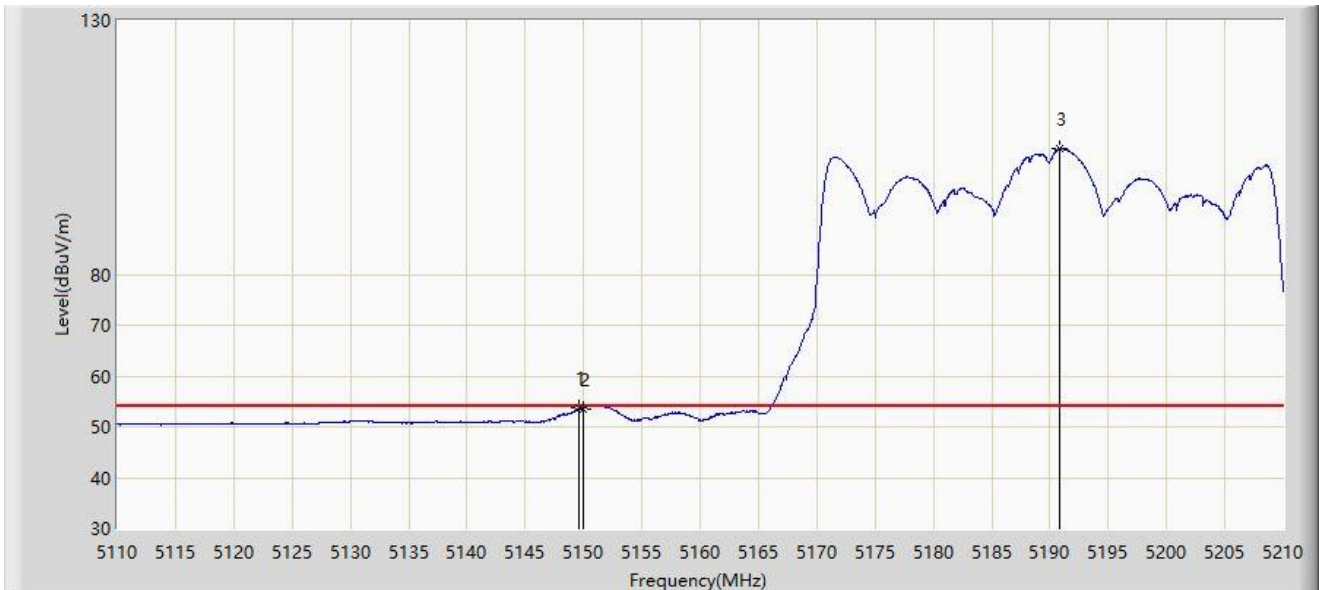


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.650	53.748	49.976	-0.252	54.000	3.773	AV
2		5150.000	53.562	49.790	-0.438	54.000	3.773	AV
3		5190.800	104.716	101.220	N/A	N/A	3.497	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

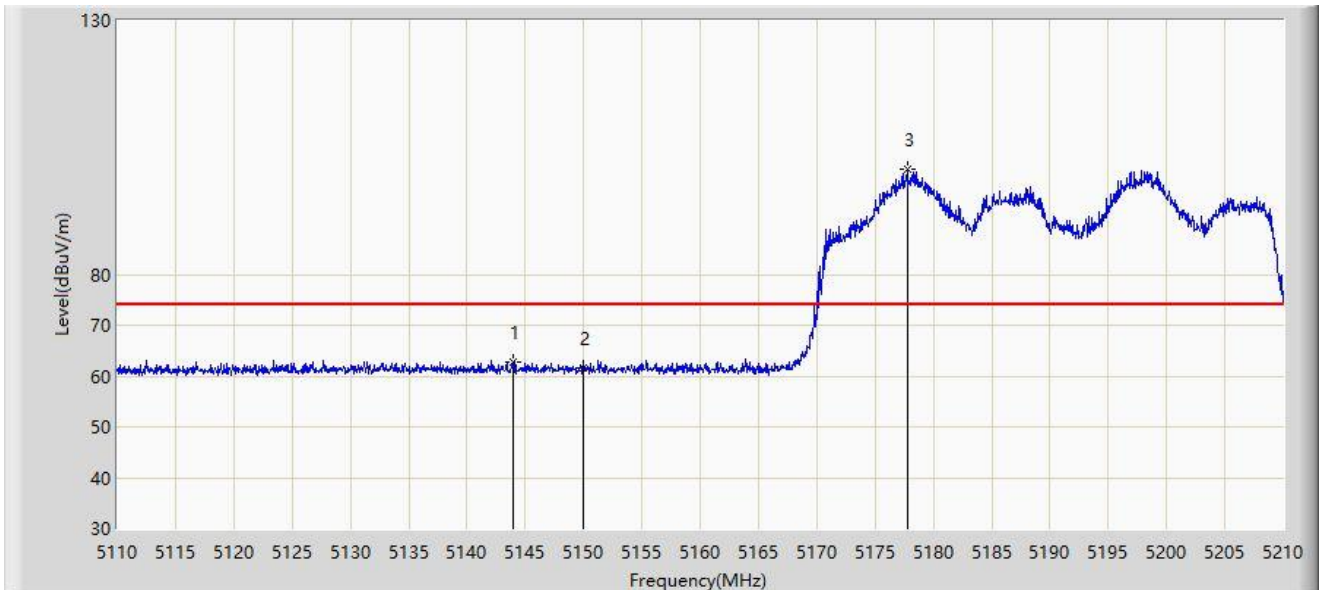

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.000	62.851	59.063	-11.149	74.000	3.788	PK
2		5150.000	61.629	57.857	-12.371	74.000	3.773	PK
3		5177.750	100.856	97.304	N/A	N/A	3.553	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	50.589	46.817	-3.411	54.000	3.773	AV
2		5198.100	89.499	86.049	N/A	N/A	3.450	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

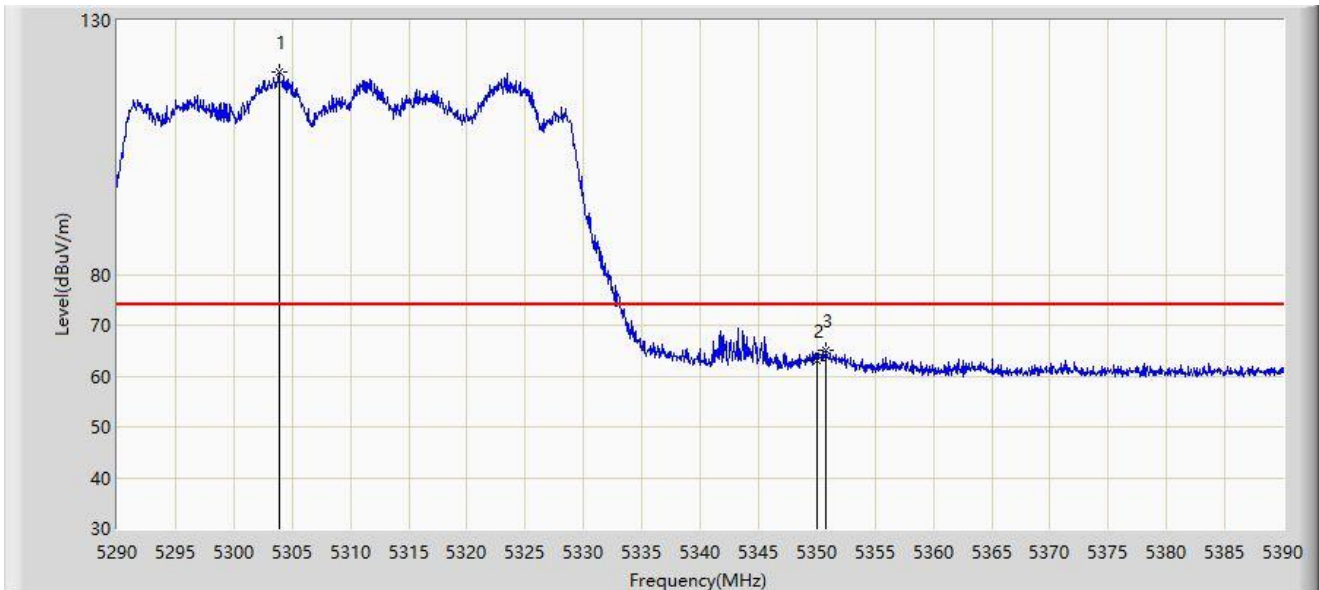


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5303.850	119.826	116.230	N/A	N/A	3.595	PK
2		5350.000	63.047	59.519	-10.953	74.000	3.527	PK
3	*	5350.800	65.188	61.665	-8.812	74.000	3.523	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

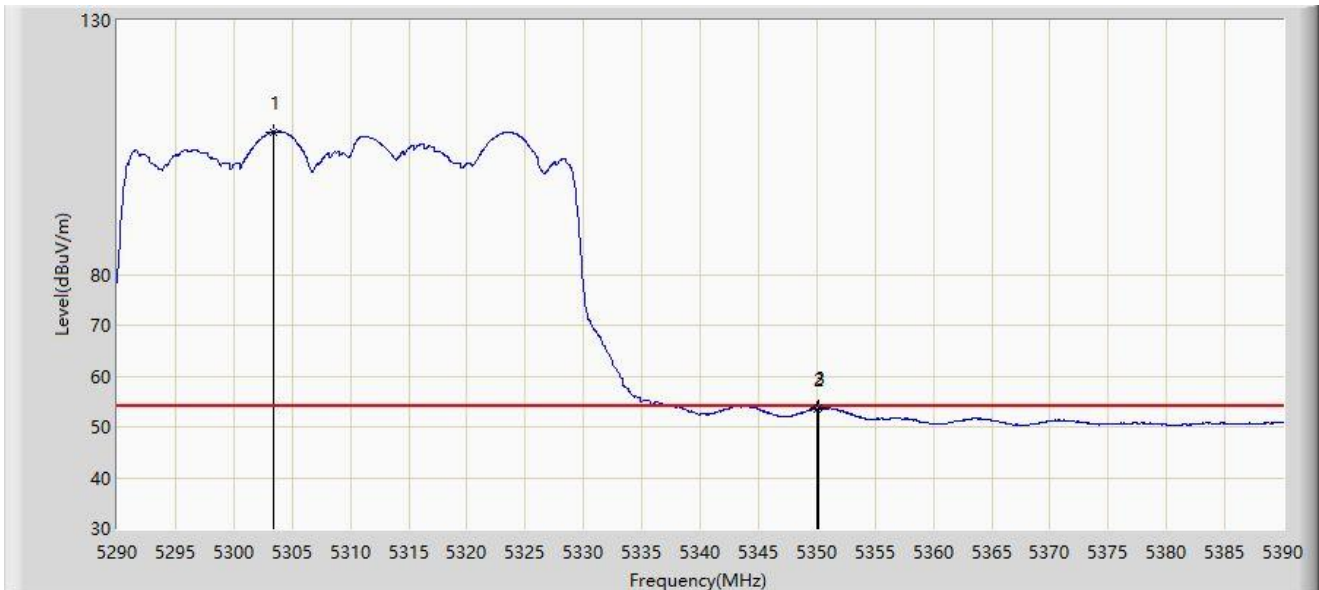


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5303.400	108.108	104.513	N/A	N/A	3.596	AV
2		5350.000	53.555	50.027	-0.445	54.000	3.527	AV
3	*	5350.200	53.787	50.260	-0.213	54.000	3.527	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

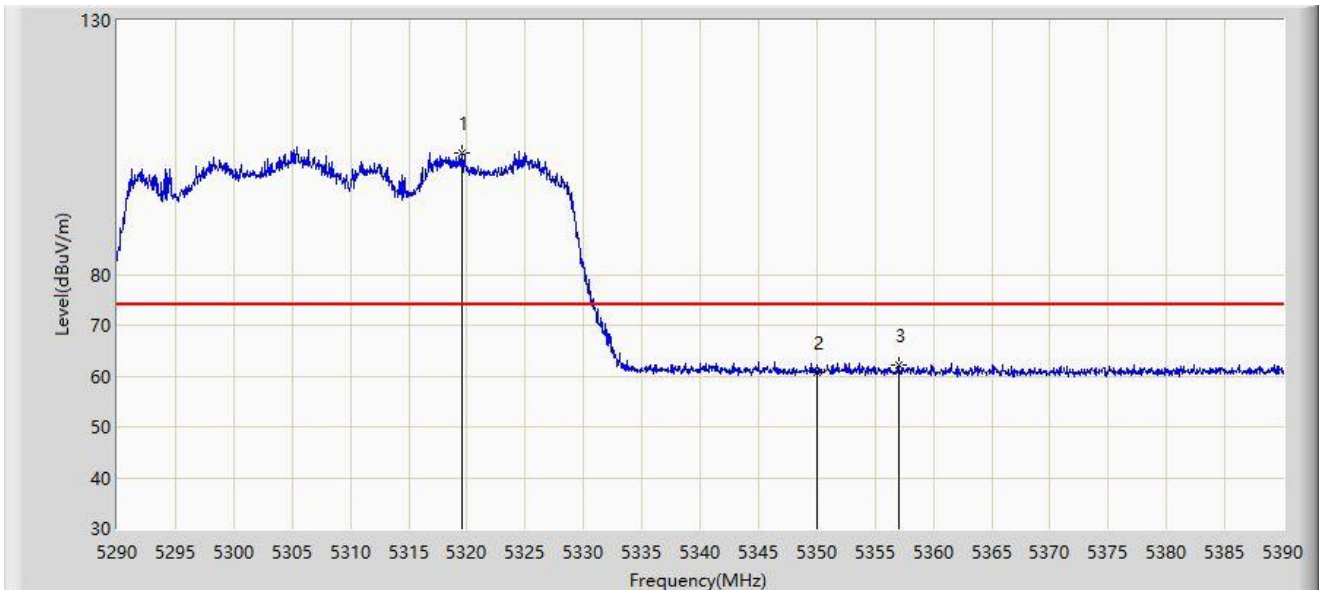


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.550	103.923	100.297	N/A	N/A	3.626	PK
2		5350.000	60.691	57.163	-13.309	74.000	3.527	PK
3	*	5357.050	62.190	58.721	-11.810	74.000	3.470	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

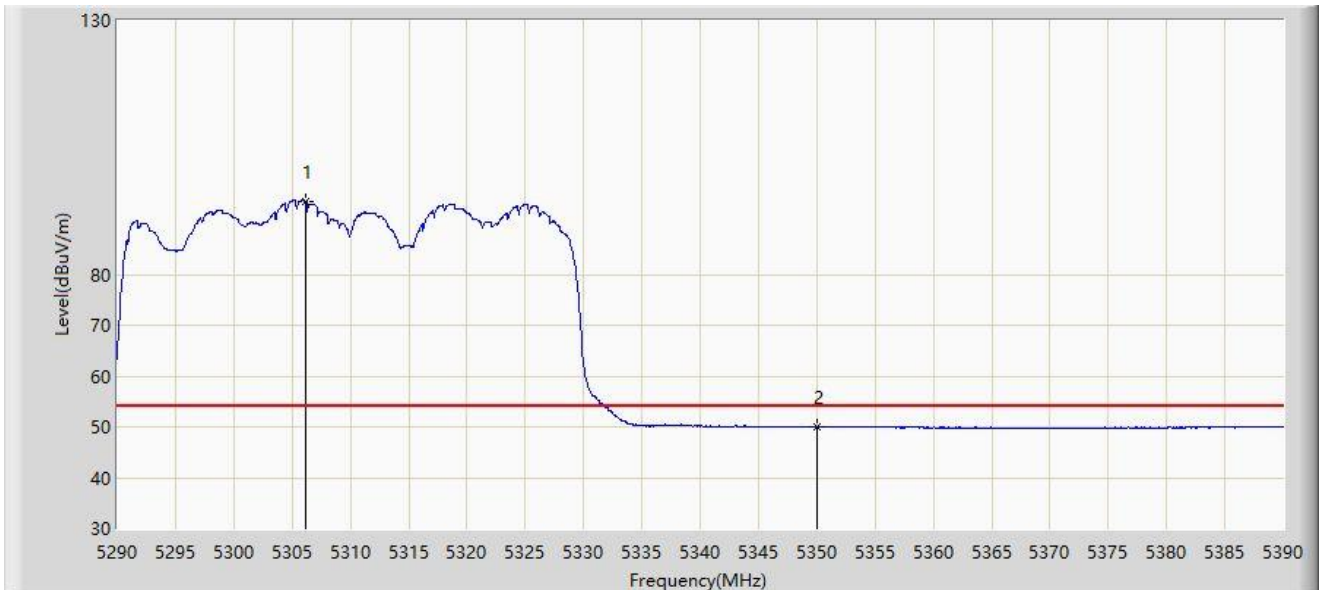


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5306.200	94.460	90.861	N/A	N/A	3.599	AV
2	*	5350.000	49.927	46.399	-4.073	54.000	3.527	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

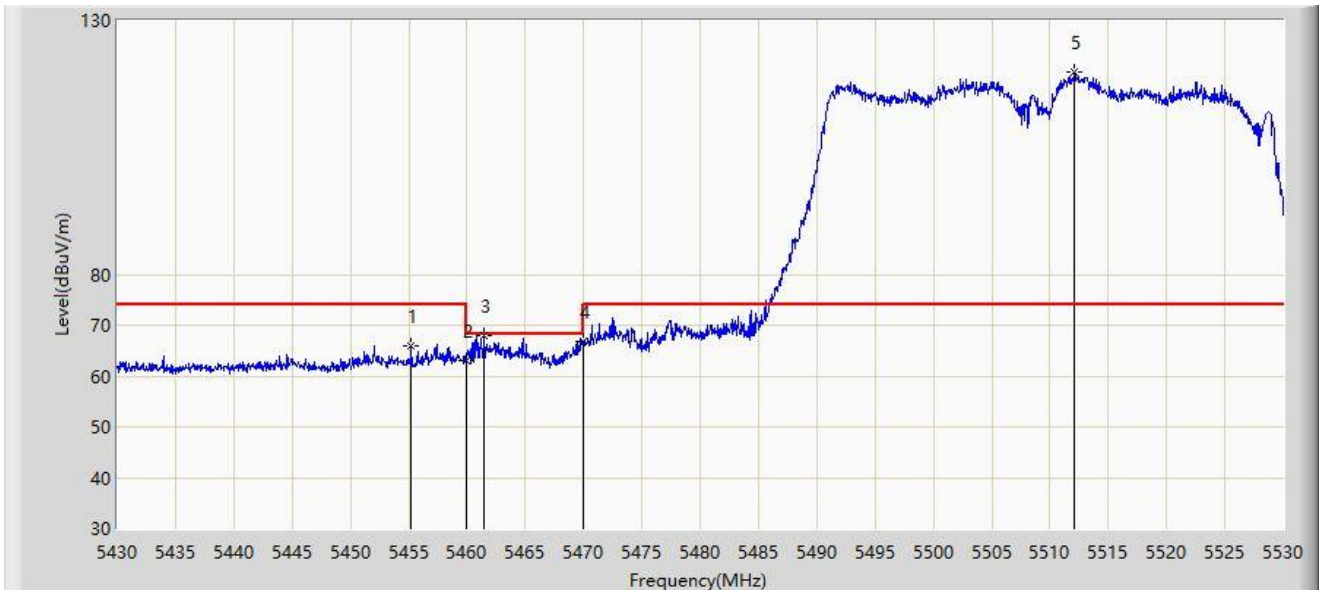


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5455.250	66.012	62.303	-7.988	74.000	3.709	PK
2		5460.000	63.182	59.444	-10.818	74.000	3.738	PK
3	*	5461.500	67.881	64.137	-0.319	68.200	3.744	PK
4		5470.000	66.702	62.925	-1.498	68.200	3.777	PK
5		5512.100	119.783	115.806	N/A	N/A	3.977	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-05-21
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

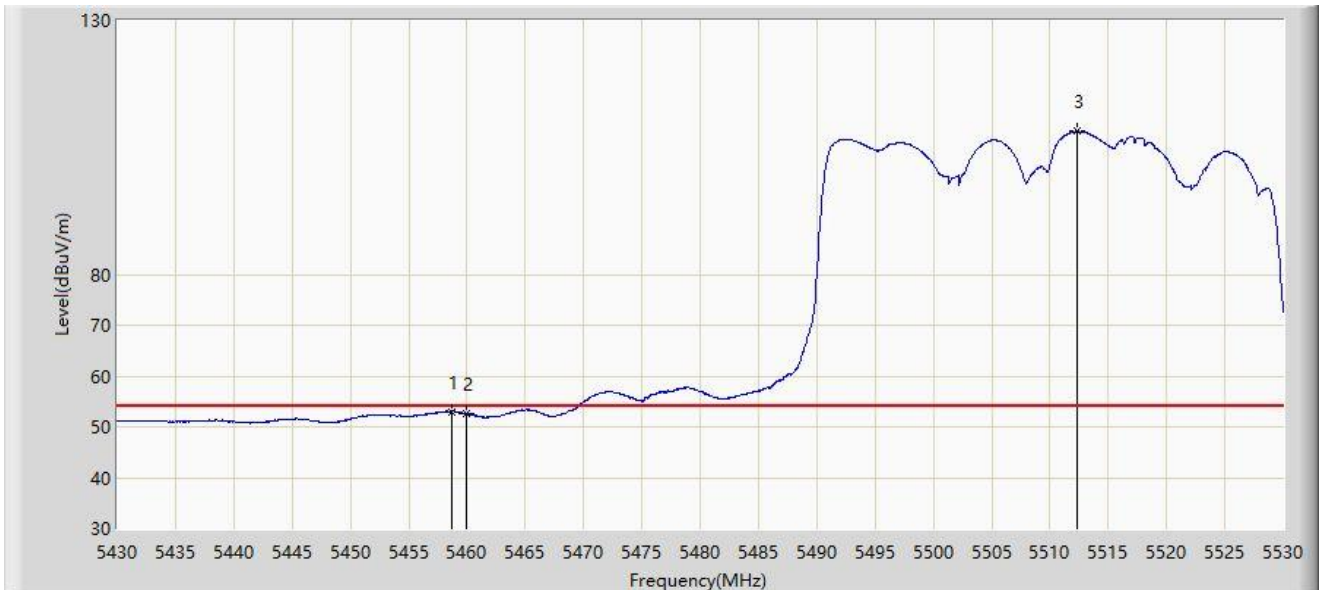

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.700	52.985	49.252	-1.015	54.000	3.733	AV
2		5460.000	52.717	48.979	-1.283	54.000	3.738	AV
3		5512.350	108.131	104.156	N/A	N/A	3.976	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).