

SAA04-222060

Dual-Band Directional Panel Antenna for
2400-2500/4900-5875 MHz
V1.0

Date : 2023/08/04

Prepared by : Alan

Approved by :

Stage : ☒ **Development V1.0** ☐ **Pilot Run** ☐ **Final**

震波科技股份有限公司 SmartAnt Telecom Co., Ltd.

新竹科學工業園區園區二路 58 號 3 樓

3F, No. 58, Park Avenue II, Science-based Industrial Park, Hsinchu 300,
Taiwan, R.O.C.

TEL :03-5783002 ext:661 FAX:03-5783312

Publishing History				
Stage	Version	Reason for Revision	Authors	Issue Date
	V1.0	AM Measurement Report	Alan	2023/08/04

Content List

1. Specification
2. VSWR Test
 - 2.1 Test Environment
 - 2.2 VSWR Test Data
3. Gain and Radiation Pattern Measure.
 - 3.1 Anechoic Chamber.
 - 3.2 Gain and Radiation Pattern

1. Specification.

Dual-Band Directional Panel Antenna for 2400 - 2500 / 4900 - 5875 MHz

Version 4.1

SAA04-222060

Electrical Specification


Frequency range	2400 - 2500 MHz	4900 - 5875 MHz
Gain	13.5 dBi	15.5 dBi
VSWR	2.0 : 1 (Max)	2.0 : 1 (Max)
Polarization	Linear, vertical	Linear, vertical
HPBW/horizontal	30°	15°
HPBW/vertical	30°	15°
Front to back ratio	15 dB	
Downtilt	0°	
Power handling	10 W (cw)	
Impedance	50 Ohms	
Connector	N Jack	





Environmental & Mechanical Characteristics

Survival wind speed	180 km/hr
Temperature	-40°C to +80°C
Humidity	95% @55°C
Radome color	Light Gray
Radome material	ABS, UV resistant
Weight	0.4 kg
Dimensions	200 x 218 x 50 mm

H-plane Co-polarization Pattern

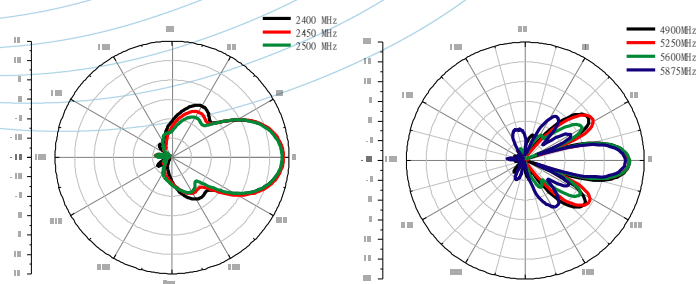


V-plane Co-polarization Pattern

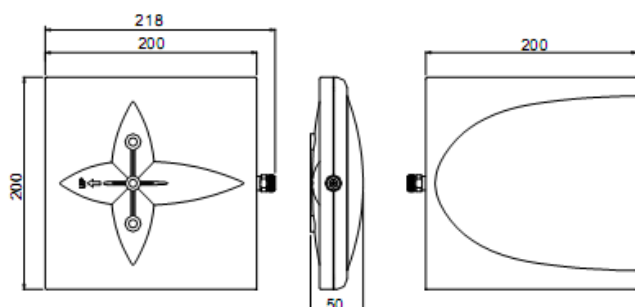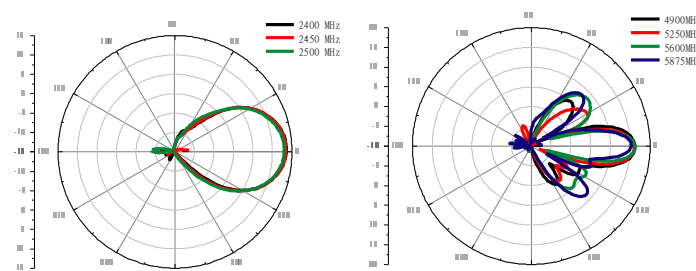


it, for FCC certification use only.


.1 Test Environment.

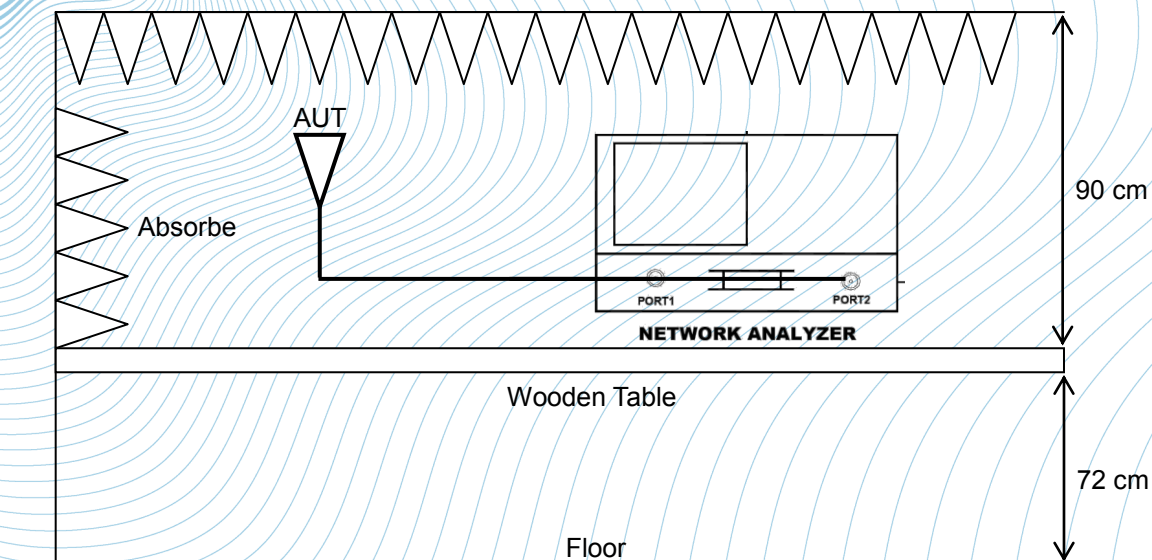

Network Analyzer	Calibrated Available Date
■ Anritsu MS46122B 43.5GHz	2024/12/04
□ Anritsu 37369D	2025/01/19
□ Anritsu MS4623B	2025/02/23
□ Keysight E5071C	2026/04/18
□ Anritsu MS46122B 8GHz	2027/06/13

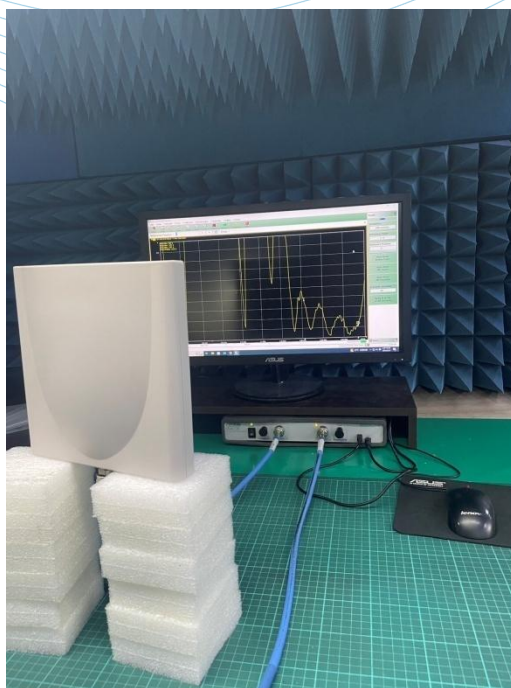

2.2 VSWR Test Data

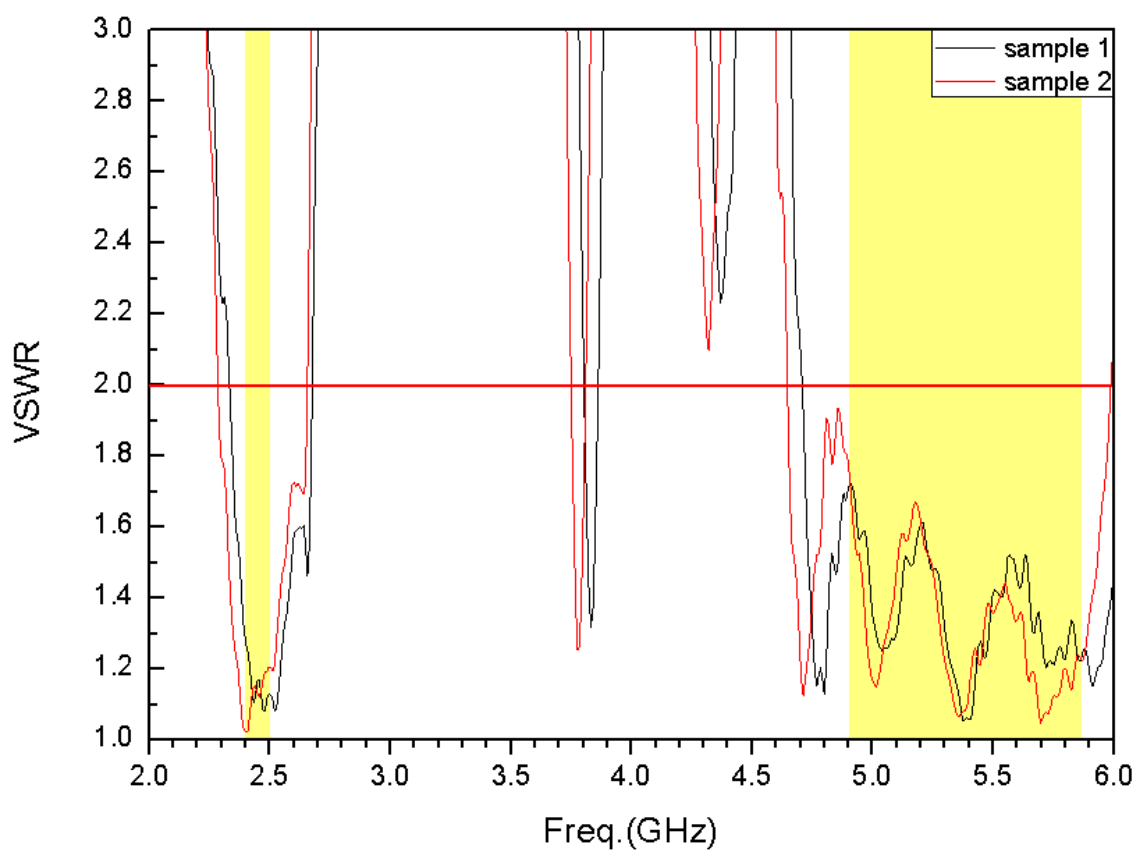


Frequency (GHz)	2.4	2.45	2.5	Max
Sample 1	1.27	1.16	1.12	1.27
Sample 2	1.02	1.12	1.20	1.20

Frequency (GHz)	4.9	5.0	5.1	5.3	5.5	5.7	5.9	Max
Sample 1	1.72	1.34	1.32	1.28	1.42	1.27	1.16	1.72
Sample 2	1.74	1.16	1.50	1.20	1.35	1.05	1.37	1.74

3.1 Gain and Radiation Pattern Measure

– Anechoic Chamber.

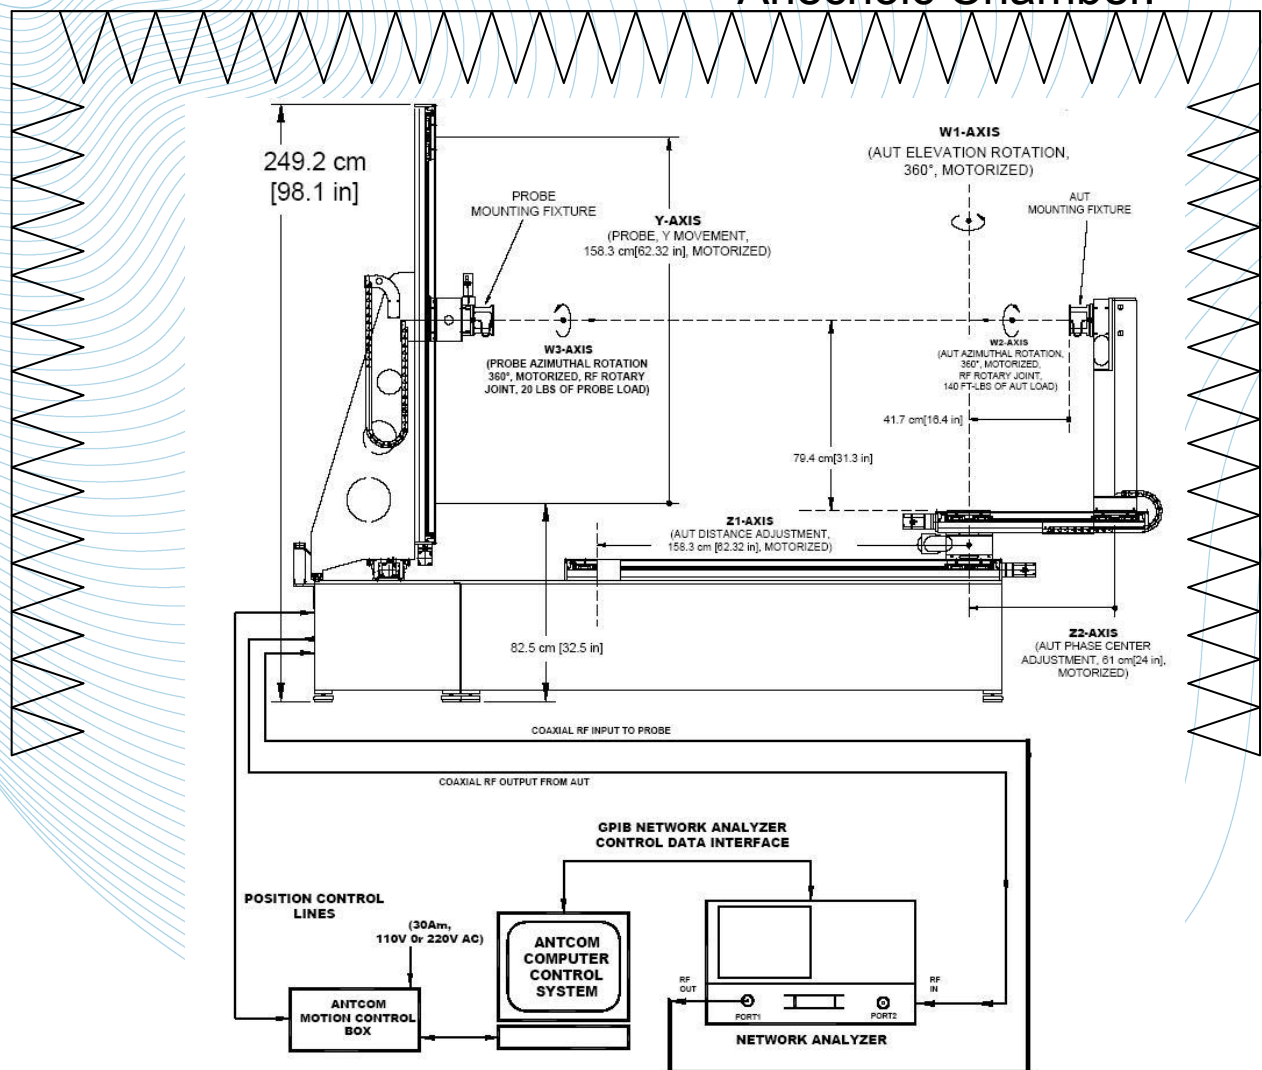

NetWork Analyzer : Agilent 8722ES + 87405

Standard Gain Horn

☐ H1734 0.5 - 6.0 GHz	☐ 3160-07 8.2 – 12.4 GHz
☒ 3160-03 1.7 - 2.6 GHz	☐ 3160-08 12.4 – 18 GHz
☐ 3160-04 2.6 – 3.95 GHz	☐ 3160-09 18 – 26 GHz
☒ 3160-05 3.95 – 5.85 GHz	☐ 3160-10 26 – 40 GHz
☐ 3160-06 5.85 – 8.2 GHz	

3.2 Gain and Radiation Pattern

