


Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

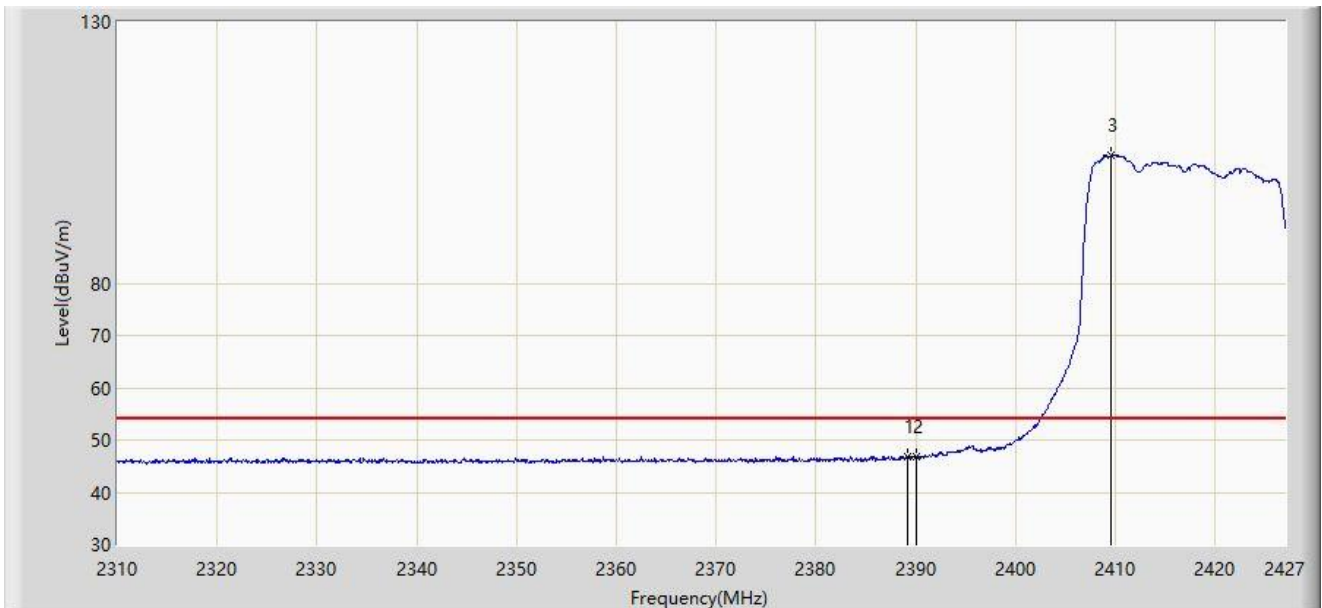


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.150	46.951	15.792	-7.049	54.000	31.159	AV
2		2390.000	46.702	15.544	-7.298	54.000	31.158	AV
3		2409.625	104.390	73.253	N/A	N/A	31.137	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

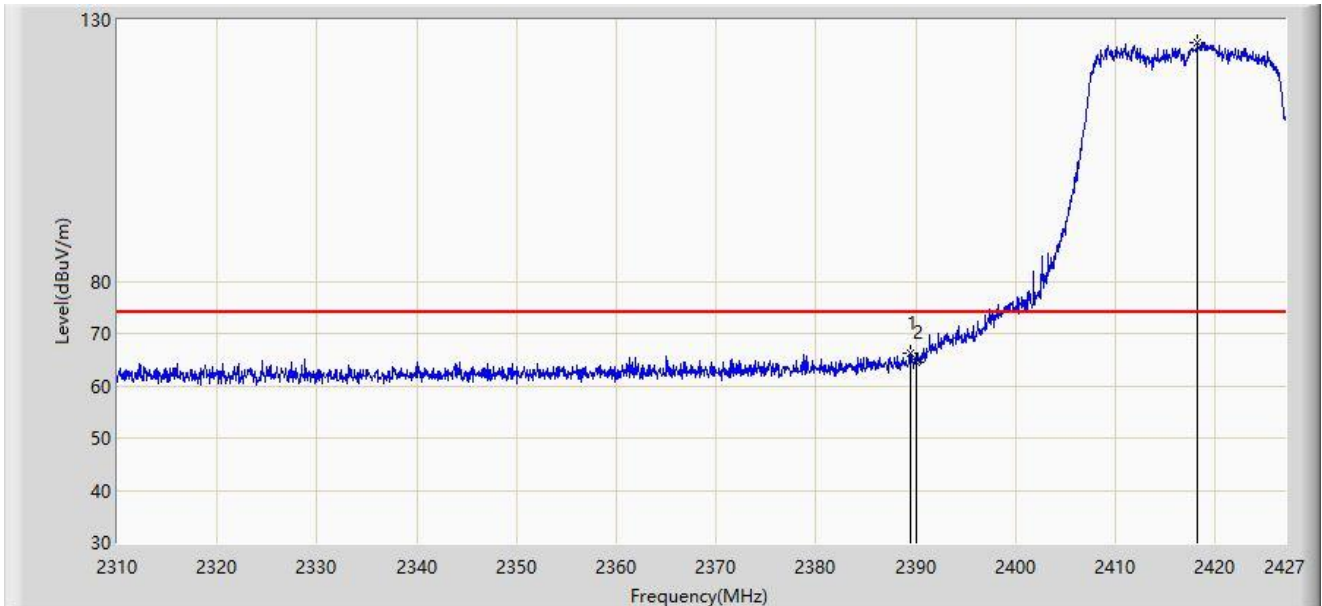


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.501	66.152	34.994	-7.848	74.000	31.158	PK
2		2390.000	64.494	33.336	-9.506	74.000	31.158	PK
3		2418.225	125.764	94.637	N/A	N/A	31.126	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

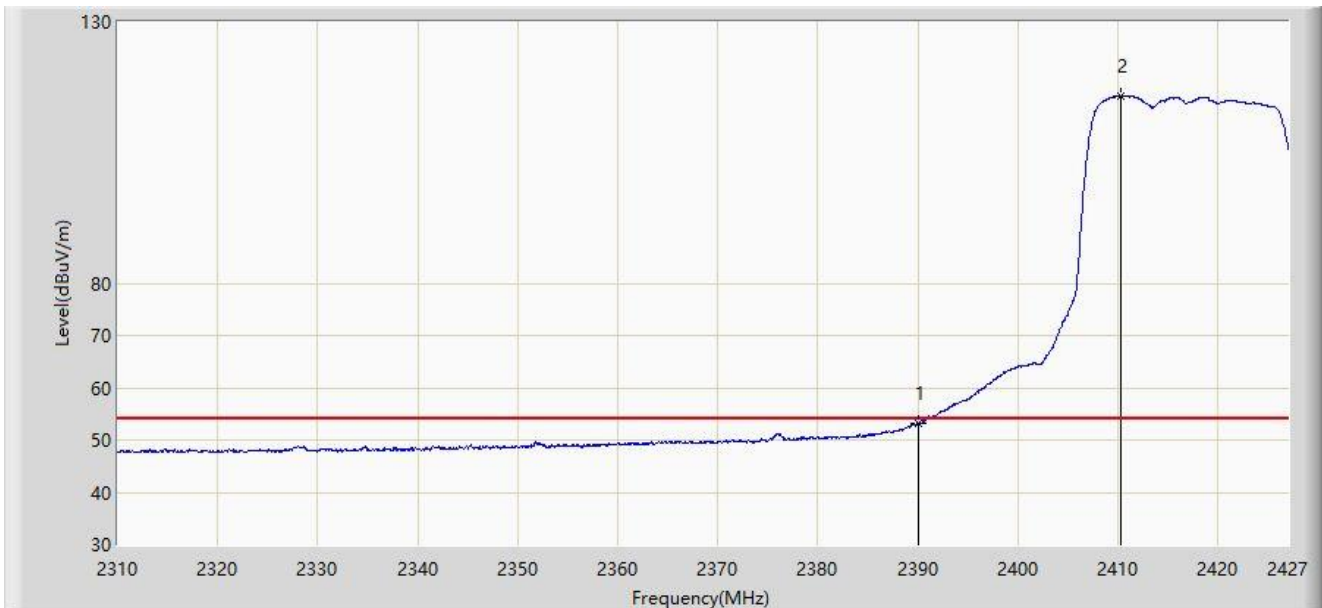


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	53.063	21.905	-0.937	54.000	31.158	AV
2		2410.327	115.901	84.765	N/A	N/A	31.136	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-25
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.1ax-HE20 at 2437MHz	

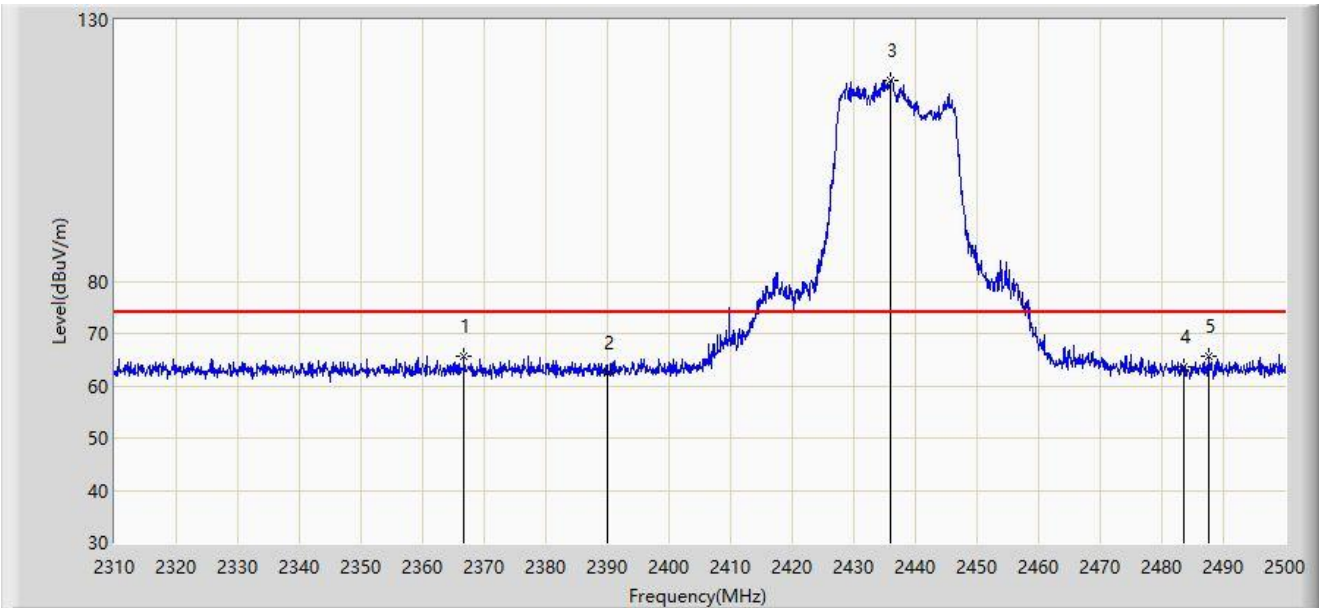


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2366.715	65.709	34.475	-8.291	74.000	31.234	PK
2		2390.000	62.400	31.242	-11.600	74.000	31.158	PK
3		2435.970	118.388	87.312	N/A	N/A	31.077	PK
4		2483.500	63.685	32.592	-10.315	74.000	31.093	PK
5		2487.650	65.658	34.562	-8.342	74.000	31.096	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-25
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.1ax-HE20 at 2437MHz	

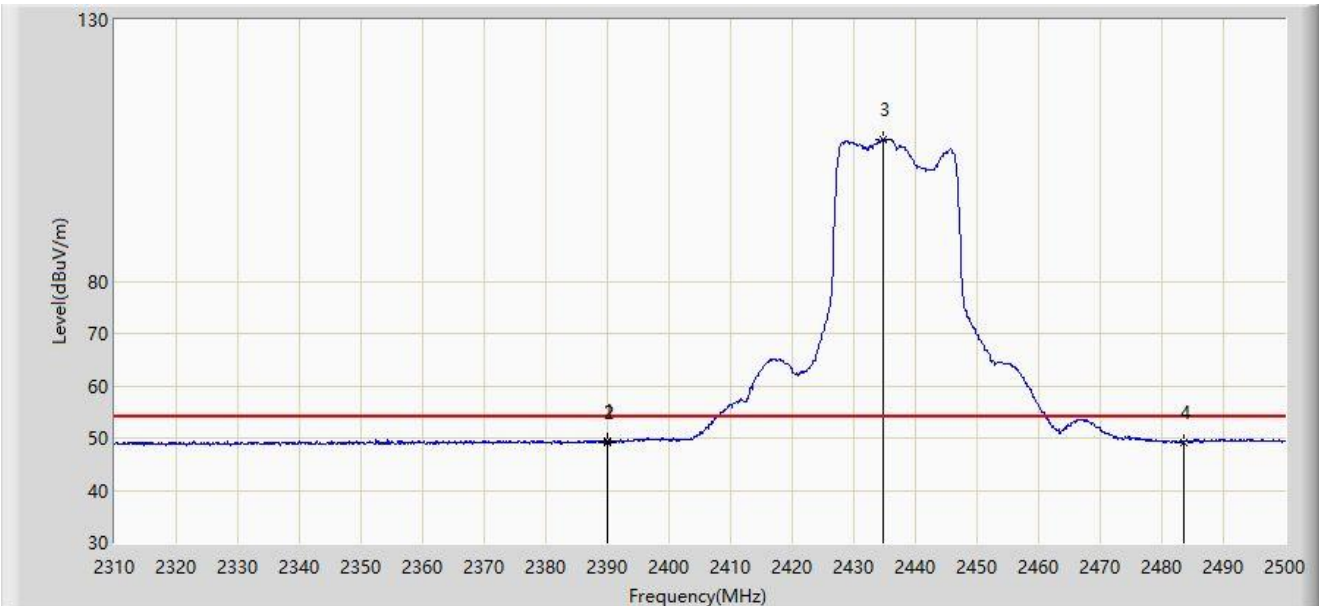


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.895	49.457	18.299	-4.543	54.000	31.158	AV
2		2390.000	49.136	17.978	-4.864	54.000	31.158	AV
3		2434.735	107.179	76.099	N/A	N/A	31.080	AV
4		2483.500	49.264	18.171	-4.736	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-25
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.1ax-HE20 at 2437MHz	

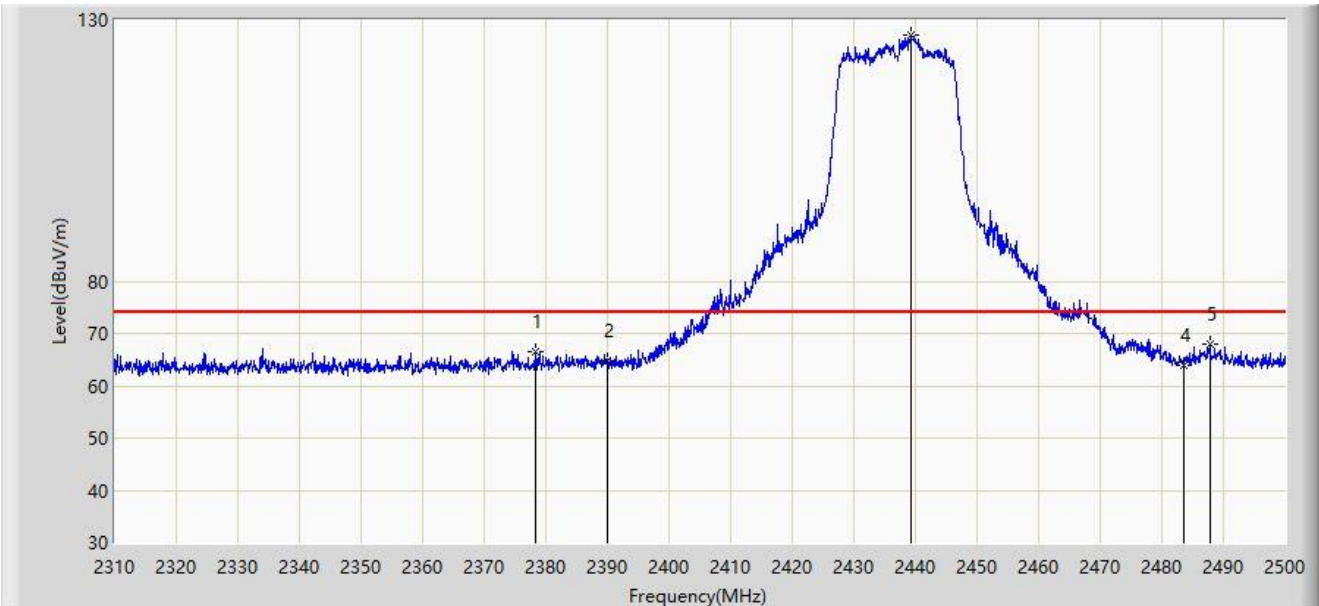


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2378.400	66.567	35.384	-7.433	74.000	31.183	PK
2		2390.000	64.878	33.720	-9.122	74.000	31.158	PK
3		2439.200	127.079	96.007	N/A	N/A	31.072	PK
4		2483.500	64.016	32.923	-9.984	74.000	31.093	PK
5	*	2487.745	68.087	36.991	-5.913	74.000	31.096	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-25
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

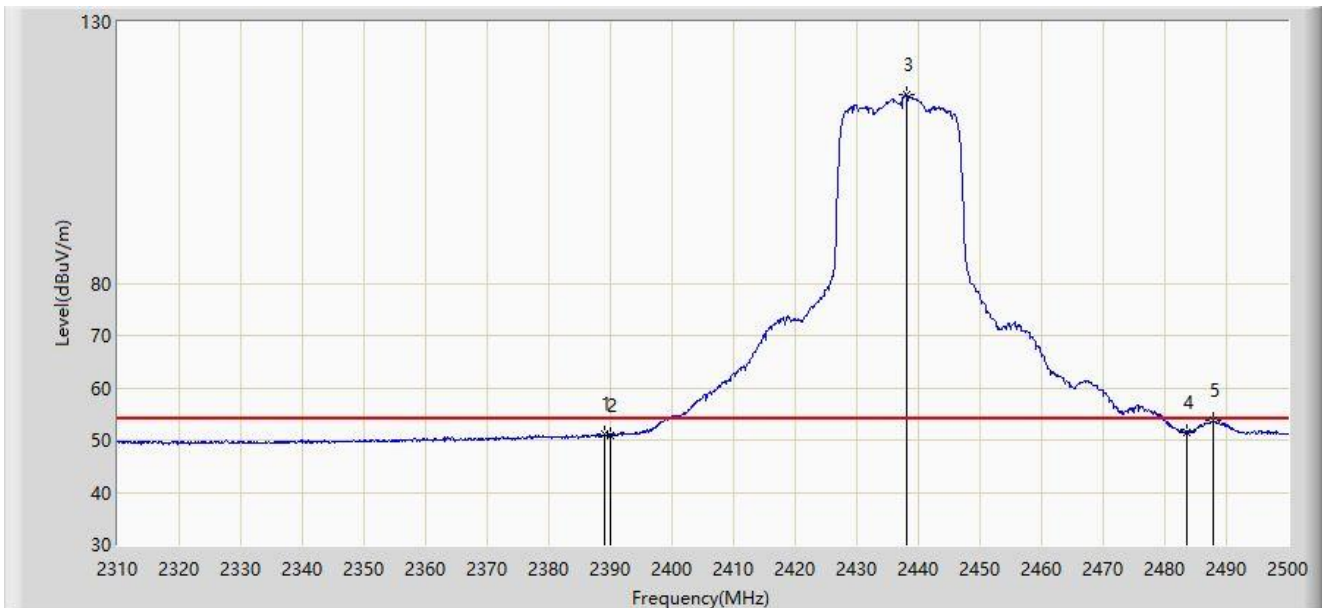


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2388.945	51.168	20.009	-2.832	54.000	31.159	AV
2		2390.000	50.954	19.796	-3.046	54.000	31.158	AV
3		2438.155	116.020	84.949	N/A	N/A	31.071	AV
4		2483.500	51.581	20.488	-2.419	54.000	31.093	AV
5	*	2487.840	53.684	22.588	-0.316	54.000	31.096	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2447MHz	

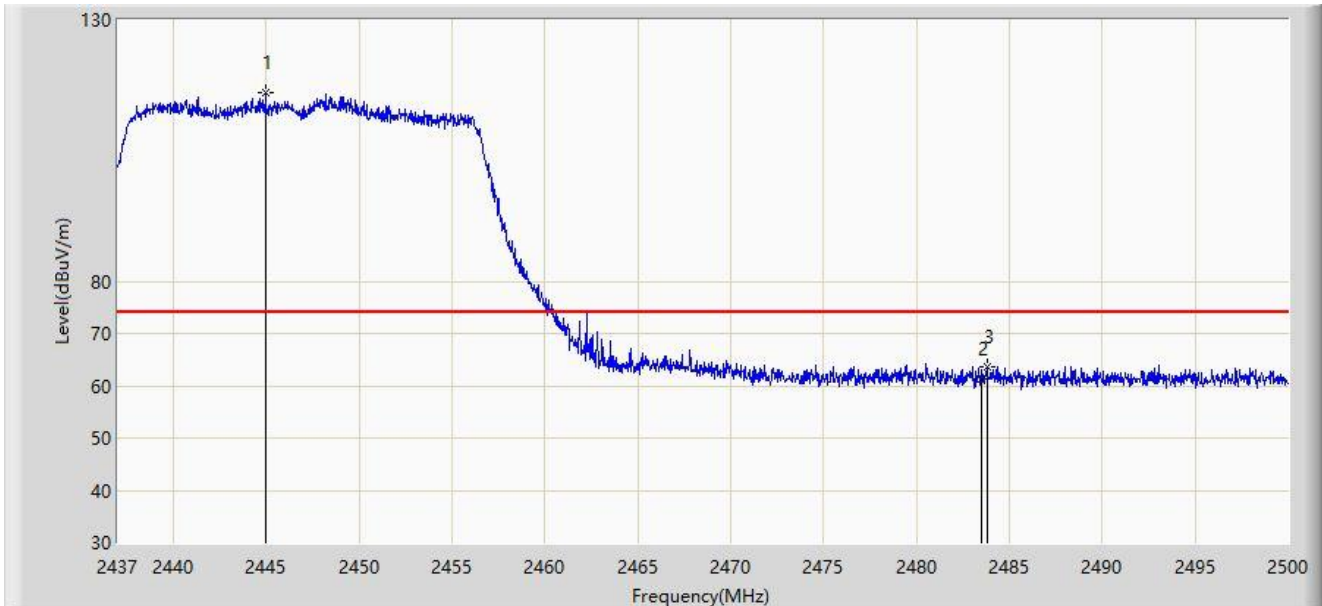


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2444.969	116.127	85.048	N/A	N/A	31.079	PK
2		2483.500	61.192	30.099	-12.808	74.000	31.093	PK
3	*	2483.778	63.625	32.532	-10.375	74.000	31.093	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2447MHz	

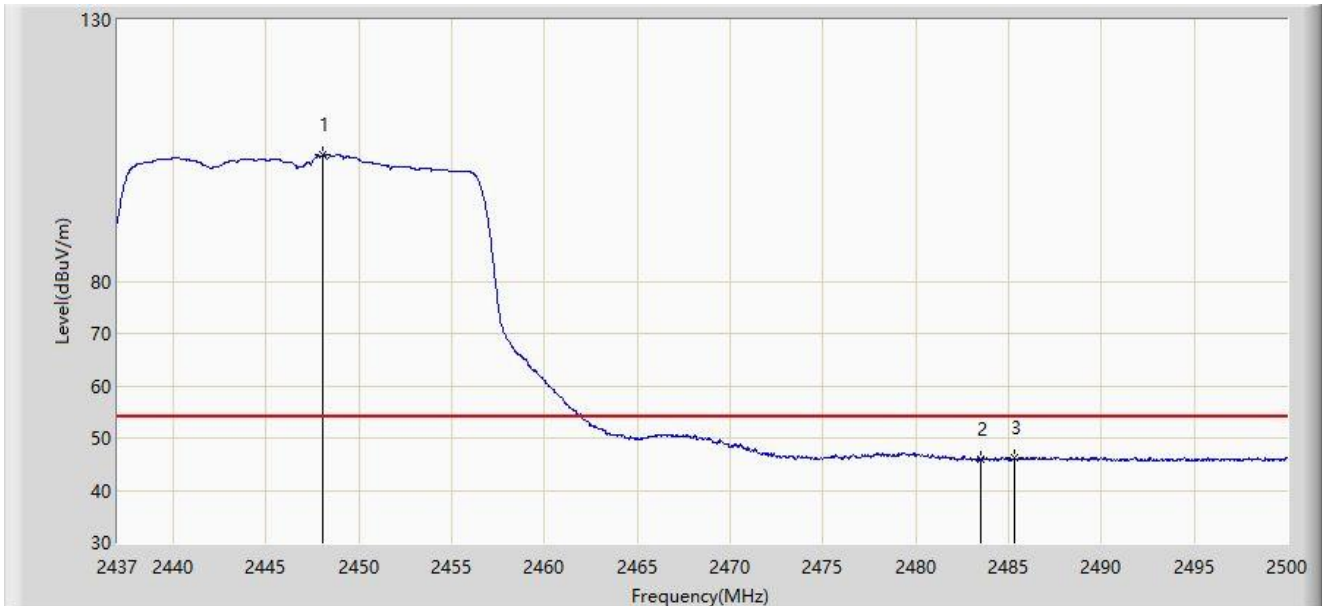


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2448.056	104.076	72.993	N/A	N/A	31.083	AV
2		2483.500	45.800	14.707	-8.200	54.000	31.093	AV
3	*	2485.321	46.291	15.197	-7.709	54.000	31.095	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2447MHz	

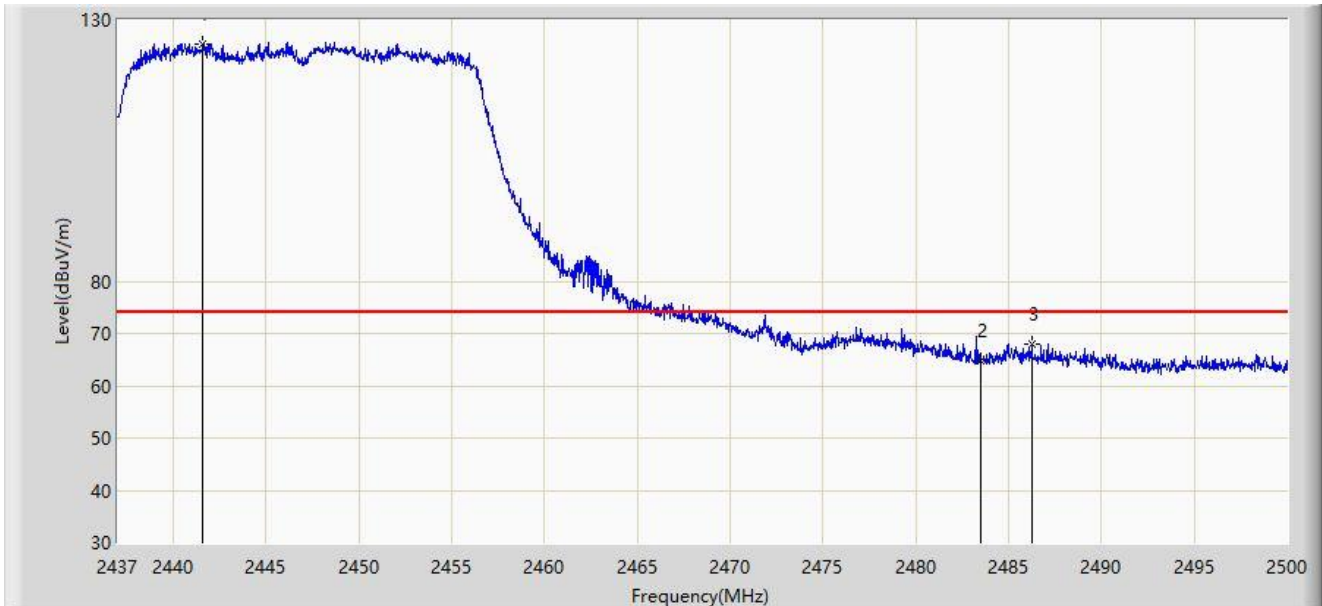


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2441.599	125.505	94.430	N/A	N/A	31.075	PK
2		2483.500	64.883	33.790	-9.117	74.000	31.093	PK
3	*	2486.266	68.082	36.987	-5.918	74.000	31.095	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2447MHz	

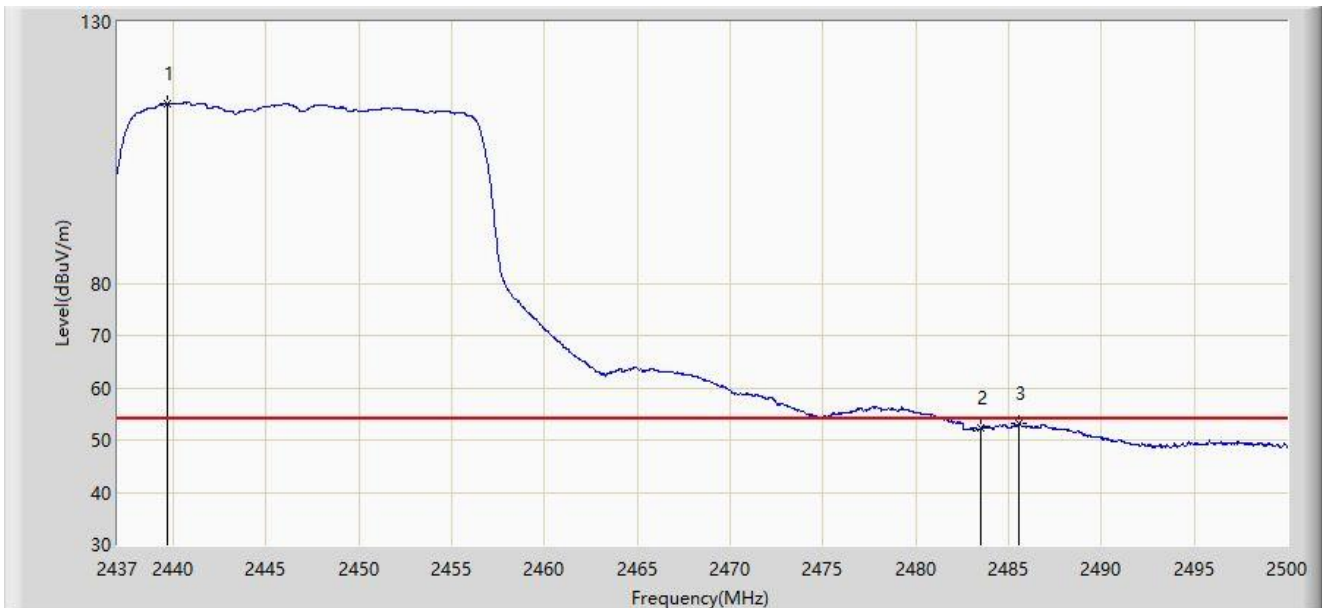


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2439.677	114.331	83.258	N/A	N/A	31.073	AV
2		2483.500	52.176	21.083	-1.824	54.000	31.093	AV
3	*	2485.573	53.215	22.120	-0.785	54.000	31.095	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

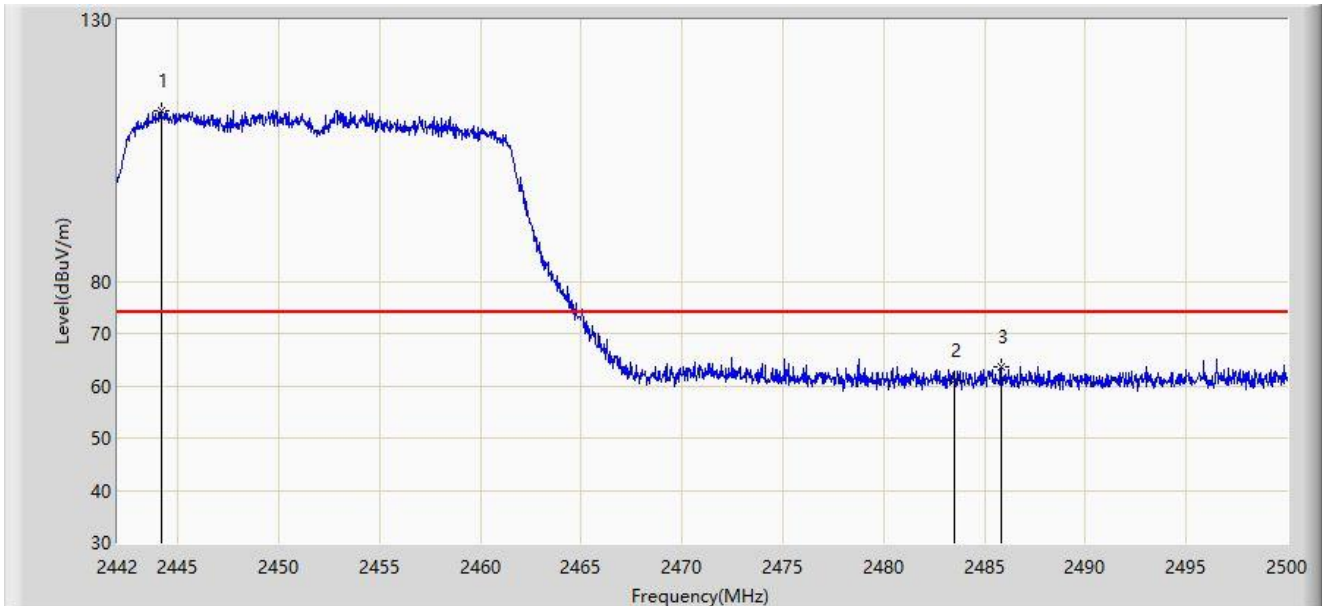


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2444.146	112.481	81.403	N/A	N/A	31.078	PK
2		2483.500	60.900	29.807	-13.100	74.000	31.093	PK
3	*	2485.819	63.699	32.604	-10.301	74.000	31.095	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

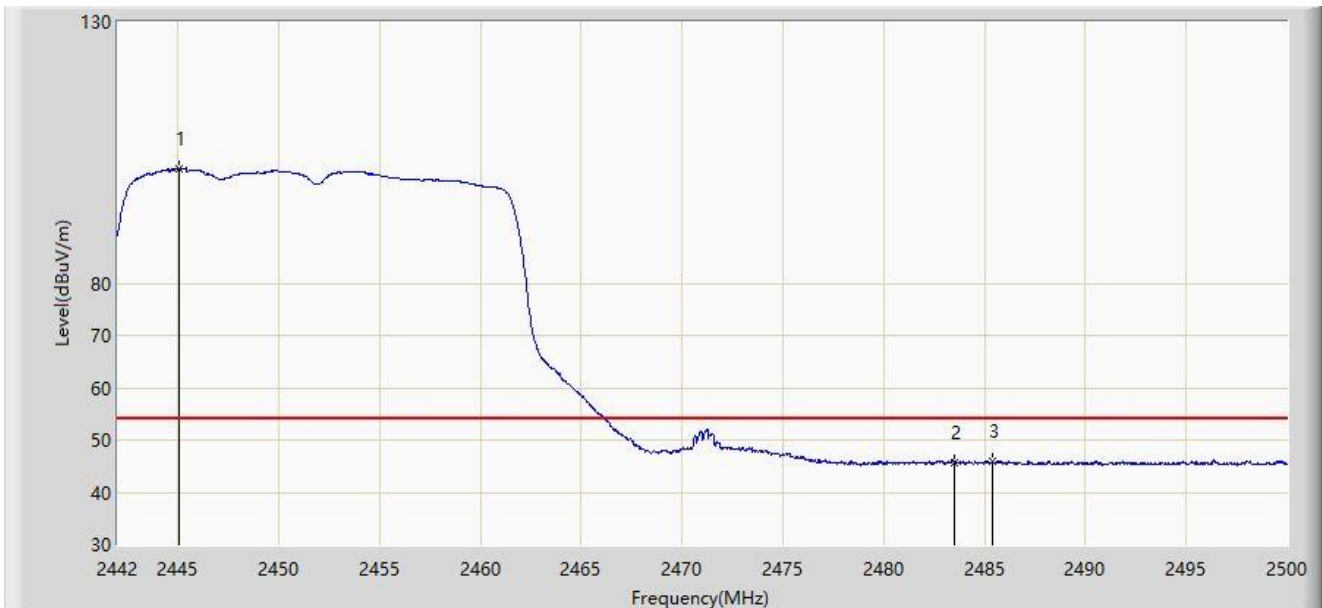


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2445.074	101.912	70.833	N/A	N/A	31.079	AV
2		2483.500	45.735	14.642	-8.265	54.000	31.093	AV
3	*	2485.384	46.067	14.973	-7.933	54.000	31.095	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

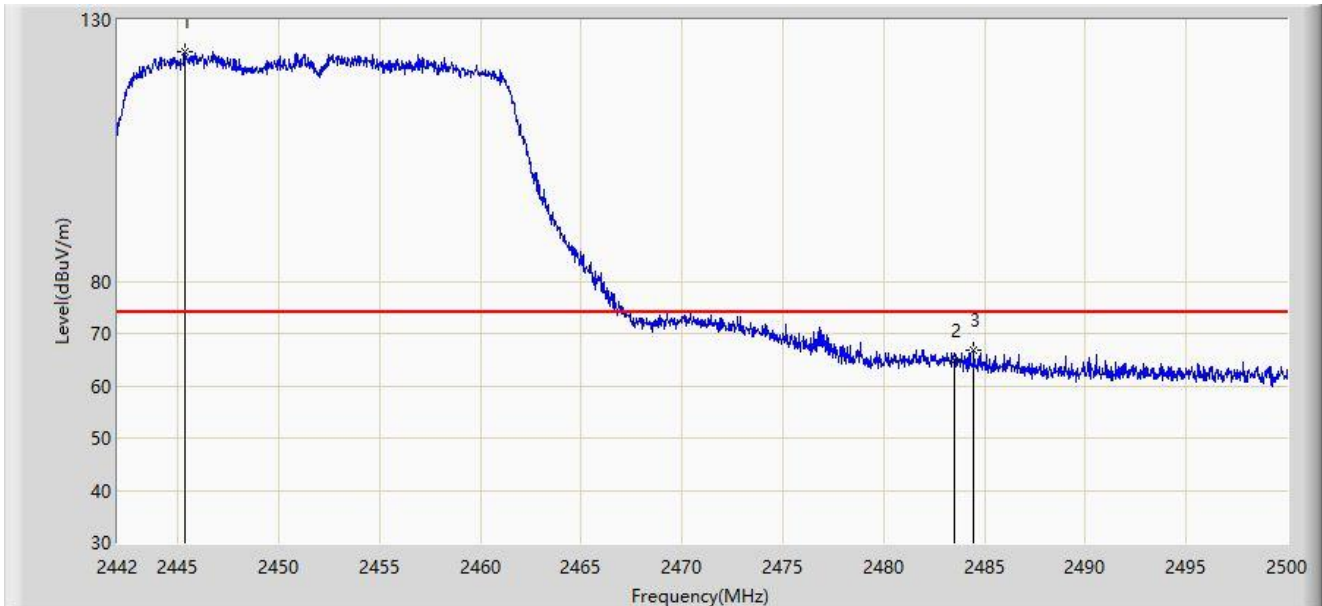


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2445.335	123.918	92.839	N/A	N/A	31.080	PK
2		2483.500	64.909	33.816	-9.091	74.000	31.093	PK
3	*	2484.456	66.728	35.634	-7.272	74.000	31.094	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

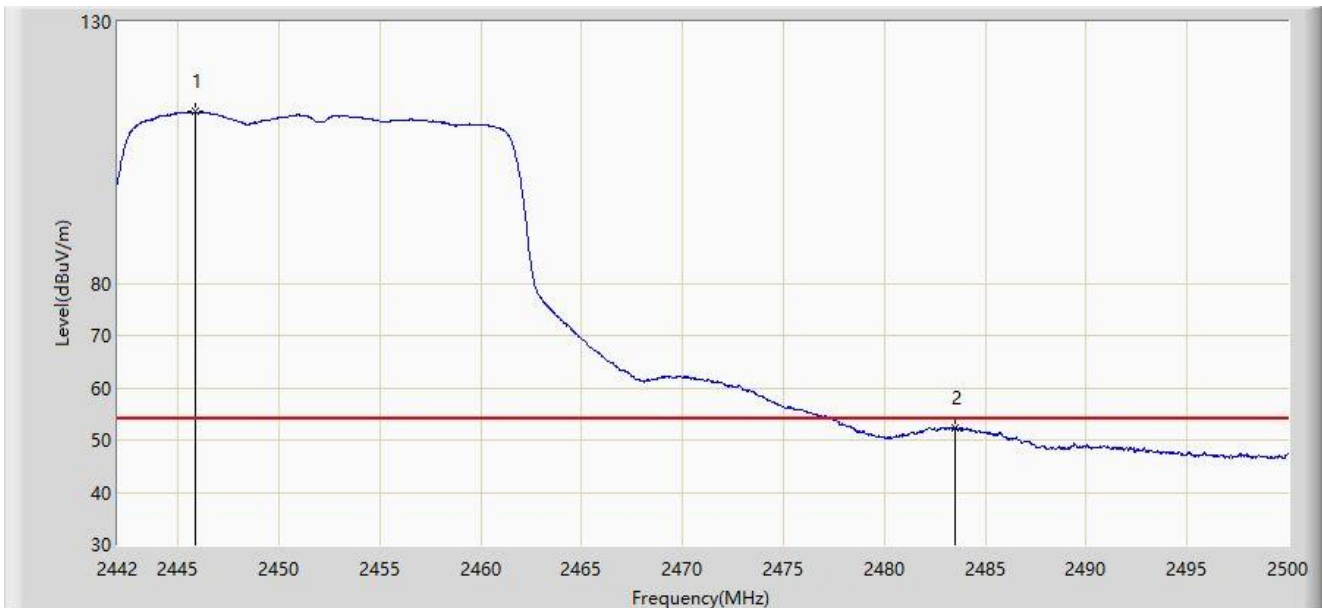


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2445.828	112.766	81.686	N/A	N/A	31.080	AV
2	*	2483.500	52.258	21.165	-1.742	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

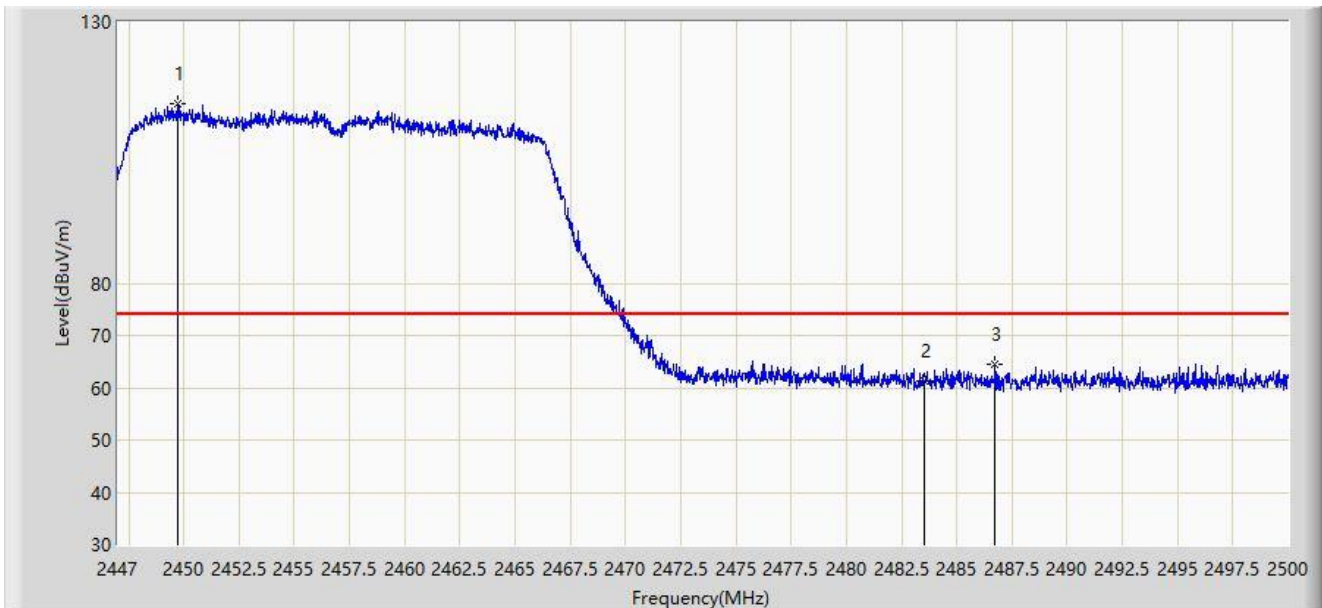


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.703	114.220	83.135	N/A	N/A	31.086	PK
2		2483.500	61.199	30.106	-12.801	74.000	31.093	PK
3	*	2486.723	64.429	33.334	-9.571	74.000	31.096	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

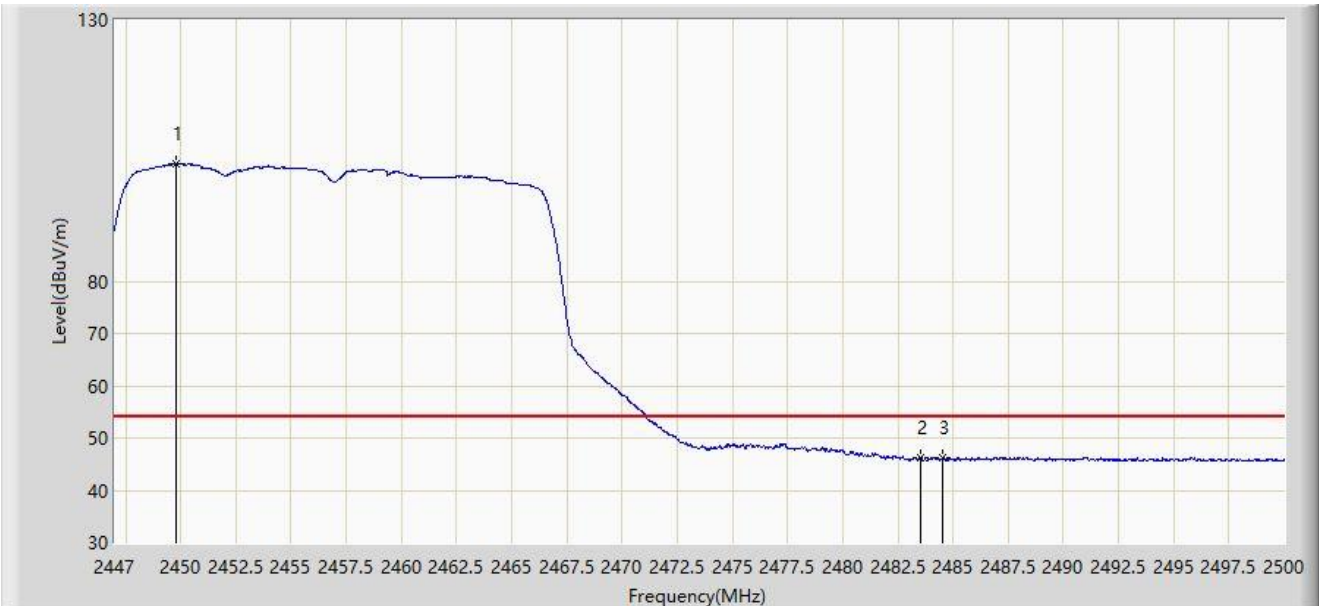


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.809	102.548	71.463	N/A	N/A	31.085	AV
2		2483.500	46.121	15.028	-7.879	54.000	31.093	AV
3	*	2484.524	46.343	15.249	-7.657	54.000	31.094	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

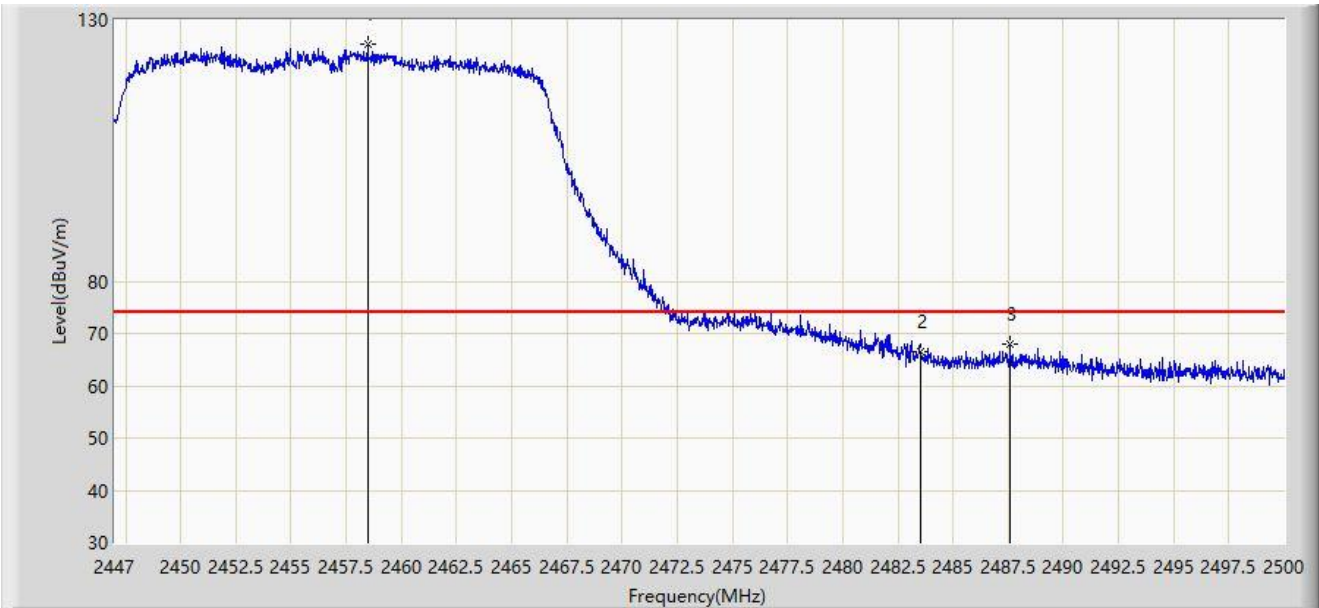


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.475	125.269	94.177	N/A	N/A	31.092	PK
2		2483.500	66.666	35.573	-7.334	74.000	31.093	PK
3	*	2487.598	67.876	36.780	-6.124	74.000	31.096	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

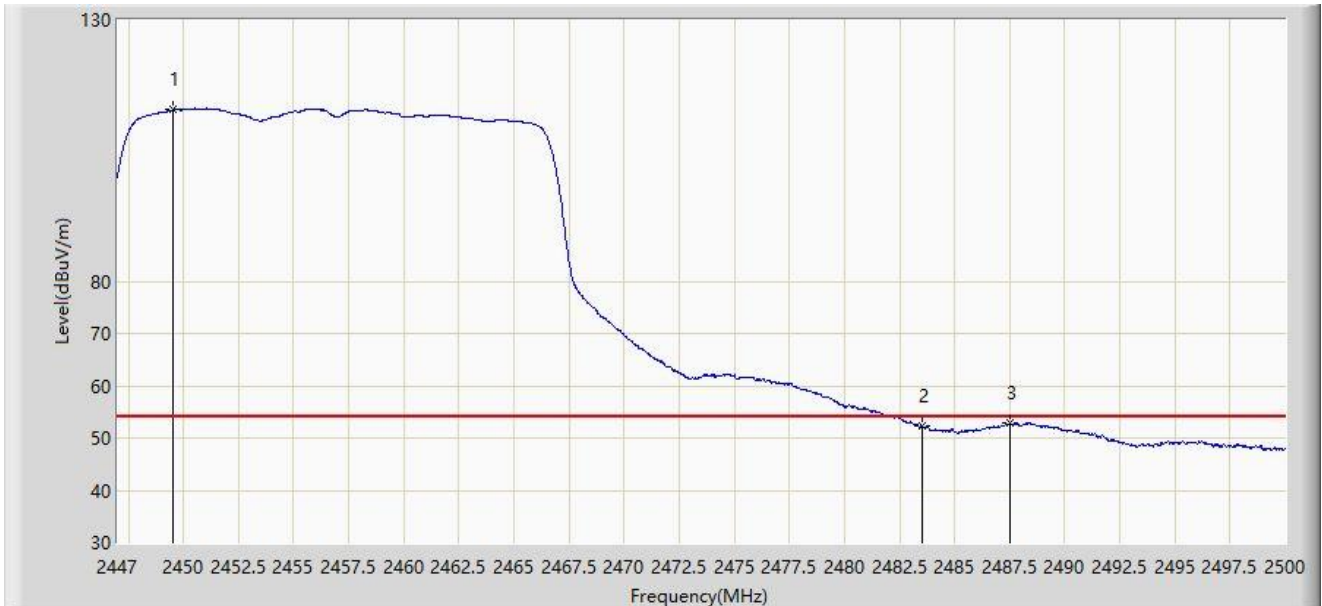


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.518	112.791	81.706	N/A	N/A	31.085	AV
2		2483.500	52.259	21.166	-1.741	54.000	31.093	AV
3	*	2487.492	52.843	21.747	-1.157	54.000	31.096	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-19
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

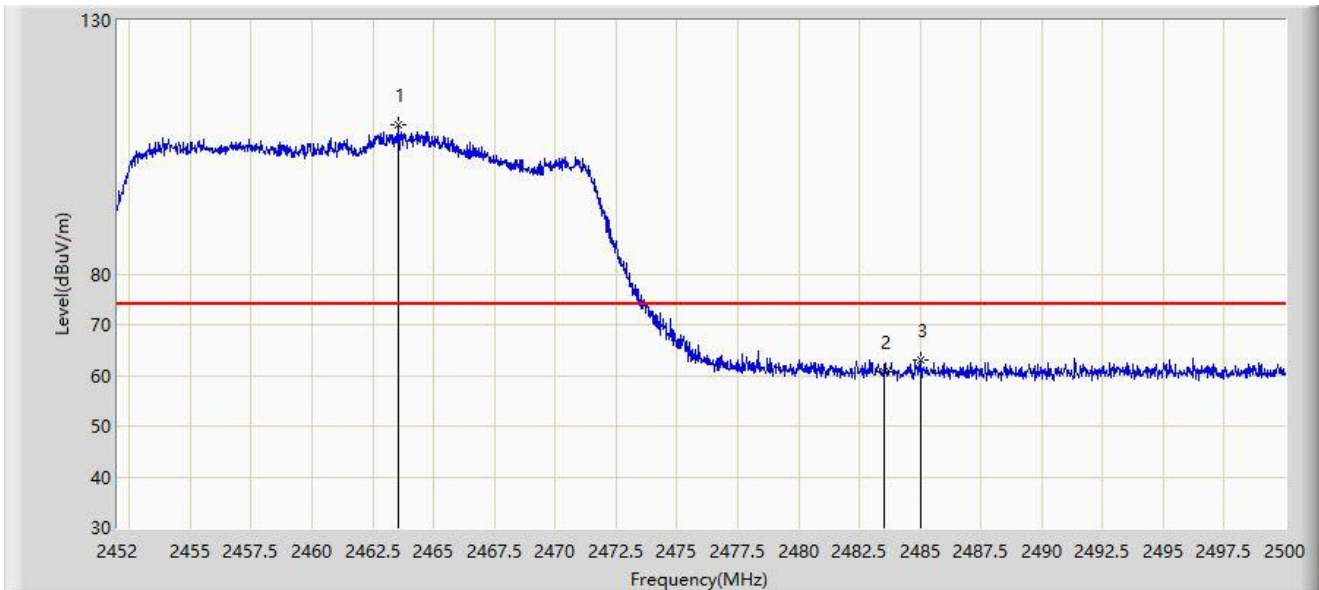


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.568	109.462	78.373	N/A	N/A	31.088	PK
2		2483.500	60.659	29.566	-13.341	74.000	31.093	PK
3	*	2485.048	63.092	31.998	-10.908	74.000	31.094	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-19
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

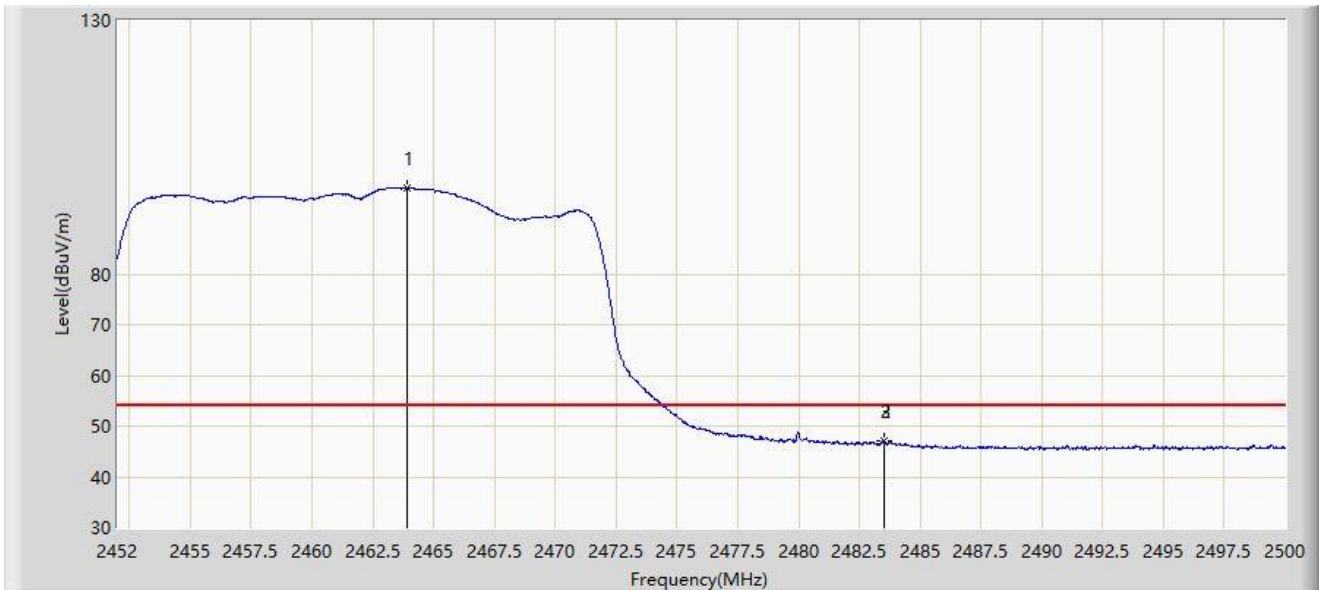


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.904	96.935	65.846	N/A	N/A	31.088	AV
2		2483.500	47.203	16.110	-6.797	54.000	31.093	AV
3	*	2483.512	47.217	16.124	-6.783	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-19
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

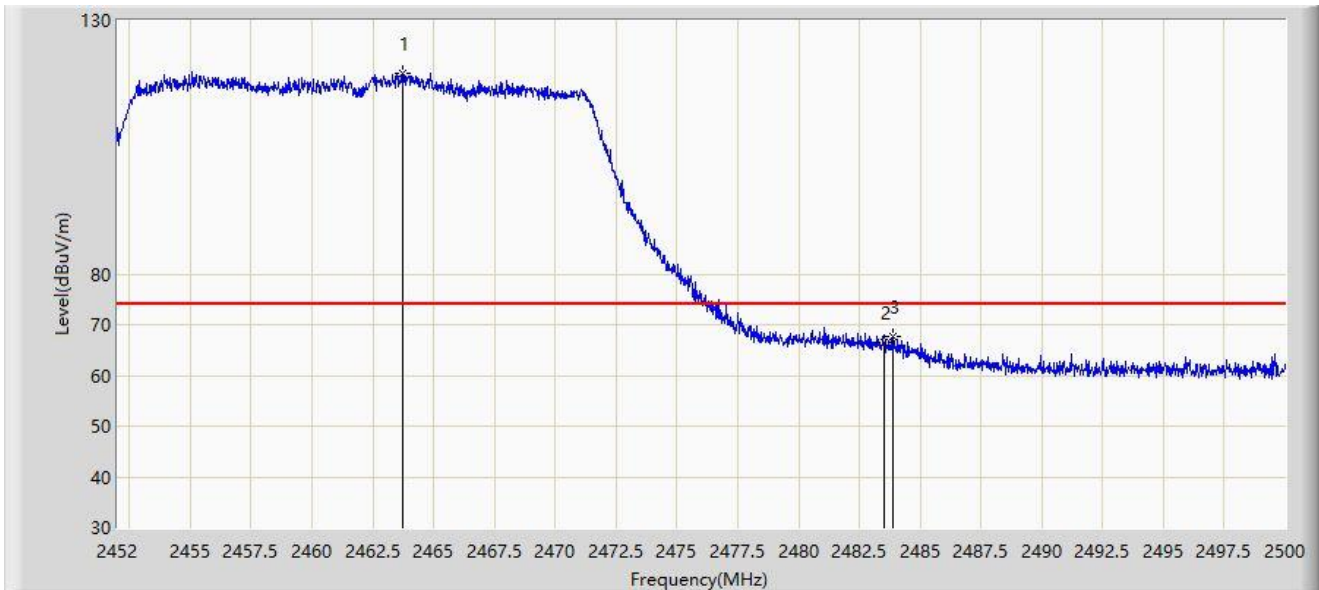


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.736	119.602	88.513	N/A	N/A	31.088	PK
2		2483.500	66.501	35.408	-7.499	74.000	31.093	PK
3	*	2483.872	67.652	36.559	-6.348	74.000	31.093	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-19
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

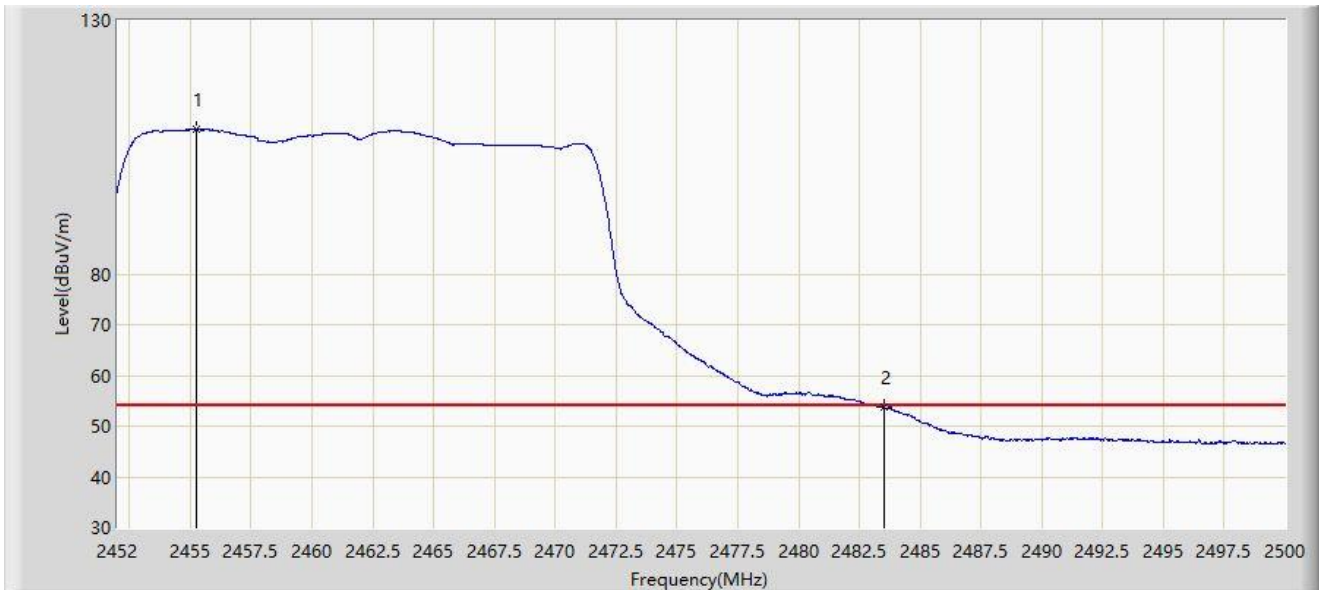


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.264	108.497	77.404	N/A	N/A	31.093	AV
2	*	2483.500	53.819	22.726	-0.181	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

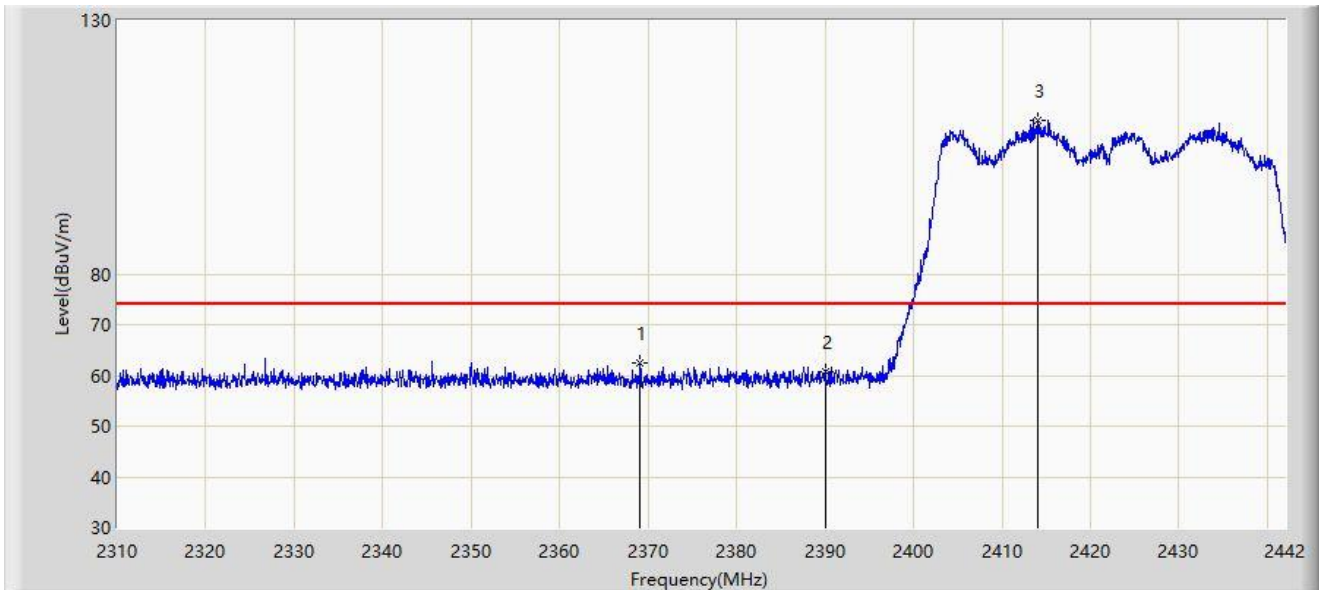


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2369.070	62.450	31.227	-11.550	74.000	31.223	PK
2		2390.000	60.700	29.542	-13.300	74.000	31.158	PK
3		2414.082	110.345	79.214	N/A	N/A	31.131	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

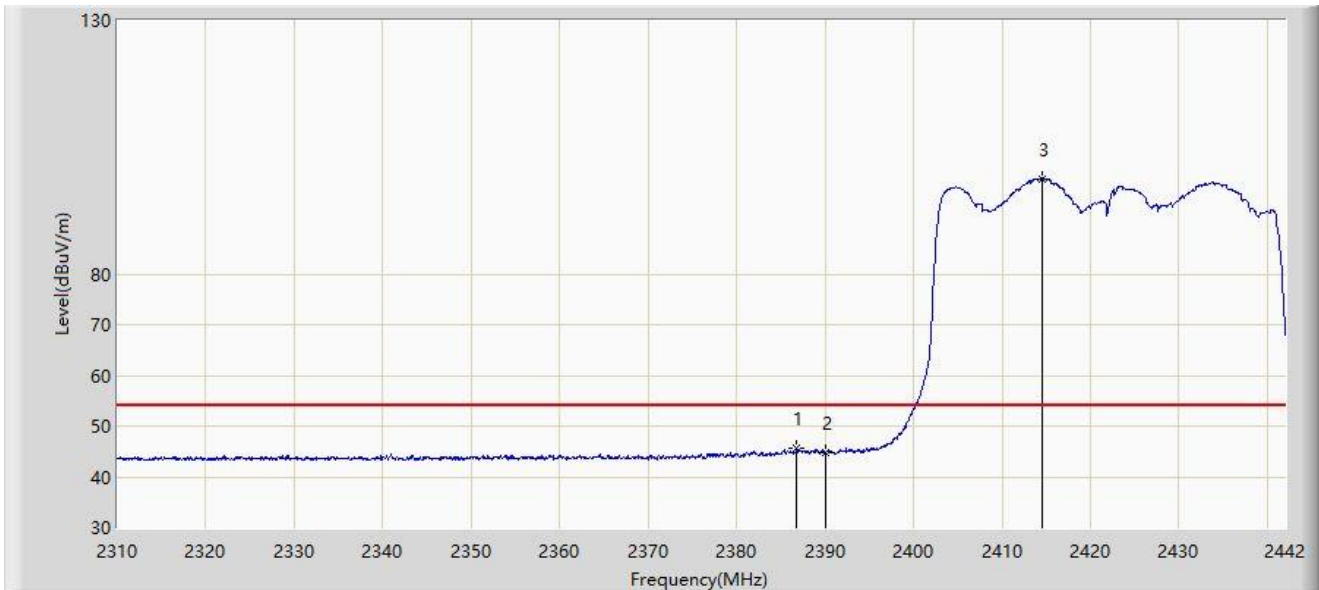


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.758	45.734	14.574	-8.266	54.000	31.160	AV
2		2390.000	44.778	13.620	-9.222	54.000	31.158	AV
3		2414.478	98.793	67.662	N/A	N/A	31.130	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

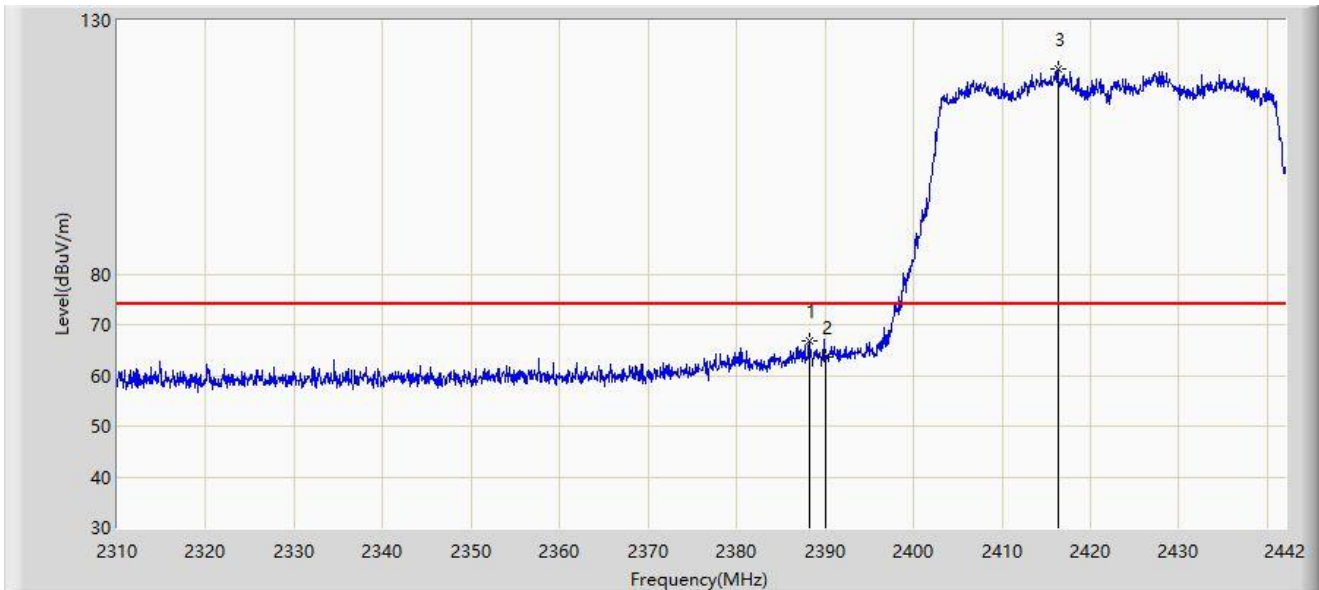


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.210	66.779	35.620	-7.221	74.000	31.159	PK
2		2390.000	63.687	32.529	-10.313	74.000	31.158	PK
3		2416.326	120.468	89.339	N/A	N/A	31.129	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

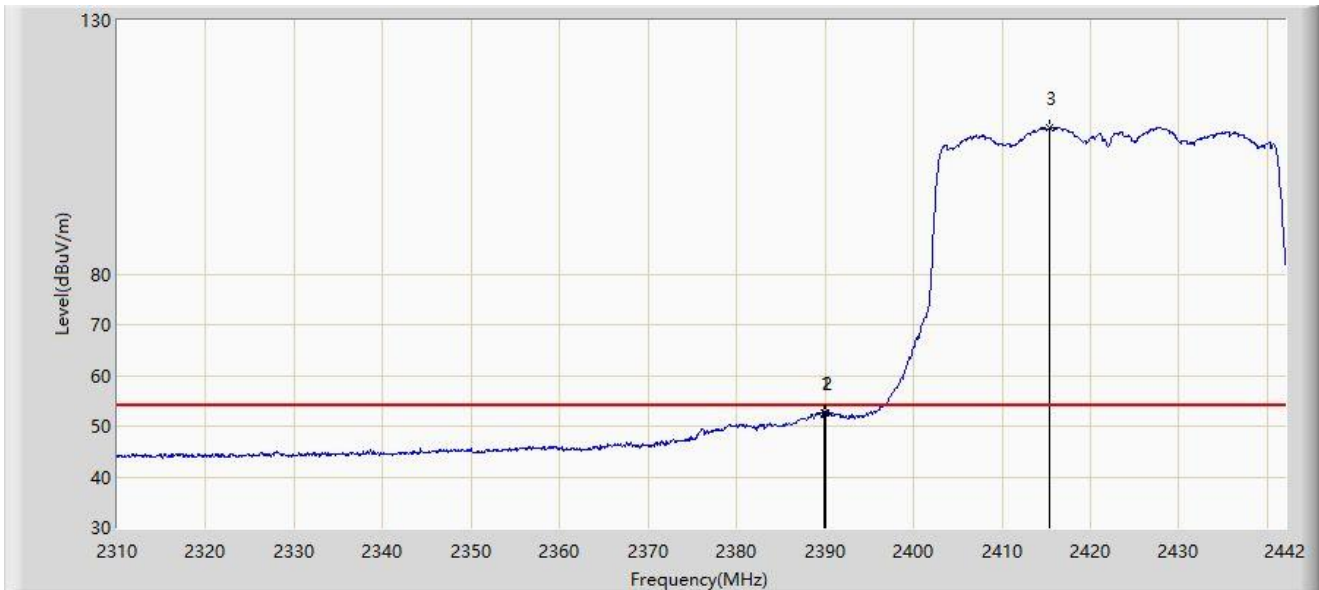


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.860	52.691	21.533	-1.309	54.000	31.158	AV
2		2390.000	52.634	21.476	-1.366	54.000	31.158	AV
3		2415.336	108.741	77.611	N/A	N/A	31.130	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-25
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

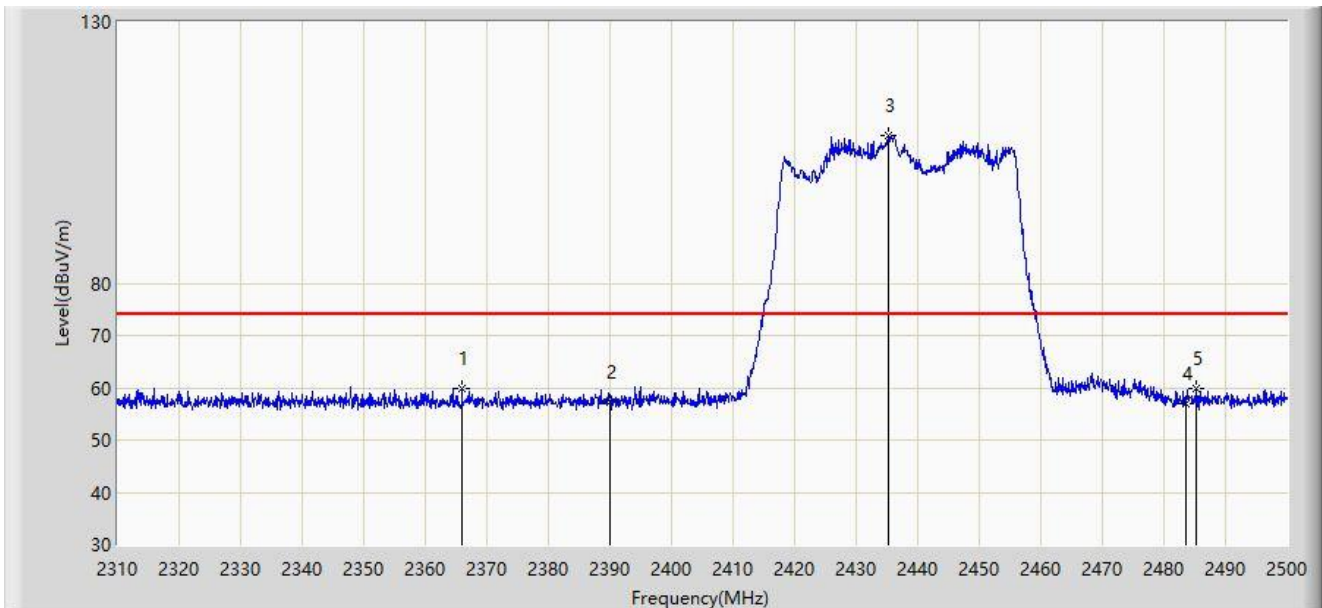


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2365.955	59.720	28.483	-14.280	74.000	31.237	PK
2		2390.000	57.141	25.983	-16.859	74.000	31.158	PK
3		2435.210	108.257	77.179	N/A	N/A	31.079	PK
4		2483.500	56.876	25.783	-17.124	74.000	31.093	PK
5	*	2485.275	59.774	28.680	-14.226	74.000	31.095	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-25
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.1ax-HE40 at 2437MHz	

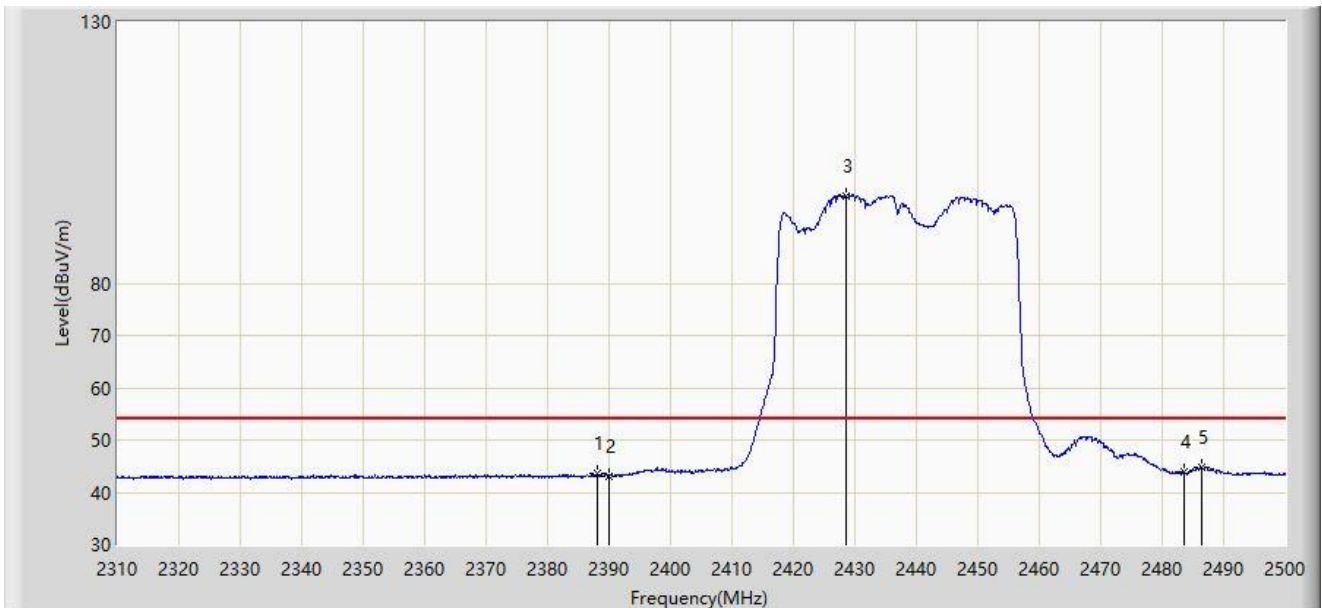


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2388.090	43.529	12.370	-10.471	54.000	31.160	AV
2		2390.000	43.138	11.980	-10.862	54.000	31.158	AV
3		2428.655	96.807	65.711	N/A	N/A	31.096	AV
4		2483.500	43.901	12.808	-10.099	54.000	31.093	AV
5	*	2486.320	44.824	13.729	-9.176	54.000	31.095	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-25
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.1ax-HE40 at 2437MHz	

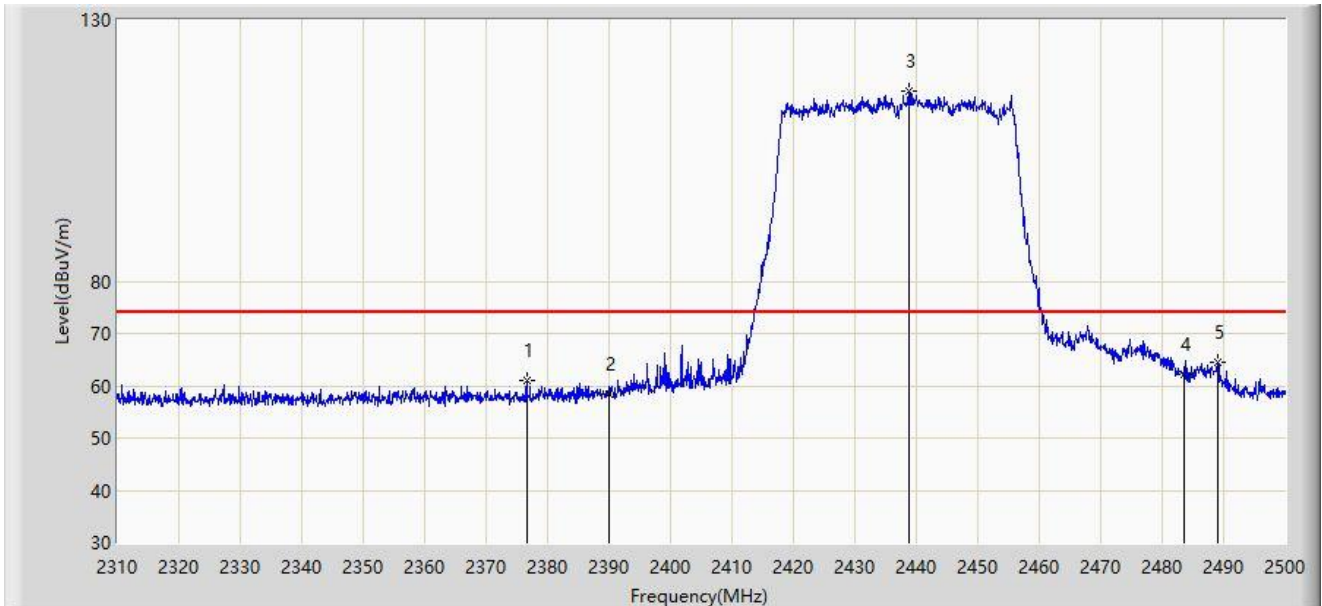


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2376.595	61.090	29.900	-12.910	74.000	31.190	PK
2		2390.000	58.510	27.352	-15.490	74.000	31.158	PK
3		2438.725	116.288	85.216	N/A	N/A	31.071	PK
4		2483.500	62.035	30.942	-11.965	74.000	31.093	PK
5	*	2489.075	64.487	33.389	-9.513	74.000	31.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-25
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.1ax-HE40 at 2437MHz	

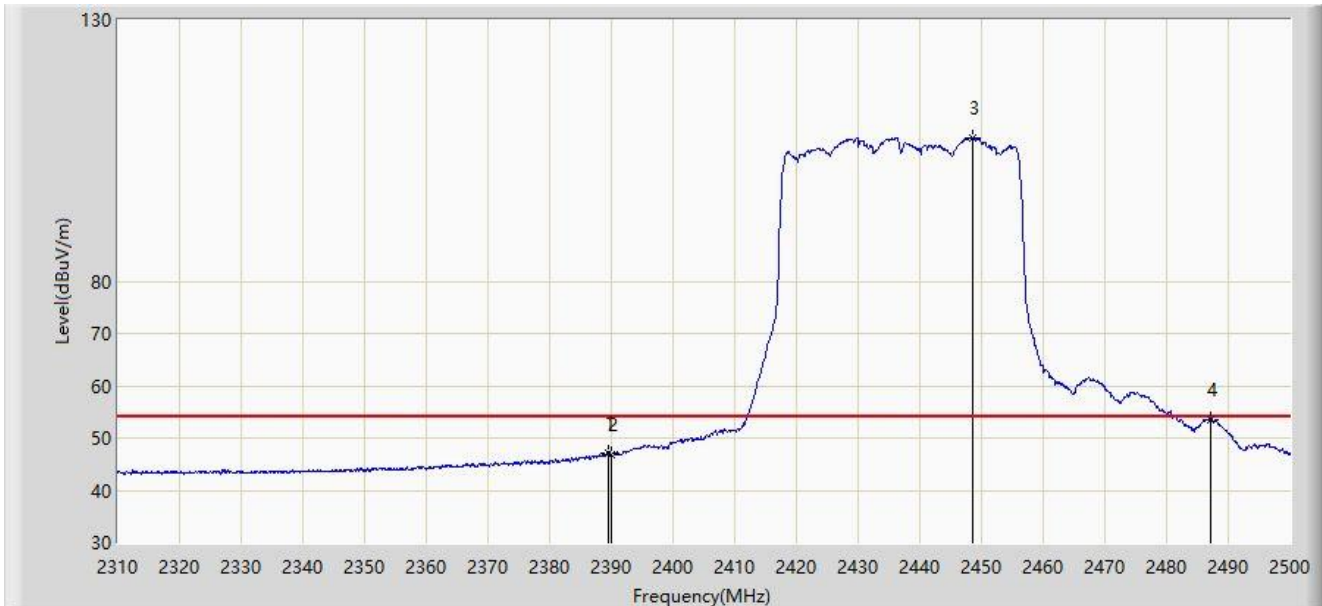


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.515	47.231	16.073	-6.769	54.000	31.158	AV
2		2390.000	46.875	15.717	-7.125	54.000	31.158	AV
3		2448.510	107.508	76.424	N/A	N/A	31.084	AV
4	*	2487.175	53.580	22.484	-0.420	54.000	31.096	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

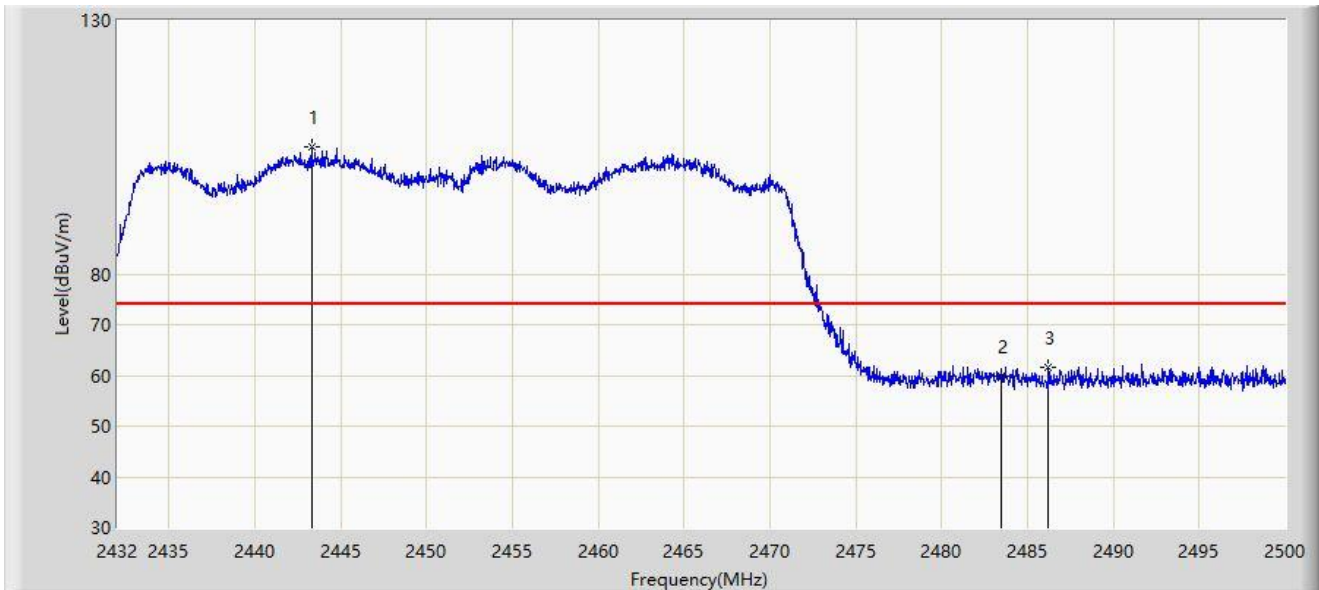


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2443.322	105.180	74.103	N/A	N/A	31.077	PK
2		2483.500	59.796	28.703	-14.204	74.000	31.093	PK
3	*	2486.230	61.665	30.570	-12.335	74.000	31.095	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

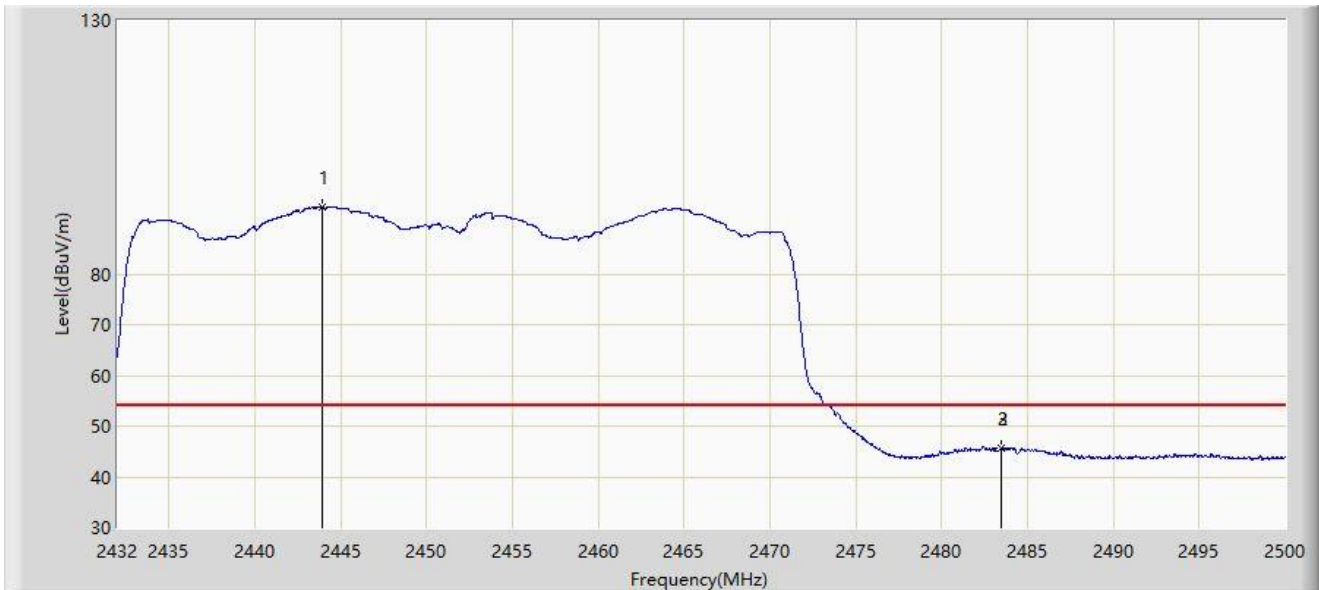


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2443.900	93.220	62.142	N/A	N/A	31.077	AV
2		2483.500	45.709	14.616	-8.291	54.000	31.093	AV
3	*	2483.510	45.757	14.664	-8.243	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

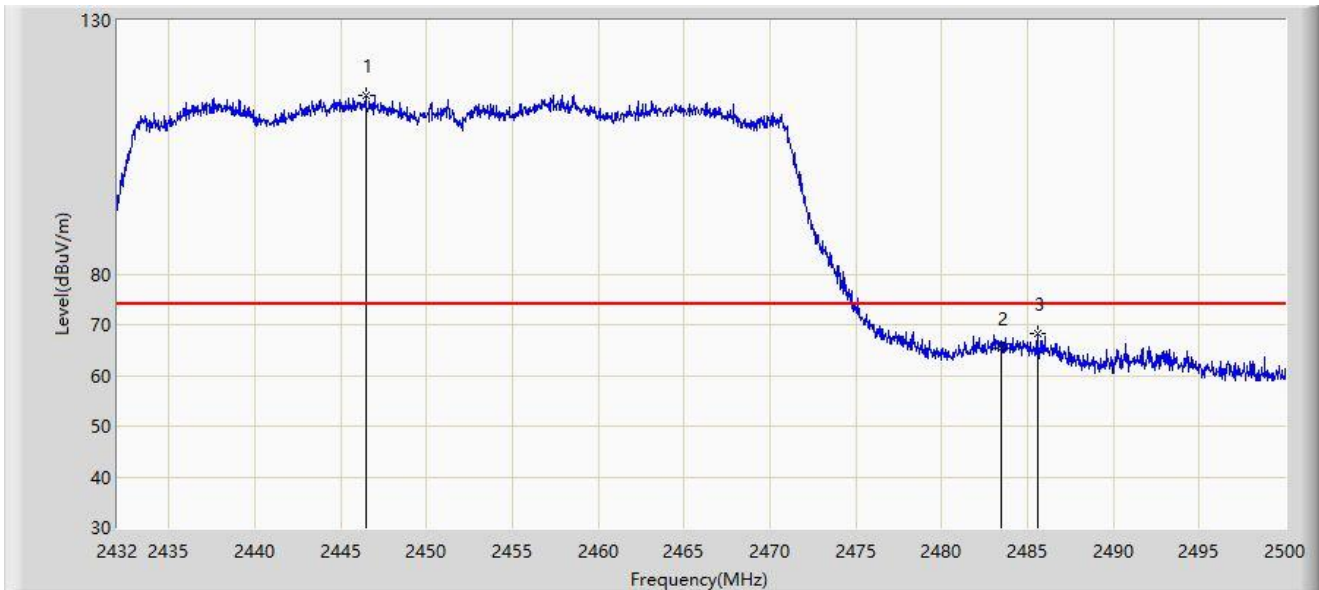


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2446.450	115.212	84.131	N/A	N/A	31.081	PK
2		2483.500	65.219	34.126	-8.781	74.000	31.093	PK
3	*	2485.584	68.139	37.044	-5.861	74.000	31.095	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-20
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

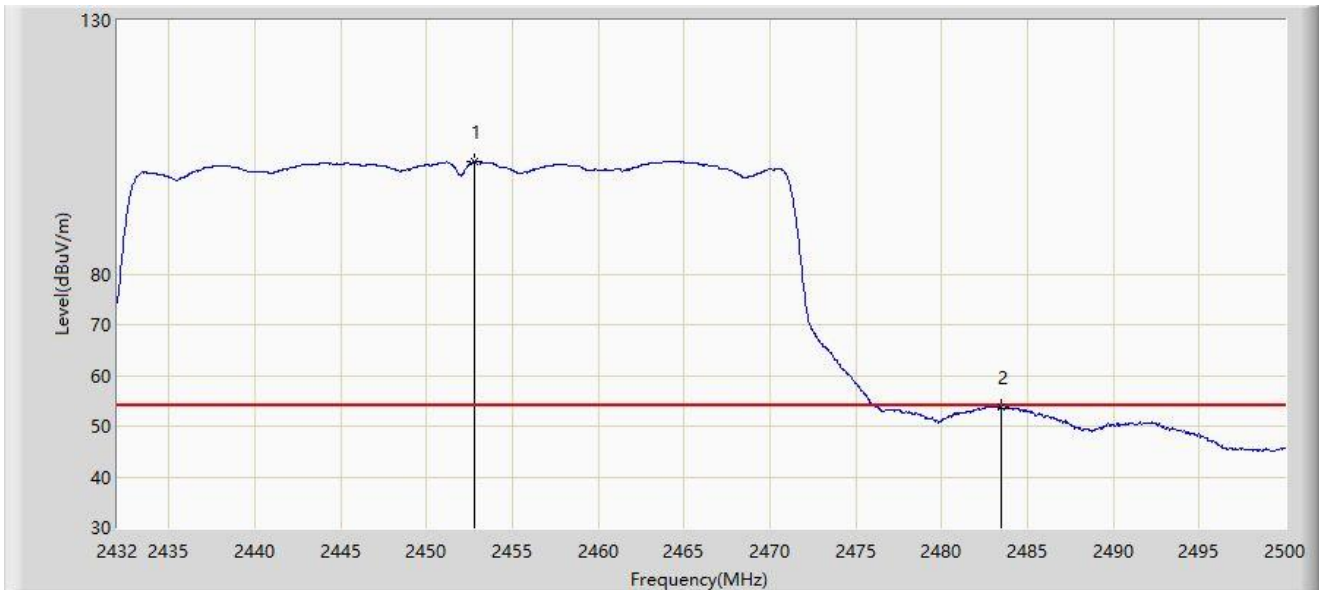

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2452.808	102.299	71.209	N/A	N/A	31.090	AV
2	*	2483.500	53.649	22.556	-0.351	54.000	31.093	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Antenna 2#:

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

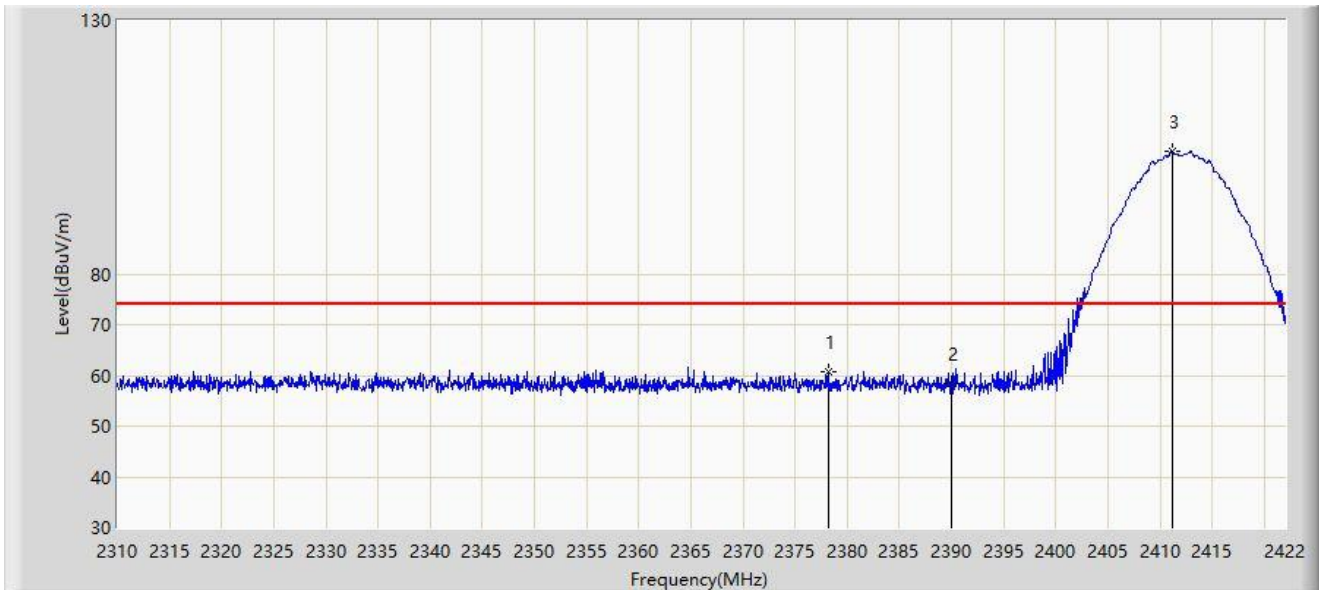


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2378.152	60.736	29.552	-13.264	74.000	31.185	PK
2		2390.000	58.270	27.112	-15.730	74.000	31.158	PK
3		2411.136	104.109	72.975	N/A	N/A	31.135	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

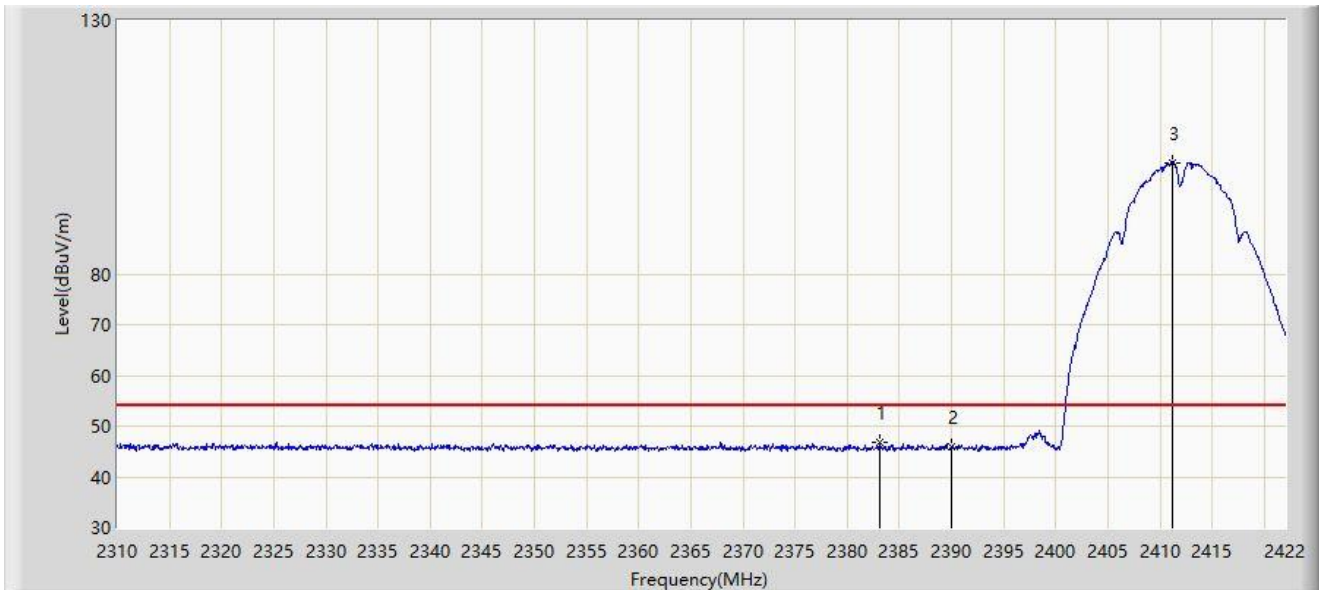


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2383.136	46.947	15.782	-7.053	54.000	31.166	AV
2		2390.000	45.819	14.661	-8.181	54.000	31.158	AV
3		2411.136	101.954	70.820	N/A	N/A	31.135	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

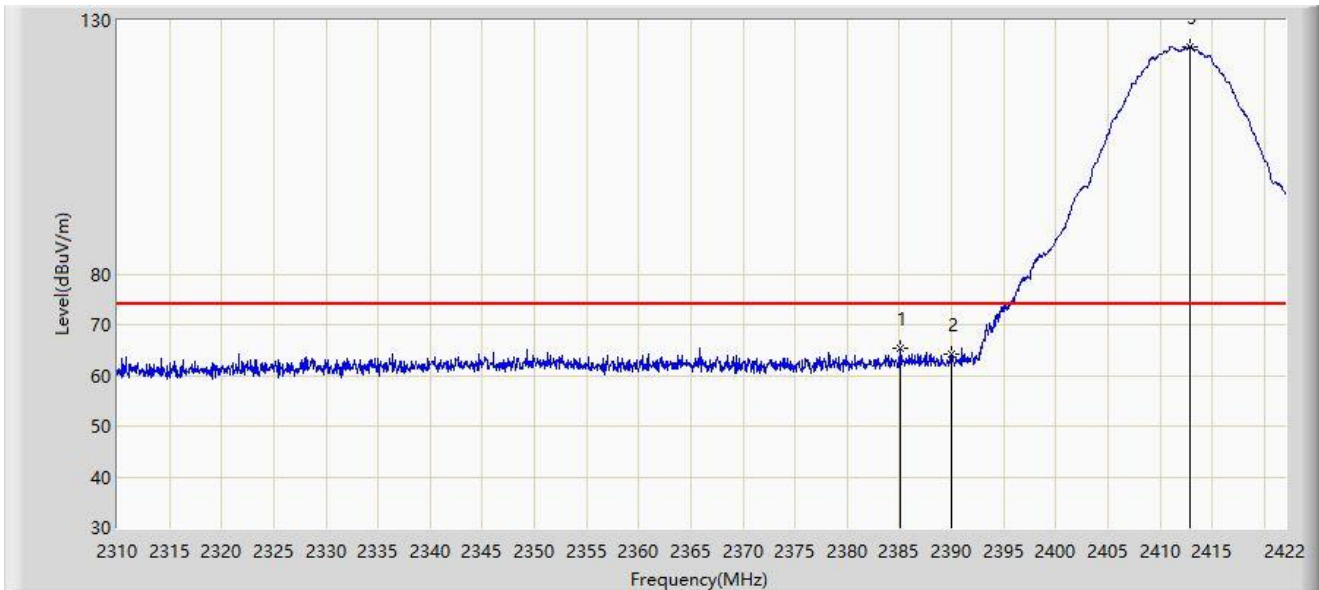


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2385.152	65.229	34.068	-8.771	74.000	31.162	PK
2		2390.000	64.149	32.991	-9.851	74.000	31.158	PK
3		2412.872	124.922	93.790	N/A	N/A	31.132	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

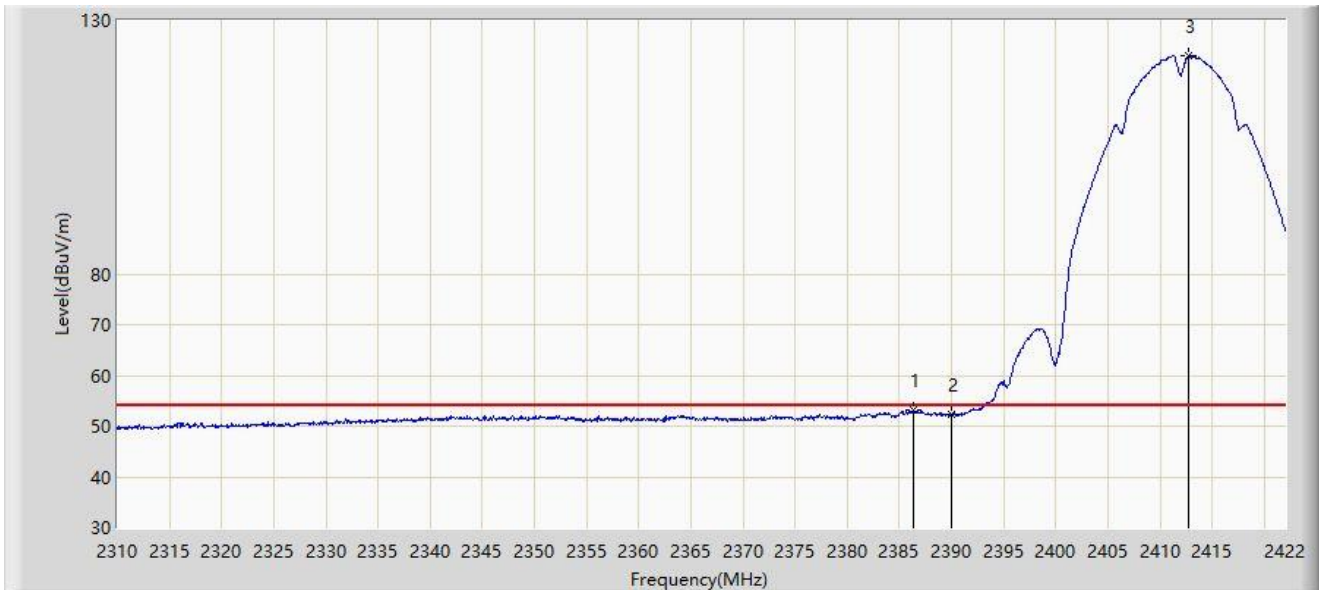


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.328	53.082	21.922	-0.918	54.000	31.160	AV
2		2390.000	52.259	21.101	-1.741	54.000	31.158	AV
3		2412.760	123.169	92.036	N/A	N/A	31.133	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

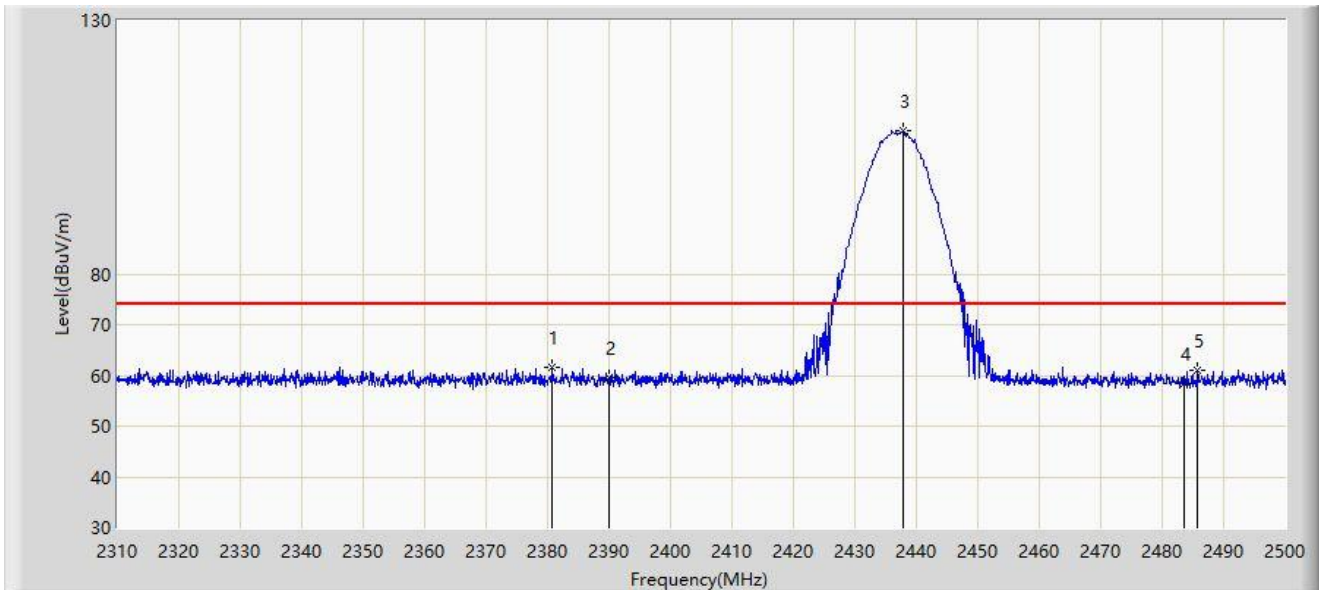


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2380.775	61.569	30.395	-12.431	74.000	31.175	PK
2		2390.000	59.443	28.285	-14.557	74.000	31.158	PK
3		2437.870	108.397	77.326	N/A	N/A	31.071	PK
4		2483.500	58.439	27.346	-15.561	74.000	31.093	PK
5		2485.750	60.961	29.866	-13.039	74.000	31.095	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

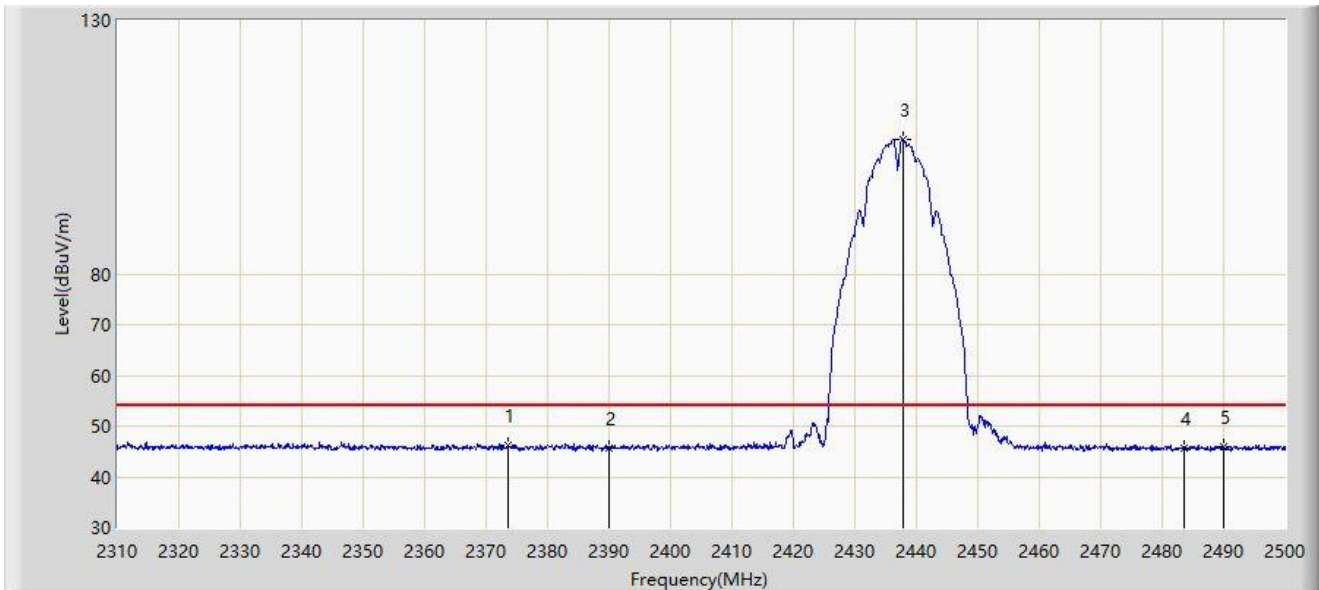


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2373.555	46.356	15.152	-7.644	54.000	31.204	AV
2		2390.000	45.729	14.571	-8.271	54.000	31.158	AV
3		2437.870	106.554	75.483	N/A	N/A	31.071	AV
4		2483.500	45.630	14.537	-8.370	54.000	31.093	AV
5		2490.025	46.024	14.926	-7.976	54.000	31.098	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

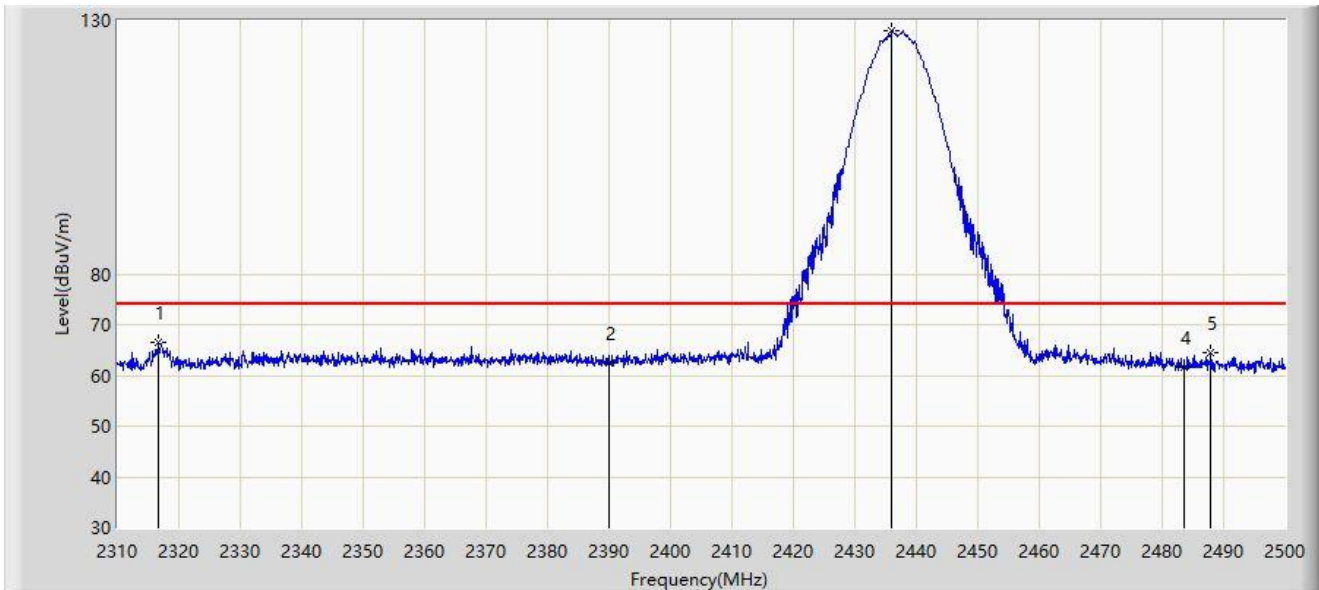


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2316.745	66.512	35.108	-7.488	74.000	31.403	PK
2		2390.000	62.397	31.239	-11.603	74.000	31.158	PK
3		2436.065	127.870	96.794	N/A	N/A	31.076	PK
4		2483.500	61.556	30.463	-12.444	74.000	31.093	PK
5		2487.935	64.517	33.420	-9.483	74.000	31.096	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

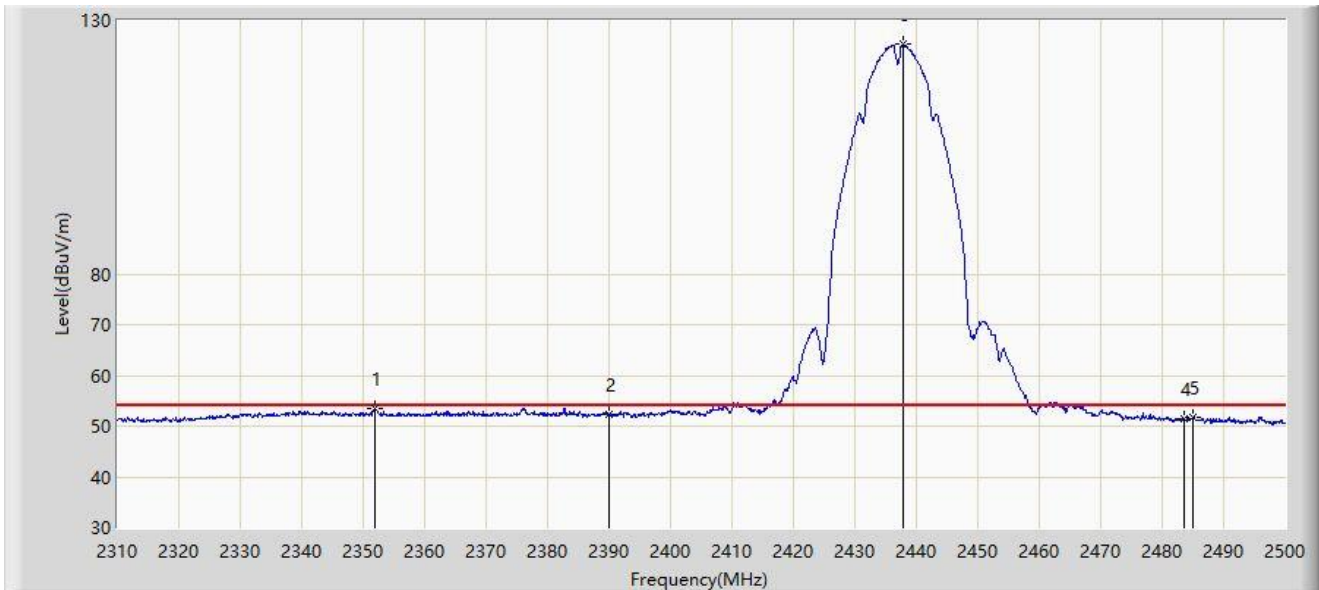


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2351.990	53.462	22.181	-0.538	54.000	31.281	AV
2		2390.000	52.214	21.056	-1.786	54.000	31.158	AV
3		2437.775	125.284	94.213	N/A	N/A	31.071	AV
4		2483.500	51.450	20.357	-2.550	54.000	31.093	AV
5		2485.085	51.877	20.783	-2.123	54.000	31.094	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

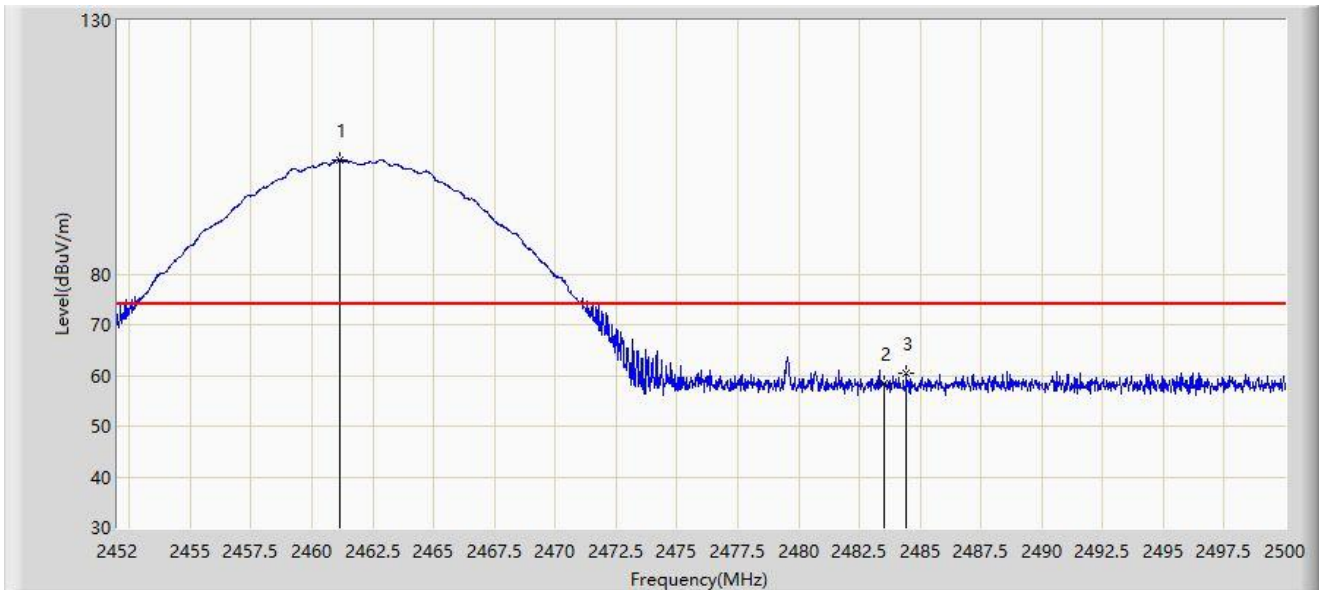


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.168	102.547	71.457	N/A	N/A	31.090	PK
2		2483.500	58.385	27.292	-15.615	74.000	31.093	PK
3	*	2484.448	60.437	29.343	-13.563	74.000	31.094	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

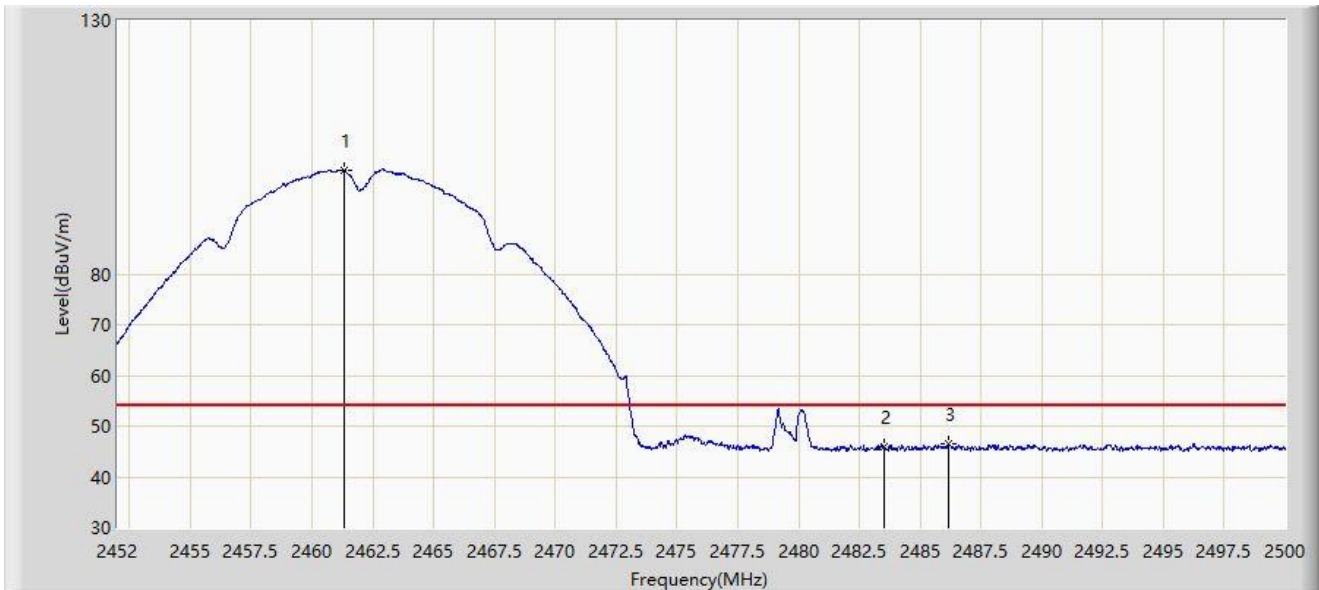


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.312	100.558	69.468	N/A	N/A	31.090	AV
2		2483.500	45.936	14.843	-8.064	54.000	31.093	AV
3	*	2486.176	46.476	15.381	-7.524	54.000	31.095	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

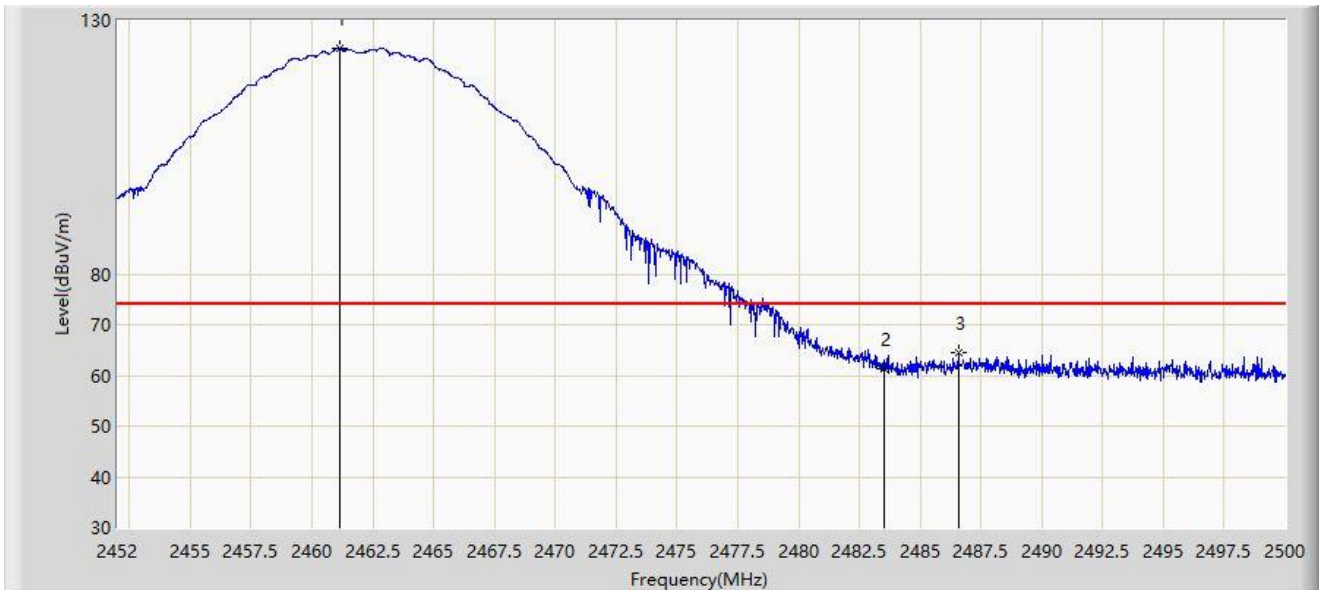

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.120	124.599	93.509	N/A	N/A	31.090	PK
2		2483.500	61.362	30.269	-12.638	74.000	31.093	PK
3	*	2486.560	64.553	33.458	-9.447	74.000	31.095	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.264	122.337	91.247	N/A	N/A	31.090	AV
2		2483.500	52.406	21.313	-1.594	54.000	31.093	AV
3	*	2487.040	53.134	22.038	-0.866	54.000	31.096	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

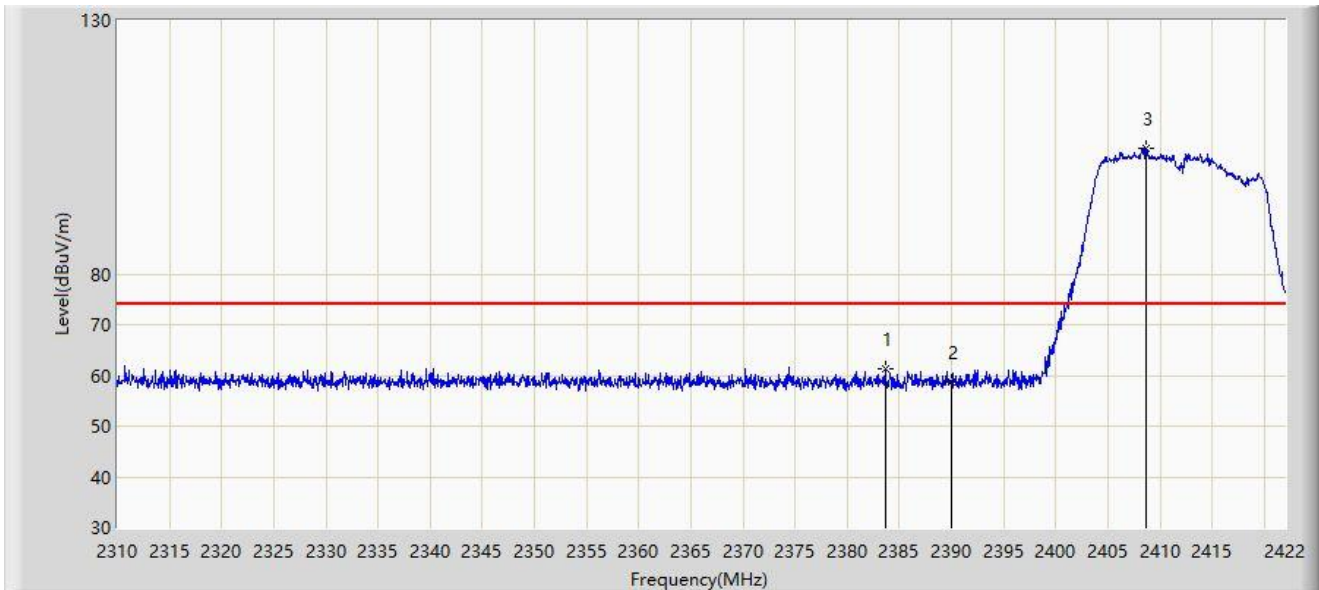


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2383.640	61.167	30.003	-12.833	74.000	31.164	PK
2		2390.000	58.686	27.528	-15.314	74.000	31.158	PK
3		2408.728	104.761	73.622	N/A	N/A	31.139	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

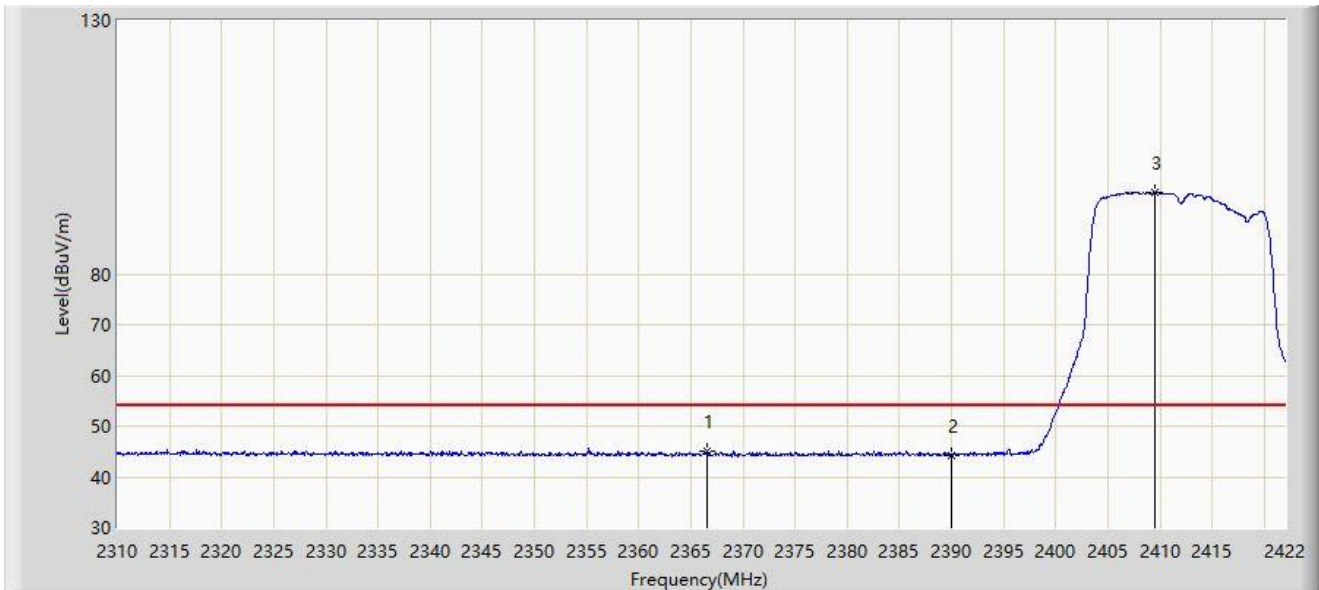


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2366.560	45.139	13.905	-8.861	54.000	31.234	AV
2		2390.000	44.318	13.160	-9.682	54.000	31.158	AV
3		2409.456	96.139	65.002	N/A	N/A	31.137	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

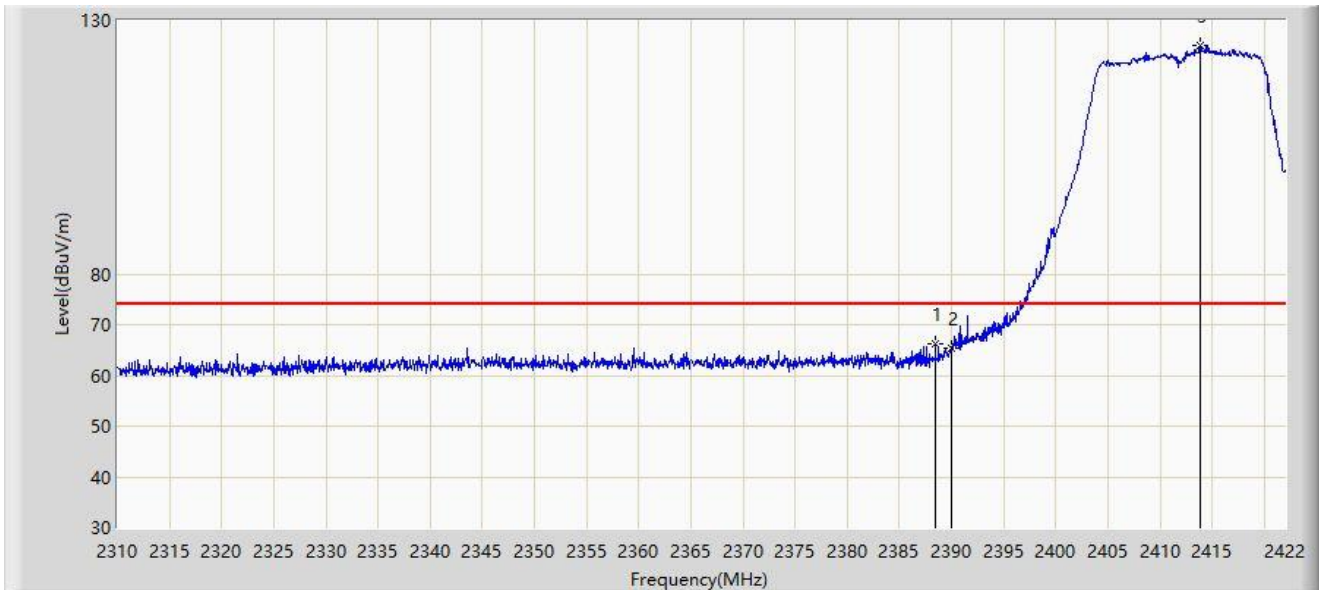


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.456	66.110	34.951	-7.890	74.000	31.159	PK
2		2390.000	65.306	34.148	-8.694	74.000	31.158	PK
3		2413.824	125.151	94.020	N/A	N/A	31.132	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

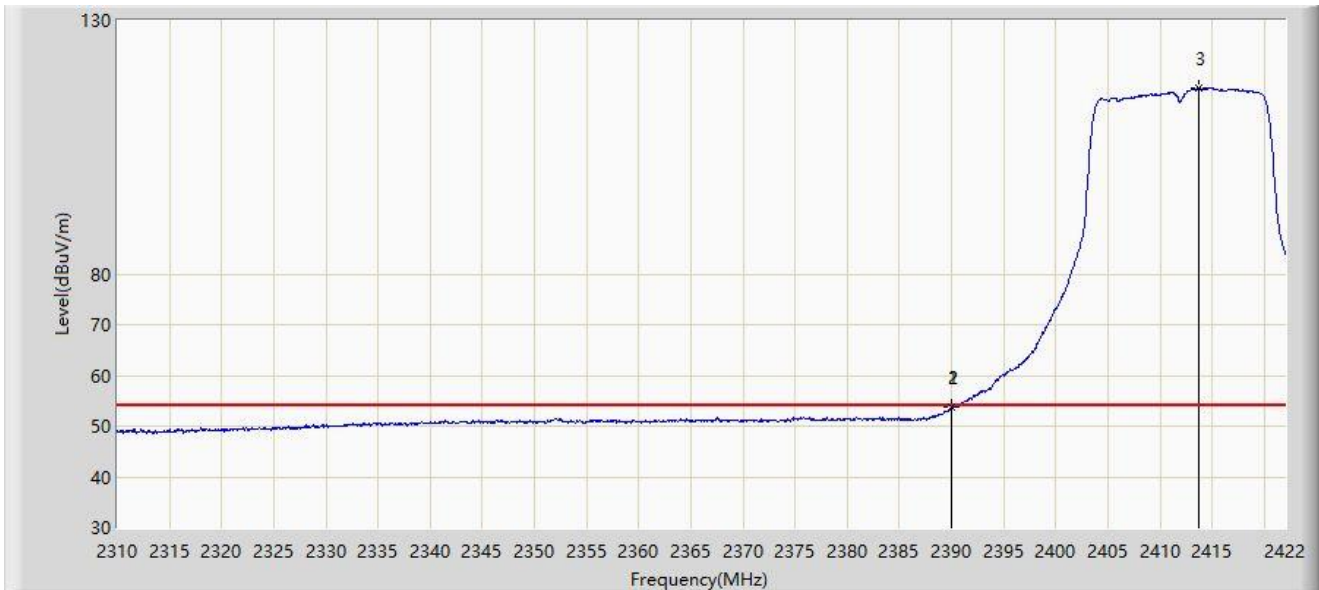


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.968	53.686	22.528	-0.314	54.000	31.158	AV
2		2390.000	53.681	22.523	-0.319	54.000	31.158	AV
3		2413.768	116.559	85.427	N/A	N/A	31.132	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

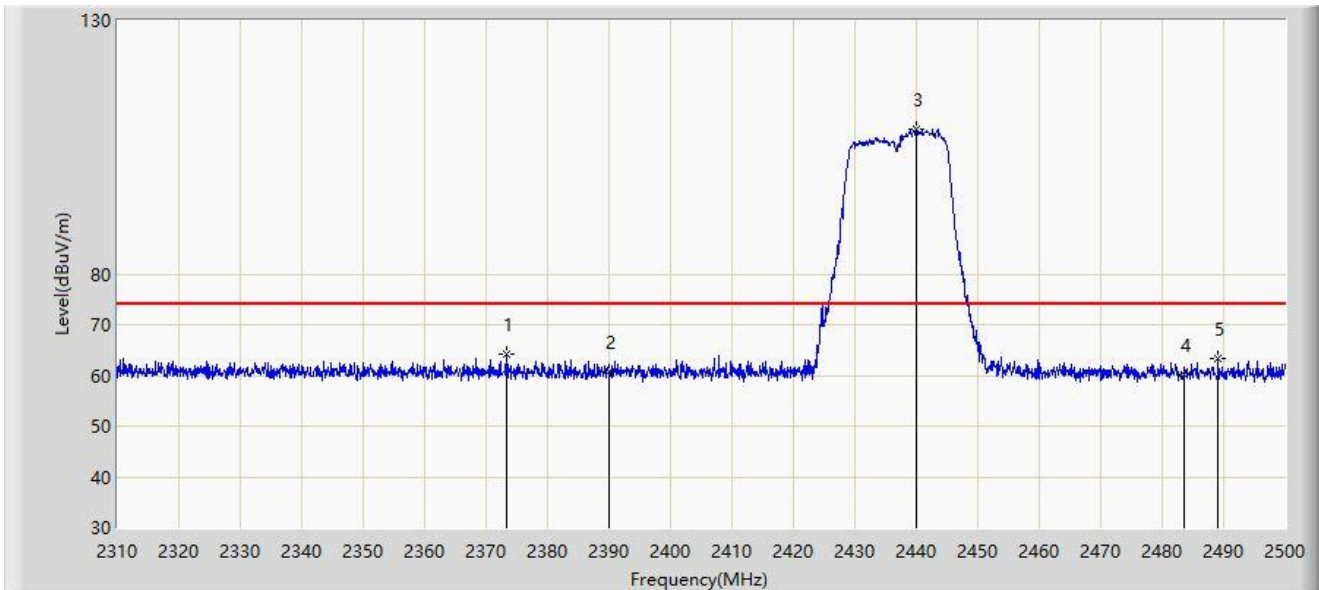


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2373.270	64.120	32.915	-9.880	74.000	31.205	PK
2		2390.000	60.618	29.460	-13.382	74.000	31.158	PK
3		2440.055	108.502	77.429	N/A	N/A	31.073	PK
4		2483.500	60.182	29.089	-13.818	74.000	31.093	PK
5		2489.075	63.229	32.131	-10.771	74.000	31.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

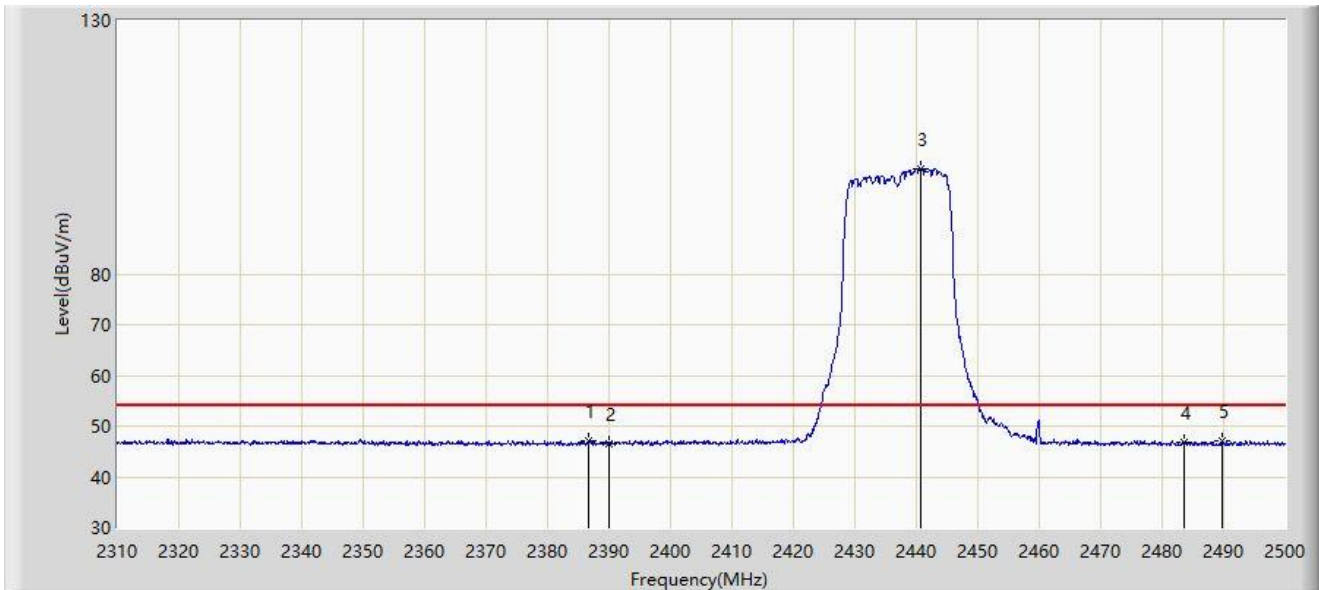


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.760	47.061	15.901	-6.939	54.000	31.160	AV
2		2390.000	46.506	15.348	-7.494	54.000	31.158	AV
3		2440.815	100.814	69.740	N/A	N/A	31.074	AV
4		2483.500	46.748	15.655	-7.252	54.000	31.093	AV
5		2489.835	47.050	15.952	-6.950	54.000	31.098	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

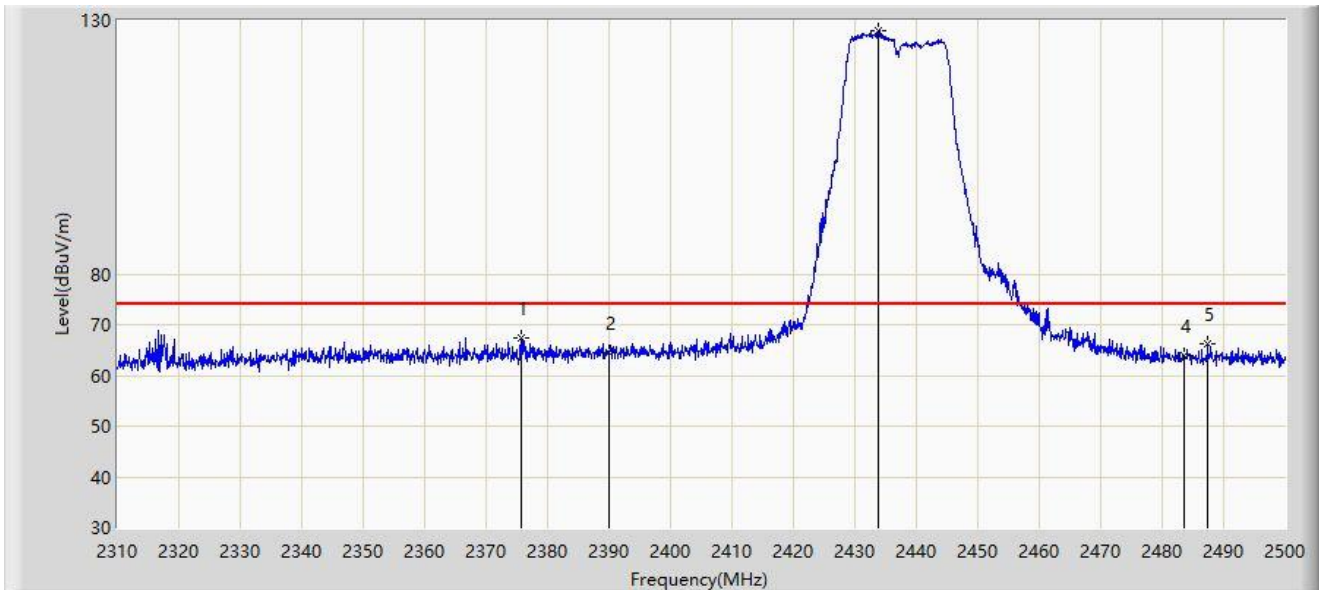


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2375.740	67.433	36.239	-6.567	74.000	31.194	PK
2		2390.000	64.610	33.452	-9.390	74.000	31.158	PK
3		2433.785	128.072	96.990	N/A	N/A	31.082	PK
4		2483.500	63.818	32.725	-10.182	74.000	31.093	PK
5		2487.365	66.129	35.033	-7.871	74.000	31.096	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

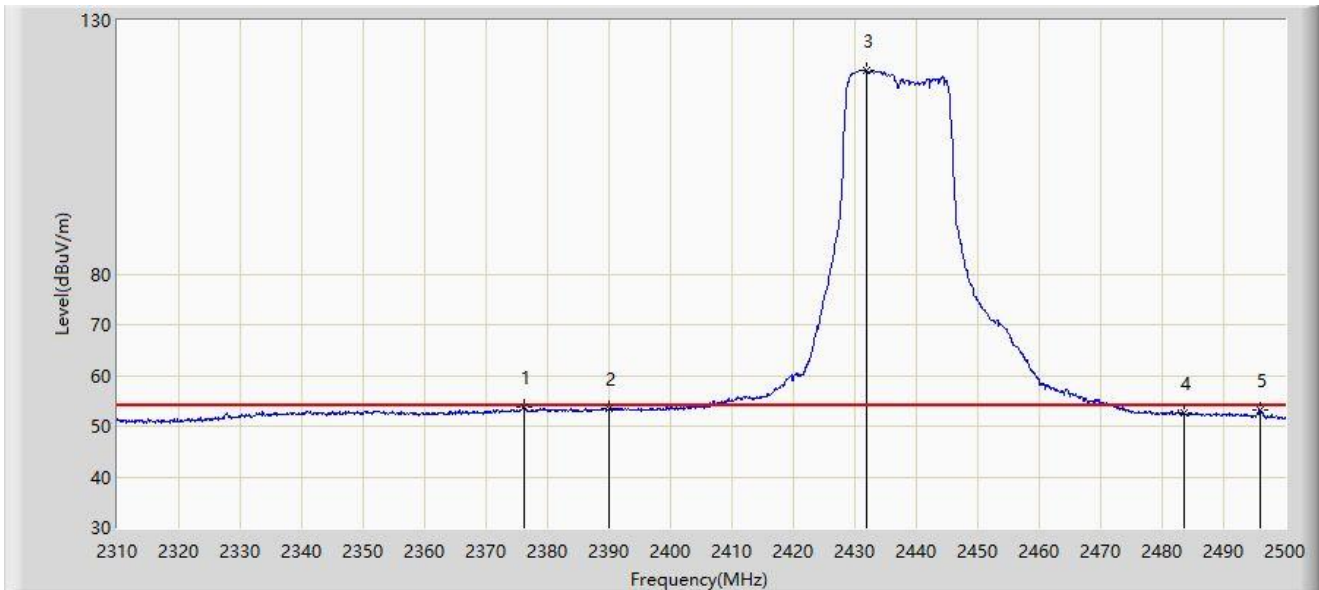


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2376.215	53.785	22.593	-0.215	54.000	31.192	AV
2		2390.000	53.537	22.379	-0.463	54.000	31.158	AV
3		2431.790	120.194	89.106	N/A	N/A	31.088	AV
4		2483.500	52.545	21.452	-1.455	54.000	31.093	AV
5		2495.915	53.203	22.101	-0.797	54.000	31.102	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2457MHz	

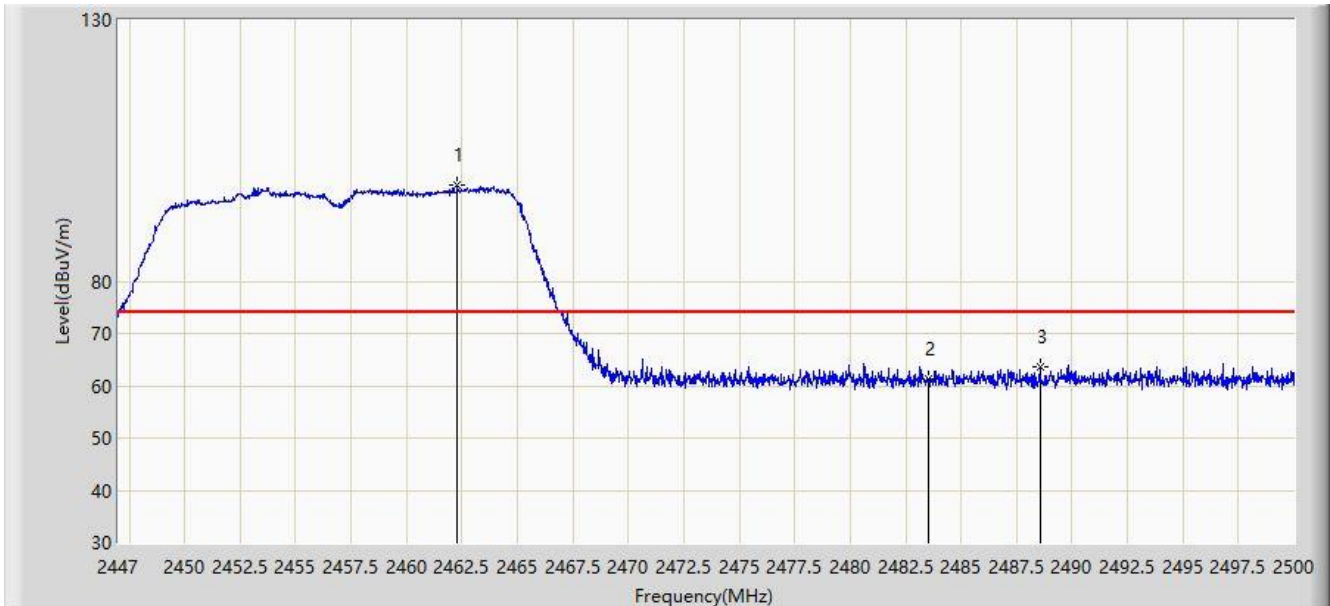


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.291	98.444	67.355	N/A	N/A	31.089	PK
2		2483.500	61.206	30.113	-12.794	74.000	31.093	PK
3	*	2488.552	63.523	32.426	-10.477	74.000	31.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2457MHz	

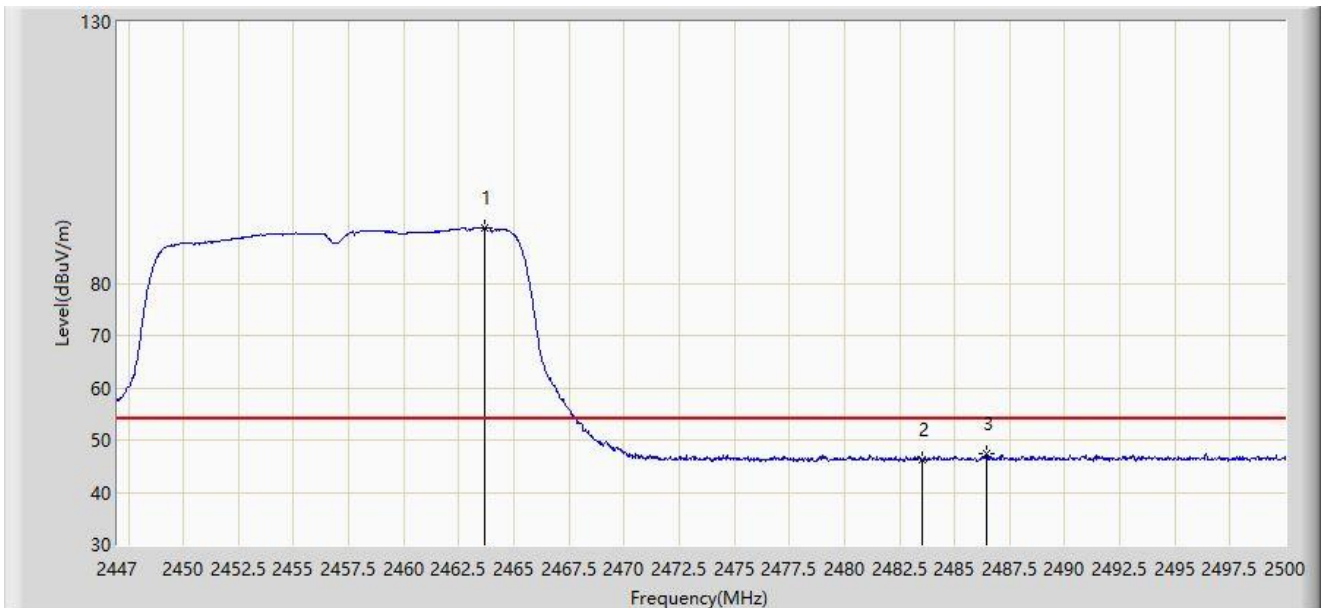


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.695	90.719	59.630	N/A	N/A	31.088	AV
2		2483.500	46.260	15.167	-7.740	54.000	31.093	AV
3	*	2486.432	47.257	16.162	-6.743	54.000	31.095	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2457MHz	

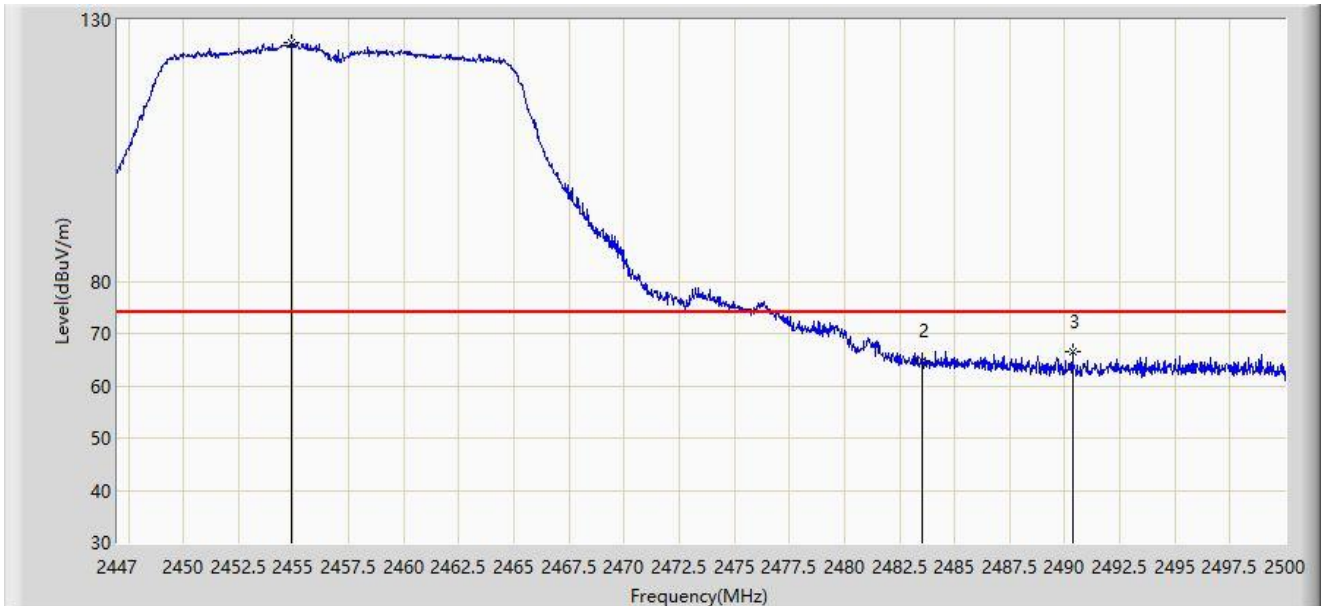


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2454.871	125.646	94.554	N/A	N/A	31.093	PK
2		2483.500	64.748	33.655	-9.252	74.000	31.093	PK
3	*	2490.354	66.581	35.482	-7.419	74.000	31.098	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2457MHz	

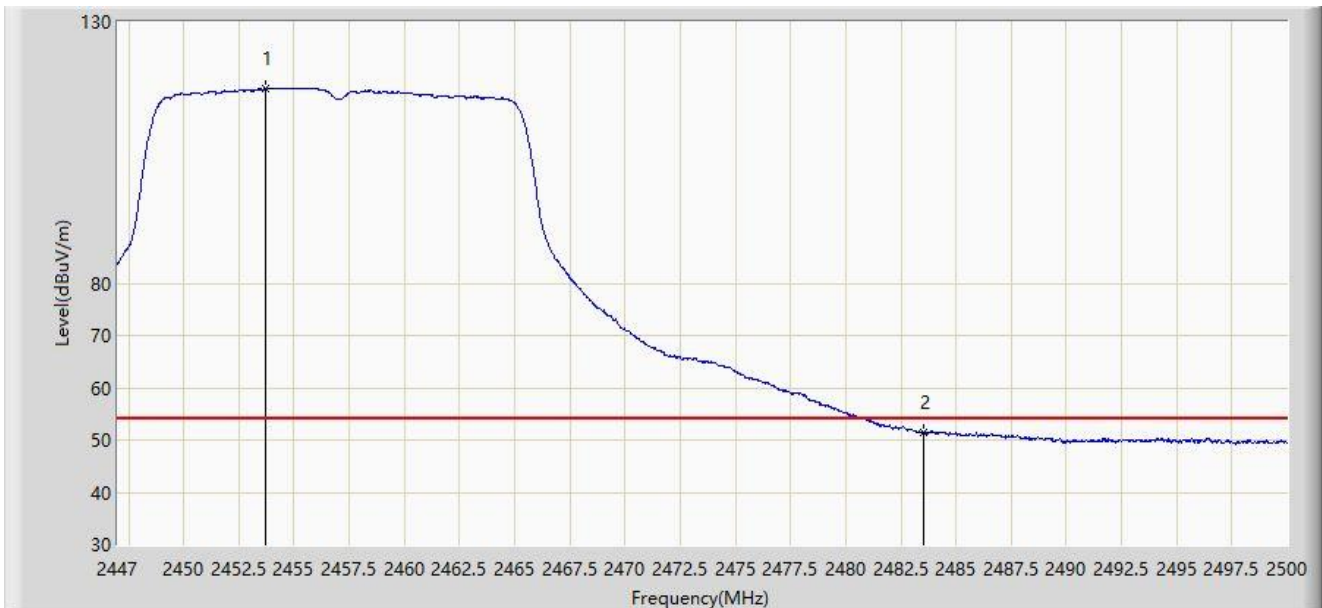


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2453.678	117.198	86.107	N/A	N/A	31.091	AV
2	*	2483.500	51.323	20.230	-2.677	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

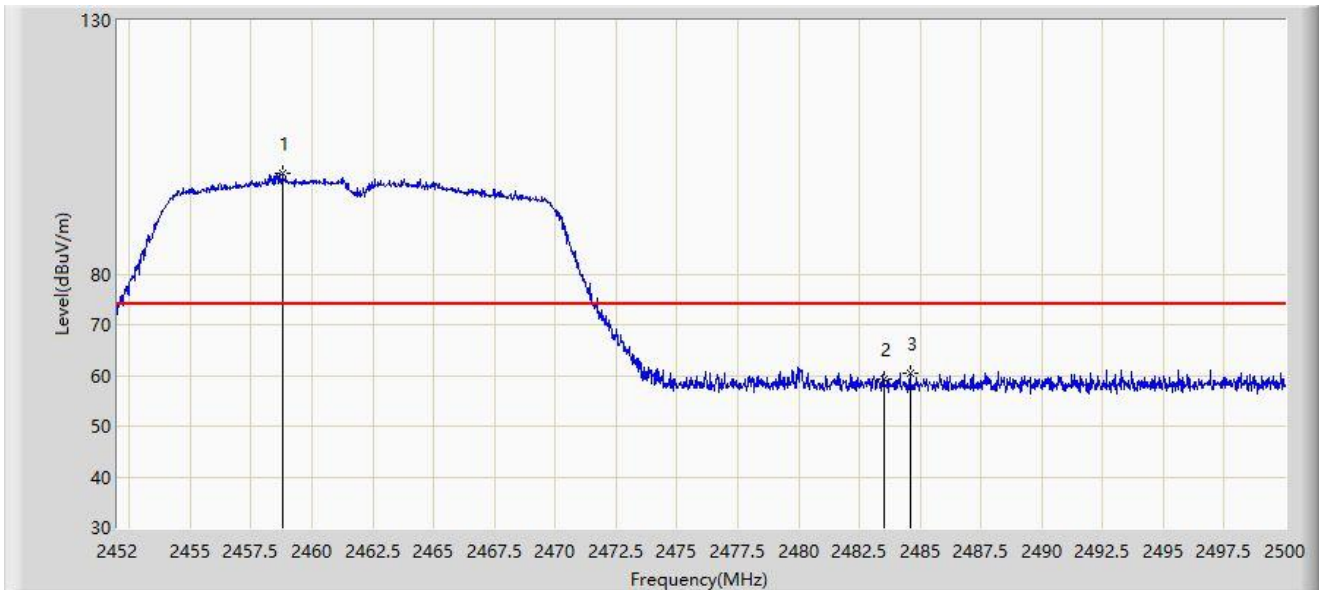


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.768	99.862	68.770	N/A	N/A	31.092	PK
2		2483.500	59.212	28.119	-14.788	74.000	31.093	PK
3	*	2484.592	60.570	29.476	-13.430	74.000	31.094	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

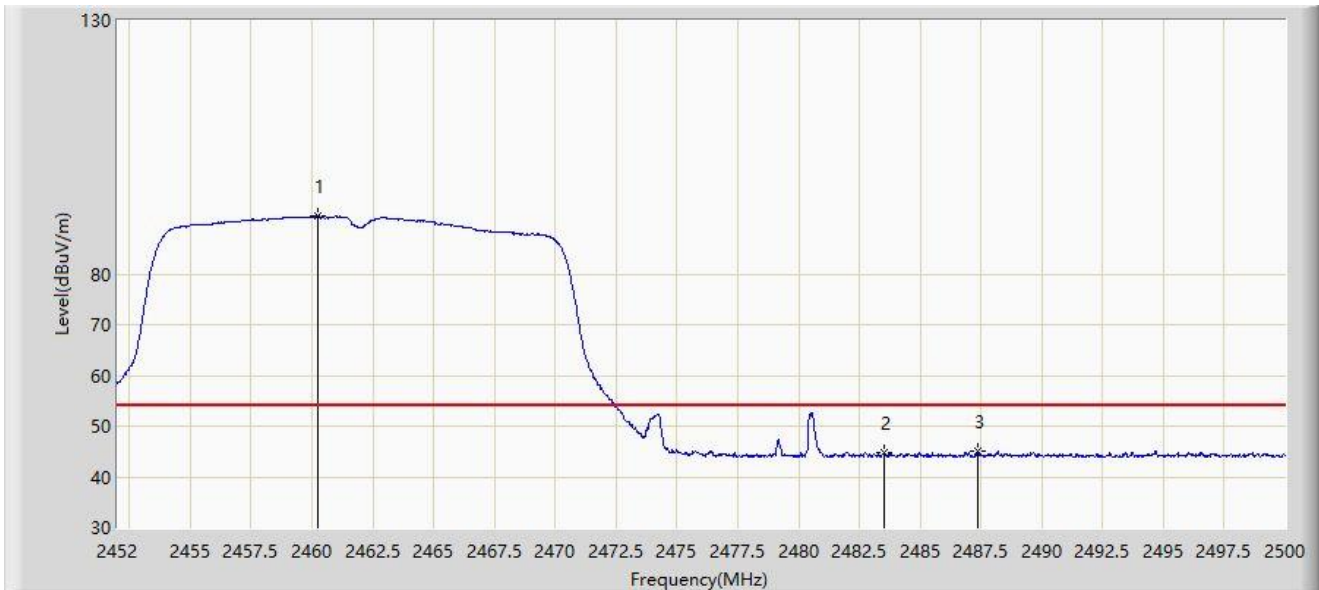


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.256	91.379	60.288	N/A	N/A	31.091	AV
2		2483.500	44.642	13.549	-9.358	54.000	31.093	AV
3	*	2487.352	45.067	13.971	-8.933	54.000	31.096	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

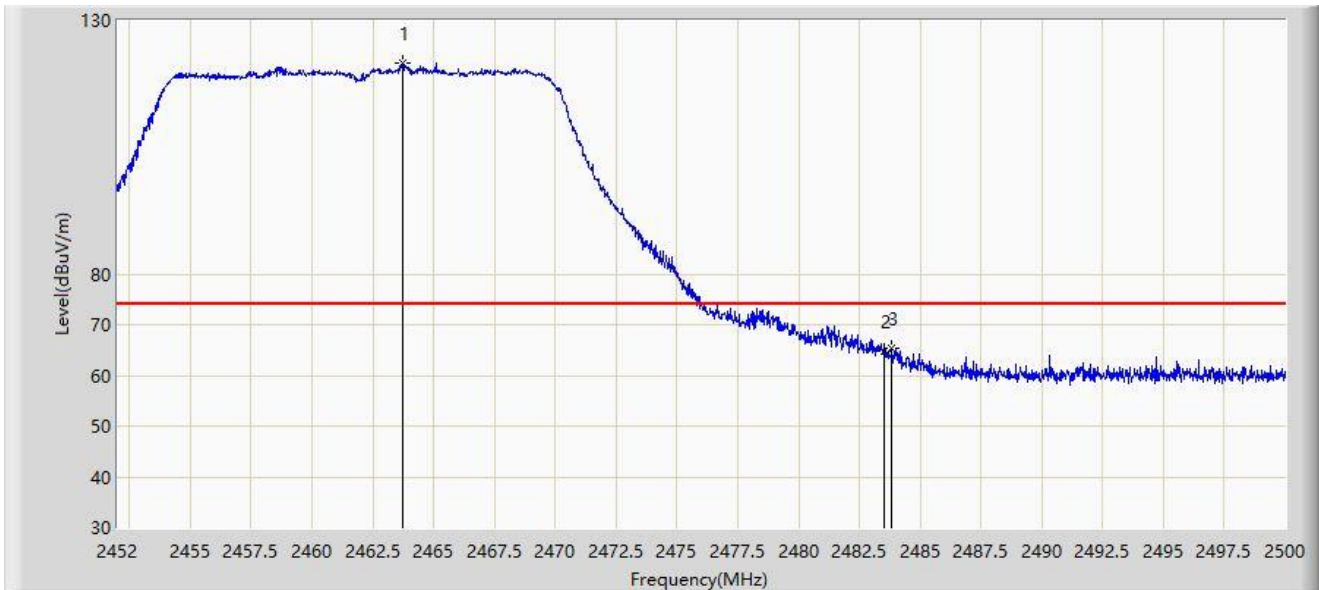


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.712	121.486	90.397	N/A	N/A	31.088	PK
2		2483.500	64.906	33.813	-9.094	74.000	31.093	PK
3	*	2483.824	65.471	34.378	-8.529	74.000	31.093	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

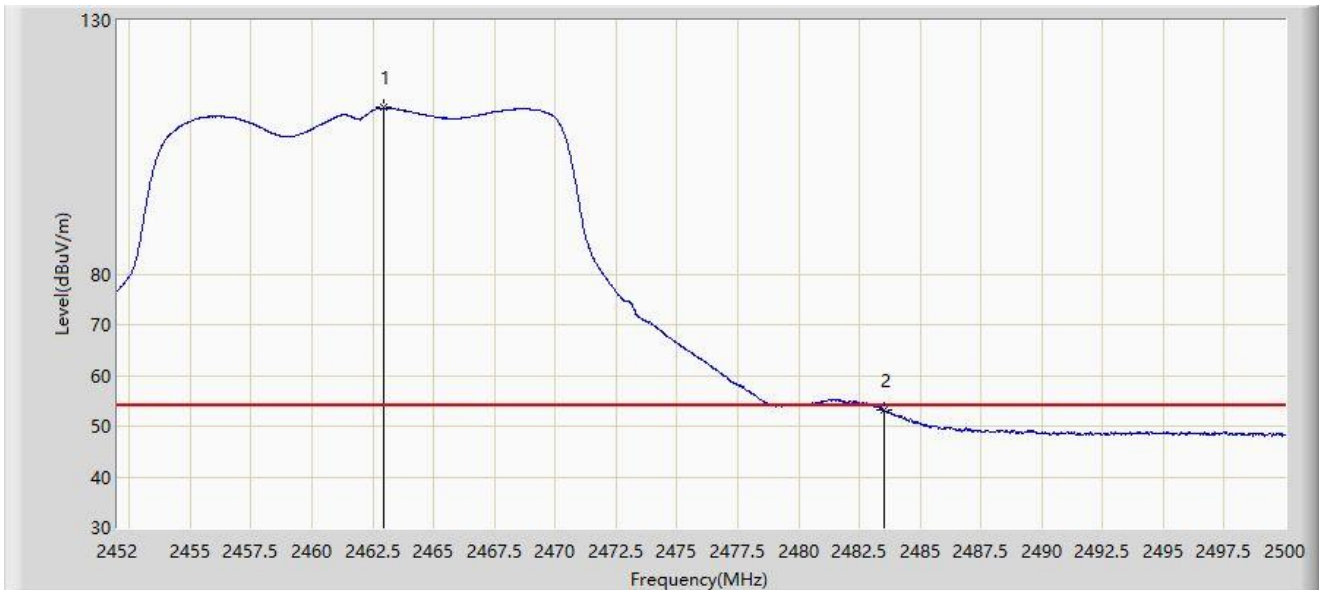


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.968	112.771	81.682	N/A	N/A	31.089	AV
2	*	2483.500	53.088	21.995	-0.912	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

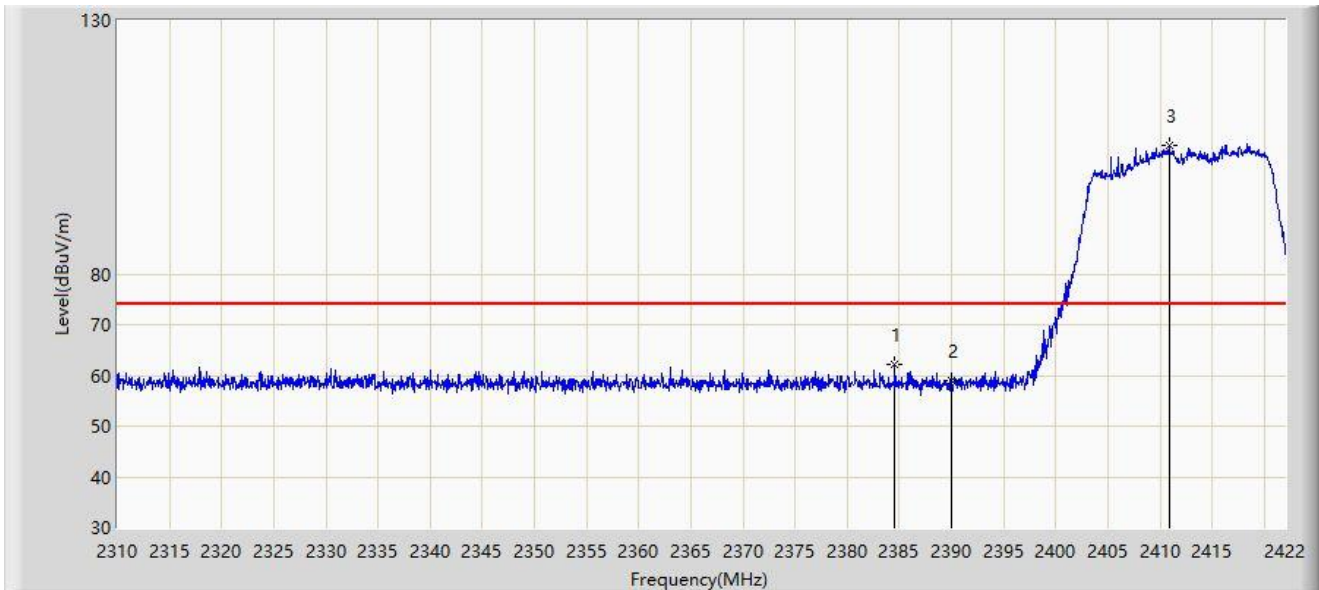


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.592	62.105	30.943	-11.895	74.000	31.161	PK
2		2390.000	59.019	27.861	-14.981	74.000	31.158	PK
3		2410.856	105.492	74.357	N/A	N/A	31.134	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

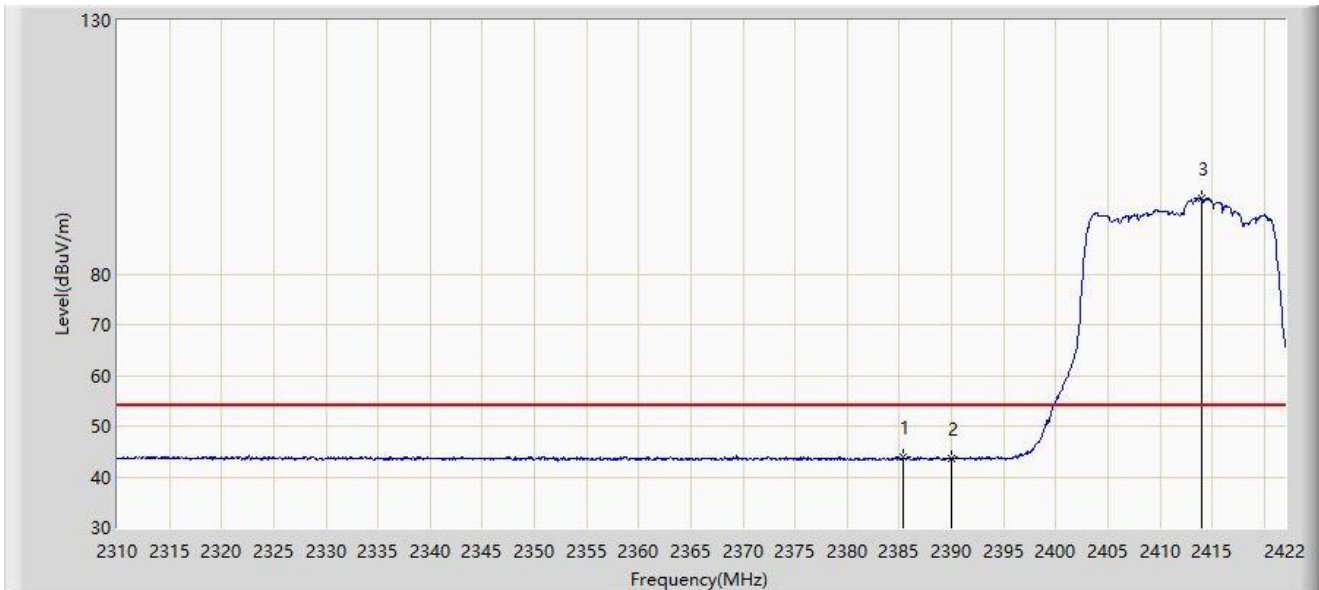


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2385.376	43.835	12.674	-10.165	54.000	31.161	AV
2		2390.000	43.616	12.458	-10.384	54.000	31.158	AV
3		2413.936	94.875	63.744	N/A	N/A	31.131	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

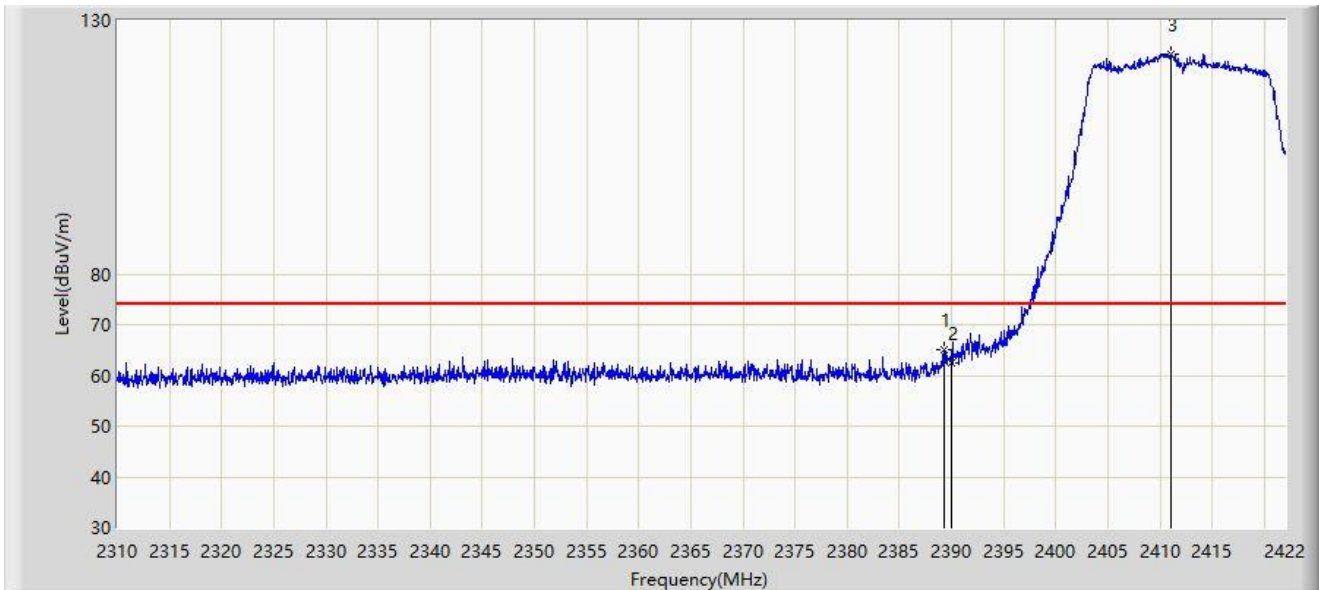


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.352	64.992	33.834	-9.008	74.000	31.158	PK
2		2390.000	62.603	31.445	-11.397	74.000	31.158	PK
3		2411.024	123.454	92.320	N/A	N/A	31.134	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

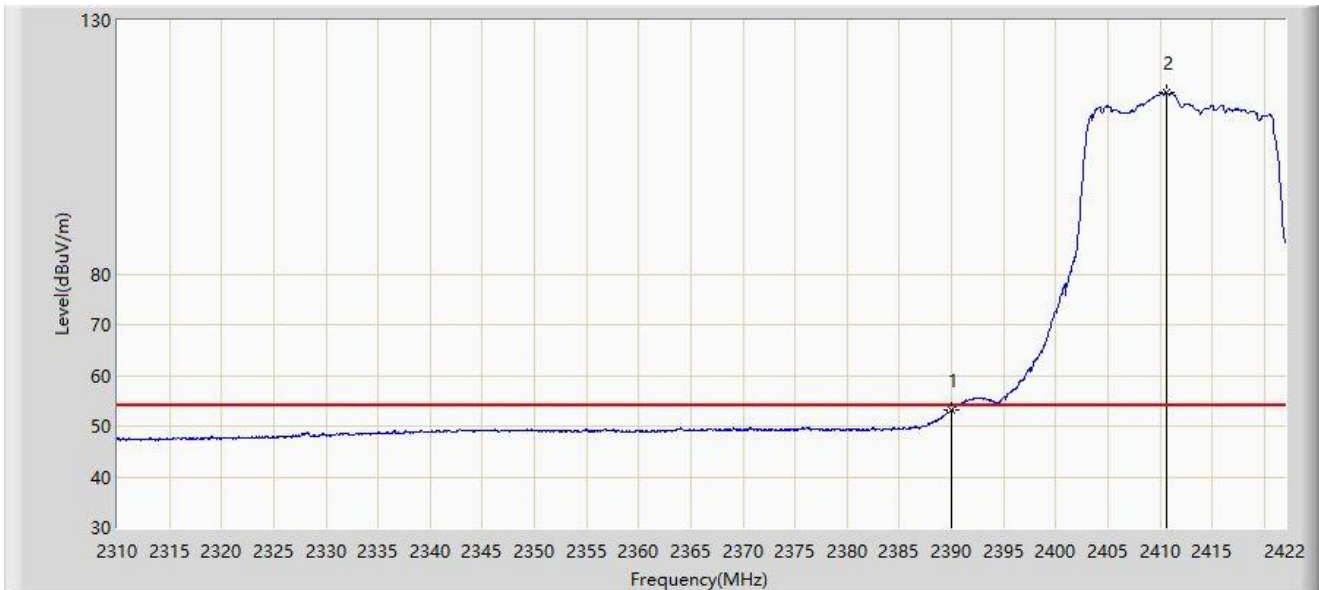


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	53.150	21.992	-0.850	54.000	31.158	AV
2		2410.688	115.745	84.610	N/A	N/A	31.135	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

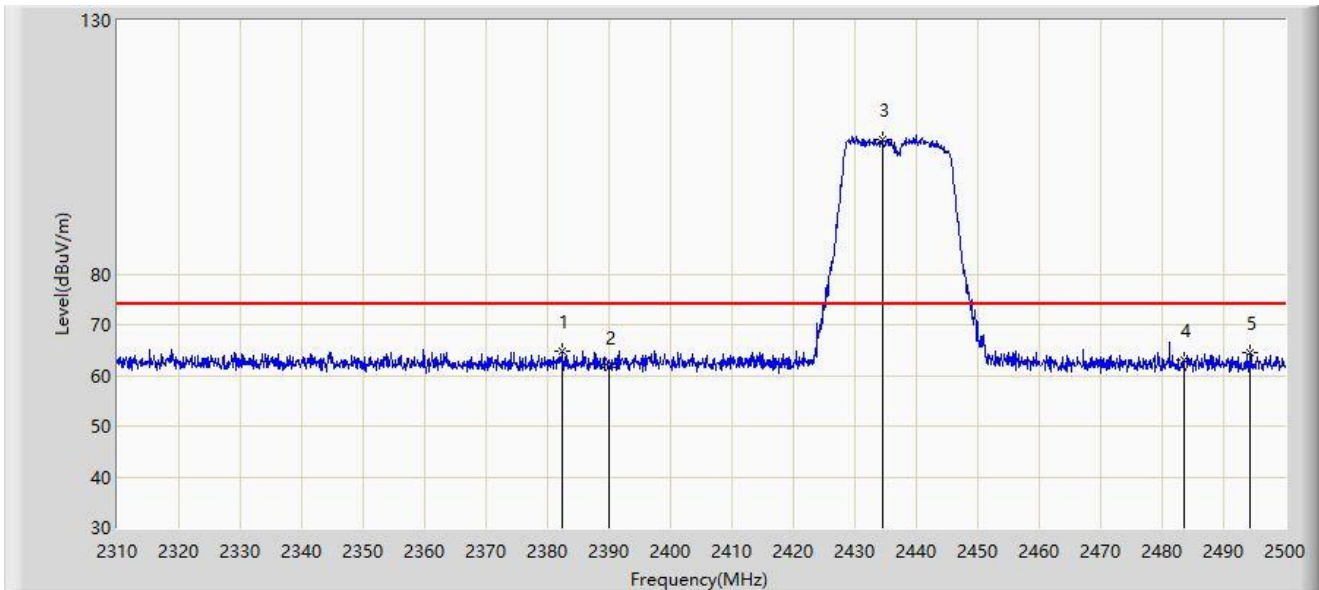


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2382.485	64.897	33.729	-9.103	74.000	31.168	PK
2		2390.000	61.531	30.373	-12.469	74.000	31.158	PK
3		2434.450	106.578	75.498	N/A	N/A	31.080	PK
4		2483.500	62.998	31.905	-11.002	74.000	31.093	PK
5		2494.205	64.601	33.500	-9.399	74.000	31.102	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

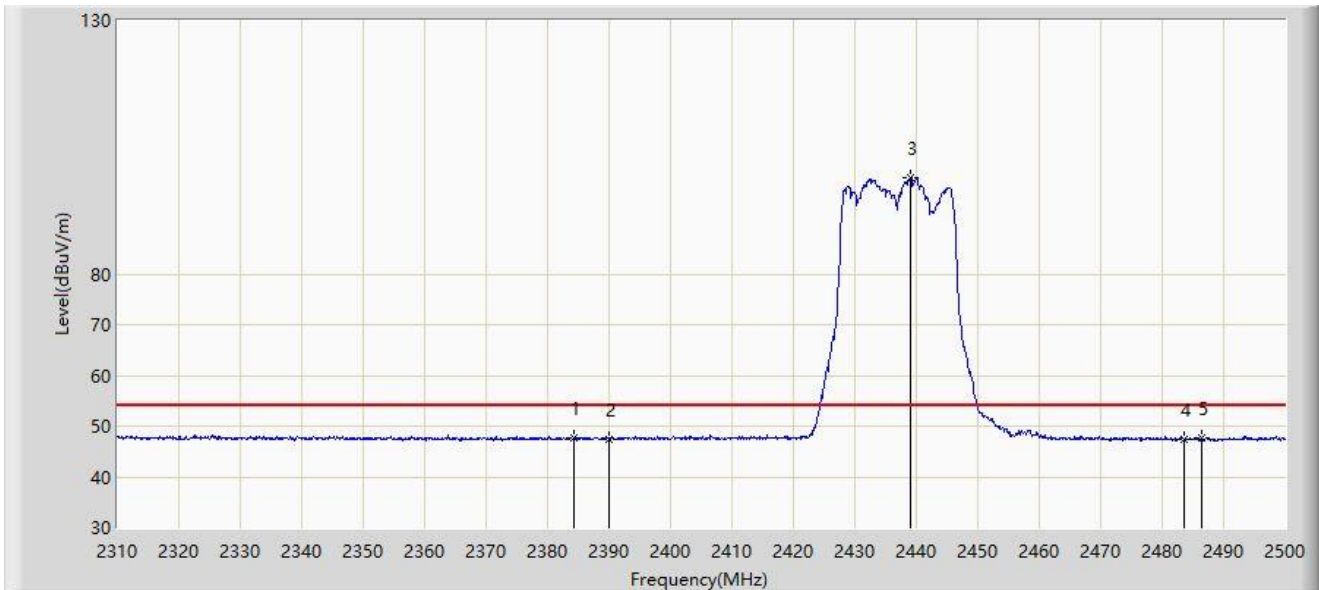


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.385	47.826	16.664	-6.174	54.000	31.162	AV
2		2390.000	47.411	16.253	-6.589	54.000	31.158	AV
3		2439.010	98.841	67.769	N/A	N/A	31.072	AV
4		2483.500	47.348	16.255	-6.652	54.000	31.093	AV
5		2486.415	47.712	16.617	-6.288	54.000	31.095	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

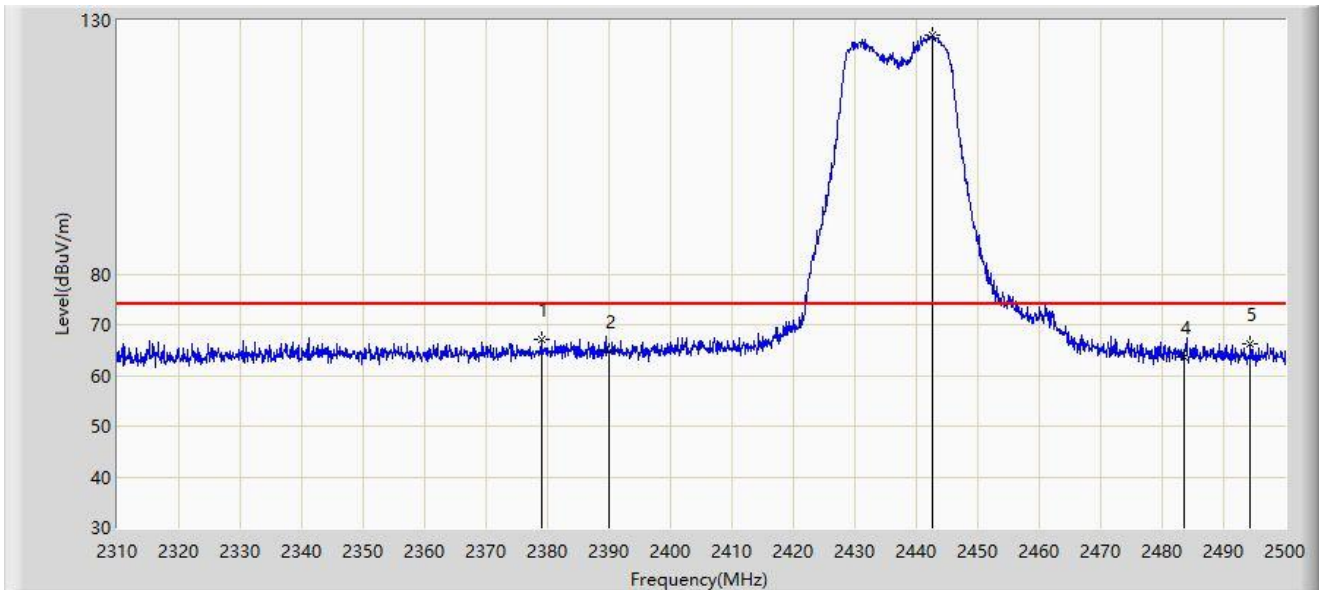


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2378.970	67.243	36.062	-6.757	74.000	31.181	PK
2		2390.000	64.664	33.506	-9.336	74.000	31.158	PK
3		2442.525	127.225	96.149	N/A	N/A	31.076	PK
4		2483.500	63.556	32.463	-10.444	74.000	31.093	PK
5		2494.300	66.234	35.133	-7.766	74.000	31.102	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

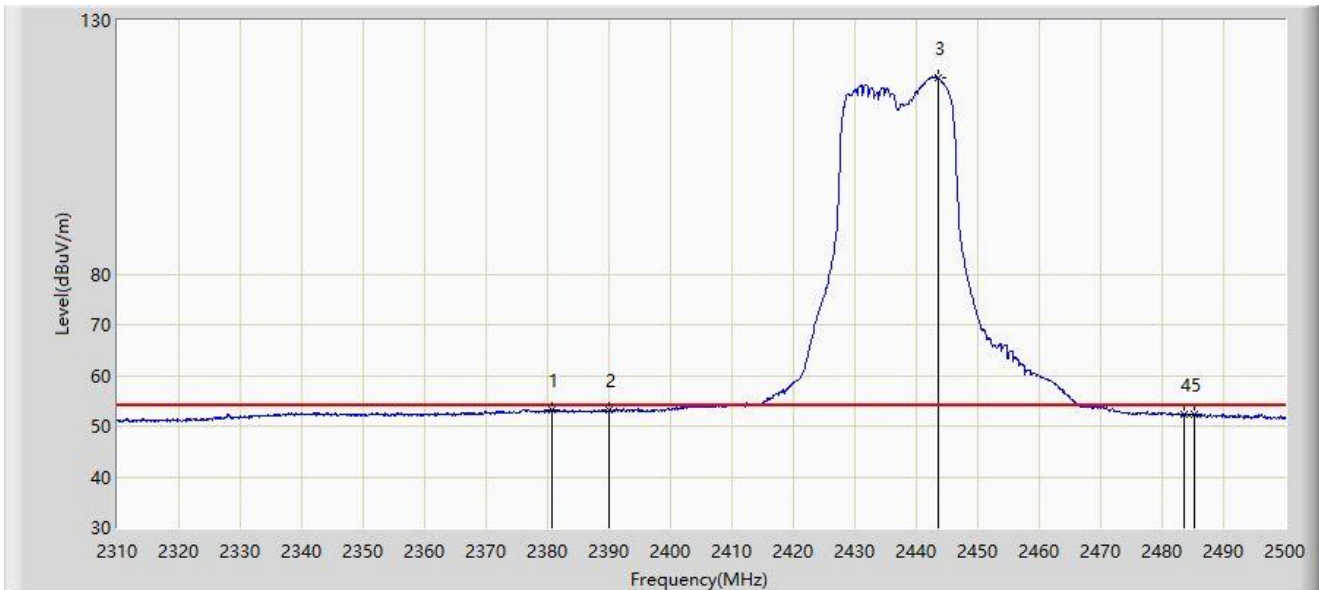


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2380.680	53.292	22.117	-0.708	54.000	31.175	AV
2		2390.000	53.057	21.899	-0.943	54.000	31.158	AV
3		2443.475	118.726	87.649	N/A	N/A	31.077	AV
4		2483.500	52.276	21.183	-1.724	54.000	31.093	AV
5		2485.180	52.425	21.331	-1.575	54.000	31.094	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

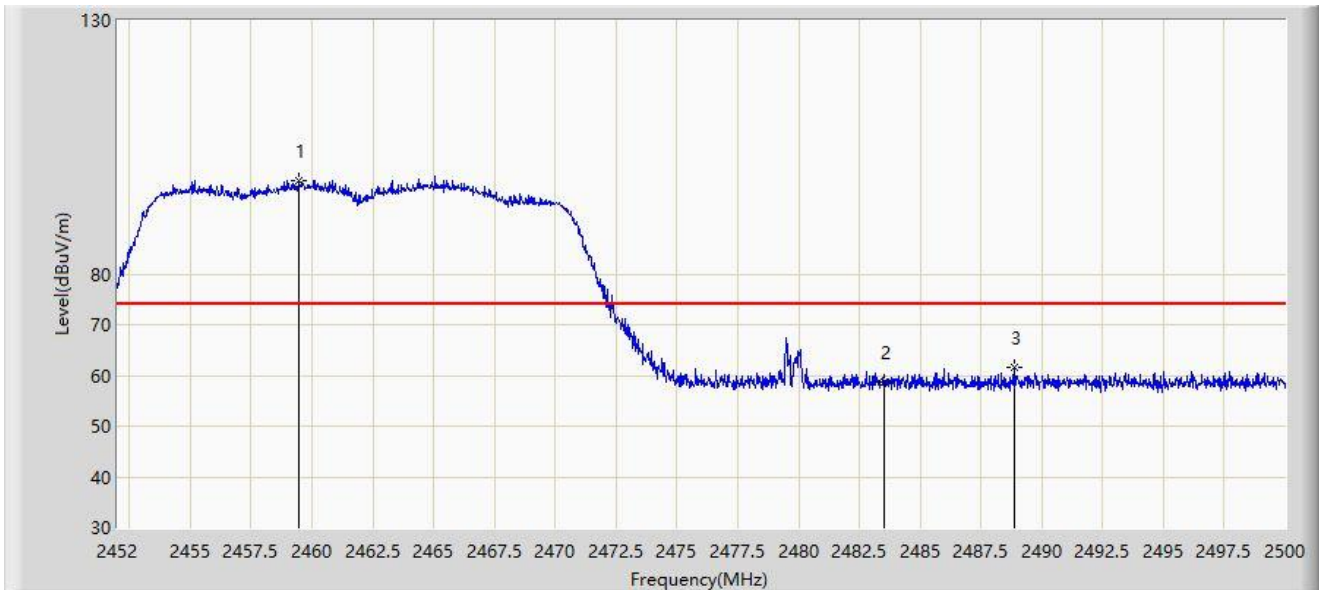


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.464	98.524	67.433	N/A	N/A	31.091	PK
2		2483.500	58.603	27.510	-15.397	74.000	31.093	PK
3	*	2488.864	61.526	30.429	-12.474	74.000	31.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

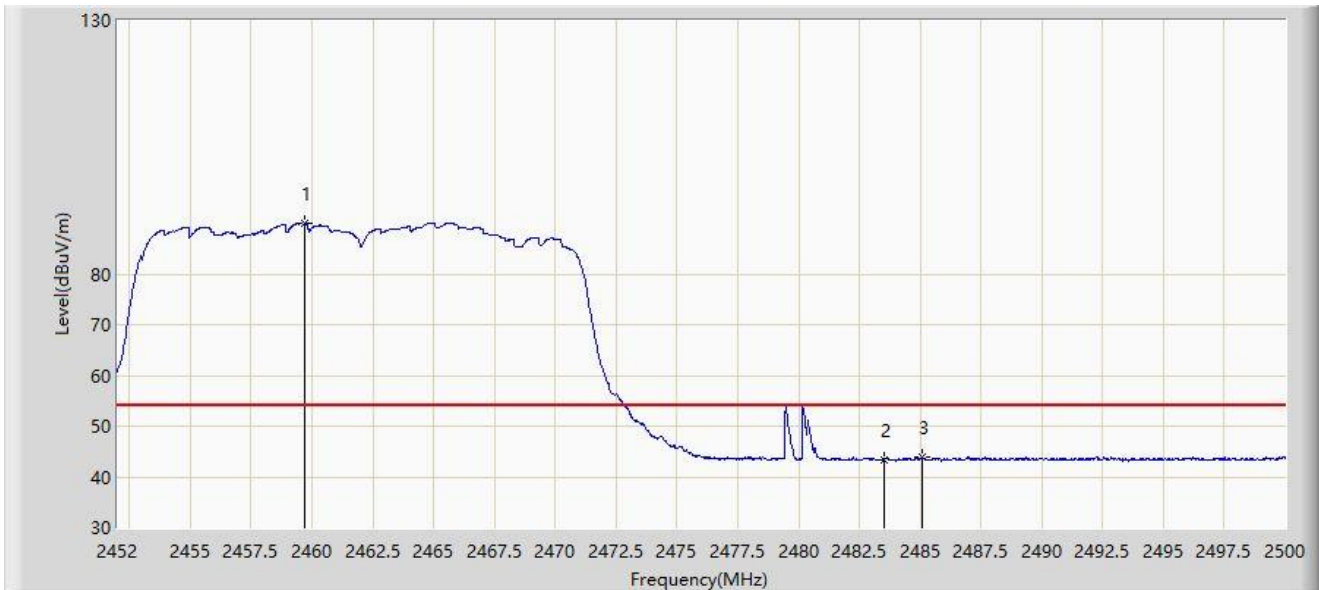


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.728	89.897	58.806	N/A	N/A	31.091	AV
2		2483.500	43.347	12.254	-10.653	54.000	31.093	AV
3	*	2485.096	43.809	12.715	-10.191	54.000	31.094	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

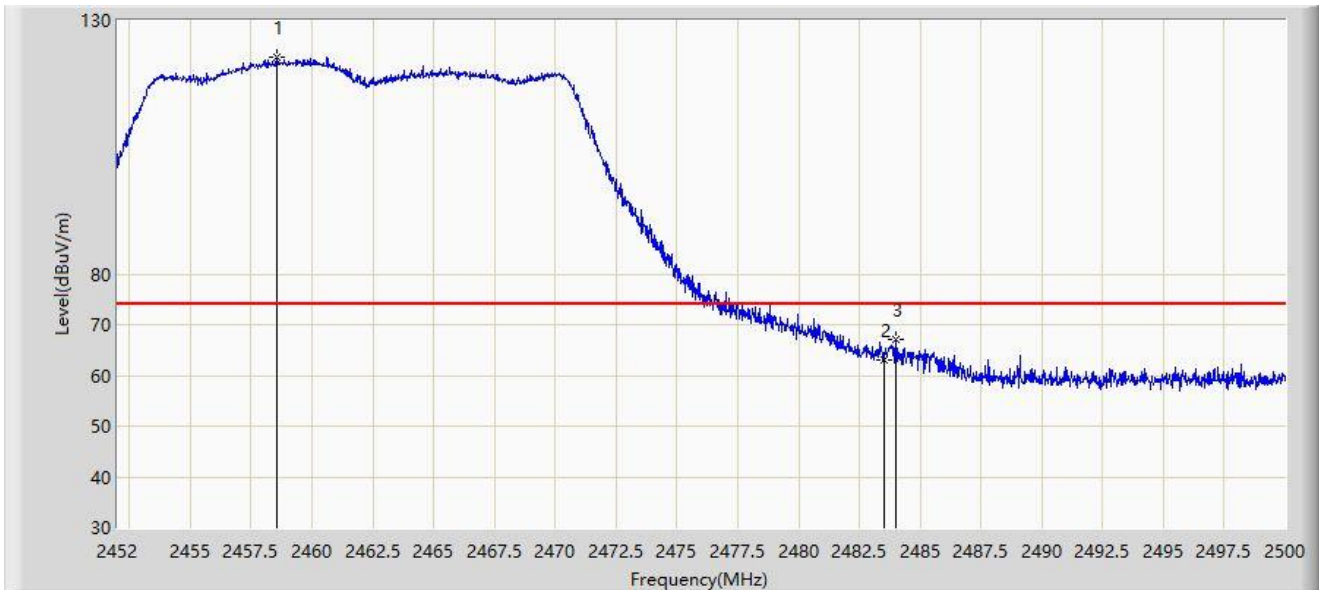


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.576	122.881	91.789	N/A	N/A	31.092	PK
2		2483.500	63.166	32.073	-10.834	74.000	31.093	PK
3	*	2483.992	67.122	36.029	-6.878	74.000	31.094	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

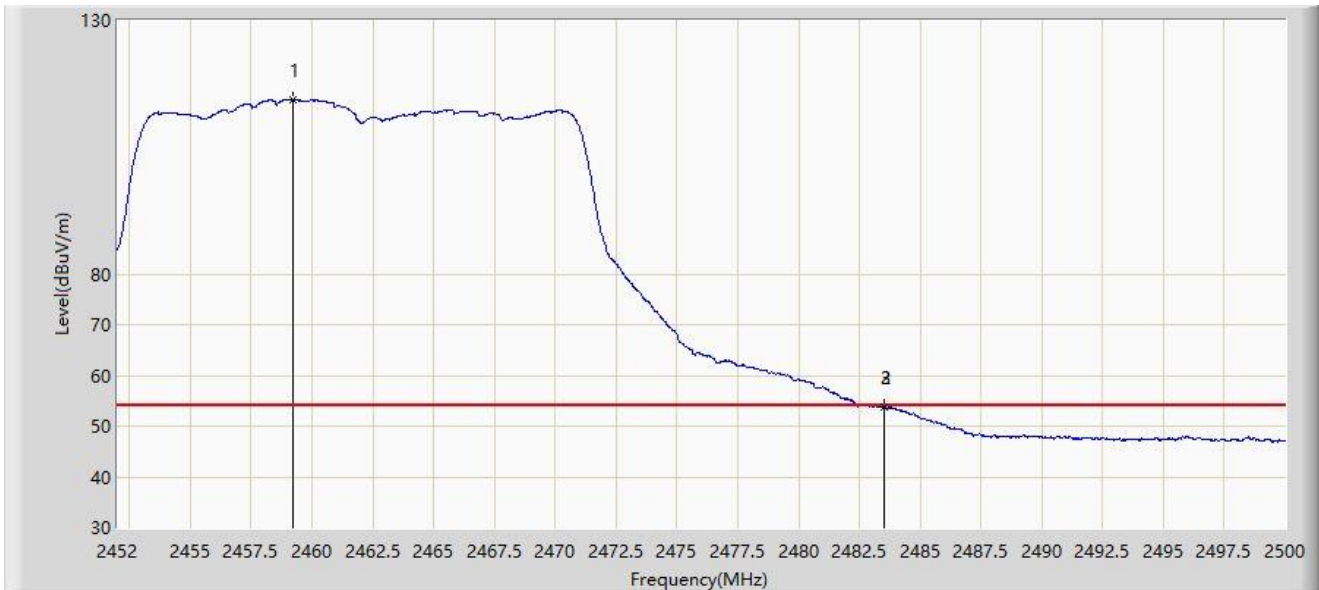


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.224	114.403	83.312	N/A	N/A	31.092	AV
2		2483.500	53.744	22.651	-0.256	54.000	31.093	AV
3	*	2483.536	53.833	22.740	-0.167	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

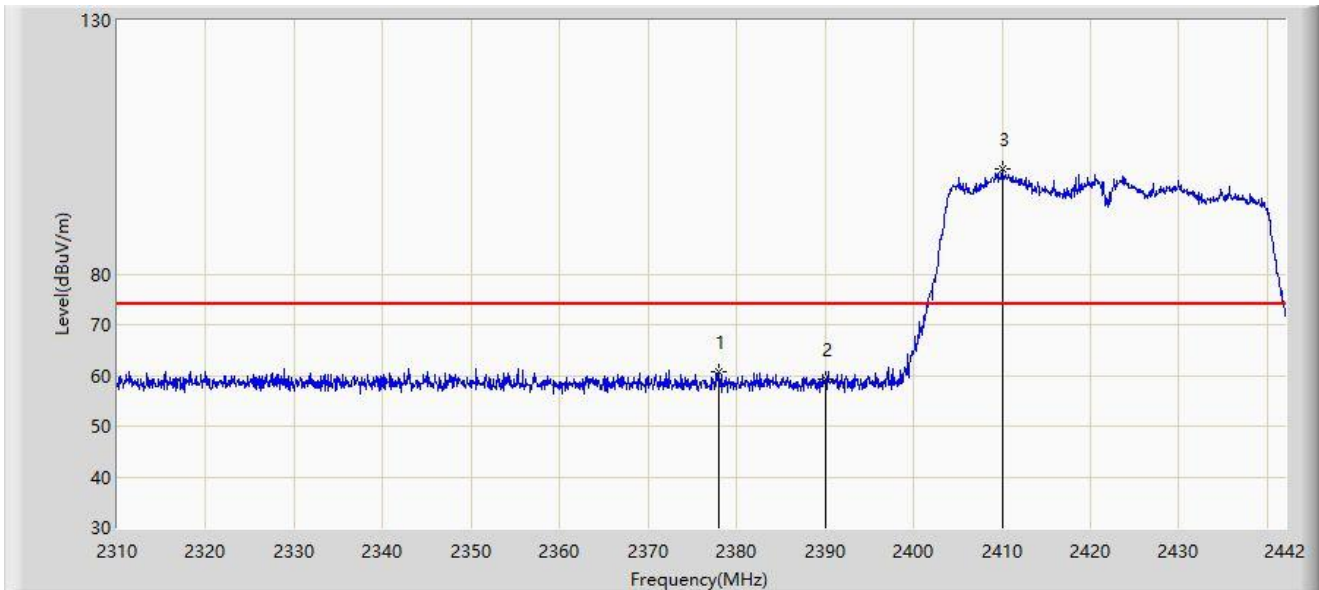


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2378.046	60.598	29.413	-13.402	74.000	31.185	PK
2		2390.000	59.258	28.100	-14.742	74.000	31.158	PK
3		2410.056	100.689	69.553	N/A	N/A	31.137	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

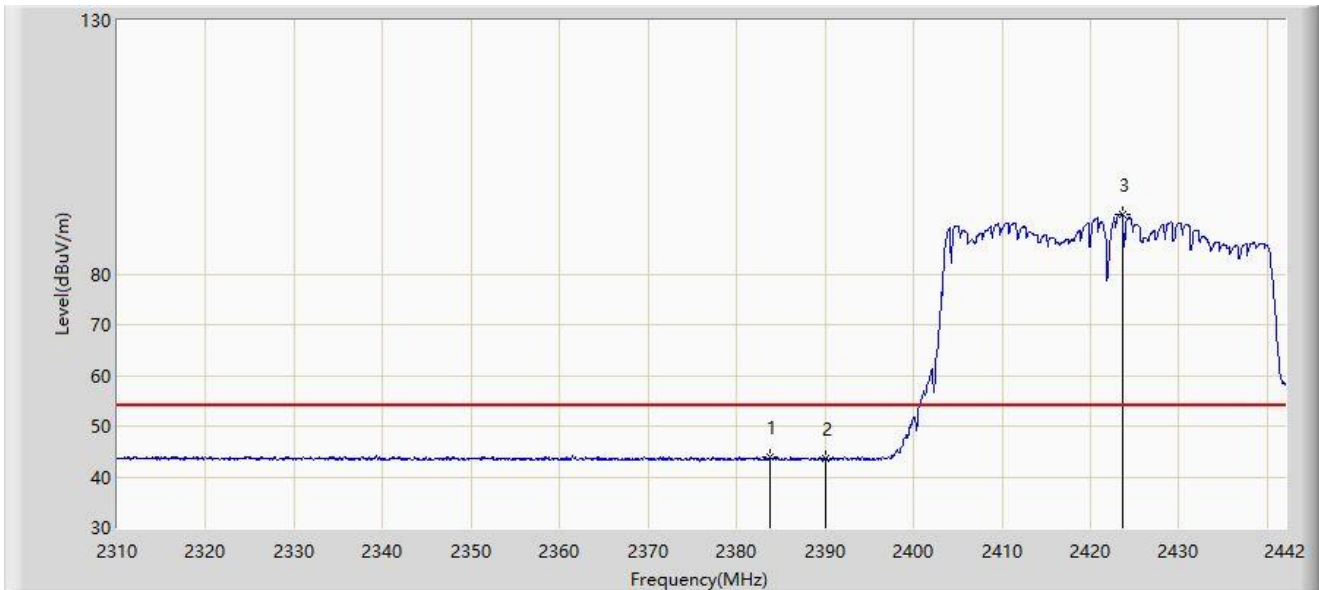


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2383.722	43.971	12.808	-10.029	54.000	31.163	AV
2		2390.000	43.561	12.403	-10.439	54.000	31.158	AV
3		2423.586	91.729	60.616	N/A	N/A	31.112	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

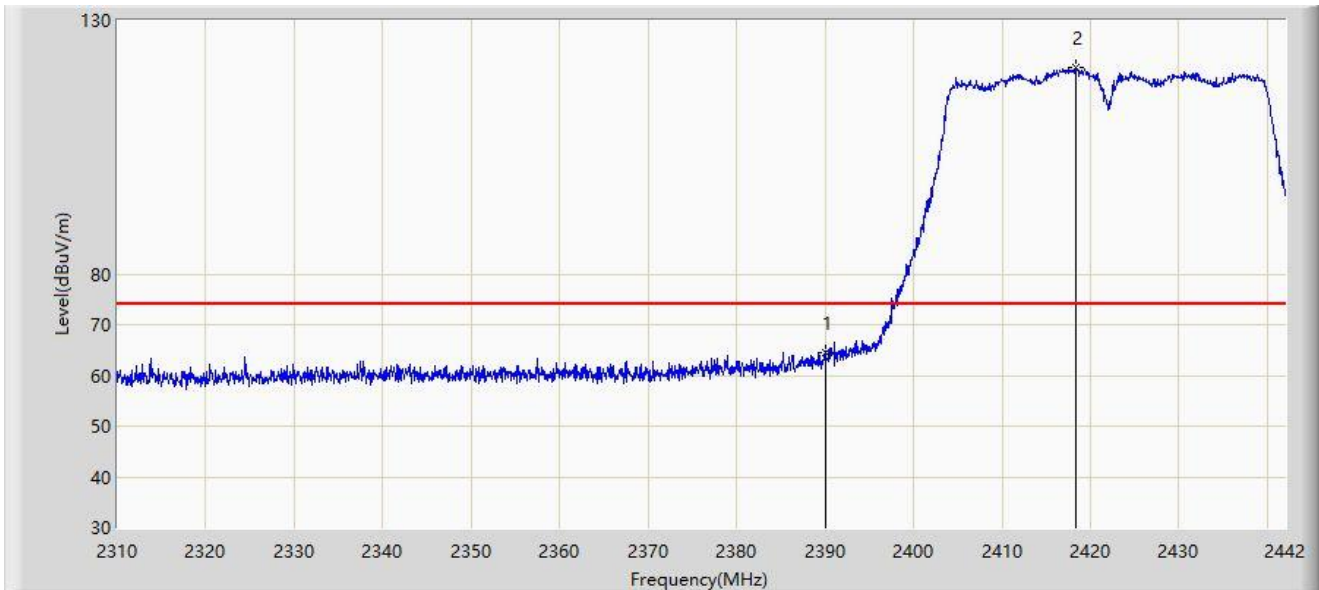


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	64.502	33.344	-9.498	74.000	31.158	PK
2		2418.306	120.650	89.523	N/A	N/A	31.126	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

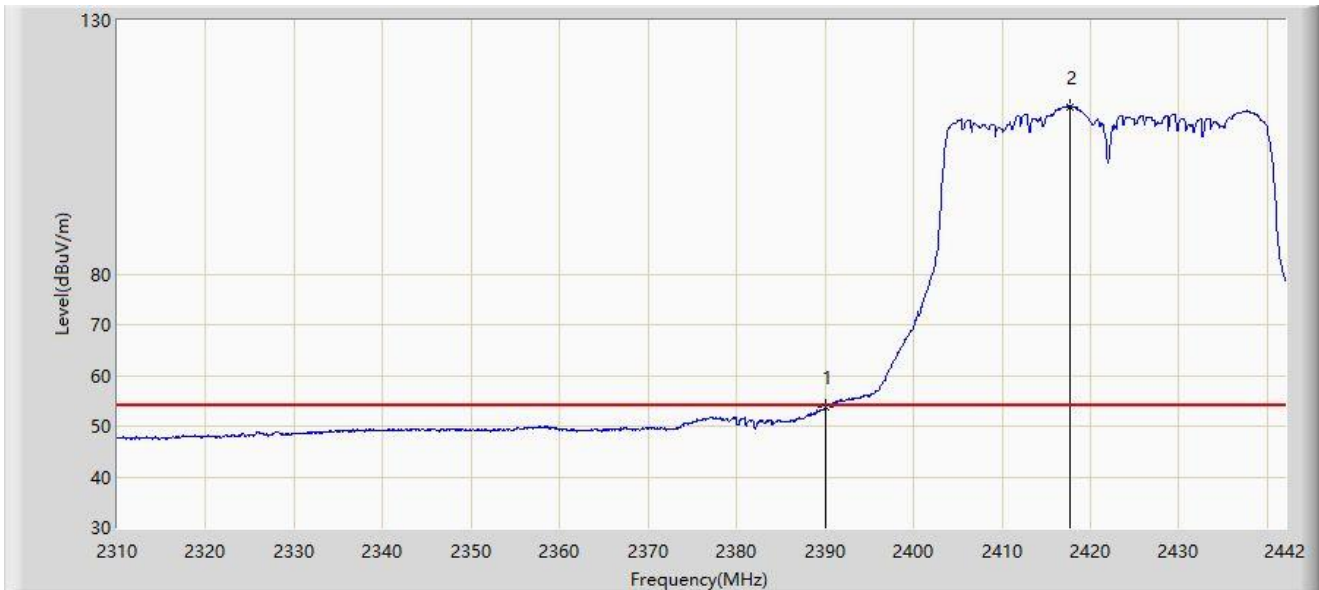


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	53.630	22.472	-0.370	54.000	31.158	AV
2		2417.712	113.034	81.907	N/A	N/A	31.127	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

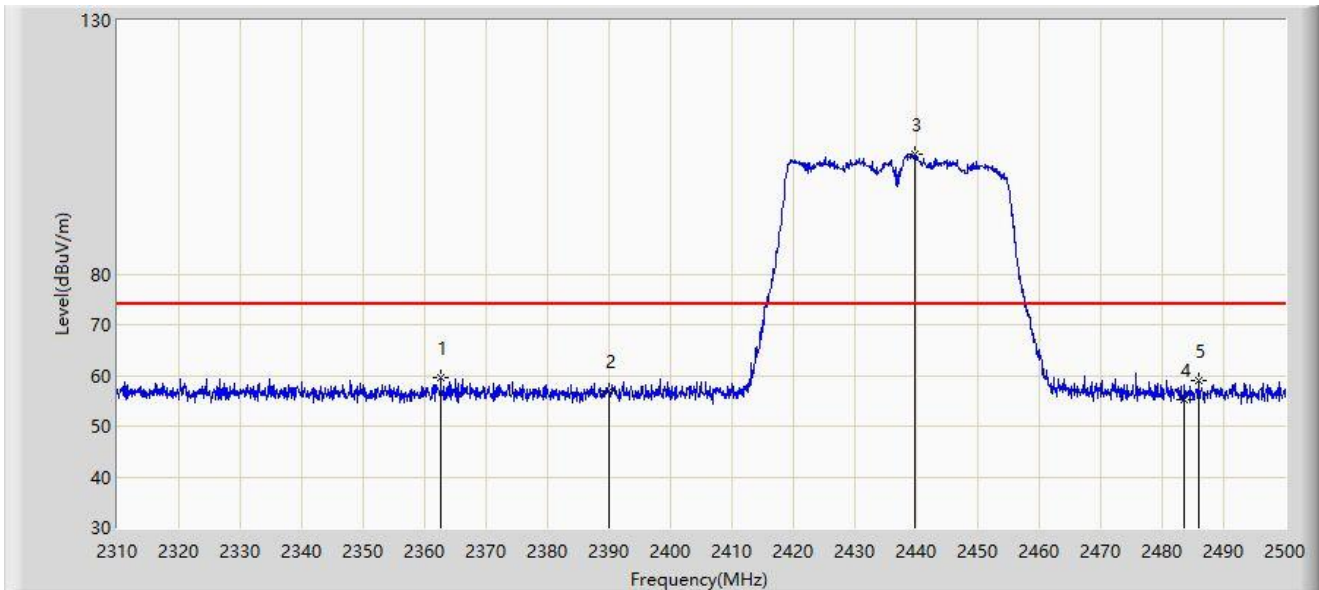


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2362.630	59.506	28.259	-14.494	74.000	31.246	PK
2		2390.000	56.941	25.783	-17.059	74.000	31.158	PK
3		2439.675	103.706	72.633	N/A	N/A	31.073	PK
4		2483.500	55.160	24.067	-18.840	74.000	31.093	PK
5		2486.035	59.104	28.009	-14.896	74.000	31.095	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

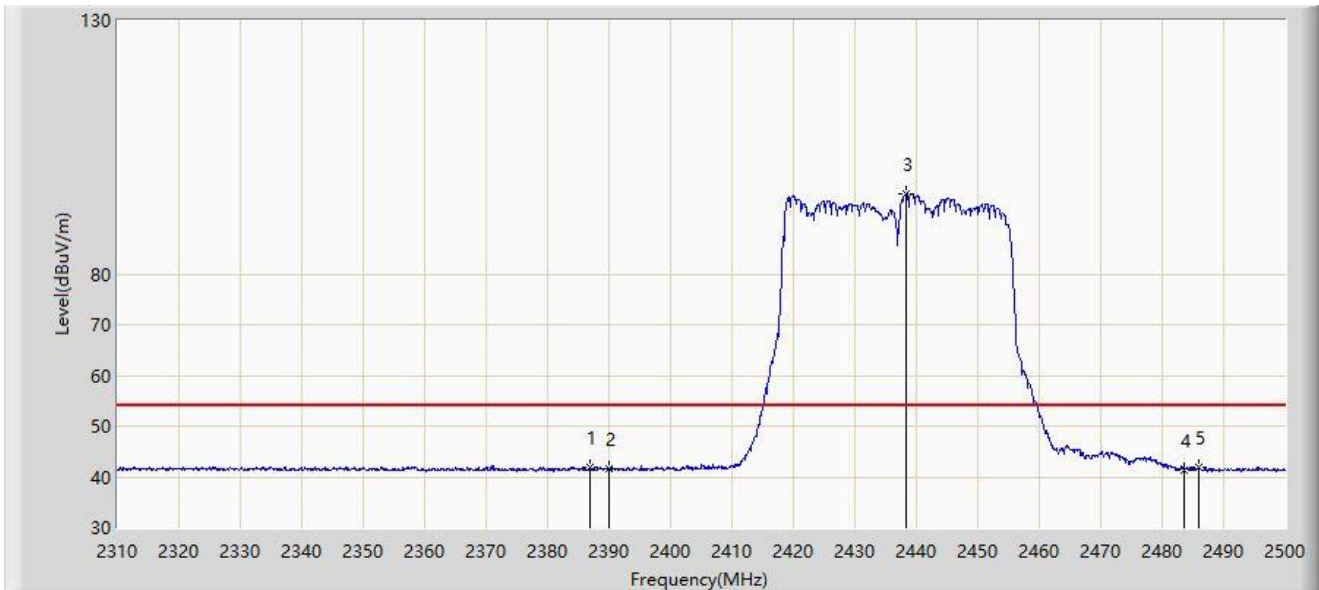


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2386.855	41.880	10.720	-12.120	54.000	31.160	AV
2		2390.000	41.592	10.434	-12.408	54.000	31.158	AV
3		2438.250	95.685	64.614	N/A	N/A	31.071	AV
4		2483.500	41.430	10.337	-12.570	54.000	31.093	AV
5	*	2485.845	41.995	10.900	-12.005	54.000	31.095	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

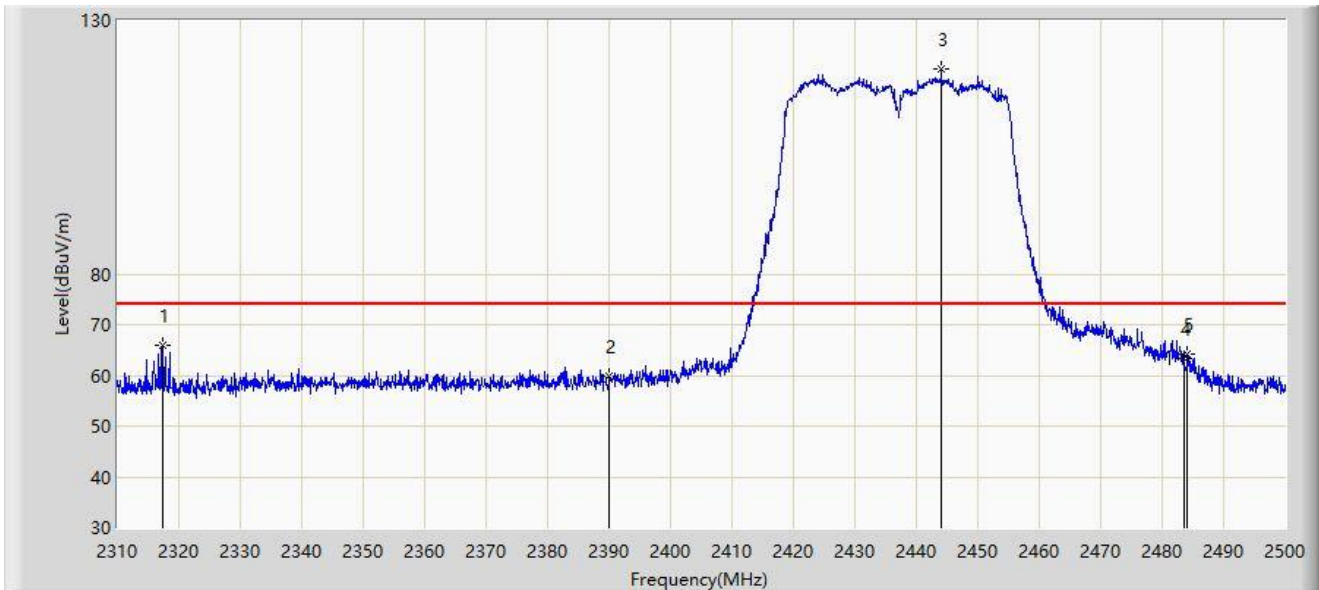


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2317.410	65.930	34.529	-8.070	74.000	31.401	PK
2		2390.000	59.824	28.666	-14.176	74.000	31.158	PK
3		2444.045	120.383	89.305	N/A	N/A	31.078	PK
4		2483.500	63.365	32.272	-10.635	74.000	31.093	PK
5		2484.040	64.153	33.060	-9.847	74.000	31.094	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

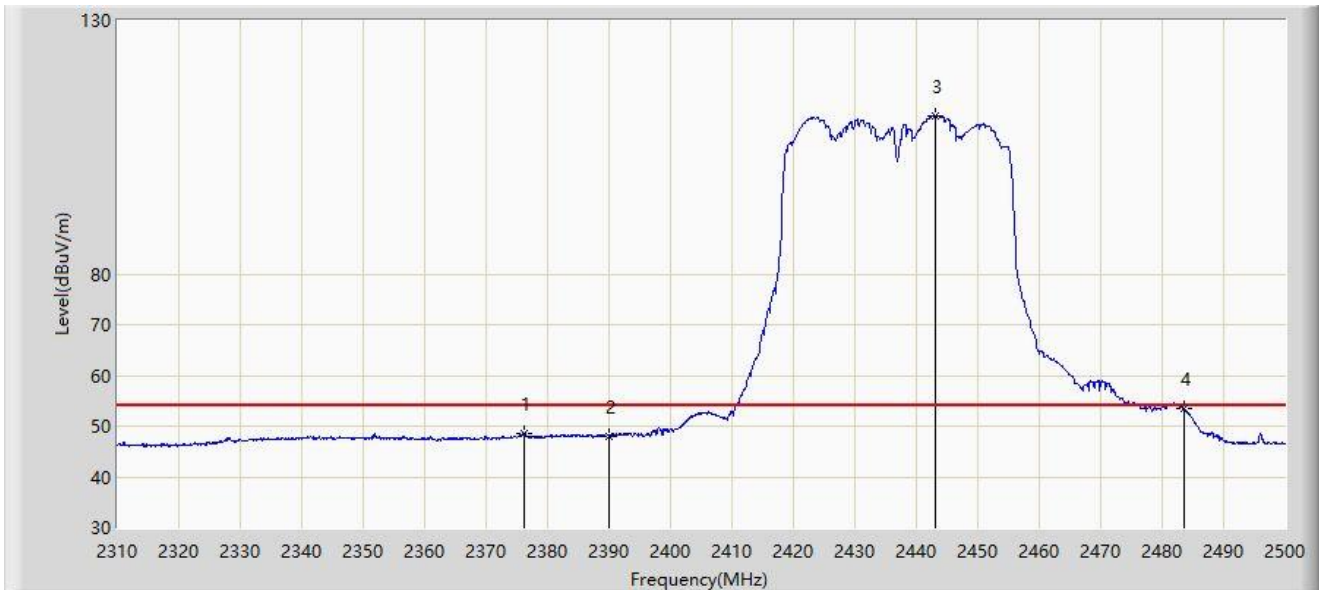


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2376.120	48.470	17.278	-5.530	54.000	31.192	AV
2		2390.000	48.056	16.898	-5.944	54.000	31.158	AV
3		2443.095	111.129	80.052	N/A	N/A	31.076	AV
4	*	2483.500	53.527	22.434	-0.473	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

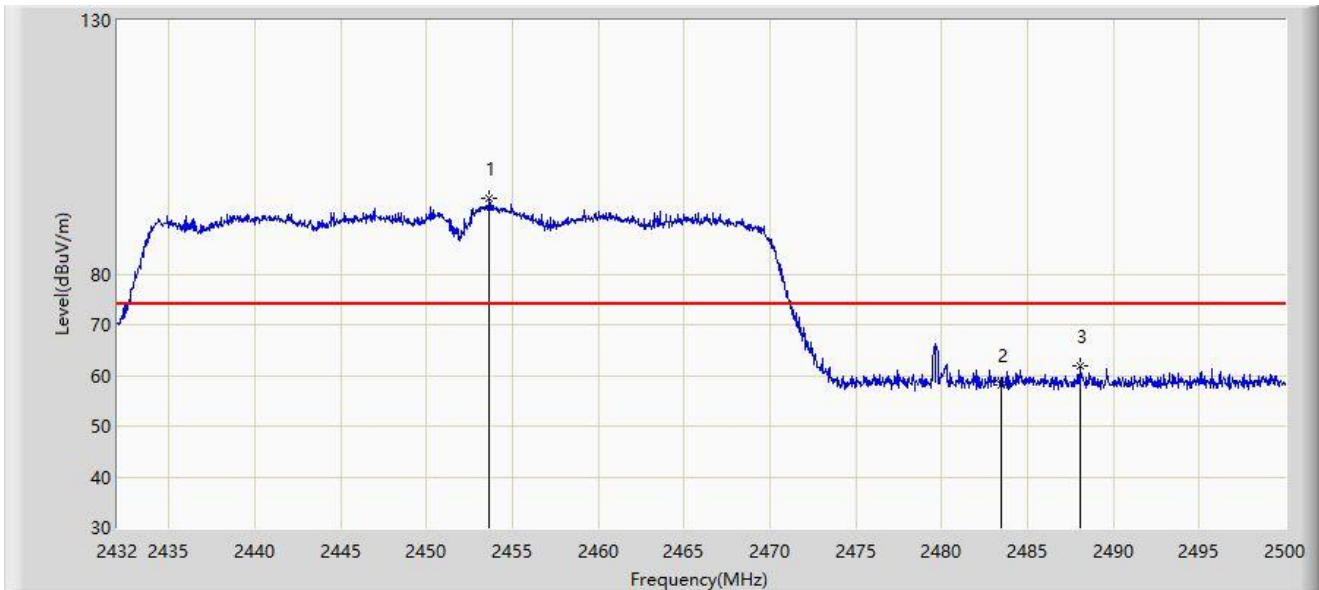


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2453.658	94.827	63.736	N/A	N/A	31.091	PK
2		2483.500	57.972	26.879	-16.028	74.000	31.093	PK
3	*	2488.032	61.952	30.855	-12.048	74.000	31.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

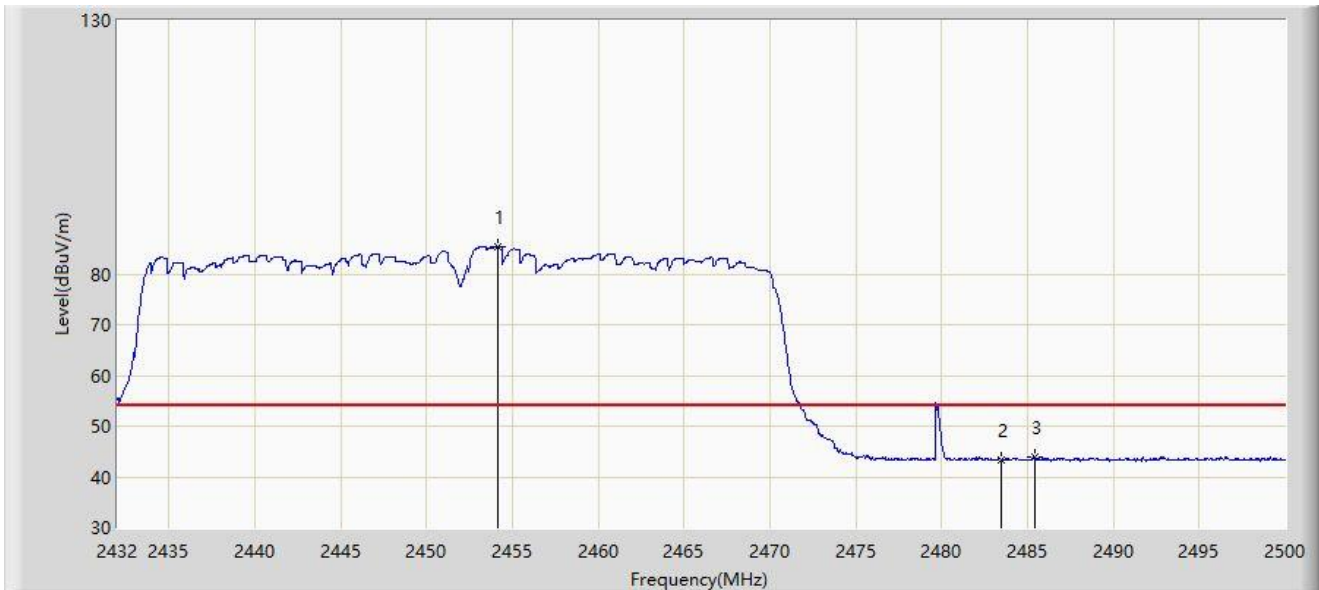


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2454.134	85.451	54.360	N/A	N/A	31.091	AV
2		2483.500	43.247	12.154	-10.753	54.000	31.093	AV
3	*	2485.448	43.937	12.843	-10.063	54.000	31.095	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

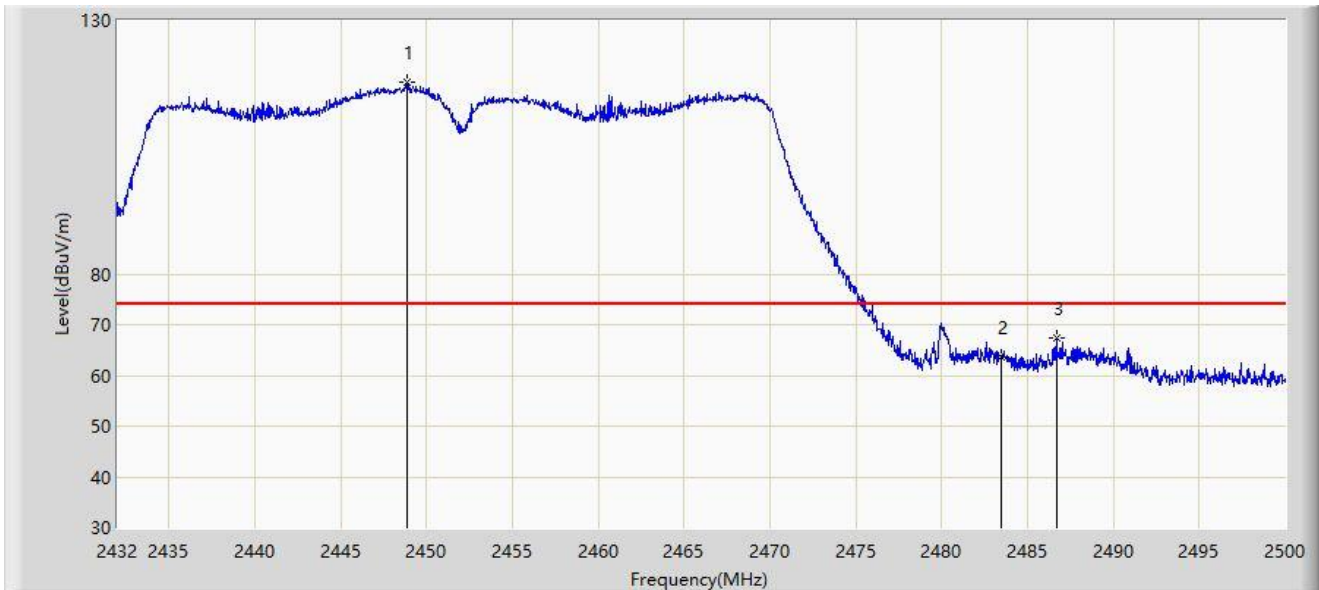


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2448.898	117.878	86.794	N/A	N/A	31.084	PK
2		2483.500	63.732	32.639	-10.268	74.000	31.093	PK
3	*	2486.672	67.454	36.359	-6.546	74.000	31.096	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-23
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

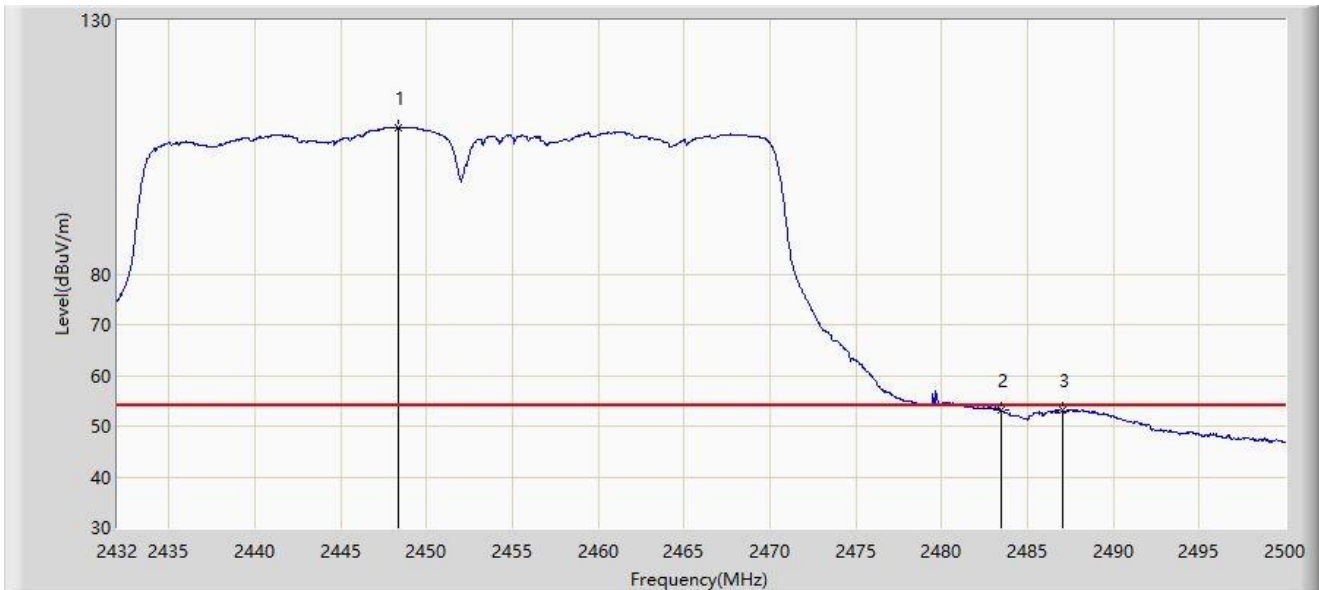


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2448.354	108.860	77.777	N/A	N/A	31.084	AV
2		2483.500	53.110	22.017	-0.890	54.000	31.093	AV
3	*	2487.080	53.180	22.084	-0.820	54.000	31.096	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

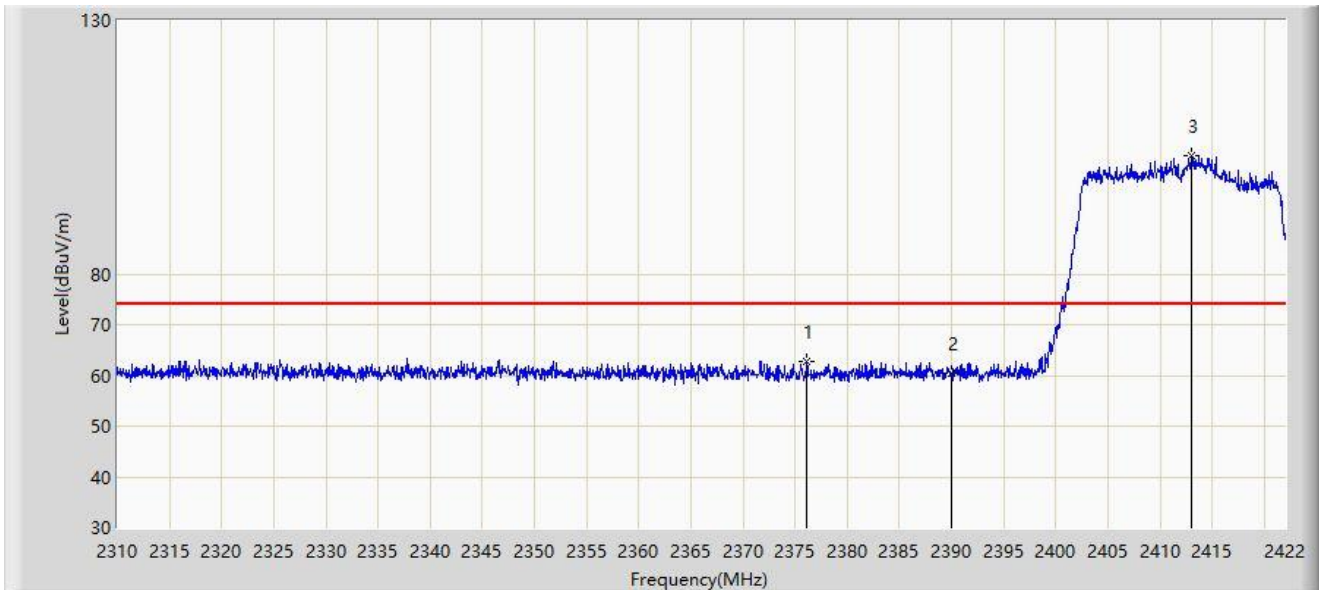


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2376.136	62.712	31.520	-11.288	74.000	31.192	PK
2		2390.000	60.409	29.251	-13.591	74.000	31.158	PK
3		2412.984	103.191	72.059	N/A	N/A	31.132	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

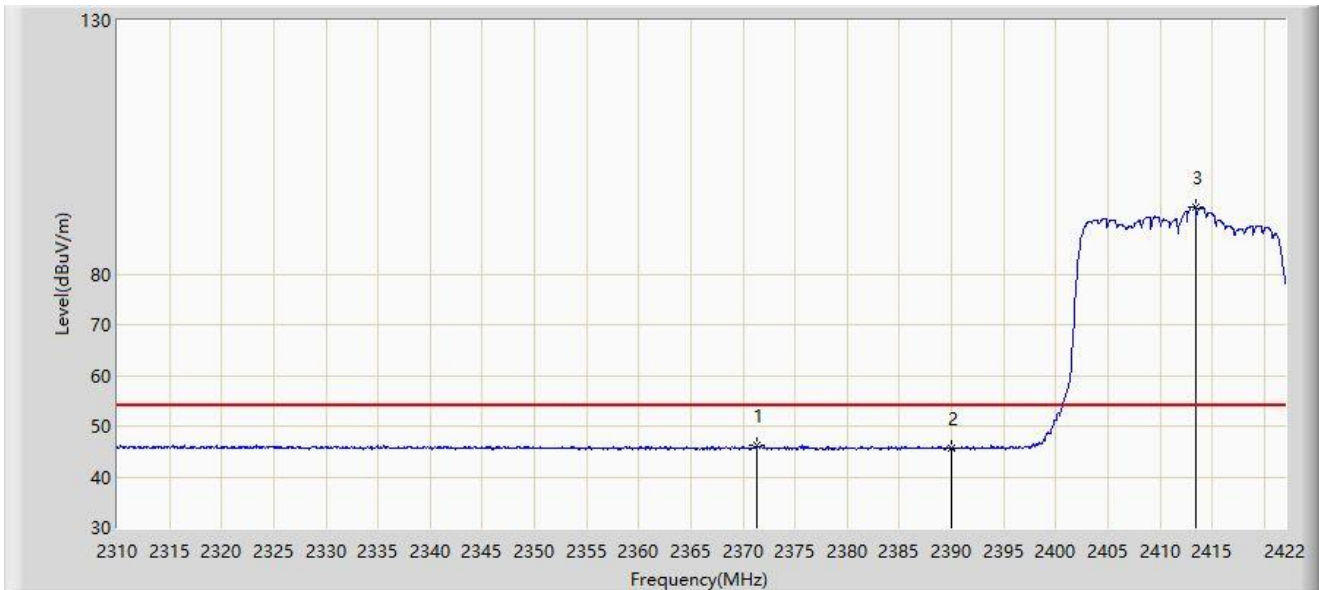


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2371.264	46.088	14.874	-7.912	54.000	31.214	AV
2		2390.000	45.614	14.456	-8.386	54.000	31.158	AV
3		2413.432	93.205	62.073	N/A	N/A	31.131	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

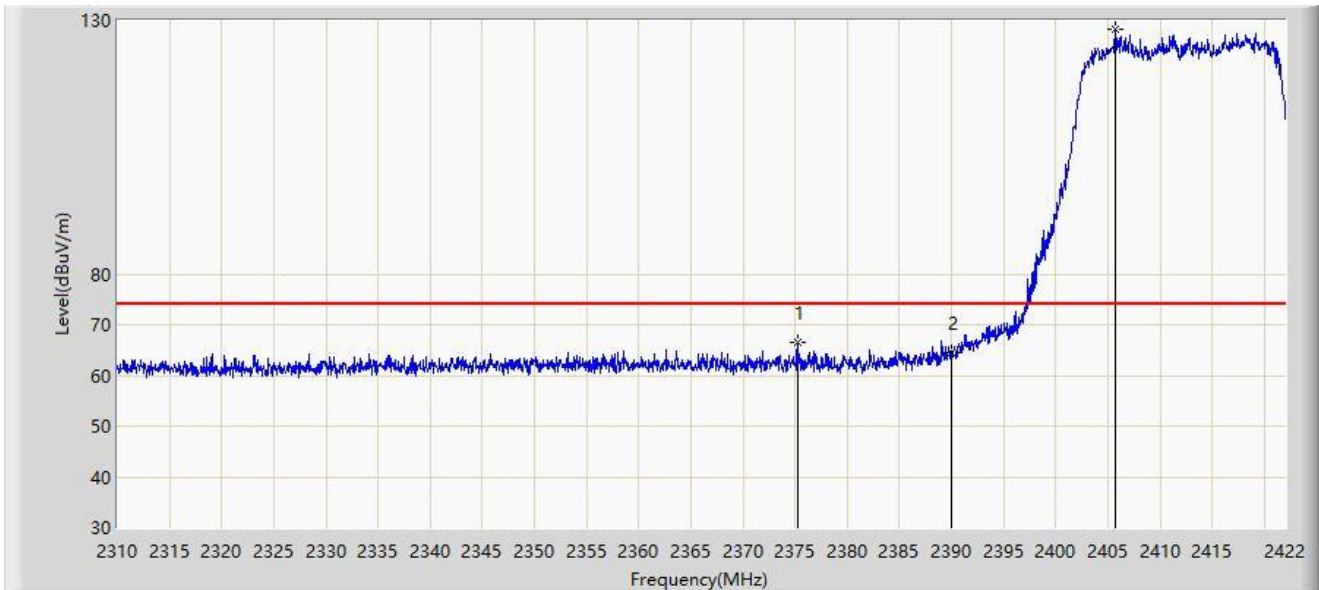


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2375.296	66.549	35.353	-7.451	74.000	31.196	PK
2		2390.000	64.490	33.332	-9.510	74.000	31.158	PK
3		2405.704	128.275	97.130	N/A	N/A	31.145	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

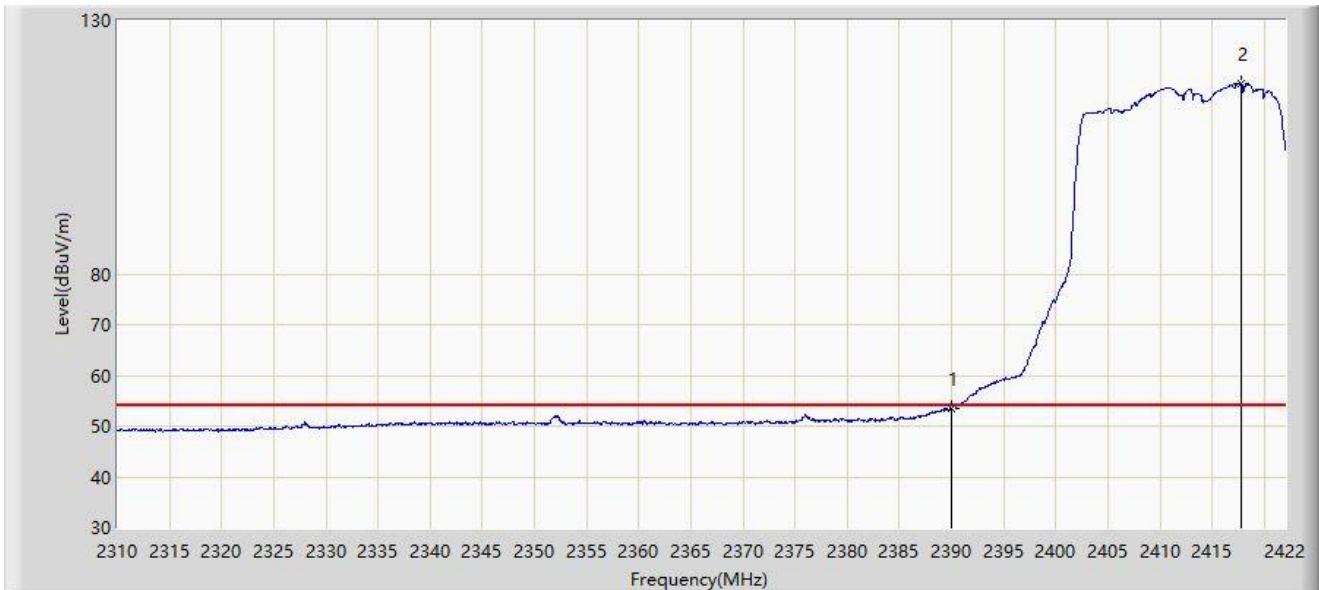


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	53.586	22.428	-0.414	54.000	31.158	AV
2		2417.800	117.480	86.353	N/A	N/A	31.127	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

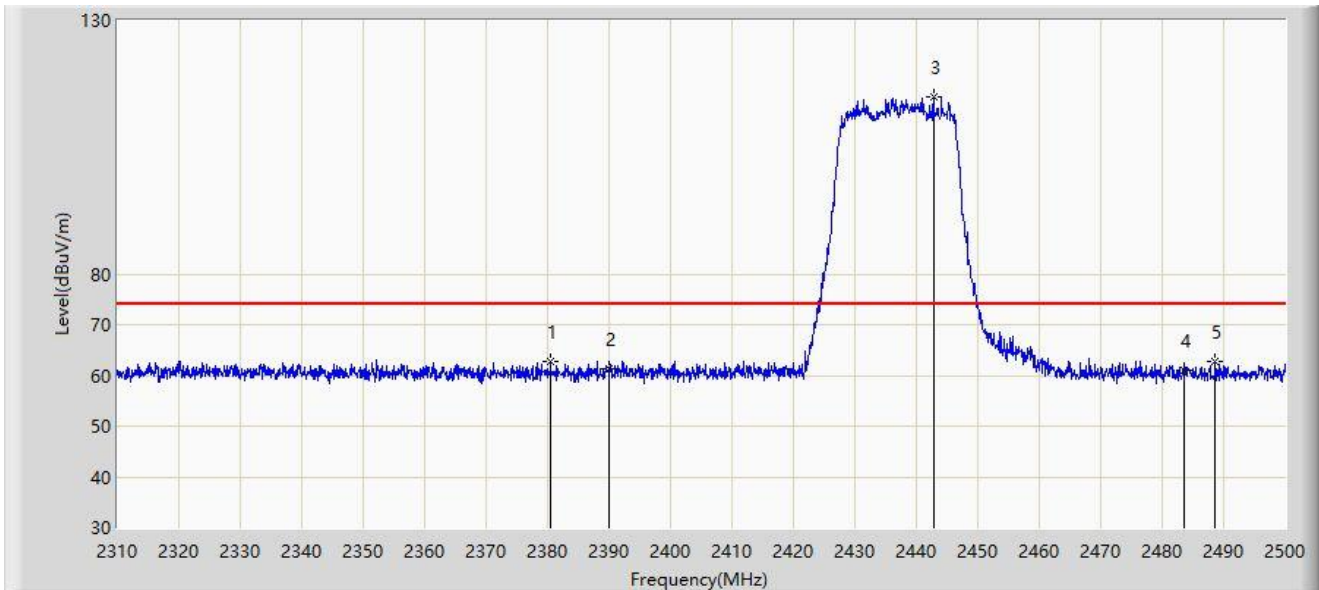


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2380.490	62.729	31.554	-11.271	74.000	31.176	PK
2		2390.000	61.442	30.284	-12.558	74.000	31.158	PK
3		2442.810	114.949	83.873	N/A	N/A	31.077	PK
4		2483.500	61.115	30.022	-12.885	74.000	31.093	PK
5		2488.600	62.682	31.585	-11.318	74.000	31.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

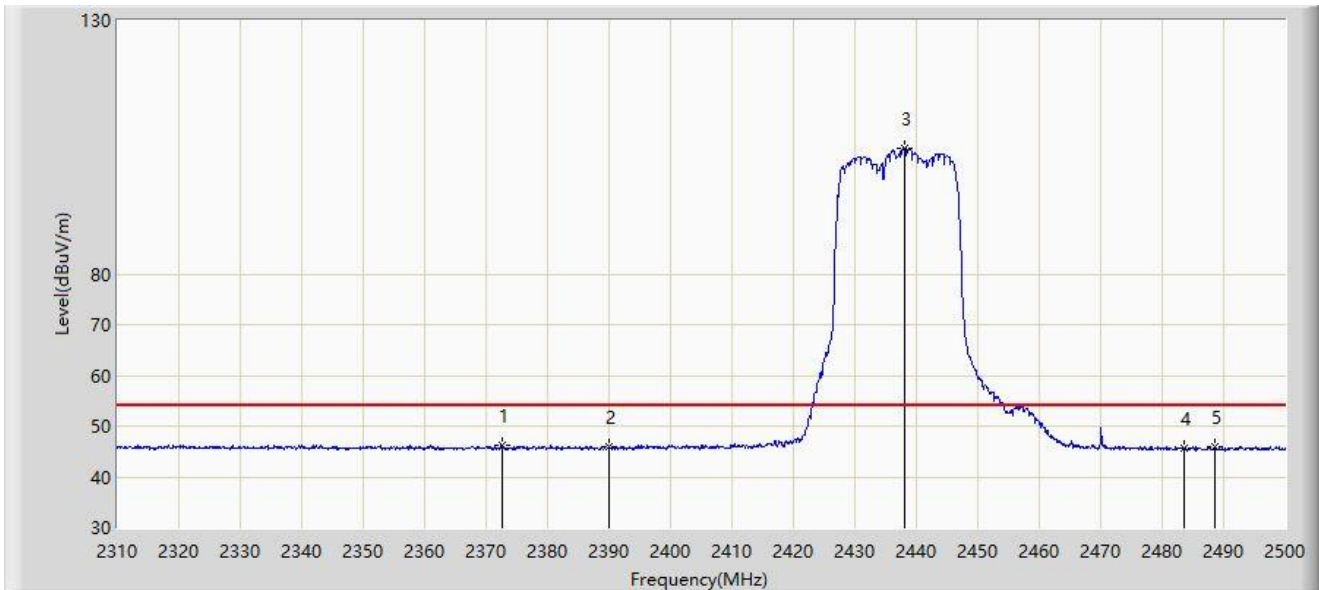


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2372.510	46.118	14.910	-7.882	54.000	31.208	AV
2		2390.000	45.805	14.647	-8.195	54.000	31.158	AV
3		2438.155	104.886	73.815	N/A	N/A	31.071	AV
4		2483.500	45.634	14.541	-8.366	54.000	31.093	AV
5		2488.600	45.998	14.901	-8.002	54.000	31.097	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

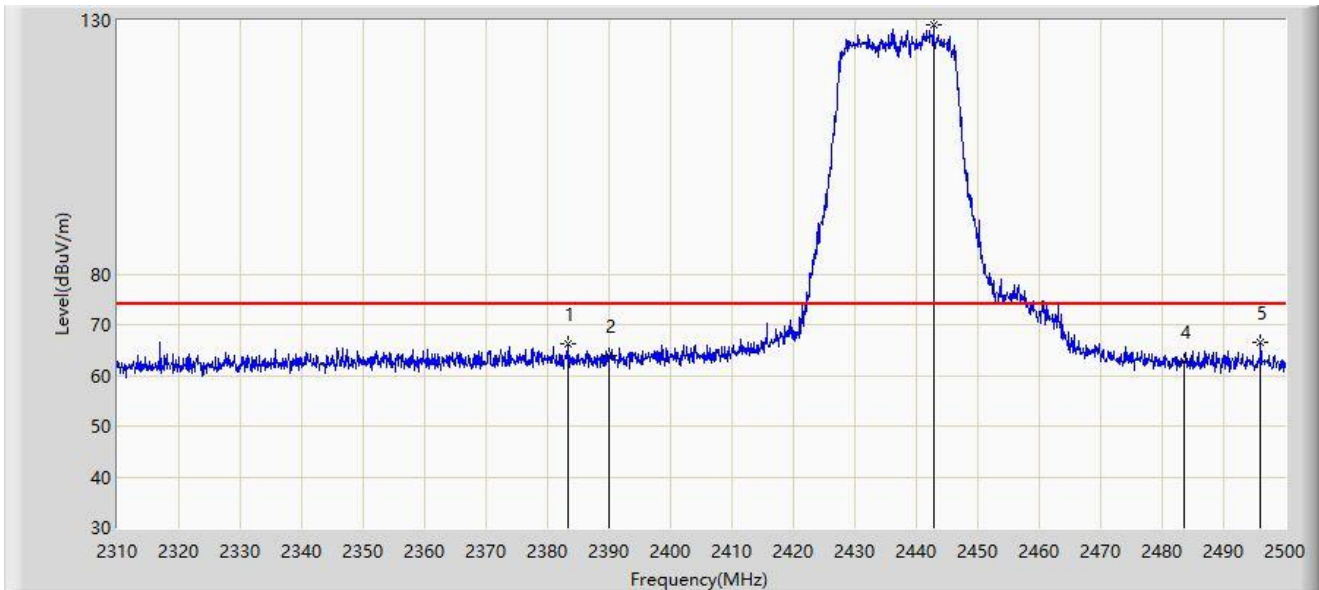


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2383.245	66.284	35.119	-7.716	74.000	31.165	PK
2		2390.000	63.788	32.630	-10.212	74.000	31.158	PK
3		2442.810	129.191	98.115	N/A	N/A	31.077	PK
4		2483.500	62.725	31.632	-11.275	74.000	31.093	PK
5	*	2496.010	66.389	35.287	-7.611	74.000	31.102	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

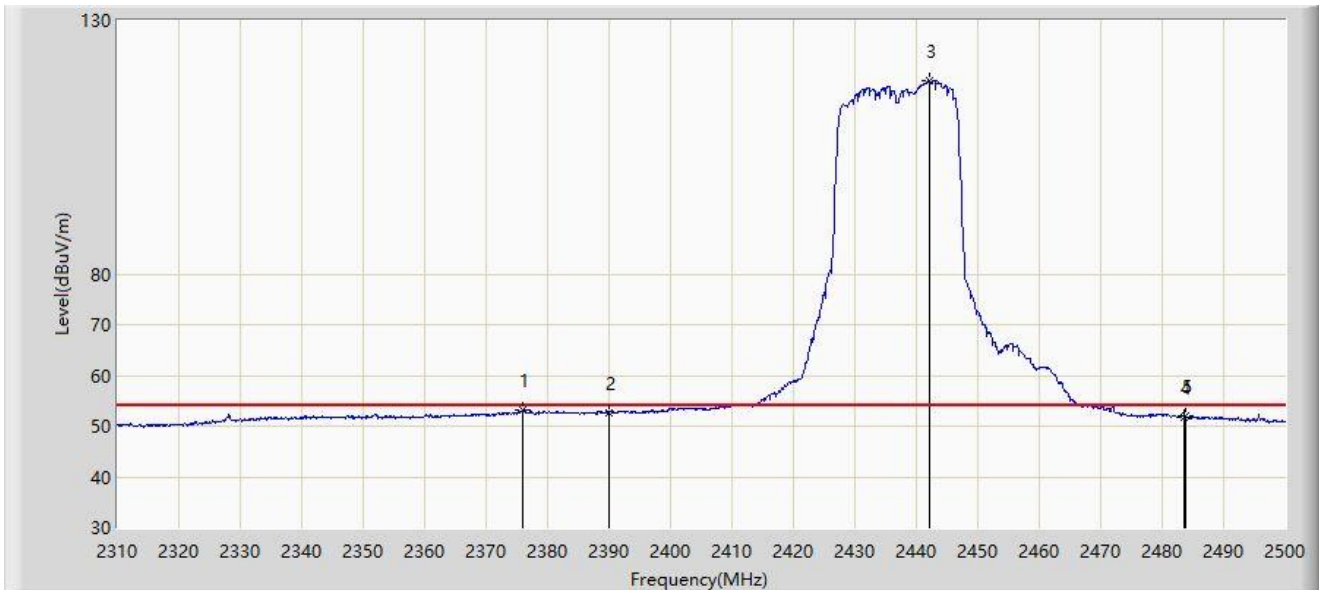


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2376.025	53.196	22.003	-0.804	54.000	31.193	AV
2		2390.000	52.674	21.516	-1.326	54.000	31.158	AV
3		2442.050	118.077	87.002	N/A	N/A	31.075	AV
4		2483.500	51.723	20.630	-2.277	54.000	31.093	AV
5		2483.850	52.050	20.957	-1.950	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

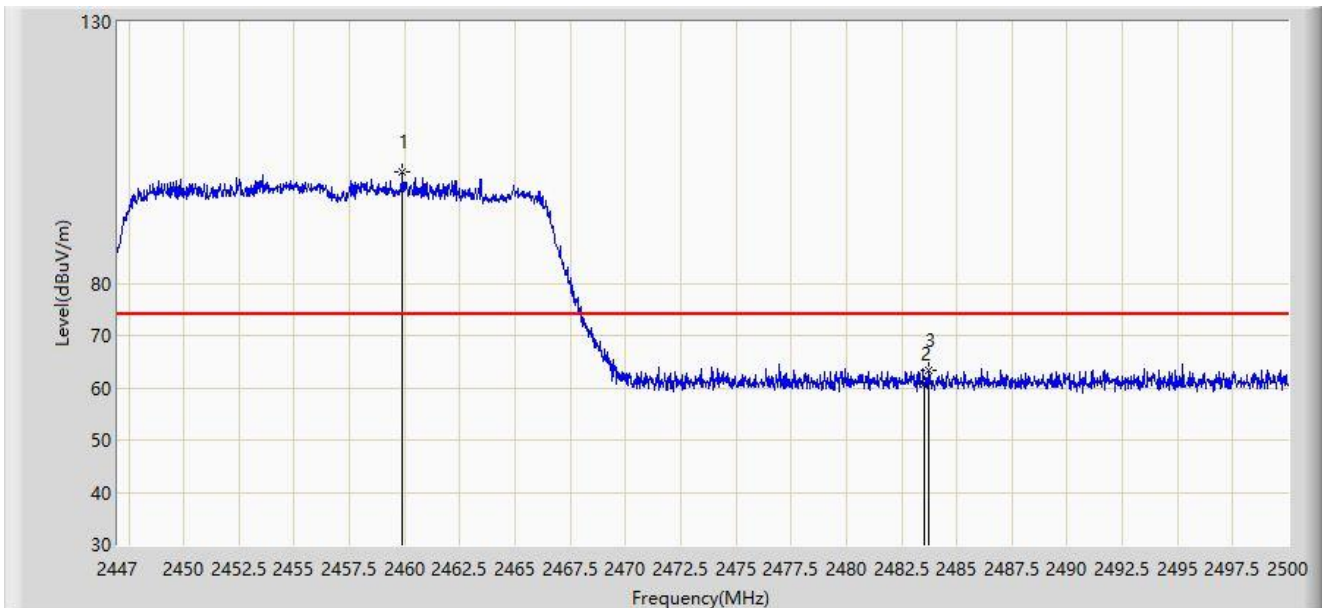


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.906	101.348	70.257	N/A	N/A	31.091	PK
2		2483.500	60.594	29.501	-13.406	74.000	31.093	PK
3	*	2483.729	63.366	32.273	-10.634	74.000	31.093	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

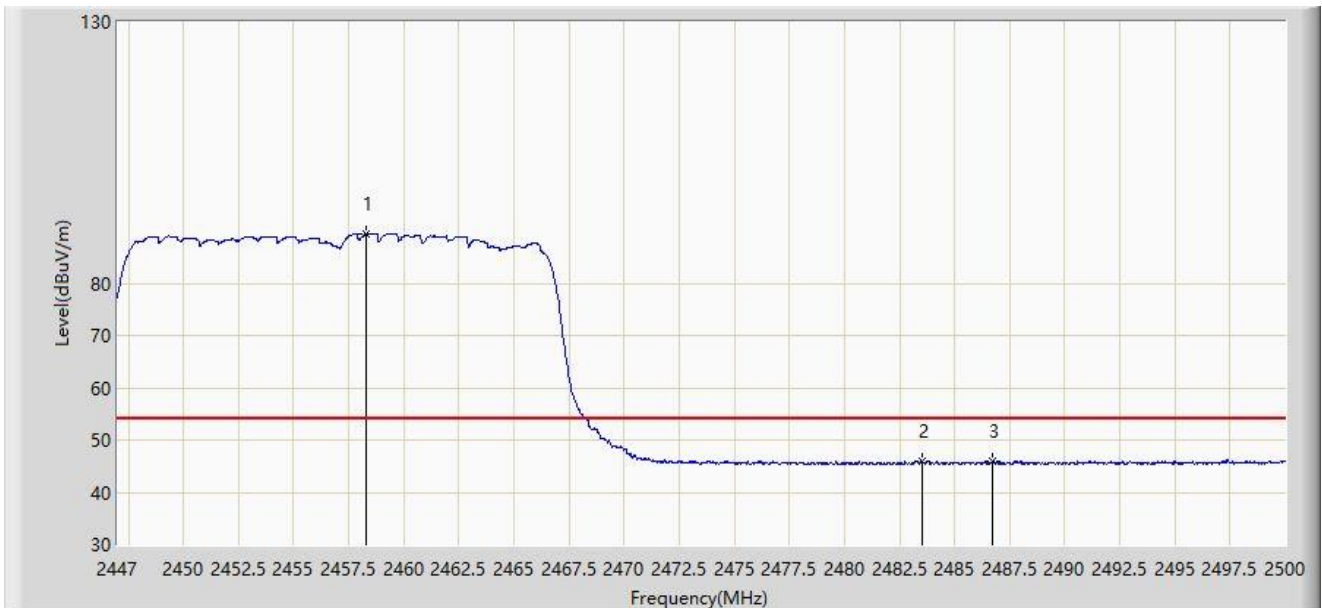


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.315	89.480	58.388	N/A	N/A	31.092	AV
2		2483.500	45.811	14.718	-8.189	54.000	31.093	AV
3	*	2486.697	46.056	14.961	-7.944	54.000	31.096	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

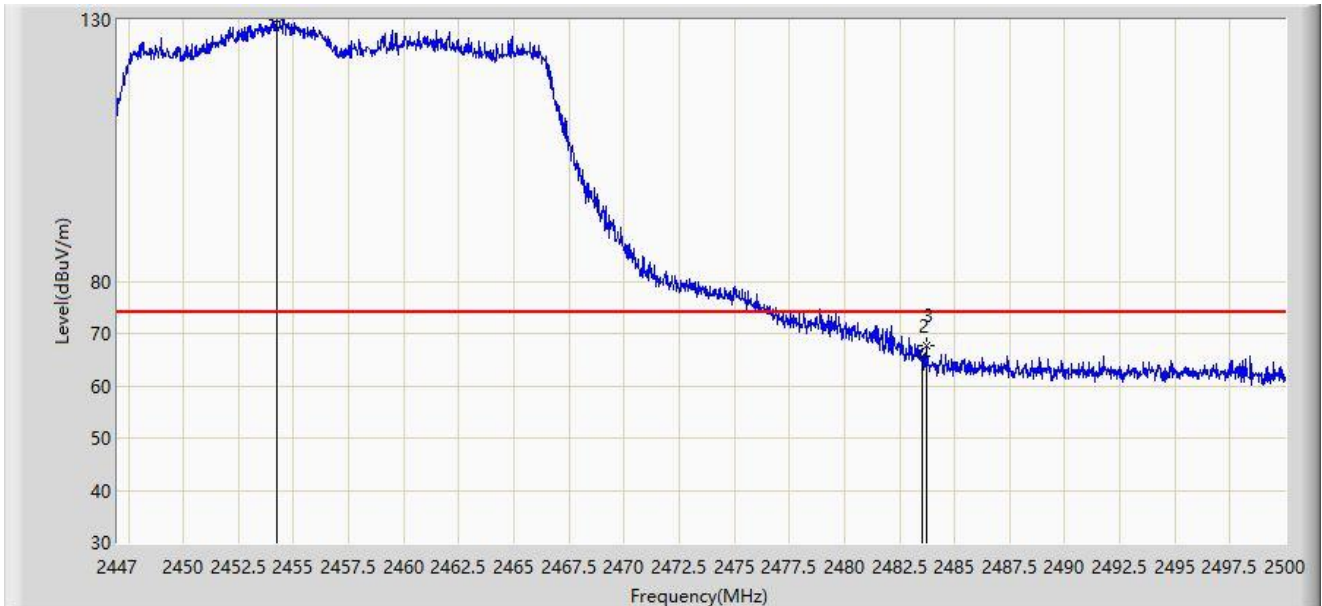


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2454.208	130.048	98.957	N/A	N/A	31.091	PK
2		2483.500	65.719	34.626	-8.281	74.000	31.093	PK
3	*	2483.702	67.700	36.607	-6.300	74.000	31.093	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-06-26
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

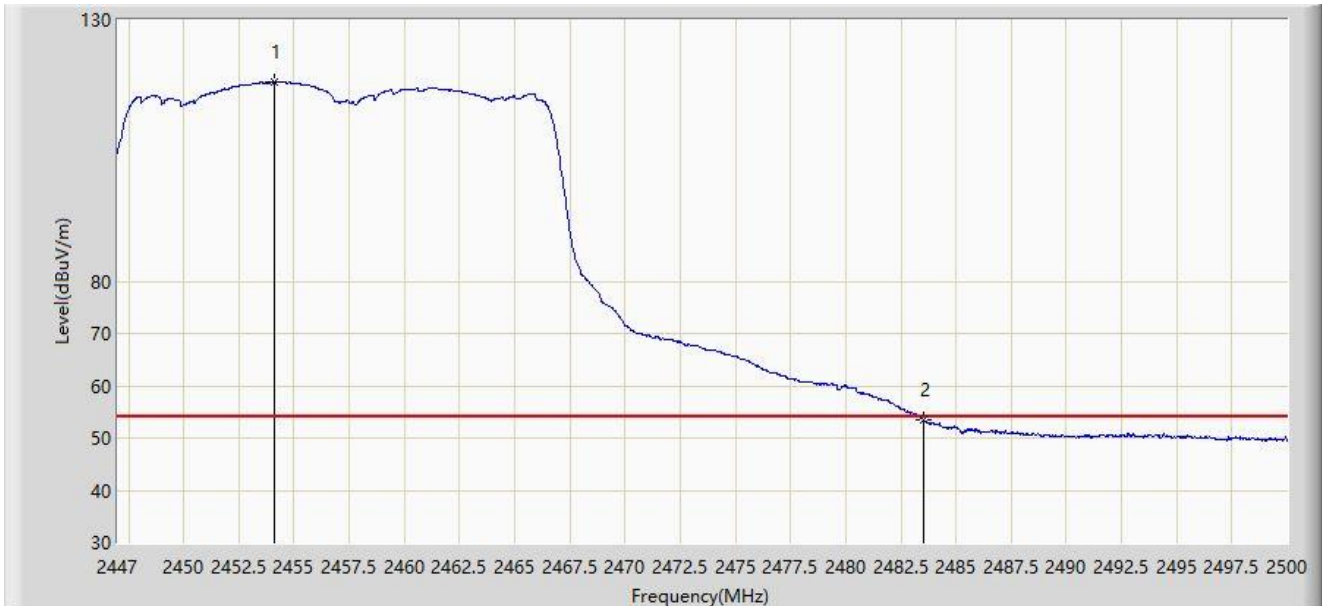


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2454.102	118.057	86.966	N/A	N/A	31.091	AV
2	*	2483.500	53.583	22.490	-0.417	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

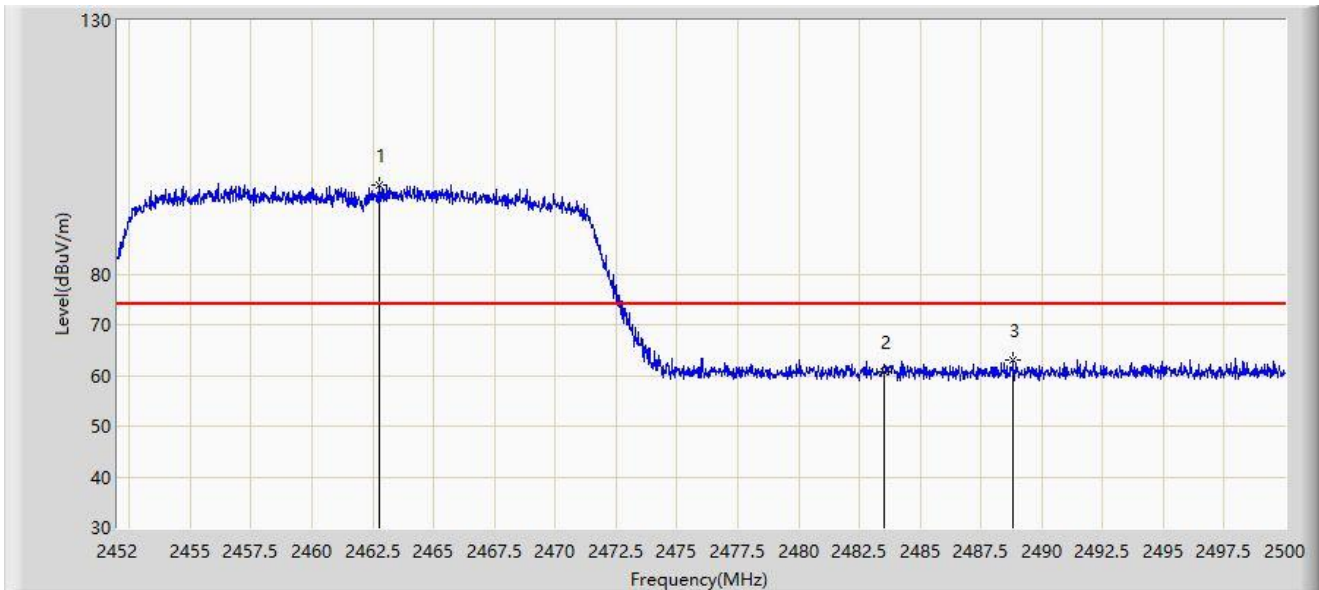


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.776	97.653	66.564	N/A	N/A	31.089	PK
2		2483.500	60.729	29.636	-13.271	74.000	31.093	PK
3	*	2488.840	63.055	31.958	-10.945	74.000	31.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

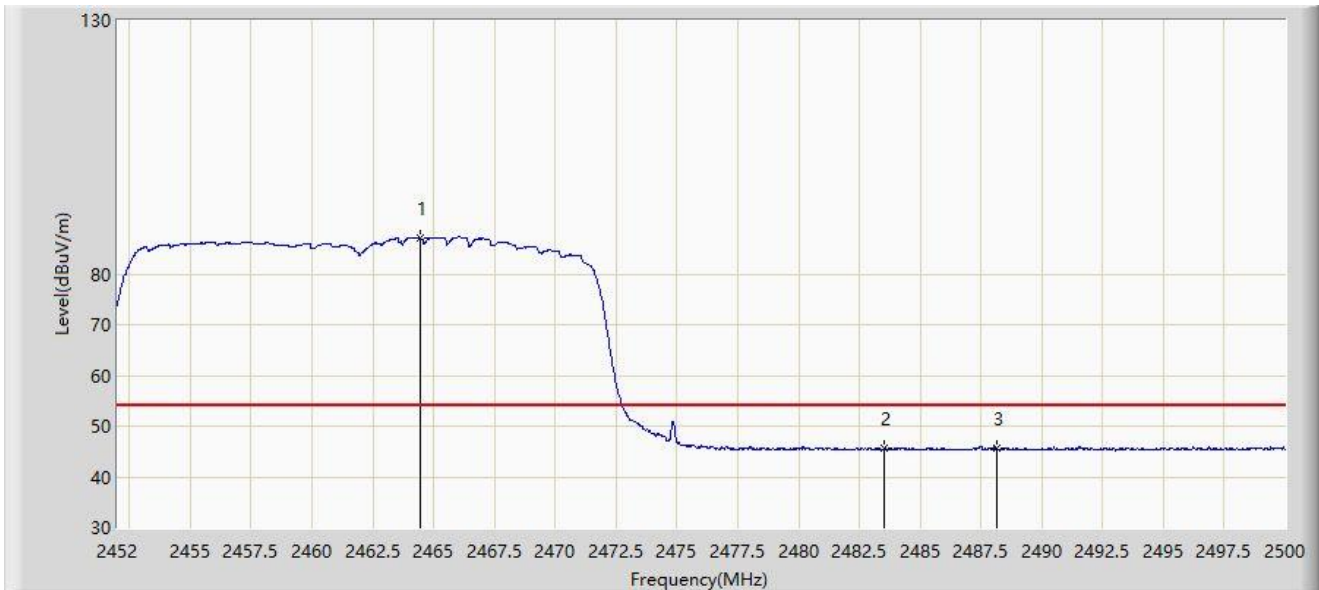


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2464.432	87.214	56.125	N/A	N/A	31.089	AV
2		2483.500	45.514	14.421	-8.486	54.000	31.093	AV
3	*	2488.168	45.750	14.653	-8.250	54.000	31.097	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

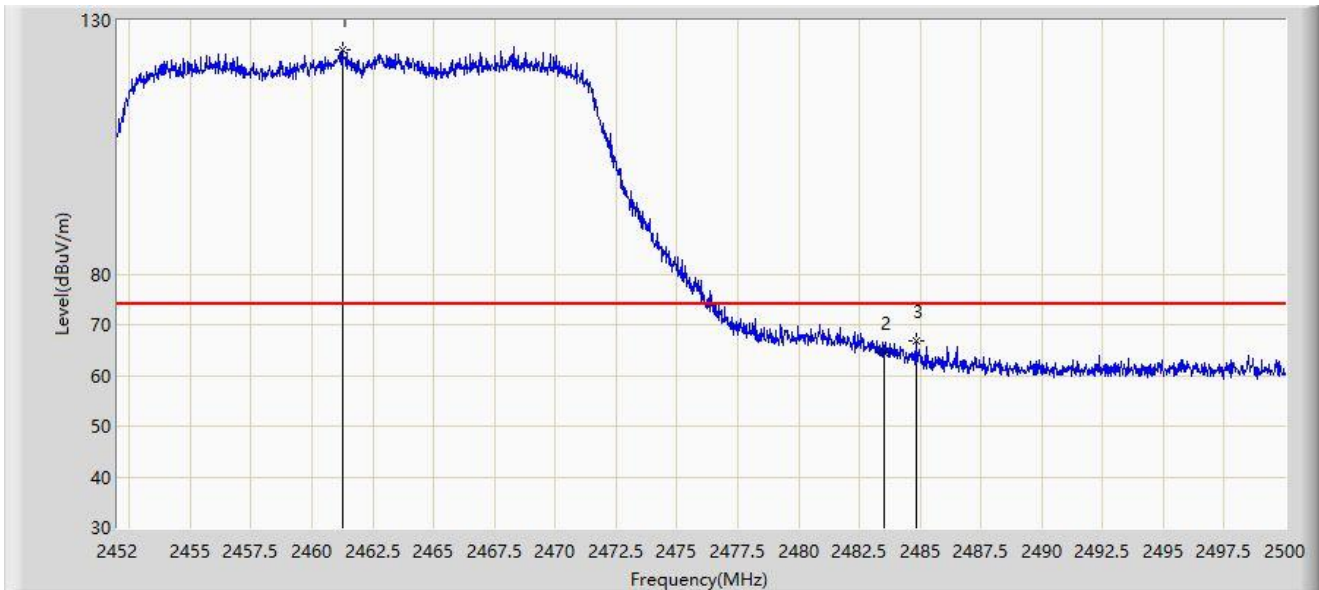


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.240	124.282	93.192	N/A	N/A	31.090	PK
2		2483.500	64.374	33.281	-9.626	74.000	31.093	PK
3	*	2484.856	66.704	35.610	-7.296	74.000	31.094	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

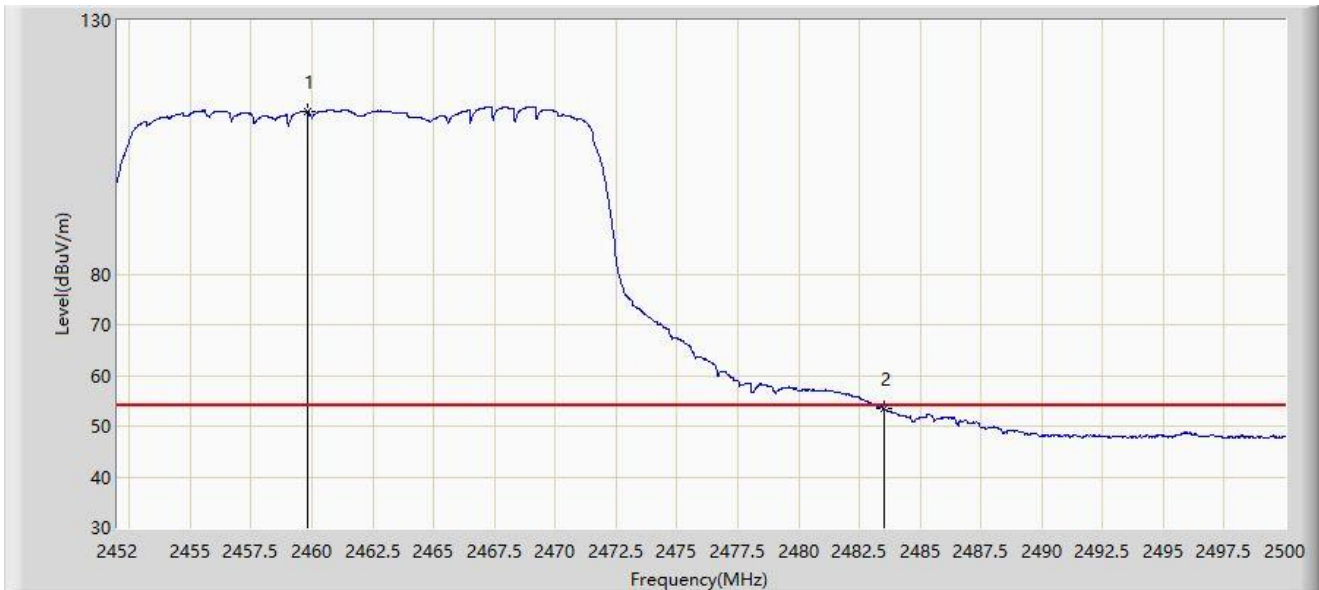


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.824	112.144	81.053	N/A	N/A	31.091	AV
2	*	2483.500	53.356	22.263	-0.644	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

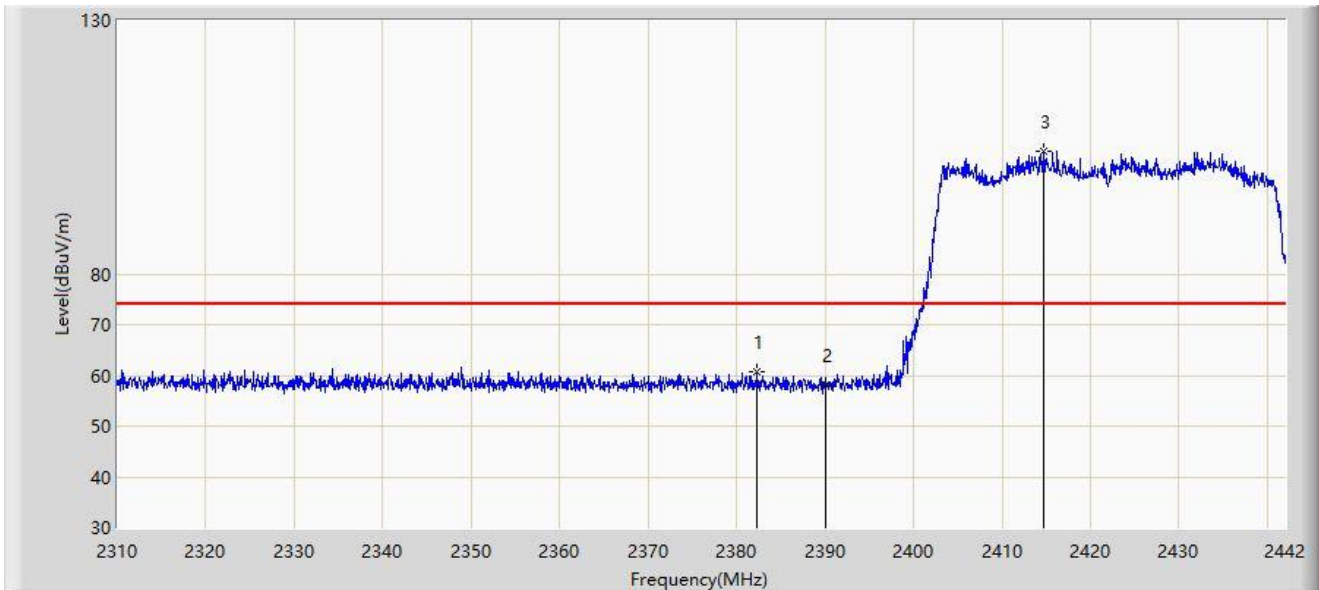


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2382.336	60.591	29.423	-13.409	74.000	31.168	PK
2		2390.000	58.167	27.009	-15.833	74.000	31.158	PK
3		2414.742	104.146	73.016	N/A	N/A	31.131	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

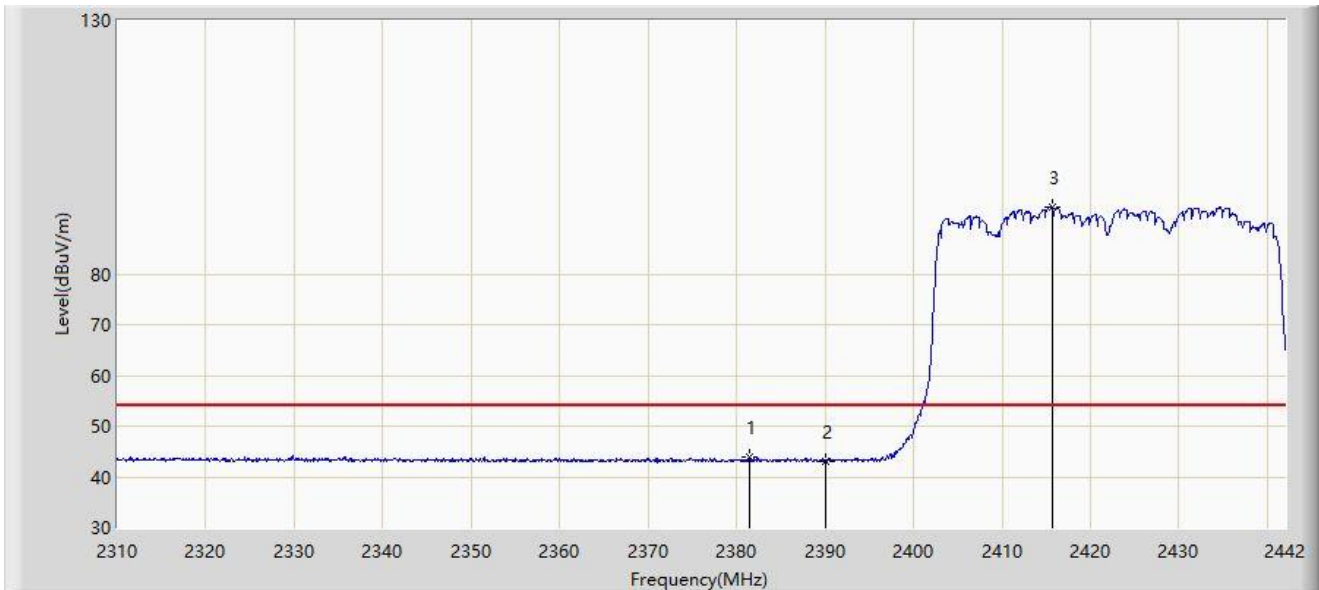


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2381.412	43.826	12.654	-10.174	54.000	31.172	AV
2		2390.000	43.079	11.921	-10.921	54.000	31.158	AV
3		2415.666	93.253	62.123	N/A	N/A	31.129	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

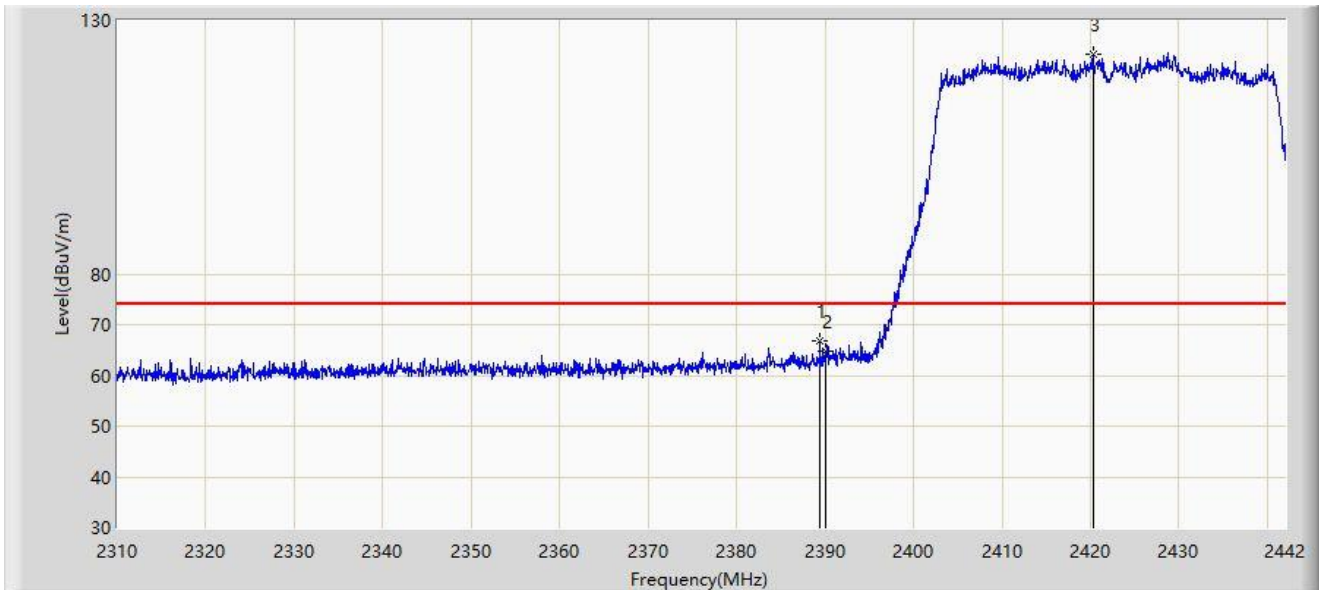


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.398	66.692	35.534	-7.308	74.000	31.159	PK
2		2390.000	64.711	33.553	-9.289	74.000	31.158	PK
3		2420.286	123.422	92.298	N/A	N/A	31.124	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

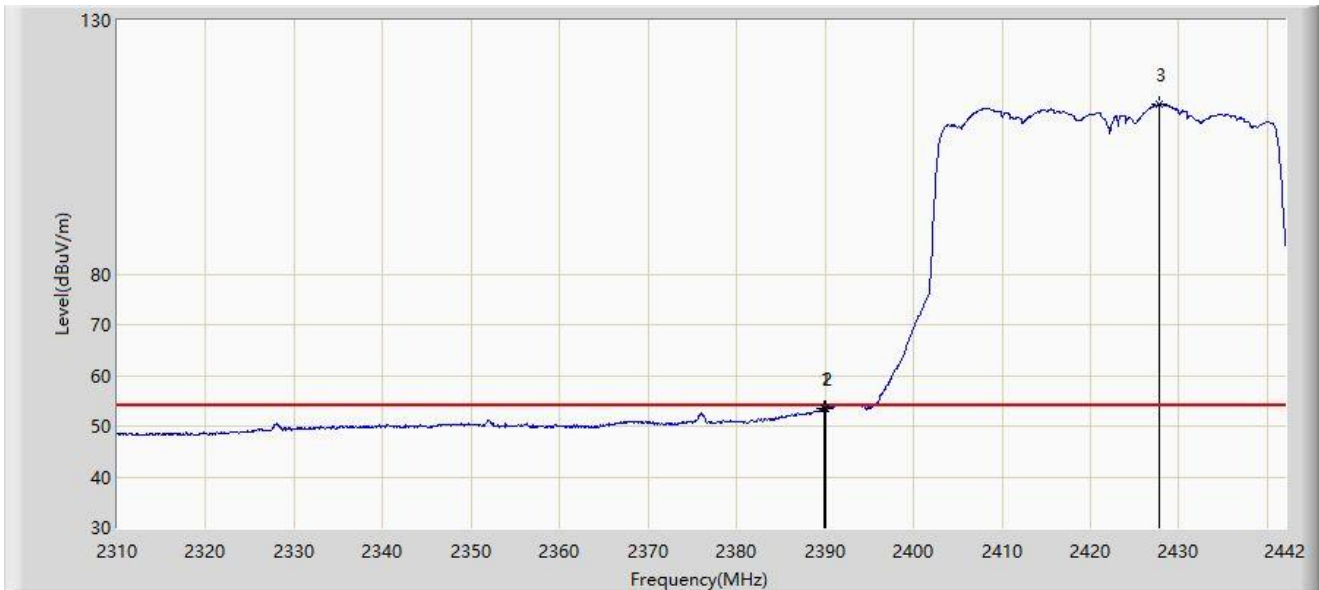


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.860	53.472	22.314	-0.528	54.000	31.158	AV
2		2390.000	53.395	22.237	-0.605	54.000	31.158	AV
3		2427.744	113.420	82.321	N/A	N/A	31.098	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4×4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

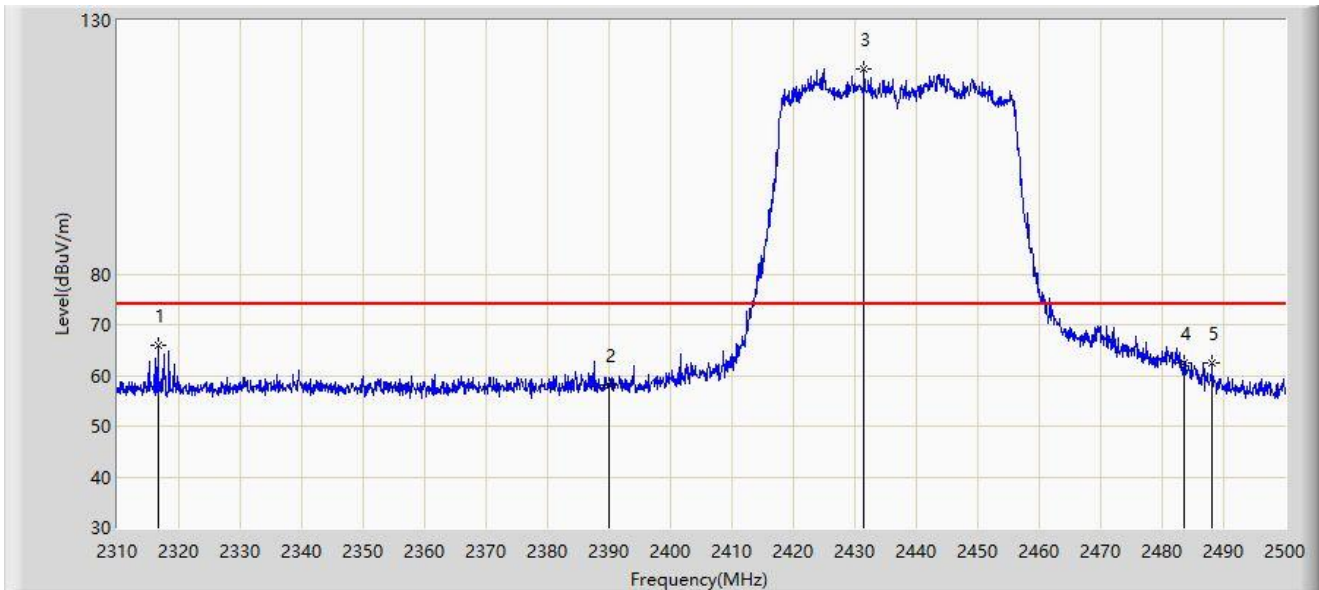


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2316.555	66.053	34.649	-7.947	74.000	31.404	PK
2		2390.000	58.120	26.962	-15.880	74.000	31.158	PK
3		2431.505	120.336	89.248	N/A	N/A	31.088	PK
4		2483.500	62.355	31.262	-11.645	74.000	31.093	PK
5		2488.125	62.571	31.474	-11.429	74.000	31.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

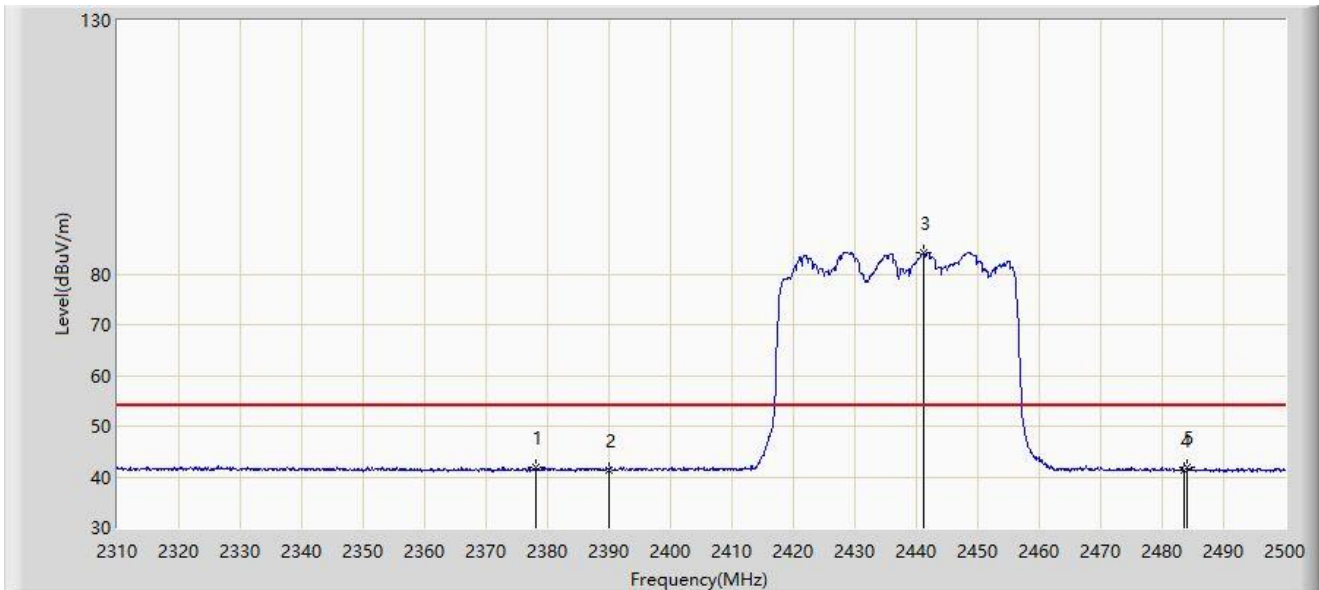


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2378.115	41.913	10.729	-12.087	54.000	31.185	AV
2		2390.000	41.374	10.216	-12.626	54.000	31.158	AV
3		2441.195	84.176	53.102	N/A	N/A	31.074	AV
4		2483.500	41.218	10.125	-12.782	54.000	31.093	AV
5	*	2484.040	41.978	10.885	-12.022	54.000	31.094	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

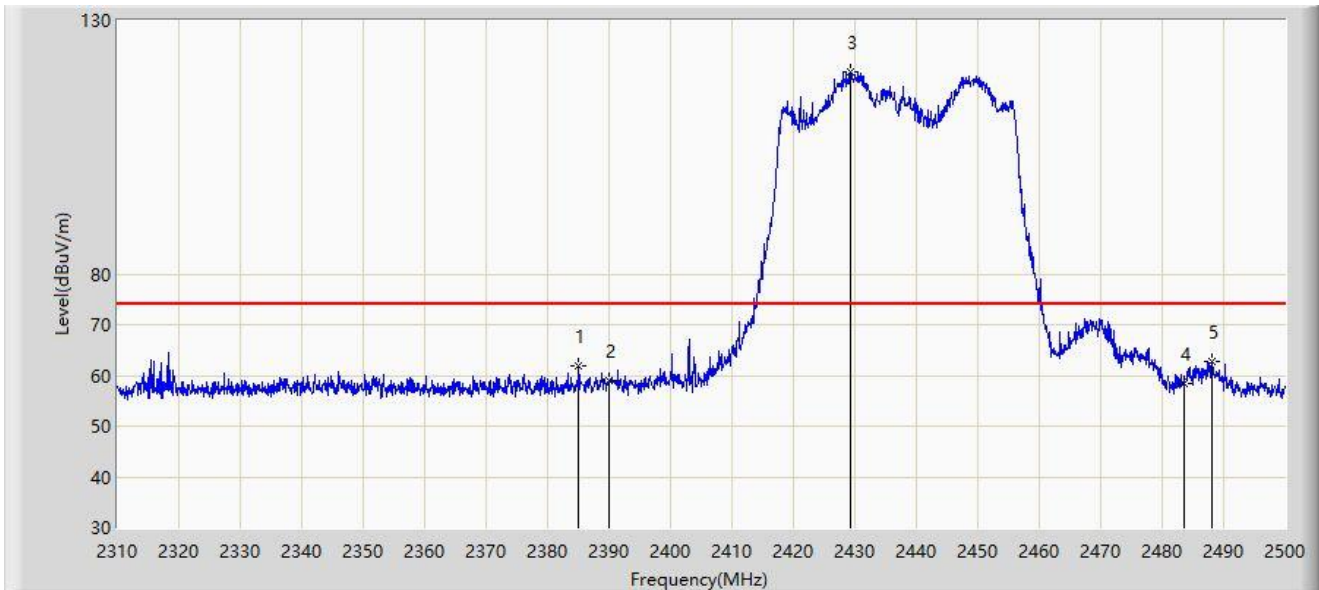


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2385.050	61.880	30.719	-12.120	74.000	31.161	PK
2		2390.000	58.904	27.746	-15.096	74.000	31.158	PK
3		2429.320	119.978	88.884	N/A	N/A	31.094	PK
4		2483.500	58.446	27.353	-15.554	74.000	31.093	PK
5	*	2488.030	62.846	31.749	-11.154	74.000	31.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

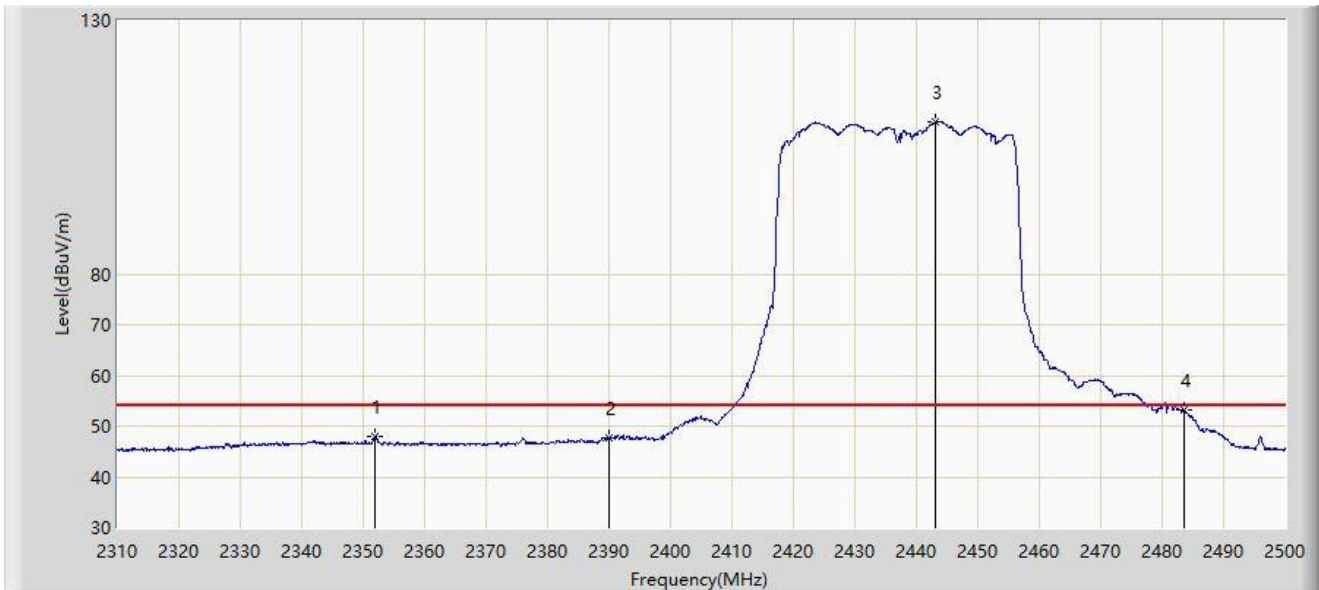


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2351.895	47.904	16.623	-6.096	54.000	31.281	AV
2		2390.000	47.699	16.541	-6.301	54.000	31.158	AV
3		2443.190	110.023	78.946	N/A	N/A	31.077	AV
4	*	2483.500	53.045	21.952	-0.955	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

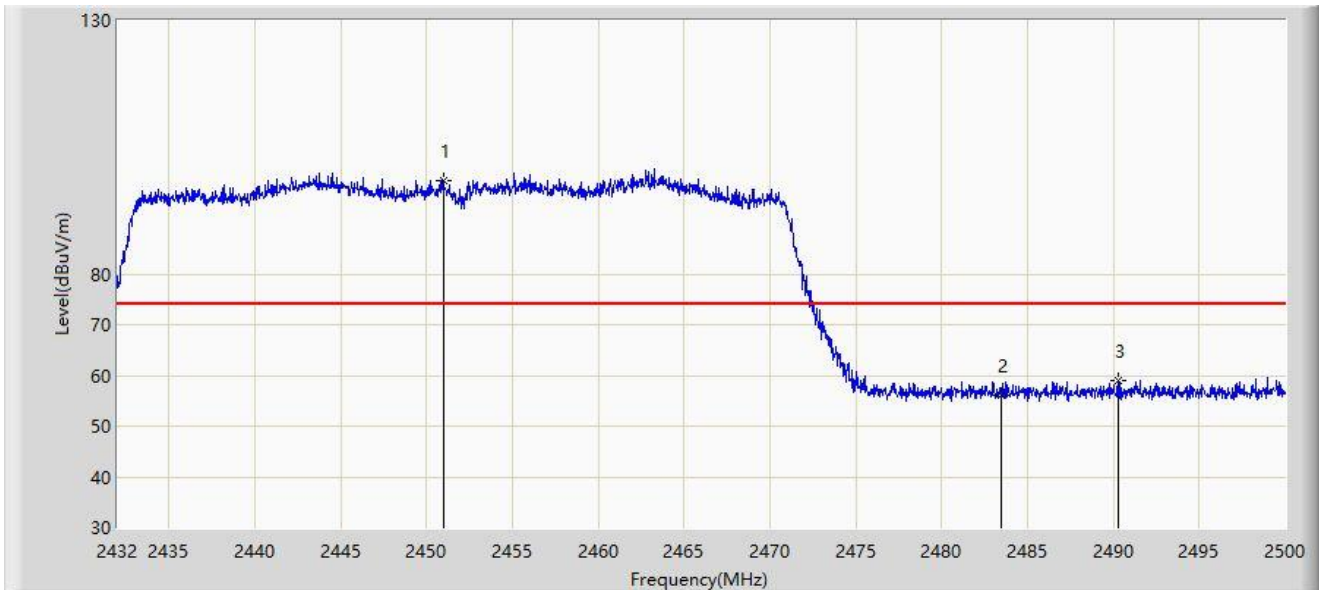


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2451.006	98.542	67.455	N/A	N/A	31.087	PK
2		2483.500	55.950	24.857	-18.050	74.000	31.093	PK
3	*	2490.276	58.982	27.883	-15.018	74.000	31.098	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

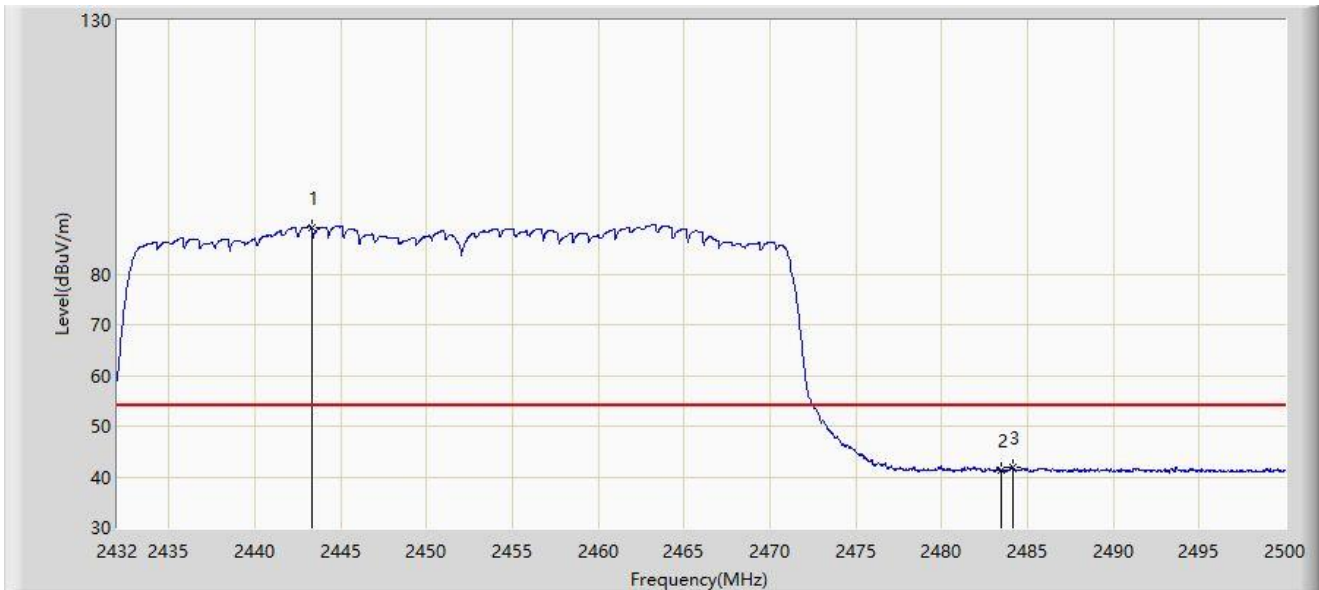


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2443.322	89.237	58.160	N/A	N/A	31.077	AV
2		2483.500	41.392	10.299	-12.608	54.000	31.093	AV
3	*	2484.156	41.893	10.800	-12.107	54.000	31.094	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

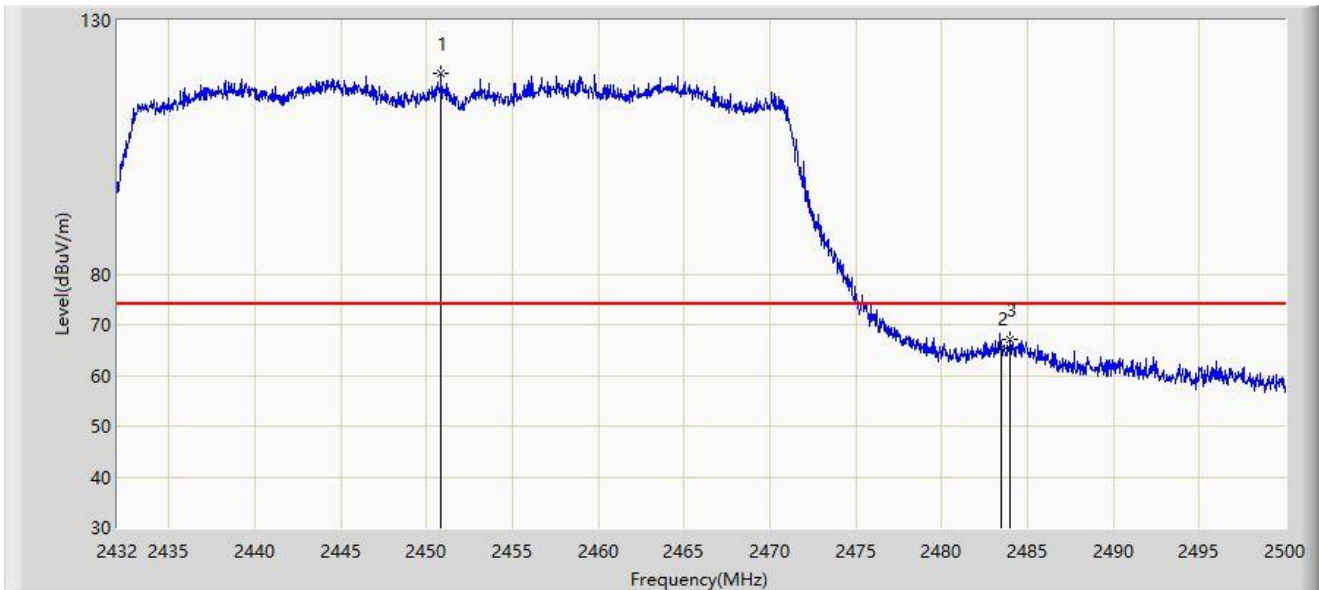


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.870	119.423	88.336	N/A	N/A	31.086	PK
2		2483.500	65.275	34.182	-8.725	74.000	31.093	PK
3	*	2484.020	67.032	35.939	-6.968	74.000	31.094	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-05-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

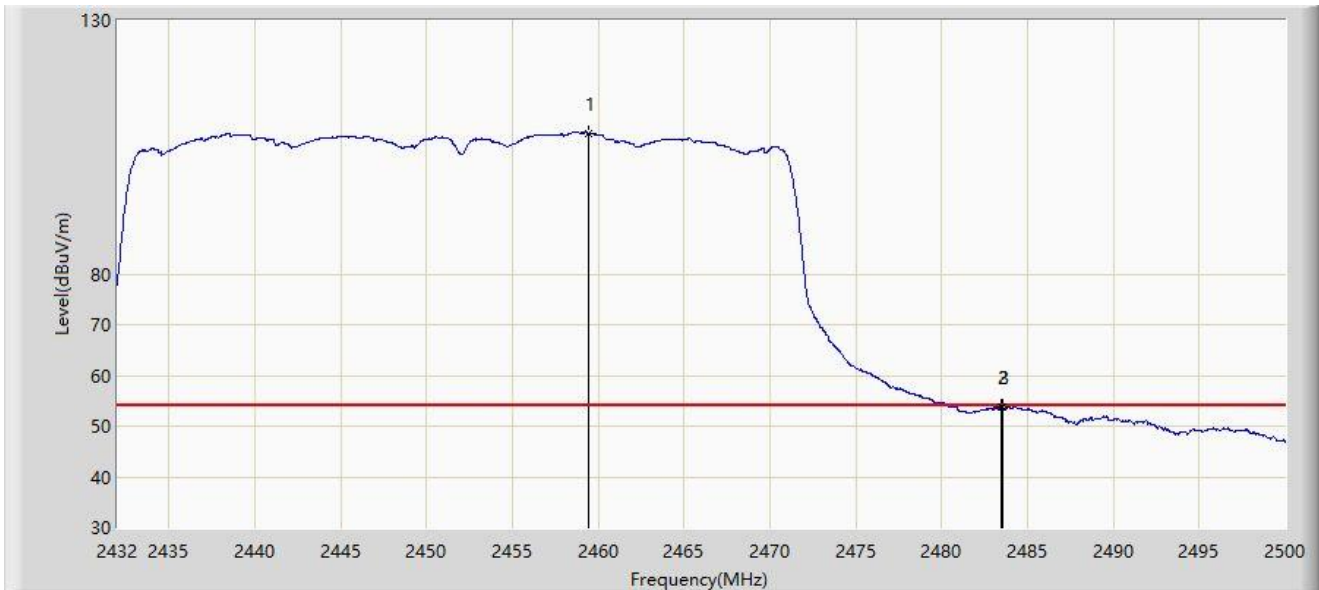

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.472	107.799	76.708	N/A	N/A	31.091	AV
2		2483.500	53.763	22.670	-0.237	54.000	31.093	AV
3	*	2483.578	53.852	22.759	-0.148	54.000	31.093	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2023-06-30
Limit: FCC_Part15.207_CE_AC Power	Engineer: Alin Zhou
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

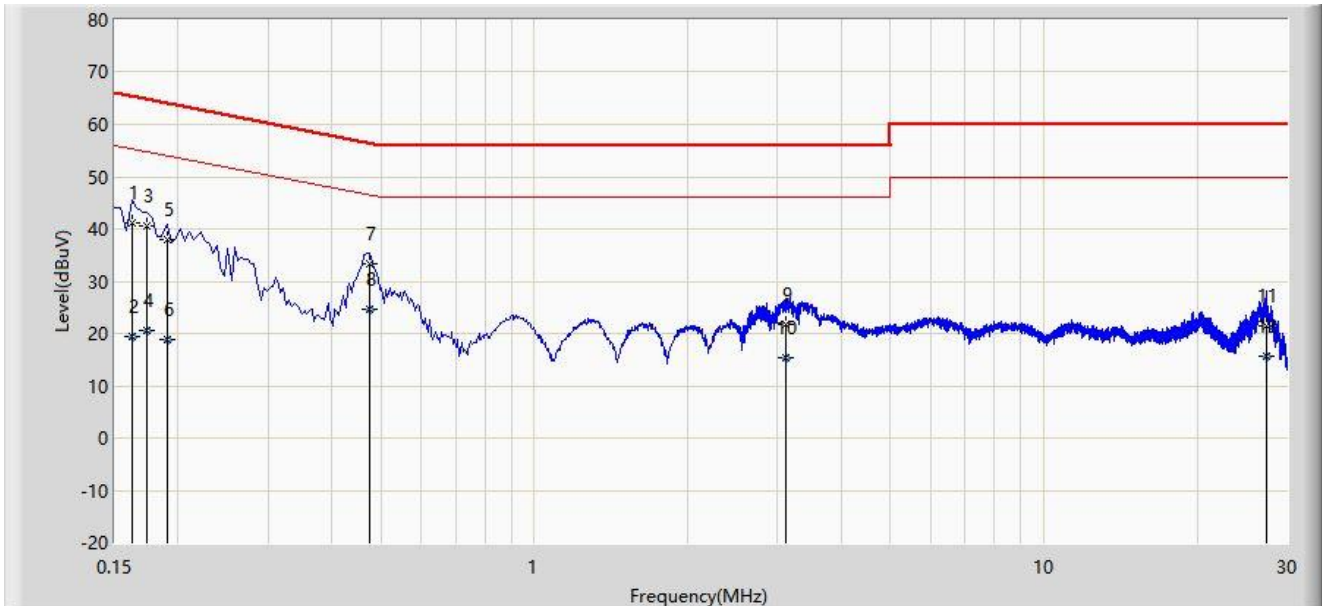


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.162	41.194	31.605	-24.166	65.361	9.590	QP
2		0.162	19.525	9.936	-35.835	55.361	9.590	AV
3		0.174	40.479	30.884	-24.288	64.767	9.595	QP
4		0.174	20.573	10.978	-34.194	54.767	9.595	AV
5		0.190	38.089	28.488	-25.947	64.037	9.601	QP
6		0.190	18.835	9.234	-35.201	54.037	9.601	AV
7		0.474	33.348	23.602	-23.095	56.444	9.747	QP
8	*	0.474	24.766	15.019	-21.678	46.444	9.747	AV
9		3.106	21.777	11.725	-34.223	56.000	10.052	QP
10		3.106	15.276	5.224	-30.724	46.000	10.052	AV
11		27.294	21.312	10.178	-38.688	60.000	11.135	QP
12		27.294	15.713	4.579	-34.287	50.000	11.135	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2023-06-30
Limit: FCC_Part15.207_CE_AC Power	Engineer: Alin Zhou
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Tri Band Access point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

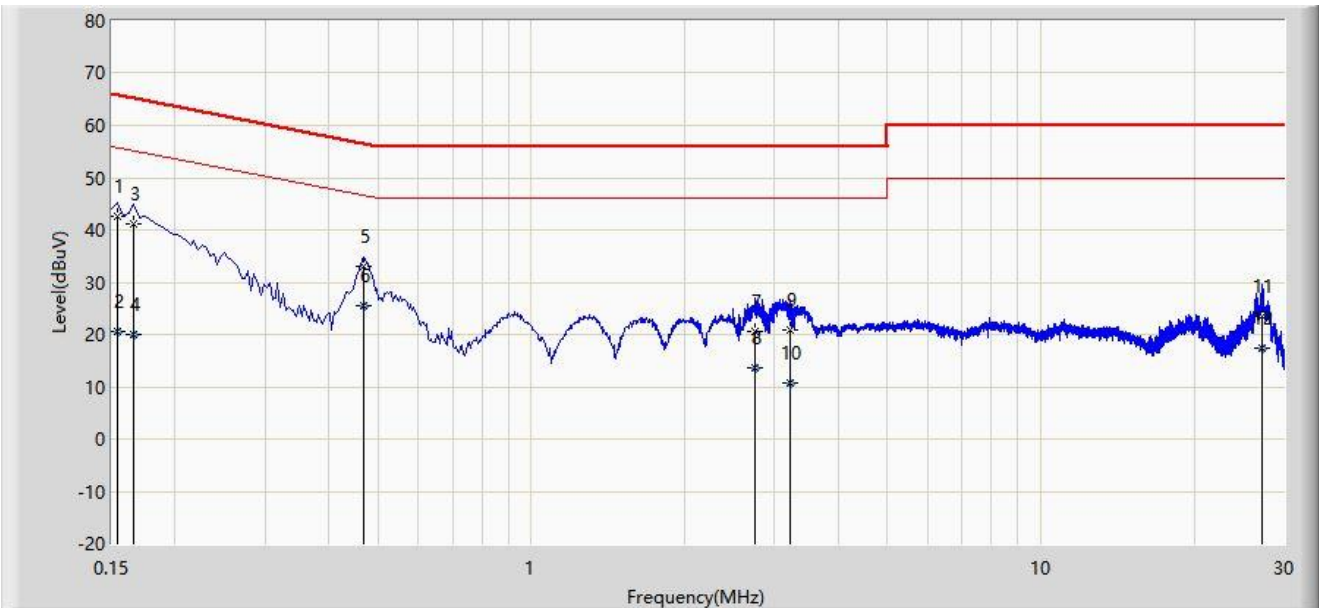

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.154	42.669	33.115	-23.112	65.781	9.554	QP
2		0.154	20.490	10.935	-35.292	55.781	9.554	AV
3		0.166	41.267	31.709	-23.891	65.158	9.558	QP
4		0.166	20.140	10.583	-35.018	55.158	9.558	AV
5		0.470	33.177	23.473	-23.337	56.514	9.704	QP
6	*	0.470	25.544	15.839	-20.970	46.514	9.704	AV
7		2.750	20.589	10.572	-35.411	56.000	10.017	QP
8		2.750	13.585	3.568	-32.415	46.000	10.017	AV
9		3.210	20.822	10.790	-35.178	56.000	10.032	QP
10		3.210	10.867	0.835	-35.133	46.000	10.032	AV
11		27.246	23.600	12.525	-36.400	60.000	11.074	QP
12		27.246	17.347	6.273	-32.653	50.000	11.074	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2305RSU028-UT” file.

Appendix C – EUT Photograph

Refer to “2305RSU028-UE” file.

The End
