

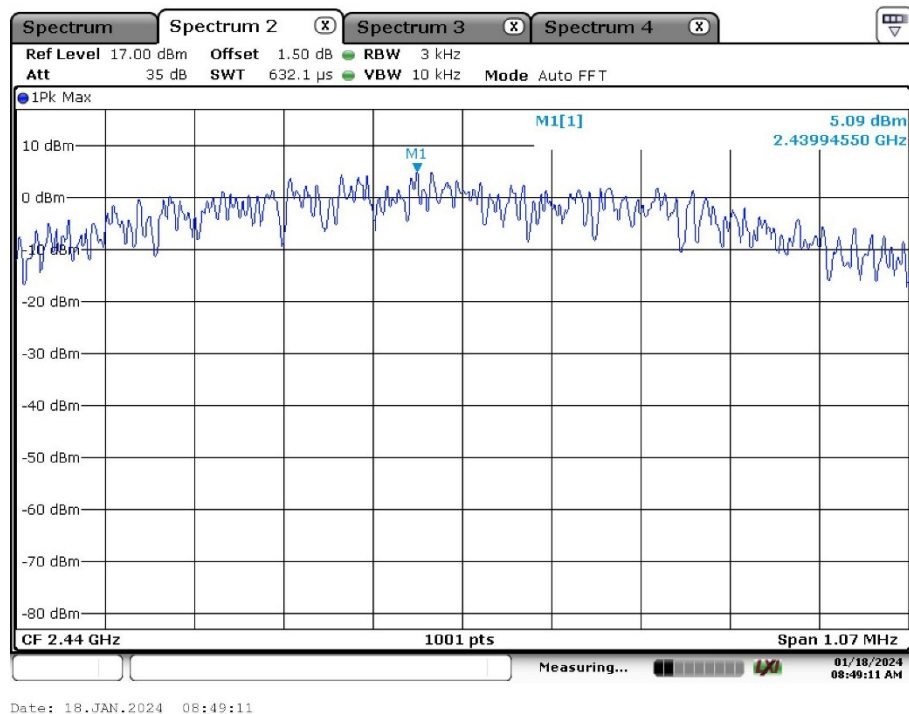


Appendix A: Test Results of 2.4GHz Thread

APPENDIX A: TEST RESULTS OF 2.4GHZ THREAD.....	1
APPENDIX A.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
APPENDIX A.2: TEST RESULTS OF 6dB BANDWIDTH	4
APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH	7
APPENDIX A.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	10
<i>Band Edge</i>	10
<i>Conducted Spurious Emission</i>	11
APPENDIX A.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	14
<i>30 MHz to 1GHz</i>	14
<i>1GHz-18GHz</i>	16
APPENDIX A.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	28
APPENDIX A.7: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS	32

Appendix A.1: Test Results of Conducted Power Spectral Density

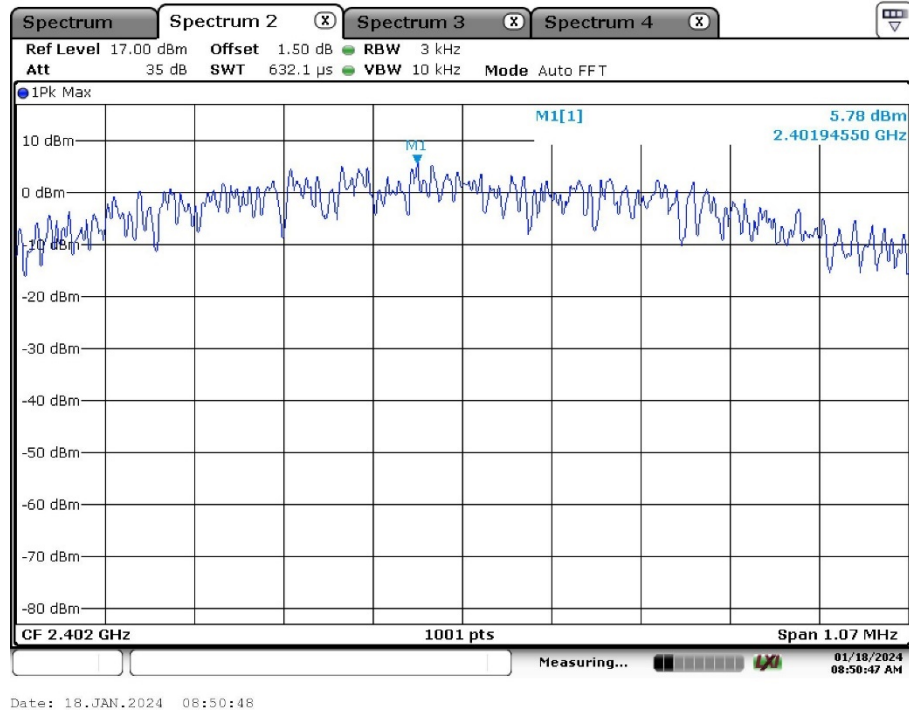

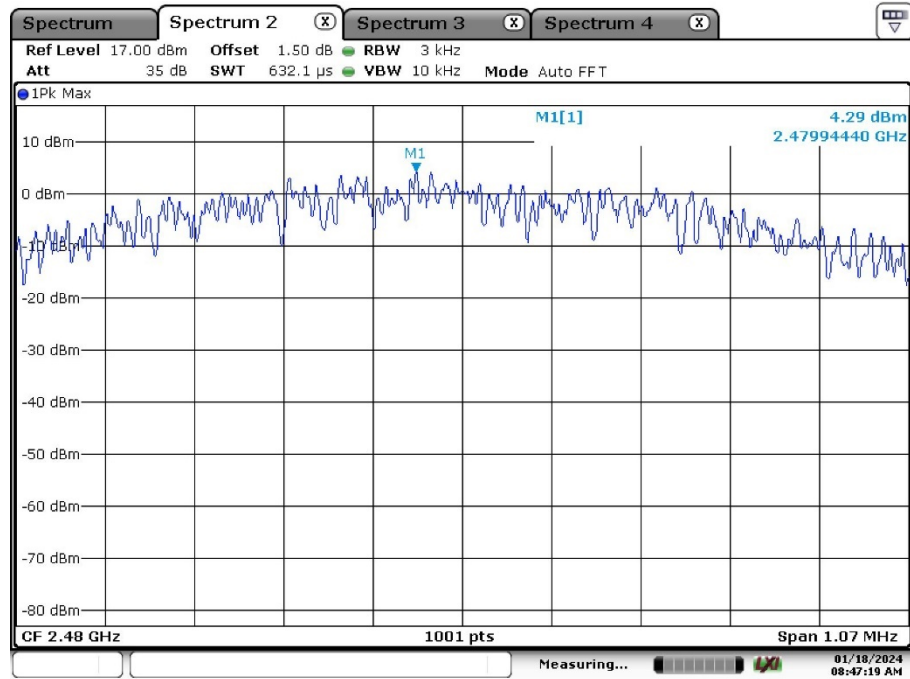

Date: 18.JAN.2024 08:47:20

Appendix A.2: Test Results of 6dB Bandwidth

Minimum Emission Bandwidth 6 dB (2402 MHz; 20.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.732674	0.500000	---	2401.623762	2402.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	20.4	PASS

6 dB Bandwidth

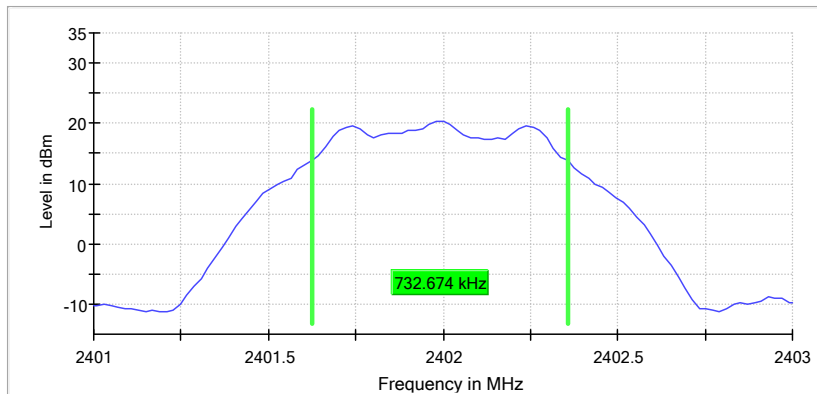

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.27 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2440 MHz; 20.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.732674	0.500000	---	2439.623762	2440.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	19.7	PASS

6 dB Bandwidth

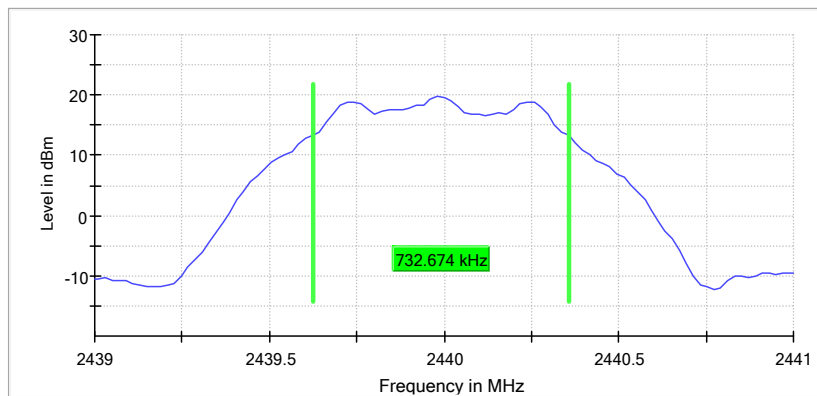

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2480 MHz; 20.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.712872	0.500000	---	2479.623762	2480.336634

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	17.9	PASS

6 dB Bandwidth

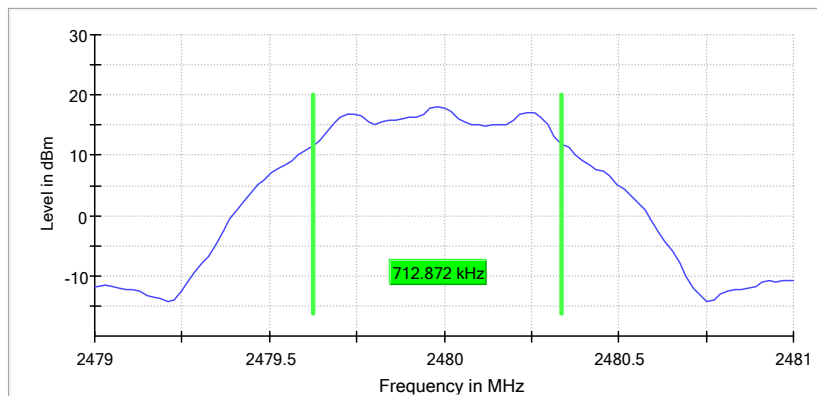

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.14 dB	0.50 dB

Appendix A.3: Test Results of 99% Bandwidth

Occupied Channel Bandwidth 99% (2402 MHz; 20.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.050000	---	---	2401.472500	2402.522500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

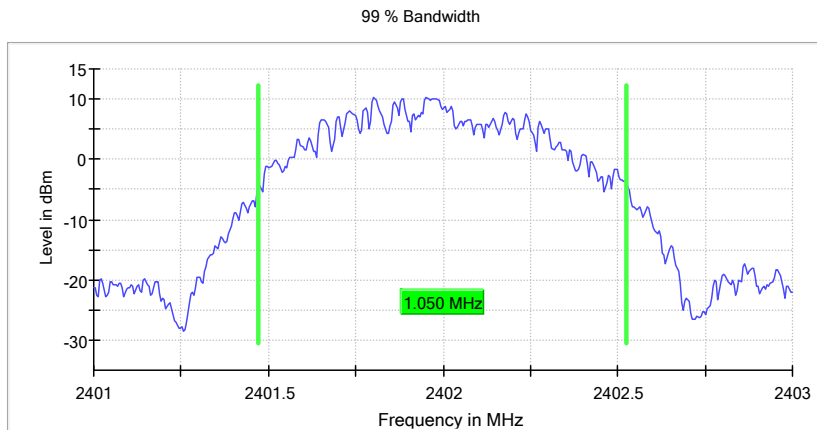

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweptime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.27 dB	0.30 dB

Occupied Channel Bandwidth 99% (2440 MHz; 20.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.050000	---	---	2439.472500	2440.522500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

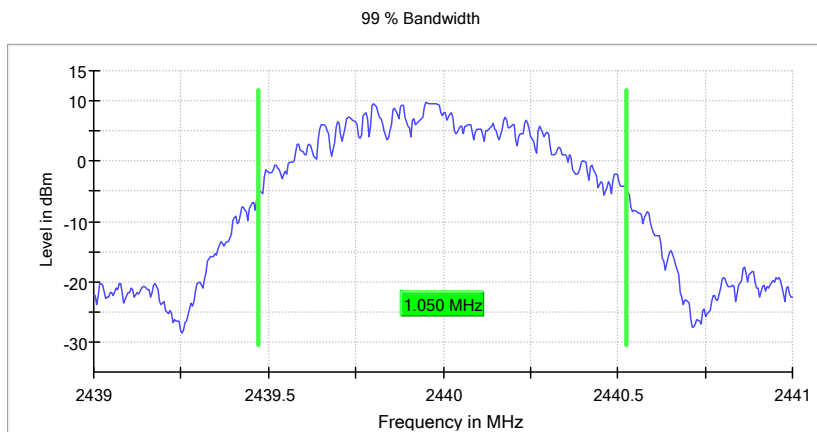

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweptime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.30 dB

Occupied Channel Bandwidth 99% (2480 MHz; 20.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.050000	---	---	2479.472500	2480.522500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth

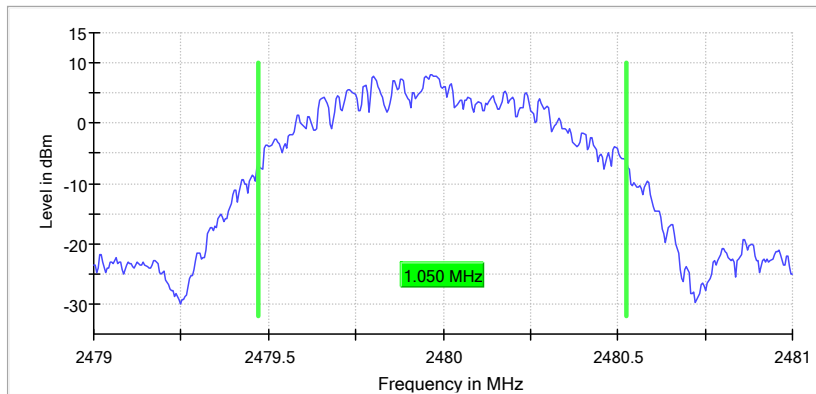


Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweptime	189.648 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.30 dB


Appendix A.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge

Low Channel:


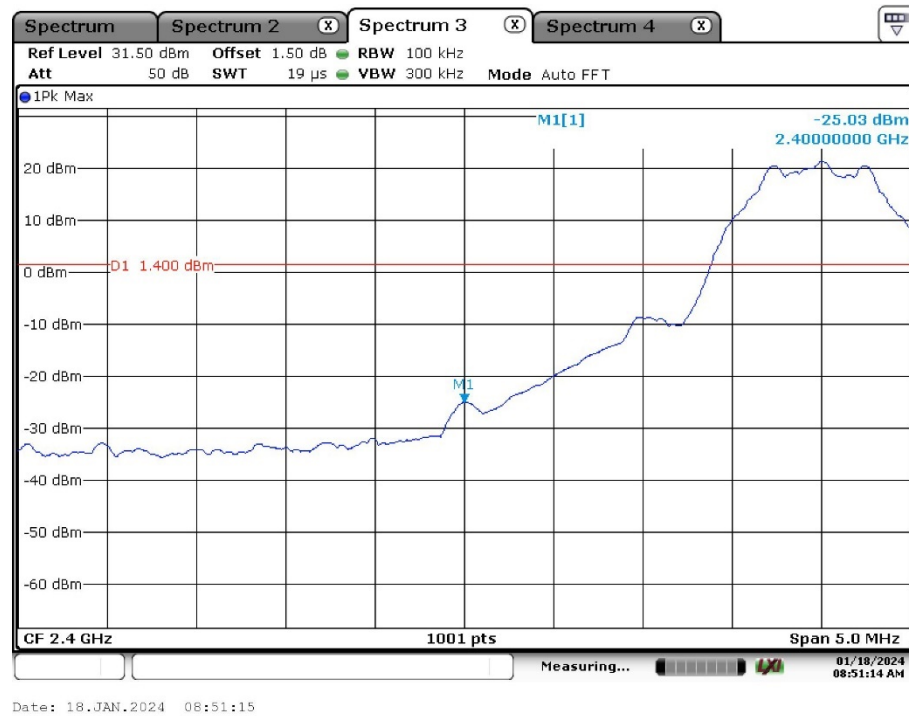


High Channel:

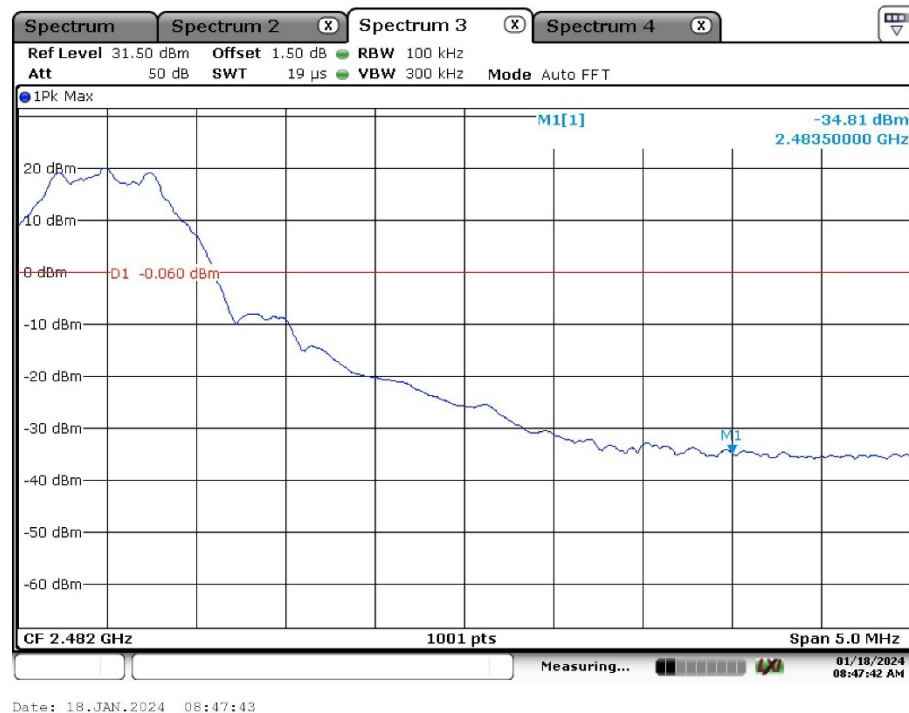


Conducted Spurious Emission


Low Channel:

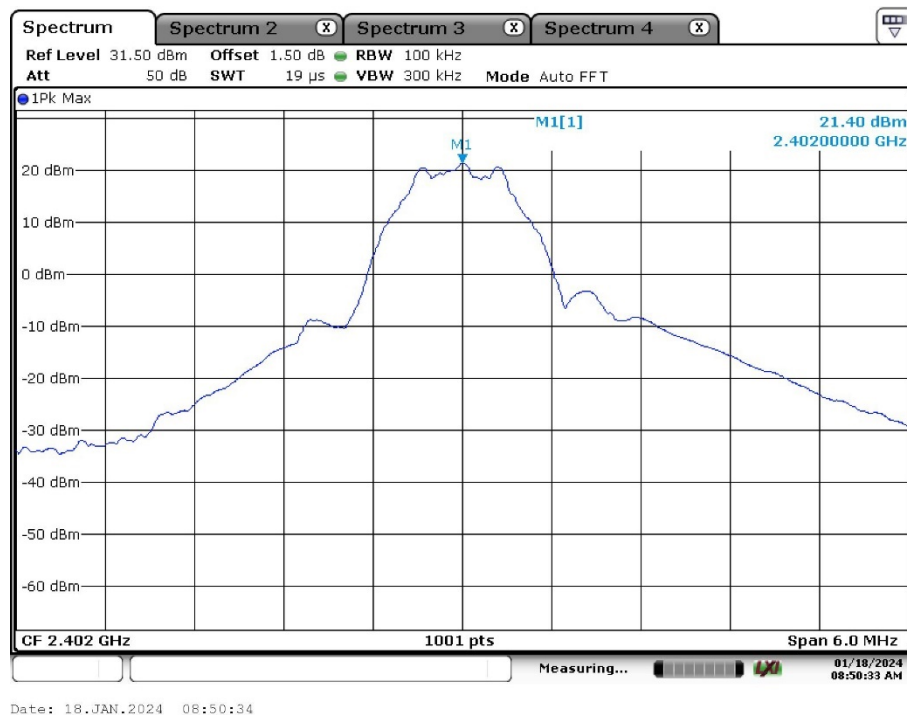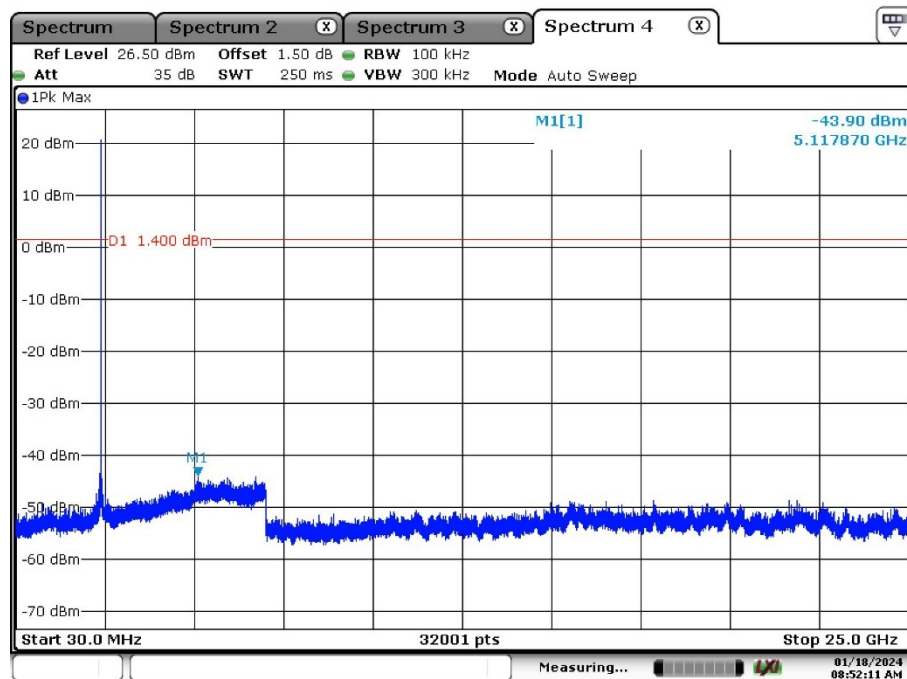

Middle Channel:


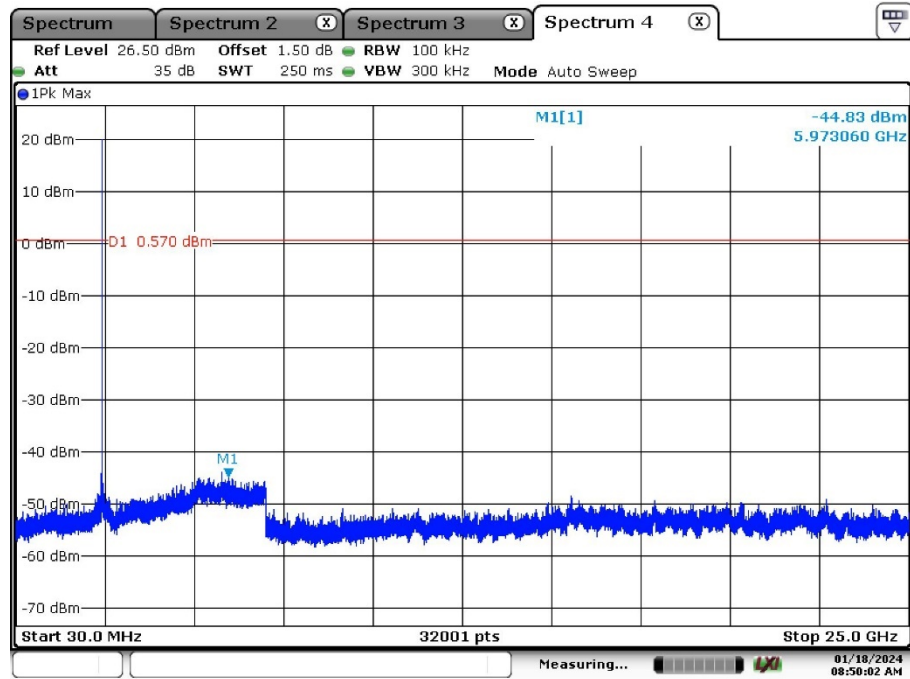


Date: 18.JAN.2024 08:50:03

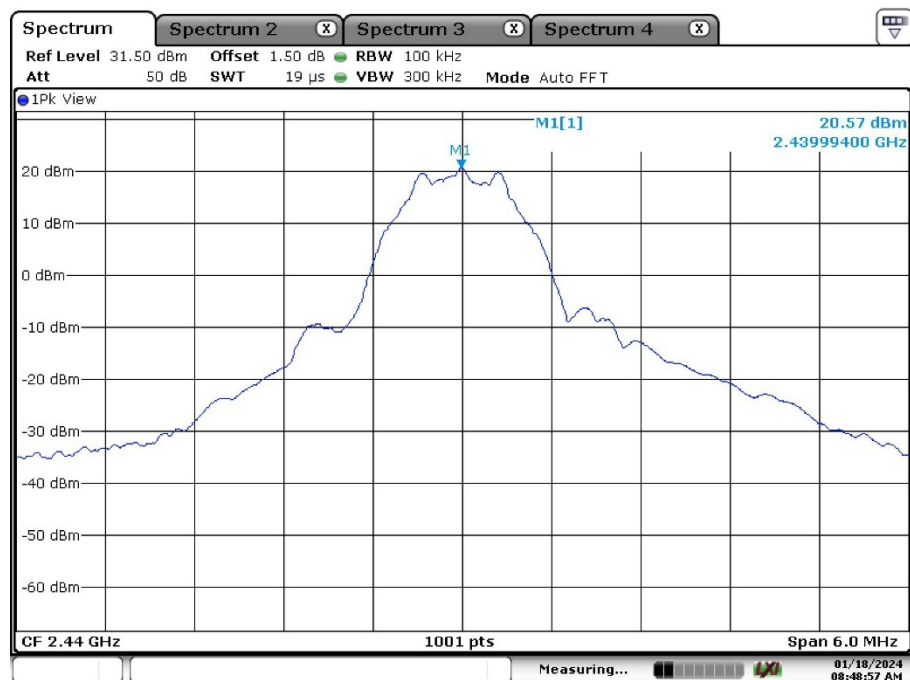

Date: 18.JAN.2024 08:48:57

High Channel:

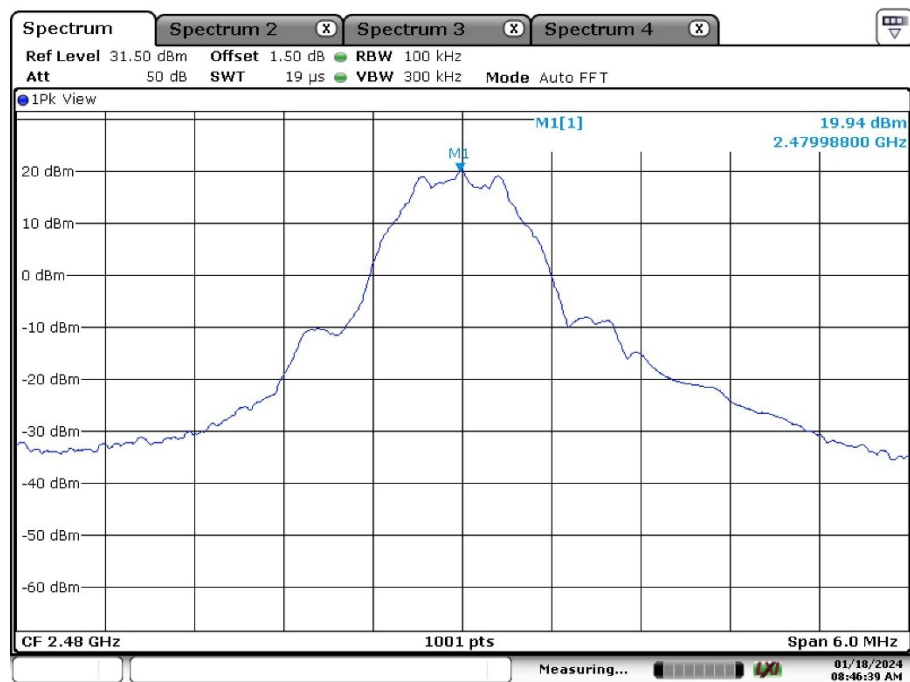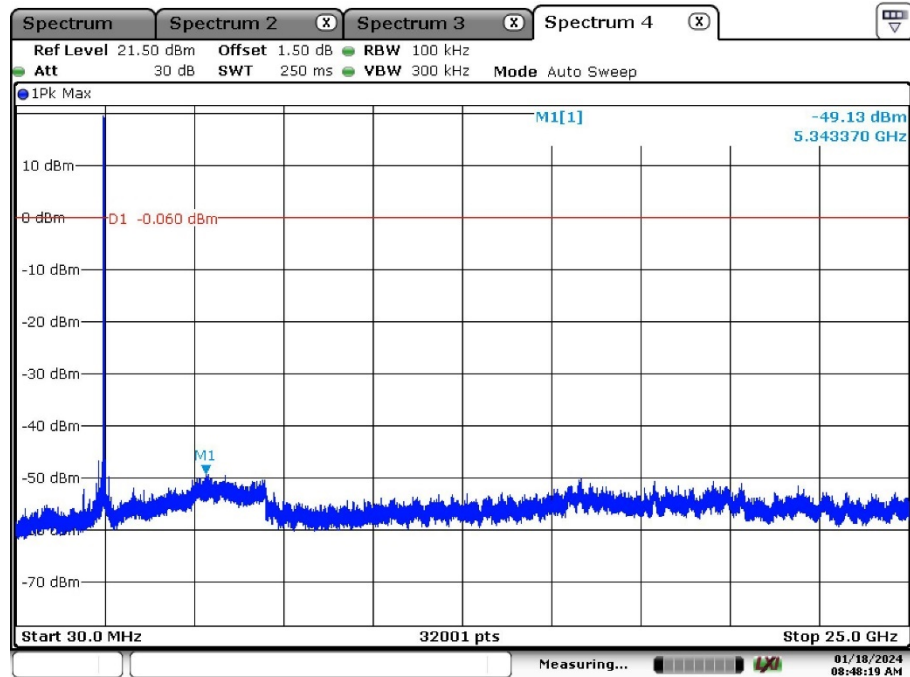

Appendix A.5: Test Results of Radiated Spurious Emissions


Note:

- 1) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz to 1GHz

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

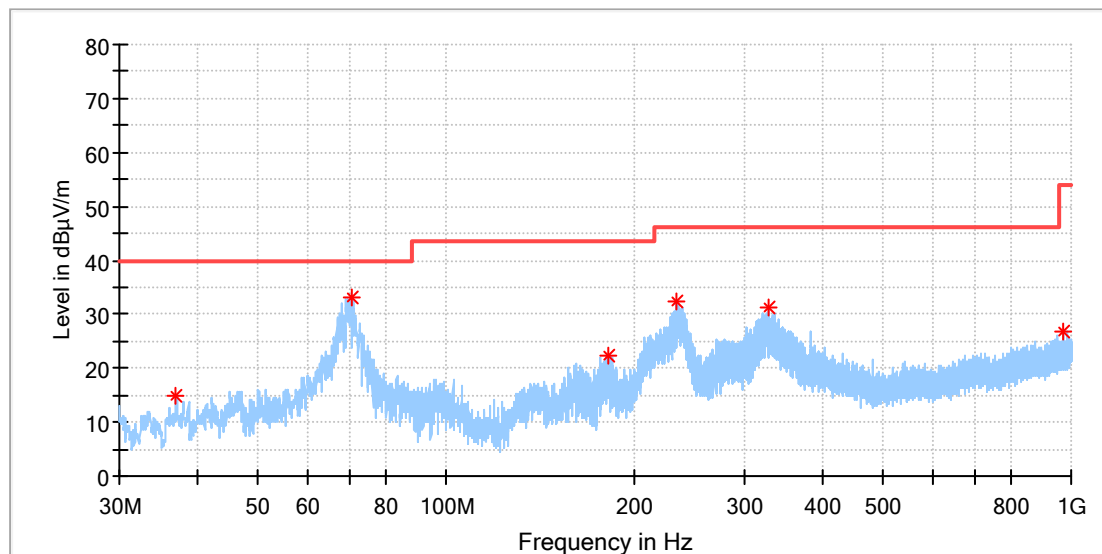

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.013846	14.95	40.00	25.05	100.0	H	210.0	-21.4
70.516154	33.28	40.00	6.72	100.0	H	258.0	-22.3
181.394615	22.21	43.50	21.29	100.0	H	325.0	-20.7
232.841923	32.20	46.00	13.80	100.0	H	284.0	-18.3
327.155769	31.16	46.00	14.84	100.0	H	218.0	-15.8
973.325000	26.82	54.00	27.18	100.0	H	275.0	-4.5

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

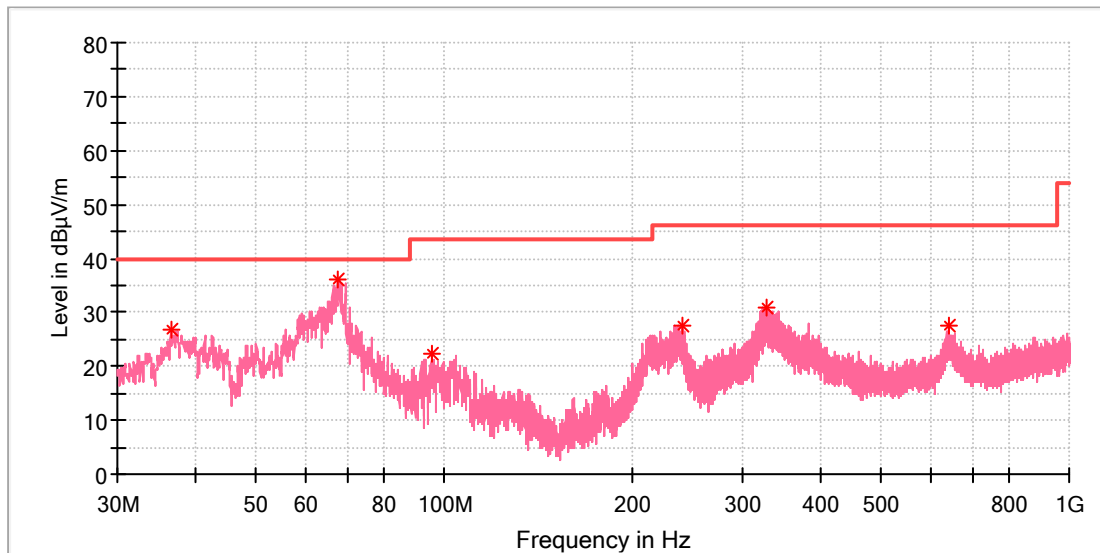

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.528846	26.72	40.00	13.28	100.0	V	0.0	-21.6
67.680769	36.27	40.00	3.73	100.0	V	227.0	-21.3
95.325769	22.40	43.50	21.10	100.0	V	4.0	-20.0
239.743846	27.53	46.00	18.47	100.0	V	36.0	-18.0
327.603462	30.93	46.00	15.07	100.0	V	90.0	-15.8
640.950769	27.50	46.00	18.50	100.0	V	66.0	-9.6

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz-18GHz

Note: The highest waveform in the figure is Zigbee Fundamental.

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

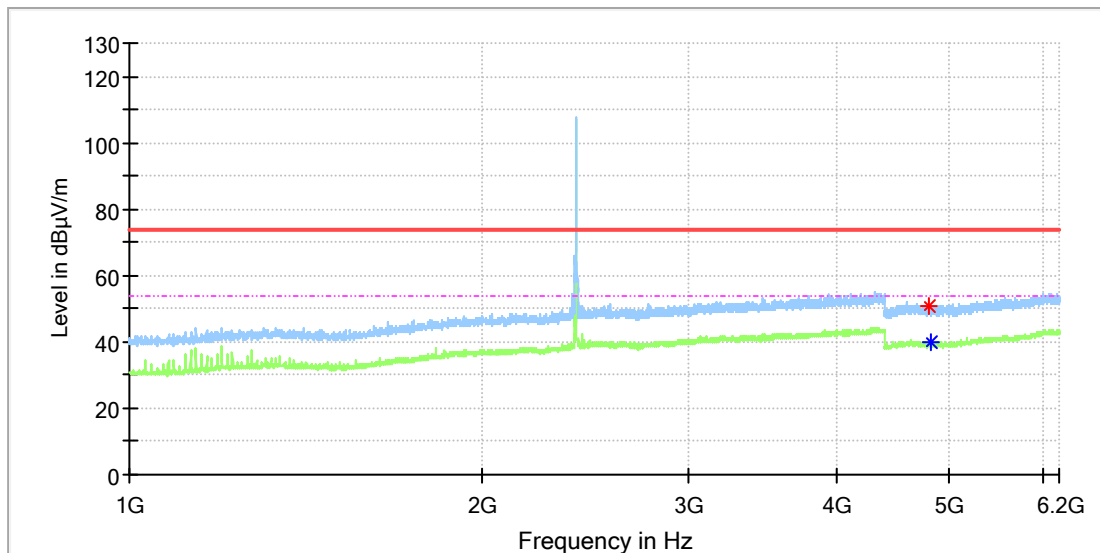

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.000000	51.04	---	74.00	22.96	150.0	H	203.0	11.8
4821.000000	---	39.65	54.00	14.35	150.0	H	17.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

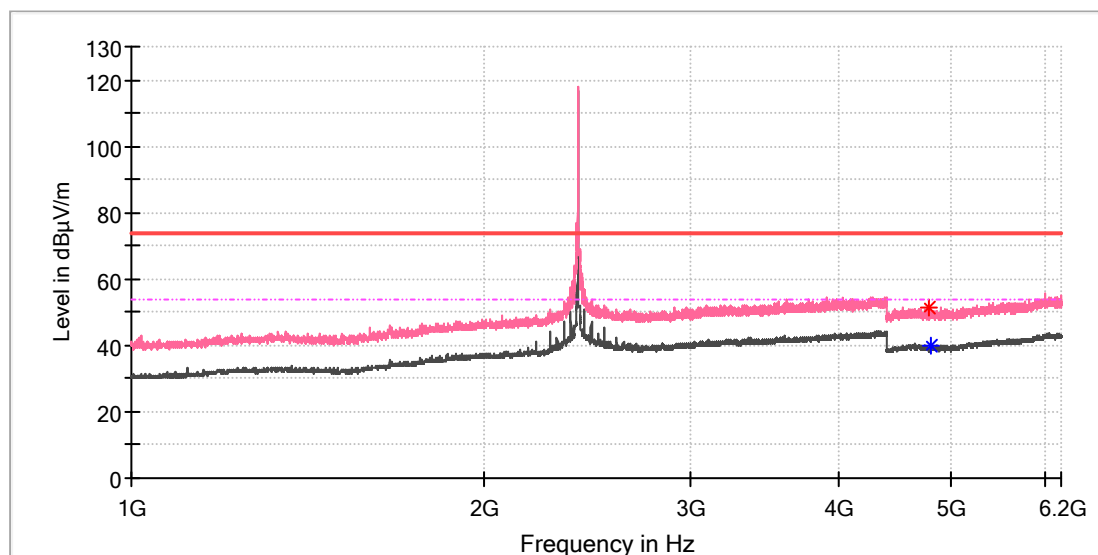

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4774.000000	51.15	---	74.00	22.85	150.0	V	255.0	11.8
4806.000000	---	39.72	54.00	14.28	150.0	V	74.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

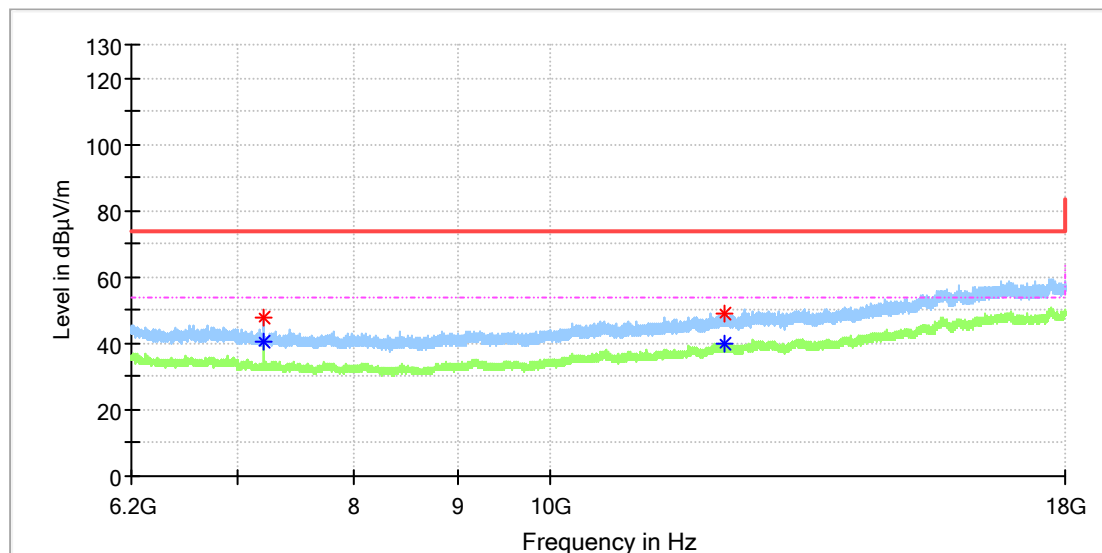

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	---	40.47	54.00	13.53	150.0	H	234.0	8.8
7206.441667	47.48	---	74.00	26.52	150.0	H	312.0	8.8
12211.608333	48.95	---	74.00	25.05	150.0	H	173.0	14.7
12211.608333	---	39.76	54.00	14.24	150.0	H	173.0	14.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

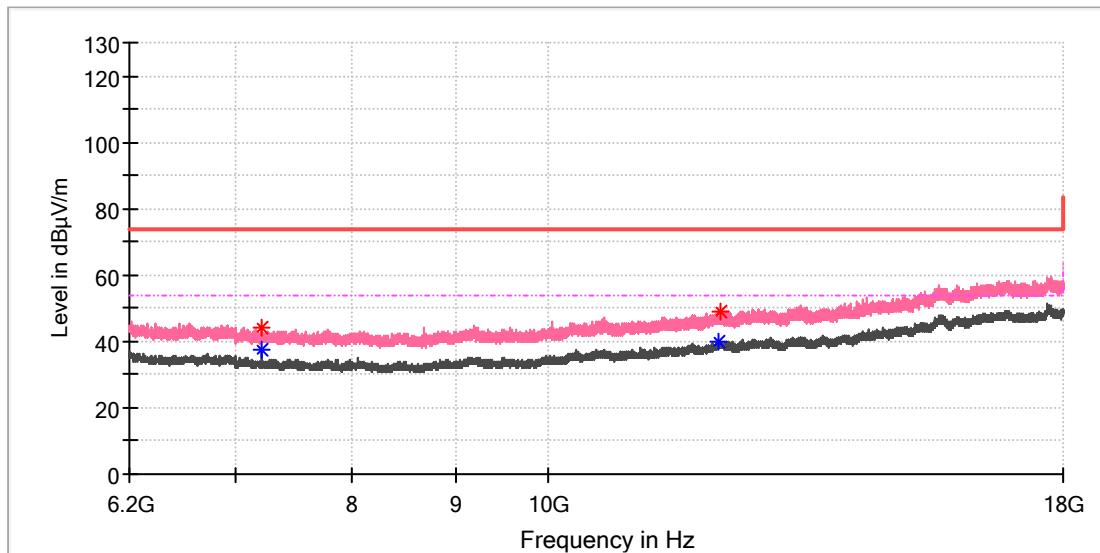

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7203.491667	44.36	---	74.00	29.64	150.0	V	226.0	8.8
7205.950000	---	37.40	54.00	16.60	150.0	V	251.0	8.8
12140.808333	---	40.19	54.00	13.81	150.0	V	297.0	14.4
12160.966667	49.15	---	74.00	24.85	150.0	V	179.0	14.5

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

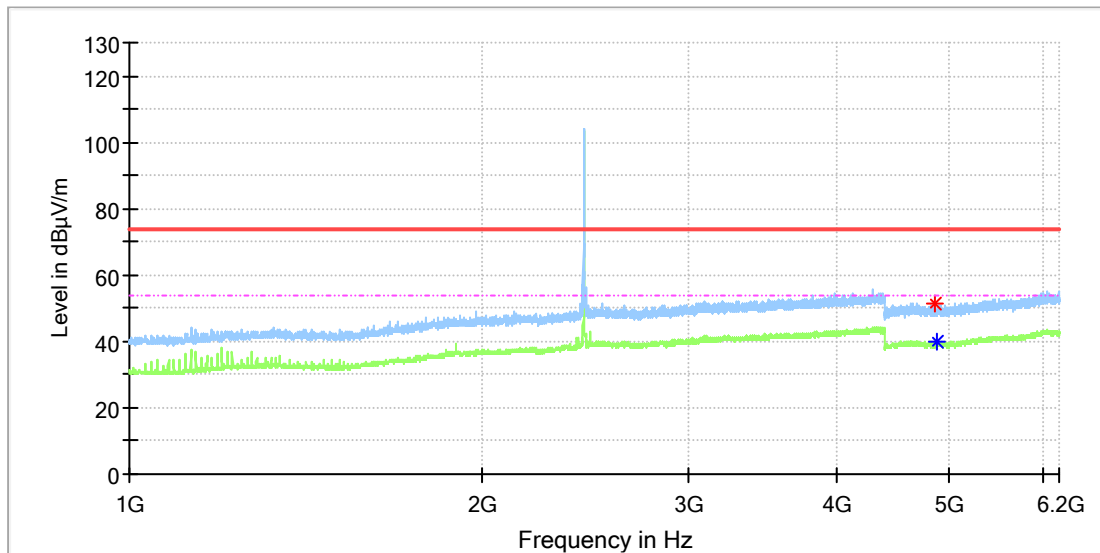

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4850.000000	51.67	---	74.00	22.33	150.0	H	296.0	11.8
4879.500000	---	39.91	54.00	14.09	150.0	H	313.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

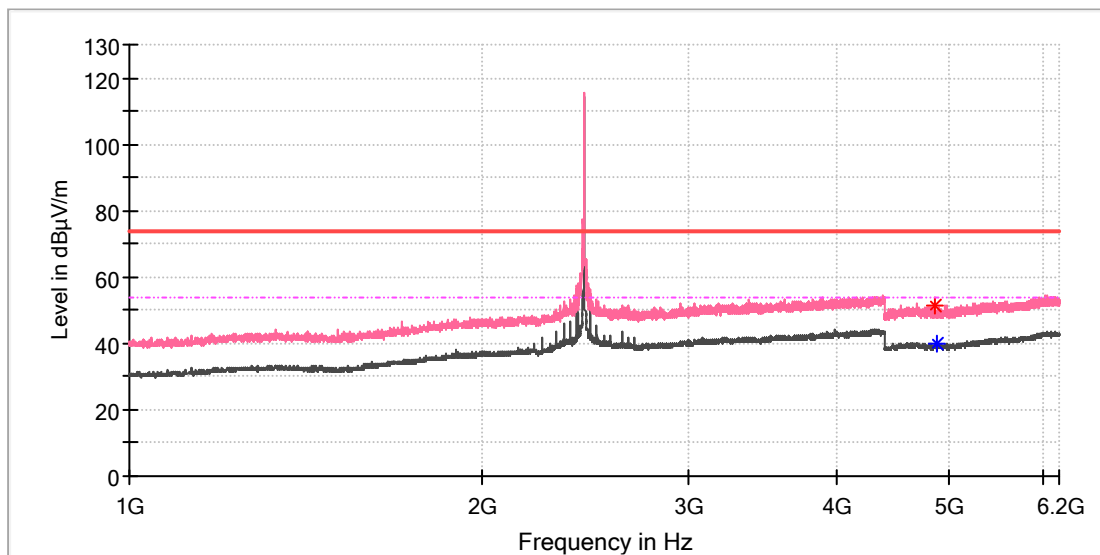

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4862.500000	51.22	---	74.00	22.78	150.0	V	50.0	11.8
4885.500000	---	39.83	54.00	14.17	150.0	V	129.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

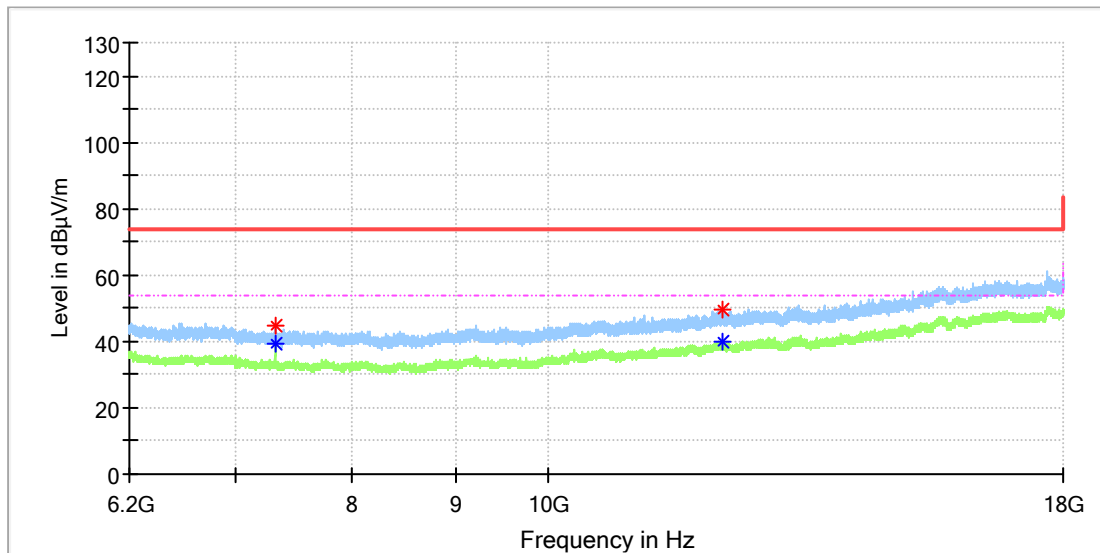

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7319.033333	44.69	---	74.00	29.31	150.0	H	308.0	8.2
7319.033333	---	39.35	54.00	14.65	150.0	H	308.0	8.2
12193.416667	---	39.81	54.00	14.19	150.0	H	213.0	14.6
12199.316667	49.29	---	74.00	24.71	150.0	H	224.0	14.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

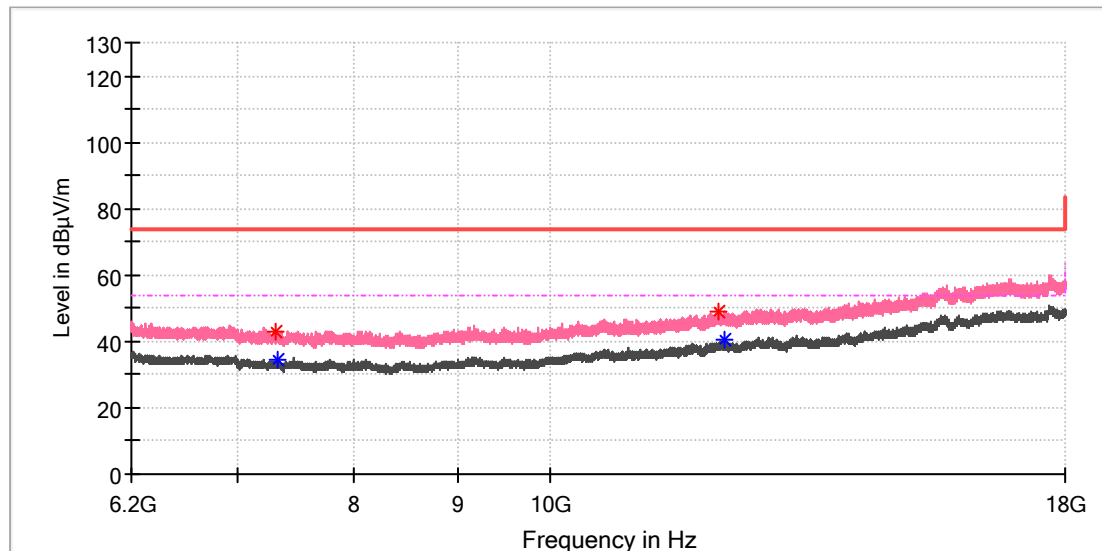

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7302.808333	42.89	---	74.00	31.11	150.0	V	55.0	8.3
7319.033333	---	34.41	54.00	19.59	150.0	V	0.0	8.2
12109.833333	49.09	---	74.00	24.91	150.0	V	128.0	14.2
12198.825000	---	40.54	54.00	13.46	150.0	V	341.0	14.7

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

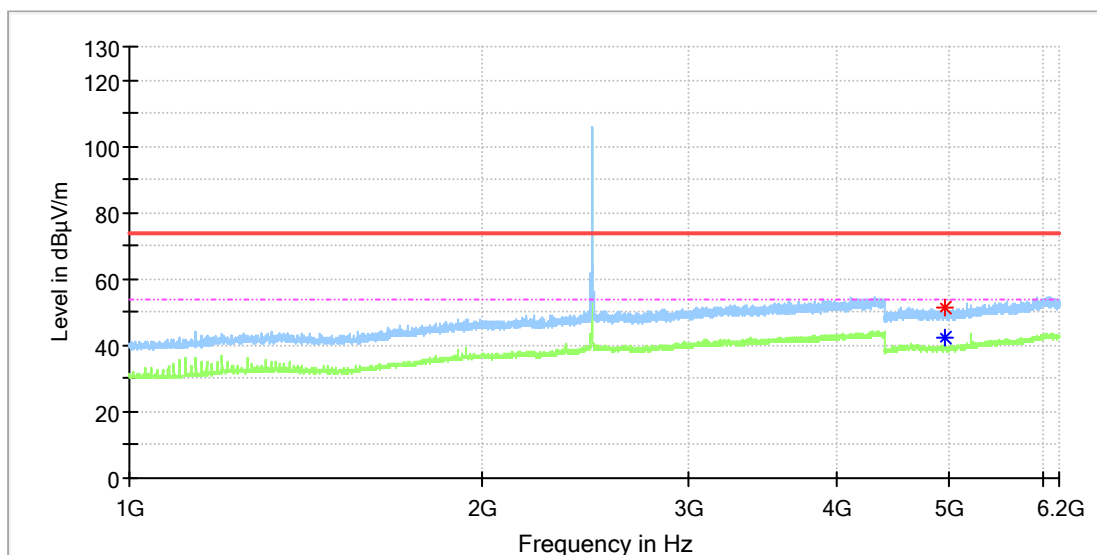

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	---	42.05	54.00	11.95	150.0	H	275.0	11.8
4960.000000	51.34	---	74.00	22.66	150.0	H	139.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

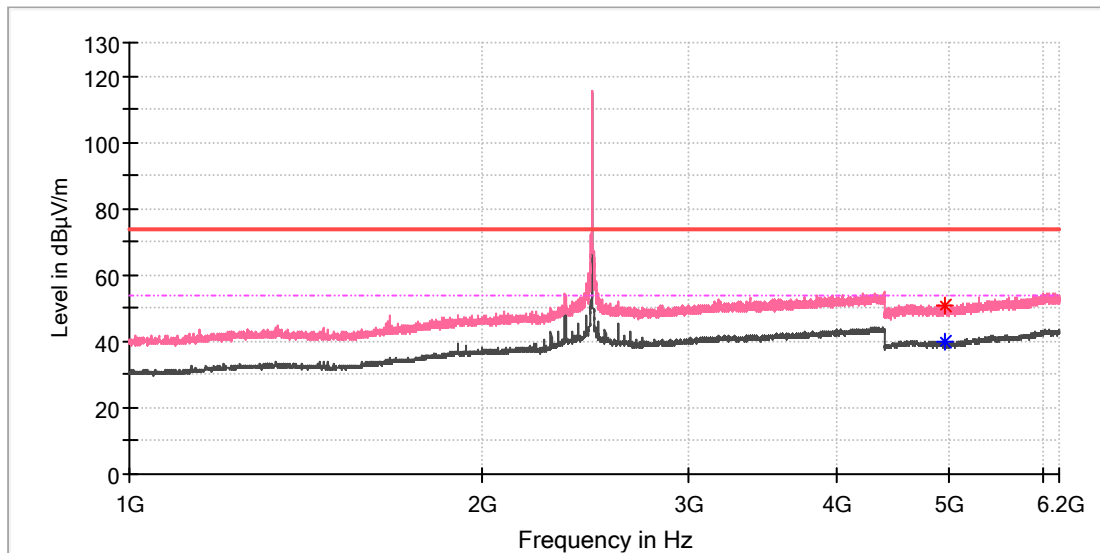

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	---	39.78	54.00	14.22	150.0	V	108.0	11.8
4960.500000	50.89	---	74.00	23.11	150.0	V	231.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

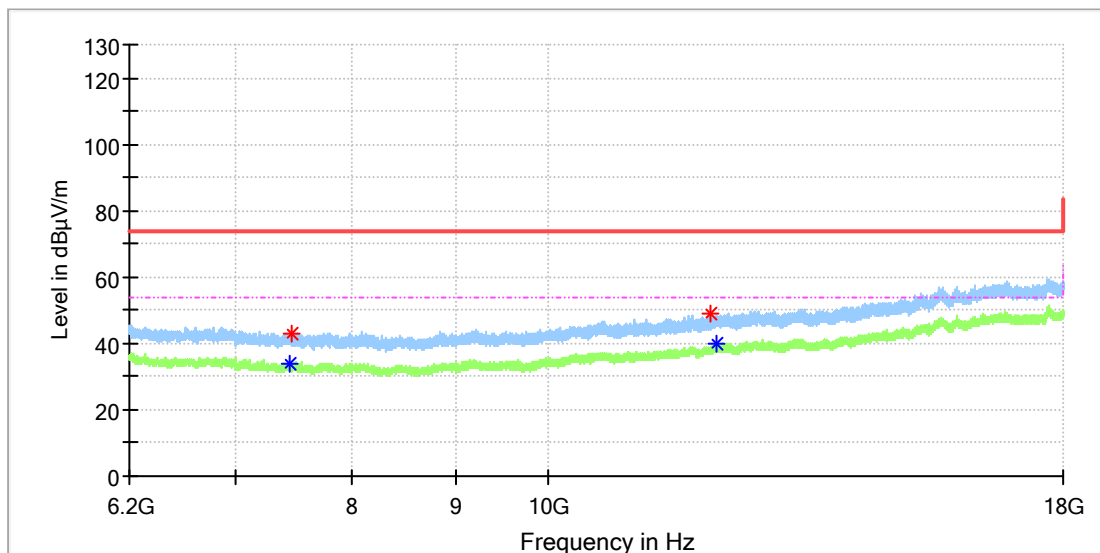

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7448.833333	---	34.11	54.00	19.89	150.0	H	310.0	8.5
7460.633333	42.82	---	74.00	31.18	150.0	H	274.0	8.5
12024.283333	48.75	---	74.00	25.25	150.0	H	202.0	14.0
12113.766667	---	39.82	54.00	14.18	150.0	H	123.0	14.2

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

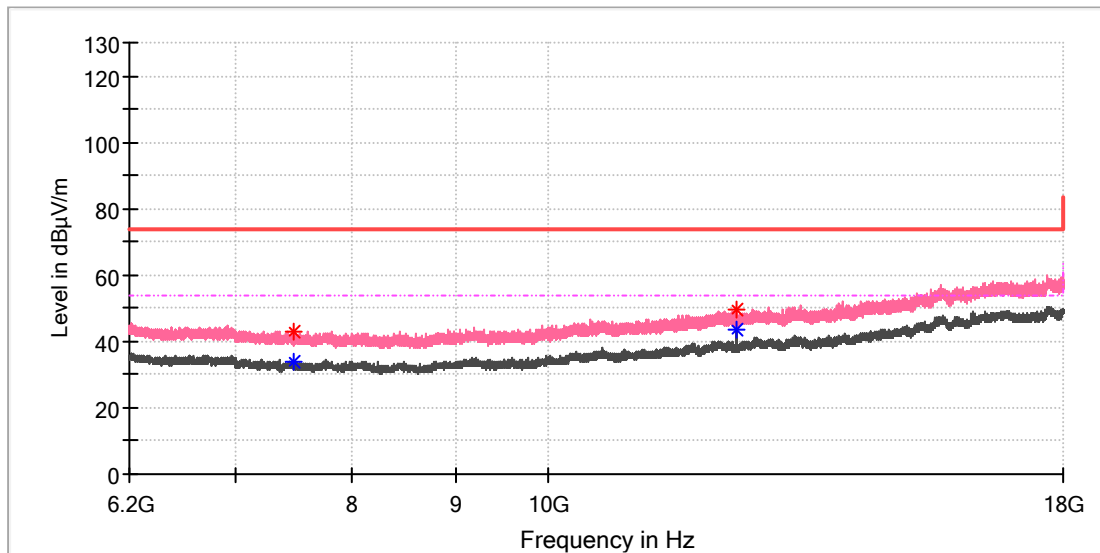

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7476.366667	---	33.96	54.00	20.04	150.0	V	92.0	8.6
7476.858333	42.85	---	74.00	31.15	150.0	V	103.0	8.6
12400.900000	---	43.25	54.00	10.75	150.0	V	189.0	14.7
12401.883333	49.46	---	74.00	24.54	150.0	V	200.0	14.7


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.6: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

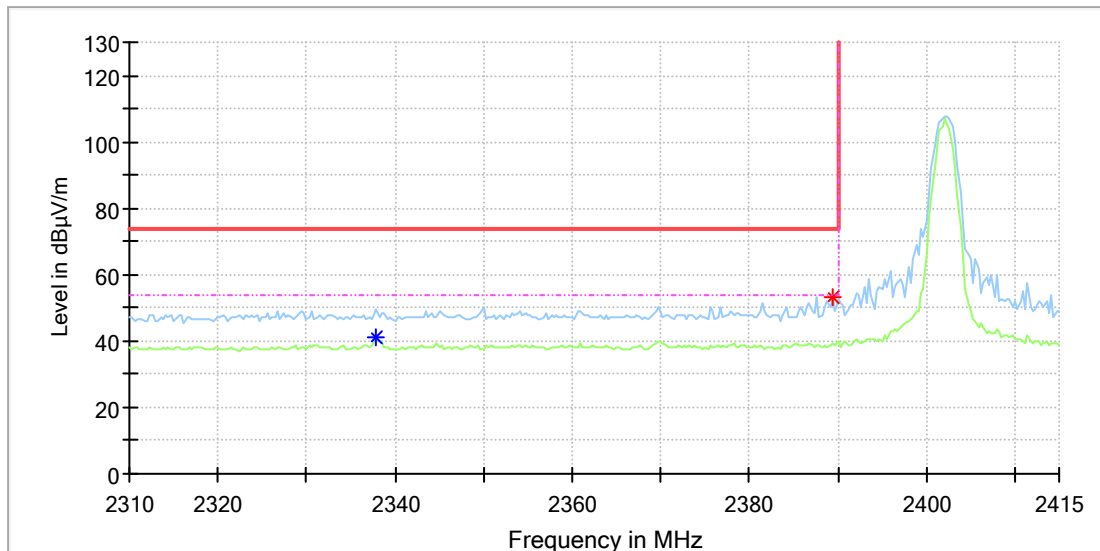

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2337.941177	---	41.06	54.00	12.94	150.0	H	226.0	6.8
2389.411765	52.98	---	74.00	21.02	150.0	H	52.0	7.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

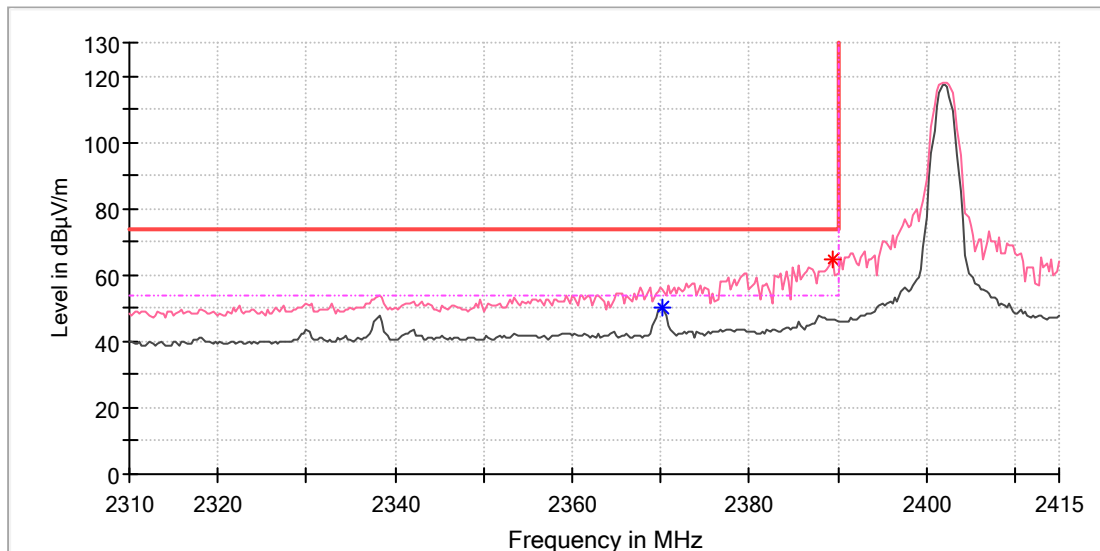

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2370.294118	---	49.98	54.00	4.02	150.0	V	344.0	6.9
2389.411765	64.45	---	74.00	9.55	150.0	V	329.0	7.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

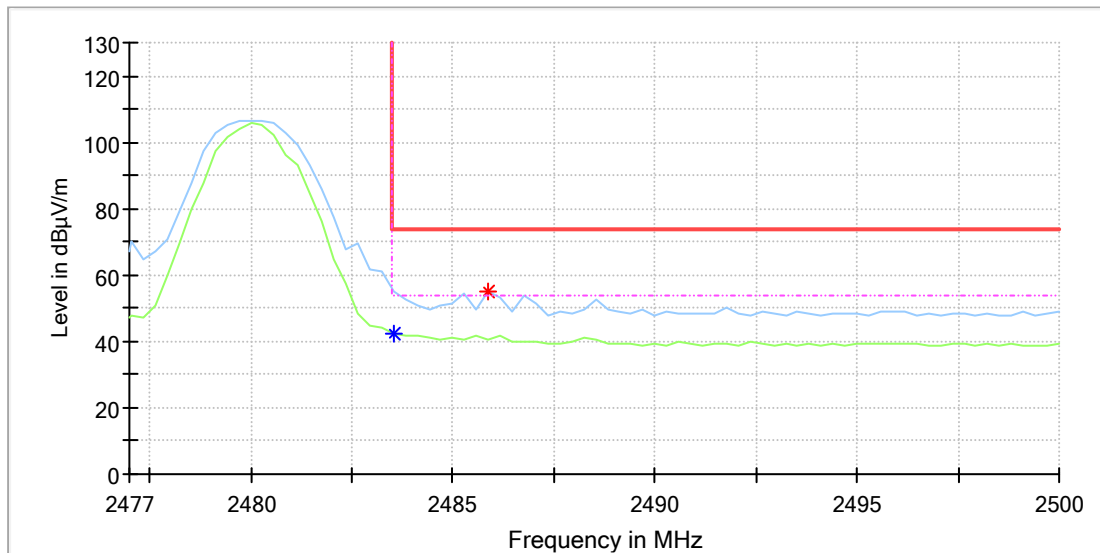

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.529412	---	42.50	54.00	11.50	150.0	H	216.0	7.4
2485.882353	55.13	---	74.00	18.87	150.0	H	258.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Gateway
Model:	Hoo Max H5EA
Test Mode:	Thread
Order No/Sample No:	168450232/A003634619-002
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

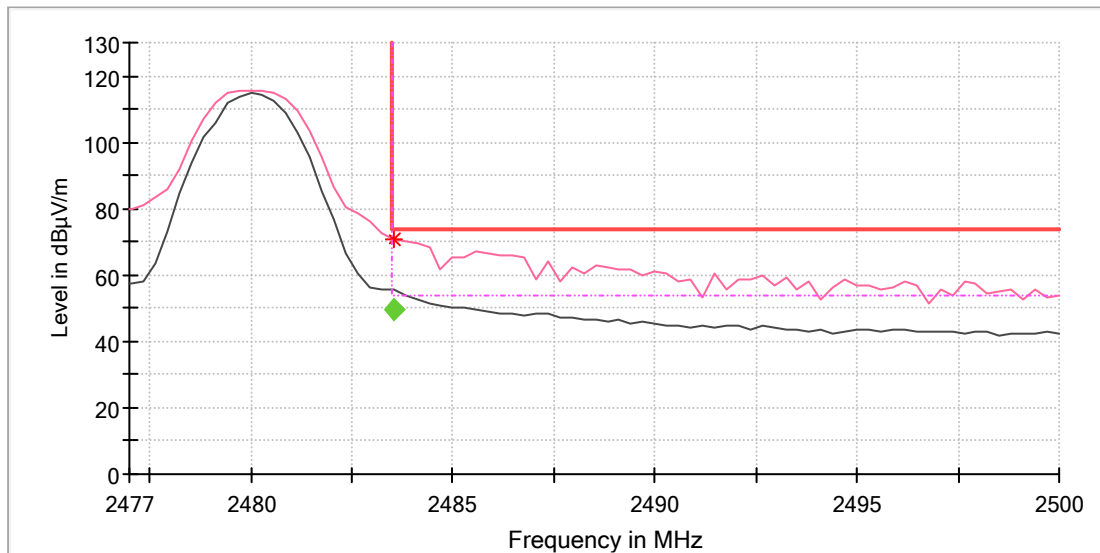

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.529412	70.52	---	74.00	3.48	150.0	V	28.0	7.4


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.529412	49.67	54.00	4.33	148.0	V	23.0	7.4

Appendix A.7: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name	Gateway
Order Number:	168450232(P01199473)
Model:	Hoo Max H5EA
Test Mode:	2.4G Thread
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15
Test By:/Review By:	Dawn Shen/Gary Chen
Tem./Hum./Pressure:	23.3°C/50.8%/101kPa
Remark:	SR1

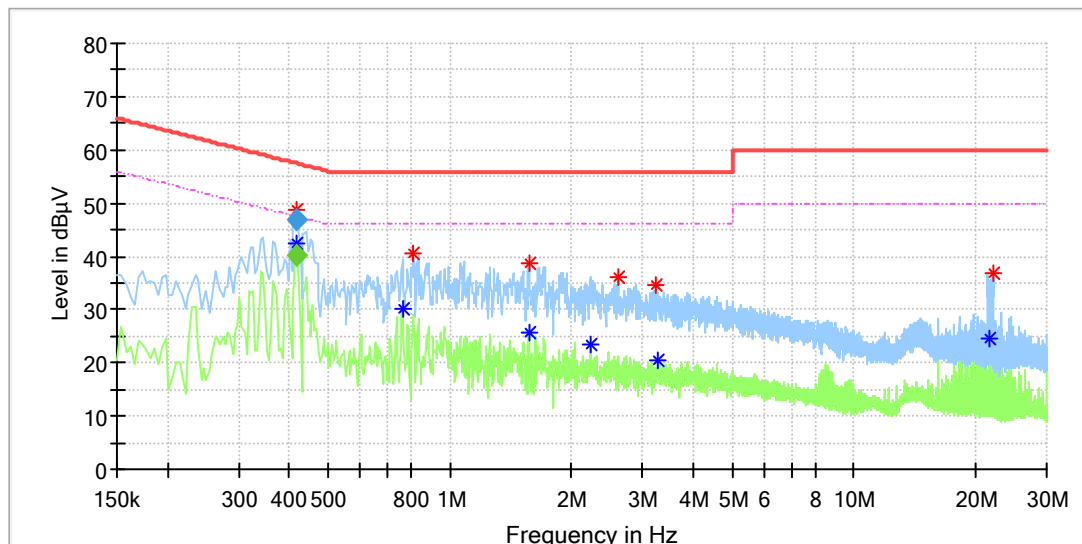

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.416500	48.83	---	57.49	8.66	L1	9.9
0.416500	---	42.40	47.49	5.09	L1	9.9
0.764000	---	30.01	46.00	15.99	L1	9.8
0.812000	40.65	---	56.00	15.35	L1	9.8
1.568000	---	25.64	46.00	20.36	L1	9.8
1.568000	38.53	---	56.00	17.47	L1	9.8
2.224000	---	23.57	46.00	22.43	L1	9.9
2.604000	36.11	---	56.00	19.89	L1	9.9
3.228000	34.52	---	56.00	21.48	L1	9.9
3.288000	---	20.43	46.00	25.57	L1	9.9
21.664000	---	24.51	50.00	25.49	L1	10.5
22.032000	36.80	---	60.00	23.20	L1	10.5

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.416500	---	40.02	47.52	7.50	1000.0	9.000	L1	9.9
0.416500	46.87	---	57.52	10.65	1000.0	9.000	L1	9.9

EUT Information

EUT Name	Gateway
Order Number:	168450232(P01199473)
Model:	Hoo Max H5EA
Test Mode:	2.4G Thread
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15
Test By:/Review By:	Dawn Shen/Gary Chen
Tem./Hum./Pressure:	23.3°C/50.8%/101kPa
Remark:	SR1

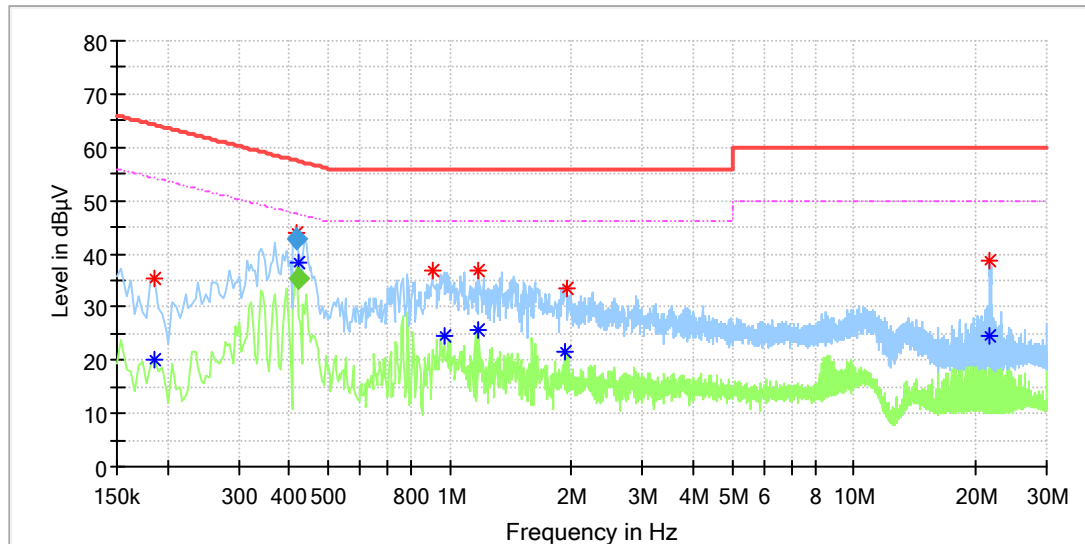

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.186000	---	20.19	54.21	34.02	N	9.7
0.186000	35.28	---	64.21	28.93	N	9.7
0.416500	43.92	---	57.49	13.57	N	9.7
0.420500	---	38.50	47.49	8.99	N	9.7
0.908000	36.93	---	56.00	19.07	N	9.7
0.968000	---	24.49	46.00	21.51	N	9.6
1.180000	---	25.81	46.00	20.19	N	9.7
1.180000	36.99	---	56.00	19.01	N	9.7
1.920000	---	21.43	46.00	24.57	N	9.9
1.944000	33.66	---	56.00	22.34	N	9.9
21.664000	---	24.43	50.00	25.57	N	10.4
21.764000	38.86	---	60.00	21.14	N	10.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.416500	42.78	---	57.52	14.74	1000.0	9.000	N	9.7
0.420500	---	35.18	47.44	12.25	1000.0	9.000	N	9.7