

# Test Report

## 1. Client

- Name : ZEROWELL Inc.
- Address : 102ho, 106ho, 17-31, Cheomdangwagi-ro 208beon-gil, Buk-gu, Gwangju, Republic of Korea

2. Use of Report : FCC CoC, IC

## 3. Sample Description :

- Model ZWA-A410W
- Kind of Product Aroma Air
- Variant Model Name -
- FCC ID 2BC63-ZWA-A410W

4. Date of Receipt : 2023.12.13

5. Date of Test : 2024. 01. 10 ~ 2024. 01. 10



6. Test Method : FCC part 15 subpart B, Class B / ICES-003

7. Test Results : Complied

This test report must not be reproduced or reproduced in any way.

The results shown in this test report are the results of testing the samples provided.

This test report is prepared according to the requirements of ISO / IEC 17025.

Affirmation	Tested by	Technical Manager
	DONG YONG, LEE  (signature)	YONG MIN, PARK  (signature)

12 01, 2024

EMC Labs Co., Ltd.



# [ Contents ]

<b>1. Laboratory Information .....</b>	<b>3</b>
<b>2. Equipment Under Test</b>	
2.1 General Information .....	4
2.2 Configuration of the equipment under test .....	4
2.3 EUT Description .....	5
2.4 Operating Conditions .....	5
2.5 The drawing of general test setup .....	5
<b>3. Summary .....</b>	<b>6</b>
3.1 Modification to the E.U.T. ....	6
3.2 Standards & results .....	6
<b>4. Test results .....</b>	<b>7</b>
4.1 Radiated emission .....	7
4.2 Conducted Emission .....	12
<b>5. Test photographs .....</b>	<b>15</b>
<b>6. E.U.T. photographs .....</b>	<b>18</b>

## 1. Laboratory Information

### Address

#### EMC Labs Co., Ltd.

Laboratory : 100, Jangjateo-ro, Hobeop-myeon, Icheon-si, Gyeonggi-do, 17396, Korea

Telephone Number : +82-31-637-8895

Facsimile Number : +82-505-116-8895

### SITE MAP



## 2. Equipment Under Test

### 2.1 General Information

- Table-Top
  Floor – Standing  
 Table-Top & Floor-Standing ( combination )

### 2.2 Configuration of the equipment under test

Equipment	Model	Manufacturer	Serial No.
Adapter	DLX225-0521U	Shenzhen DingLiXun Electronic Co.,Ltd.	-

Type	Description	Connection	Spec.	Length (m)
EUT	DC IN	Adapter	SHIELD	1.0

### 2.3 EUT Description

The following features describe EUT represented by this report

Test Voltage : AC 120 V / 60 Hz

EUT Highest operating frequency: 108 MHz


Model Name: ZWA-A410

### 2.4 Operating Conditions

The equipment under test was operated during the measurement under following

Test mode	Normal Operating
1	The test was conducted with the EUT in maximum operating condition.

### 2.5 The drawing of general test setup

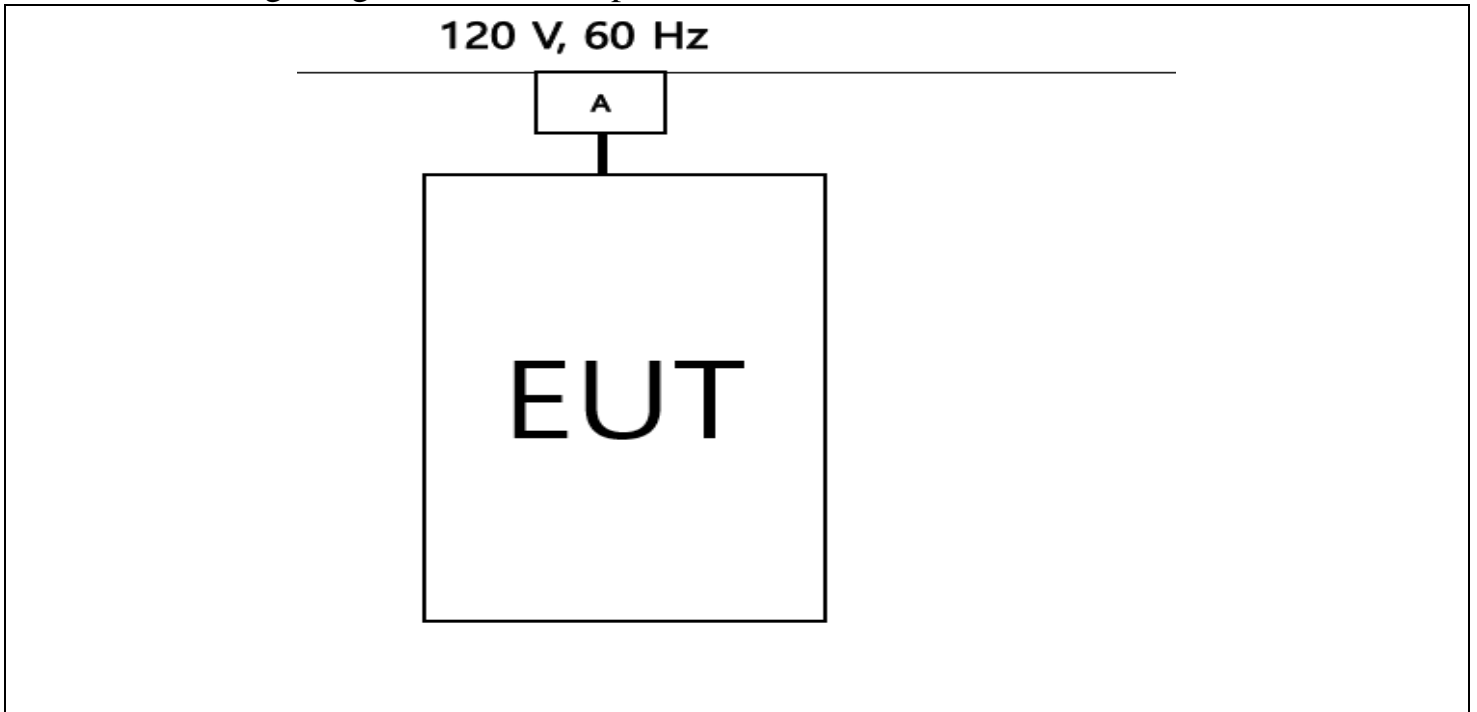

### 3. Summary

**In the above configuration tested, The EUT complied with the requirement of the specification**

#### 3.1 Modification to the E.U.T.

- No modifications to the EUT were necessary to comply.

#### 3.2 Standards & results

FCC Part 15 Subpart B ( Class B )

ANSI C63.4 – 2014, ANSI C63.4a – 2017

Test items	Test method	Result
Radiated Emission	FCC part 15 subpart B ANSI C63.4 – 2014 ANSI C63.4a – 2017	Pass
Conducted Emission	FCC part 15 subpart B ANSI C63.4 – 2014 ANSI C63.4a – 2017	Pass

## 4. Test results

### 4.1 Radiated emission

#### Environmental Conditions

Temperature	(19.3 °C) - Semi anechoic chamber ( 3m ) ( °C) - Fully anechoic chamber( 10m )
Humidity	(38 % R.H.) - Semi anechoic chamber ( 3m ) ( % R.H.) - Fully anechoic chamber( 10m )
Test Area	Semi anechoic chamber ( 3m ) – Below 1GHz Fully anechoic chamber( 10m ) – Above 1GHz
Test date	2024.01.10 - Semi anechoic chamber ( 3m ) - Fully anechoic chamber( 10m )

#### 4.1.1 Measurement procedure

The test was done at a 3 m fully anechoic chamber test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane.

They were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

4.1.2 Used equipments

[ Below 1GHz ]

Equipment	Model no	Manufacturer	Serial no.	Next cal. date	Used
MEASUREMENT SOFTWARE	EMC32 VER 10.60.15	Rohde&Schwarz	-	-	<input checked="" type="checkbox"/>
EMI TEST RECEIVER	ESW44	Rohde&Schwarz	101952	2024.03.14	<input checked="" type="checkbox"/>
Controllers	CO3000-4port	Innco Systems GmbHRE	CO3000/ 1061/ 42111117/P	-	<input checked="" type="checkbox"/>
Antenna Masts	MA4640/800-XP-ET	Innco Systems GmbHRE	-	-	<input checked="" type="checkbox"/>
Turn tables	DS2000-S-1t	Innco Systems GmbHRE	-	-	<input checked="" type="checkbox"/>
Bi-Log ANT.	VULB 9168	Schwarzbeck	902	2024.12.01	<input checked="" type="checkbox"/>
LOW NOISE AMPLIFIER	PO-LS960	PANOPTICS	PL181004	2024.06.27	<input checked="" type="checkbox"/>

[Above 1GHz]

Equipment	Model no	Manufacturer	Serial no.	Next cal. date	Used
MEASUREMENT SOFTWARE	EMC32 VER 10.60.15	Rohde&Schwarz	-	-	<input type="checkbox"/>
EMI TEST RECEIVER	ESW44	Rohde&Schwarz	101952	2024.03.14	<input type="checkbox"/>
Controllers	CO3000-4port	Innco Systems GmbHRE	CO3000/ 1061/ 42111117/P	-	<input type="checkbox"/>
Antenna Masts	MA4640/800-XP-ET	Innco Systems GmbHRE	-	-	<input type="checkbox"/>
Turn tables	DS2000-S-1t	Innco Systems GmbHRE	-	-	<input type="checkbox"/>
Horn ANT	BBHA9120D	Schwarzbeck	974	2024.01.30	<input type="checkbox"/>
Amplifier	TK-PA18H	TESTEK	220104-L	2024.03.14	<input type="checkbox"/>



#### 4.1.3 Test data

\* Receiving Antenna Mode : Horizontal, Vertical

\* 3 m Chamber

\* Note : Reading = Test Receiver meter,


Pol.= Polarization → H = Horizontal, V = Vertical

Result [dB( $\mu$ V/m)] = Reading [dB( $\mu$ V)] + Antenna factor [dB/m] + Cable Loss [dB] – Amp Gain [dB]

If, in accordance with §15.33 of this part, measurements must be performed above 1000 MHz, compliance above 1000 MHz shall be demonstrated with the emission limit in paragraph (a) or (b) of this section, as appropriate. Measurements above 1000 MHz may be performed at the distance specified in the CISPR 32 publications for measurements below 1000 MHz provided the limits in paragraphs (a) and (b) of this section are extrapolated to the new measurement distance using an inverse linear distance extrapolation factor (20 dB/decade)

#### 4.1.4 Test Result

[Below 1GHz]

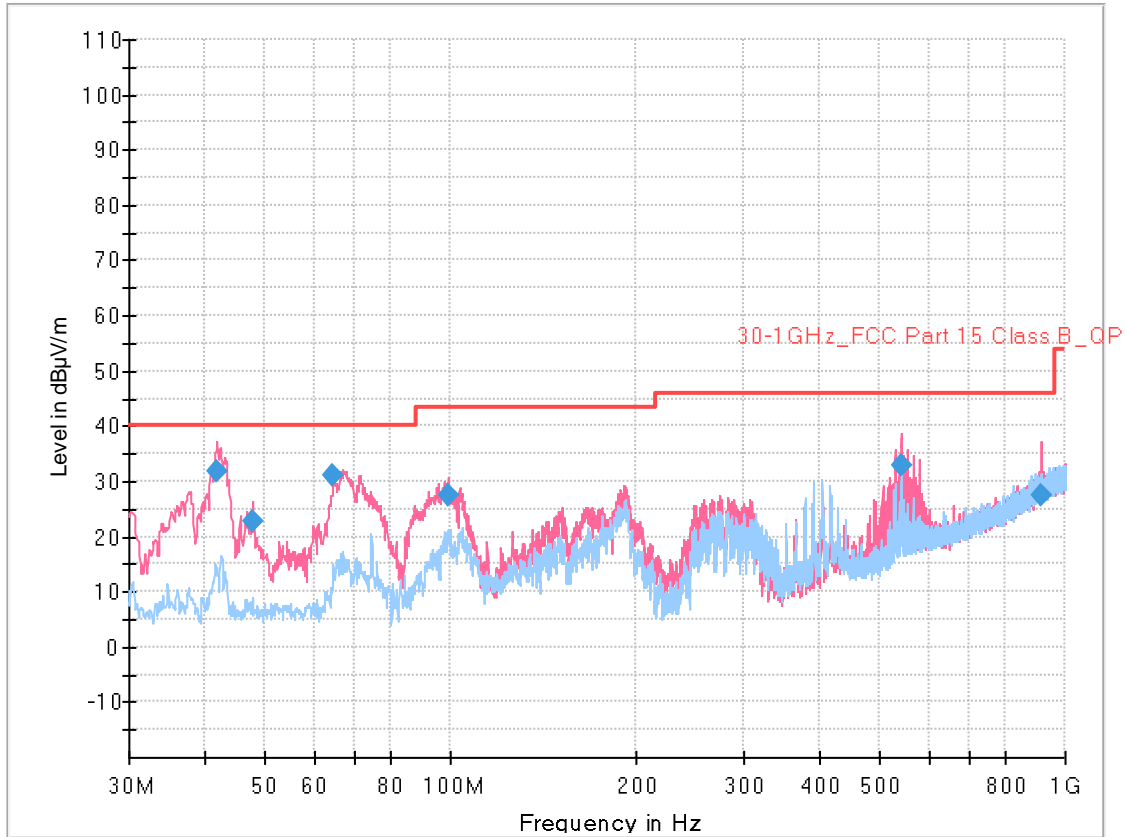

#### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	DET 2 (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.74	31.64	---	40	8.36	120	400.0	H	73	-26.8
47.75	22.66	---	40	17.34	120	100.0	V	278	-26.2
64.53	31.08	---	40	8.92	120	100.0	V	80	-27.1
99.45	27.40	---	44	16.10	120	400.0	H	254	-29.1
540.51	32.83	---	46	13.17	120	300.0	H	244	-15.7
913.77	27.26	---	46	18.74	120	100.0	V	54	-5.4

**[Above 1GHz]**

- Not Applicable.

\* Test Result

Complied

Not complied

## 4.2 Conducted Emission

### Environmental Conditions

Temperature	(19.3 °C)
Humidity	(38 % R.H.)
Test Area	Conducted Room
Test date	2024.01.10

### 4.2.1 Limits of conducted emission measurement

Frequency [MHz]	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66-56 *	58-46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50

\*The limit decreases linearly with the logarithm of frequency.

### 4.2.2 Measurement procedure

#### Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. The rear of table was located 0.4 m to the vertical conducted plane. EUT was power through the LISN, which was bonded to the ground plane. The LISN power was filtered. Each EUT power lead, except ground (safety) lead, was individually connected through a LISN to input power source. All I.O cables are positioned to simulate typical actual usage according to the test standard. Both lines of power cord, hot and neutral, were measured.

### 4.2.3 Used equipments


Equipment	Model	Manufacturer	Serial or Firmware (No./Ver.)	Next Cal. Date	Used
MEASUREMENT SOFTWARE	EMC32 VER 10.60.15	Rohde&Schwarz	-	-	<input checked="" type="checkbox"/>
Test Receiver	ESR7	Rohde&Schwarz	101616	2024.06.27	<input checked="" type="checkbox"/>
LISN	ENV216	Rohde&Schwarz	100409	2025.01.08	<input checked="" type="checkbox"/>
LISN	3825-2	EMCO	8901-1458	2025.01.04	<input type="checkbox"/>
PULSE LIMITER	EPL-30	lignex l	-	2025.01.04	<input type="checkbox"/>

#### 4.2.4 Test data

• Note. QP = Quasi-Peak, AV= Average , • Loss = LISN Loss + Cable Loss, • Measurement time : 1 s

#### 4.2.5 Test Result


[ HOT ] – [Multi Tap]

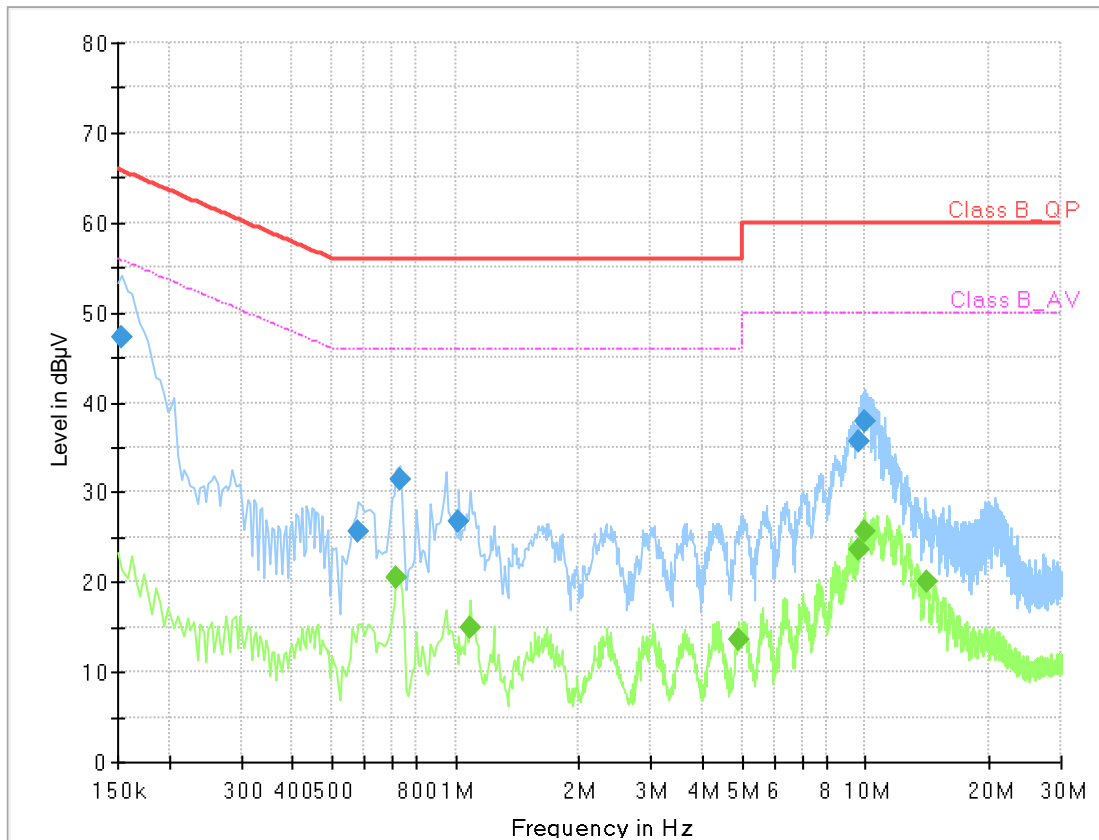

#### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.154	47.34	---	65.78	18.44	9	L1	11.0
0.580	25.60	---	56.00	30.40	9	L1	11.0
0.720	---	20.49	46.00	25.51	9	L1	10.3
0.730	31.39	---	56.00	24.61	9	L1	10.3
1.020	26.70	---	56.00	29.30	9	L1	10.3
1.090	---	14.87	46.00	31.13	9	L1	10.3
4.900	---	13.51	46.00	32.49	9	L1	10.7
9.620	---	23.64	50.00	26.36	9	L1	11.7
9.620	35.74	---	60.00	24.26	9	L1	11.7
9.910	---	25.73	50.00	24.27	9	L1	11.7
9.910	37.90	---	60.00	22.10	9	L1	11.7
14.090	---	19.98	50.00	30.02	9	L1	12.9

[ NEUTRAL ] – [ Multi Tap ]

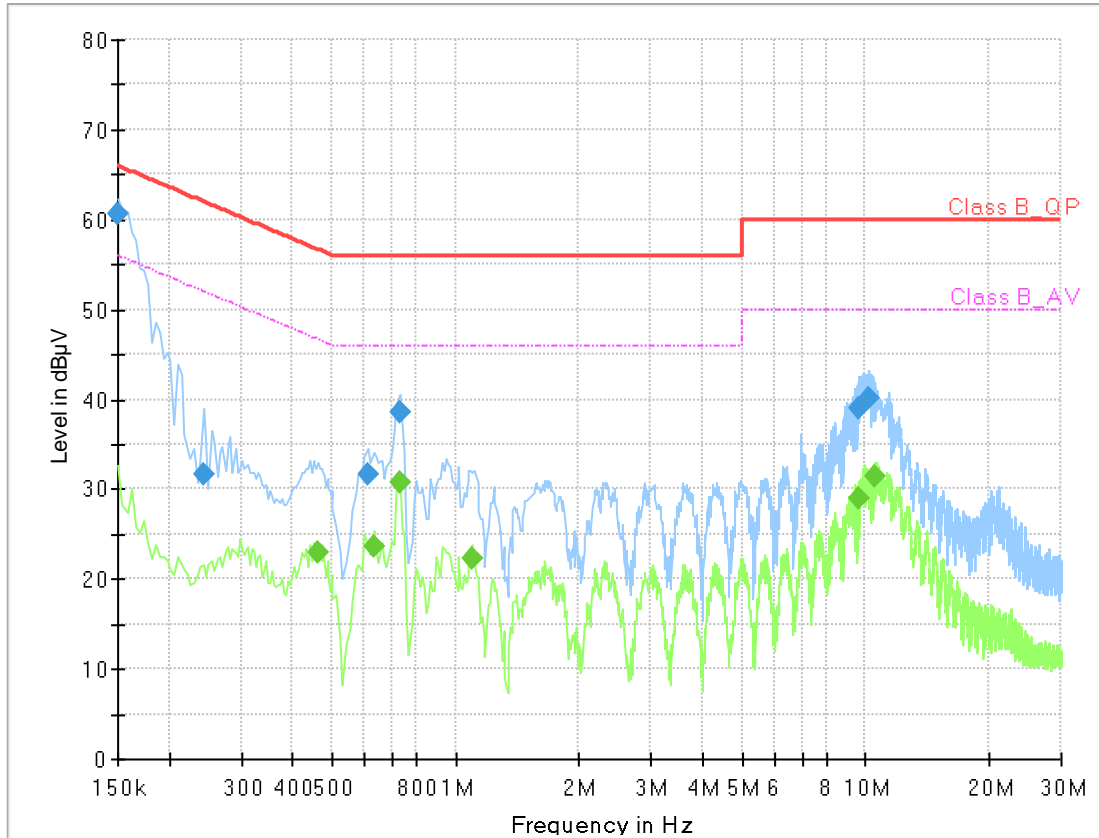

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.242	31.64	---	62.03	30.39	9	N	10.8
0.610	31.72	---	56.00	24.28	9	N	11.0
1.100	---	22.36	46.00	23.64	9	N	10.5
0.462	---	23.03	46.66	23.63	9	N	11.1
0.630	---	23.67	46.00	22.33	9	N	10.9
9.580	---	28.91	50.00	21.09	9	N	11.7
9.610	39.10	---	60.00	20.90	9	N	11.8
10.170	40.17	---	60.00	19.83	9	N	11.9
10.510	---	31.37	50.00	18.63	9	N	12.0
0.730	38.51	---	56.00	17.49	9	N	10.4
0.730	---	30.72	46.00	15.28	9	N	10.4
0.150	60.51	---	66.00	5.49	9	N	11.0

\* Test Result


Complied

Not complied

## 5. Test photographs

### Radiated Emission (Below 1GHz)

[ Front ]

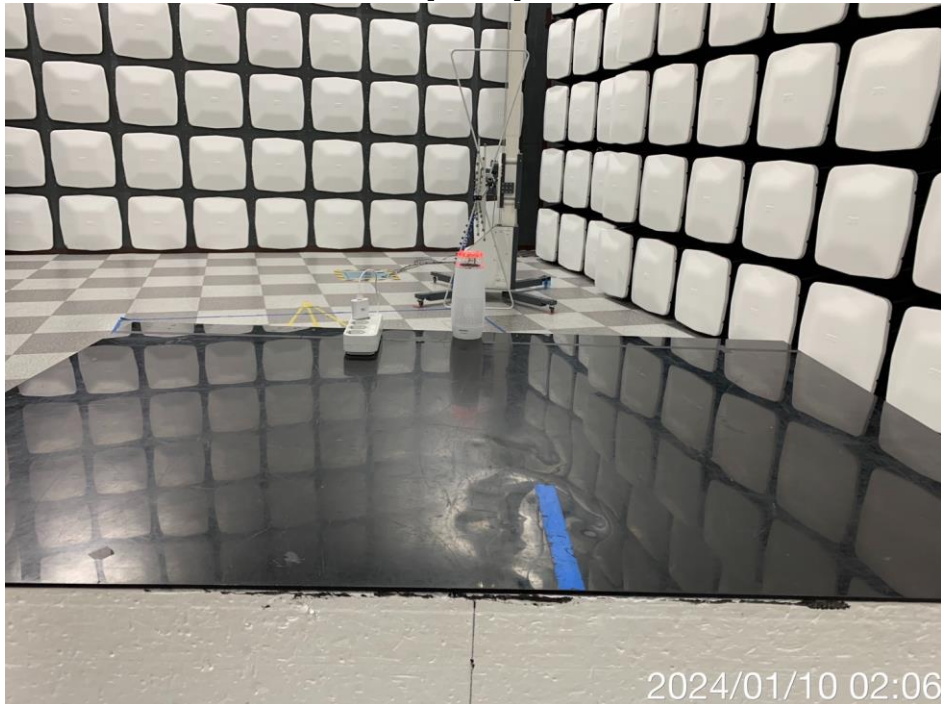

[ Rear ]



**Radiated Emission (Above 1GHz)**

[ Front ]

N/A


[ Rear ]

N/A




**Conducted Emission (Main Power)**

[ Front ]

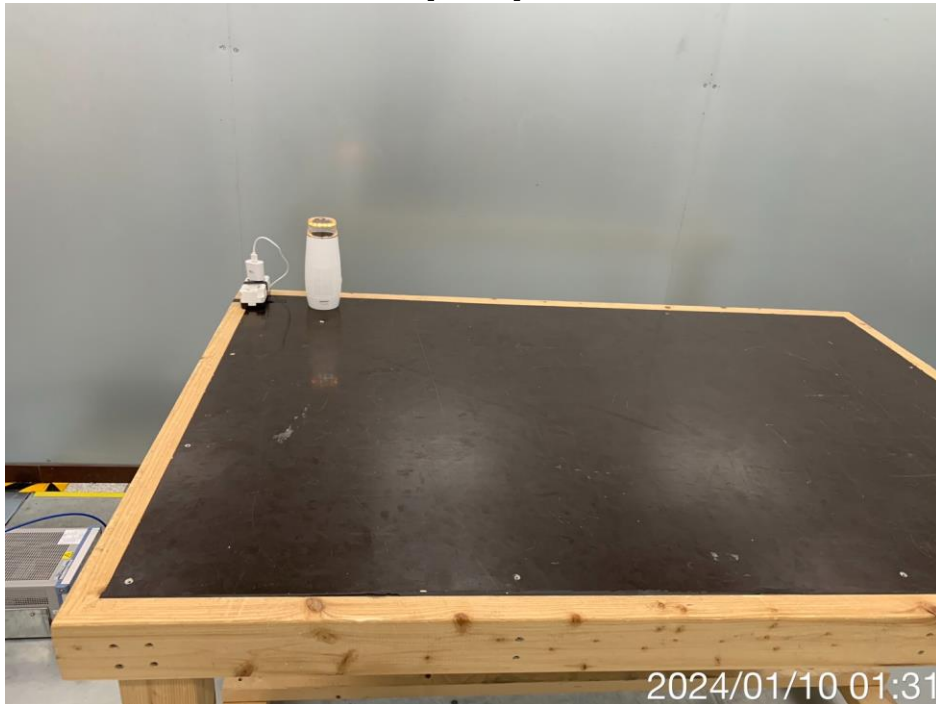

[ Rear ]

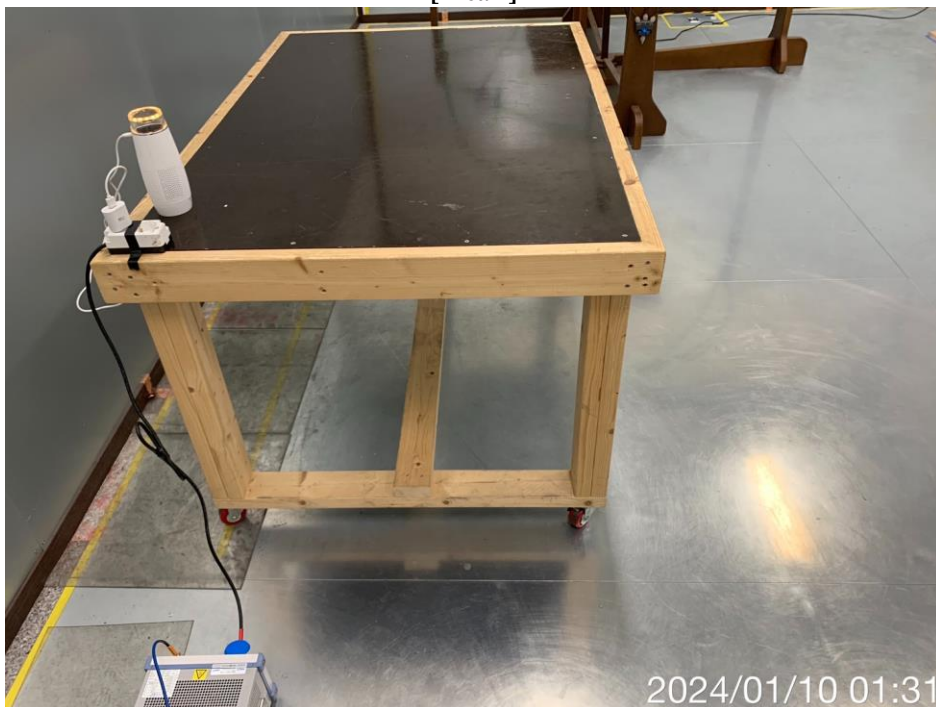

## 6. E.U.T. photographs


[ Front View ]



[ Rear View ]




[ Inside View ]

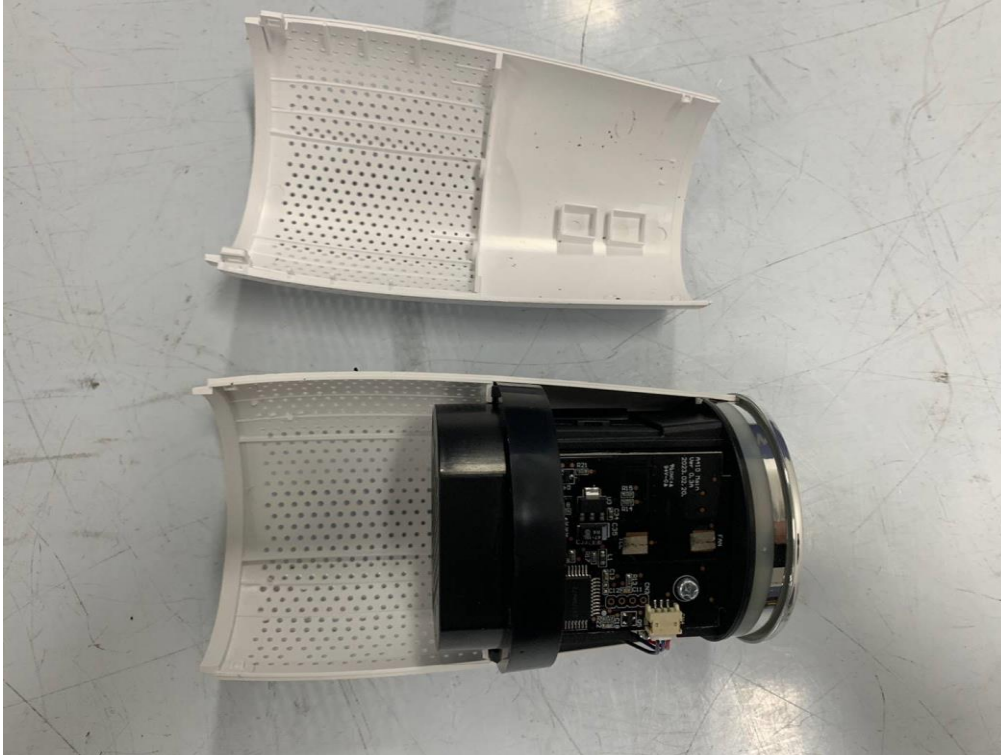

[ Board\_Front ]



[ Board\_Rear ]

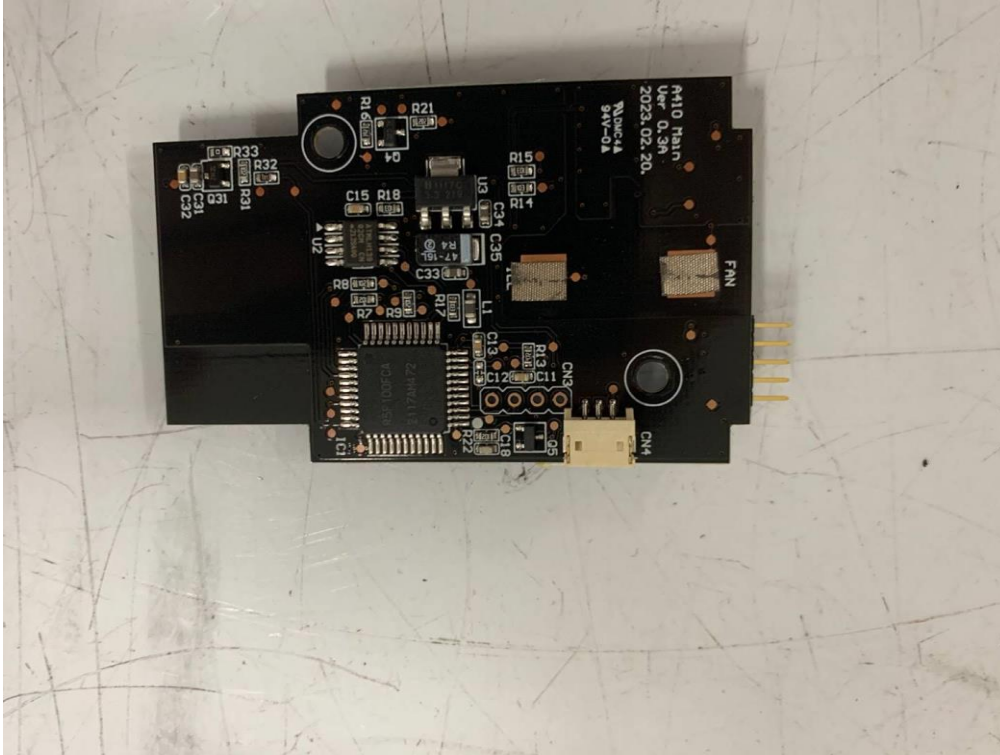

[ Port\_View ]



-THE END-